
FEAL

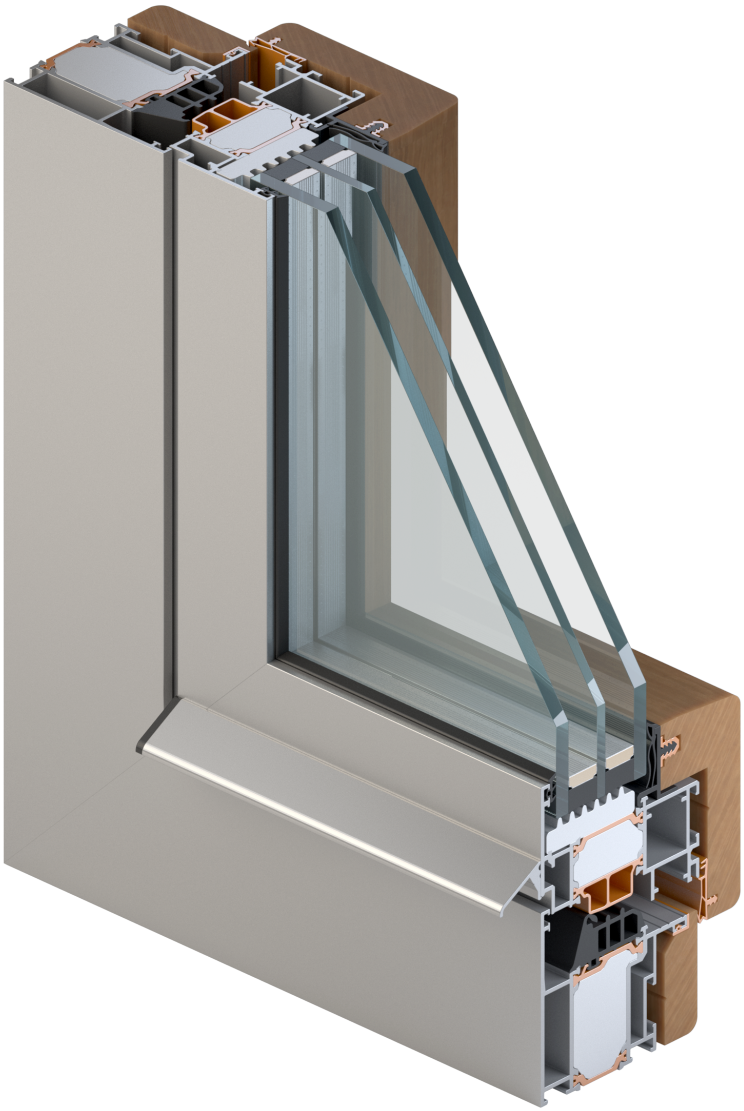

TERMO **75 DA**

SISTEM ZA PROZORE I VRATA

SYSTEM FOR WINDOWS AND DOORS

SADRŽAJ CONTENT

01	ZNAČAJKE SISTEMA	207.01.000-003
01	SYSTEM CHARACTERISTICS	207.01.000-003
02	ISPITIVANJA I CERTIFIKATI	207.02.000-009
02	TESTING AND CERTIFICATES	207.02.000-009
03	PROFILI	207.03.000-017
03	PROFILES	207.03.000-017
04	VEZNI ELEMENTI	207.04.000-007
04	CONNECTION ELEMENTS	207.04.000-007
05	PVC ELEMENTII	207.05.000-005
05	PVC ELEMENTS	207.05.000-005
06	MEHANIZMI	207.06.000-017
06	MECHANISMS	207.06.000-017
07	BRTVILA	207.07.000-007
07	GASKETS	207.07.000-007
08	DODACI	207.08.000-009
08	ACCESSORIES	207.08.000-009
10	PRESJECI	207.10.000-075
10	CROSS SECTIONS	207.10.000-075
11	OBRADA I MONTAŽA	207.11.000-081
11	PROCESSING AND MONTAGE	207.11.000-081
12	REZNE LISTE	207.12.000-027
12	CUTTING LISTS	207.12.000-027

Značajke sistema
System characteristics


Profili iz serije Termo 75 DA su dodatno ispunjeni termoizolacijskim materijalom, a s unutarnje strane nalaze se drvene obloge

- ispuna je od materijala s niskim koeficijentom vodljivosti topline λ /veći otpor prolaza topline/

  materijal: **XPS,** λ=0.035 W/mK

- Profiles from series Termo 75 DA are additionally filled with thermo insulating material and on the inner side there are wooden coverings
- Thermo insulating material has low thermal conductivity coefficient λ /higher heat transfer resistance/

  material: **XPS,** λ=0.035 W/mK

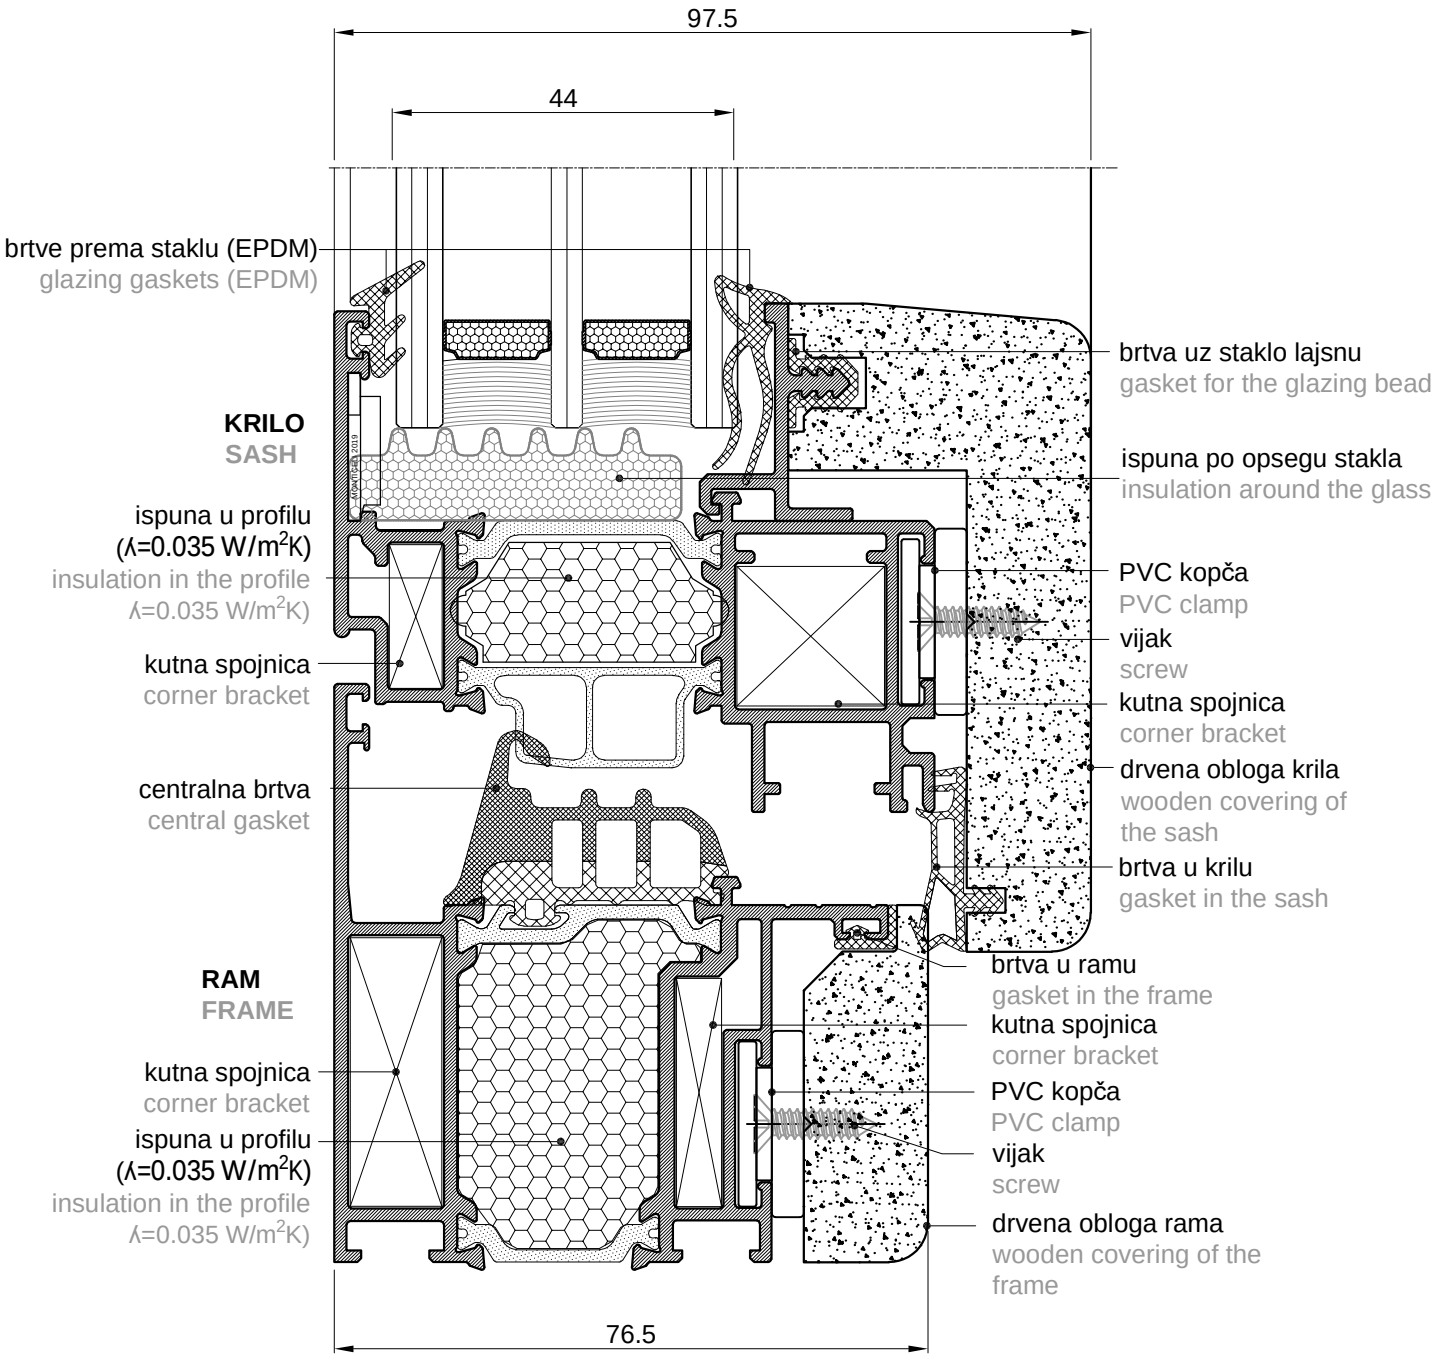

OPIS SISTEMA TERMO 75 DA
SYSTEM DESCRIPTION TERMO 75 DA

Sistem TERMO 75 DA je namijenjen za izradu prozora, balkonskih vrata, vrata (otvaranje unutra) i fiksnih stijena. To je sistem profila s prekinutim termičkim mostom i drvenom oblogom s unutarnje strane otvora. Osnovna ugradbena dubina rama iznosi 76,5 mm. Prekid termičkog mosta se postiže poliamidnim trakama od 26 i 34 mm. Radi dodatnog poboljšanja termičkih karakteristika profila, u komore profila se ugrađuju profilirani štapići od XPS -a (ekstrudirani polistiren – λ=0.035 W/m^{2}K). Brtvljenje je izvedeno EPDM brtvama. Mogući tipovi otvaranja prozora: otklopno, zaokretno, otklopno-zaokretno.

System **TERMO 75 DA** is used for production of windows, balcony doors, doors (opening inwards) and fixed glass walls.
It is a system with thermal break profiles and the wooden covering on the interior side. The basic installation depth of the frame is 76.5 mm. The thermal break is achieved with polyamide strips of 26 and 34 mm.
To achieve additional improvement of thermal characteristics of the profiles, XPS (extruded polystyrene - λ=0.035 W/m^{2}K) profiles are inserted in the chamber of aluminium profiles. The sealing is performed with EPDM gaskets.
Possible types of opening: tilt, turn, tilt and turn.

Karakteristike sistema:

-dubina okvira..... 76.5mm
-dubina krila..... 97.5 mm
-dubina ispune.....do 44 mm
-poliamidne trake..... 26 i 34 mm
-max.težina krila.....130 kg

-zrakopropusnost..... EN 12207
-vodonepropusnost..... EN 12208
-otpornost na opterećenje vjetrom... EN 12210
-zaštita od buke..... EN ISO 717-1
-protuprovalnost..... EN 1627
-proračun Uw koeficijenta..... DIN EN ISO 10077-2 (≥1,0 W/m²K)

-osnovni materijal..... EN AW-6060
-materijal unutrašnje obloge..... drvo
-materijal poliamidne trake..... PA 66 GF25
-materijal brtvljenja..... EPDM
-površinska obrada..... DIN 17611
-kontrola kvalitete..... DIN EN ISO 9001

System characteristics:

-frame depth..... 76.5 mm
-sash depth..... 97.5 mm
-infill depth..... up to 44 mm
-polyamide strips..... 26 and 34 mm
-max. sash weight.....130 kg

-air permeability..... EN 12207
-watertightness..... EN 12208
-resistance to wind load..... EN 12210
-airborne sound insulation.... EN ISO 717-1
-burglary resistence..... EN 1627
-calculation of the Uw coefficient... DIN EN ISO 10077-2 (≥1,0 W/m²K)








-profile material..... EN AW-6060
-covering material..... wood
-polyamide strips material..... PA 66 GF25
-gasket material..... EPDM
-surface treatment..... DIN 17611
-quality control..... DIN EN ISO 9001

Ispitivanja i certifikati
Testing and certificates

ISPITIVANJA I CERTIFIKATI TESTING AND CERTIFICATES				
Vrsta ispitivanja Type of test	Jednokrilni prozor Single casement window	Dvokrilni prozor Double casement window	Jednokrilna b.vrata Single balcony door	Fiksni prozor Fixed window
Zrakopropusnost Air permeability EN12207	**class 4**	**class 4**	**class 4**	**class 4**
Vodonepropusnost Watertightness EN 12208	**class E1200**	**class E1500**	**9A**	**class E1500**
Otpornost na opterećenje vjetrom Resistance to wind load EN 12210	**C5/B5**	**C5/B5**	**C4/B4**	**C5/B5**
Buka Rw Airborne sound reduction EN ISO 717-1	Float 6/SZR 16/Float 4/SZR 16/Float 6 .....35 dB VSG 44.2SC/SZR 12/Float 4/SZR 12/Float 6 .....39 dB VSG 44.2SC/SZR 24/VSG 44.2SC .....41 dB VSG 44.2SC/SZR 24/VSG 44.2SC (with filling) .....42 dB			
Protuprovalnost Burglar resistance EN 1627	**RC2**		**RC2**	
Otpornost na istezanje, torziju... Resistance at strain, torsion...				
Pendl test Impact resistance test EN 13049				
Protupožarnost Fire resistance test DIN EN 1363-1				

Proračun koeficijenta prolaza topline
Calculation of thermal transmittance

http://termika.feal.ba/

		Uf1 W/m²K	Uf2 W/m²K	Uf3 W/m²K	Uf4 W/m²K	Uf5 W/m²K	Uf6 W/m²K	Uf7 W/m²K	Ug W/m²K	Uw W/m²K
	Termo 75 DA -fiksno- -fixed field- (1230x1480)	**1.2** *** 2,0**							0,7 (Ψ =0.045)	0,92 * 1,1
									0,5 (Ψ =0.045)	0,77 * 0,93
	Termo 75 DA -otkl.-zao.s fiks. dijelom- -tilt & turn with fixed field- (1600x1480)	**1.2** *** 2,0**	**1.3** *** 1,8**	**1.3** *** 1,8**					0,7	≥1,0 * ≥1,1
									0,5	≥0,89 * ≥0,96
	Termo 75 DA -otklopno -zaokretno- - tilt & turn window- (1230x1480)		**1.3** *** 1,8**						0,7 (Ψ=0.045)	1,0 * 1,2
									0,5 (Ψ=0.045)	0,88 * 1,0
	Termo 75 DA -dvokrilno otklopno -zaokretno- -double sash tilt & turn window- (1600x1480)		**1.3** *** 1,8**		**1.3** *** 1,7**				0,7 (Ψ=0.045)	1,1 * 1,3
									0,5 (Ψ=0.045)	0,94 * 1,1
	Termo 75 DA -dvokrilno-otkl. -zaok. s nadsvijetlom- -double sash tilt & turn with overhead op. (1600x1980)		**1.3** *** 1,8**		**1.3** *** 1,7**	**1.3** *** 1,7**			0,7	1,1 * 1,3
									0,5	0,98 * 1,2
	Termo 75 DA -balkonska vrata- -balcony door- (1100x2200)		**1.3** *1,8						0,7	1,0 * 1,1
									0,5	0,85 * 1,0
	Termo 75 DA -dvokrilna balkonska vrata- -double balcony door- (1600x2200)		**1.3** *** 1,8**		**1.3** *** 1,7**				0,7 (Ψ=0.045)	1,0 * 1,2
									0,5	0,91 * 1,1


* Uf i Uw izračuni bez XPS ispuna u profilima

* Uf and Uw calculations without XPS insulation in the profiles


Statički dijagram Težina stakla Structural diagram glass load

Osnovni uvjeti:
Basic assumptions:

- fdop. / adm. = 3 mm
- Težina stakla Glass load (0.15 kN/m²)

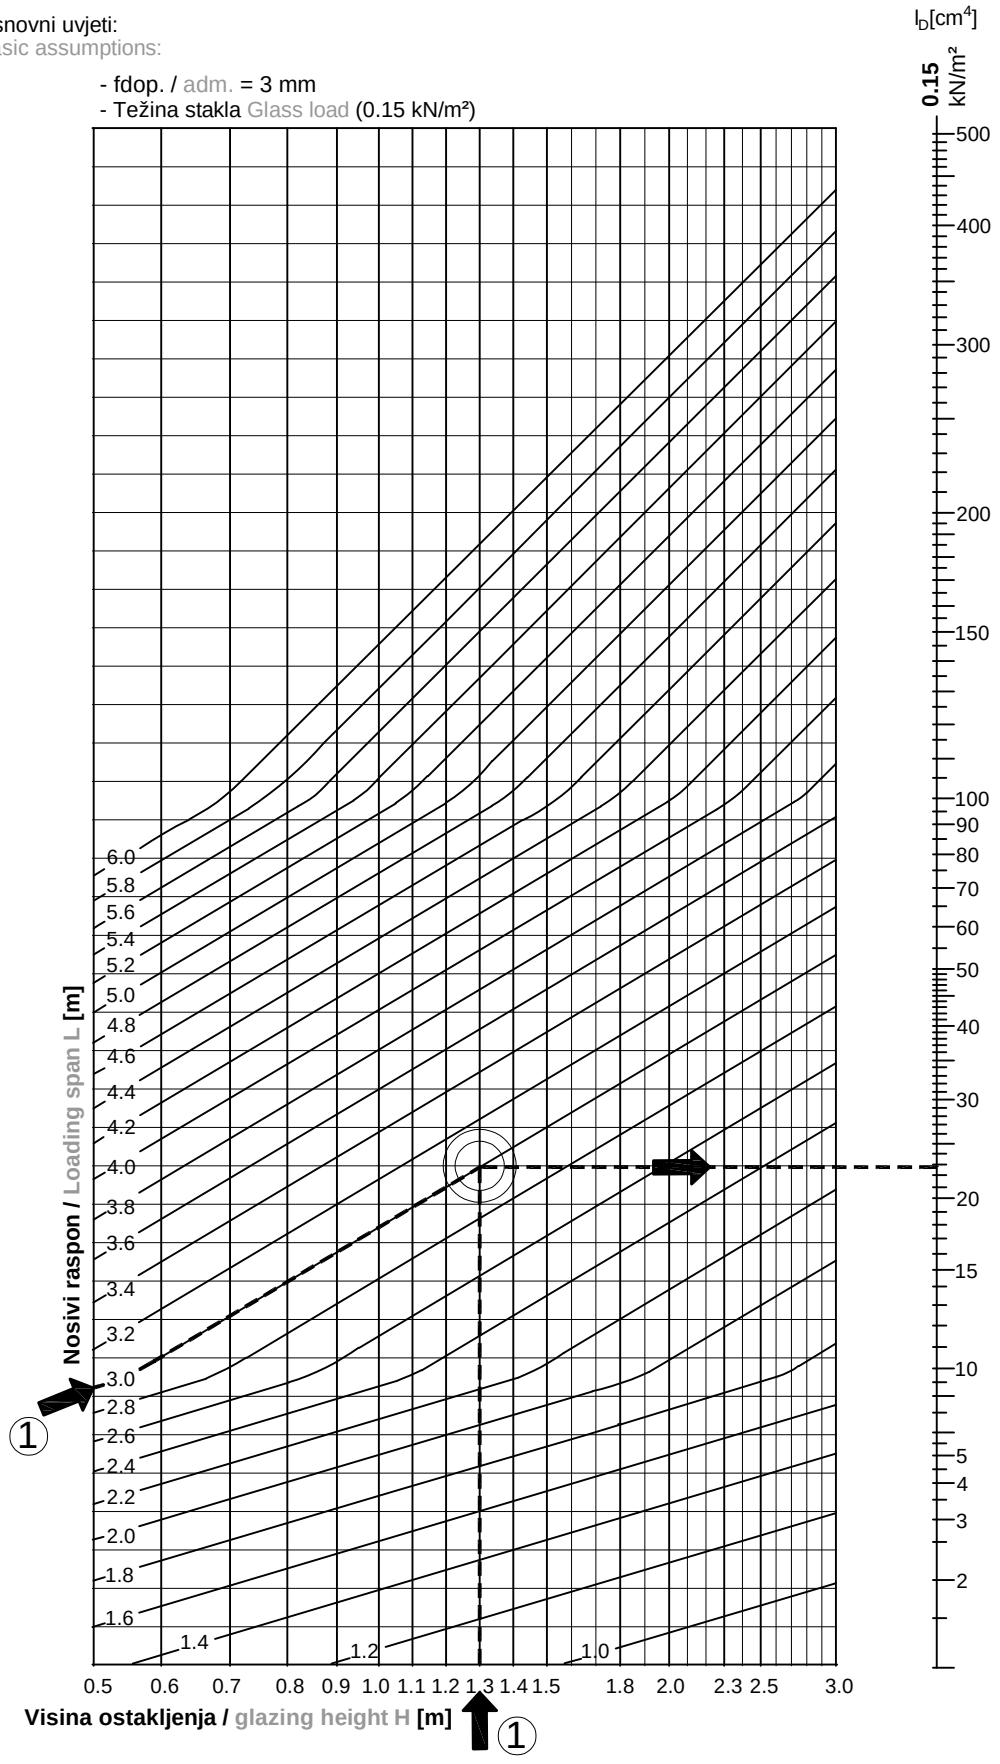

Statički dijagram Težina stakla Structural diagram glass load

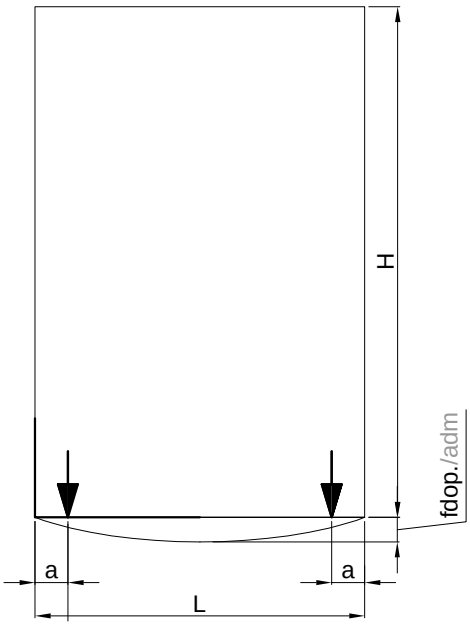

1. Ulazni podaci / Input data:

Širina raspona / Load span:
L= 3.00 m

Visina ostakljenja /Glazing height:
H = 1.30 m

Debljina ostakljenja /Glazing thickness:
D = 20 mm*

* uzima se u obzir samo debljina staklenih ploha
* only glass pane thickness is calculated

2. Određivanje potrebnog momenta Iy pod jediničnim opt. 0.15 kN/m²
Determination of required moment Iy under unit load 0.15 kN/m²

za / for qs 0.15 kN/m²
$Iy_{0.15}$ = 23 cm⁴ (① dijagram / diagram)

3. Određivanje potrebnog momenta Ix pod opterećenjem na objektu
Determination of required moment Ix under load on the building

Debljina stakla Glass thickness D=20 mm ==>> K=3.33


Potrebni / required $Iy=K_{20} \cdot Iy_{0.15}$ = (3.33) · 23 cm⁴ =77 cm⁴

4. Odabrati profil iz tablice
Select the profile from the table

! Vlastita težina profila nije uzeta u opterećenje !
The dead weight of the profile is not considered !

Statičke jednadžbe Structural formulas

Nosač na dva oslonca / Beam on 2 supports

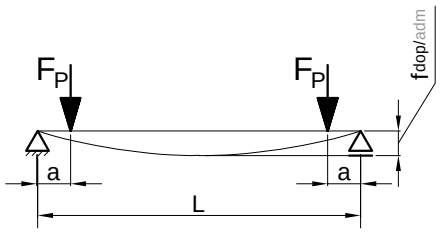

a = 150 mm fiksno / fixed

$$F = \frac{H \cdot L}{2} \cdot q_S$$

$$Iy = \frac{F \cdot a}{24 \cdot E \cdot fdop\,/\,adm.} \cdot (3 \cdot L^2 - 4\,a^2)$$

I_y	(cm^4) = Moment inercije / Moment of inertia
F_P	(kN) = Pojedinačno opterećenje / Single load
a	(cm) = Udaljenost oslonca / Support distance
H	(cm) = Visina stakla / Pane height
L	(cm) = Širina raspona / Load span
q_S	(kN/cm²) = Težina stakla / Glass weight
fdop. / adm.	(cm) = dop.progib / adm. deflection


Tablica 1. Težina stakla
Table 1. Glass weight

Koeficijent K Coefficient K	1	1.33	1.66	2	2.33	2.66	3	3.33	3.66	4	4.33	4.66	5	5.33	5,66	6	6.33	6.66	7	7.33	7.66	8
kN/m²	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.80	0.85	0.90	0.95	1.00	1.05	1.10	1.15	1.20	1.25
kg/m²	15	20	25	30	35	40	45	50	55	60	65	70	80	85	90	95	100	105	110	115	120	125
Debl. stakla (mm) D Glass thick. (mm) D	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48

①


Statički dijagram -opterećenje vjetrom Structural diagram of wind load


Trokutasto i trapeziodno opterećenje Triangular and trapezoidal load

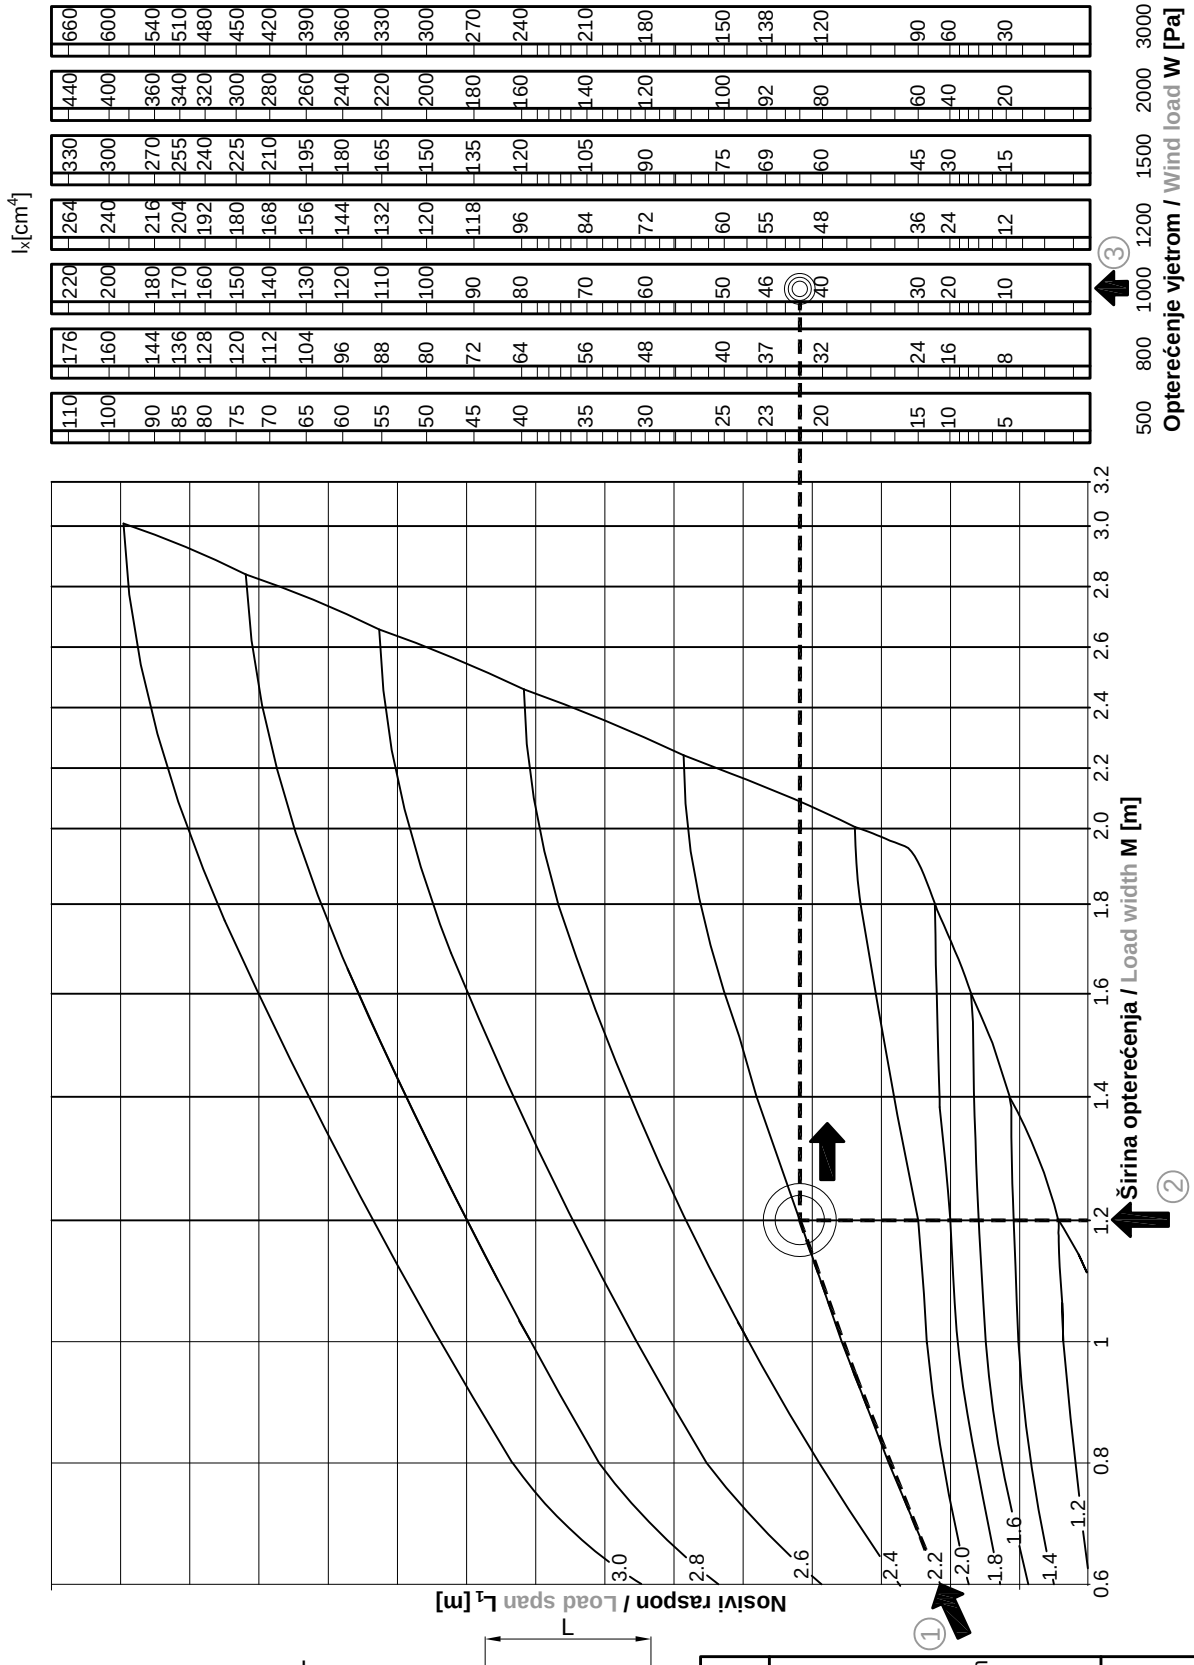

Pa(N/m^2)	400	500	600	700	800	900	1000	1100	1200	1400	1500	1600	1800	2000	2200	2400	3000
kPa(kN/m^2)	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.4	1.5	1.6	1.8	2.0	2.2	2.4	3.0
km/h	89.6	100.1	109.7	118.5	126.7	134.4	141.6	148.5	155.1	167.7	173.5	179.1	190.0	200.3	210.1	219.4	245.3
m/s	24.9	27.8	30.5	32.9	35.2	37.3	39.3	41.3	43.1	46.5	48.2	49.8	52.8	55.6	58.4	60.9	68.1

Osnovni uvjeti
Basic assumptions:
fdop. / adm. =L / 200
Trapezoidno opterećenje
Trapeziodal load
M = $(M_1+M_2)2$





Primjer 1 / Example 1:

① Nosivi raspon / Load span: L= 2.20 m


② Širina opterećenja / Load width: M_1= 1,0 m, M_2=1,4 m, $M=(M_1+M_2)/2=1,2$ m

③ Tlak vjetra* Wind pressure* = 1000 Pa



Rezultat/ Result
Potrebni Ix / Required Ix = 42 cm^4

Odabrati odgovarajući profil iz tablice profila
Select the profile from the profile table

Vrijednosti momenta inercije
Moment of inertia values






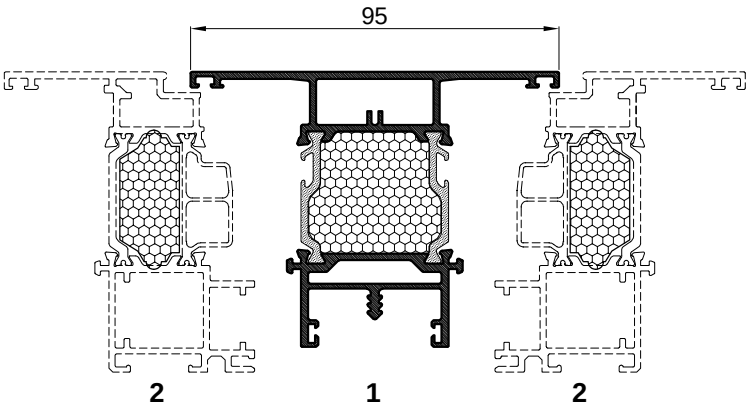
Tip otvaranja / Opening type	Izgled / View	Profili /Profiles 1+2	I_x (cm^4)	Profili /Profiles 2+1+2	I_x (cm^4)
1		FT-0420F+FT-0410F	**55.82**	FT-0410F+FT-0420F+FT-0410F	**84.96**
1+2 *		FT-0420F+FT-0411F	**61.41**	FT-0411F+FT-0420F+FT-0411F	**96.14**
2+1+2 *					

Profil /Profile 1	I_x (cm^4)
FT-0420F	**26.68**

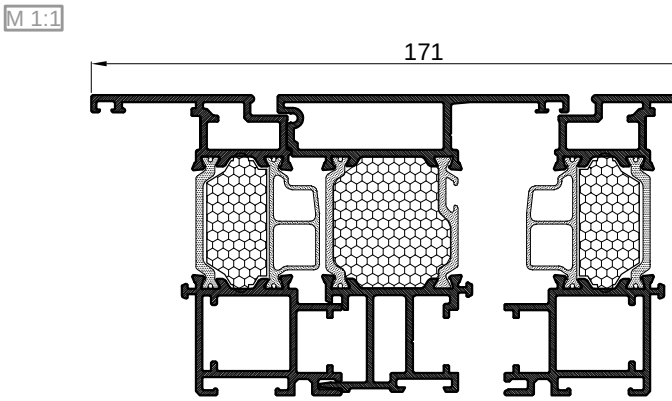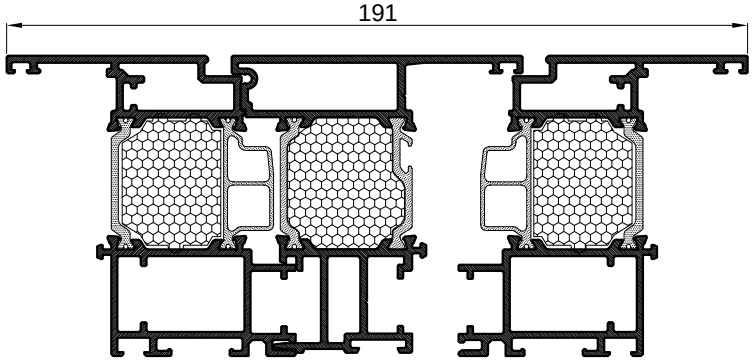Izgled / View	Profili / Profiles	I_x (cm^4)
* 	(FT-0410F i FT-0421F) + FT-0410F	**90.43**
* 	(FT-0411F i FT-0421F) + FT-0411F	**101.6**



* Preduvjet: minimalno tri točke ključanja, s maksimalnim međusobnim razmakom 800 mm
* Precondition: min. 3 locking points, with max. distance between locking points 800 mm

Vrijednosti momenta inercije
Moment of inertia values

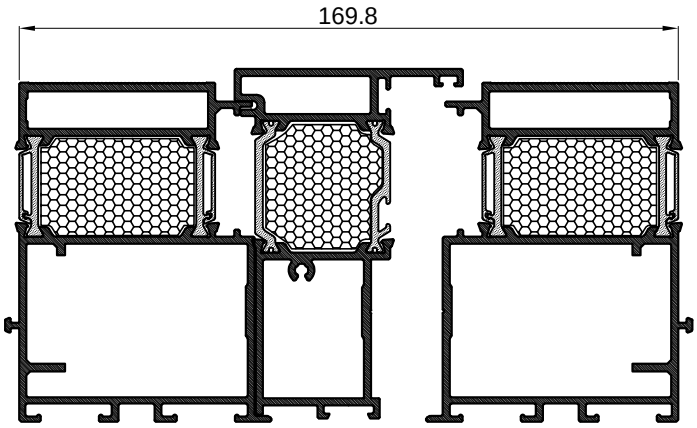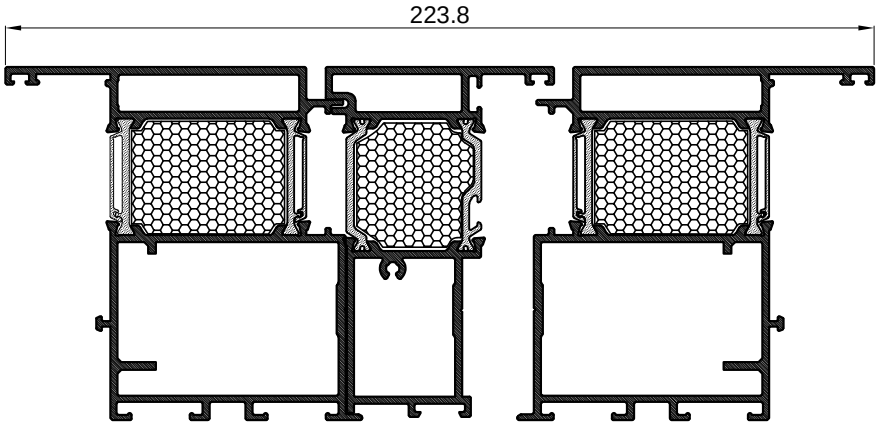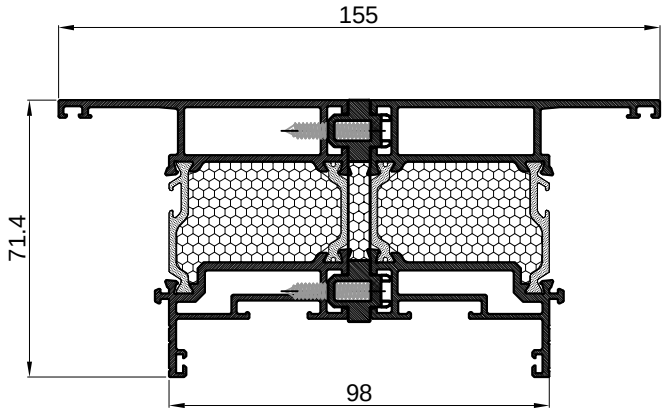Tip otvaranja Opening type	Izgled View	Profili Profiles	I_x (cm^4)
 *		(FT-0412F i FT-0424F) + FT-0412F	**151.97**
 *		(FT-0413F i FT-0424F) + FT-0413F	**174.88**
		(FT-0400F i F-1597 i F-1597 i FT-0400F)	**49.47**


* Preduvjet: minimalno tri točke ključanja, s maksimalnim međusobnim razmakom 800 mm
* Precondition: min. 3 locking points, with max. distance between locking points 800 mm

Vrijednosti momenta inercije
Moment of inertia values

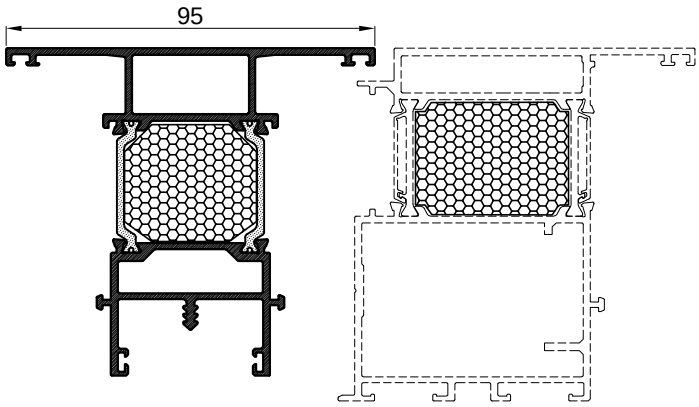
Tip otvaranja Opening type	Izgled View	Profili /Profiles **1+2**	I_x (cm^4)
 **1+2**		FT-0423F + FT-0412F	**94.96**
		FT-0423F + FT-0413F	**106.88**

* Preduvjet: minimalno tri točke ključanja, s maksimalnim međusobnim razmakom 800 mm
* Precondition: min. 3 locking points, with max. distance between locking points 800 mm


Profili
Profiles




FT-0400F
kg/m 1.724




FT-0401F
kg/m 1.273




FT-0410F
kg/m 1.51




FT-0411F
kg/m 1.746




FT-0420F
kg/m 1.795




FT-0421F
kg/m 1.713




FT-0443F
kg/m 1.0554




FT-0423F
kg/m 2.001

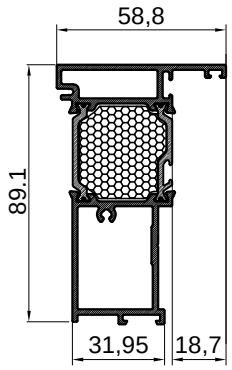


FT-0424F
kg/m 1.759




FT-0404F
kg/m 2.125




FT-0403F
kg/m 1.808




FT-0412F
kg/m 2.218




FT-0444F
kg/m 2.538




FT-0422F
kg/m 1.455




F-1232
kg/m 0.404




FT-0413F
kg/m 2.396




F-029
kg/m 0.953




F-1725 - eloksaža S-10
kg/m 0.307

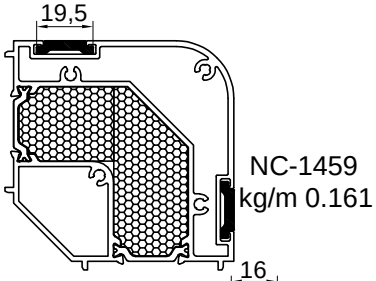


NC-1459
kg/m 0.161




F-1353
kg/m 0.279




F-1200
kg/m 0.16




F-1350 - eloksaža S-10
kg/m 0.293




F-1597
kg/m 0.3



F-1842
kg/m 0.181




F-1543
kg/m 0.279




F-1596
kg/m 0.142




F-1699
kg/m 0.31



F-1552
kg/m 0.133




Z40-657
kg/m 0.186




F-0228
kg/m 0.153

PROFIL BEZ XPS ISPUNE U NAZIVU NEMA NASTAVKA „F"

PROFILES WITHOUT XPS DO NOT HAVE ENDING "F"

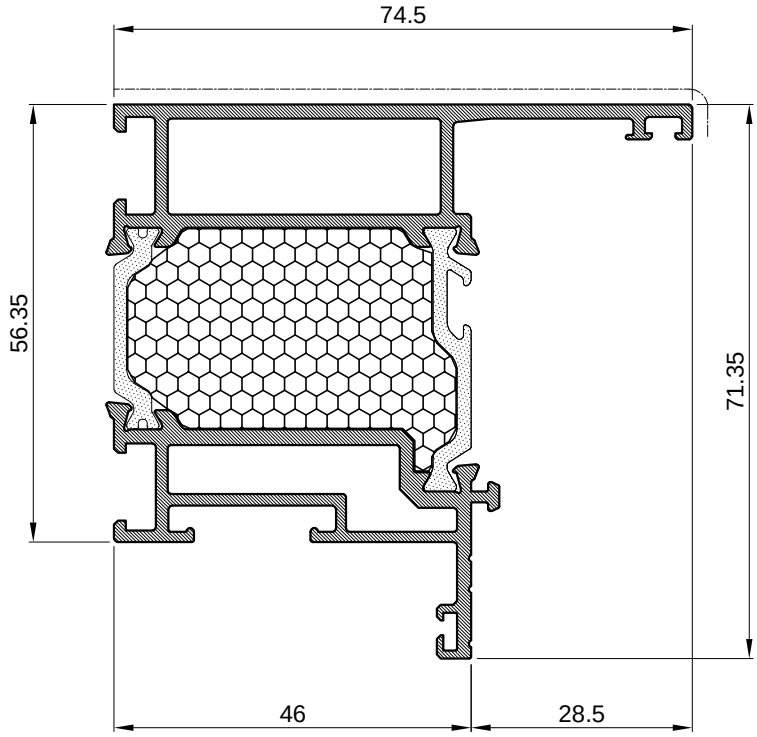


Profil rama Frame profile		
Art.Br. Art.No.	**FT-0400F**	
Težina Weight	kg/m	1.724
Opseg Perimeter	mm	407.68
Moment inercije Moment of inertia	Ix (cm4)	21.25
	Iy (cm4)	20.29
	Wx (cm3)	6.75
	Wy (cm3)	4.41
L	mm	6500

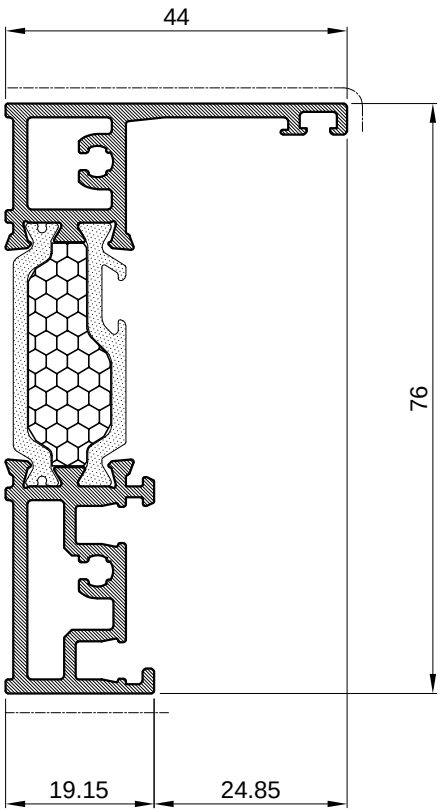


Profil praga Threshold profile		
Art.Br. Art.No.	**FT-0401F**	
Težina Weight	kg/m	1.273
Opseg Perimeter	mm	321.79
Moment inercije Moment of inertia	Ix (cm4)	22.73
	Iy (cm4)	3.69
	Wx (cm3)	7.54
	Wy (cm3)	1.14
L	mm	6500

PROFIL BEZ XPS ISPUNE U NAZIVU NEMA NASTAVKA „F"

PROFILES WITHOUT XPS DO NOT HAVE ENDING "F"

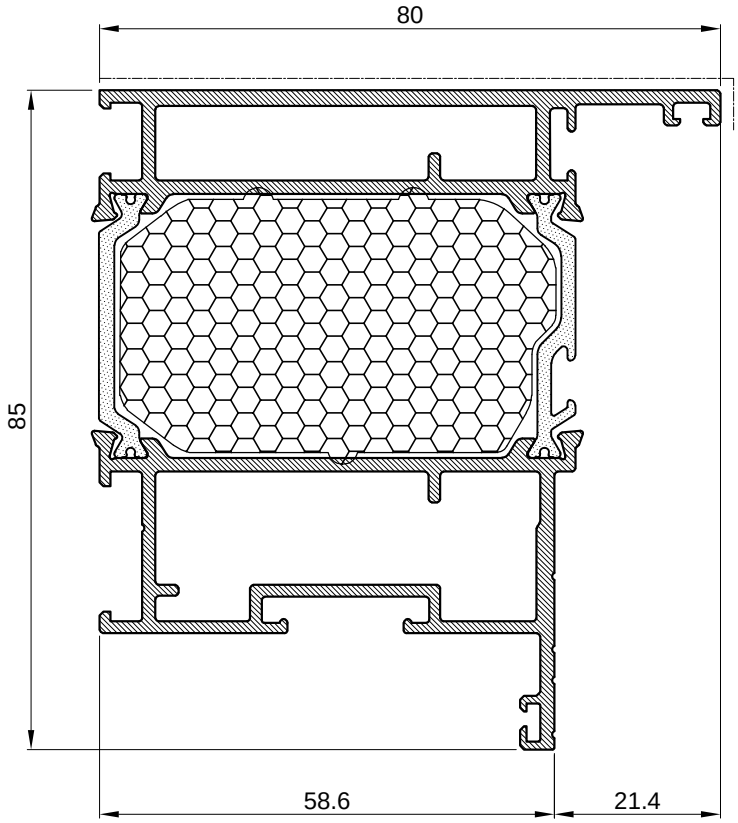


Profil rama Frame profile		
Art.Br. Art.No.	**FT-0404F**	
Težina Weight	kg/m	2.125
Opseg Perimeter	mm	443
Moment inercije Moment of inertia	Ix (cm4)	39.51
	Iy (cm4)	33.74
	Wx (cm3)	10.6
	Wy (cm3)	7.46
L	mm	6500

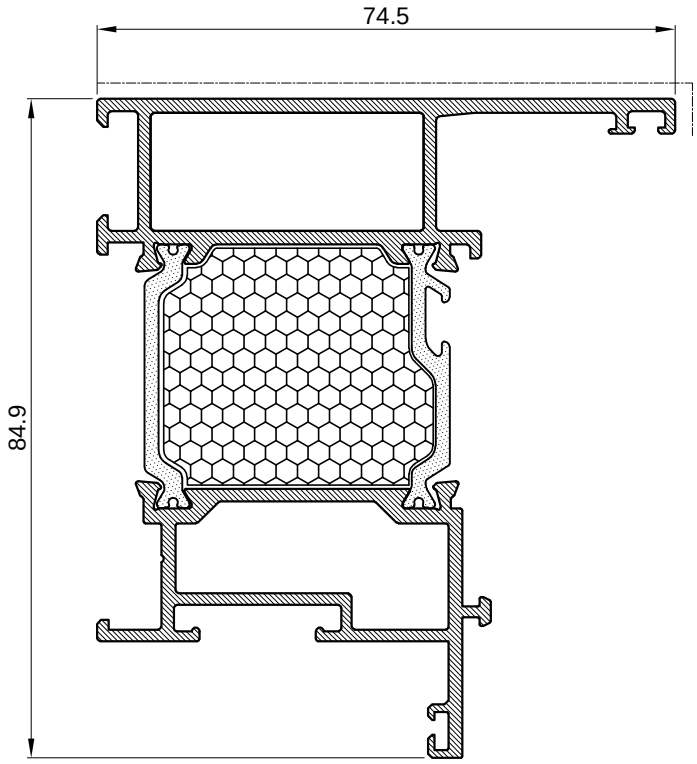


Profil rama Frame profile		
Art.Br. Art.No.	**FT-0403F**	
Težina Weight	kg/m	1.808
Opseg Perimeter	mm	454.26
Moment inercije Moment of inertia	Ix (cm4)	33.50
	Iy (cm4)	20.09
	Wx (cm3)	9.02
	Wy (cm3)	4.53
L	mm	6500

PROFIL BEZ XPS ISPUNE U NAZIVU NEMA NASTAVKA „F"

PROFILES WITHOUT XPS DO NOT HAVE ENDING "F"

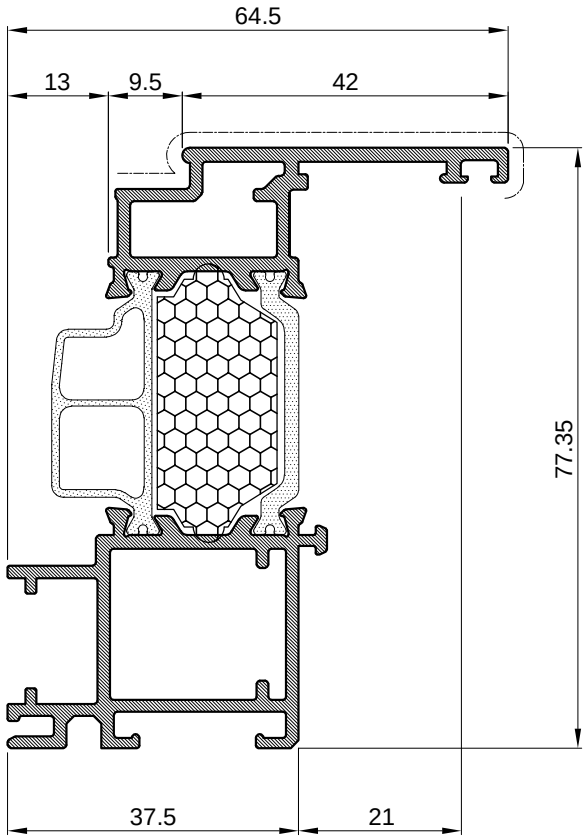


Profil krila Sash profile		
Art.Br. Art.No.	**FT-0410F**	
Težina Weight	kg/m	1.51
Opseg Perimeter	mm	407
Moment inercije Moment of inertia	Ix (cm4)	29.14
	Iy (cm4)	10.23
	Wx (cm3)	10.11
	Wy (cm3)	2.70
L	mm	6500

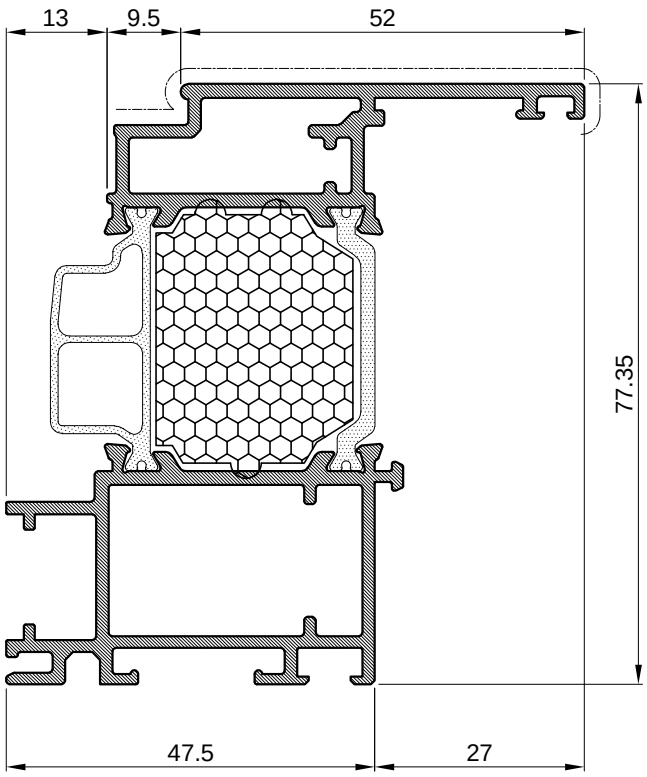


Profil krila Sash profile		
Art.Br. Art.No.	**FT-0411F**	
Težina Weight	kg/m	1.746
Opseg Perimeter	mm	451
Moment inercije Moment of inertia	Ix (cm4)	34.73
	Iy (cm4)	17.41
	Wx (cm3)	11.96
	Wy (cm3)	4.08
L	mm	6500

PROFIL BEZ XPS ISPUNE U NAZIVU NEMA NASTAVKA „F"


PROFILES WITHOUT XPS DO NOT HAVE ENDING "F"

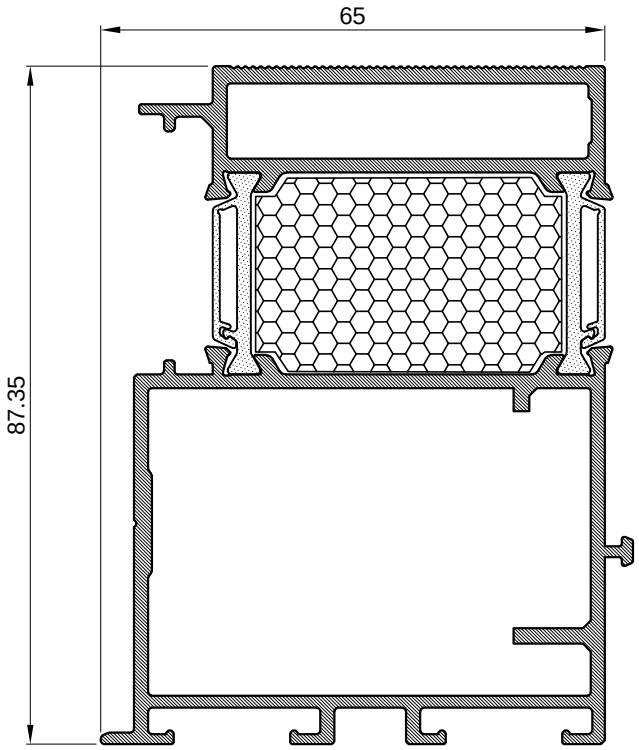


Profil krila Sash profile		
Art.Br. Art.No.	**FT-0412F**	
Težina Weight	kg/m	2.218
Opseg Perimeter	mm	408.92
Moment inercije Moment of inertia	Ix (cm4)	53.96
	Iy (cm4)	34.76
	Wx (cm3)	15.53
	Wy (cm3)	9.51
L	mm	6500

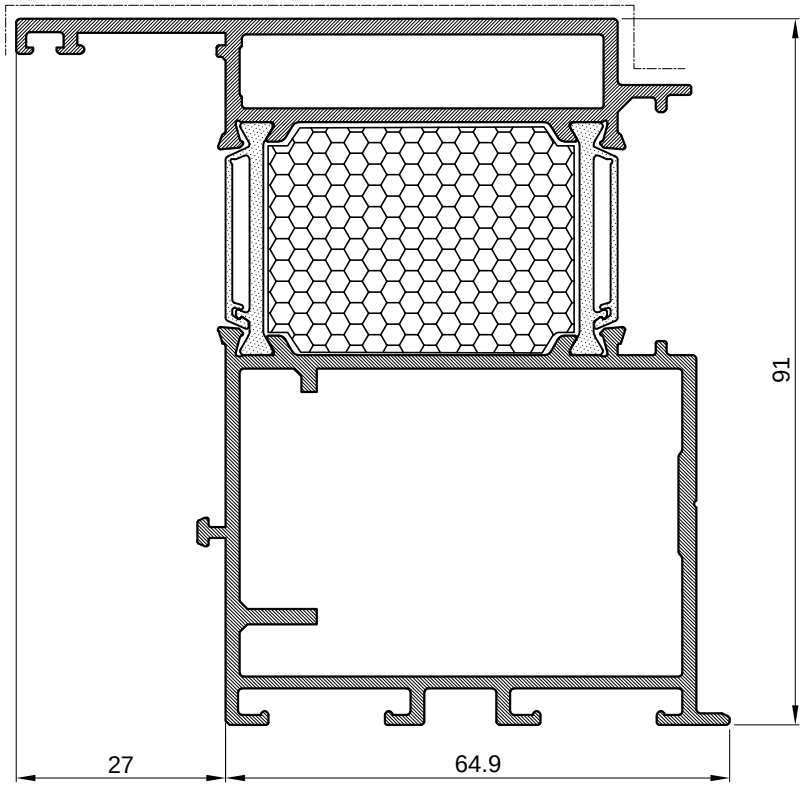

Profil krila Sash profile		
Art.Br. Art.No.	**FT-0413F**	
Težina Weight	kg/m	2.396
Opseg Perimeter	mm	569.11
Moment inercije Moment of inertia	Ix (cm4)	65.88
	Iy (cm4)	45.42
	Wx (cm3)	17.6
	Wy (cm3)	8.7
L	mm	6500

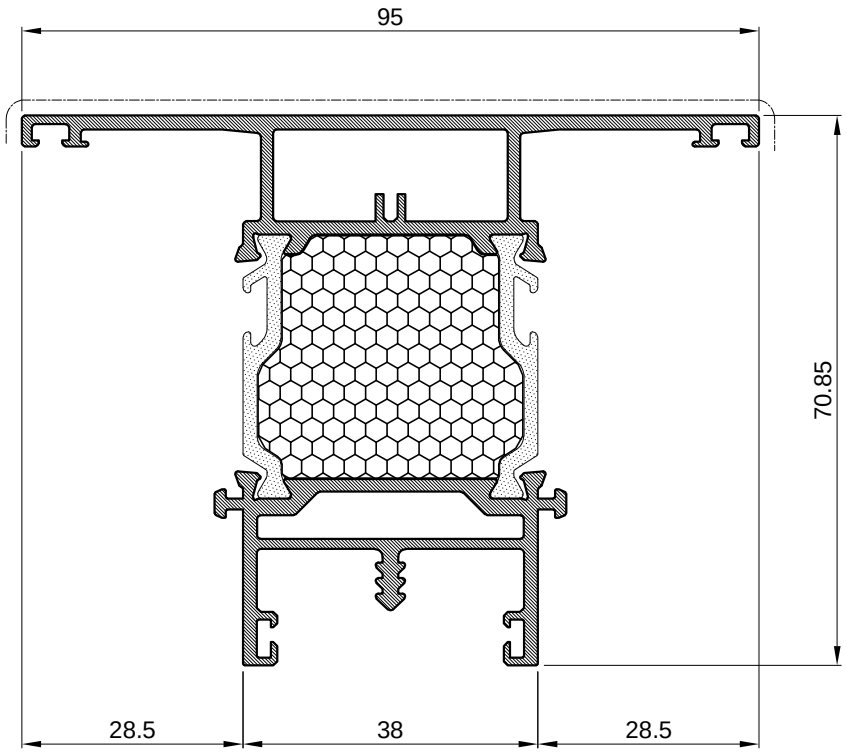


Profil prečke Window mullion profile		
Art.Br. Art.No.	**FT-0420F**	
Težina Weight	kg/m	1.795
Opseg Perimeter	mm	496.60
Moment inercije Moment of inertia	Ix (cm4)	26.68
	Iy (cm4)	22.52
	Wx (cm3)	8.68
	Wy (cm3)	4.74
L	mm	6500

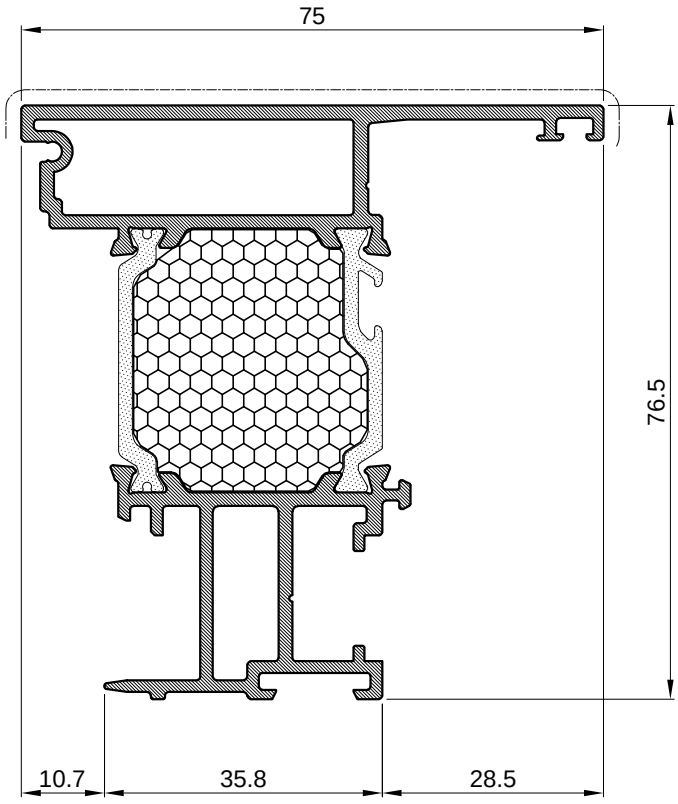


Profil kombatute Flying mullion		
Art.Br. Art.No.	**FT-0421F**	
Težina Weight	kg/m	1.713
Opseg Perimeter	mm	441.65
Moment inercije Moment of inertia	Ix (cm4)	31.49
	Iy (cm4)	15.61
	Wx (cm3)	9.68
	Wy (cm3)	3.57
L	mm	6500

PROFIL BEZ XPS ISPUNE U NAZIVU NEMA NASTAVKA „F"

PROFILES WITHOUT XPS DO NOT HAVE ENDING "F"

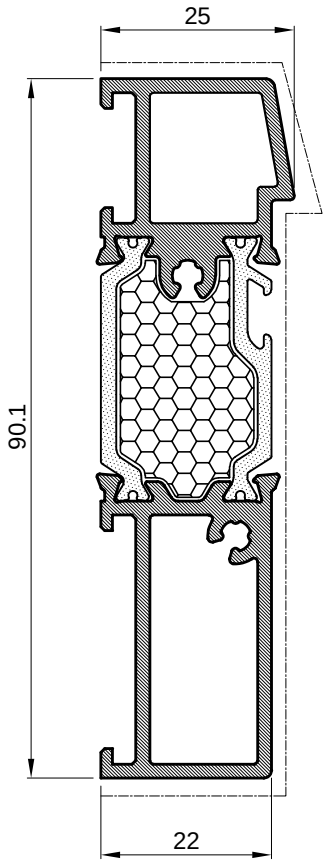


Profil praga Threshold profile		
Art.Br. Art.No.	**FT-0422F**	
Težina Weight	kg/m	1.455
Opseg Perimeter	mm	274.25
Moment inercije Moment of inertia	Ix (cm4)	30.40
	Iy (cm4)	2.48
	Wx (cm3)	8.77
	Wy (cm3)	1.94
L	mm	6500

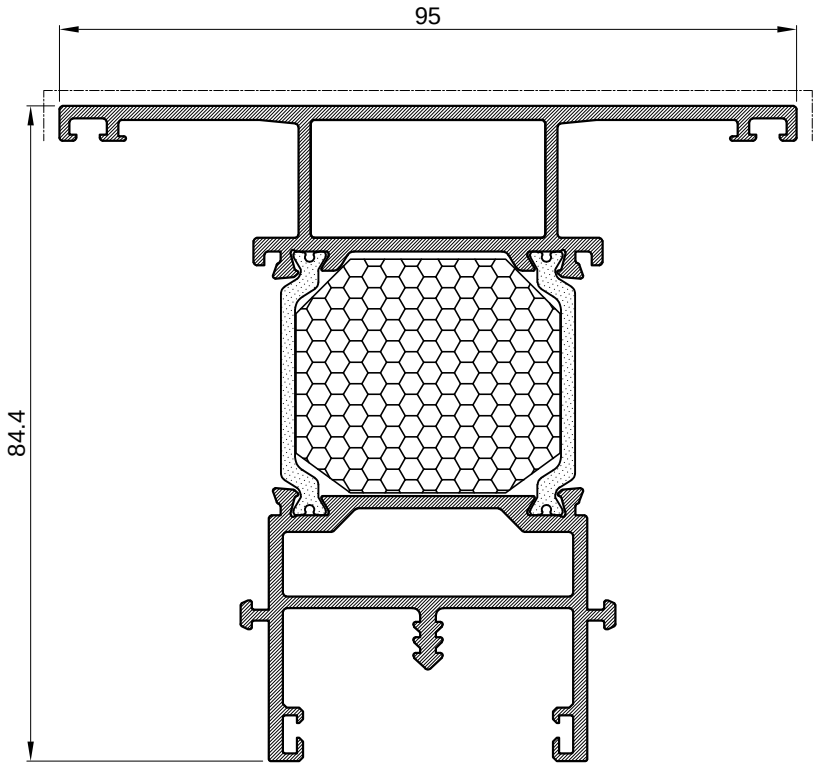


Profil prečke Door mullion profile		
Art.Br. Art.No.	**FT-0423F**	
Težina Weight	kg/m	2.001
Opseg Perimeter	mm	539.14
Moment inercije Moment of inertia	Ix (cm4)	41.00
	Iy (cm4)	27.47
	Wx (cm3)	11.19
	Wy (cm3)	5.78
L	mm	6500

PROFIL BEZ XPS ISPUNE U NAZIVU NEMA NASTAVKA „F"


PROFILES WITHOUT XPS DO NOT HAVE ENDING "F"

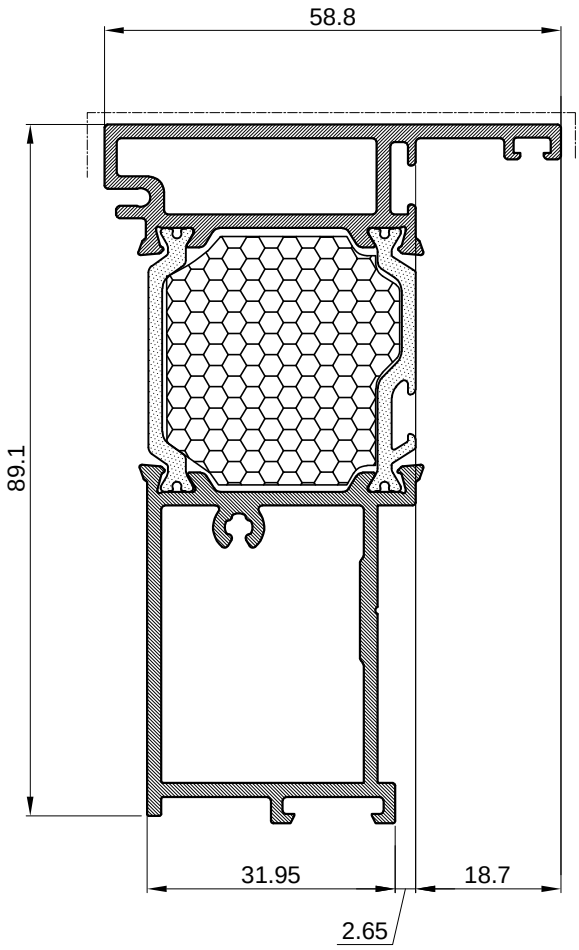

Profil kombatute Flying mullion		
Art.Br. Art.No.	**FT-0424F**	
Težina Weight	kg/m	1.759
Opseg Perimeter	mm	569.11
Moment inercije Moment of inertia	Ix (cm4)	57.62
	Iy (cm4)	11.74
	Wx (cm3)	11.28
	Wy (cm3)	3.29
L	mm	6500

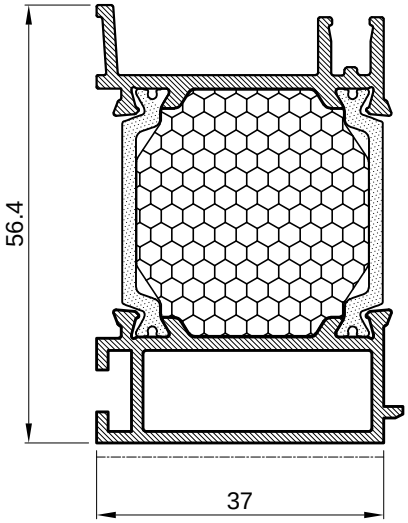


Profil za proširenje Extension profile		
Art.Br. Art.No.	**FT-0443F**	
Težina Weight	kg/m	1.055
Opseg Perimeter	mm	267.91
Moment inercije Moment of inertia	Ix (cm4)	12.76
	Iy (cm4)	5.21
	Wx (cm3)	3.99
	Wy (cm3)	2.57
L	mm	6500

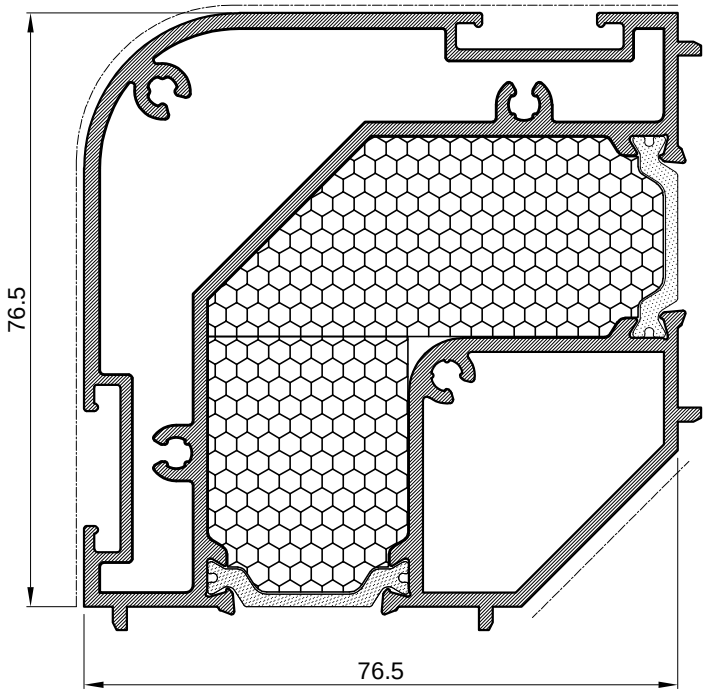

Profil za kut 90° Profile for corner 90°		
Art.Br. Art.No.	**FT-0444F**	
Težina Weight	kg/m	2.538
Opseg Perimeter	mm	372.38
Moment inercije Moment of inertia	Ix (cm4)	56.04
	Iy (cm4)	60.64
	Wx (cm3)	14.12
	Wy (cm3)	14.11
L	mm	6500


PROFIL BEZ XPS ISPUNE U NAZIVU NEMA NASTAVKA „F"

PROFILES WITHOUT XPS DO NOT HAVE ENDING "F"

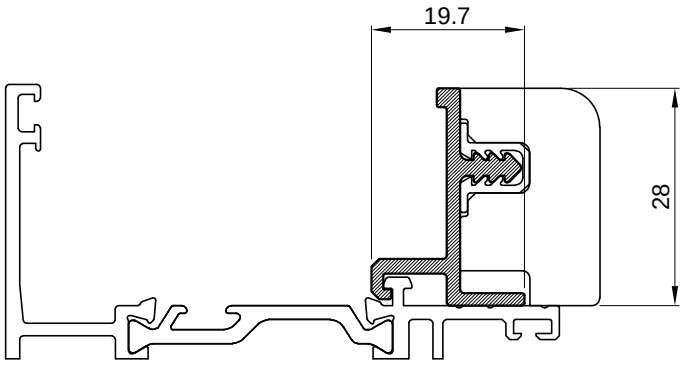


Staklo lajsna Glazing bead		
Art.-Br. Art.-No.	**F-1350**	
Težina Weight	kg/m	0.293
Opseg Perimeter	mm	124.90
L	mm	6500

Napomena: Profil se uvijek isporučuje eloksiran - eloksaža S10
Remark: The profile is always delivered anodized - anodizing S10

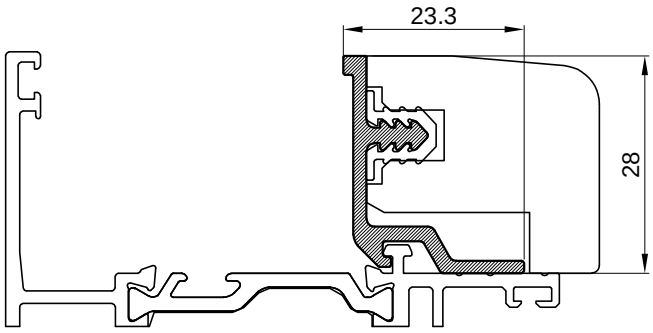


Staklo lajsna Glazing bead		
Art.-Br. Art.-No.	**F-1725**	
Težina Weight	kg/m	0.307
Opseg Perimeter	mm	125
L	mm	6500


Napomena: Profil se uvijek isporučuje eloksiran - eloksaža S10
Remark: The profile is always delivered anodized - anodizing S10

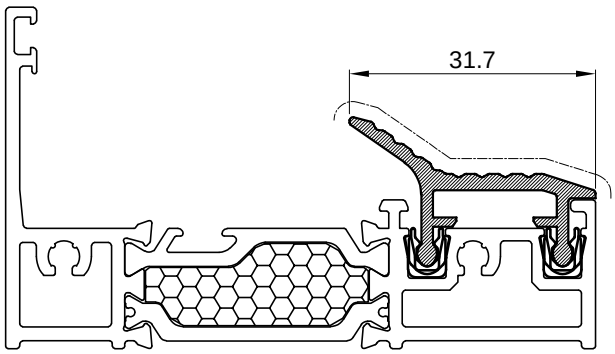


Profil Profile		
Art.-Br. Art.-No.	**F-1353**	
Težina Weight	kg/m	0.279
Opseg Perimeter	mm	121.53
L	mm	6500

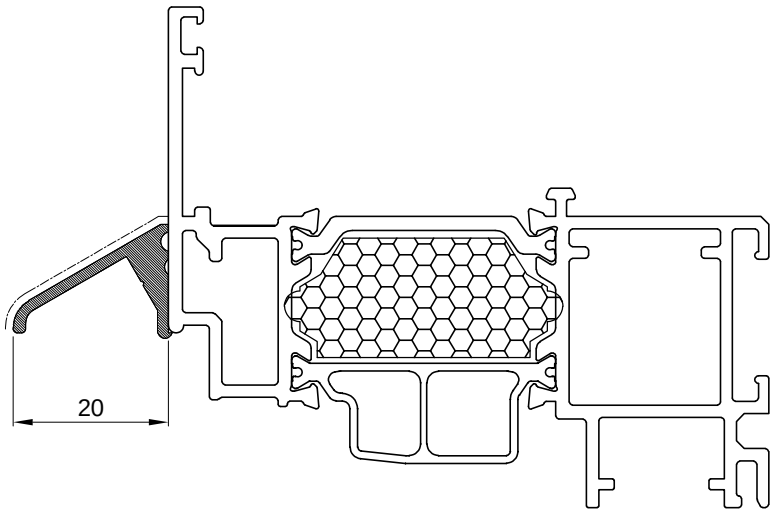


Profil Profile		
Art.-Br. Art.-No.	**Z40-657**	
Težina Weight	kg/m	0.186
Opseg Perimeter	mm	73.33
L	mm	6500

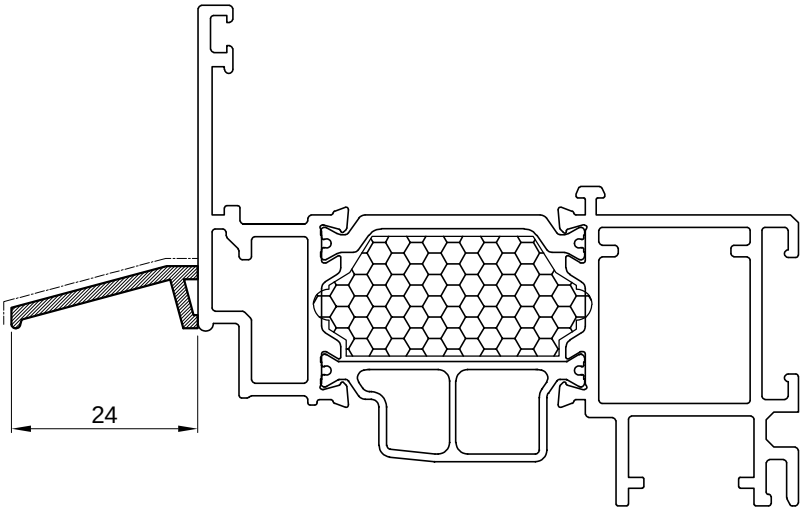


Profil Profile		
Art.-Br. Art.-No.	**F-0228**	
Težina Weight	kg/m	0.153
Opseg Perimeter	mm	67.86
L	mm	6500

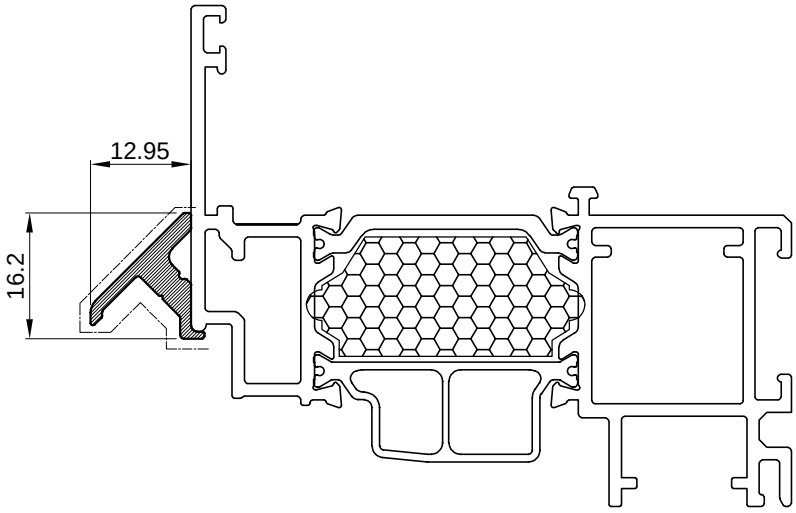


Profil Profile		
Art.-Br. Art.-No.	**F-1842**	
Težina Weight	kg/m	0.181
Opseg Perimeter	mm	63
L	mm	6500

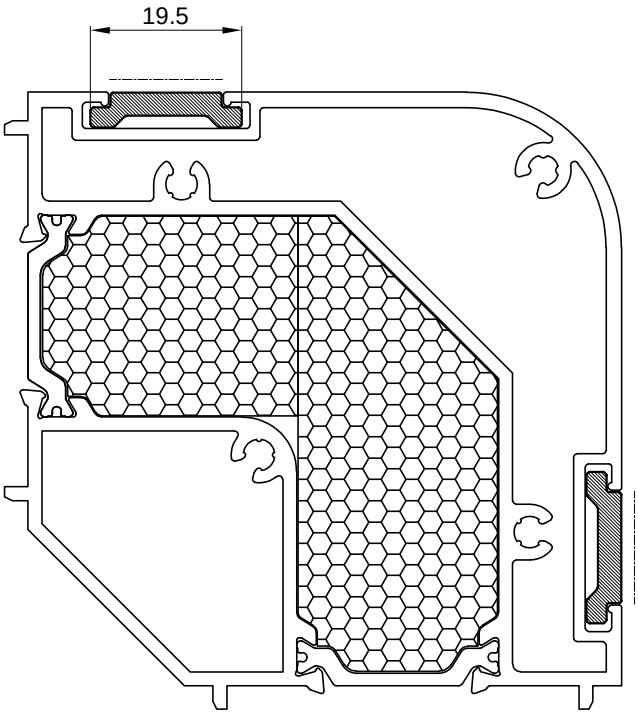


Profil Profile		
Art.-Br. Art.-No.	**NC-1459**	
Težina Weight	kg/m	0.161
Opseg Perimeter	mm	47.97
L	mm	6500

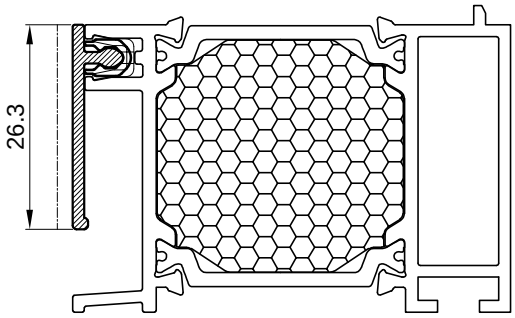


Profil Profile		
Art.-Br. Art.-No.	**F-1552**	
Težina Weight	kg/m	0.133
Opseg Perimeter	mm	65.68
L	mm	6500

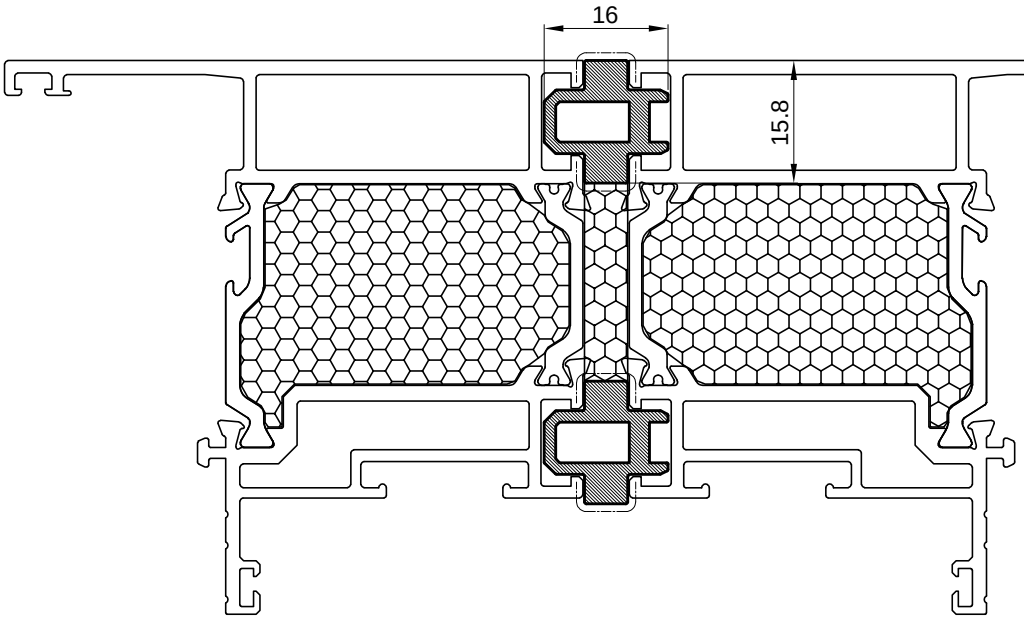


Profil Profile		
Art.-Br. Art.-No.	**F-1597**	
Težina Weight	kg/m	0.3
Opseg Perimeter	mm	64.75
L	mm	6500

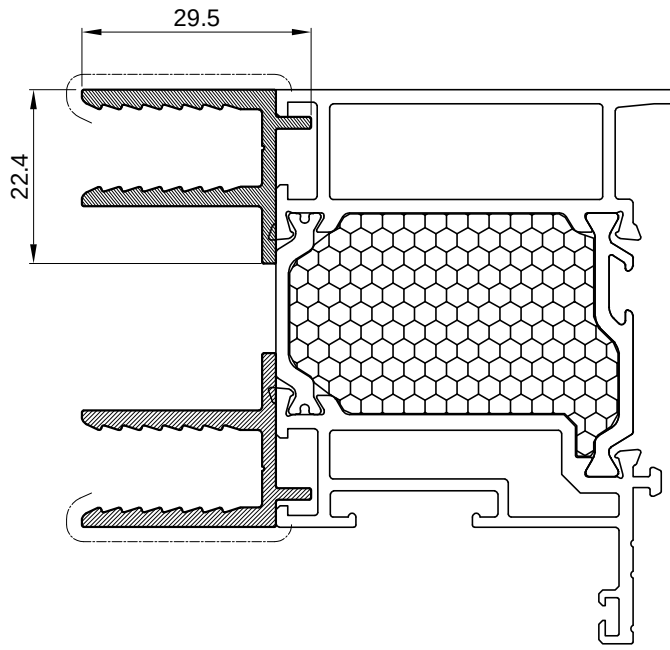


Profil Profile		
Art.-Br. Art.-No.	**F-1232**	
Težina Weight	kg/m	0.404
Opseg Perimeter	mm	153.55
L	mm	6500

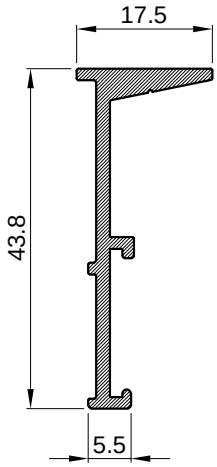


Al profil Al profile		
Art.Br. Art.No.	**F-1543**	
Težina Weight	kg/m'	**0.359**
Opseg Perimeter	mm	**138.25**
L	mm	**6500**

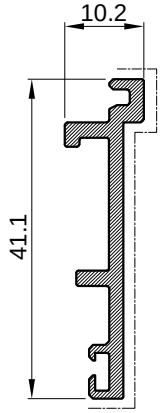


Al profil Al profile		
Art.Br. Art.No.	**F-1699**	
Težina Weight	kg/m'	**0.31**
Opseg Perimeter	mm	**130.48**
L	mm	**6500**



Al profil Al profile		
Art.Br. Art.No.	**F-1596**	
Težina Weight	kg/m'	**0.142**
Opseg Perimeter	mm	**84.47**
L	mm	**6500**















Al profil-okapnica Al profile-drip cap		
Art.Br. Art.No.	**F-1200**	
Težina Weight	kg/m'	**0.160**
Opseg Perimeter	mm	**105.74**
L	mm	**6500**






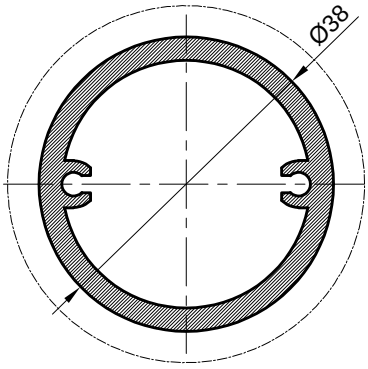








Profil rukohvata vrata Door handle profile		
Art.Br. Art.Nr.	**F-0829**	
Težina Weight	kg/m'	**0.953**
Opseg Perimeter	mm	**119.00**
L	mm	**6500**


Vezni elementi
Connection elements

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.090		- Kutna spojnica 34.6, L=11.8 (s vijcima) - Corner bracket 34.6, L=11.8 (with screws)	Al.	
710.091		- Kutna spojnica 34.6, L=11.8 - Corner bracket 34.6, L=11.8	Al.	
710.129		- Kutna spojnica 18.5, L=6.8 - Corner bracket 18.5, L=6.8	Al.	
710.157		- Kutna spojnica 24.6, L=6.8 - Corner bracket 24.6, L=6.8	Al.	
710.163		- Kutna spojnica 29.4, L=5.8 - Corner bracket 29.4, L=5.8	Al.	
710.164		- Kutna spojnica 18.5, L=19 - Corner bracket 18.5, L=19	Al.	






Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.165		- Kutna spojnica 18.5, L=19 (s vijcima) - Corner bracket 18.5, L=19 (with screws)	Al.	
710.166		- Kutna spojnica 24.6, L=19 - Corner bracket 24.6, L=19	Al.	
710.167		- Kutna spojnica 24.6, L=19 (s vijcima) - Corner bracket 24.6, L=19 (with screws)	Al.	
710.169		- Kutna spojnica 46, L=9.1 - Corner bracket 46, L=9.1	Al.	
710.539		- Kutna spojnica 34.6, L=14.1 - Corner bracket 34.6, L=14.1	Al.	
710.540		- Kutna spojnica 34.6, L=14.1 (s vijcima) - Corner bracket 34.6, L=14.1 (with screws)	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.541		- Kutna spojnica 46, L=39 - Corner bracket 46, L=39	Al.	
710.542		- Kutna spojnica 46, L=39 (s vijcima) - Corner bracket 46, L=39 (with screws)	Al.	
710.141		- Kutna spojnica 34.6, L=9.3 - Corner bracket 34.6, L=9.3	Al.	
710.172		- Kutna spojnica 34.6, L=14.7 - Corner bracket 34.6, L=14.7	Al.	
710.173		- Kutna spojnica 34.6, L=14.7 (s vijcima) - Corner bracket 34.6, L=14.7 (with screws)	Al.	
710.545		- Kutna spojnica 34.6, L=8.5 - Corner bracket 34.6, L=8.5	Al.	

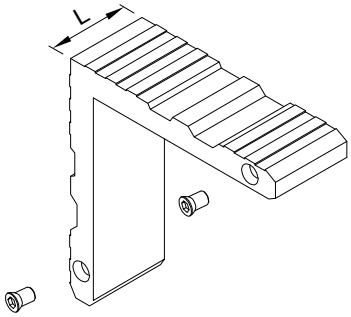


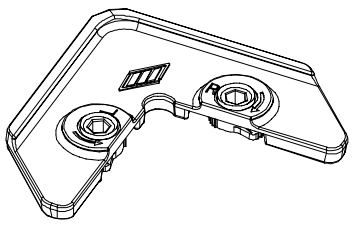

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.431		- Kutna spojnica 11.5, L=34.6 (s vijcima) - Corner bracket 11.5, L=34.6 (with screws)	Al.	
710.432		- Kutna spojnica 6, L=29.6 - Corner bracket 6, L=29.6	Al.	
730.001		- Kutna spojnica za komoru 4.8x2 (Stara oznaka: G112, 0365) - Corner bracket for chamber 4.8x2 (Former code: G112, 0365)	Inox	
730.002		- Kutna spojnica za komoru 4.8x2 (Stara oznaka: G112/A) - Corner bracket for chamber 4.8x2 (Former code: G112/A)	Inox	
731.010		- Kutna spojnica za komoru 19.1x1.6 - Oznaka proizvođača Monticelli: 2019 - Corner bracket for chamber 19.1x1.6 - Manufacturer code Monticelli: 2019	Al.	
710.079		- Dodatni veznik, L=12.8 - Additional bracket, L=12.8	Al.	

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.546		- Dodatni veznik, L=36.8 - Additional bracket, L=36.8	Al.	


PVC elementi
PVC elements

Oznaka Code	Izgled-presjek View-Cross section	Opis Description	Materijal Material	Napomena Remark
370.070.01 03		- Maska s klapnom za drenažni otvor - Oznaka proizvođača Master: A2145R9010 - bijela, A2145 - crna - Boje: 01- bijela; 03- crna - Drainage slot mask with a flap - Manufacturer code Master: A2145R9010 - white, A2145 - black - Color: 01- white; 03- black	PVC	
373.031		- Kutna spojnica za komoru 23.2x12.3 - Corner bracket for chamber 23.2x12.3	PVC	
374.037		- PVC profil za ugradnju - PVC profile for installation	PVC	
374.047		-PVC umetak (distancer) za ugradnju -PVC insert (spacer) for installation	PVC	
375.048		- Kopča za profil - Clamp for profile	PVC	
375.050		- Kopča za spajanje drvenih obloga i aluminijskih profila - Clamp for connecting of wooden coverings and aluminium profiles	PA 6	

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
375.051		- PVC umetak za spoj rama FT-0400F i prečke FT-0420F - PVC insert for joint of the frame FT-0400F and the mullion FT-0420F	PVC	
371.018		- PVC umetak za spoj krila FT-0410F i prečke FT-0420F - PVC insert for joint of the sash FT-0410F and the mullion FT-0420F	PVC	
360.009		- Sustav odvodnje kapljevina Monodrain - Oznaka proizvođača Monodrain: 302006 - Drainage system Monodrain - Manufacturer code Monodrain: 302006	Guma Rubber	
373.002		- Umetak za profil okapnice Z40-657 (Stara oznaka: PRO 23) - End insert for drip cap profile Z40-657 (Former code: PRO 23)	PVC	Par Pair
373.079		- Umetak za profil okapnice F-1842 - End insert for drip cap profile F-1842	Tvrda guma Hard rubber	Par Pair
373.057		- Umetak za profil okapnice F-1596 - Insert for the drip cap profile F-1596	PVC	Par Pair

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
374.043		- PVC profil (umetak) za vrata (s profilom F-1222) - PVC profile (insert) for door (with the profile F-1222)	PVC	
370.000 **370.001** **370.002**		- Podmetači za staklo - Glazing packers d=3 mm.....370.000 d=5 mm.....370.001 d=7mm.....370.002 (L x H = 18 x 27 mm)	PVC	
373.027		- Umetak za profil okapnice F-1200 - Insert for the drip cap profile F-1200	PVC	Par Pair
365.049		- Umetak za profil kombatute FT-0421F - Insert for the flying mullion profile FT-0421F	Guma Rubber	Par Pair
373.066		- Umetak za profil kombatute FT-0424F - Insert for the flying mullion profile FT-0424F	Guma Rubber	Par Pair


Mehanizmi
Mechanisms



Okretno nagibni okov - Tip Roto NT - A
Osnovna sigurnost
Tilt & Turn hardware - Typ Roto NT - A
Basic security

Širina krila u utoru: 290 - 1600
Sash rebate width: 290 - 1600
Visina krila u utoru: 280 - 2600
Sash rebate height: 280 - 2600
Težina krila: max.130 kg
Sash weight: max.130 kg

Ležajna strana A
Hinge side A
Sistem 12/18-13
System 12/18-13
12mm - Utorna zračnost
12 mm - Clearance
18 mm - Preklop
18mm - Overlap width
13mm - Os okova
13 mm - Hardware axis

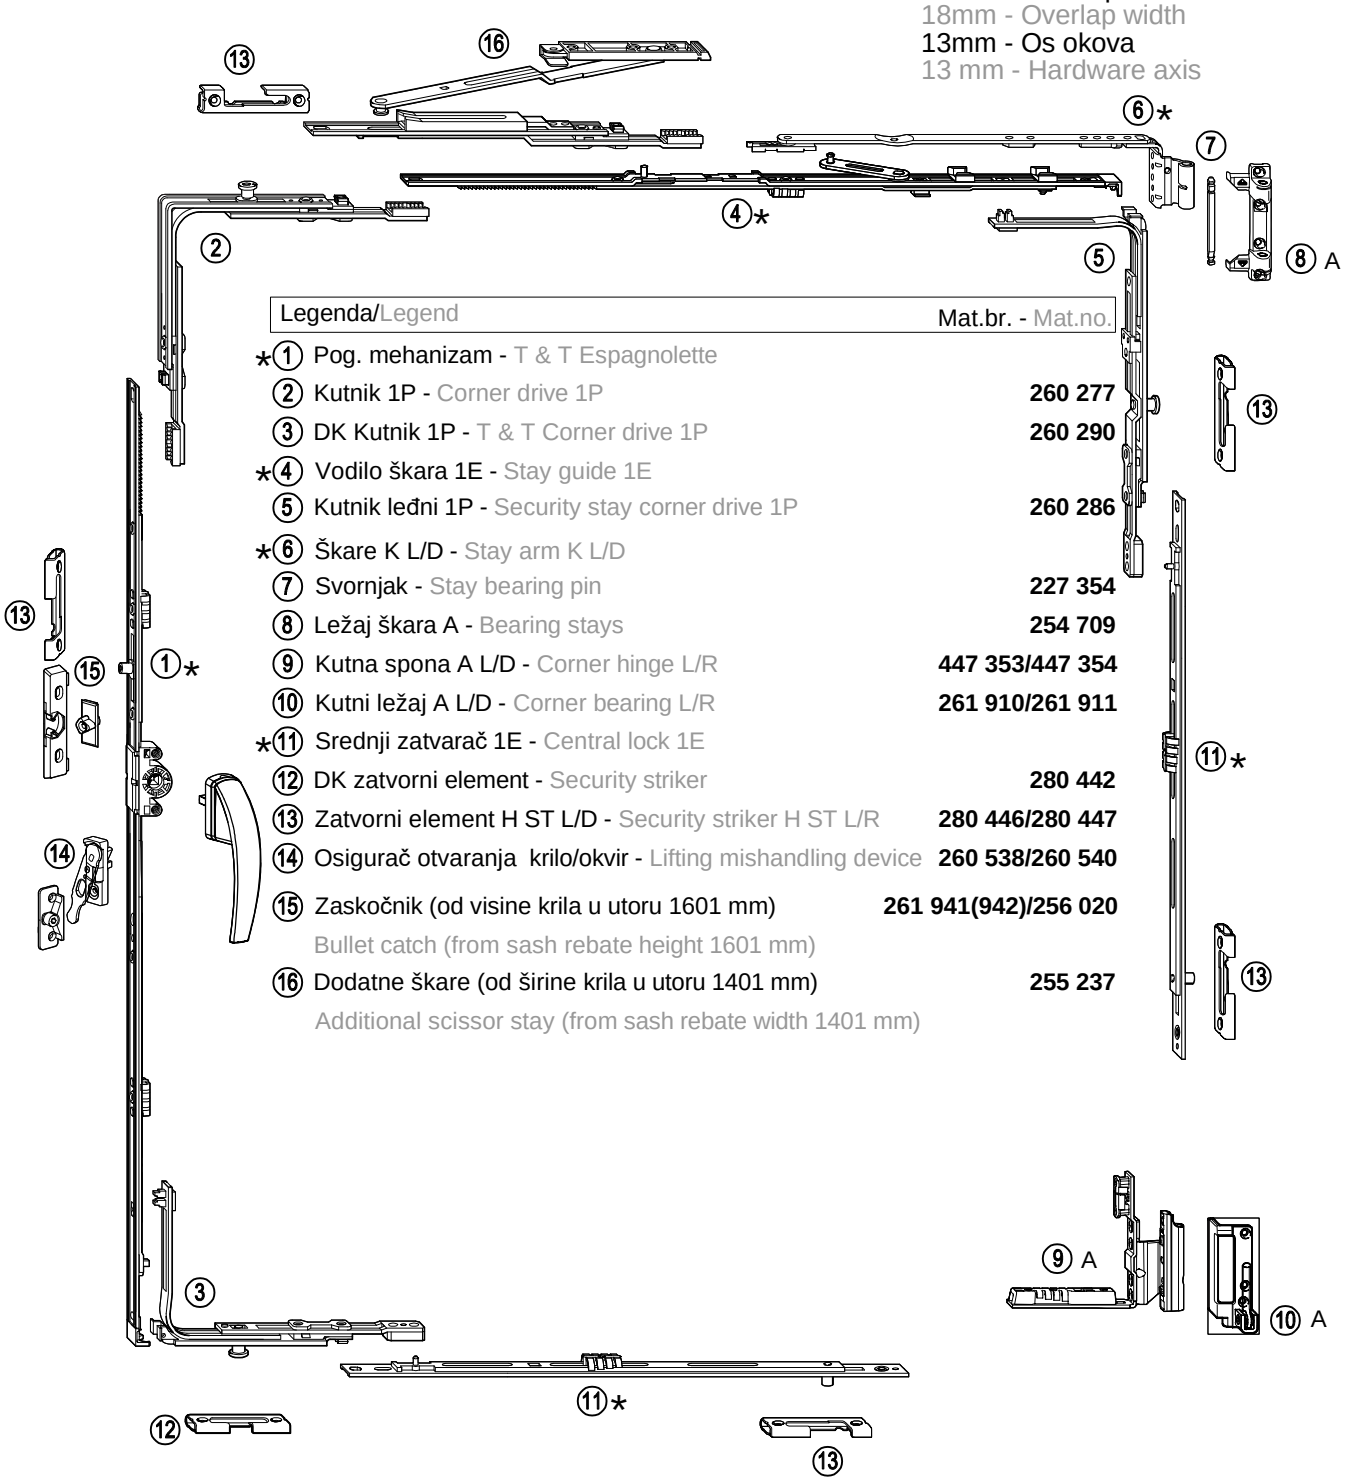


Legenda/Legend	Mat.br. - Mat.no.
*(1) Pog. mehanizam - T & T Espagnolette	
(2) Kutnik 1P - Corner drive 1P	**260 277**
(3) DK Kutnik 1P - T & T Corner drive 1P	**260 290**
*(4) Vodilo škara 1E - Stay guide 1E	
(5) Kutnik leđni 1P - Security stay corner drive 1P	**260 286**
*(6) Škare K L/D - Stay arm K L/D	
(7) Svornjak - Stay bearing pin	**227 354**
(8) Ležaj škara A - Bearing stays	**254 709**
(9) Kutna spona A L/D - Corner hinge L/R	**447 353/447 354**
(10) Kutni ležaj A L/D - Corner bearing L/R	**261 910/261 911**
*(11) Srednji zatvarač 1E - Central lock 1E	
(12) DK zatvorni element - Security striker	**280 442**
(13) Zatvorni element H ST L/D - Security striker H ST L/R	**280 446/280 447**
(14) Osigurač otvaranja krilo/okvir - Lifting mishandling device	**260 538/260 540**
(15) Zaskočnik (od visine krila u utoru 1601 mm)	**261 941(942)/256 020**
Bullet catch (from sash rebate height 1601 mm)	
(16) Dodatne škare (od širine krila u utoru 1401 mm)	**255 237**
Additional scissor stay (from sash rebate width 1401 mm)	

* Napomena:
Promjenjivi elementi za različite širine i visine krila izabrati sa sljedeće stranice
* Remark:
Variable elements for different sash widths and heights, can be selected from next page

✱ Promjenjivi elementi - Variable elements

Pos.	Opis - Description			Mat. br. - Mat. no.
1.	Pog. mehanizam - Espagnolette	Visina krila Hkr (mm) - Sash height Hkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		280 - 360	370	284 314
		361 - 480	370	284 314
		481 - 600	490	259 830
		601 - 800	690	259 831
		801 - 1000	890	259 834
		1001 - 1200	1090	259 838
		1201 - 1400	1290	259 840
		1401 - 1600	1490	259 842
		1601 - 1800	1690	259 846
		1801 - 2000	1890	259 849
		2001 - 2200	2090	259 851
		2201 - 2400	2290	259 854
		2401 - 2600	2290	259 855
4.	Vodilo škara - Stay guide	Širina krila Lkr (mm) - Sash width Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		290 - 410	300	260 201
		411 - 600	490	256 024
		601 - 800	690	260 204
		801 - 1000	890	260 205
		1001 - 1200	1090	260 209
		1201 - 1400	1290	260 215
6.	Škare K L/D sistem 12/18-13 - Stay arm K L/R system 12/18-13	Širina krila Lkr (mm) - Sash width Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		290 - 410	150 L/D-L/R	349 687/349 688
		411 - 600	250 L/D-L/R	349 689/349 690
		601 - 800	350 L/D-L/R	349 691/349 692
		801 - 1400	500 L/D-L/R	349 693/349 694

11.	Srednji zatvarač, horizontalni i vertikalni - Multipart centre lock, horizontal and vertical	Širina krila Lkr (mm) - Sash width Lkr (mm)	Visina krila Lkr (mm) - Sash height Lkr (mm)	Veličina (mm) - Size (mm)	Mat. br. - Mat. no.
		1101 - 1600	1101 - 1800	600	255 281
			1801 - 2400	600 con	255 282
			1801 - 2400	600	255 281
			2401 - 2600	600 con	255 282
			2401 - 2600	400	255 280




Okretno nagibni okov - Tip Roto NT - Designo
Osnovna sigurnost

Tilt & Turn hardware - Typ Roto NT -Designo
Basic security

Širina krila u utoru: 290 - 1600
Sash rebate width: 290 - 1600
Visina krila u utoru: 280 - 2600
Sash rebate height: 280 - 2600
Težina krila: max.130 kg
Sash weight: max.130 kg

Ležajna strana A
Hinge side A
Sistem 12/18-13
System 12/18-13
12mm - -Utorna zračnost
12 mm - Clearance
18 mm - Preklop
18 mm - Overlap width
13mm - Os okova
13 mm - Hardware axis

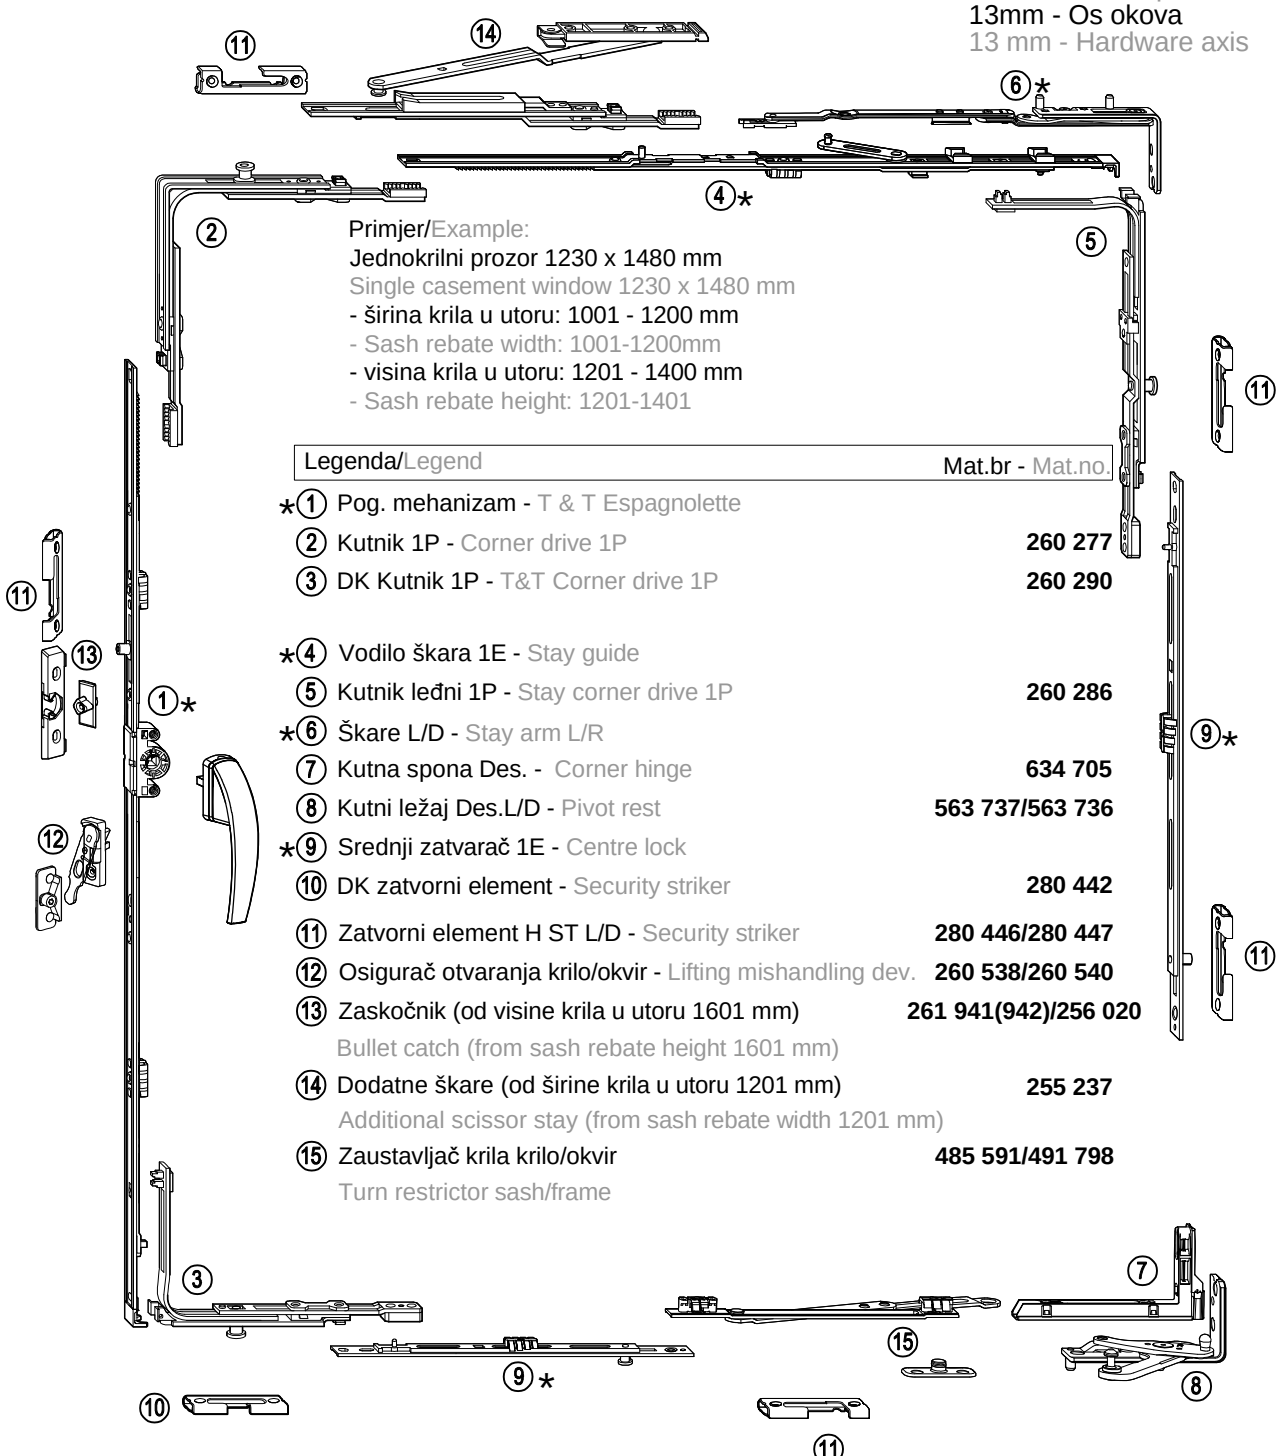

Primjer/Example:
Jednokrilni prozor 1230 x 1480 mm
Single casement window 1230 x 1480 mm
- širina krila u utoru: 1001 - 1200 mm
- Sash rebate width: 1001-1200mm
- visina krila u utoru: 1201 - 1400 mm
- Sash rebate height: 1201-1401


Legenda/Legend	Mat.br - Mat.no.
*(1) Pog. mehanizam - T & T Espagnolette	
(2) Kutnik 1P - Corner drive 1P	**260 277**
(3) DK Kutnik 1P - T&T Corner drive 1P	**260 290**
*(4) Vodilo škara 1E - Stay guide	
(5) Kutnik leđni 1P - Stay corner drive 1P	**260 286**
*(6) Škare L/D - Stay arm L/R	
(7) Kutna spona Des. - Corner hinge	**634 705**
(8) Kutni ležaj Des.L/D - Pivot rest	**563 737/563 736**
*(9) Srednji zatvarač 1E - Centre lock	
(10) DK zatvorni element - Security striker	**280 442**
(11) Zatvorni element H ST L/D - Security striker	**280 446/280 447**
(12) Osigurač otvaranja krilo/okvir - Lifting mishandling dev.	**260 538/260 540**
(13) Zaskočnik (od visine krila u utoru 1601 mm)	**261 941(942)/256 020**
Bullet catch (from sash rebate height 1601 mm)	
(14) Dodatne škare (od širine krila u utoru 1201 mm)	**255 237**
Additional scissor stay (from sash rebate width 1201 mm)	
(15) Zaustavljač krila krilo/okvir	**485 591/491 798**
Turn restrictor sash/frame	

* Napomena:
Promjenjivi elementi za različite širine i visine krila izabrati sa sljedeće stranice
* Remark:
Variable elements for different sash widths and heights, can be selected from next page

✱ Promjenjivi elementi - Variable elements

Pos.	Opis - Description			Mat. br. - Mat. no.
1.	Pog. mehanizam - Espagnolette	Visina krila Hkr (mm) - Sash height Hkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		280 - 360	370	284 314
		361 - 480	370	284 314
		481 - 600	490	259 830
		601 - 800	690	259 831
		801 - 1000	890	259 834
		1001 - 1200	1090	259 838
		1201 - 1400	1290	259 840
		1401 - 1600	1490	259 842
		1601 - 1800	1690	259 846
		1801 - 2000	1890	259 849
		2001 - 2200	2090	259 851
		2201 - 2400	2290	259 854
		2401 - 2600	2290	259 855
4.	Vodilo škara - Stay guide	Širina krila Lkr (mm) - Sash width Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		330 - 430	250/490	385 393
		431 - 600	250/490	385 393
		601 - 800	350/690	385 394
		801 - 1000	500/890	385 415
		1001 - 1400	500/1090	385 416
6.	Škare L/D sistem 12/18-13 - Stay arm L/R system 12/18-13	Širina krila Lkr (mm) - Sash width Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		330 - 600	250 L/D-L/R	563 732/563 728
		601 - 800	350 L/D-L/R	563 733/563 729
		801 - 1400	500 L/D-L/R	563 734/563 730


9.	Srednji zatvarač, horizontalni i vertikalni - Multipart centre lock, horizontal and vertical	Širina krila Lkr (mm) - Sash width Lkr (mm)	Visina krila Lkr (mm) - Sash height Lkr (mm)	Veličina (mm) - Size (mm)	Mat. br. - Mat. no.
		1101 - 1600	1101 - 1800	600	255 281
			1801 - 2400	600 con	255 282
			1801 - 2400	600	255 281
			2401 - 2600	600 con	255 282
			2401 - 2600	400	255 280

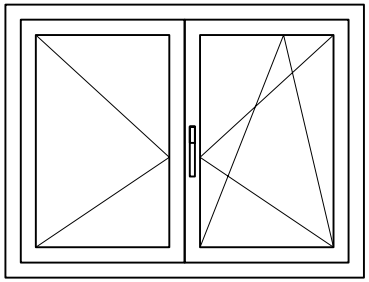

Okretno nagibni okov- T& T Hardware - Tip Roto NT - A
Osnovna sigurnost - Basic security

Ležajna strana A
Hinge side A
Sistem 12/18-13
System 12/18-13
12 mm - Utorna zračnost
12mm - Clearance
18 mm - Preklop
18 mm - Overlap width
13 mm - Os okova
13mm - Hardware axis

Širina krila u utoru: 290 - 1600 mm
Sash rebate width: 290 - 1600mm
Visina krila u utoru: 431 - 2600 mm
Sash rebate height: 431-2600mm
Težina krila: max 130 kg
Sash weight: max 130 kg

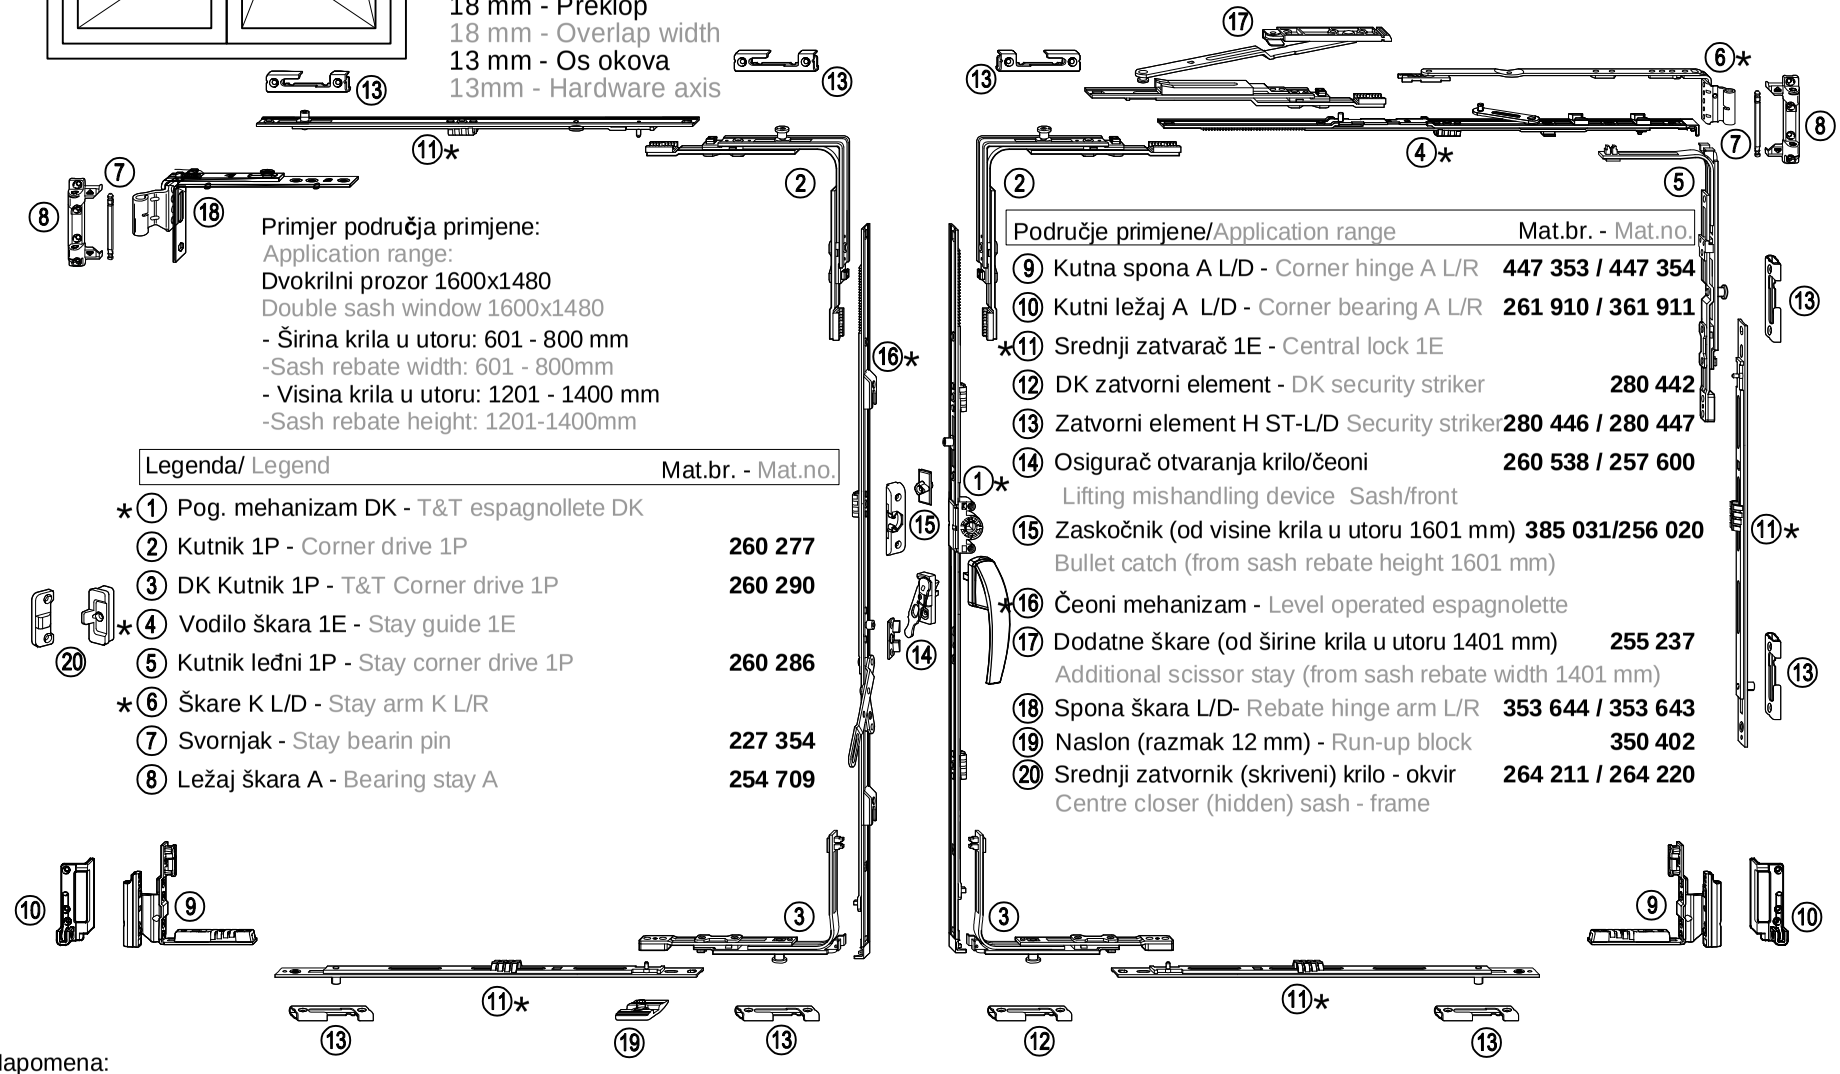

Primjer područja primjene:
Application range:
Dvokrilni prozor 1600x1480
Double sash window 1600x1480
- Širina krila u utoru: 601 - 800 mm
-Sash rebate width: 601 - 800mm
- Visina krila u utoru: 1201 - 1400 mm
-Sash rebate height: 1201-1400mm

Legenda/ Legend	Mat.br. - Mat.no.
*① Pog. mehanizam DK - T&T espagnollete DK	
② Kutnik 1P - Corner drive 1P	**260 277**
③ DK Kutnik 1P - T&T Corner drive 1P	**260 290**
*④ Vodilo škara 1E - Stay guide 1E	
⑤ Kutnik leđni 1P - Stay corner drive 1P	**260 286**
*⑥ Škare K L/D - Stay arm K L/R	
⑦ Svornjak - Stay bearin pin	**227 354**
⑧ Ležaj škara A - Bearing stay A	**254 709**


Područje primjene/Application range	Mat.br. - Mat.no.
⑨ Kutna spona A L/D - Corner hinge A L/R	**447 353 / 447 354**
⑩ Kutni ležaj A L/D - Corner bearing A L/R	**261 910 / 361 911**
*⑪ Srednji zatvarač 1E - Central lock 1E	
⑫ DK zatvorni element - DK security striker	**280 442**
⑬ Zatvorni element H ST-L/D Security striker	**280 446 / 280 447**
⑭ Osigurač otvaranja krilo/čeoni	**260 538 / 257 600**
Lifting mishandling device Sash/front	
⑮ Zaskočnik (od visine krila u utoru 1601 mm)	**385 031/256 020**
Bullet catch (from sash rebate height 1601 mm)	
*⑯ Čeoni mehanizam - Level operated espagnolette	
⑰ Dodatne škare (od širine krila u utoru 1401 mm)	**255 237**
Additional scissor stay (from sash rebate width 1401 mm)	
⑱ Spona škara L/D- Rebate hinge arm L/R	**353 644 / 353 643**
⑲ Naslon (razmak 12 mm) - Run-up block	**350 402**
⑳ Srednji zatvornik (skriveni) krilo - okvir	**264 211 / 264 220**
Centre closer (hidden) sash - frame	

* Napomena:
Promjenjivi elementi za različite širine i visine krila izabrati sa sljedeće stranice
* Remark:
Variable elements for different sash widths and heights, can be selected from next page

✱ Promjenjivi elementi - Variable elements


Pos.	Opis - Description			Mat. br. - Mat. no.
1.	Pog. mehanizam - Espagnolette	Visina krila Hkr (mm) - Sash height Hkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		280 - 360	370	284 314
		361 - 480	370	284 314
		481 - 600	490	259 830
		601 - 800	690	259 831
		801 - 1000	890	259 834
		1001 - 1200	1090	259 838
		1201 - 1400	1290	259 840
		1401 - 1600	1490	259 842
		1601 - 1800	1690	259 846
		1801 - 2000	1890	259 849
		2001 - 2200	2090	259 851
		2201 - 2400	2290	259 854
		2401 - 2600	2290	259 855
4.	Vodilo škara - Stay guide	Širina krila Lkr (mm) - Sash width Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		290 - 410	150/300	260 201
		411 - 600	250/490	256 024
		601 - 800	350/690	260 204
		801 - 1000	500/890	260 205
		801 - 1000	500/890	260 208
		1001 - 1200	500/1090	260 209
		1001 - 1200	500/1090	260 212
		1201 - 1600	500/1290	260 215
6.	Škare L/D sistem 12/18-13 Stay arm L/R system 12/18-13	Širina krila Lkr (mm) - Sash width Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		330 - 600	250 L/D-L/R	563 732/563 728
		601 - 800	350 L/D-L/R	563 733/563 729
		801 - 1400	500 L/D-L/R	563 734/563 730

11.	Srednji zatvarač, horizontalni i vertikalni - Multipart centre lock, horizontal and vertical	Širina krila Lkr (mm) - Sash width Lkr (mm)	Visina krila Lkr (mm) - Sash height Lkr (mm)	Veličina (mm) - Size (mm)	Mat. br. - Mat. no.
		1101 - 1600	1101 - 1800	600	255 281
			1801 - 2400	600 con	255 282
			1801 - 2400	600	255 281
			2401 - 2600	600 con	255 282
			2401 - 2600	400	255 280
16.	Čeoni mehanizam - Level operated espagnolette	Visina krila Lkr (mm) - Sash height Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.	
		431 - 500	490	233 408	
		501 - 600	490	233 408	
		431 - 600	490	317 047	
		601 - 800	690	242 730	
		601 - 800	690	242 731	
		601 - 800	690	233 409	
		801 - 1000	890	233 410	
		801 - 1000	890	242 732	
		1001 - 1200	1090	233 411	
		1201 - 1400	1290	233 412	
		1401 - 1600	1490	233 413	
		1601 - 1800	1690	296 145	
		1801 - 2000	1890	296 074	
		2001 - 2200	2090	296 075	
		2201 - 2400	2290	296 076	

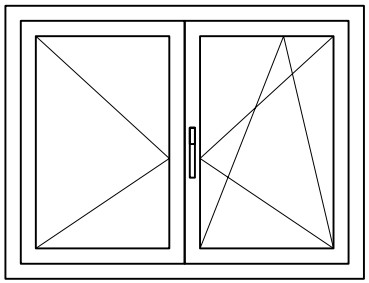


Okretno nagibni okov - T&t hardware - Tip Roto NT - Designo
Osnovna sigurnost - Basic security
Ležajna strana A
Hinge side A
Sistem 12/18-13
System 12/18-13
12 mm - Utorna zračnost
12mm - Clearance
18 mm - preklop
18mm - overlap width
13 mm - os okova
13 mm hardware axis

Širina krila u utoru: 290 - 1600 mm
Sash rebate width:290 - 1600mm
Visina krila u utoru: 431 - 2600 mm
Sash rebate height: 431-2600mm
Težina krila: max. 100 kg
max. 150 kg s prijenosnikom težine
Sash weight:max. 100kg
max. 150kg with load transfer

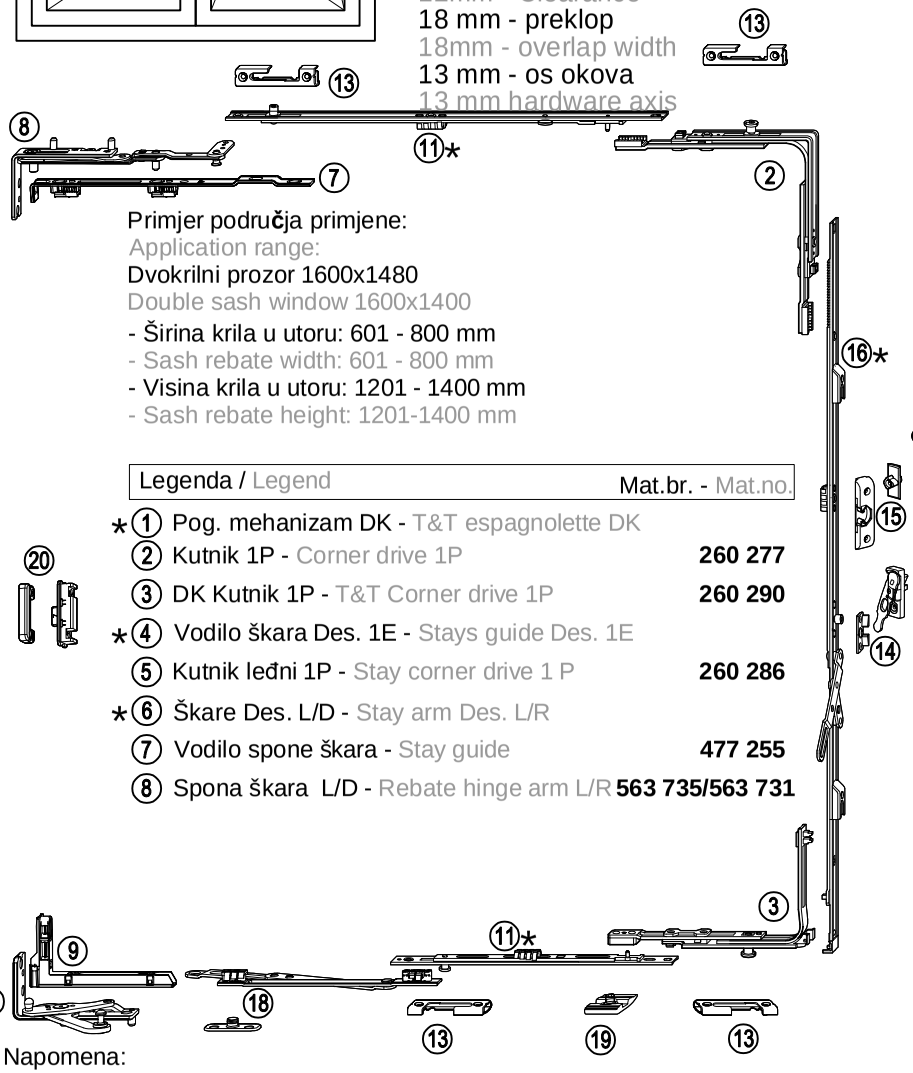

Primjer područja primjene:
Application range:
Dvokrilni prozor 1600x1480
Double sash window 1600x1400
- Širina krila u utoru: 601 - 800 mm
- Sash rebate width: 601 - 800 mm
- Visina krila u utoru: 1201 - 1400 mm
- Sash rebate height: 1201-1400 mm

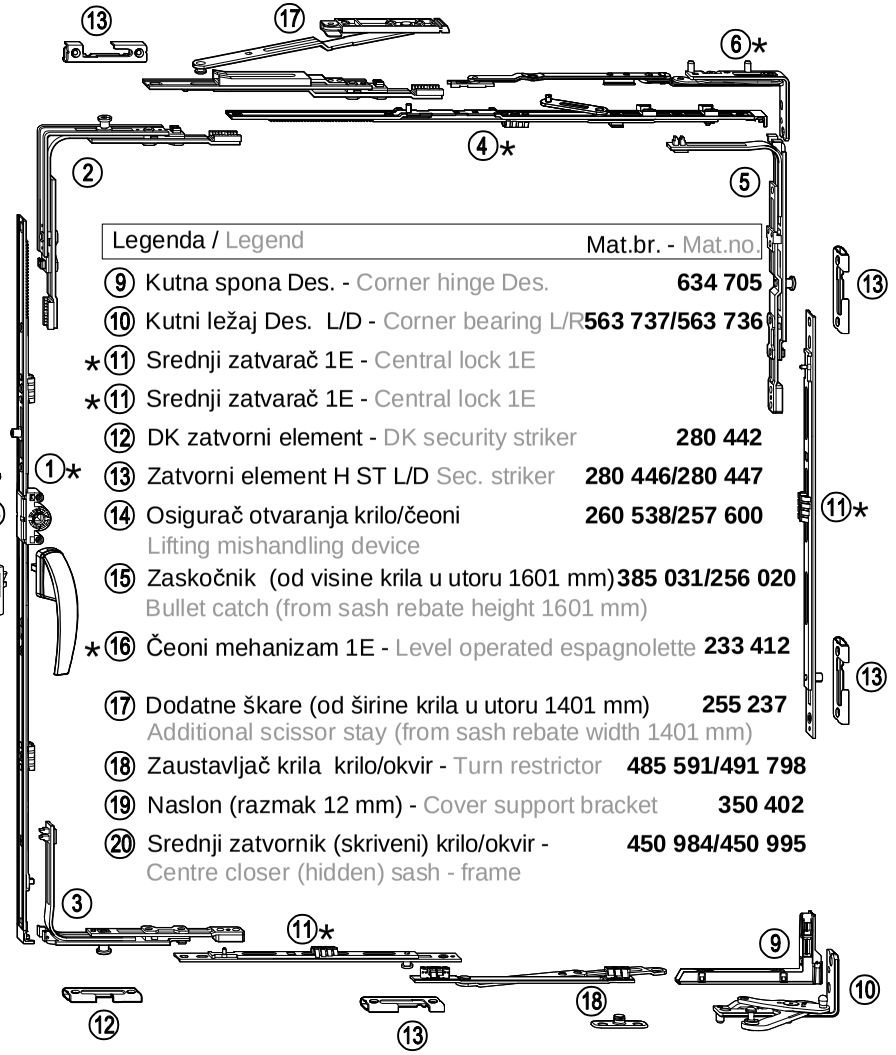


Legenda / Legend	Mat.br. - Mat.no.
* (1) Pog. mehanizam DK - T&T espagnolette DK	
(2) Kutnik 1P - Corner drive 1P	**260 277**
(3) DK Kutnik 1P - T&T Corner drive 1P	**260 290**
* (4) Vodilo škara Des. 1E - Stays guide Des. 1E	
(5) Kutnik leđni 1P - Stay corner drive 1 P	**260 286**
* (6) Škare Des. L/D - Stay arm Des. L/R	
(7) Vodilo spone škara - Stay guide	**477 255**
(8) Spona škara L/D - Rebate hinge arm L/R	**563 735/563 731**
(9) Kutna spona Des. - Corner hinge Des.	**634 705**
(10) Kutni ležaj Des. L/D - Corner bearing L/R	**563 737/563 736**
* (11) Srednji zatvarač 1E - Central lock 1E	
* (11) Srednji zatvarač 1E - Central lock 1E	
(12) DK zatvorni element - DK security striker	**280 442**
(13) Zatvorni element H ST L/D Sec. striker	**280 446/280 447**
(14) Osigurač otvaranja krilo/čeoni Lifting mishandling device	**260 538/257 600**
(15) Zaskočnik (od visine krila u utoru 1601 mm) Bullet catch (from sash rebate height 1601 mm)	**385 031/256 020**
* (16) Čeoni mehanizam 1E - Level operated espagnolette	**233 412**
(17) Dodatne škare (od širine krila u utoru 1401 mm) Additional scissor stay (from sash rebate width 1401 mm)	**255 237**
(18) Zaustavljač krila krilo/okvir - Turn restrictor	**485 591/491 798**
(19) Naslon (razmak 12 mm) - Cover support bracket	**350 402**
(20) Srednji zatvornik (skriveni) krilo/okvir - Centre closer (hidden) sash - frame	**450 984/450 995**

* Napomena:
Promjenjivi elementi za različite širine i visine krila izabrati sa sljedeće stranice
* Remark:
Variable elements for different sash widths and heights, can be selected from next page

✱ Promjenjivi elementi - Variable elements


Pos.	Opis - Description			Mat. br. - Mat. no.
1.	Pog. mehanizam - Espagnolette	Visina krila Hkr (mm) Sash height Hkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		280 - 360	370	284 314
		361 - 480	370	284 314
		481 - 600	490	259 830
		601 - 800	690	259 831
		801 - 1000	890	259 834
		1001 - 1200	1090	259 838
		1201 - 1400	1290	259 840
		1401 - 1600	1490	259 842
		1601 - 1800	1690	259 846
		1801 - 2000	1890	259 849
		2001 - 2200	2090	259 851
		2201 - 2400	2290	259 854
		2401 - 2600	2290	259 855
4.	Vodilo škara - Stay guide	Širina krila Lkr (mm) - Sash width Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		330 - 430	250/490	385 393
		431 - 600	250/490	385 393
		601 - 800	350/690	385 394
		801 - 1000	500/890	385 415
		1001 - 1400	500/1090	385 416
6.	Škare L/D sistem 12/18-13 Stay arm L/R system 12/18-13	Širina krila Lkr (mm) - Sash width Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		330 - 600	250 L/D-L/R	563 732/563 728
		601 - 800	350 L/D-L/R	563 733/563 729
		801 - 1400	500 L/D-L/R	563 734/563 730

		Širina krila Lkr (mm) - Sash width Lkr (mm)	Visina krila Lkr (mm) - Sash height Lkr (mm)	Veličina (mm) - Size (mm)	Mat. br. Mat. no.
11.	Srednji zatvarač, horizontalni i vertikalni - Multipart centre lock, horizontal and vertical	1101 - 1600	1101 - 1800	600	255 281
			1801 - 2400	600 con	255 282
			1801 - 2400	600	255 281
			2401 - 2600	600 con	255 282
			2401 - 2600	400	255 280
16.	Čeoni mehanizam - Level operated espagnolette	Visina krila Lkr (mm) - Sash height Lkr (mm)	Dužina (mm) Length (mm)	Mat. br. Mat. no.	
		431 - 500	490	233 408	
		501 - 600	490	233 408	
		431 - 600	490	317 047	
		601 - 800	690	242 730	
		601 - 800	690	242 731	
		601 - 800	690	233 409	
		801 - 1000	890	233 410	
		801 - 1000	890	242 732	
		1001 - 1200	1090	233 411	
		1201 - 1400	1290	233 412	
		1401 - 1600	1490	233 413	
		1601 - 1800	1690	296 145	
		1801 - 2000	1890	296 074	
		2001 - 2200	2090	296 075	
		2201 - 2400	2290	296 076	

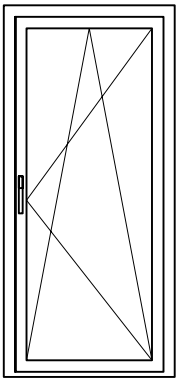

Okretno nagibni okov - Tip Roto NT
Osnovna sigurnost
Tilt & Turn hardware - Typ Roto NT
Basic security

Širina krila u utoru: 290 - 1600
Sash rebate width: 290 - 1600
Visina krila u utoru: 280 - 2600
Sash rebate height: 280 - 2600
Težina krila: max.130 kg
Sash weight: max.130 kg
Ležajna strana A
Hinge side A
Sistem 12/18-13
System 12/18-13
12mm - -Utorna zračnost
12 mm - Clearance
18 mm - Preklop
18mm - Overlap width
13mm - Os okova
13 mm - Hardware axis

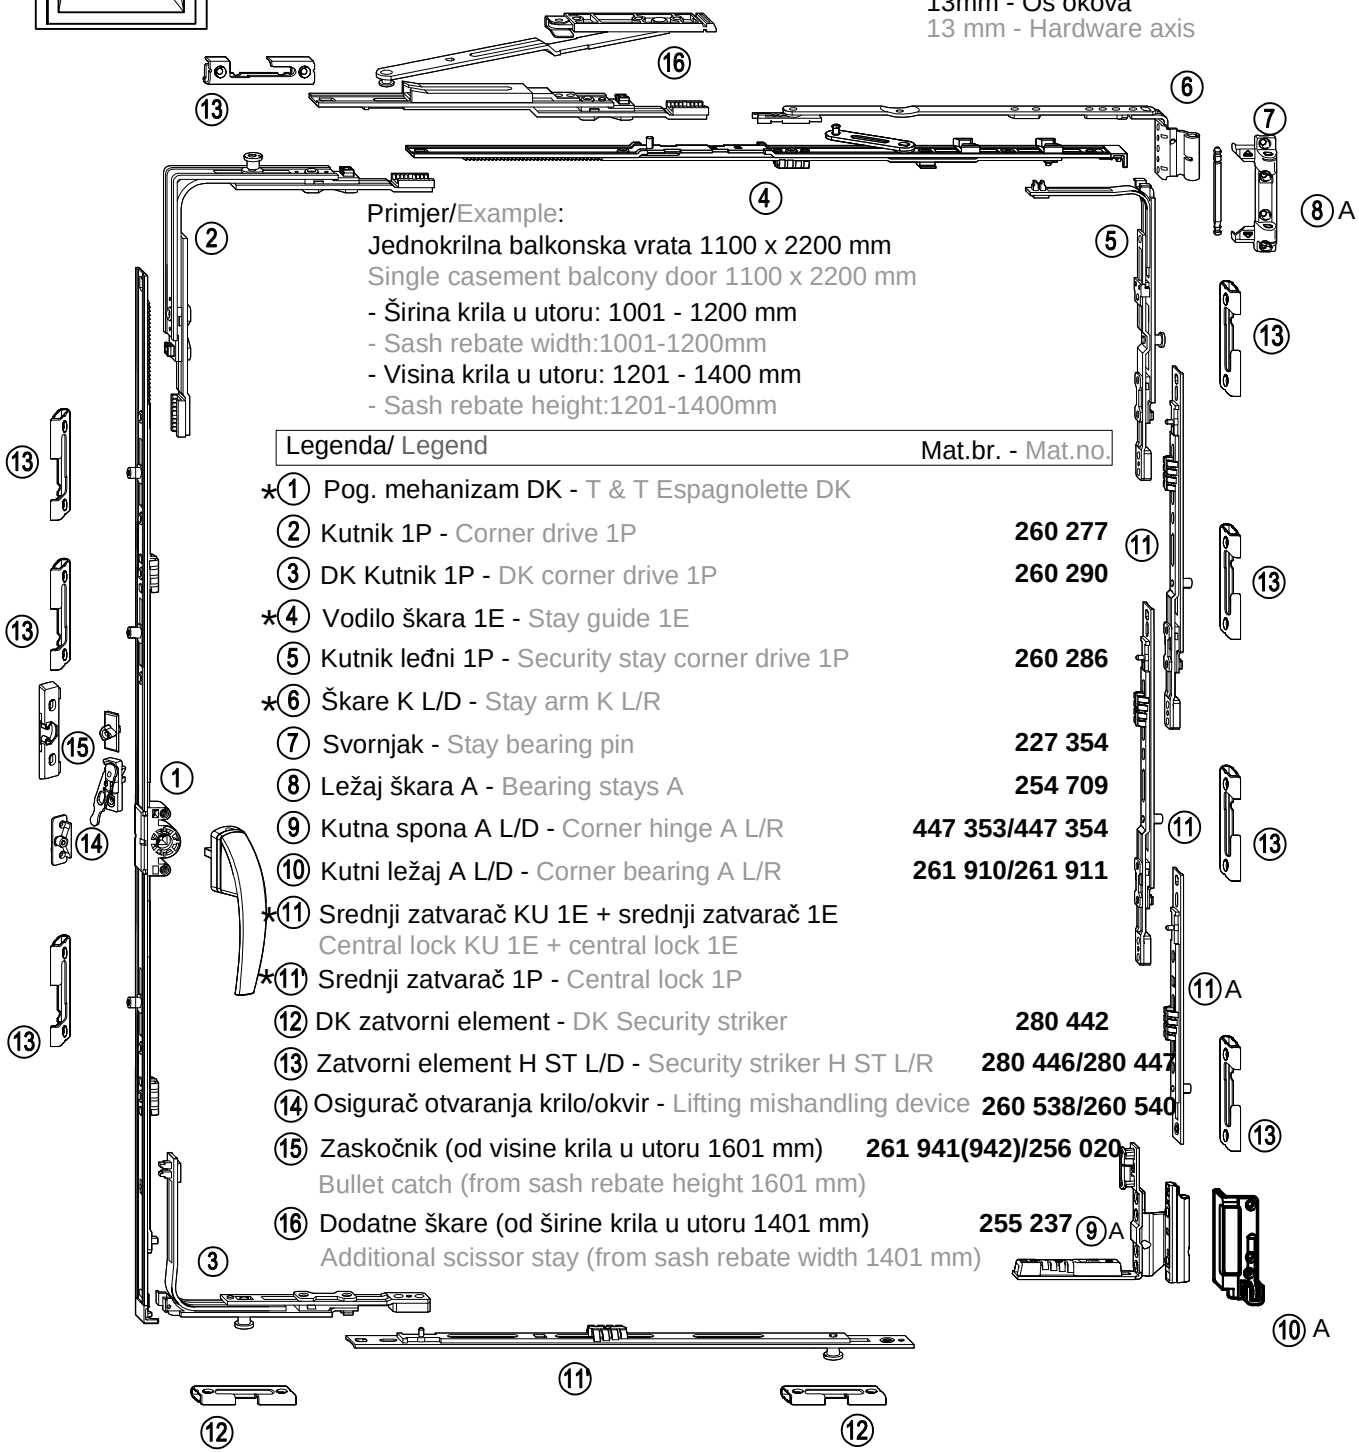

Primjer/Example:
Jednokrilna balkonska vrata 1100 x 2200 mm
Single casement balcony door 1100 x 2200 mm
- Širina krila u utoru: 1001 - 1200 mm
- Sash rebate width:1001-1200mm
- Visina krila u utoru: 1201 - 1400 mm
- Sash rebate height:1201-1400mm


Legenda/ Legend	Mat.br. - Mat.no.
*1 Pog. mehanizam DK - T & T Espagnolette DK	
2 Kutnik 1P - Corner drive 1P	**260 277**
3 DK Kutnik 1P - DK corner drive 1P	**260 290**
*4 Vodilo škara 1E - Stay guide 1E	
5 Kutnik leđni 1P - Security stay corner drive 1P	**260 286**
*6 Škare K L/D - Stay arm K L/R	
7 Svornjak - Stay bearing pin	**227 354**
8 Ležaj škara A - Bearing stays A	**254 709**
9 Kutna spona A L/D - Corner hinge A L/R	**447 353/447 354**
10 Kutni ležaj A L/D - Corner bearing A L/R	**261 910/261 911**
*11 Srednji zatvarač KU 1E + srednji zatvarač 1E Central lock KU 1E + central lock 1E	
*11 Srednji zatvarač 1P - Central lock 1P	
12 DK zatvorni element - DK Security striker	**280 442**
13 Zatvorni element H ST L/D - Security striker H ST L/R	**280 446/280 447**
14 Osigurač otvaranja krilo/okvir - Lifting mishandling device	**260 538/260 540**
15 Zaskočnik (od visine krila u utoru 1601 mm) Bullet catch (from sash rebate height 1601 mm)	**261 941(942)/256 020**
16 Dodatne škare (od širine krila u utoru 1401 mm) Additional scissor stay (from sash rebate width 1401 mm)	**255 237**


* Napomena:
Promjenjivi elementi za različite širine i visine krila izabrati sa sljedeće stranice
* Remark:
Variable elements for different sash widths and heights, can be selected from next page


✱ Promjenjivi elementi - Variable elements

Pos.	Opis - Description			Mat. br. - Mat. no.
1.	Pog. mehanizam - Espagnolette	Visina krila Hkr (mm) - Sash height Hkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		431 - 480	370	284 314
		481 - 500	490	259 830
		501 - 600	490	259 830
		601 - 800	690	259 833
		801 - 1000	890	259 836
		1001 - 1200	1090	259 838
		1201 - 1400	1290	259 840
		1401 - 1600	1490	259 843
		1601 - 1800	1690	259 846
		1801 - 2000	1890	259 849
		2001 - 2200	2090	259 852
		2201 - 2400	2290	259 855
		2401 - 2600	2290	259 855
4.	Vodilo škara - Stay guide	Širina krila Lkr (mm) - Sash width Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		290 - 410	300	260 201
		411 - 600	490	256 024
		601 - 800	690	260 204
		801 - 1000	890	260 205
		801 - 1000	890	260 208
		1001 - 1200	1090	260 209
		1001 - 1200	1090	260 212
		1201 - 1600	1290	260 215
6.	Škare K L/D sistem 12/18-13 Stay arm K L/R system 12/18-13	Širina krila Lkr (mm) - Sash width Lkr (mm)	Dužina (mm) - Length (mm)	Mat. br. - Mat. no.
		290 - 410	150 L/D-L/R	349 687/349 688
		411 - 600	250 L/D-L/R	349 689/349 690
		601 - 800	350 L/D-L/R	349 691/349 692
		801 - 1400	500 L/D-L/R	349 693/349 694
11.	Srednji zatvarač, vertikalni - Multipart centre lock, vertical	Širina krila Lkr (mm) - Sash width Lkr (mm)	Visina krila Lkr (mm) - Sash height Lkr (mm)	Veličina (mm) - Size (mm)	Mat. br. - Mat. no.
		1101 - 1600	1101 - 1800	600	255 281
			1801 - 2400	600 con	255 282
			1801 - 2400	600	255 281
			2401 - 2600	600 con	255 282
			2401 - 2600	400	255 280
11'.	Srednji zatvarač, horizontalni - Multipart centre lock, horizontal			Veličina (mm) - Size (mm)	Mat. br. - Mat. no.
				200	255 284
				400	255 285
				600	255 286

SIGURNOSNA BRAVA 35 mm i 45 mm S TRI MJESTA KLJUČANJA - GU SECURY (MR2) - čelik
SAFETY LOCK 35 mm and 45 mm WITH 3 LOCKING POINTS - GU SECURY (MR2) - steel

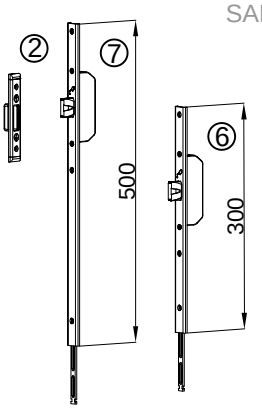

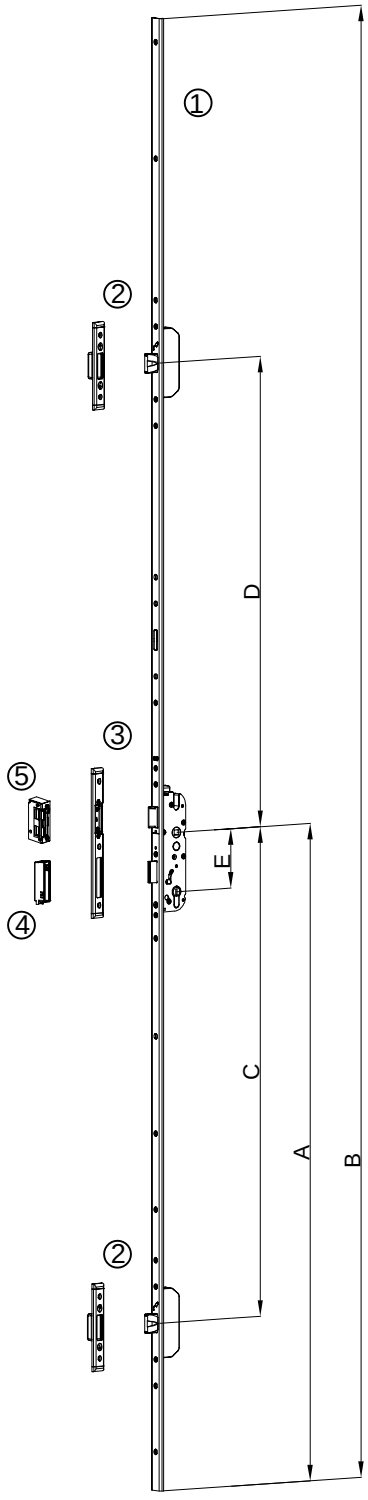

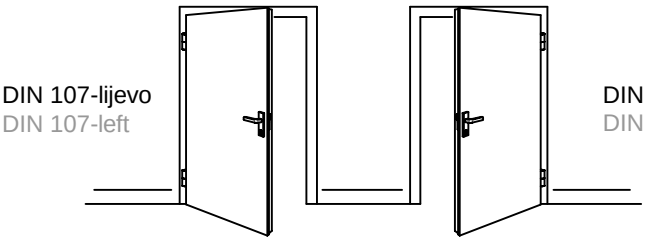

Okov za visine krila 1871 - 2188 mm (aluminij)
Hardware for leaf heights 1871 - 2188 mm (aluminium)

1) Brava GU Secury s masivnim zasunima (MR2)
Multipoint lock with massive bolts GU Secury (MR2)

Oznaka FEAL Code FEAL	Dubina Depth	Potisna ploča Push plate	Visina ručke (A) Handle height (A)	Rastojanje (E) Distance (E)	Četvrtka Quarter	Visina brave (B) Lock height (B)	(C)	(D)	Oznaka proizvođača Manufacturer code
122.016	35	[24x6	1020	92	□8	2285	760	730	6-31542-17-0-1
122.015	45	[24x6	1020	92	□8	2285	760	730	6-31531-17-0-1

2) **122.065**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-1
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-1

3) **122.064** (lijevi) ; **122.063** (desni)
Prihvatni lim (U) 24x6 mm,
- oznaka proizvođača GU:
6-37367-01-L-1 (lijevi);
6-37367-01-R-1 (desni)
122.064 (left) ; **122.063** (right)
Striking plate (U) 24x6 mm,
- manufacturer code GU:
6-37367-01-L-1 (left);
6-37367-01-R-1 (right)

4) **122.030**
Kućište zasuna brave (62 mm)
- oznaka proizvođača GU:
9-48553-03-0-6.....(Element po želji)
Latch bolt casement (62 mm).
- manufacturer code GU:
9-48553-03-0-6.....(Optional part)

5) **122.088**
Elektro otvarač vrata
GU ET8 9-24V,AC/DC, s klizačem za jezičak
- oznaka proizvođača GU: 6-35805-02-0-1
(Elektro otvarač se koristi po želji)
Electrical door opener
GU ET8 9-24V,AC/DC,with latch slide cover
- manufacturer code GU: 6-35805-02-0-1
(Electrical door opener is optional)

Dodatni okov za visine krila 2189-2388 mm
Additional hardware for leaf heights 2189-2388 mm

6) **122.102**
Secury produžetak brave MR2/24x6/300 mm
(dodatno gornje ključanje za visine krila 2189-2388 mm)
- oznaka proizvođača GU: 6-39751-15-0-1 (Element po želji)
Secury lock extension MR2/24x6/500 mm
(additional upper locking for leaf heights 2189-2388 mm)
- manufacturer code GU: 6-39751-15-0-1 (Optional part)


2) **122.065**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-1
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-1


Dodatni okov za visine krila 2389-2800 mm
Additional hardware for leaf heights 2389-2800 mm


7) **122.083**
Secury produžetak brave MR2/24x6/500 mm
(dodatno gornje ključanje za visine krila 2389-2800 mm)
- oznaka proizvođača GU: 6-37395-15-0-1 (Element po želji)
Secury lock extension MR2/24x6/500 mm
(additional upper locking for leaf heights 2389-2800 mm)
- manufacturer code GU: 6-37395-15-0-1 (Optional part)

2) **122.065**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-1
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-1

SIGURNOSNA BRAVA 35 mm i 45 mm S TRI MJESTA KLJUČANJA - GU SECURY (MR2) - inox*
SAFETY LOCK 35 mm and 45 mm WITH 3 LOCKING POINTS - GU SECURY (MR2) - inox*

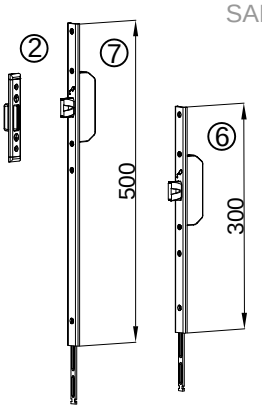

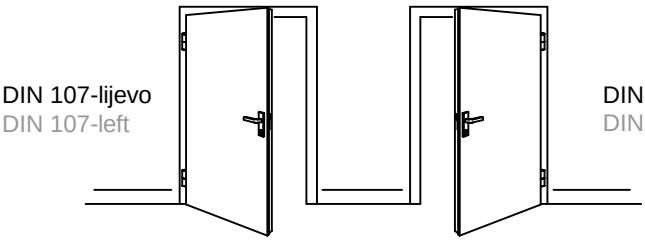

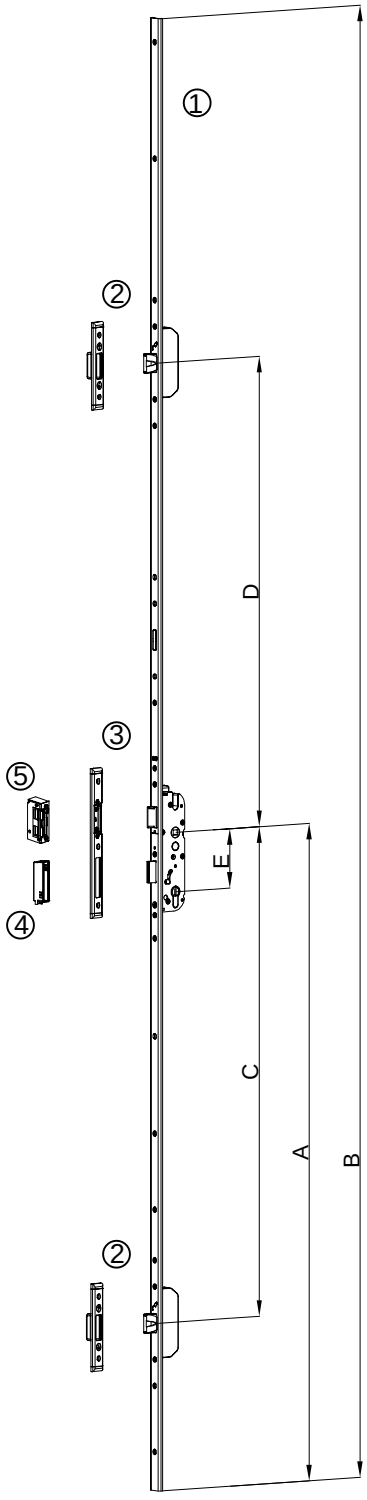

Okov za visine krila 1871 - 2188 mm (aluminij)
Hardware for leaf heights 1871 - 2188 mm (aluminium)

1) Brava GU Secury s masivnim zasunima (MR2)
Multipoint lock with massive bolts GU Secury (MR2)

Oznaka FEAL Code FEAL	Dubina Depth	Potisna ploča Push plate	Visina ručke (A) Handle height (A)	Rastojanje (E) Distance (E)	Četvrtka Quarter	Visina brave (B) Lock height (B)	(C)	(D)	Oznaka proizvođača Manufacturer code
122.114	35	[24x6	1020	92	□8	2285	760	730	6-31542-17-0-8
122.115	45	[24x6	1020	92	□8	2285	760	730	6-31531-17-0-8

2) **122.128**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-8
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-8

3) **122.130** (lijevi) ; **122.129** (desni)
Prihvatni lim (U) 24x6 mm,
- oznaka proizvođača GU:
6-37367-01-L-8 (lijevi);
6-37367-01-R-8 (desni)
122.130 (left) ; **122.129** (right)
Striking plate (U) 24x6 mm,
- manufacturer code GU:
6-37367-01-L-8 (left);
6-37367-01-R-8 (right)

4) **122.030**
Kućište zasuna brave (62 mm)
- oznaka proizvođača GU:
9-48553-03-0-6.....(Element po želji)
Latch bolt casement (62 mm).
- manufacturer code GU:
9-48553-03-0-6.....(Optional part)

5) **122.088**
Elektro otvarač vrata
GU ET8 9-24V,AC/DC, s klizačem za jezičak
- oznaka proizvođača GU: 6-35805-02-0-1
(Elektro otvarač se koristi po želji)
Electrical door opener
GU ET8 9-24V,AC/DC,with latch slide cover
- manufacturer code GU: 6-35805-02-0-1
(Electrical door opener is optional)

Dodatni okov za visine krila 2189-2388 mm
Additional hardware for leaf heights 2189-2388 mm

6) **122.120**
Secury produžetak brave MR2/24x6/300 mm
(dodatno gornje ključanje za visine krila 2189-2388 mm)
- oznaka proizvođača GU: 6-39751-15-0-8 (Element po želji)
Secury lock extension MR2/24x6/500 mm
(additional upper locking for leaf heights 2189-2388 mm)
- manufacturer code GU: 6-39751-15-0-8 (Optional part)

2) **122.128**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-8
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-8


Dodatni okov za visine krila 2389-2800 mm
Additional hardware for leaf heights 2389-2800 mm


7) **122.122**
Secury produžetak brave MR2/24x6/500 mm
(dodatno gornje ključanje za visine krila 2389-2800 mm)
- oznaka proizvođača GU: 6-37395-15-0-8 (Element po želji)
Secury lock extension MR2/24x6/500 mm
(additional upper locking for leaf heights 2389-2800 mm
- manufacturer code GU: 6-37395-15-0-8 (Optional part)

2) **122.128**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-8
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-8

* Preporučuje se korištenje u uvjetima gdje je potrebna visoka antikorozivna zaštita.
* Recommended for use in conditions where high corrosion protection is required.

SIGURNOSNA BRAVA 35 mm i 45 mm S TRI MJESTA KLJUČANJA - GU SECURY (SECA) - čelik
SAFETY LOCK 35 mm and 45 mm WITH 3 LOCKING POINTS - GU SECURY (SECA) - steel

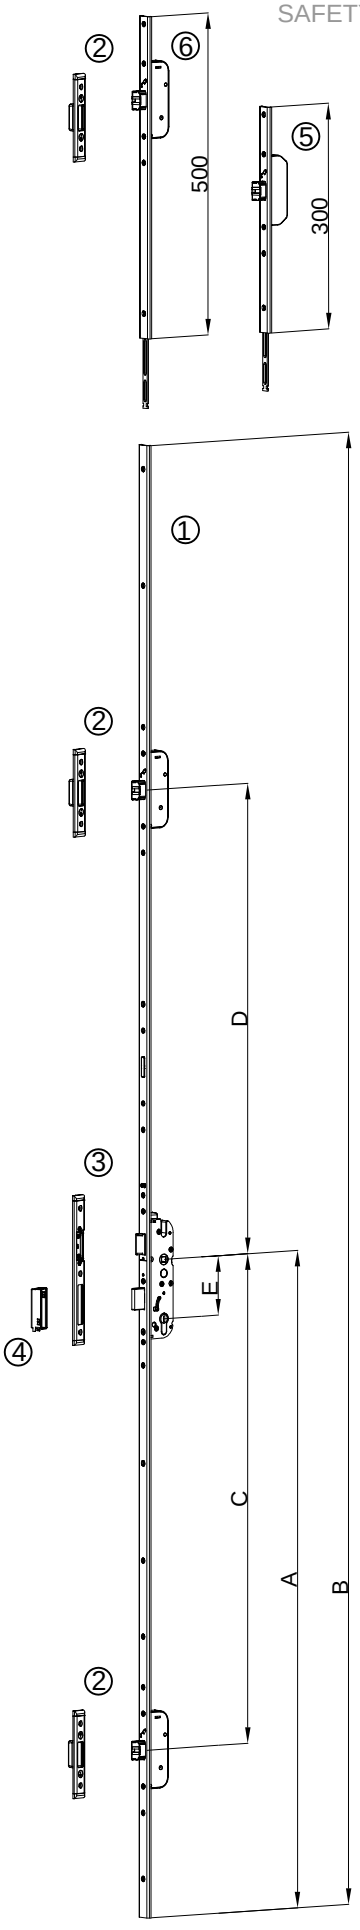

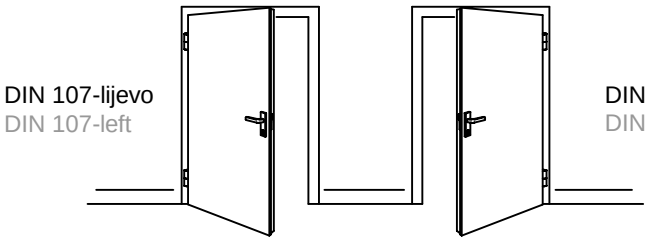

Okov za visine krila 1871 - 2188 mm (aluminij)
Hardware for leaf heights 1871 - 2188 mm (aluminium)

1) Brava GU Secury s automatskim zasunima (SECA)
Multipoint lock with automatic bolts GU Secury (SECA)

Oznaka FEAL Code FEAL	Dubina Depth	Potisna ploča Push plate	Visina ručke (A) Handle height (A)	Rastojanje (E) Distance (E)	Četvrtka Quarter	Visina brave (B) Lock height (B)	(C)	(D)	Oznaka proizvođača Manufacturer code
122.020	35	[24x6	1020	92	□8	2285	760	730	6-28480-31-0-1
122.019	45	[24x6	1020	92	□8	2285	760	730	6-28484-31-0-1

2) **122.065**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-1
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-1

3) **122.064** (lijevi) ; **122.063** (desni)
Prihvatni lim (U) 24x6 mm,
- oznaka proizvođača GU: 6-37367-01-L-1 (lijevi);
6-37367-01-R-1 (desni)
122.064 (left) ; **122.063** (right)
Striking plate (U) 24x6 mm,
- manufacturer code GU: 6-37367-01-L-1 (left);
6-37367-01-R-1 (right)

4) **122.030**
Kućište zasuna brave (62 mm)
- oznaka proizvođača GU:
9-48553-03-0-6 (Element po želji)
Latch bolt casement (62 mm)
- manufacturer code GU:
9-48553-03-0-6 (Optional part)

Dodatni okov za visine krila 2189-2388 mm (aluminij)
Additional hardware for leaf heights 2189-2388 mm (aluminium)

5) **122.103**
Secury produžetak brave SECA/24x6/300 mm
(dodatno gornje ključanje za visine krila 2189-2388 mm)
- oznaka proizvođača GU: 6-39750-15-0-1 (Element po želji)
Secury lock extension SECA/24x6/300 m
(additional upper locking for leaf heights 2189-2388 mm)
- manufacturer code GU: 6-39750-15-0-1 (Optional part)


2) **122.065**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-1
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-1


Dodatni okov za visine krila 2389-2800 mm (aluminij)
Additional hardware for leaf heights 2389-2800 mm (aluminium)

6) **122.084**
Secury produžetak brave SECA/24x6/500 mm
(dodatno gornje ključanje za visine krila 2389-2800 mm)
- oznaka proizvođača GU: 6-37394-15-0-1 (Element po želji)
Secury lock extension SECA/24x6/500 mm
(additional upper locking for leaf heights 2389-2800 mm
- manufacturer code GU: 6-37394-15-0-1 (Optional part)


2) **122.065**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-1
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-1

SIGURNOSNA BRAVA 35 mm i 45 mm S TRI MJESTA KLJUČANJA - GU SECURY (SECA) - inox*
SAFETY LOCK 35 mm and 45 mm WITH 3 LOCKING POINTS - GU SECURY (SECA) - inox*

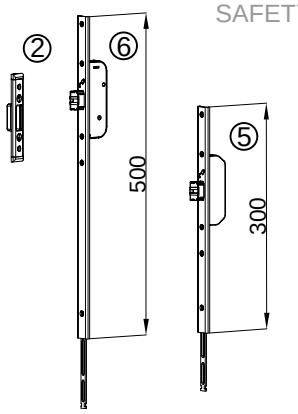

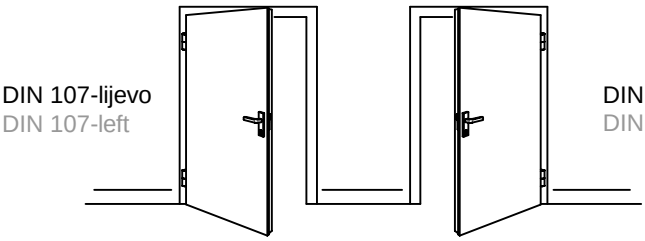

Okov za visine krila 1871 - 2188 mm (aluminij)
Hardware for leaf heights 1871 - 2188 mm (aluminium)

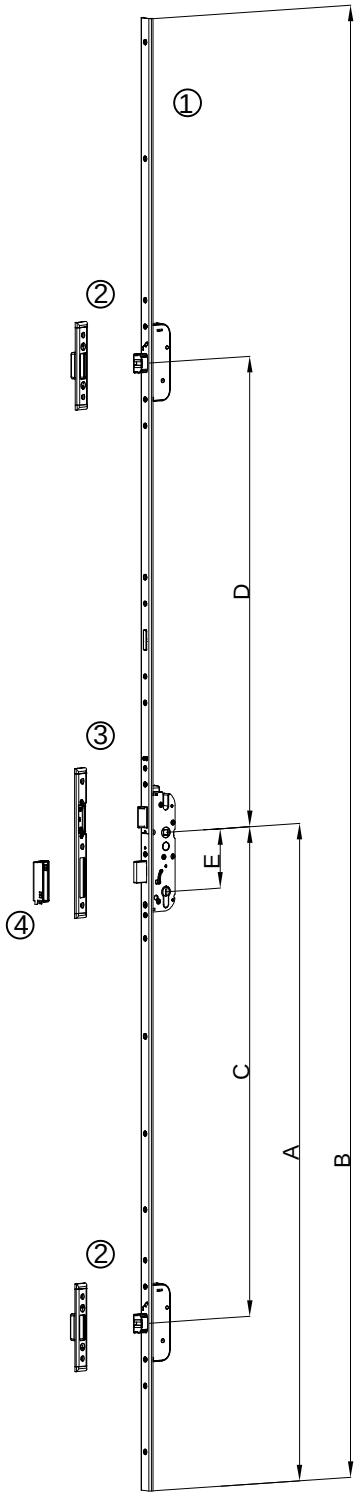

1) Brava GU Secury s automatskim zasunima (SECA)
Multipoint lock with automatic bolts GU Secury (SECA)

Oznaka FEAL Code FEAL	Dubina Depth	Potisna ploča Push plate	Visina ručke (A) Handle height (A)	Rastojanje (E) Distance (E)	Četvrtka Quarter	Visina brave (B) Lock height (B)	(C)	(D)	Oznaka proizvođača Manufacturer code
122.116	35	[24x6	1020	92	□8	2285	760	730	6-28480-31-0-8
122.117	45	[24x6	1020	92	□8	2285	760	730	6-28484-31-0-8

2) **122.128**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-8
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-8

3) **122.130** (lijevi) ; **122.129** (desni)
Prihvatni lim (U) 24x6 mm,
- oznaka proizvođača GU: 6-37367-01-L-8 (lijevi);
6-37367-01-R-8 (desni)
122.130 (left) ; **122.129** (right)
Striking plate (U) 24x6 mm,
- manufacturer code GU: 6-37367-01-L-8 (left);
6-37367-01-R-8 (right)

4) **122.030**
Kućište zasuna brave (62 mm)
- oznaka proizvođača GU:
9-48553-03-0-6 (Element po želji)
Latch bolt casement (62 mm)
- manufacturer code GU:
9-48553-03-0-6 (Optional part)

Dodatni okov za visine krila 2189-2388 mm (aluminij)
Additional hardware for leaf heights 2189-2388 mm (aluminium)

5) **122.121**
Secury produžetak brave SECA/24x6/300 mm
(dodatno gornje ključanje za visine krila 2189-2388 mm)
- oznaka proizvođača GU: 6-39750-15-0-8 (Element po želji)
Secury lock extension SECA/24x6/300 m
(additional upper locking for leaf heights 2189-2388 mm)
- manufacturer code GU: 6-39750-15-0-8 (Optional part)


2) **122.128**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-8
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-8

Dodatni okov za visine krila 2389-2800 mm (aluminij)
Additional hardware for leaf heights 2389-2800 mm (aluminium)


6) **122.123**
Secury produžetak brave SECA/24x6/500 mm
(dodatno gornje ključanje za visine krila 2389-2800 mm)
- oznaka proizvođača GU: 6-37394-15-0-1 (Element po želji)
Secury lock extension SECA/24x6/500 mm
(additional upper locking for leaf heights 2389-2800 mm)
- manufacturer code GU: 6-37394-15-0-1 (Optional part)

2) **122.128**
Prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU:
6-40032-AC-0-8
Striking plate (U) 24x6 mm
- manufacturer code GU:
6-40032-AC-0-8

* Preporučuje se korištenje u uvjetima gdje je potrebna visoka antikorozivna zaštita.
* Recommended for use in conditions where high corrosion protection is required.

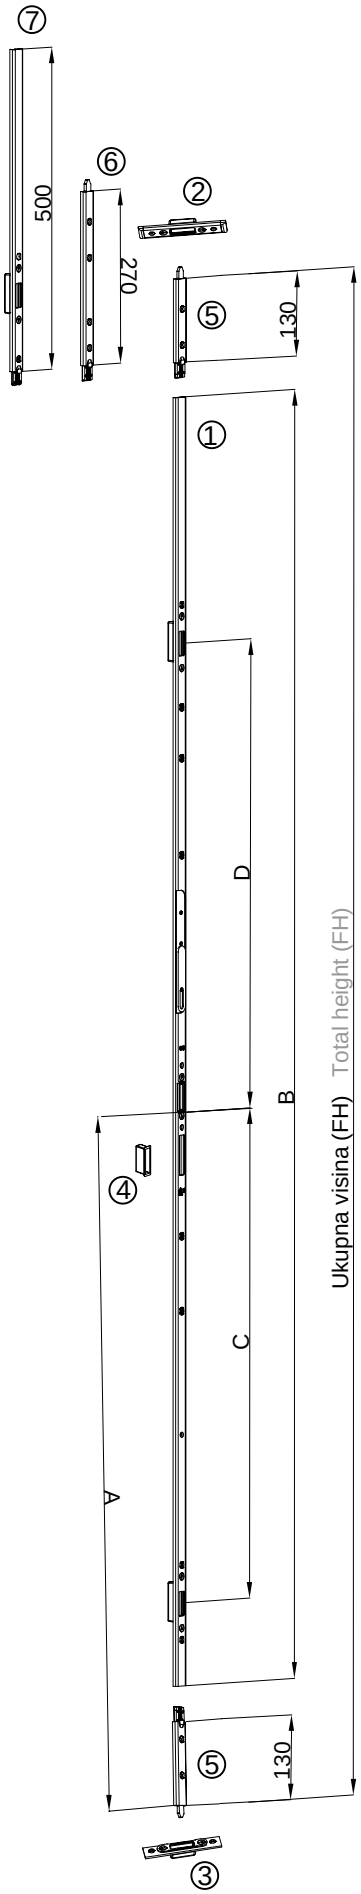

OKOV ZA KLJUČANJE POMOĆNOG KRILA ZA BRAVE MR2 I SECA
HARDWARE FOR LOCKING OF PASSIVE LEAF FOR LOCK MR2 AND SECA

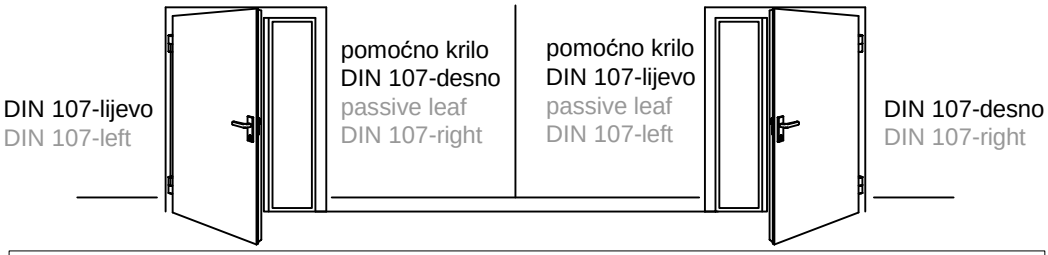

Okov za ključanje pomoćnog krila za visine krila 2009 - 2265 mm (aluminij)
Hardware for locking of passive leaf for leaf heights 2009 - 2265 mm (aluminium)

1) Brava za ključanje pomoćnog krila
Multipoint lock with massive bolts GU Secury (MR2)

Oznaka FEAL Code FEAL	DIN smjer* DIN direction*	Potisna ploča Push plate	Zračnost Groove	Visina ručke (A) Handle height (A)	Visina brave (B) Lock height (B)	(C)	(D)	Oznaka proizvođača Manufacturer code
122.025	Lijevo Left	[24x8	12	1020	2000	760	730	6-37900-32-L-1
122.082	Desno Right	[24x8	12	1020	2000	760	730	6-37900-32-R-1

2) **122.065 (čelik); 122.128 (inox)**
Gornja prihvatna pločica (U) 24x6 mm
- oznaka proizvođača GU: 6-40032-AC-0-1 (čelik)
6-40032-AC-0-8 (inox)
Top striking plate (U) 24x6 mm
- manufacturer code GU:6-40032-AC-0-1 (steel)
6-40032-AC-0-8 (inox)

3) **122.080**
Donja prihvatna pločica (ravna) 24x3 mm
- oznaka proizvođača GU: 6-40032-DR-0-1
Bottom striking plate (flat) 24x3 mm
- manufacturer code GU:6-40032-DR-0-1

4) **122.087**
Kućište jezička brave
- oznaka proizvođača GU: 9-43952-01-0-6
Latch bolt casement
- manufacturer code GU:9-43952-01-0-6

5) **122.027** - Element za nastavljanje (130 mm)
- oznaka proizvođača GU: 6-35765-01-0-1
(ugrađuje se gore i dolje)
Shoot bolt unit (130 mm)
- manufacturer code GU: 6-35765-01-0-1
(montage on top and bottom)

Nastavci za ključanje pomoćnog krila za visine krila 2266 - 2308 mm (aluminij)
Shoot bolt units for locking of passive leaf for leaf heights 2266 - 2308 mm (aluminium)

6) **122.026 -** Element za nastavljanje (270 mm)
- oznaka proizvođača GU: 6-35765-41-0-1 ;
(ugrađuje se gore)
Shoot bolt unit (270 mm),
- manufacturer code GU: 6-35765-41-0-1 ; (montage on top)

5) **122.027** - (ugrađuje se dolje)
- (montage on bottom)

Nastavci i produžetak za ključanje pomoćnog krila za visine krila 2309 - 2508 mm (al.)
Shoot bolt units and lock extension for locking of passive leaf for leaf heights 2309 - 2508

5) **122.027** - (ugrađuje se gore i dolje)
- (montage on top and bottom)

7) **122.085 (lijevi) (left); 122.086 (desni) (right)**
Produžetak brave za pomoćno krilo 500 mm/U24x8/500NL1
- oznaka proizvođača GU:
6-37596-32-L-1 (lijevi), 6-37596-32-R-1 (desni)
Lock extension for passive leaf 500 mm/U24x8/500NL1
- manufacturer code GU:
6-37596-32-L-1 (left), 6-37596-32-R-1 (right)

Napomena:
Za visine krila od 2309 do 2508 mm potrebno je na glavno krilo postaviti produžetak brave od 300 mm 122.102 (MR2) ili 122.103 (SECA)
Remark:
For leaf heights 2309 - 2508, it is necessary to mount lock extension of 300 mm 122.102 (MR2) or 122.103 (SECA) on the active leaf

Nastavci i produžetak za ključanje pomoćnog krila za visine krila 2509 - 2800 mm (al.)
Shoot bolt units and lock extension for locking of passive leaf for leaf heights 2509 - 2800







5) **122.027** - (dolje, gore za visine 2509-2765 mm)
- (bottom,on top for heights 2509-2765 mm)





6) 122.026 - (gore za visine 2766 - 2800 mm)
- (on top for heights 2766 - 2800 mm)





7) **122.085 (lijevi) (left); 122.086 (desni) (right)**

Napomena: Za visine krila iznad 2509 mm, potrebno je na glavno krilo postaviti produžetak brave 500 mm 122.083 (MR2) ili 122.084 (SECA)
Remark: For leaf heights above 2509 mm it is necessary to mount lock extension of 500 mm 122.083 (MR2) or 122.084 (SECA) on the active leaf




* Smjer otvaranja pomoćnog krila
* Passive leaf opening direction


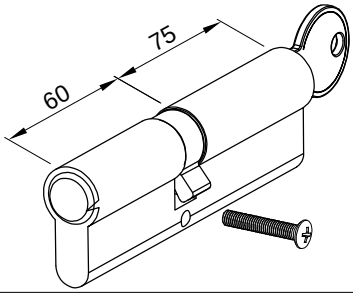



Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
122.042		- Prihvatni dio za valjak (za bravu MR2) - Oznaka proizvođača GU: K-15597-01-0-6 - Receiving part for the roller (for lock MR2) - Manufacturer code GU: K-15597-01-0-6	Al Pvc	
122.040 **122.041**		- Valjak za bravu 35 mm (MR2) - Oznaka proizvođača GU: 6-36144-35-0-1 A - Roller for lock 35 mm (MR2) - Manufacturer code GU: 6-36144-35-0-1 A - Valjak za bravu 45 mm (MR2) - Oznaka proizvođača GU: 6-36144-45-0-1 A - Roller for lock 45 mm (MR2) - Manufacturer code GU: 6-36144-45-0-1 A		
122.089		- Cilindar (uložak) BKS serije 88 (dužina cilindra 60-75mm) - Oznaka proizvođača GU-BKS: B 8800 0628 - Lock insert (cylinder) series 88 - Manufacturer code GU-BKS: B 8800 0628 (cylinder length 60-75 mm)	Ni	
102.028		- Ručka za vrata s ovalnom rozetom serije BELCANTO H2.0 (s prihvatom četvrtke 8x8mm) - jednostrano ručka - Oznaka proizvođača GU-BKS: B-70130-63-0-8 - Završna obrada: Inox - Door handle with oval rosette BELCANTO H2.0 (for spindle 8x8mm) - half lever set - Manufacturer code GU-BKS: B-70130-63-0-8 - Finish: stainless steel		Naručuje se po komadu It is ordered per piece
102.029		- Ručka za vrata s ovalnom rozetom serije RONDO H1.1 (s prihvatom četvrtke 8 mm) - jednostrano ručka - Oznaka proizvođača GU-BKS: B-70130-61-0-8 - Završna obrada: Inox - Door handle with oval rosette RONDO H1.1 (for spindle 8x8mm) - half lever set - Manufacturer code GU-BKS: B-70130-61-0-8 - Finish: stainless steel		Naručuje se po komadu It is ordered per piece
102.025	 - za jednostranu ručku skratiti na 90 mm - for single-sided handle shorten to 90 mm	- Četvrtka 8x8 mm - Oznaka proizvođača GU-BKS: B-78400-0O-0-1 (dužina četvrtke L=145 mm) - Square spindle 8x8 mm - Manufacturer code GU-BKS: B-78400-0O-0-1 (spindle length L=145 mm)		

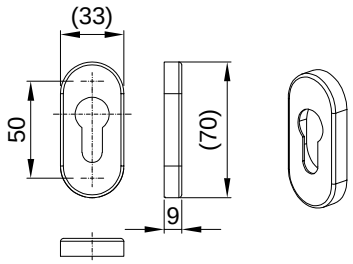
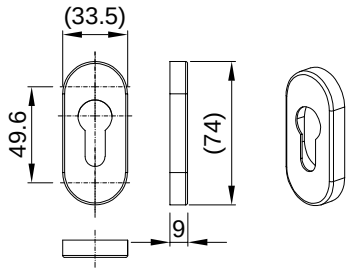


Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
122.098		- Ovalna rozeta za zaštitu cilindra serije BELCANTO - Oznaka proizvođača GU-BKS: B-72730-00-0-8 - Završna obrada: Inox - Oval rosette for cylinder protection BELCANTO series - Manufacturer code GU-BKS: B-72730-00-0-8 - Finish: stainless steel		Naručuje se po komadu It is ordered per piece
122.097		- Ovalna sigurnosna rozeta za zaštitu cilindra - Oznaka proizvođača GU-BKS: B-78820-0R-0-8 - Završna obrada: Inox - Oval security rosette for cylinder protection - Manufacturer code GU-BKS: B-78820-0R-0-8 - Finish: stainless steel		Naručuje se po komadu It is ordered per piece
122.101		- Okrugla prstenasta rozeta za debljine profila do 5mm (za debljinu panela 3mm) - Oznaka proizvođača GU-BKS: L-58R25-05-0-8 -Round rosette for profile thickness up to 5 mm (for panel thickness up to 3 mm) - Manufacturer code GU-BKS: L-58R25-05-0-8	Inox	
122.106		- Jednodijelna prihvatna ploča MR/SECA U 24x6, 2310/730/760 - lijeva - Oznaka proizvođača GU : 6-40033-FE-L-1 - One-piece striker MR/SECA U 24x6, 2310/730/760 - left - Manufacturer code GU: 6-40033-FE-L-1	Čelik Steel	
122.107		- Jednodijelna prihvatna ploča MR/SECA U 24x6, 2310/730/760 - desna - Oznaka proizvođača GU : 6-40033-FE-R-1 - One-piece striker MR/SECA U 24x6, 2310/730/760 - right - Manufacturer code GU: 6-40033-FE-R-1	Čelik Steel	
122.131		- Produžetak jednodijelne prihvatne ploče MR/SECA U 24x6, 500mm - Oznaka proizvođača GU: 6-40057-AC-0-1 - One-piece striker extension MR/SECA U 24x6, 500 mm - Manufacturer code: GU: 6-40057-AC-0-1	Čelik Steel	







Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
122.105		- Prihvatni lim U24x6 fiksni (lijevi/desni) - Oznaka proizvođača GU : B-90000-26-0-8 - Striker U24x6 fixed (left/right) - Manufacturer code GU: B-90000-26-0-8	Inox	
102.030		- Jednostrani kosi rukohvat L=800 mm, A=600 mm - Oznaka proizvođača GU-BKS: B-78820-0C-0-8 - Push/pull handle with sloping supports 45°, L=800 mm, A=600 mm - Manufacturer code GU-BKS: B-78820-0C-0-8	Inox	
115.016.01 **02** **03**		- Skrivena šarka FEAL-GIESSE za vrata otvaranje unutra - Boje: 01- bijela; 02 - siva; 03 - crna - Concealed door hinge FEAL-GIESSE (door - inward opening) - Color: 01- white; 02 - gray;03 - black		
521.507		- Kontraploča (dio na ramu) skrivene šarke 115.016 - Counterplate (part on frame) for the concealed hinge 115.016	Al	
521.508		- Kontraploča (dio na ramu) skrivene šarke 115.016 (za tipologiju: otvarajuće s fiksnim dijelom) - Counterplate (part on frame) for the concealed hinge 115.016	Al	


Brtvila
Gaskets

Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
338.017		- Centralna brtva - Central gasket	EPDM + Spužvasti EPDM EPDM + Foam EPDM	70±5 ShA 0.9±0.15 g/cm³
344.045		- Brtva u drvetu za prihvat staklo lajsne i prečke - Gasket in the wooden covering for the glazing bead and mullion profiles	Elastron G SEBS	85±5 ShA
344.046		- Brtva prema drvetu na ramu i prečki (smeđa boja) - Gasket between the wooden covering and the frame and mullion profiles (brown color)	Elastron G SEBS	65±5 ShA
344.047		- Brtva u kombatuti (smeđa boja) - Gasket in the flying mullion (brown color)	Elastron G SEBS	65±5 ShA
344.050		- Brtva u krilu (smeđa boja) - Gasket in the sash (brown color)	TPE	65±5 ShA
344.112		- Brtva u krilu (smeđa boja) - Gasket in the sash (brown color)	TPE	65±5 ShA






Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
344.090		- Dilatacijska brtva između drvenih obloga - Dilatation gasket between wooden coverings	Guma Rubber	65±5 ShA
344.039		- Brtva za profil ravnog spoja F-1232 - Gasket for the flat joint profile F-1232	Elastron G SEBS	65±5 ShA
328.002		- Brtva prema staklu /vanjska/ - Glazing gasket /exterior/	EPDM	60±5 ShA
328.003		- Brtva prema staklu /vanjska/ - Glazing gasket /exterior/	EPDM	60±5 ShA
344.049.03 .05		- Brtva prema staklu /unutarnja, nosi 3.5-4.5 mm - Boje: 03 - crna, 05 - smeđa - Glazing gasket /interior, carries 3.5-4.5 mm - Color: 03 - black, 05 - brown	Elastron G SEBS	65±5 ShA
318.001		- Brtva prema staklu /unutarnja/ - Glazing gasket /interior/	EPDM	70±5 ShA







Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
318.002		- Brtva prema staklu /unutarnja/ - Glazing gasket /interior/	EPDM	70±5 ShA
311.003		- Brtva prema staklu /unutarnja, nosi 3-4 mm - Glazing gasket /interior, carries 3-4 mm	EPDM	70±5 ShA
311.004		- Brtva prema staklu /unutarnja, nosi 5-6 mm - Glazing gasket /interior, carries 5-6 mm	EPDM	70±5 ShA
344.093.03 05		- Brtva prema staklu /unutarnja, nosi 3.5-5 mm - Boje: 03-crna; 05-smeđa - Glazing gasket /interior, carries 3.5-5 mm - Color: 03-black; 05-brown	Elastron G SEBS	65±5 ShA
328.006		-Brtva u krilu -Sash gasket	EPDM	60±5 ShA
327.002		- Brtva u profilu kombatute - Gasket in flying mullion profile	Spužvasti EPDM Foam EPDM	900 kg/m^3






Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Napomena Remark
314.001		- Brtva u profilu rama - Gasket in the frame profile	TPE	65 ShA
338.004		- Centralna brtva rama - otvaranje unutra - Central gasket-frame-inward opening	EPDM	70 ShA 0.7 g/cm³
338.006		- Centralna brtva krila - otvaranje unutra - Central gasket-sash-inward opening	EPDM	70 ShA 0.7 g/cm³
331.013		- Brtva u pragu - otvaranje unutra - Threshold gasket - inward opening	EPDM	70±5 ShA
363.093		- Kutni umetak za centralnu brtvu 338.004 - Corner insert for the central gasket 338.004	EPDM	30 ShA
363.094		- Kutni umetak za centralnu brtvu 338.006 - Corner insert for the central gasket 338.006	EPDM	30 ShA






Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
368.003		- Kutni umetak za centralnu brtvu 338.017 - Corner insert for the central gasket 338.017	EPDM	40±5 ShA





Dodaci
Accessories







Oznaka Code	Opis Description	Izgled-presjek View-cross section	Materijal Material	Napomena Remark
433.017	Vijak 3.9x16 DIN 7981 Screw 3.9x16 DIN 7981		INOX A2	
433.018	Vijak 3.9x19 DIN 7981 Screw 3.9x19 DIN 7981		INOX A2	
433.020	Vijak 3.9x25 DIN 7981 Screw 3.9x25 DIN 7981		INOX A2	
433.044	Vijak 4.8x22 DIN 7981 Screw 4.8x22 DIN 7981		INOX A2	
433.045	Vijak 4.8x25 DIN 7981 Screw 4.8x25 DIN 7981		INOX A2	
433.046	Vijak 4.8x32 DIN 7981 Screw 4.8x32 DIN 7981		INOX A2	
433.091	Vijak 3.5x13 DIN 7982 Screw 3.5x13 DIN 7982		INOX A2	
433.103	Vijak 3.9x9.5 DIN 7982 Screw 3.9x9.5 DIN 7982		INOX A2	
433.105	Vijak 3.9x16 DIN 7982 Screw 3.9x16 DIN 7982		INOX A2	
433.107	Vijak 3.9x22 DIN 7982 Screw 3.9x22 DIN 7982		INOX A2	
433.108	Vijak 3.9x25 DIN 7982 Screw 3.9x25 DIN 7982		INOX A2	
433.110	Vijak 3.9x38 DIN 7982 Screw 3.9x38 DIN 7982		INOX A2	
433.133	Vijak 4.8x32 DIN 7982 Screw 4.8x32 DIN 7982		INOX A2	
433.134	Vijak 4.8x38 DIN 7982 Screw 4.8x38 DIN 7982		INOX A2	
433.201	Vijak za drvo 3.0x16.0 Screw for wood 3.0x16.0		INOX A2	
430.179	Fischer FFSZ 7.5x52 Fischer FFSZ 7.5x52		INOX A2	
430.184	Fischer FFS 7.5x62 Fischer FFS 7.5x62		INOX A2	
431.266	Vijak M8x13 tip FEAL Screw M8x13 type FEAL		INOX A2	
431.267	Vijak M4x6 DIN 7991 Screw M4x6 DIN 7991		INOX A2	
431.293	Vijak M6x16 tip FEAL Screw M6x16 type FEAL		INOX A2	
433.204	Vijak za klipsanje 4.8x18 Screw for clipping 4.8x18		INOX A2	

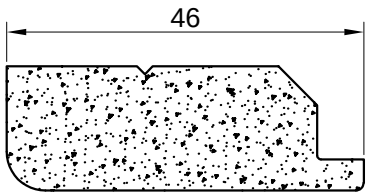
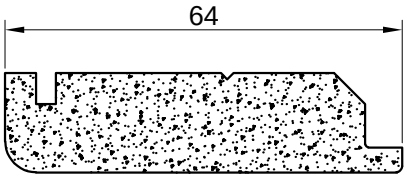
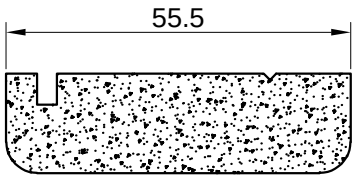
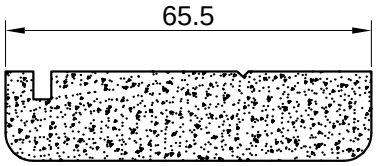


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Nap. Remark
600.001		- Drvena obloga rama FT-0400F - Wooden covering of the frame FT-0400F	Drvo Wood	
600.002		- Drvena obloga rama FT-0400F - Wooden covering of the frame FT-0400F	Drvo Wood	
600.003		- Drvena obloga krila FT-0410F u seriji Termo 75 DA - Wooden covering of the sash FT-0410F in series Termo 75 DA	Drvo Wood	
600.004		- Drvena obloga krila FT-0411F u seriji Termo 75 DA - Wooden covering of the sash FT-0411F in series Termo 75 DA	Drvo Wood	
600.005		- Drvena obloga uz staklo lajsnu F-1350 u seriji Termo 75 DA- troslojno staklo - Wooden covering for the glazing bead F-1350 in series Termo 75 DA- triple glazing	Drvo Wood	
600.006		- Drvena obloga uz staklo lajsnu F-1350 (Fiksno) u seriji Termo 75 DA-troslojno staklo - Wooden covering for the glazing bead F-1350 (fixed) in series Termo 75 DA- triple glazing	Drvo Wood	

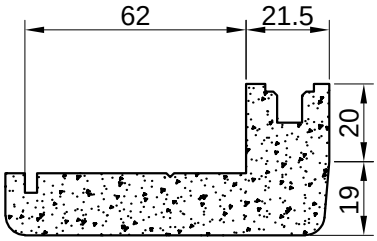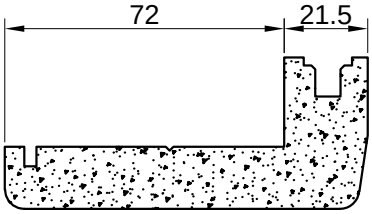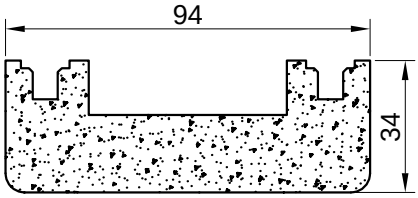Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Nap. Remark
600.007		- Drvena obloga prečke FT- 0420F u seriji Termo 75 DA - Wooden covering of the mullion FT-0420F in series Termo 75 DA	Drvo Wood	
600.008		- Drvena obloga krila FT-0410F i staklo lajsne F-1350 u seriji Termo 75 DA-troslojno staklo - Wooden covering of the sash FT-0410F and the glazing bead F-1350 in series Termo 75 DA - triple glazing	Drvo Wood	
600.009		- Drvena obloga krila FT-0411F i staklo lajsne F-1350 u seriji Termo 75 DA -troslojno staklo - Wooden covering of the sash FT-0411F and the glazing bead F-1350 in series Termo 75 DA - triple glazing	Drvo Wood	
600.010		- Drvena obloga prečke FT-0420F u krilu i staklo lajsne F-1350 u seriji Termo 75 DA - troslojno staklo - Wooden covering of the transom profile FT-0420F in the door leaf and the glazing bead F-1350 in series Termo 75 DA- triple glazing	Drvo Wood	
600.019		- Drvena obloga kutne prečke FT-0444F između okvira u seriji Termo 75 DA - Wooden covering of the corner mullion FT-0444F between frames in series Termo 75 DA	Drvo Wood	

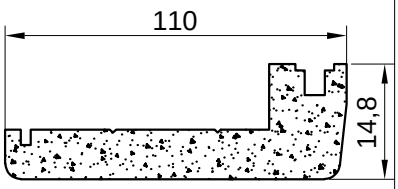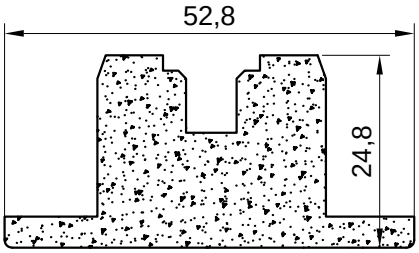
Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Nap. Remark
600.022		- Drvena obloga krila FT-0412F u seriji Termo 75DA (vrata) - Wooden covering of the sash FT-0412F and glazing bead in series Termo 75 DA (door)	Drvo Wood	
600.023		- Drvena obloga za staklo lajsnu F-1350 u seriji Termo 75DA (vrata) - Wooden covering for the glazing bead F-1350 in series Termo 75 DA (door)	Drvo Wood	
600.025		- Drvena obloga prečke FT-0423F u seriji Termo 75DA (vrata) - Wooden covering of the mullion FT-0423F in series Termo 75 DA (door)	Drvo Wood	
600.026		- Drvena obloga ispod prečke FT-0423F u seriji Termo 75DA (vrata) - Wooden covering below the mullion FT-0423F in series Termo 75 DA (door)	Drvo Wood	
600.027		- Drvena obloga za staklo lajsnu F-1725 u seriji Termo 75 DA-dvoslojno staklo - Wooden covering for the glazing bead F-1725 in series Termo 75 DA- double glazing	Drvo Wood	

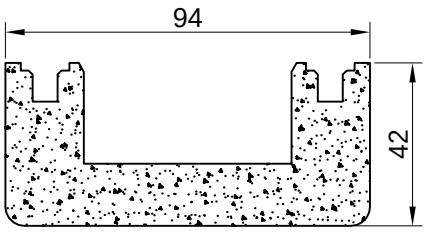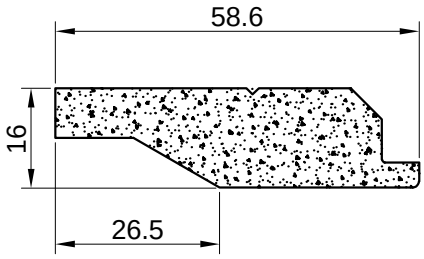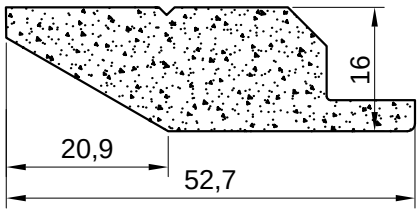
Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Nap. Remark
600.028		- Drvena obloga krila FT-0410F i staklo lajsne F-1725 u seriji Termo 75 DA -dvoslojno staklo - Wooden covering of the sash FT-0410F and the glazing bead F-1725 in series Termo 75 DA-double glazing	Drvo Wood	
600.029		- Drvena obloga prečke FT-0420F u krilu i staklo lajsne F-1725 u seriji Termo 75 DA- dvoslojno staklo - Wooden covering of the transom profile FT-0420F in the door leaf and the glazing bead F-1725 in series Termo 75 DA - double glazing	Drvo Wood	
600.037		- Drvena obloga rama vrata FT-0404F (skrivena šarka) - Wooden covering of the door frame FT-0404F (concealed hinge)	Drvo Wood	
600.032		- Drvena obloga rama vrata FT-0403F s fiksnim dijelom (skrivena šarka) - Wooden covering of the door frame FT-0403F with a fixed part (concealed hinge)	Drvo Wood	

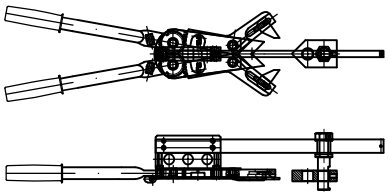
Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Nap. Remark
210.001		- Štanca za otklopno zaokretne sisteme prozora i vrata S1 - Punching machine for tilt & turn window and door systems S1		
240.001		- Kliješta za kutne spojnice - Manual crimping tool		
220.015		- Grupa glodala za obradu praga FT-0401F prema ramu FT-0400F u seriji Termo 75 DA - Group of milling cutters for processing of the threshold FT-0401F to the frame FT-0400F in series Termo 75 DA	Čelik Steel	
230.001		- Šablon za obradu profila FT-0400F, FT-0410F i FT-0411F za umetanje kutnih spojnica - Template for processing of the profiles FT-0400F, FT-0410F and FT-0411F for insertion of corner brackets	Čelik Steel	
230.002		- Šablon za obradu profila FT-0400F za prihvat profila praga FT-0401F - Template for processing of the profile FT-0400F for receiving of the threshold profile FT-0401F	Čelik Steel	
220.030		- Grupa glodala za obradu prečke FT-0420F prema ramu FT-0400F u seriji Termo 75 DA - Group of milling cutters for processing of the mullion FT-0420F to the frame FT-0400F in series Termo 75 DA	Čelik Steel	

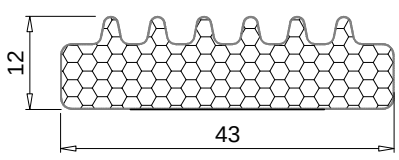
Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Nap. Remark
301.006.01 **02** **03**		- Set za bočni čep klupice (za klupice do 280 mm) - Boje: 01 - bijela; 02 - siva; 03 - crna - Aluminium window sill side caps (for window sills to 280 mm) - Color: 01 - white; 02 - gray; 03 - black	PVC, TPE Al.	
301.009.01 **02** **03**		- Set za bočni čep klupice (za klupice do 280 mm) - Boje: 01 - bijela; 02 - siva; 03 - crna - Aluminium window sill side caps (for window sills to 280 mm) - Color: 01 - white; 02 - gray; 03 - black	PVC, TPE Al.	
301.010.01 **02** **03**		- Set za bočni čep klupice (za klupice do 360 mm) - Boje: 01 - bijela; 02 - siva; 03 - crna - Aluminium window sill side caps (for window sill up to 360 mm) - Color: 01 - white; 02 - gray; 03 - black	PVC, TPE Al.	
521.107		- Element za ugradnju - Instalation element	PVC	
348.002		-Izolacijska ispuna s ljepljivom trakom (37x8) (spužvasta ispuna po opsegu stakla) -Insulation foam with adhesive tape (37x8) (foam insulation around the glass)	XPE	
340.013		- Izolacijska ispuna s ljepljivom trakom (43x12) (spužvasta ispuna po opsegu stakla) - Insulation foam with adhesive tape (43x12) (foam insulation around the glass)	XPE	


Presjeci
Cross sections










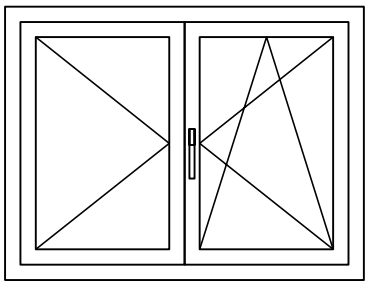


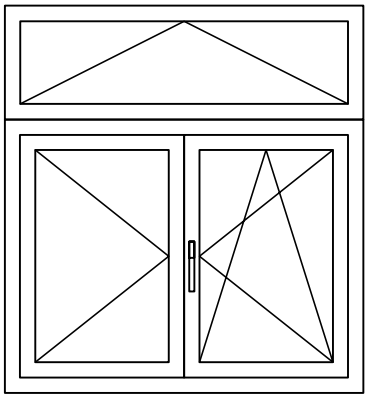


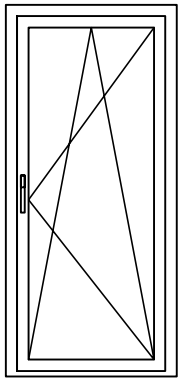


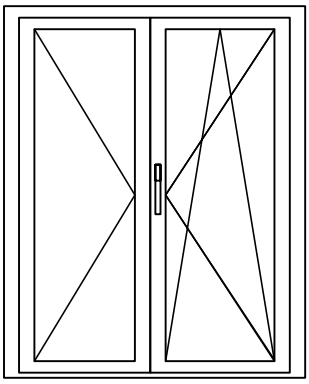


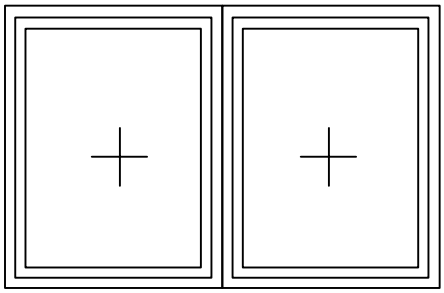


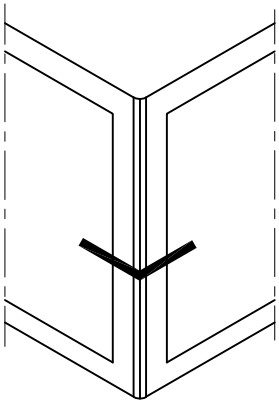





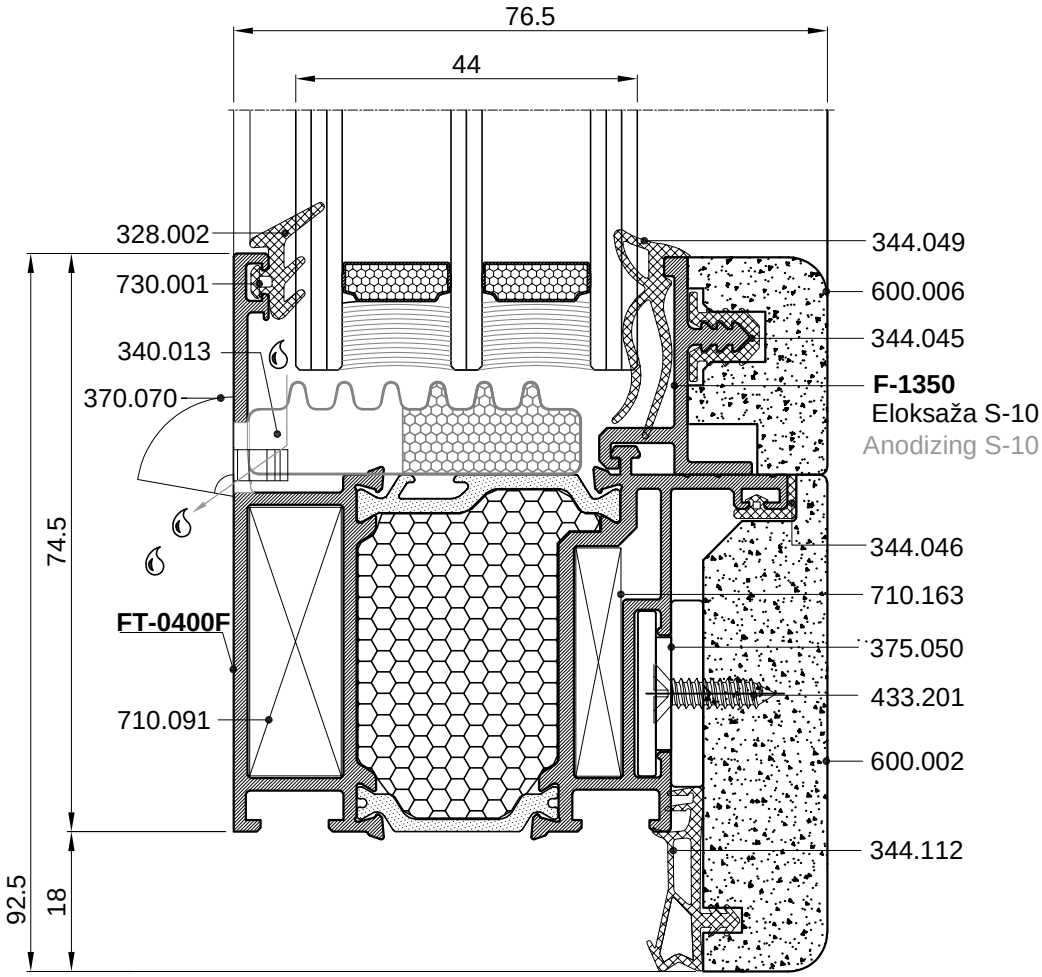

76.5
44
328.002
730.001
340.013
370.070
74.5
FT-0400F
710.091
92.5
18
344.049
600.006
344.045
F-1350
Eloksaža S-10
Anodizing S-10
344.046
710.163
375.050
433.201
600.002
344.112

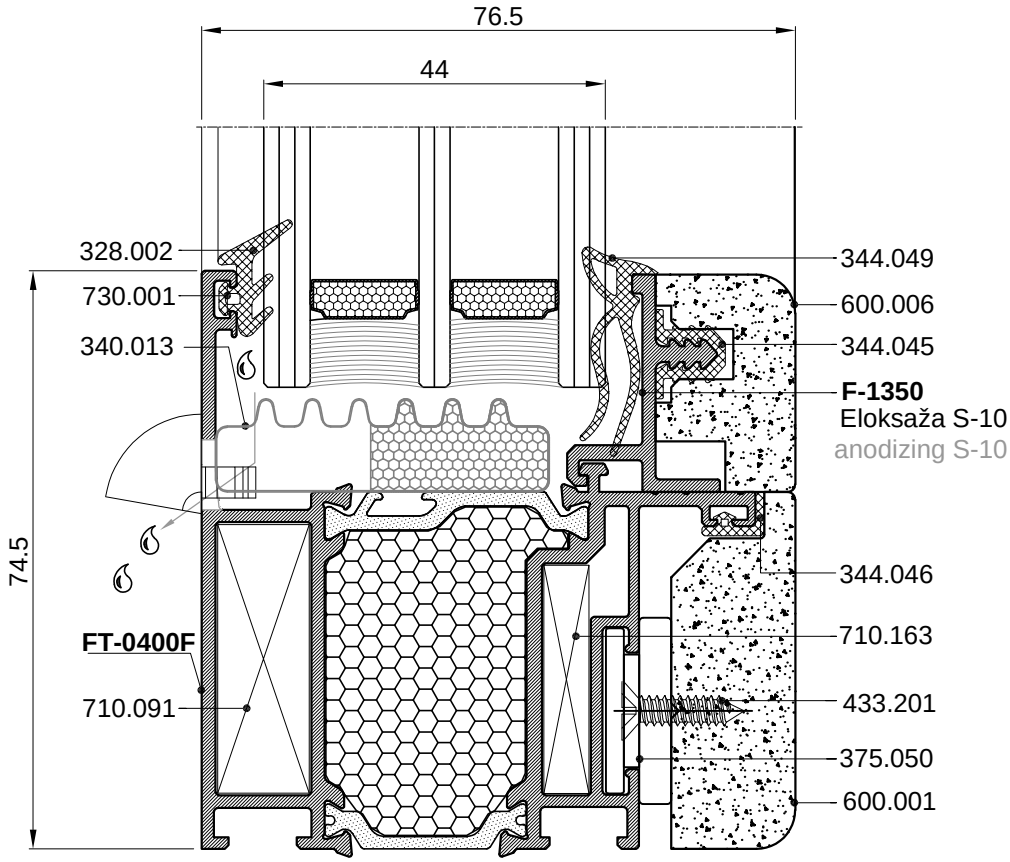

76.5
44
328.002
730.001
340.013
74.5
FT-0400F
710.091
344.049
600.006
344.045
F-1350
Eloksaža S-10
anodizing S-10
344.046
710.163
433.201
375.050
600.001

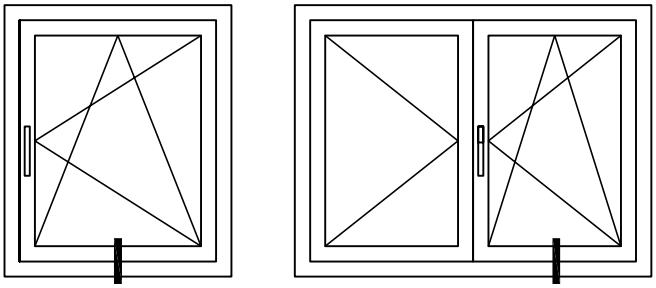

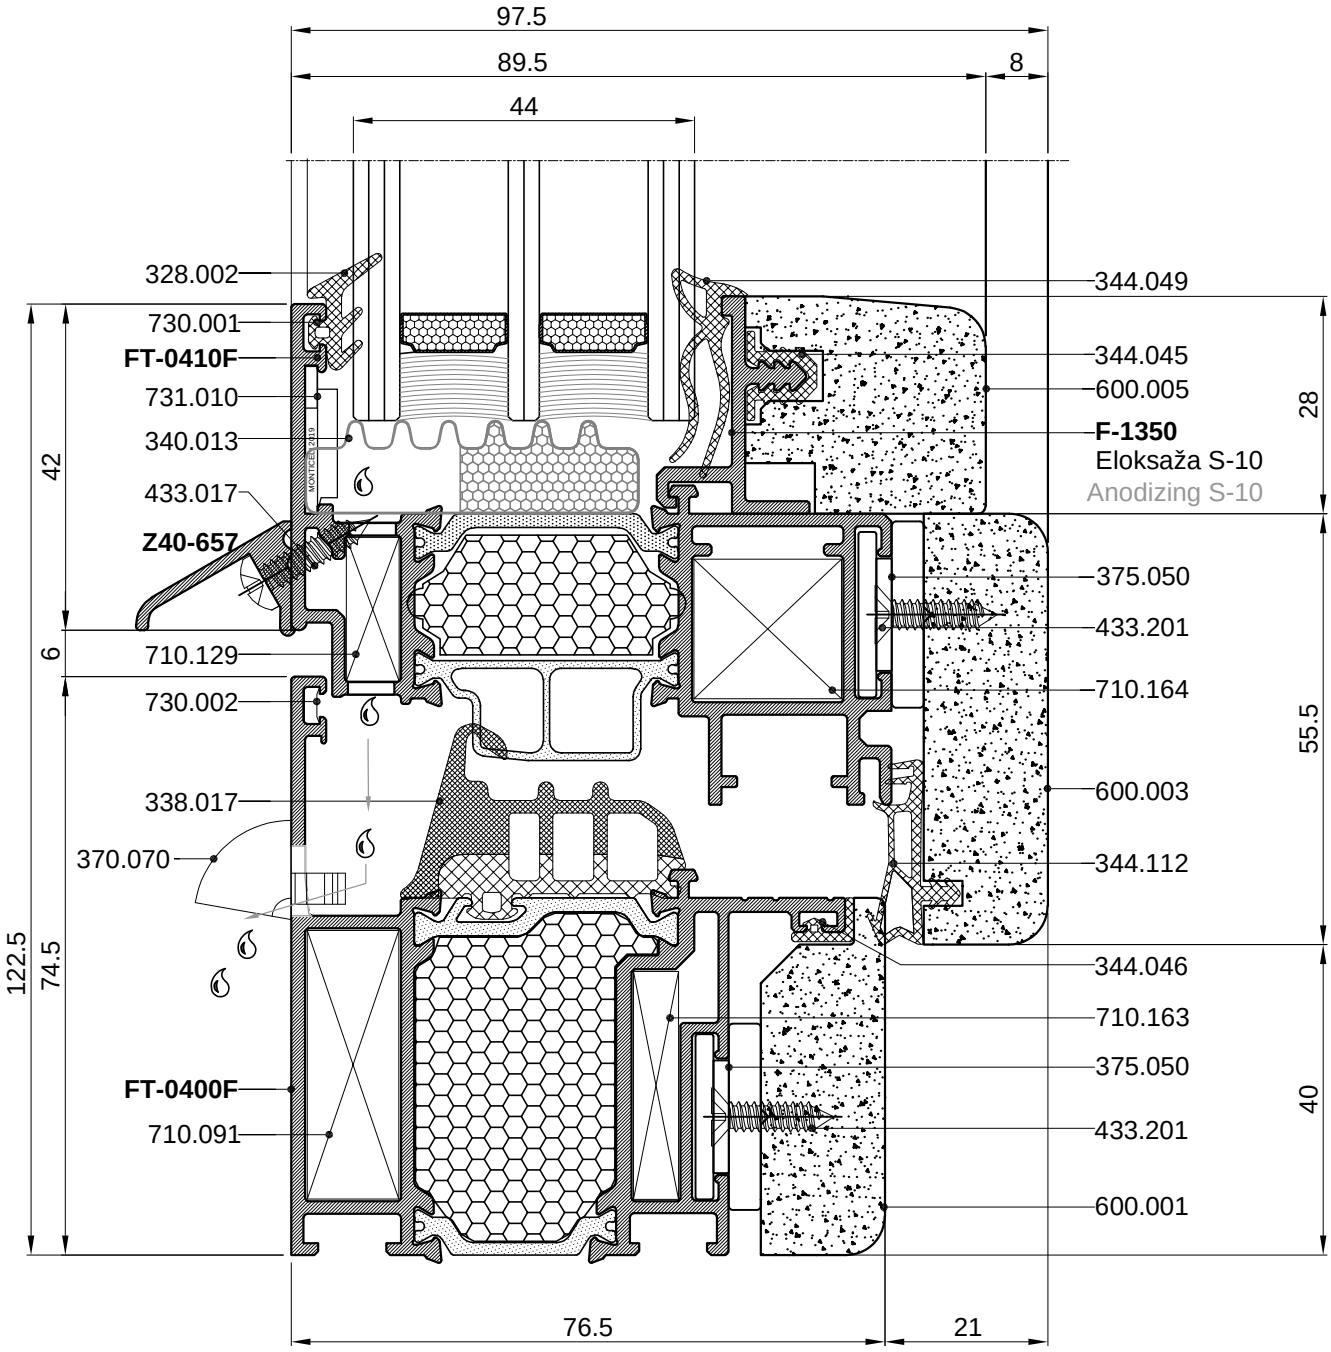
97.5
89.5
8
44
328.002
730.001
FT-0410F
731.010
340.013
433.017
Z40-657
710.129
730.002
338.017
370.070
FT-0400F
710.091
344.049
344.045
600.005
F-1350
Eloksaža S-10
Anodizing S-10
375.050
433.201
710.164
600.003
344.112
344.046
710.163
375.050
433.201
600.001
42
6
122.5
74.5
28
55.5
40
76.5
21

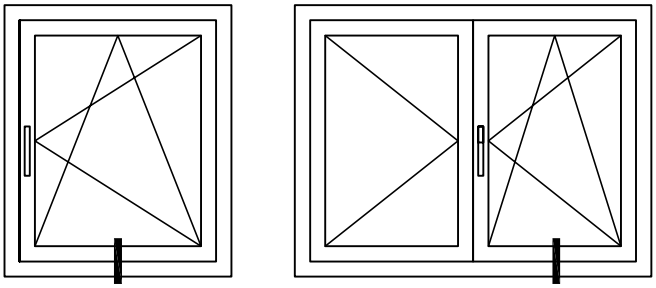


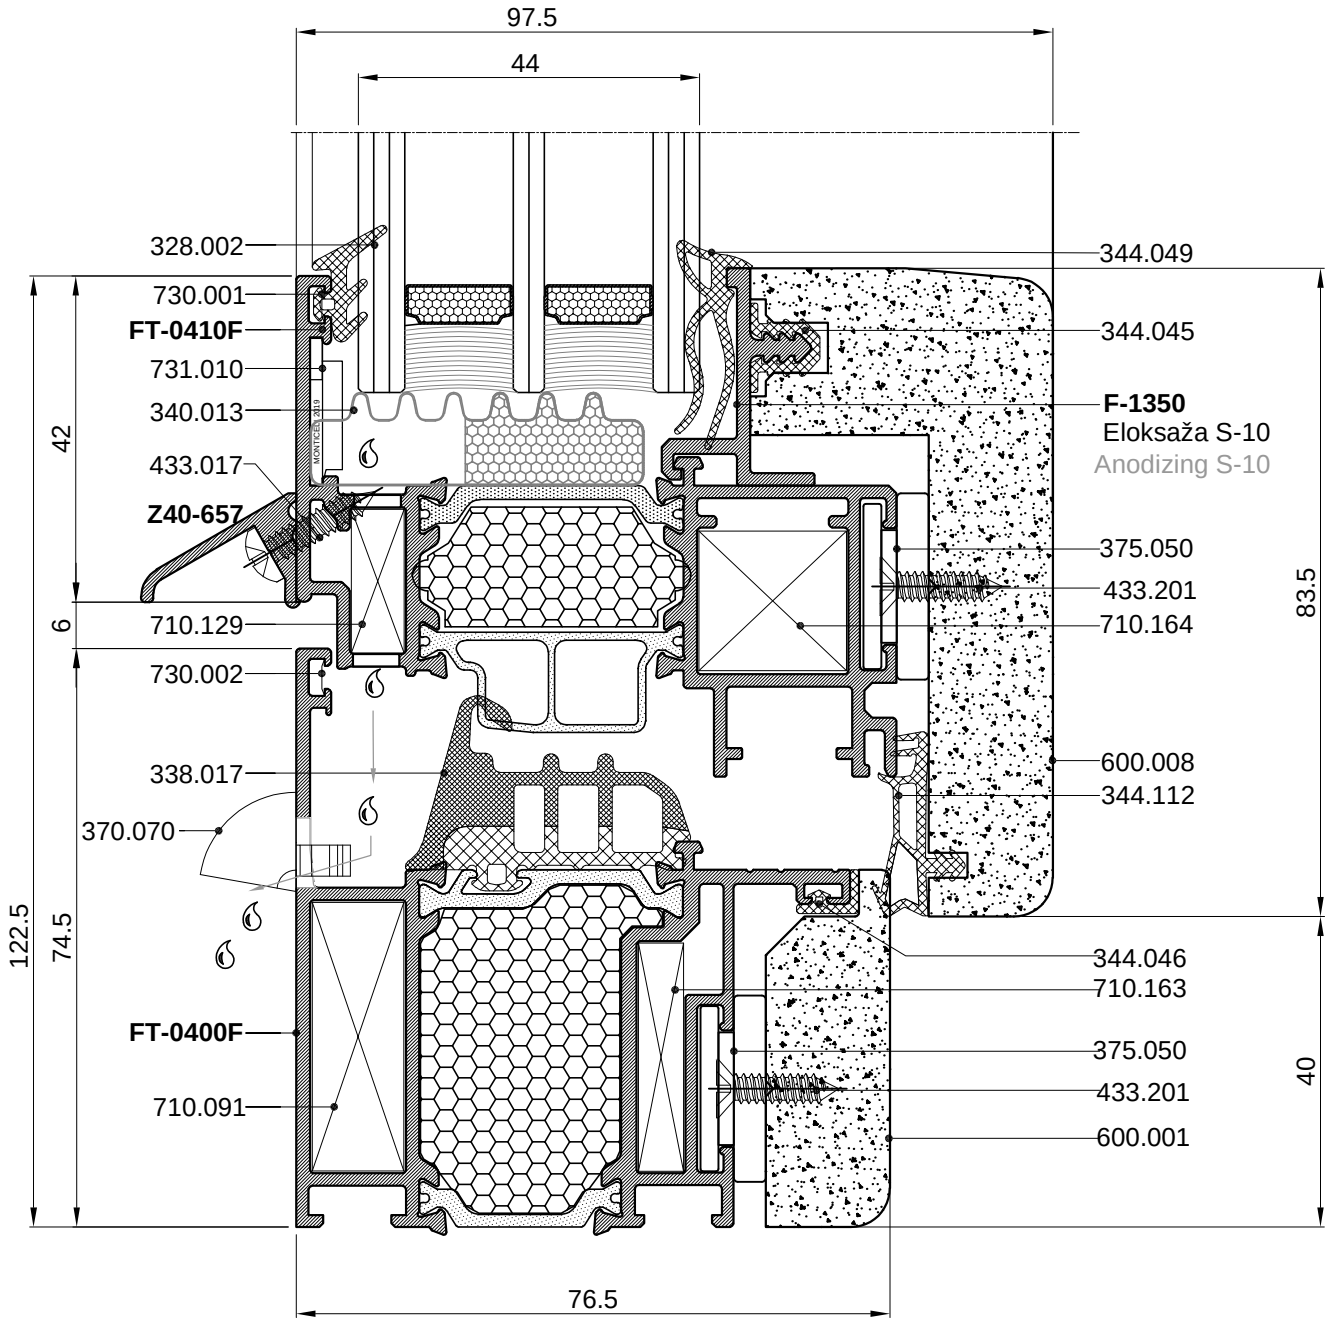

97.5
44
328.002
730.001
FT-0410F
731.010
340.013
433.017
Z40-657
710.129
730.002
338.017
370.070
FT-0400F
710.091
344.049
344.045
F-1350
Eloksaža S-10
Anodizing S-10
375.050
433.201
710.164
600.008
344.112
344.046
710.163
375.050
433.201
600.001
42
6
74.5
122.5
83.5
40
76.5





Izvod kapljevina iz profila pomoću cijevčice Monodrain 360.009
Water drainage using Monodrain pipe 360.009


Cijevčicu Monodrain 360.009 odsjeći u ravnini profila.
Monodrain pipe 360.009 should be cut off in the plane of the profile

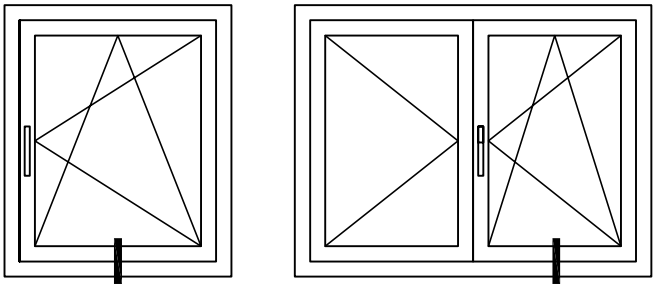


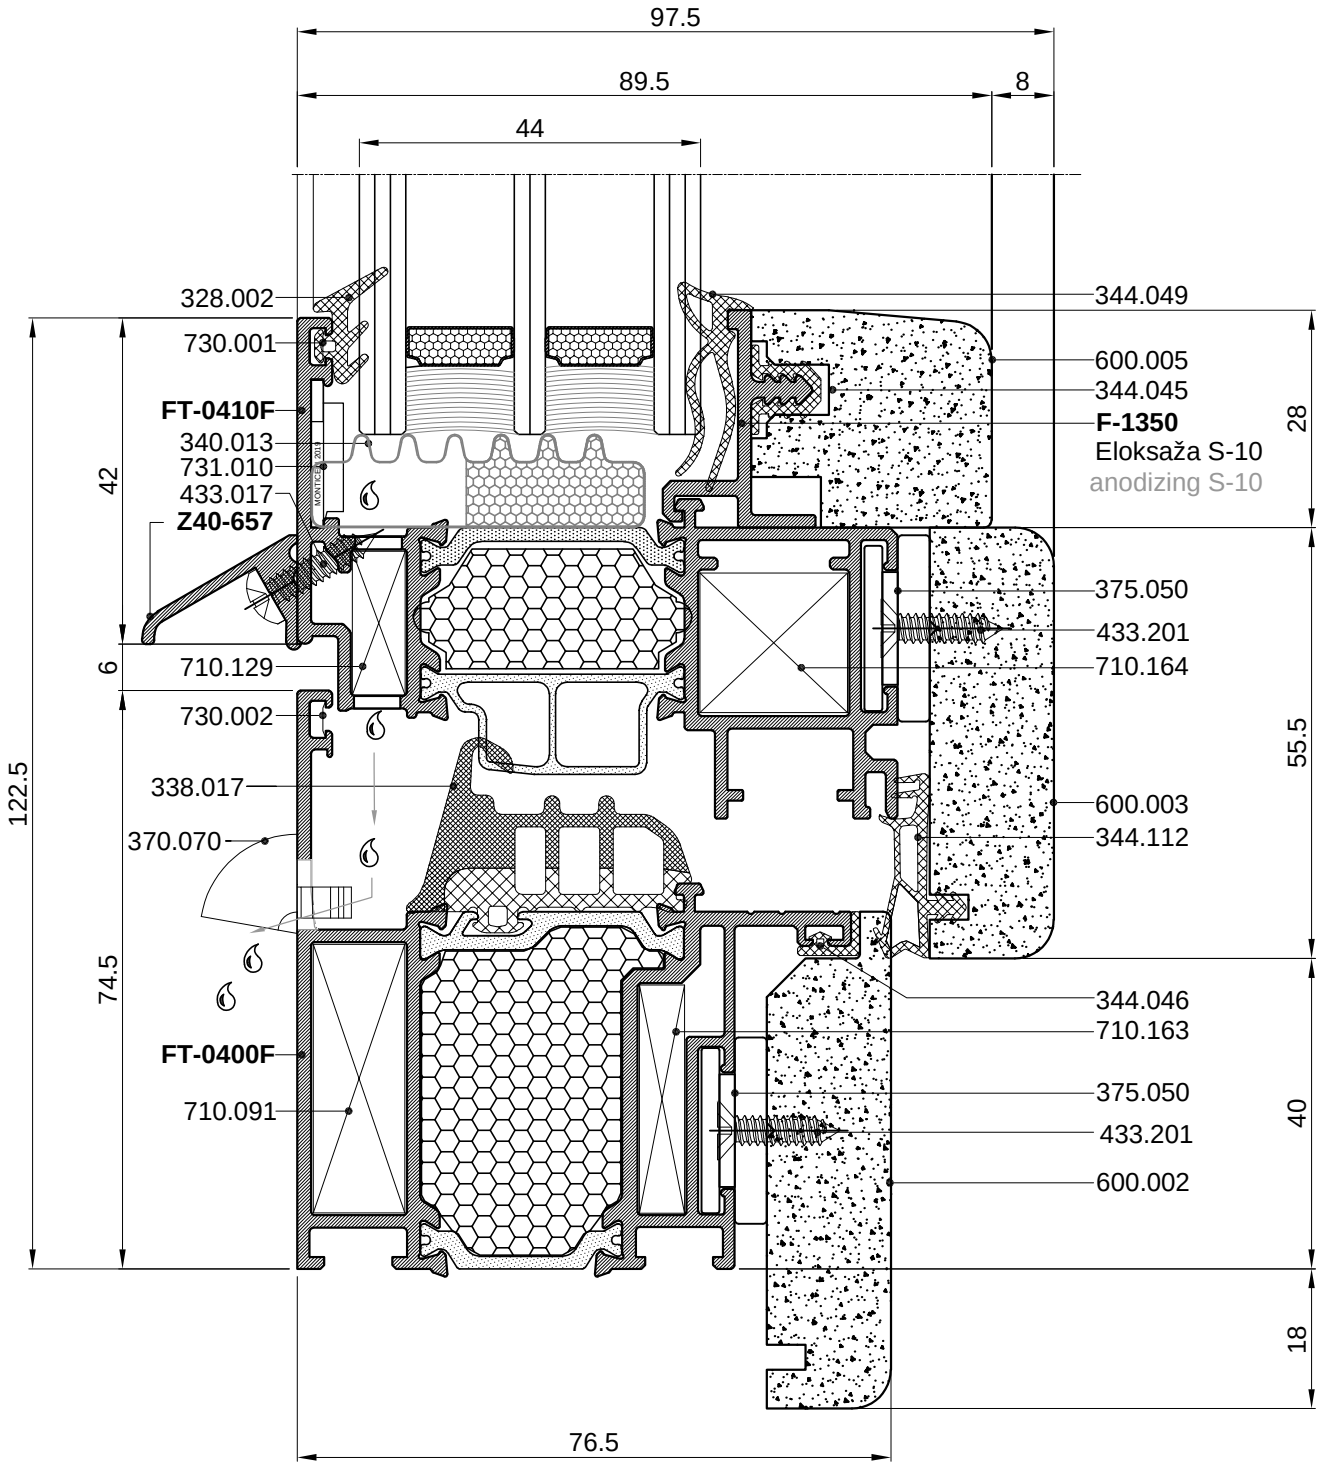

97.5
89.5
8
44
328.002
730.001
FT-0410F
340.013
731.010
433.017
Z40-657
42
6
710.129
730.002
338.017
370.070
74.5
FT-0400F
710.091
122.5
344.049
600.005
344.045
F-1350
Eloksaža S-10
anodizing S-10
28
375.050
433.201
710.164
55.5
600.003
344.112
344.046
710.163
375.050
433.201
600.002
40
18
76.5

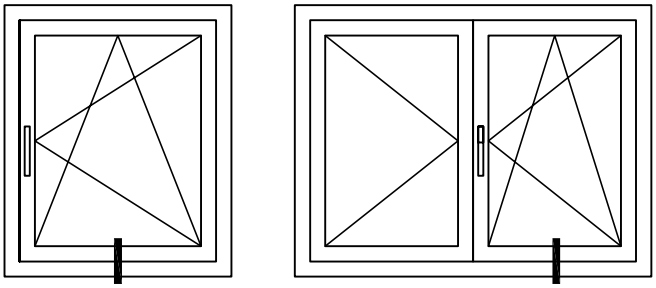


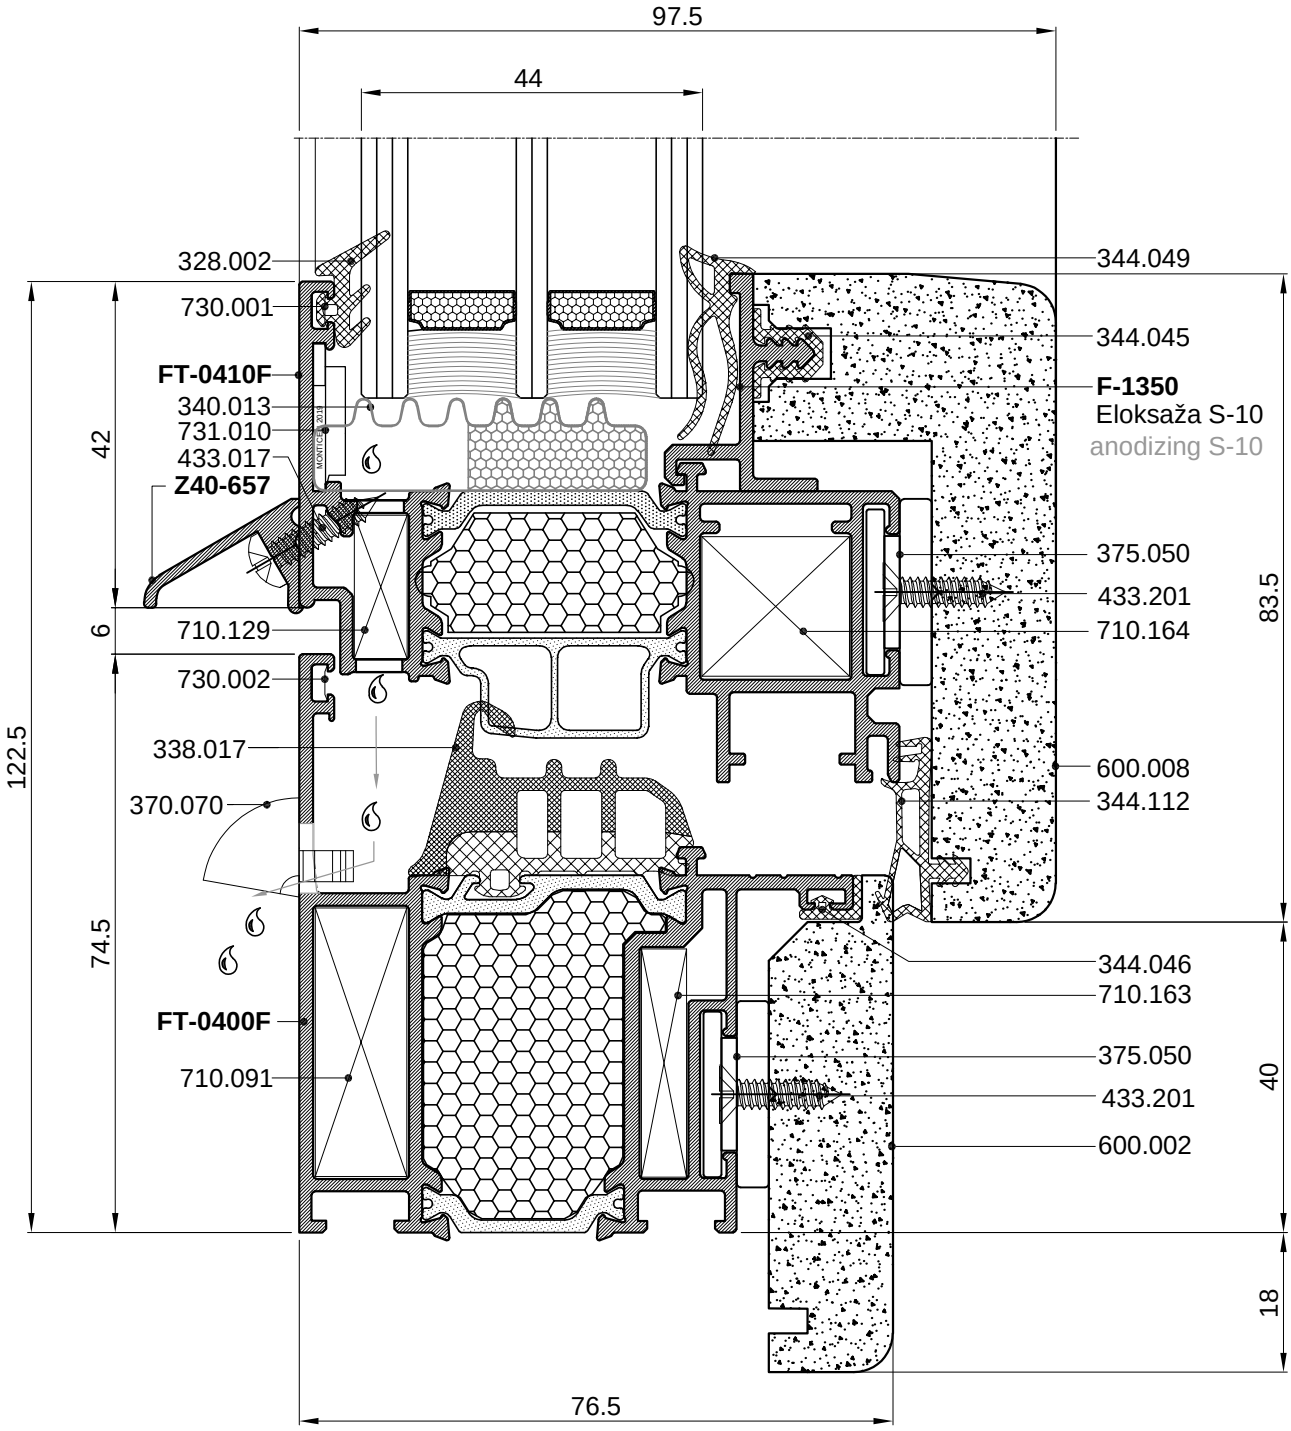

97.5
44
328.002
730.001
FT-0410F
340.013
731.010
433.017
Z40-657
42
6
710.129
730.002
338.017
370.070
74.5
122.5
FT-0400F
710.091
344.049
344.045
F-1350
Eloksaža S-10
anodizing S-10
375.050
433.201
710.164
83.5
600.008
344.112
344.046
710.163
375.050
433.201
600.002
40
18
76.5



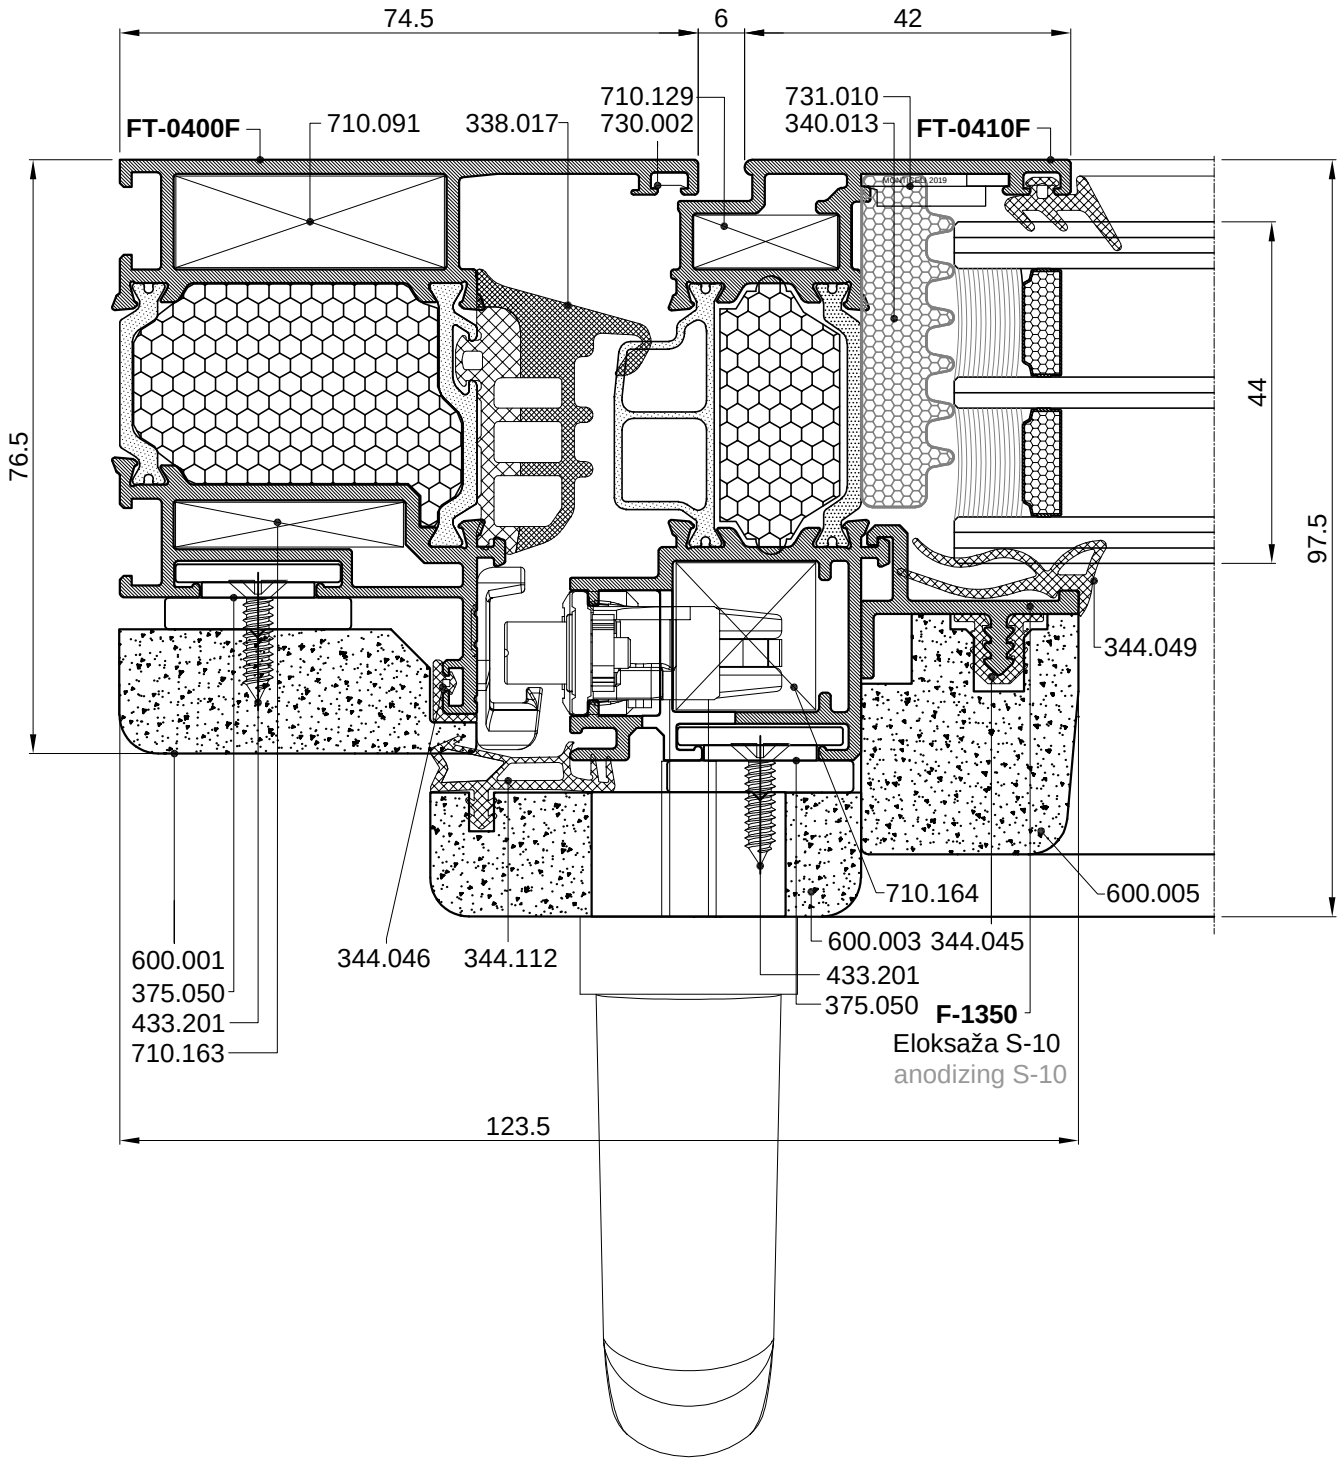
74.5
6
42
710.129
730.002
731.010
340.013
FT-0400F
710.091
338.017
FT-0410F
76.5
44
97.5
344.049
710.164
600.005
600.001
375.050
433.201
710.163
344.046
344.112
600.003
344.045
433.201
375.050
F-1350
Eloksaža S-10
anodizing S-10
123.5




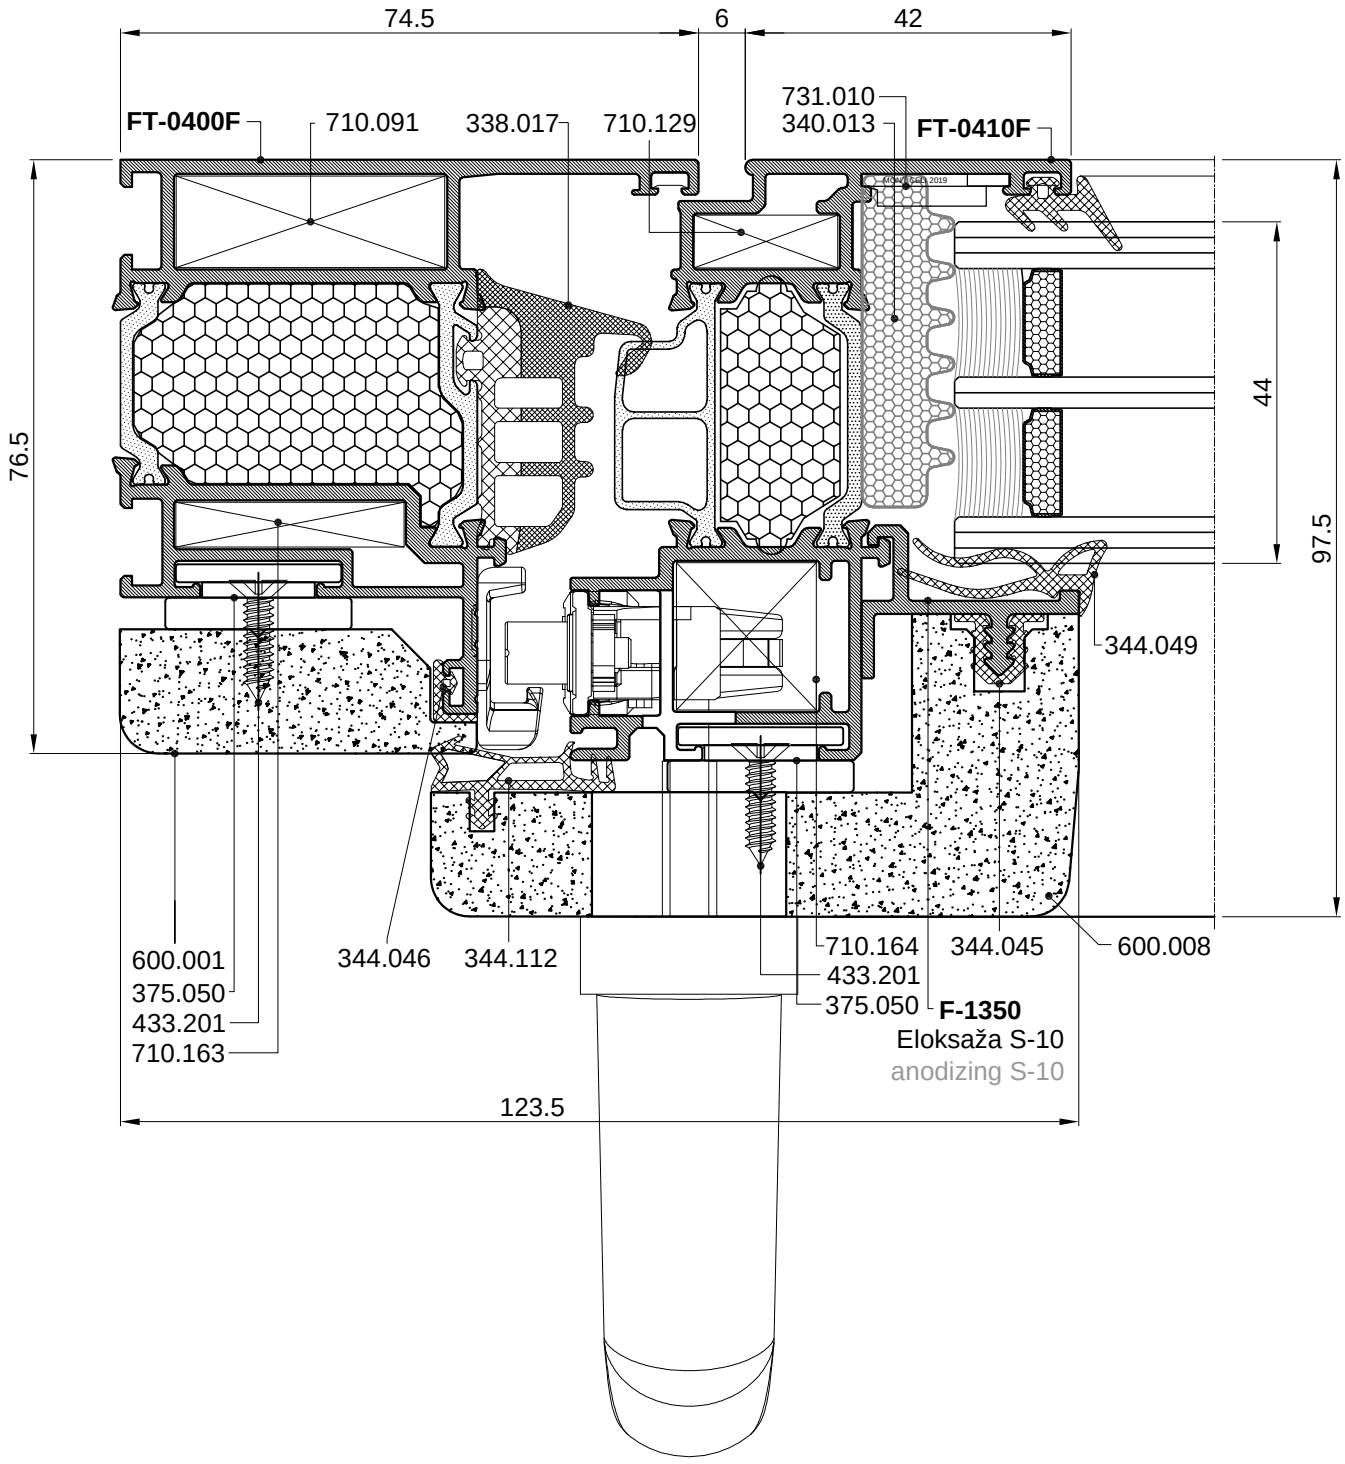

74.5
6
42
731.010
340.013
FT-0400F
710.091
338.017
710.129
FT-0410F
76.5
44
97.5
344.049
600.001
375.050
433.201
710.163
344.046
344.112
710.164
433.201
375.050
344.045
600.008
F-1350
Eloksaža S-10
anodizing S-10
123.5

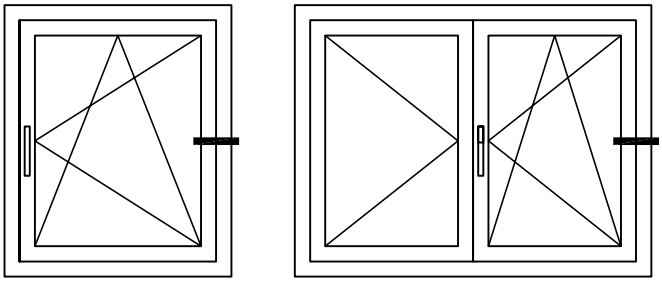

- Okov: Roto NT - A
- Sistem: 12/18 - 13


- Hardware: Roto NT - A
- System: 12/18 - 13

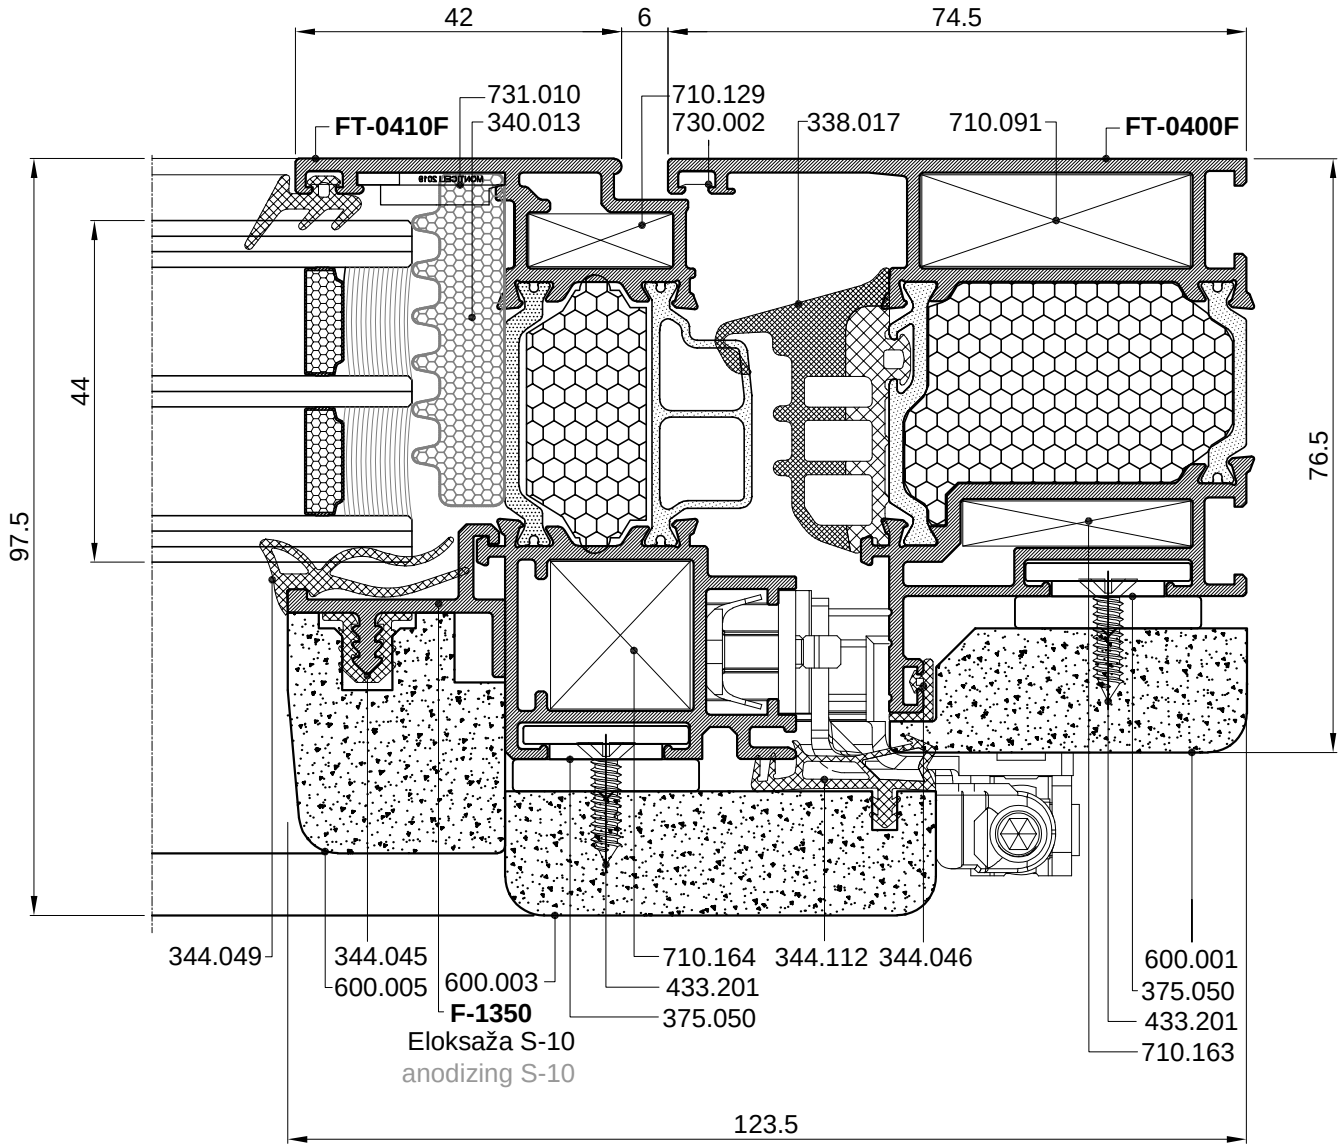


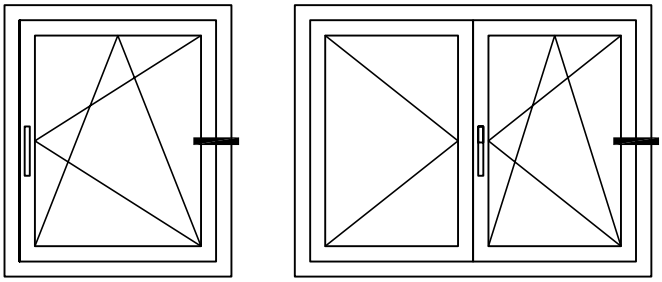


- Okov: Roto NT - Designo
- Sistem: 12/18 - 13

- Hardware: Roto NT - Designo
- System: 12/18 - 13

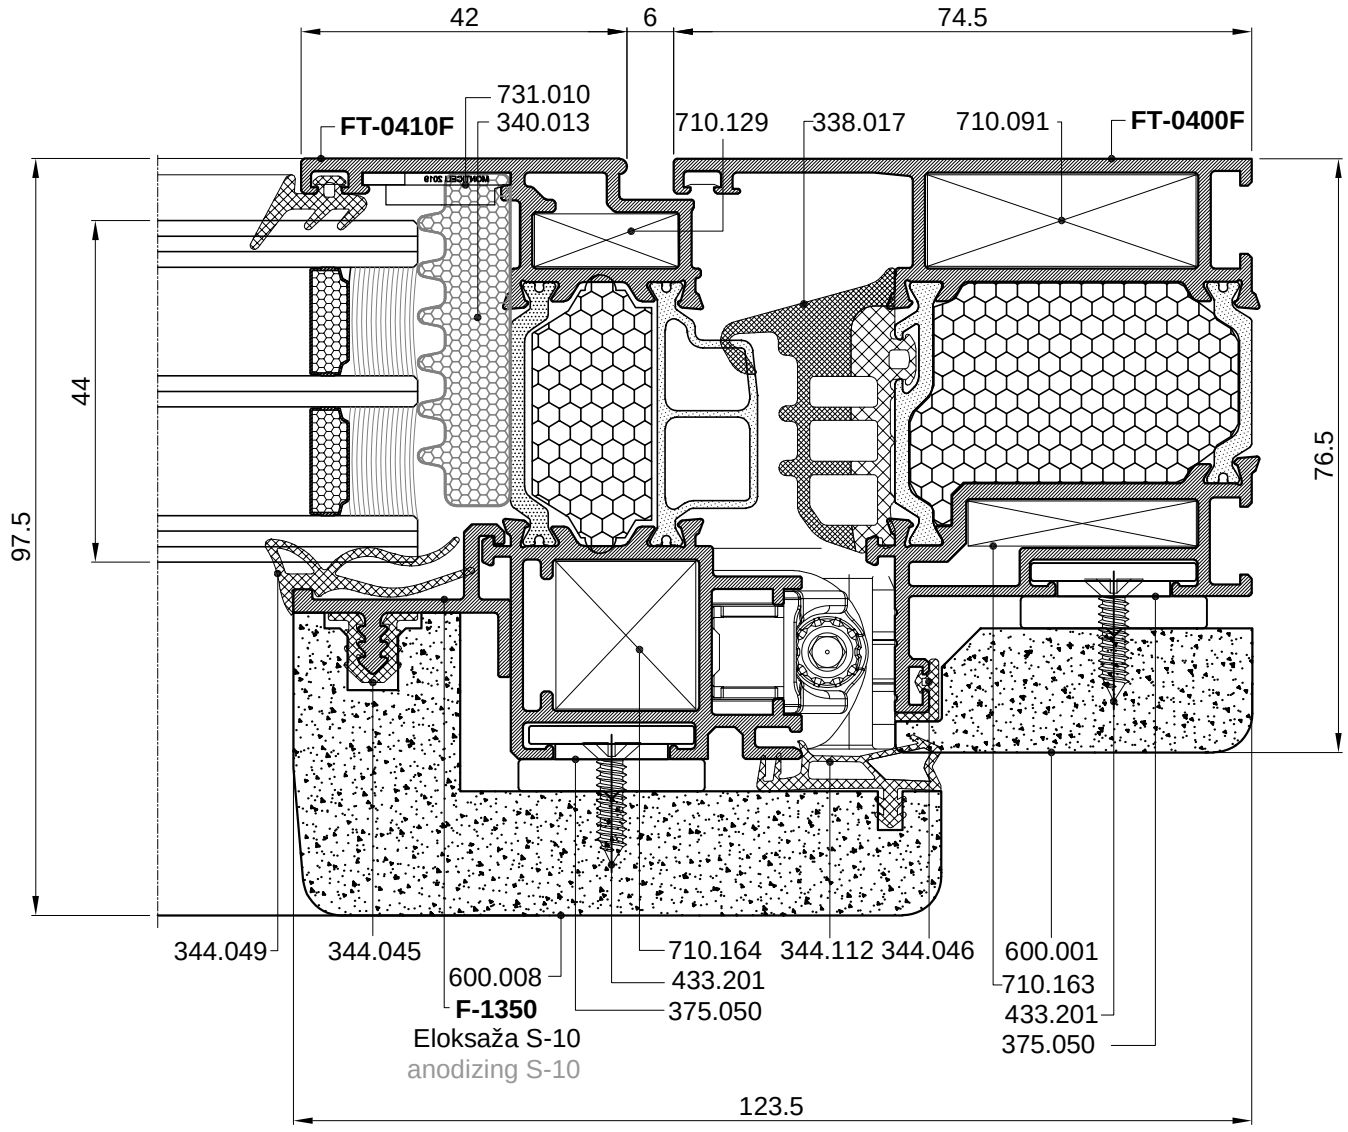

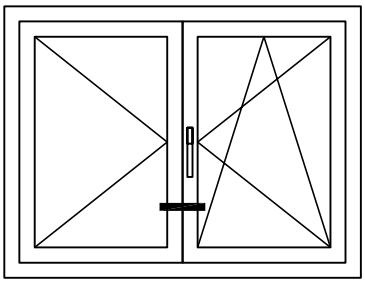


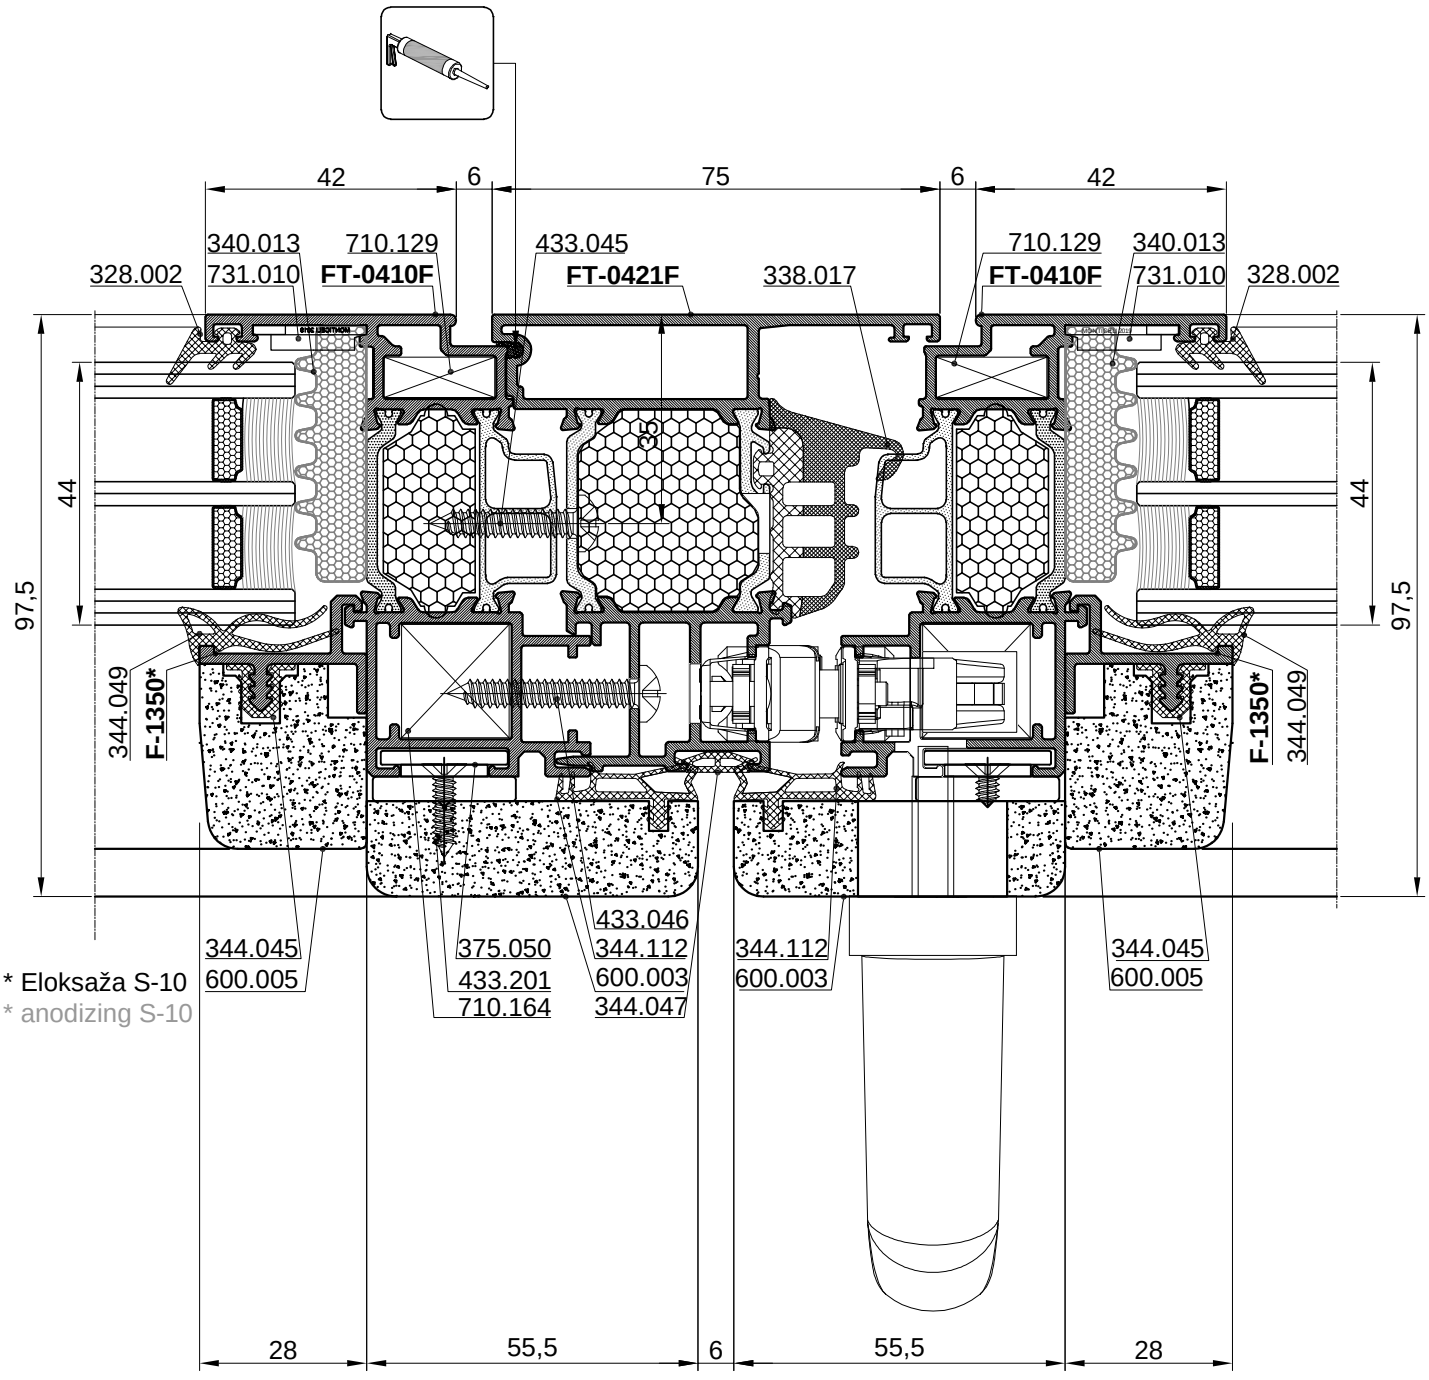


* Eloksaža S-10
* anodizing S-10



ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

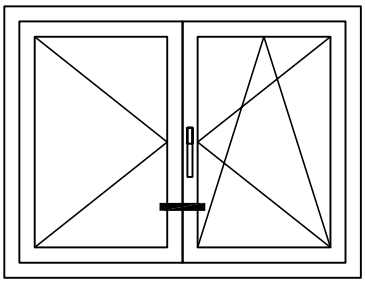

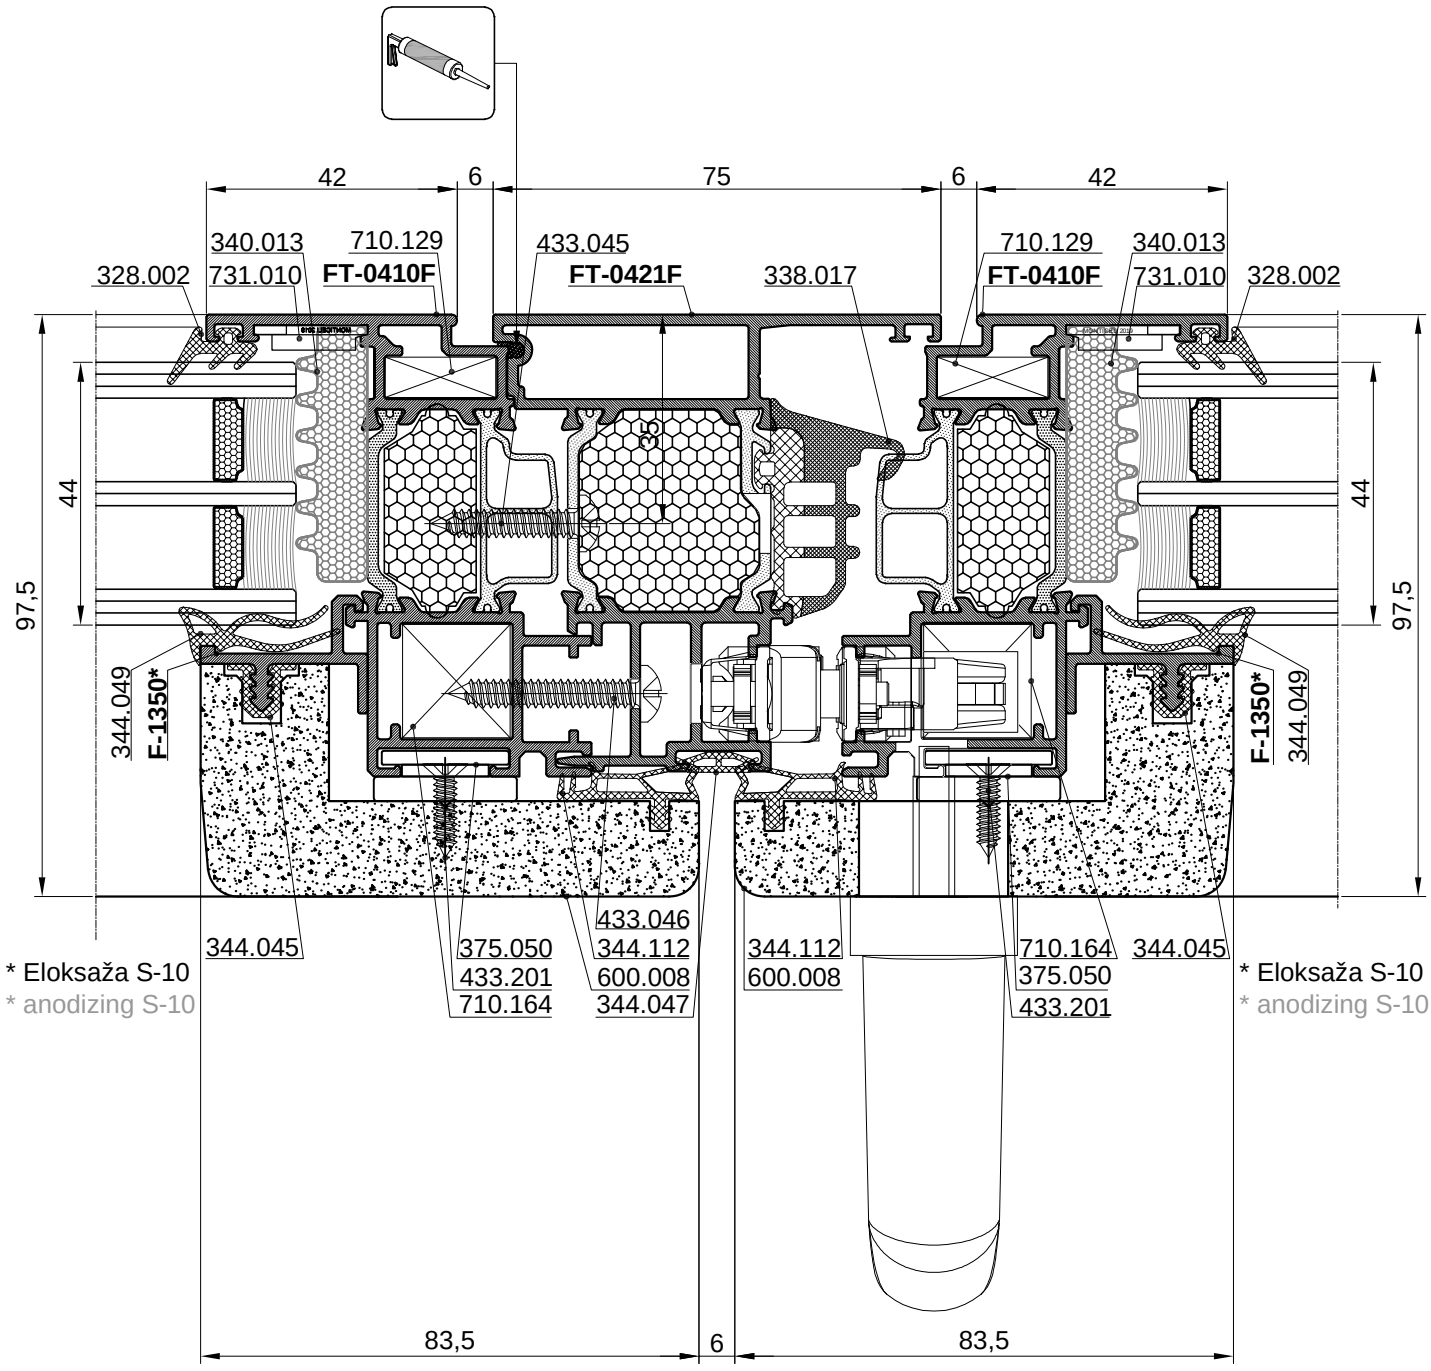



* Eloksaža S-10
* anodizing S-10


* Eloksaža S-10
* anodizing S-10





ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

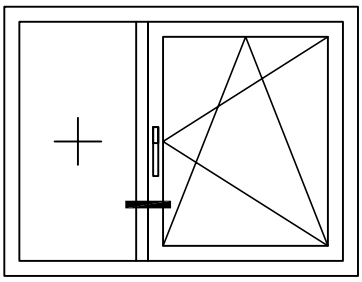


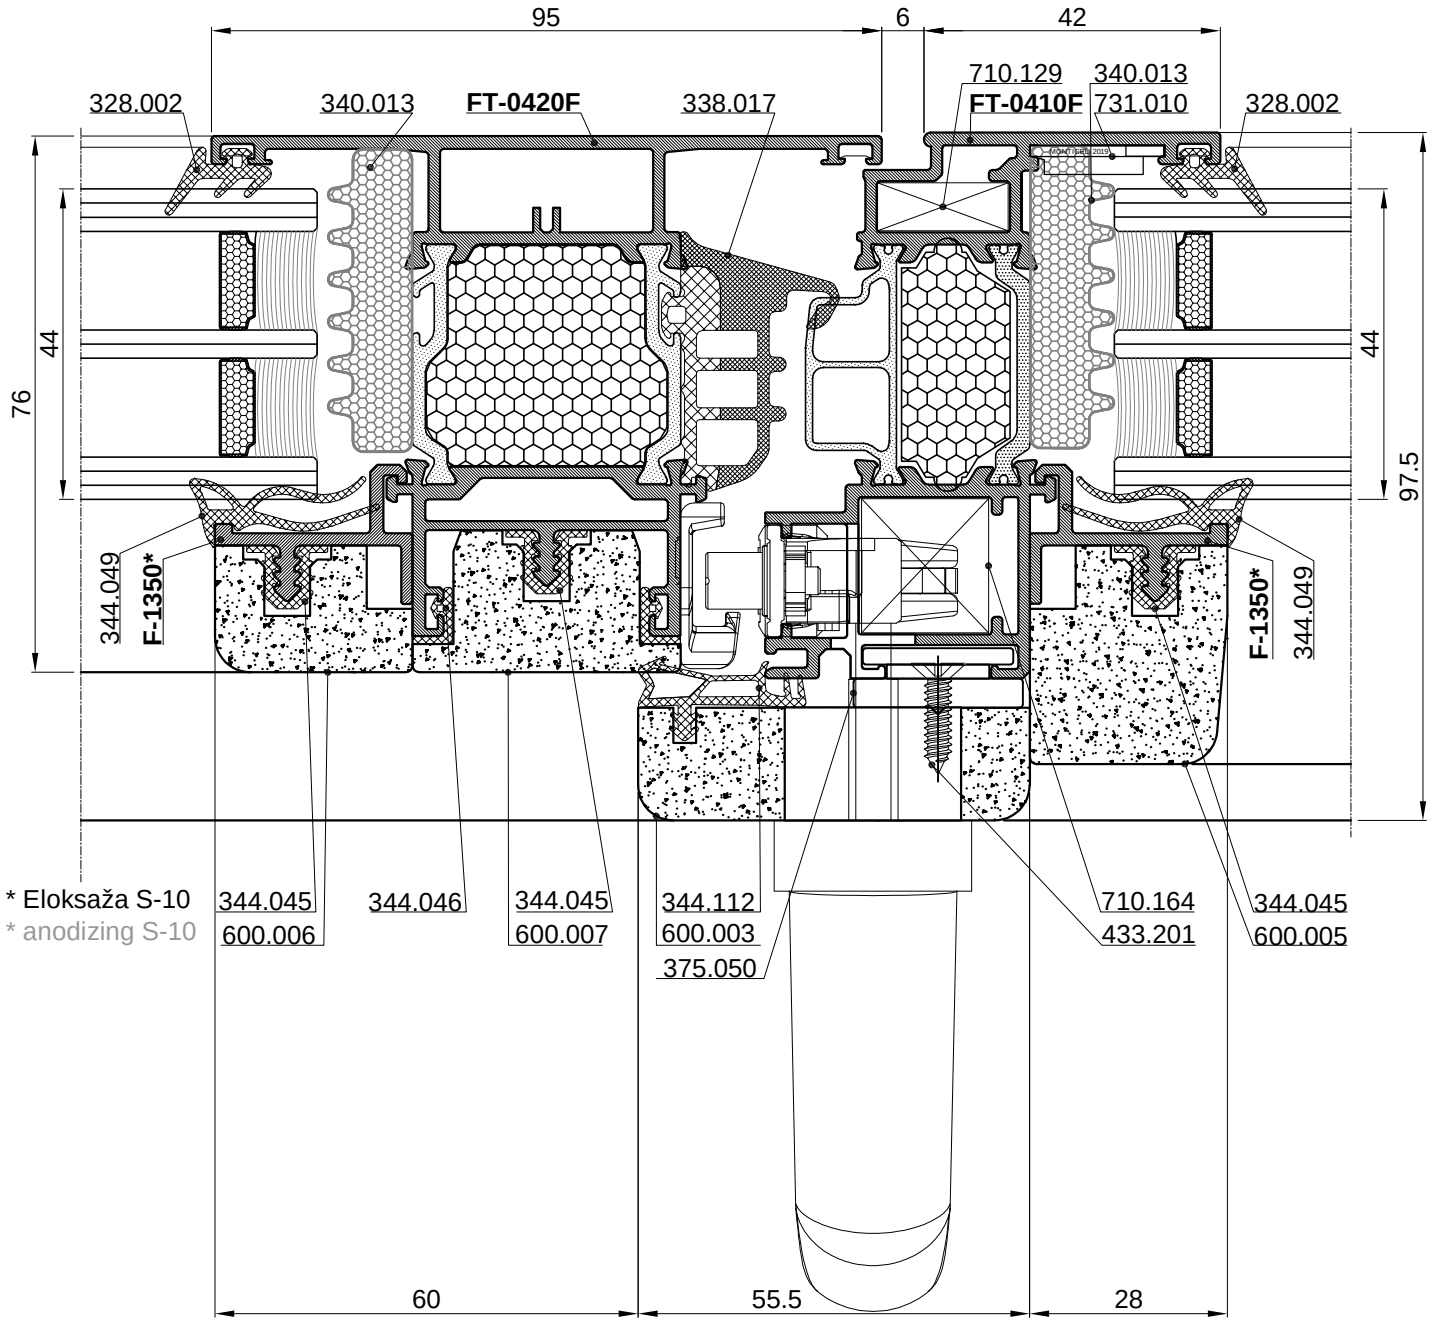
95
6
42
328.002
340.013
FT-0420F
338.017
710.129
FT-0410F
340.013
731.010
328.002
76
44
44
97.5
344.049
F-1350*
F-1350*
344.049
* Eloksaža S-10
* anodizing S-10
344.045
600.006
344.046
344.045
600.007
344.112
600.003
375.050
710.164
433.201
344.045
600.005
60
55.5
28

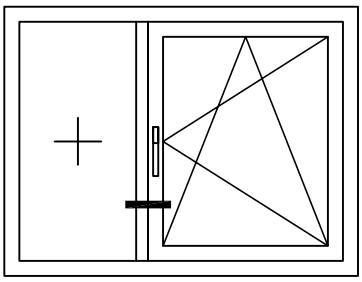


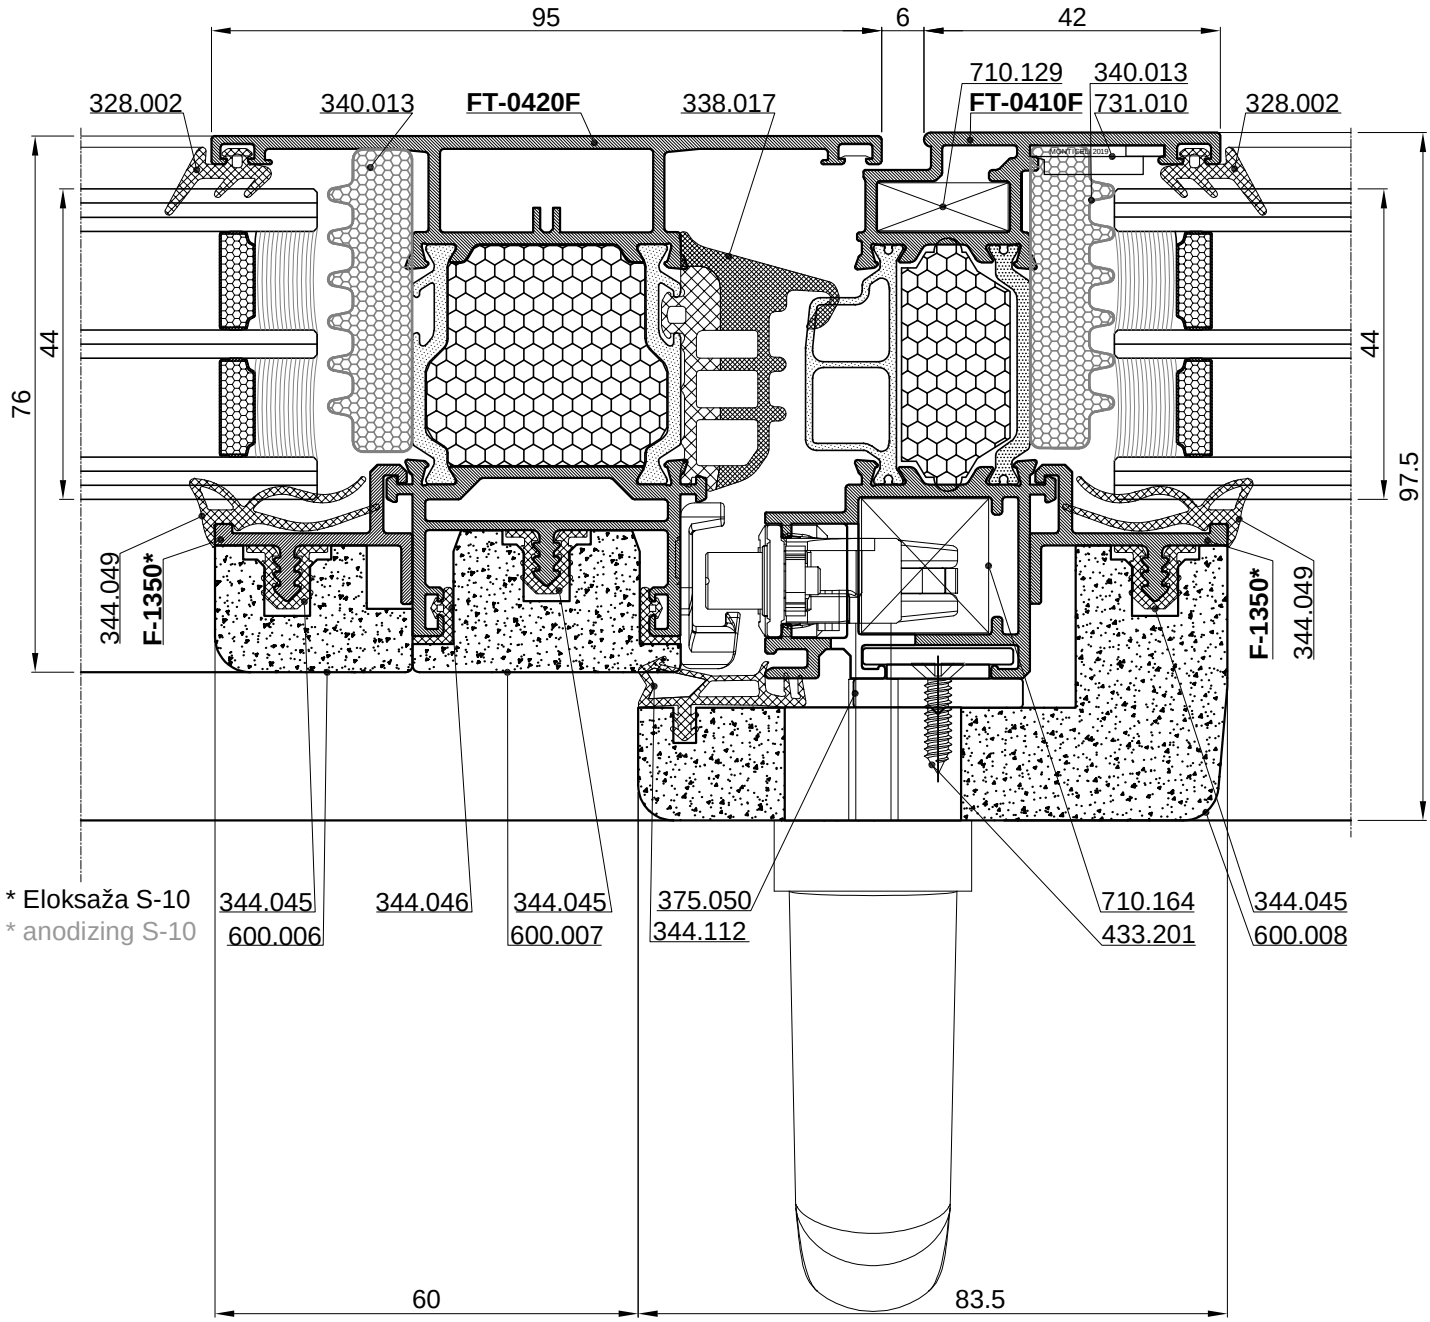

95
6
42
328.002
340.013
FT-0420F
338.017
710.129
FT-0410F
340.013
731.010
328.002
76
44
44
97.5
344.049
F-1350*
F-1350*
344.049
* Eloksaža S-10
* anodizing S-10
344.045
600.006
344.046
344.045
600.007
375.050
344.112
710.164
433.201
344.045
600.008
60
83.5

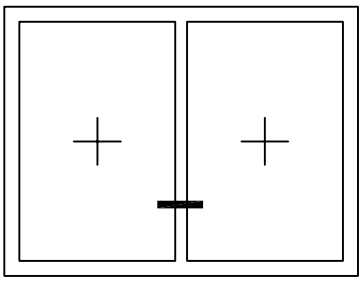


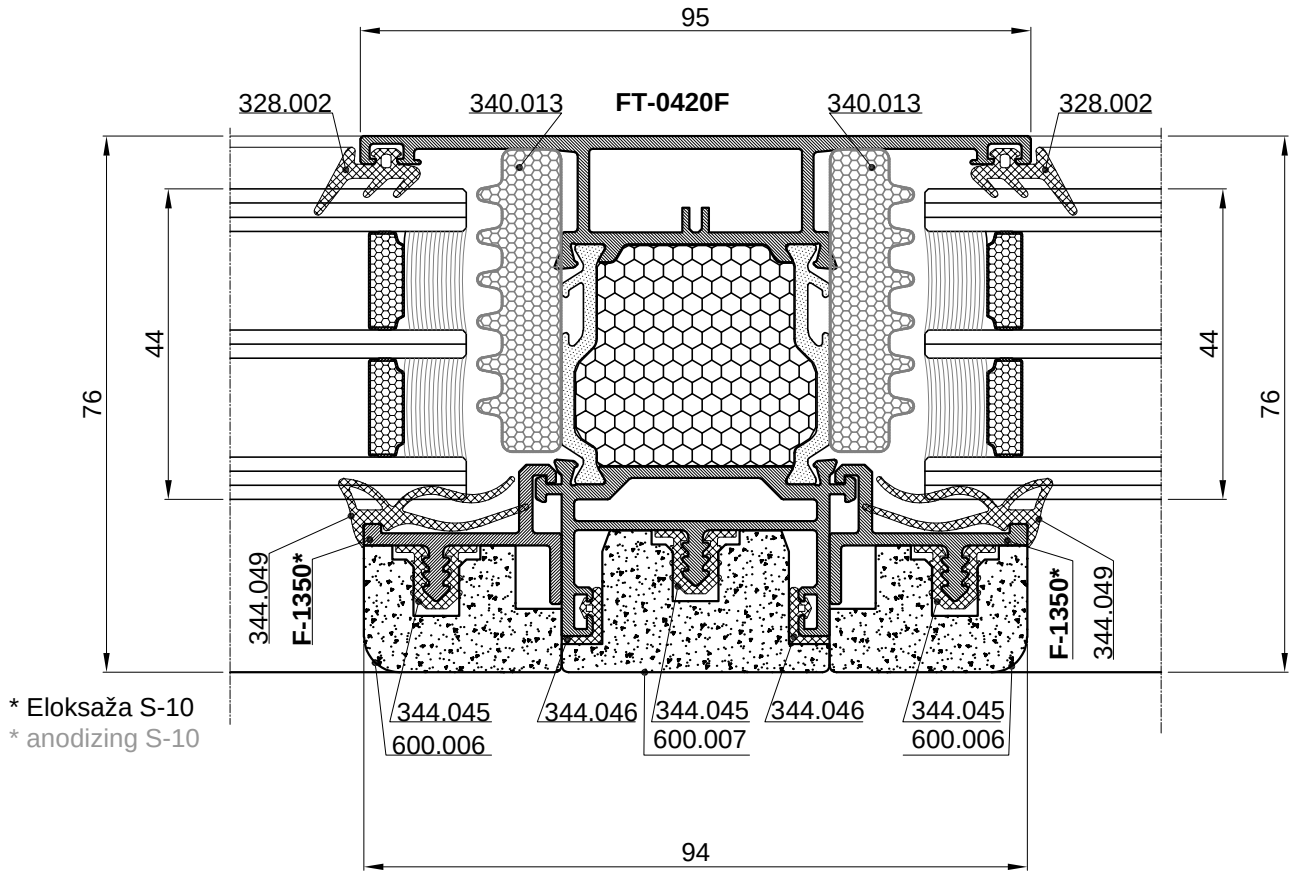



* Eloksaža S-10
* anodizing S-10




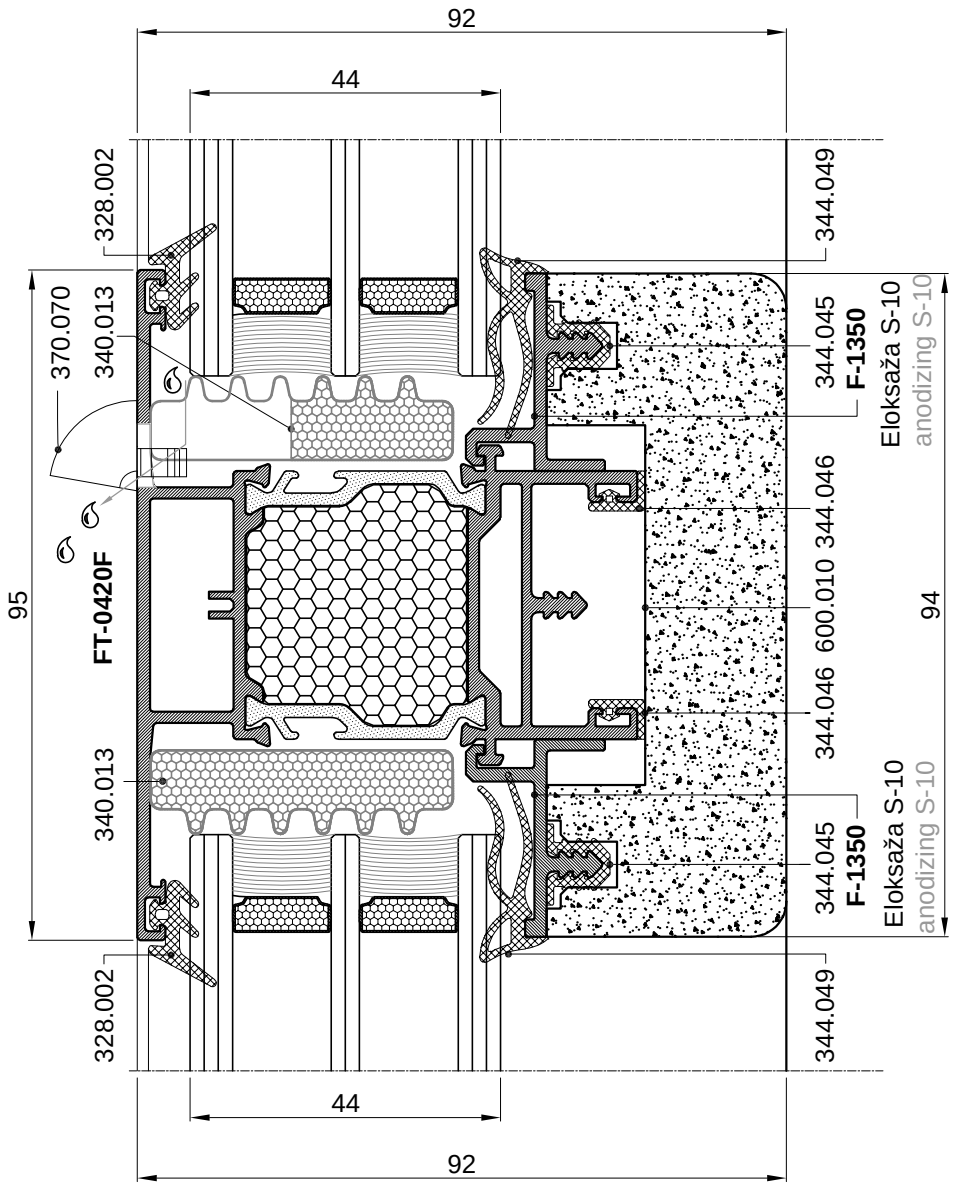

92
44
328.002
344.049
370.070
340.013
344.045
F-1350
Eloksaža S-10
anodizing S-10
344.046
600.010
344.046
95
94
FT-0420F
340.013
344.045
F-1350
Eloksaža S-10
anodizing S-10
328.002
344.049
44
92

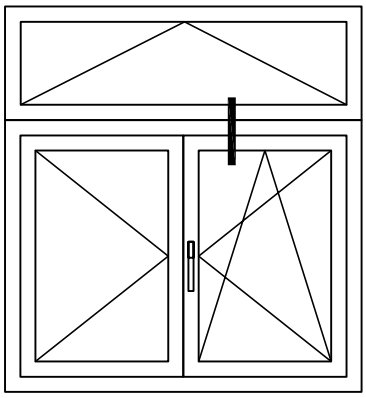


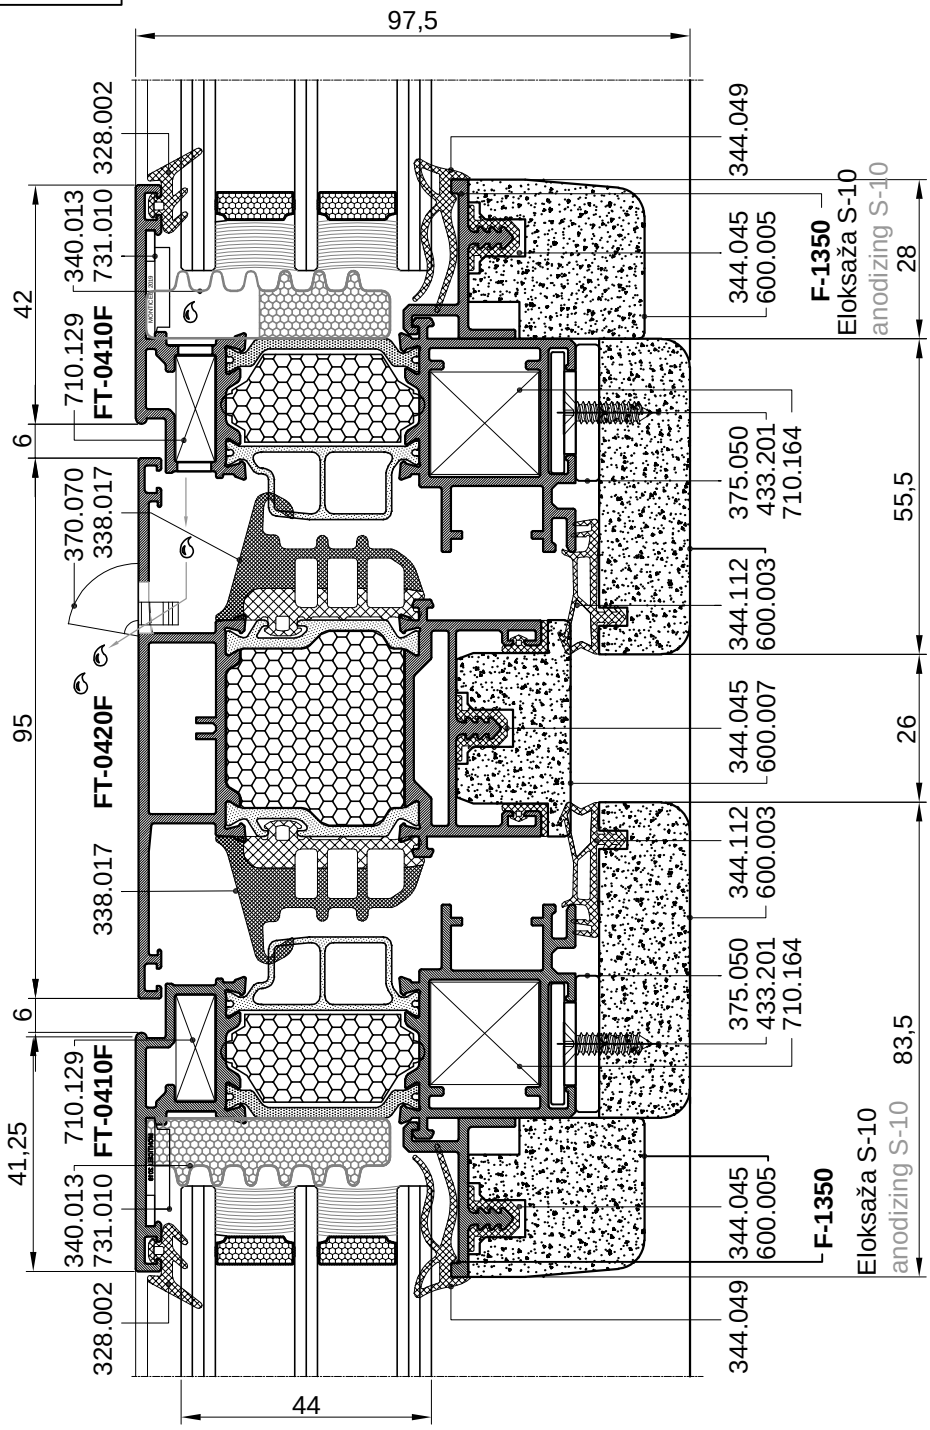

97,5
328.002
340.013
731.010
710.129
FT-0410F
370.070
338.017
FT-0420F
338.017
710.129
FT-0410F
340.013
731.010
328.002
42
6
95
6
41,25
344.049
344.045
600.005
F-1350
Eloksaža S-10
anodizing S-10
28
375.050
433.201
710.164
344.112
600.003
55,5
344.045
600.007
26
344.112
600.003
375.050
433.201
710.164
83,5
344.045
600.005
F-1350
Eloksaža S-10
anodizing S-10
344.049
44

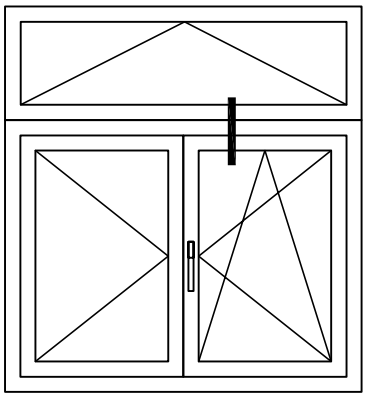

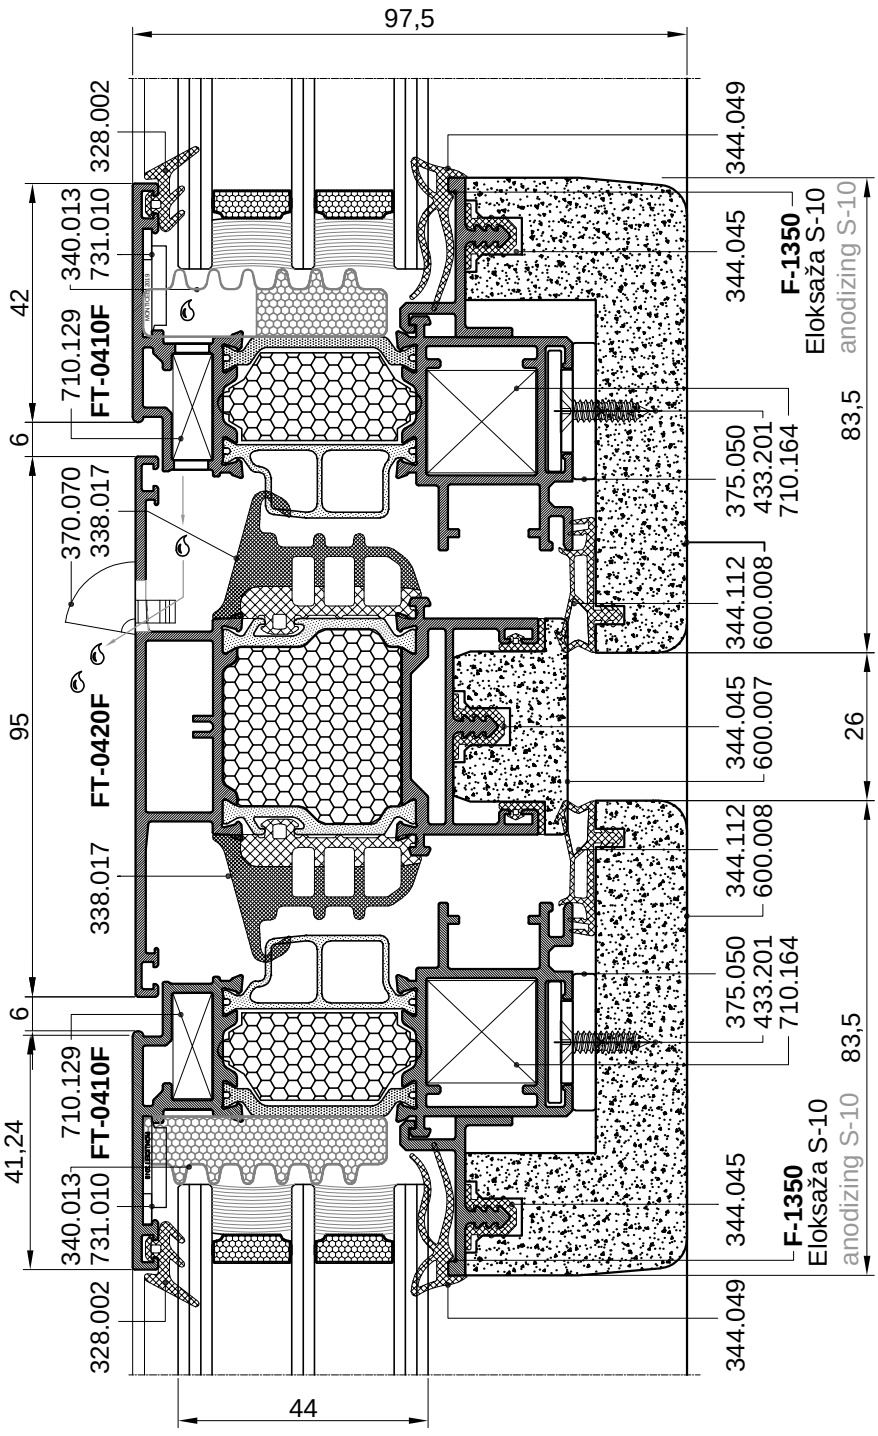

97,5
328.002
340.013
731.010
710.129
FT-0410F
42
6
370.070
338.017
FT-0420F
95
338.017
6
710.129
FT-0410F
41,24
340.013
731.010
328.002
44
344.049
344.045
F-1350
Eloksaža S-10
anodizing S-10
83,5
375.050
433.201
710.164
344.112
600.008
344.045
600.007
26
344.112
600.008
375.050
433.201
710.164
83,5
344.045
F-1350
Eloksaža S-10
anodizing S-10
344.049




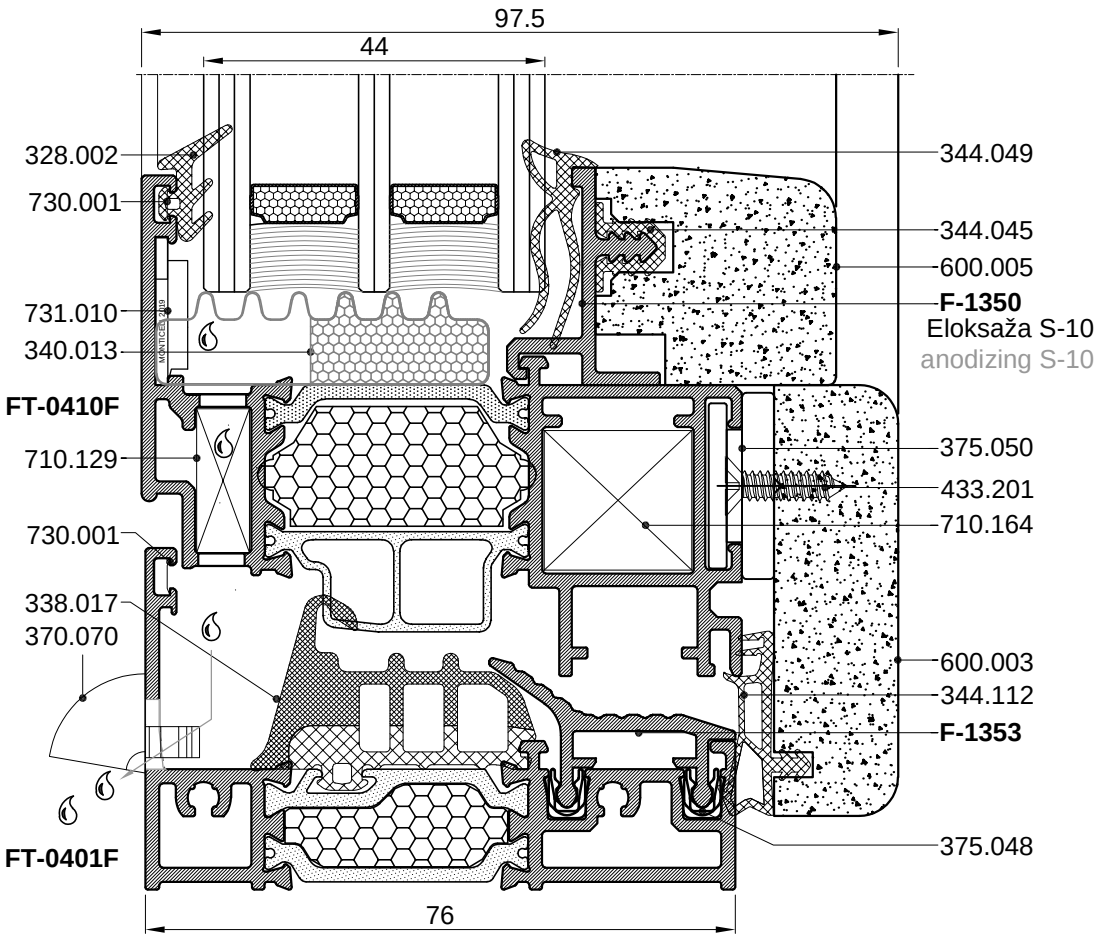


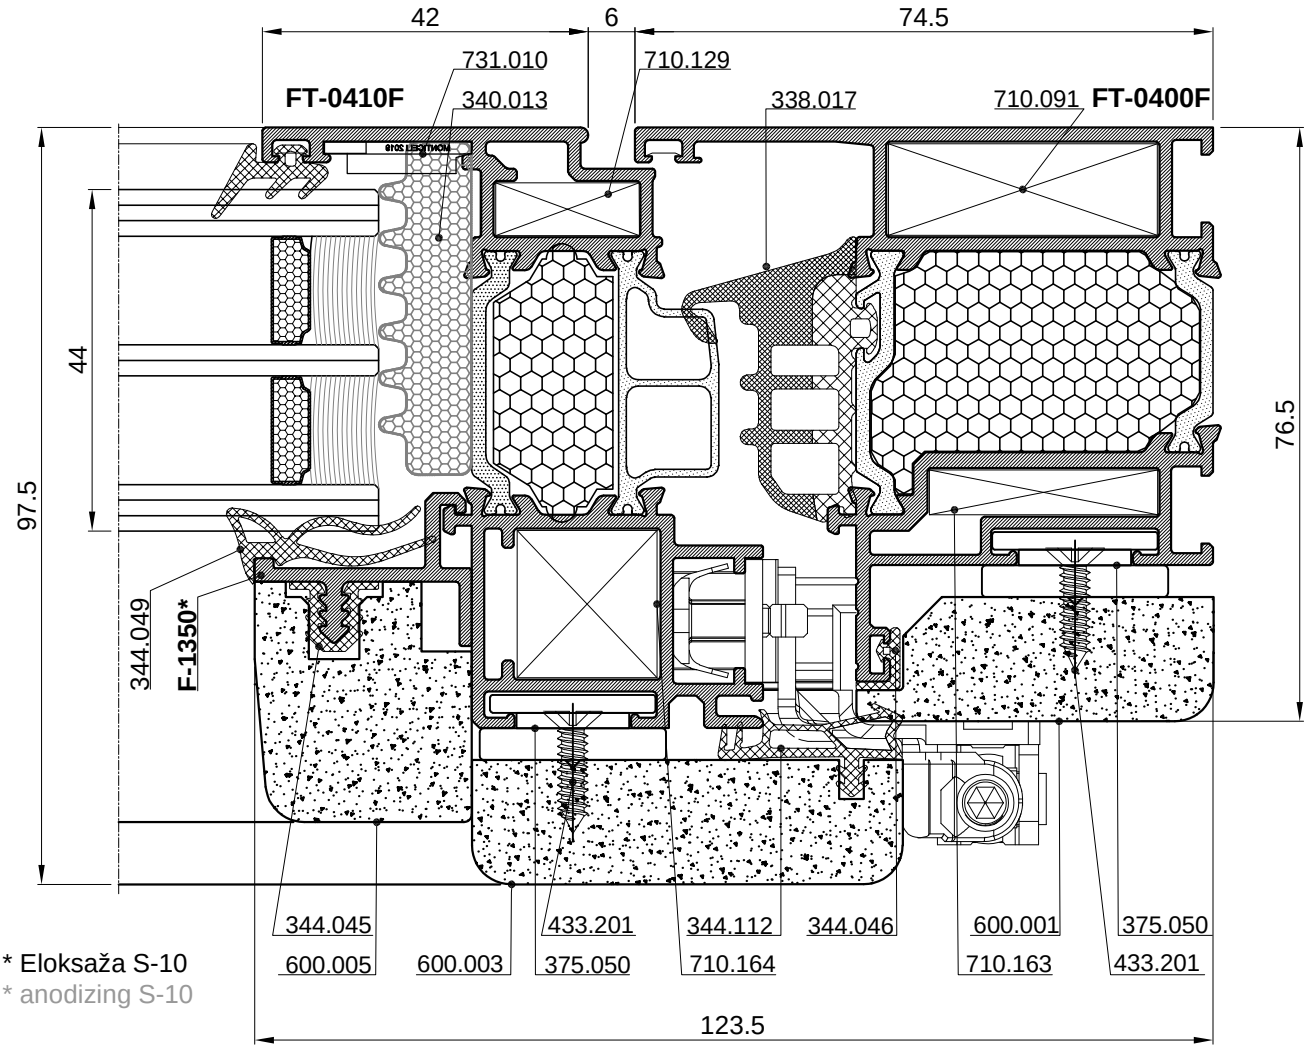


* Eloksaža S-10
* anodizing S-10




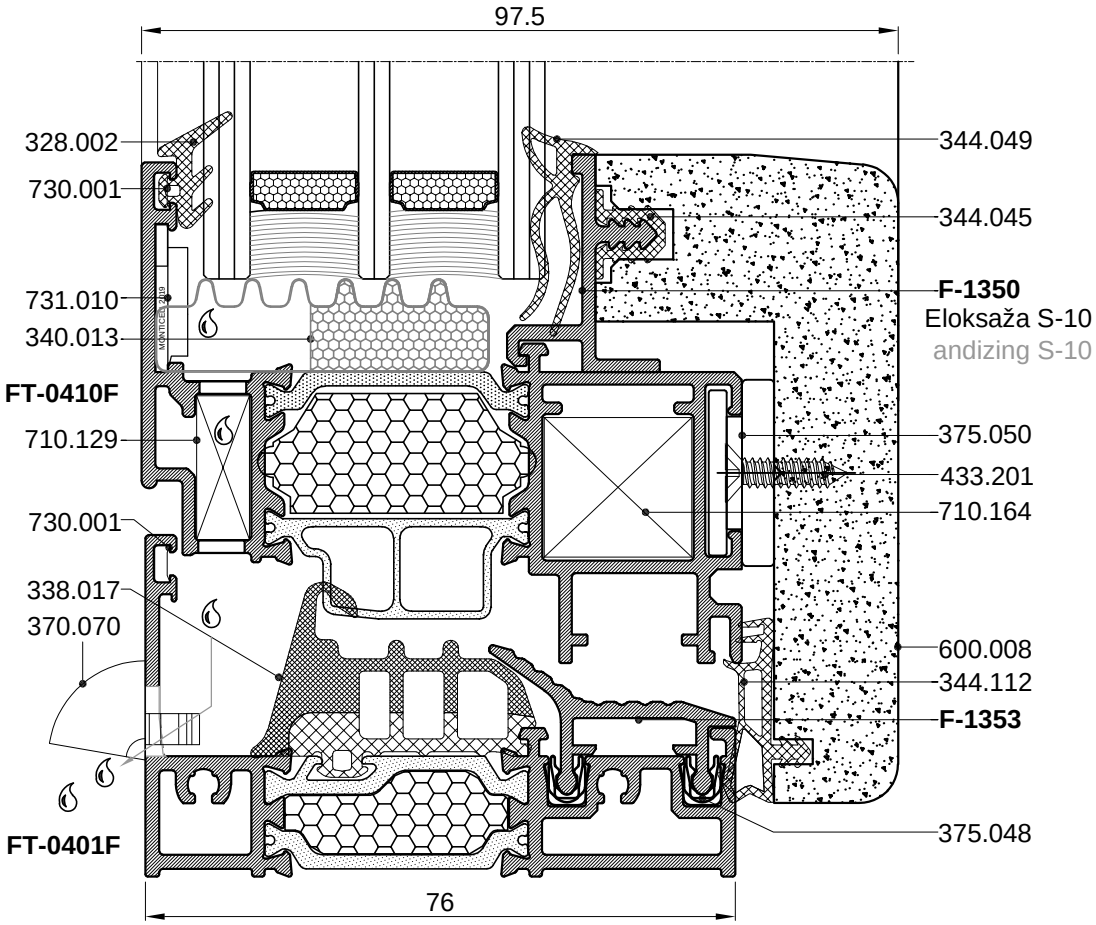


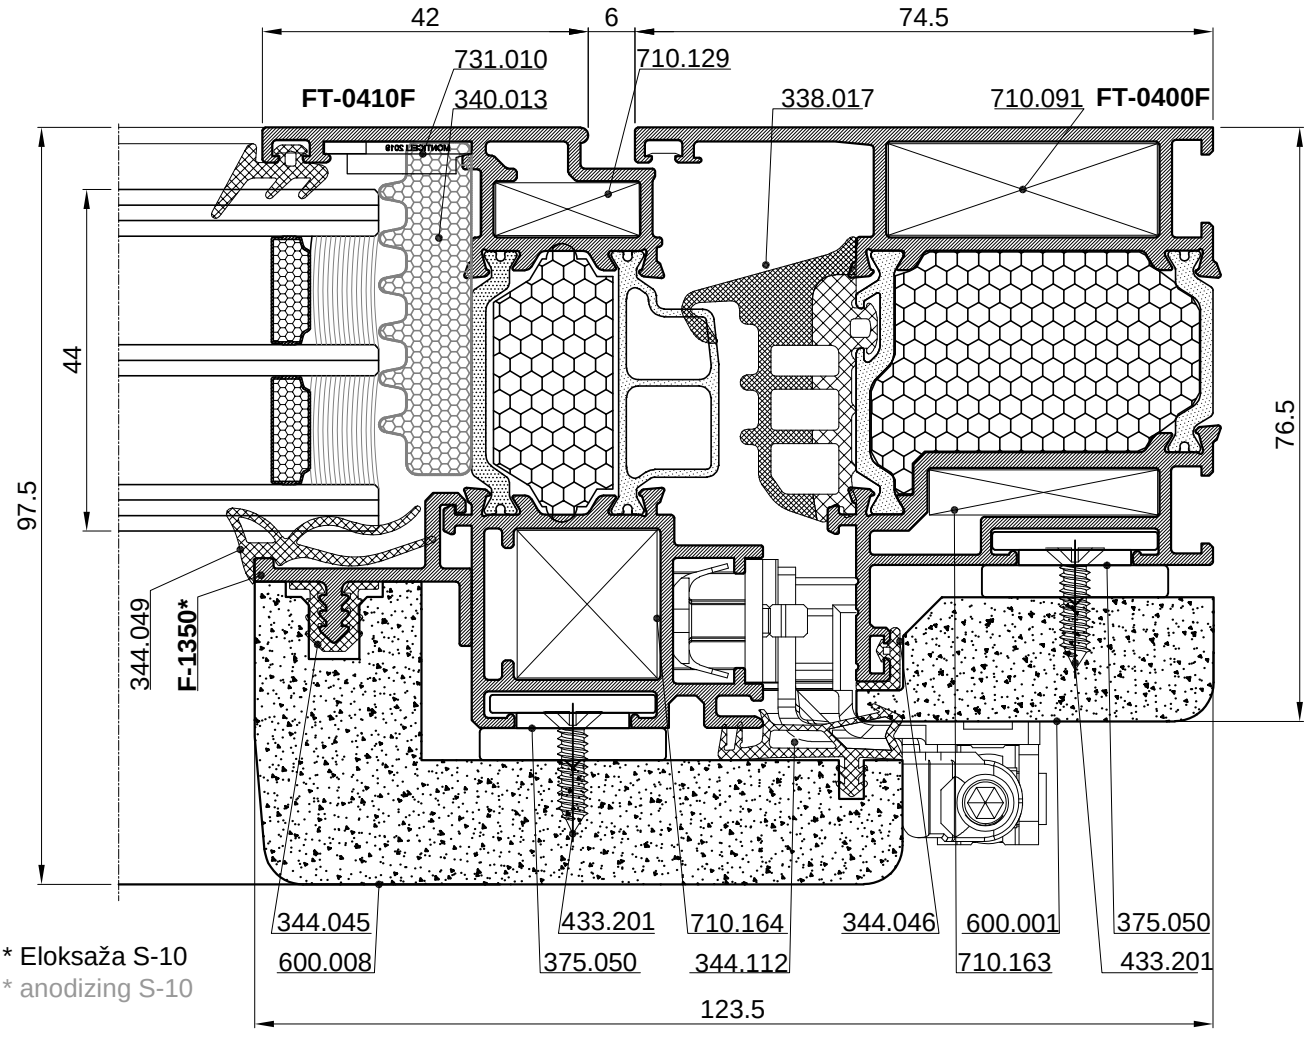


* Eloksaža S-10
* anodizing S-10




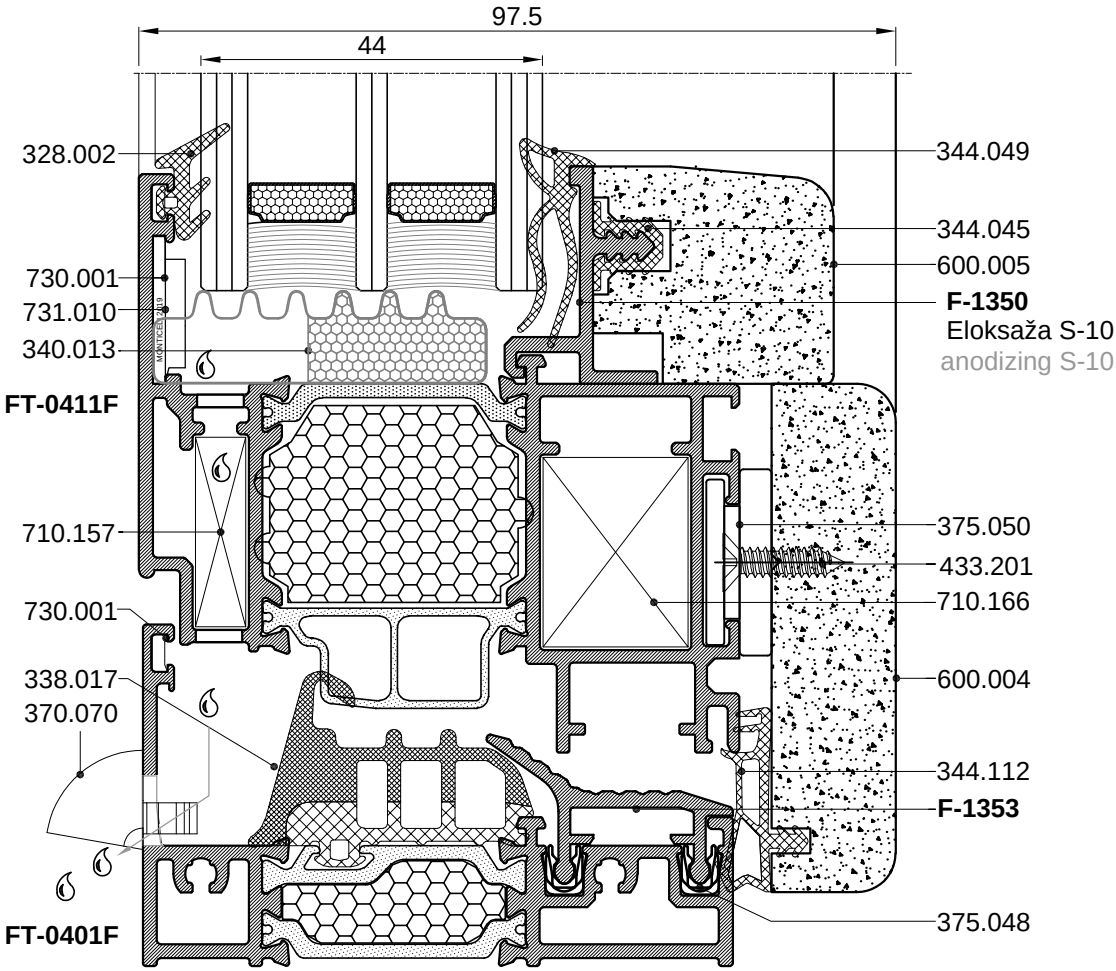


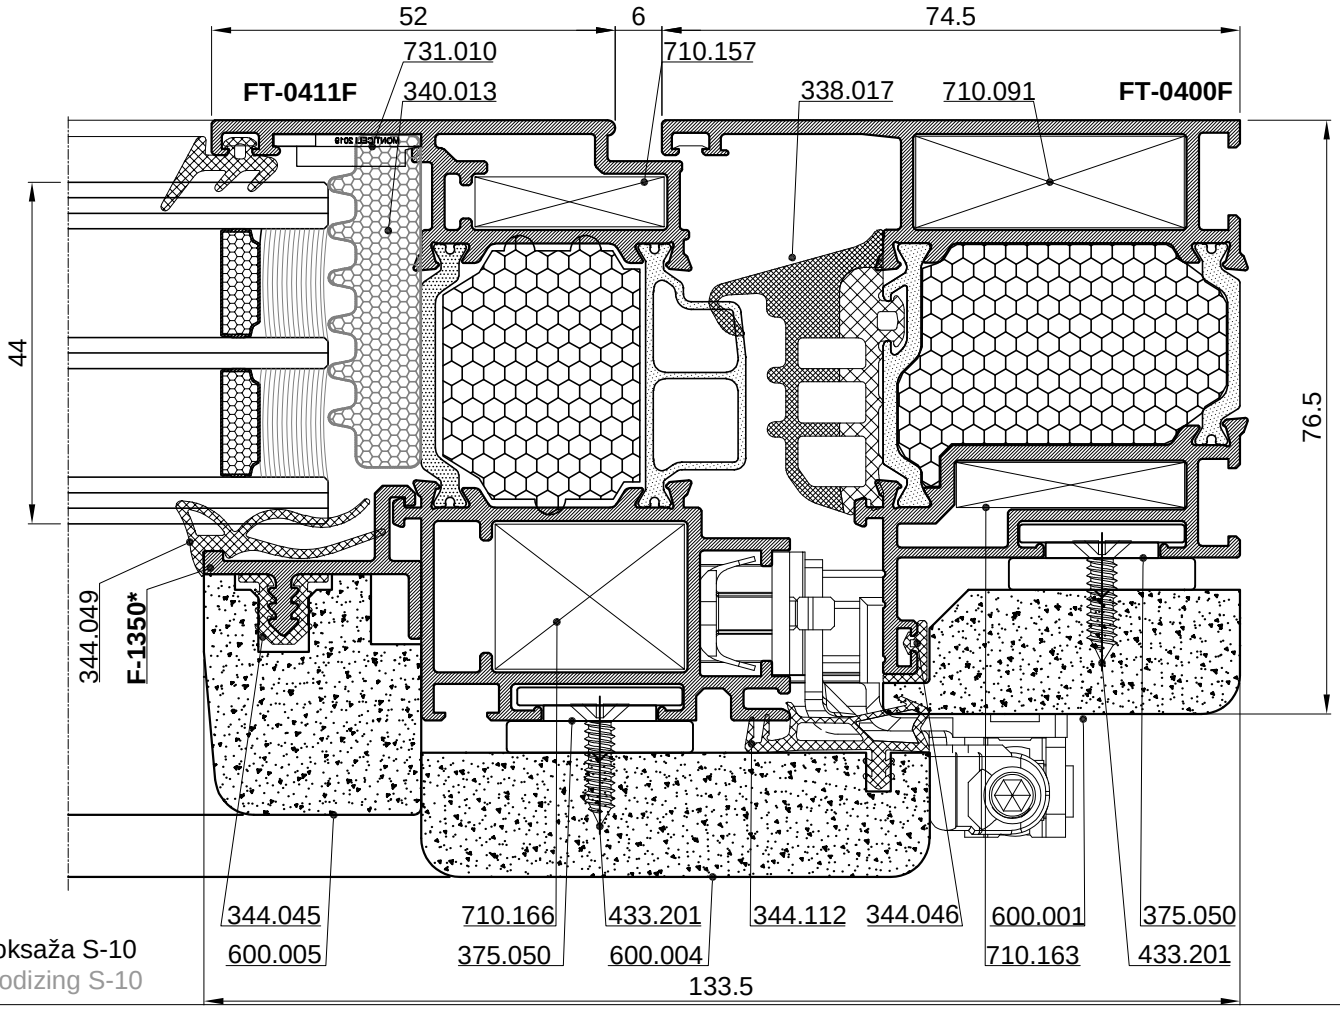


* Eloksaža S-10
* anodizing S-10




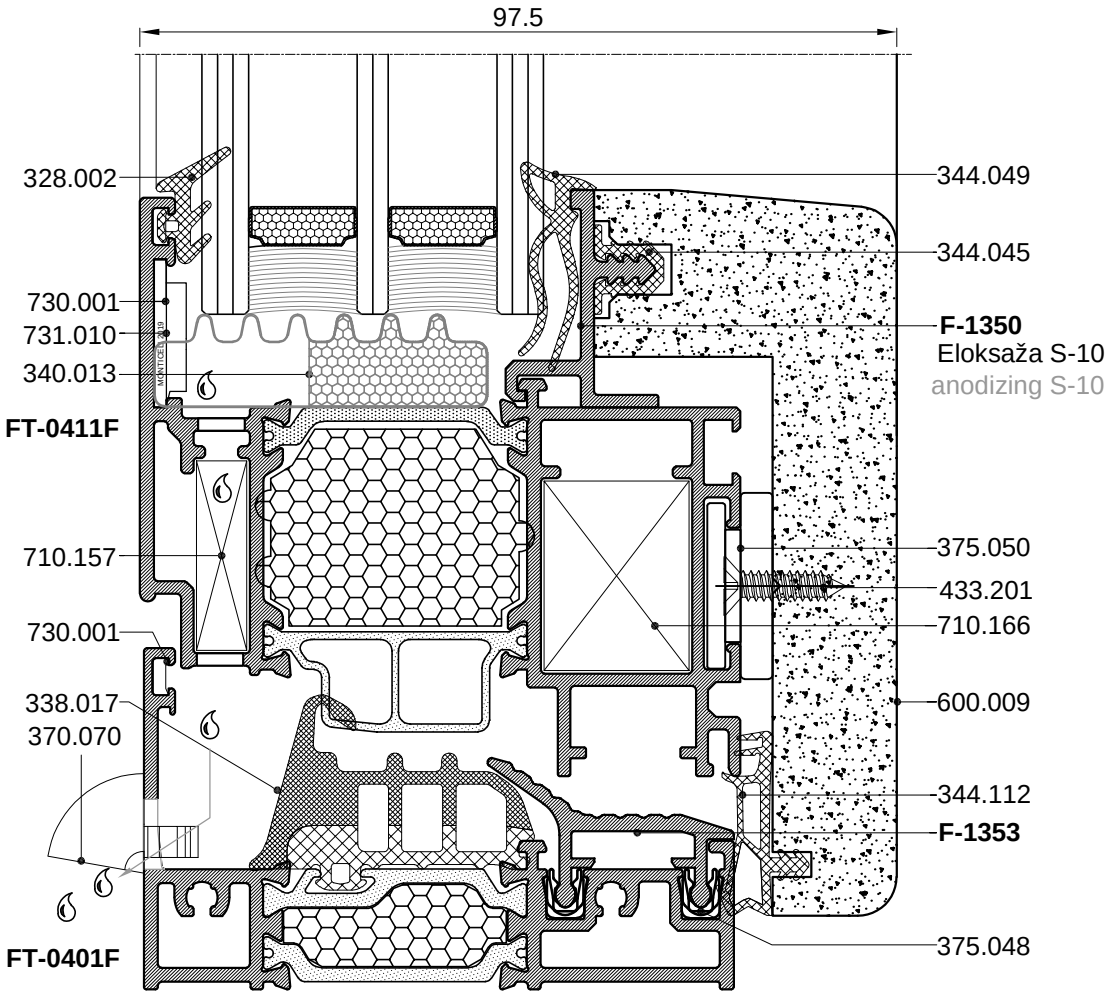

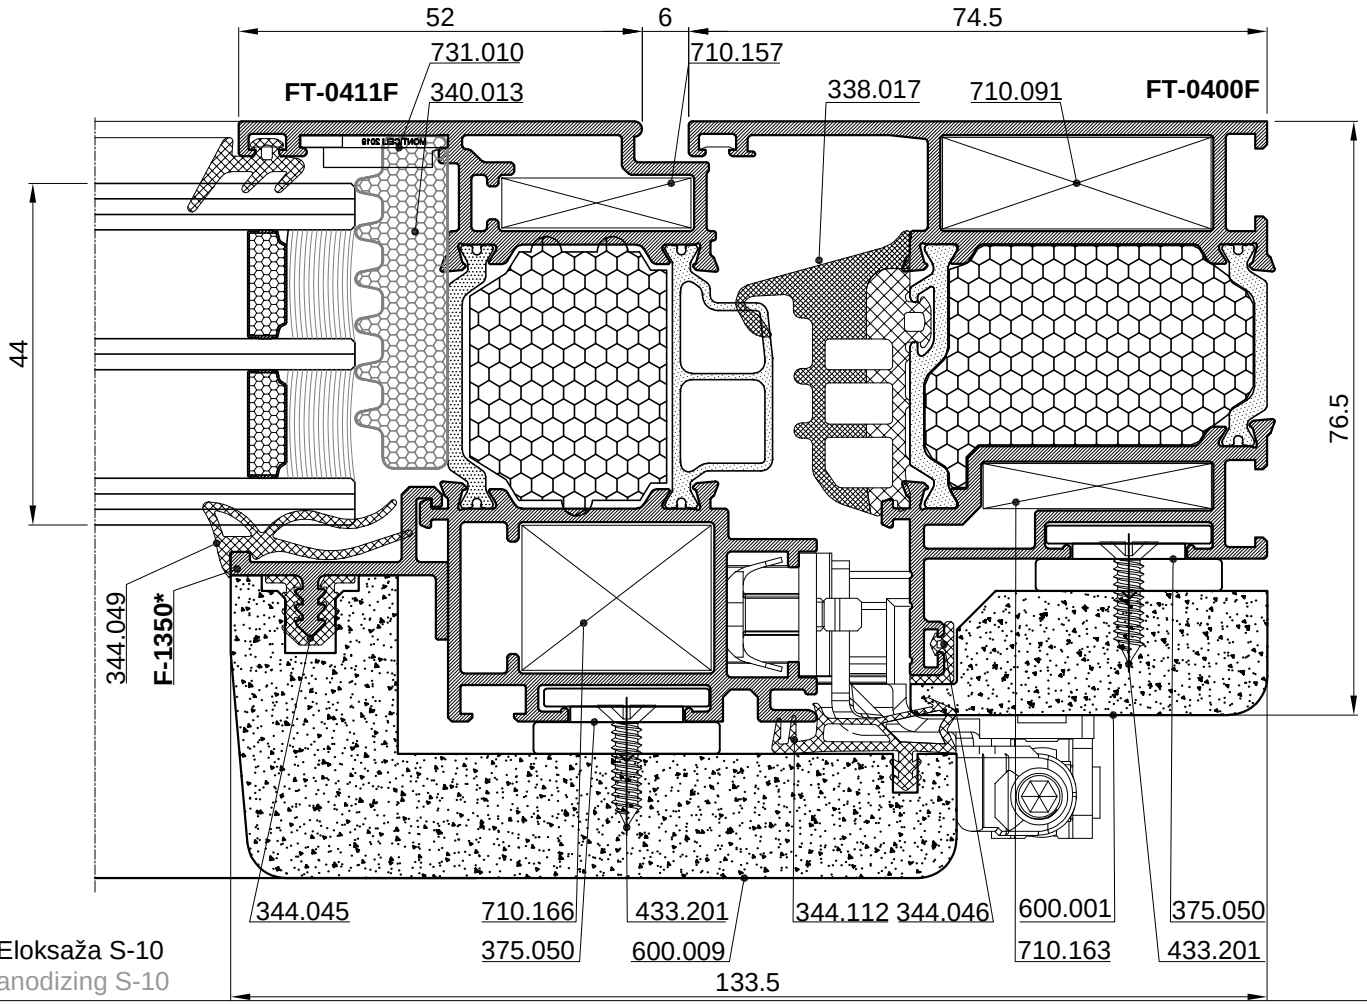



* Eloksaža S-10
* anodizing S-10

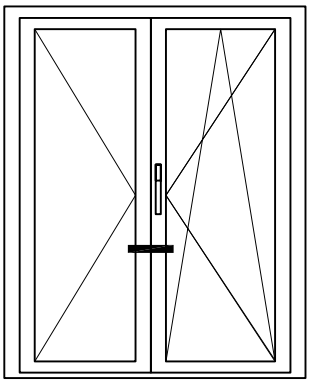

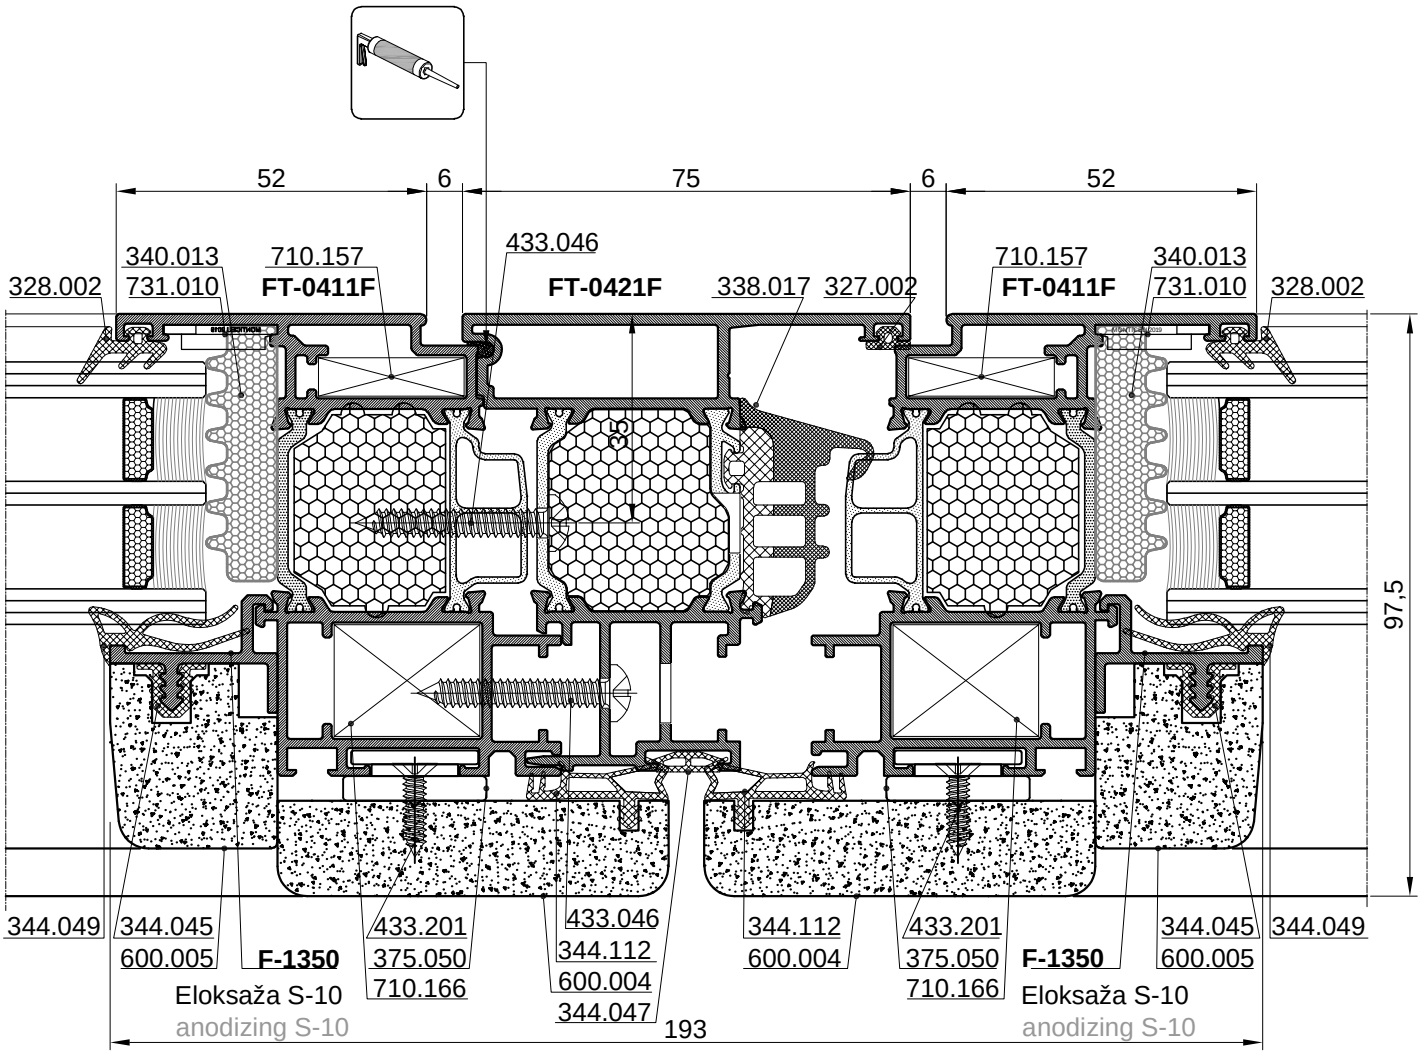



ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

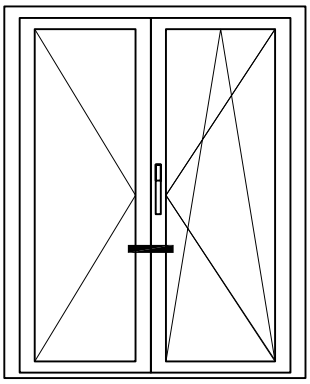


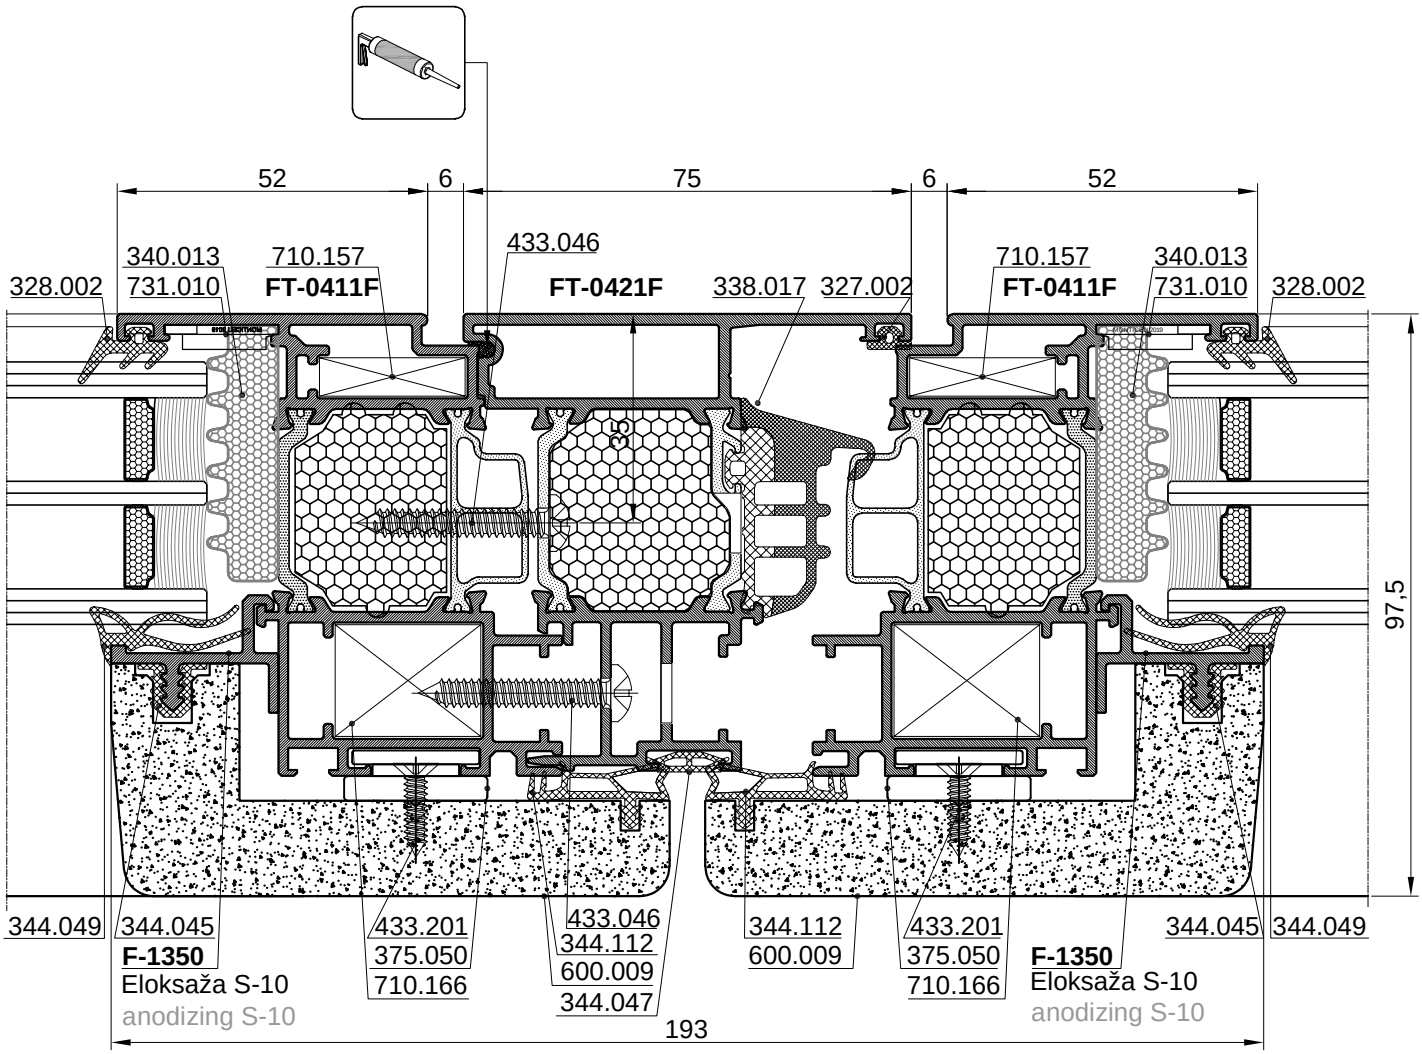


ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

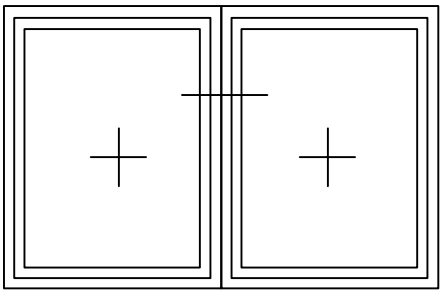

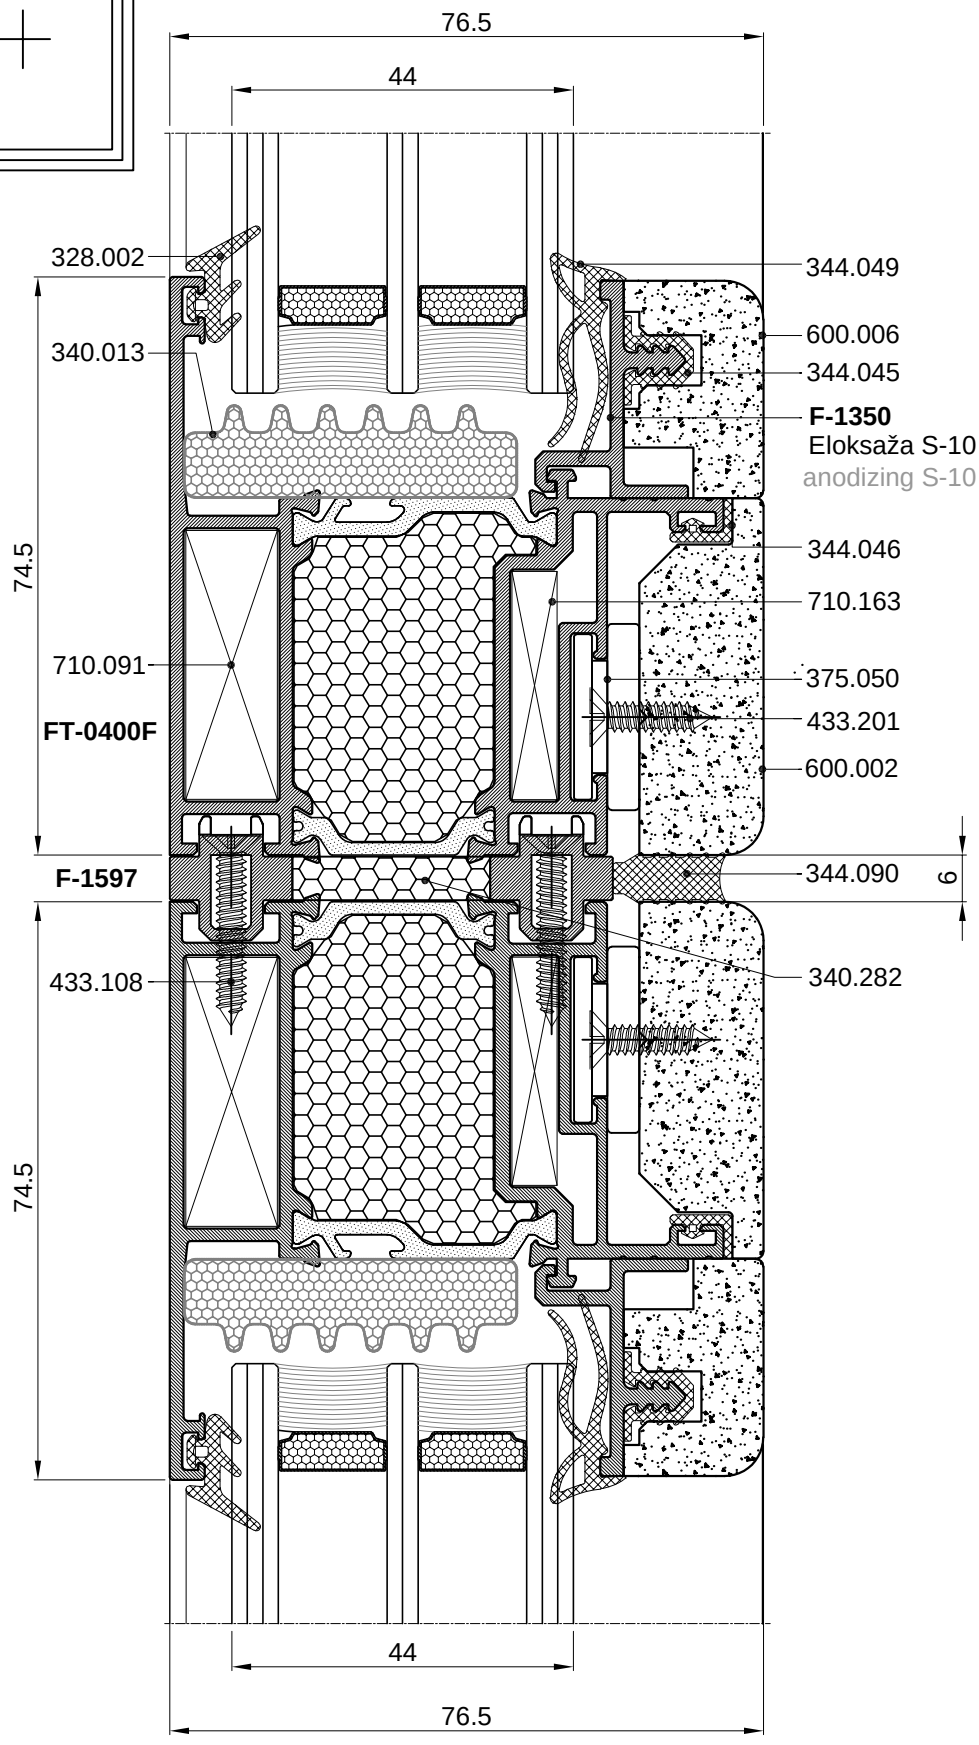

76.5
44
328.002
340.013
74.5
710.091
FT-0400F
F-1597
433.108
74.5
344.049
600.006
344.045
F-1350
Eloksaža S-10
anodizing S-10
344.046
710.163
375.050
433.201
600.002
344.090
6
340.282
44
76.5

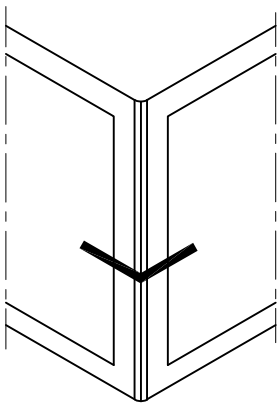


76.5
44
74.5
328.002
340.013
710.091
FT-0400F
433.018
344.049
600.006
344.045
F-1350
Eloksaža S-10
anodizing S-10
344.046
710.163
375.050
433.201
600.001
Promjenom kuta mjenjaju se i dimenzije drvene obloge
By changing the angle, the dimensions of the wooden coverings also change
Sikabond AT - universal
Al. profil
F-0559
F-0288
433.020
F-1232
344.039
061046
Silikonirati po želji:
npr. Sikasil
WS 605 S
45°
20
5.2
100
60
20
1.5
Ø2.9
17
α/2
39
Al nosač raditi:
Kut raditi ovisno o stanju na objektu
- svako 300 mm
Perform al support profile:
angle depending on object condition
- every approx 300 mm

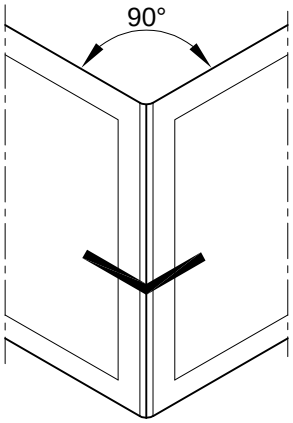


KUT PREMA VANI
CORNER TO OUTSIDE

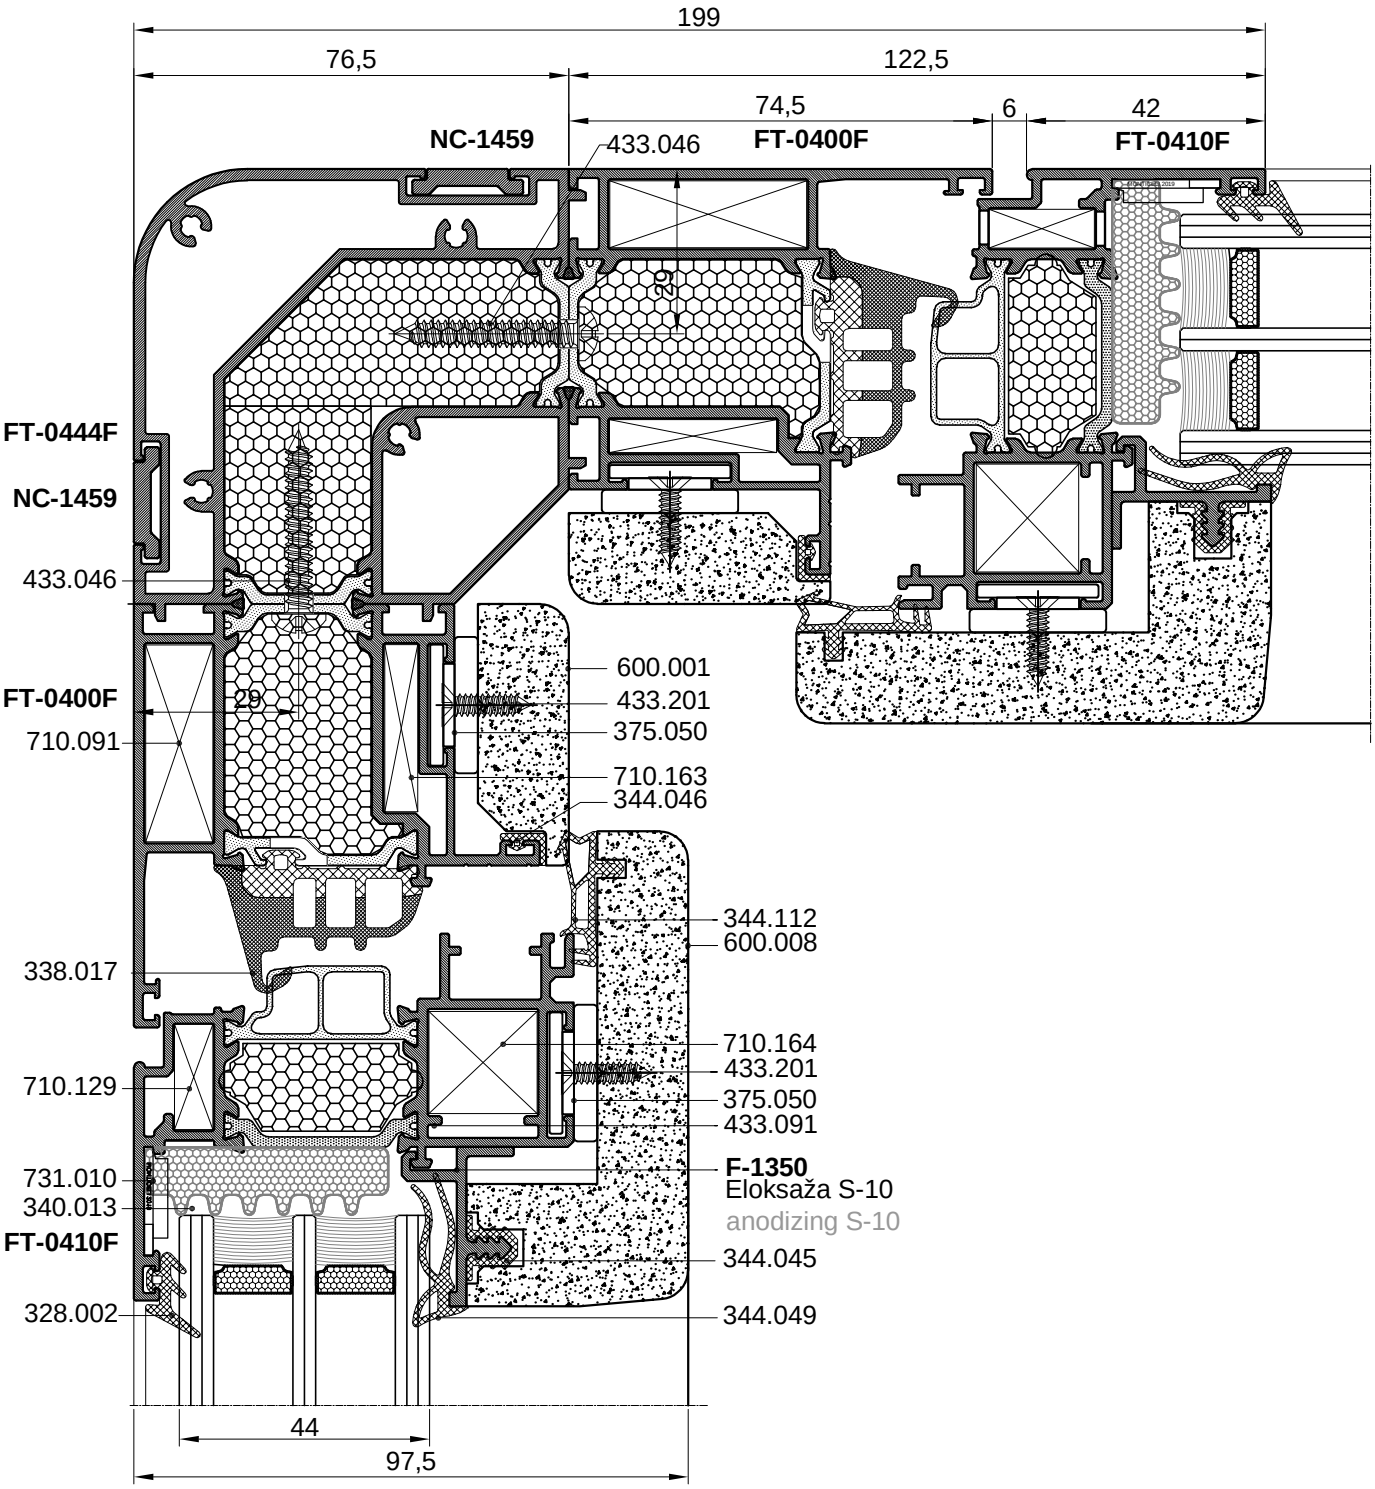


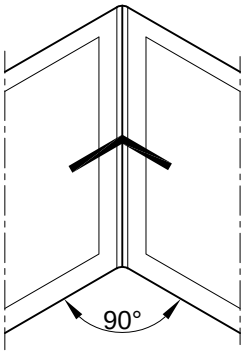


KUT PREMA UNUTRA
COTNER TO INSIDE

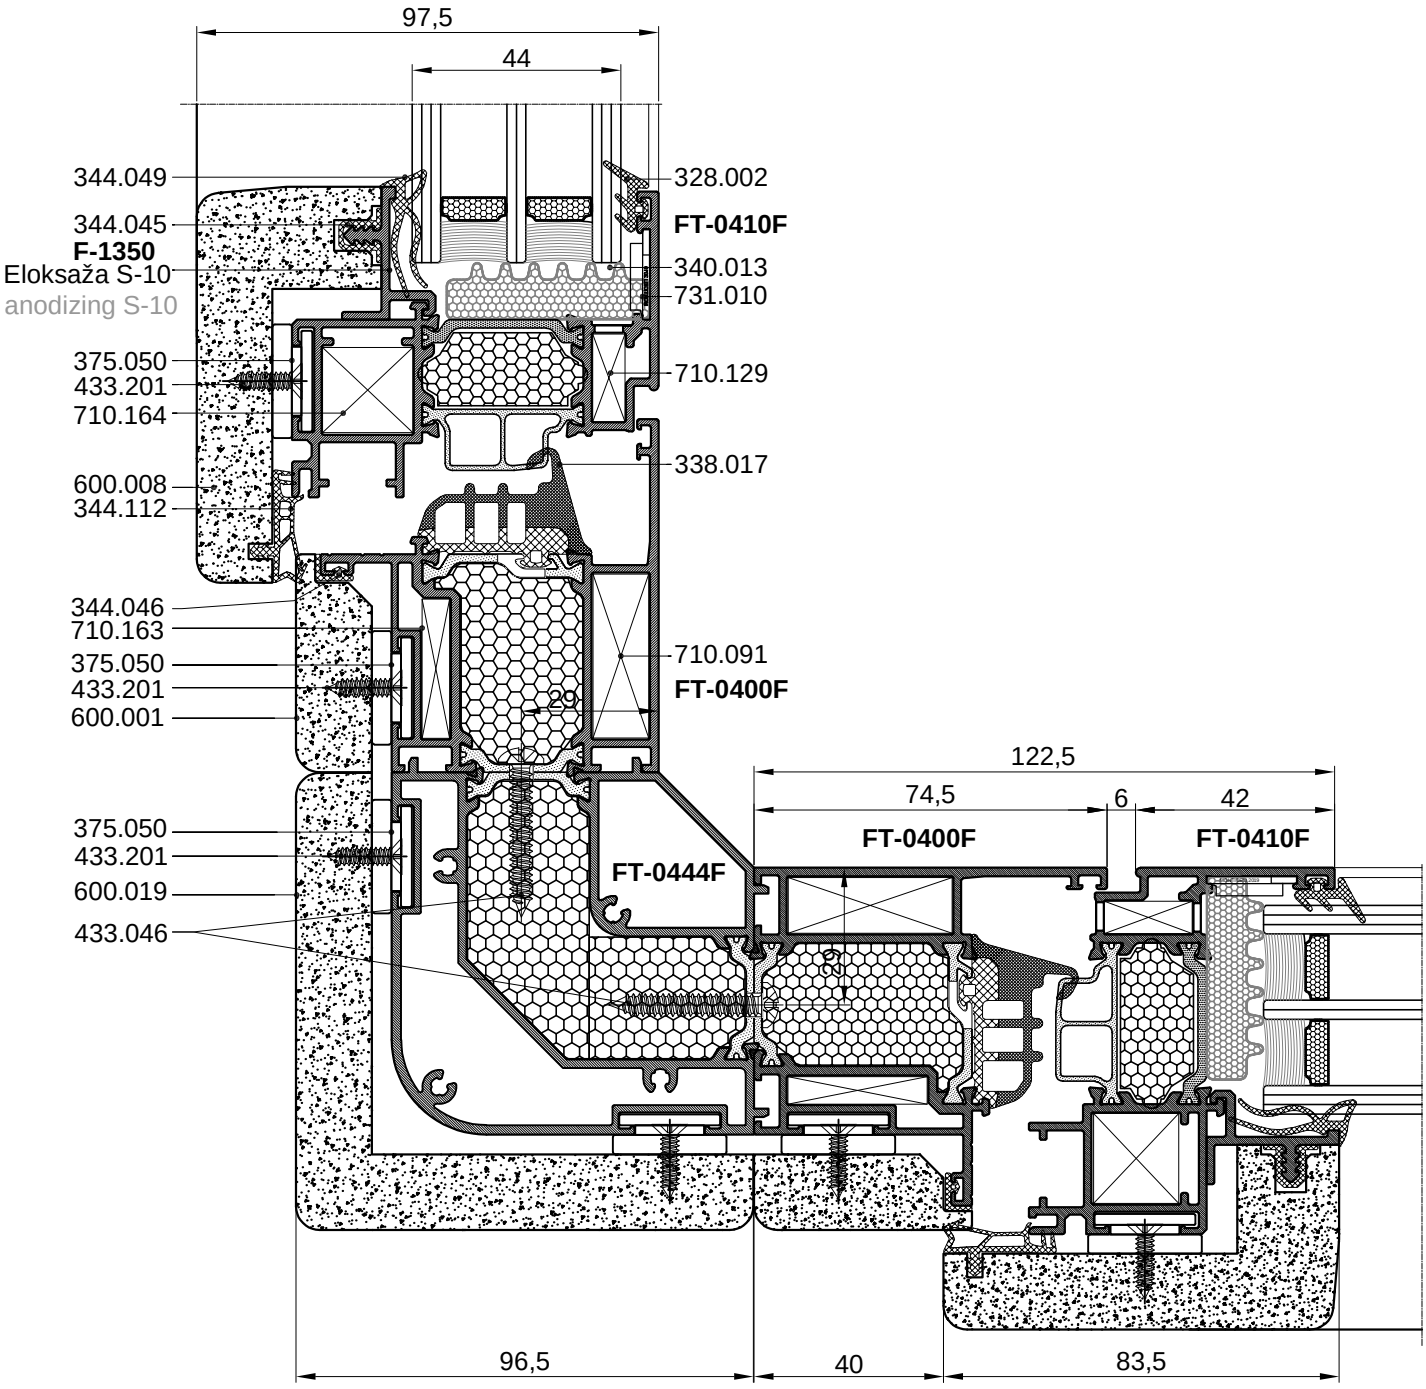


Presjeci-vrata
Cross sections-door

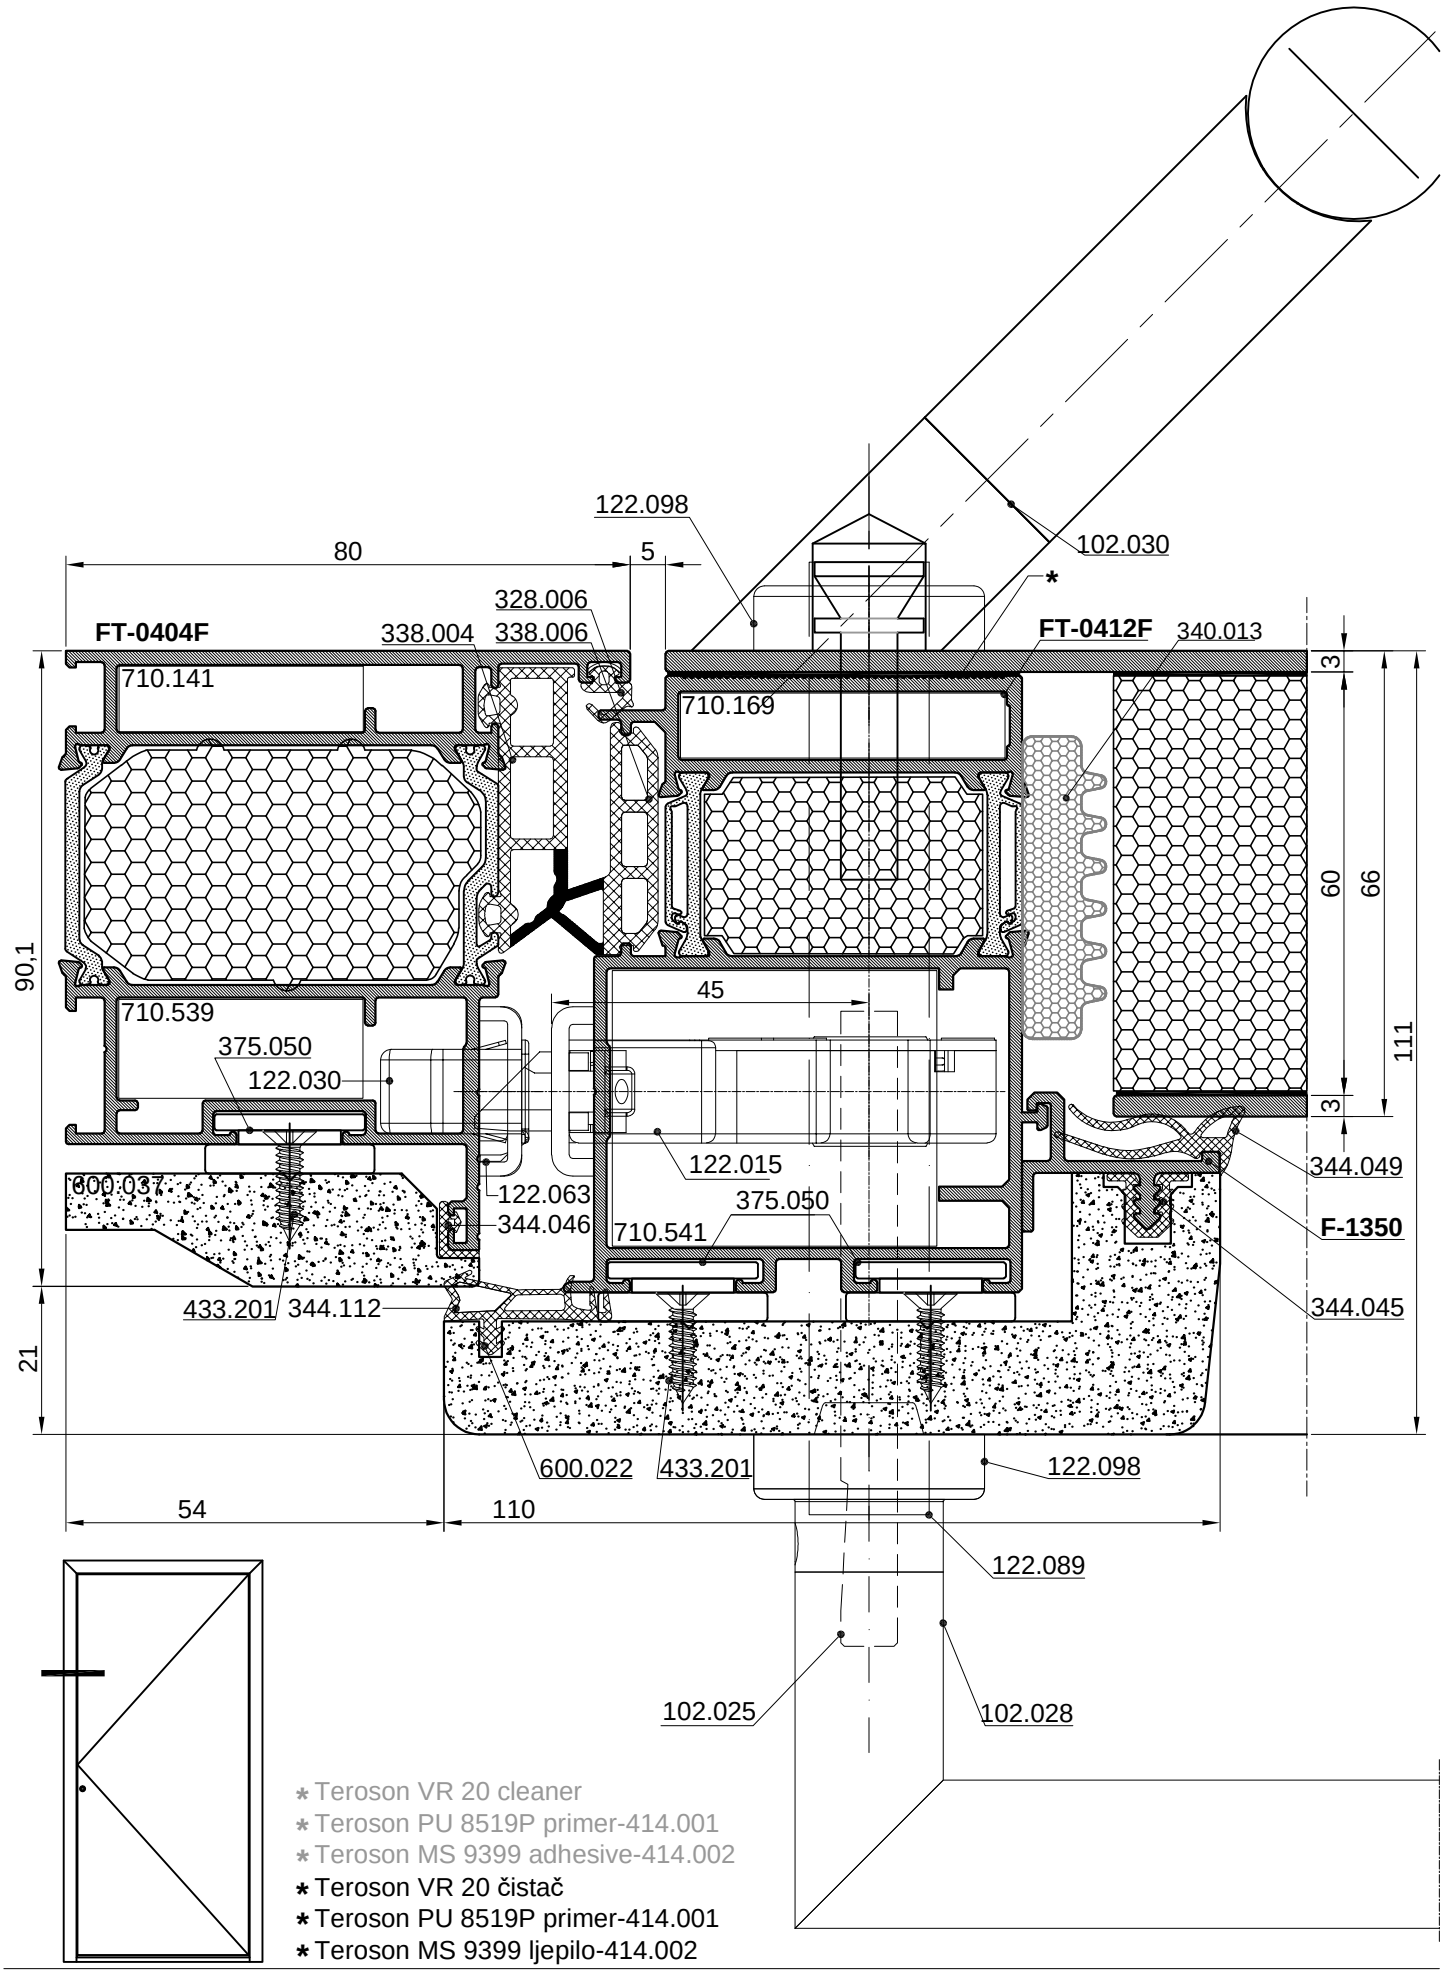



* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002
* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002

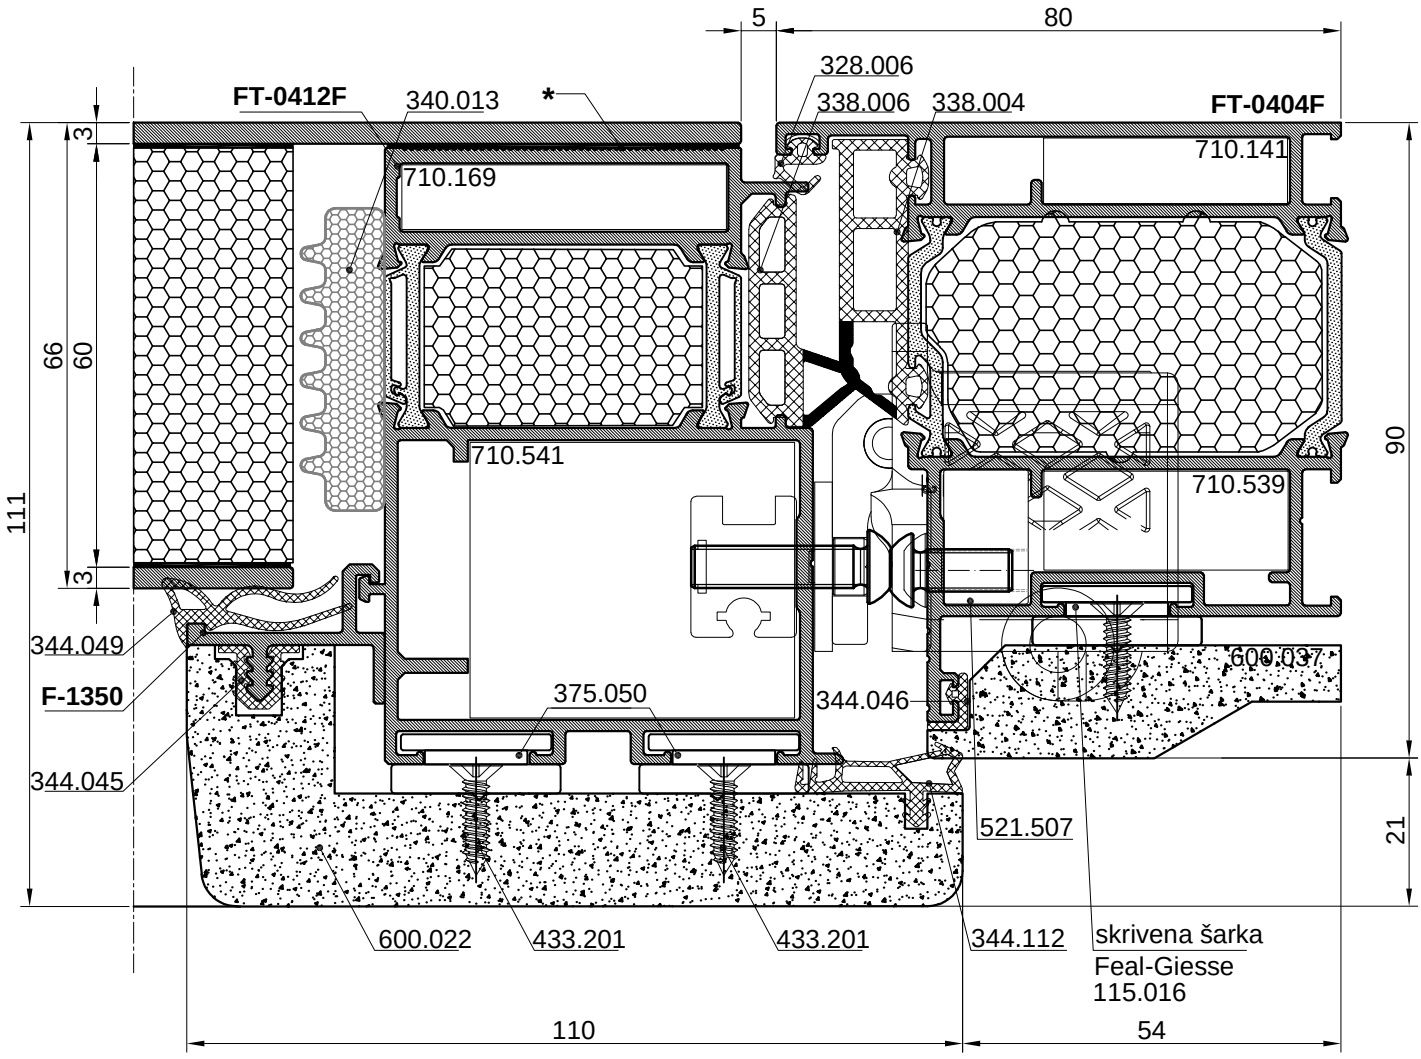

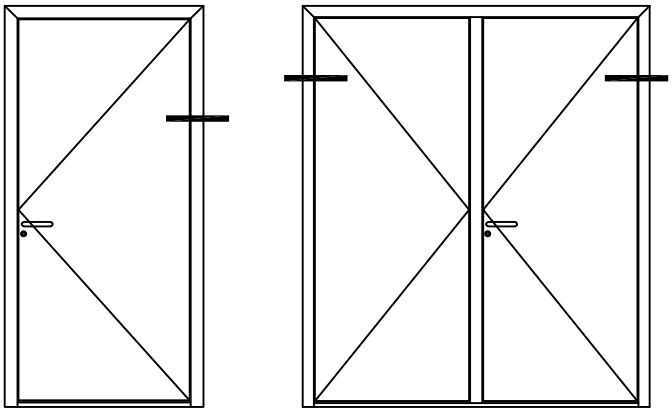

* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002
* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002

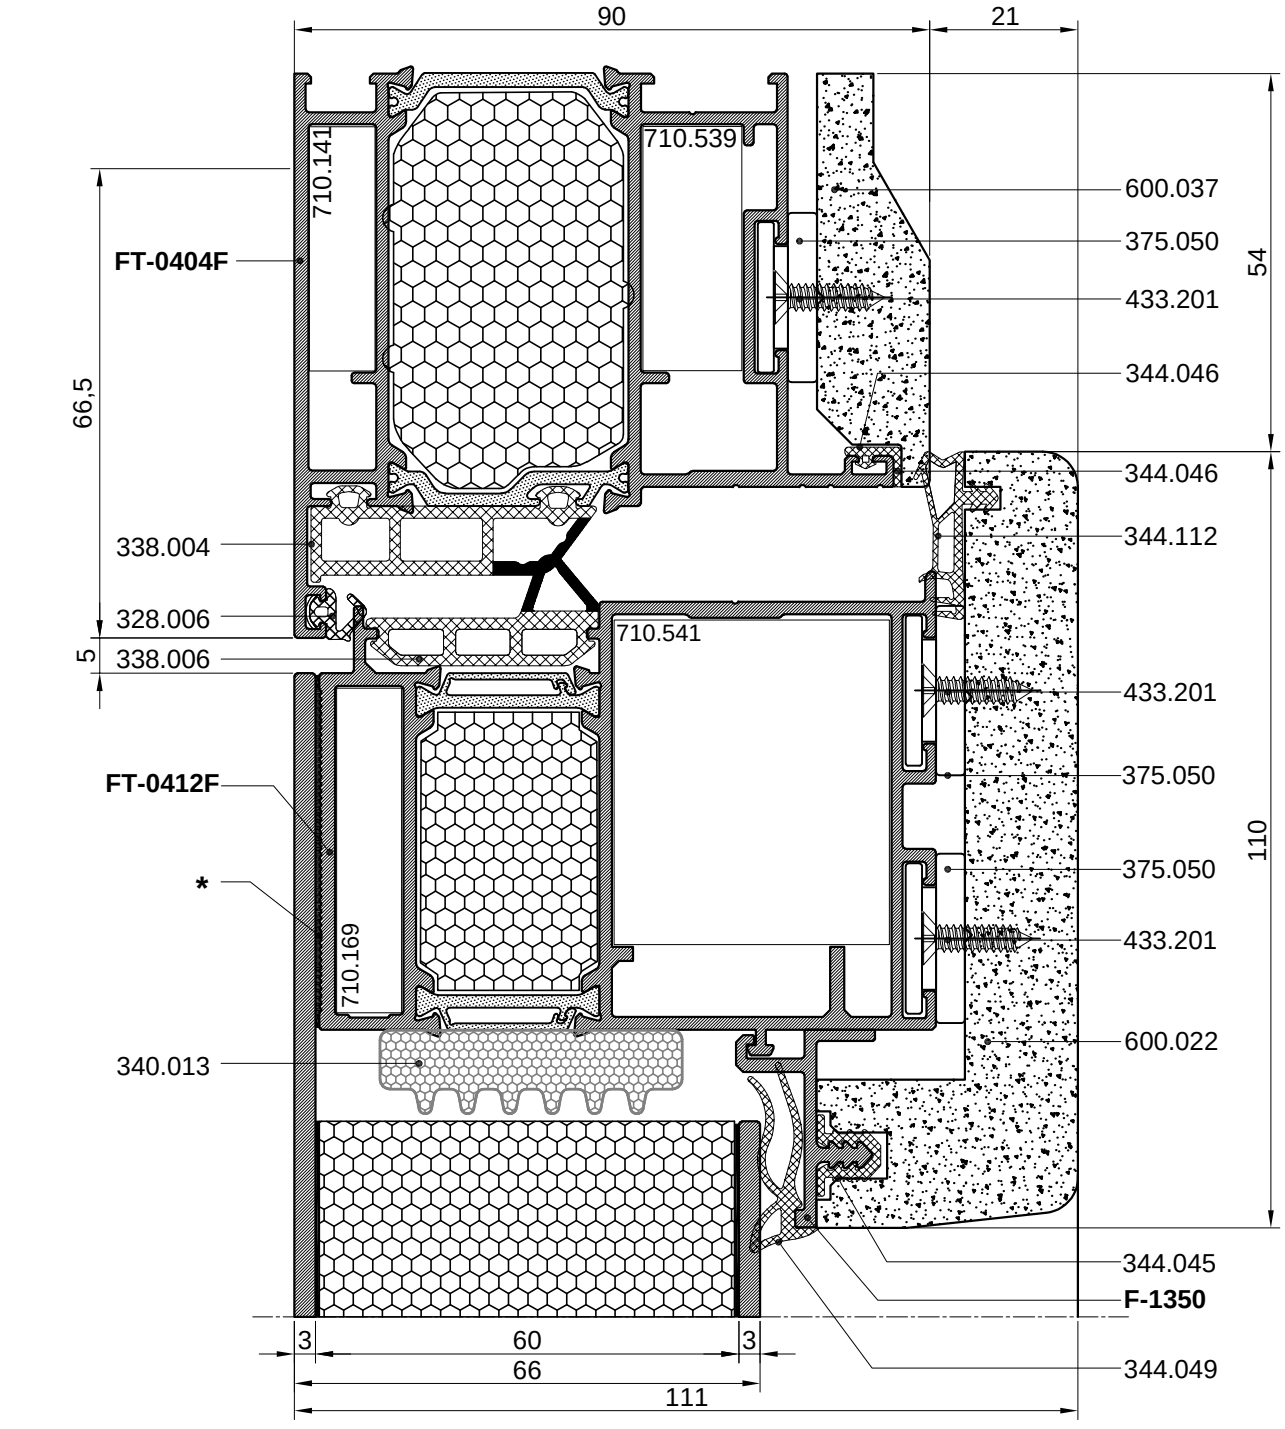


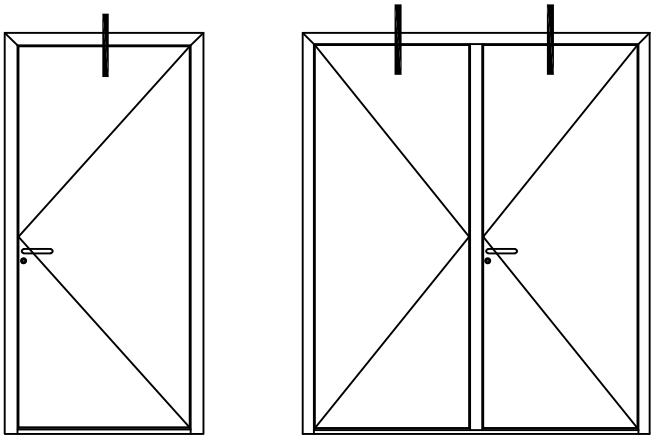



* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002
* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002


* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002


* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002

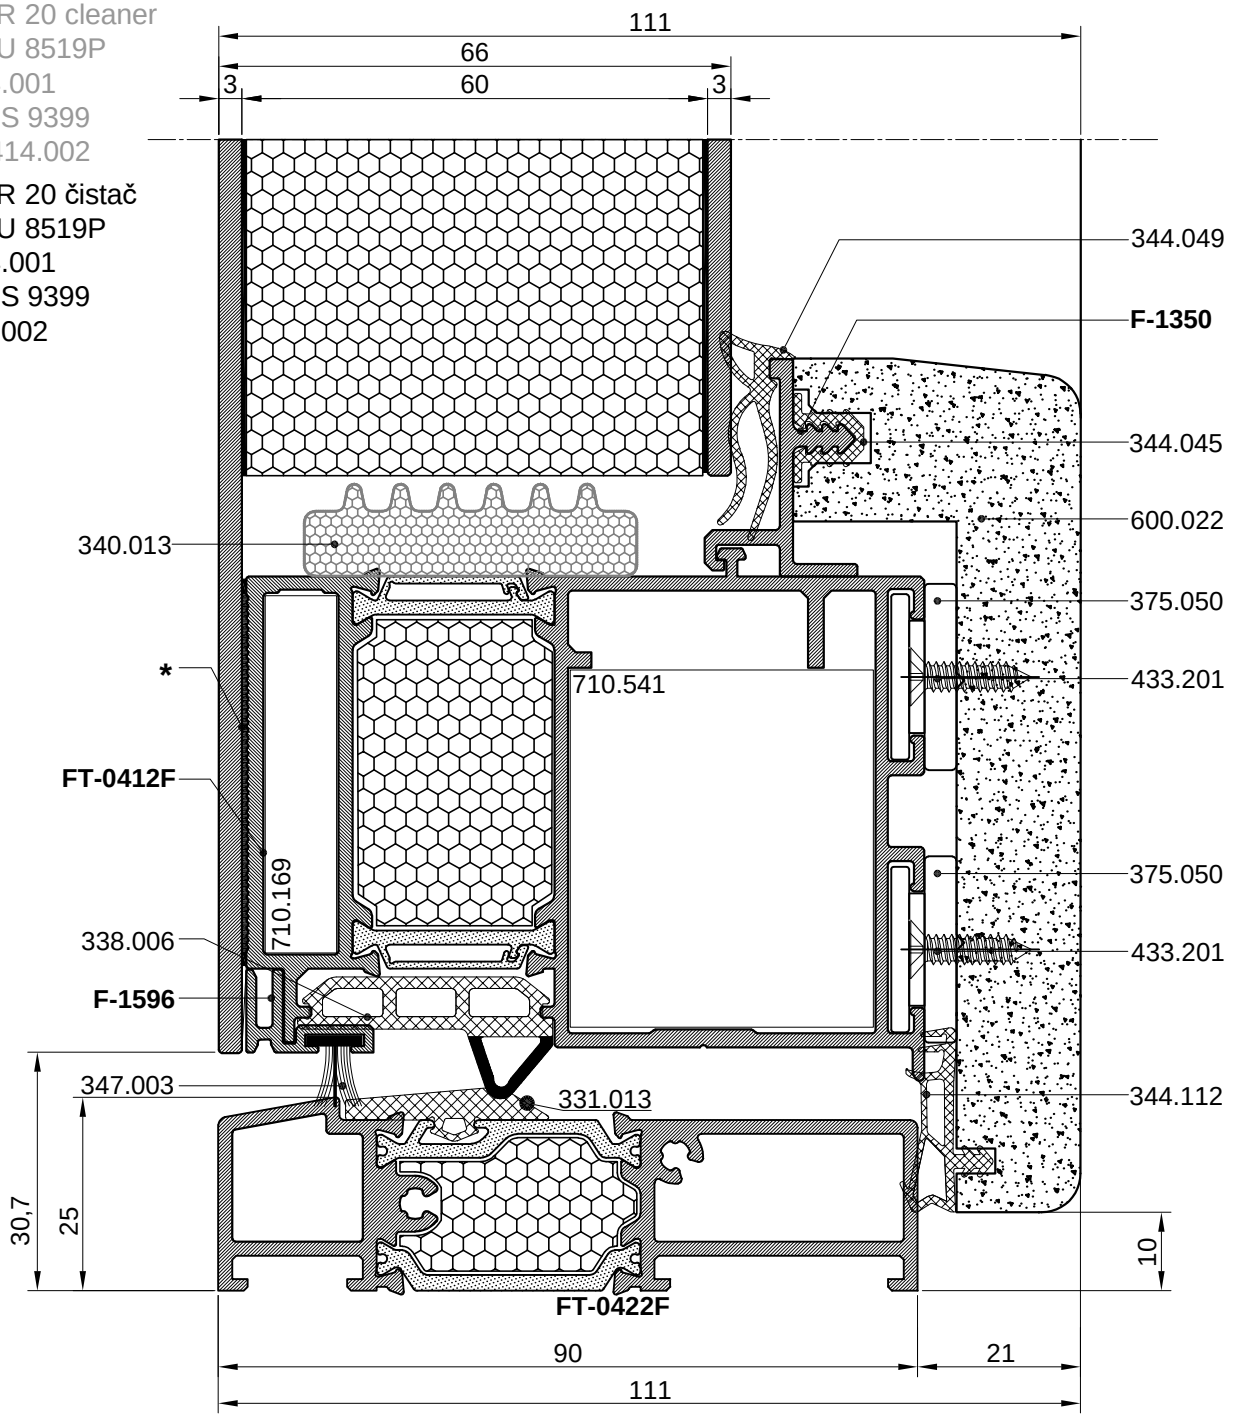

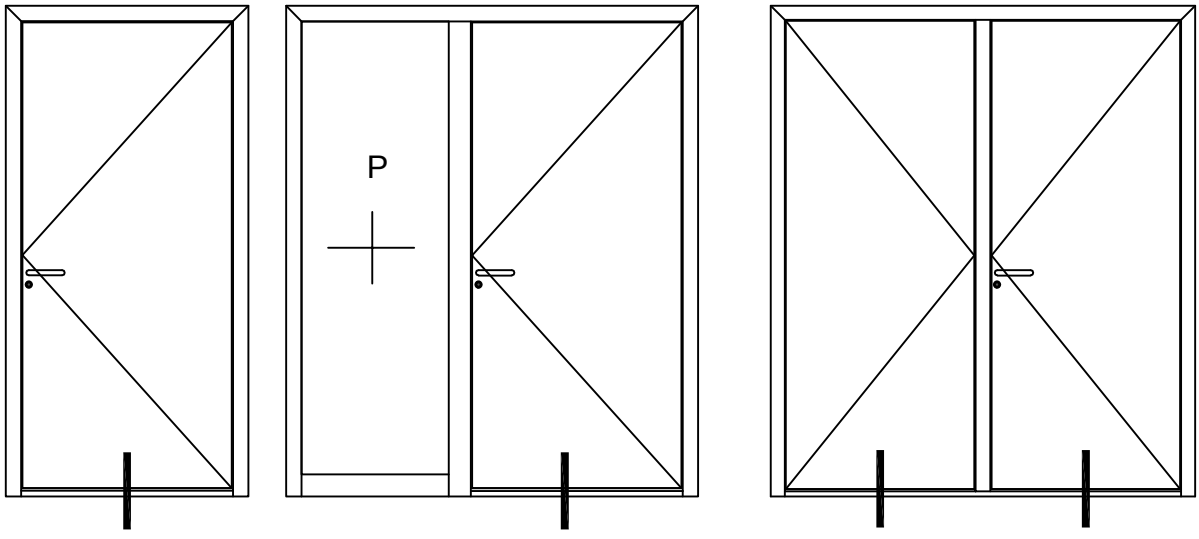


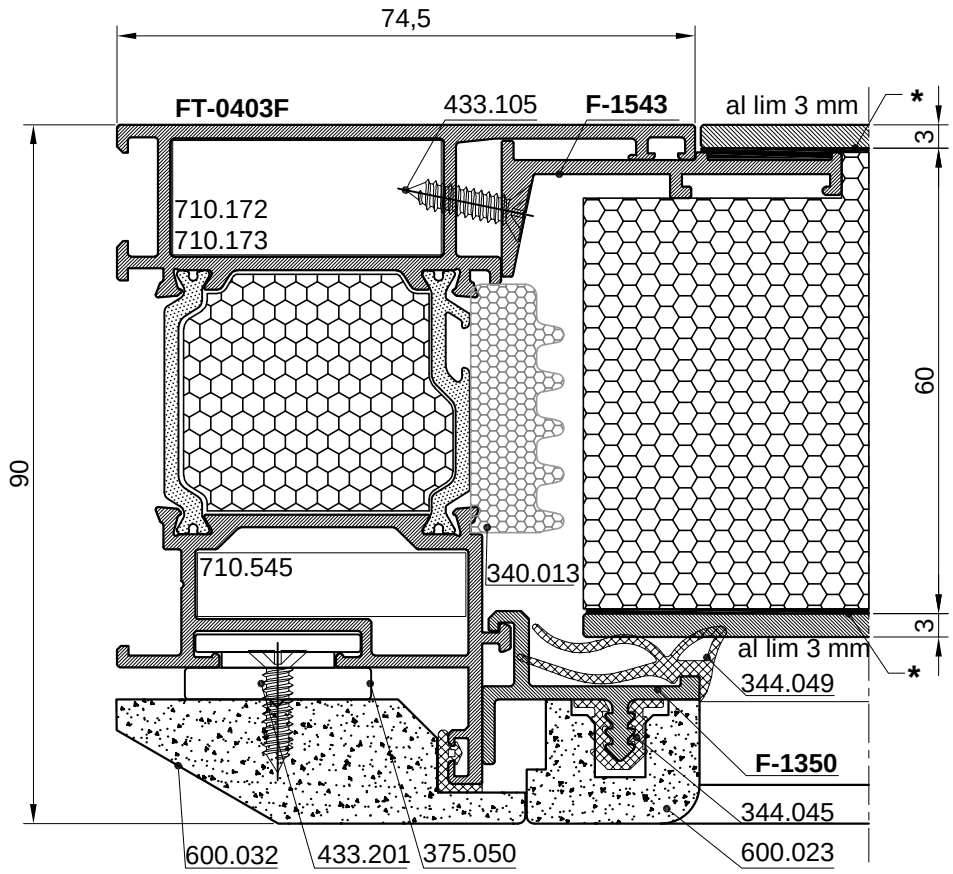


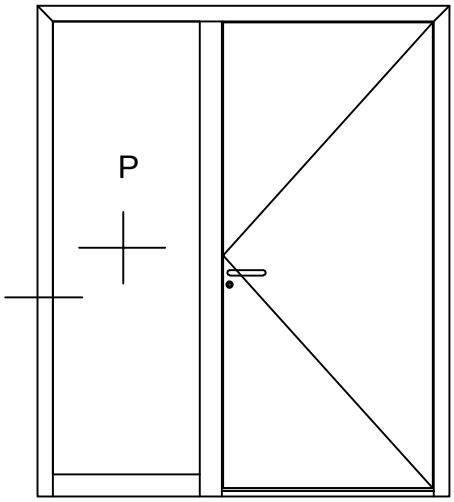


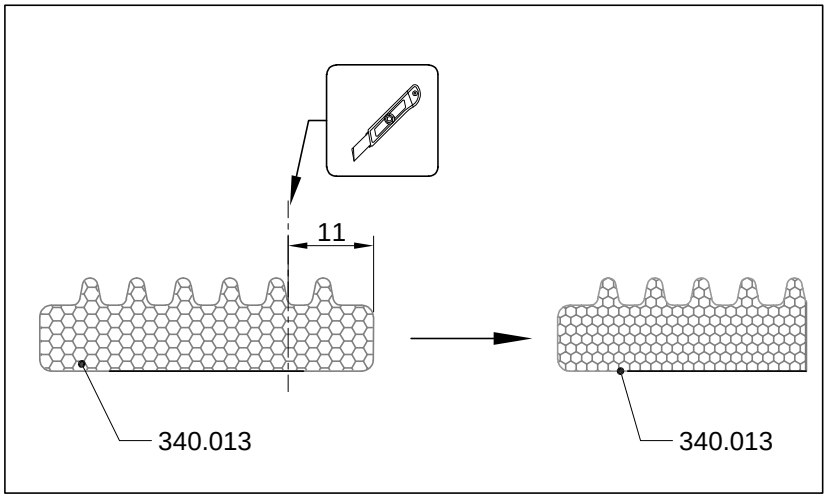


* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002
* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002

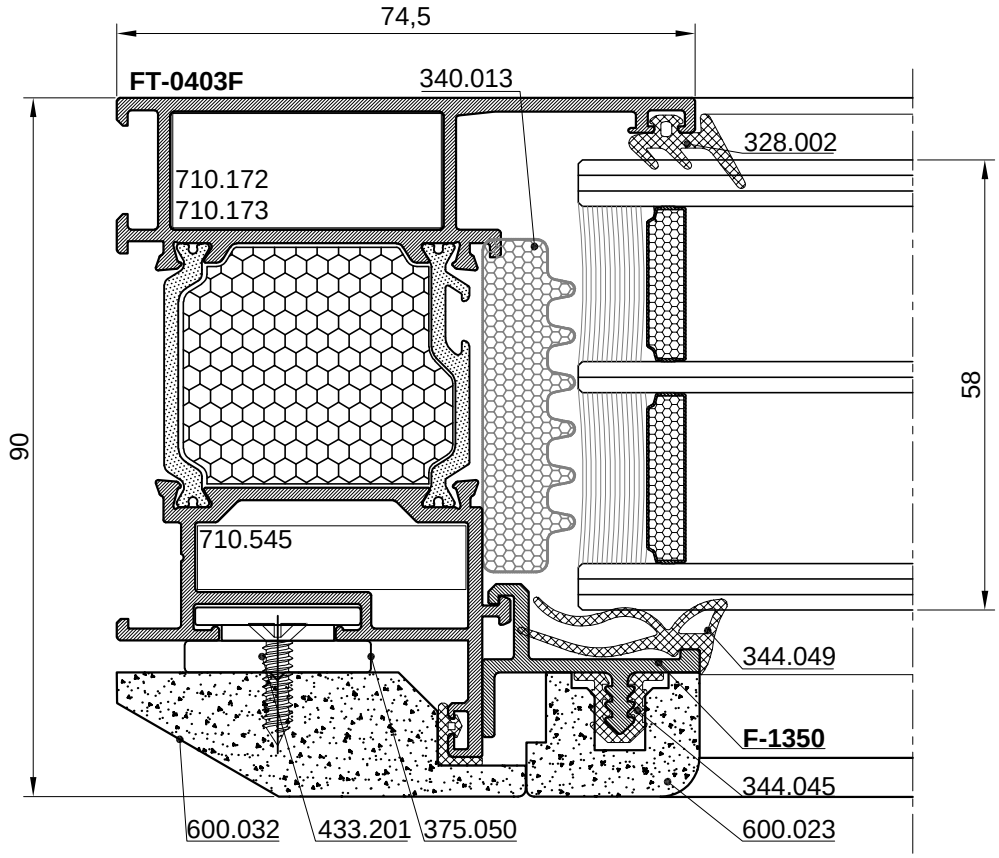
74,5
FT-0403F
340.013
328.002
710.172
710.173
90
58
710.545
344.049
F-1350
344.045
600.032
433.201
375.050
600.023

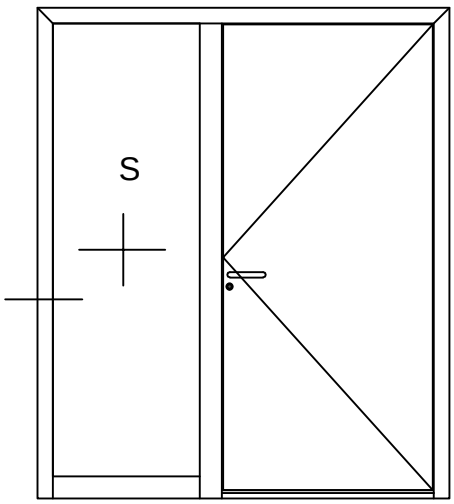

S

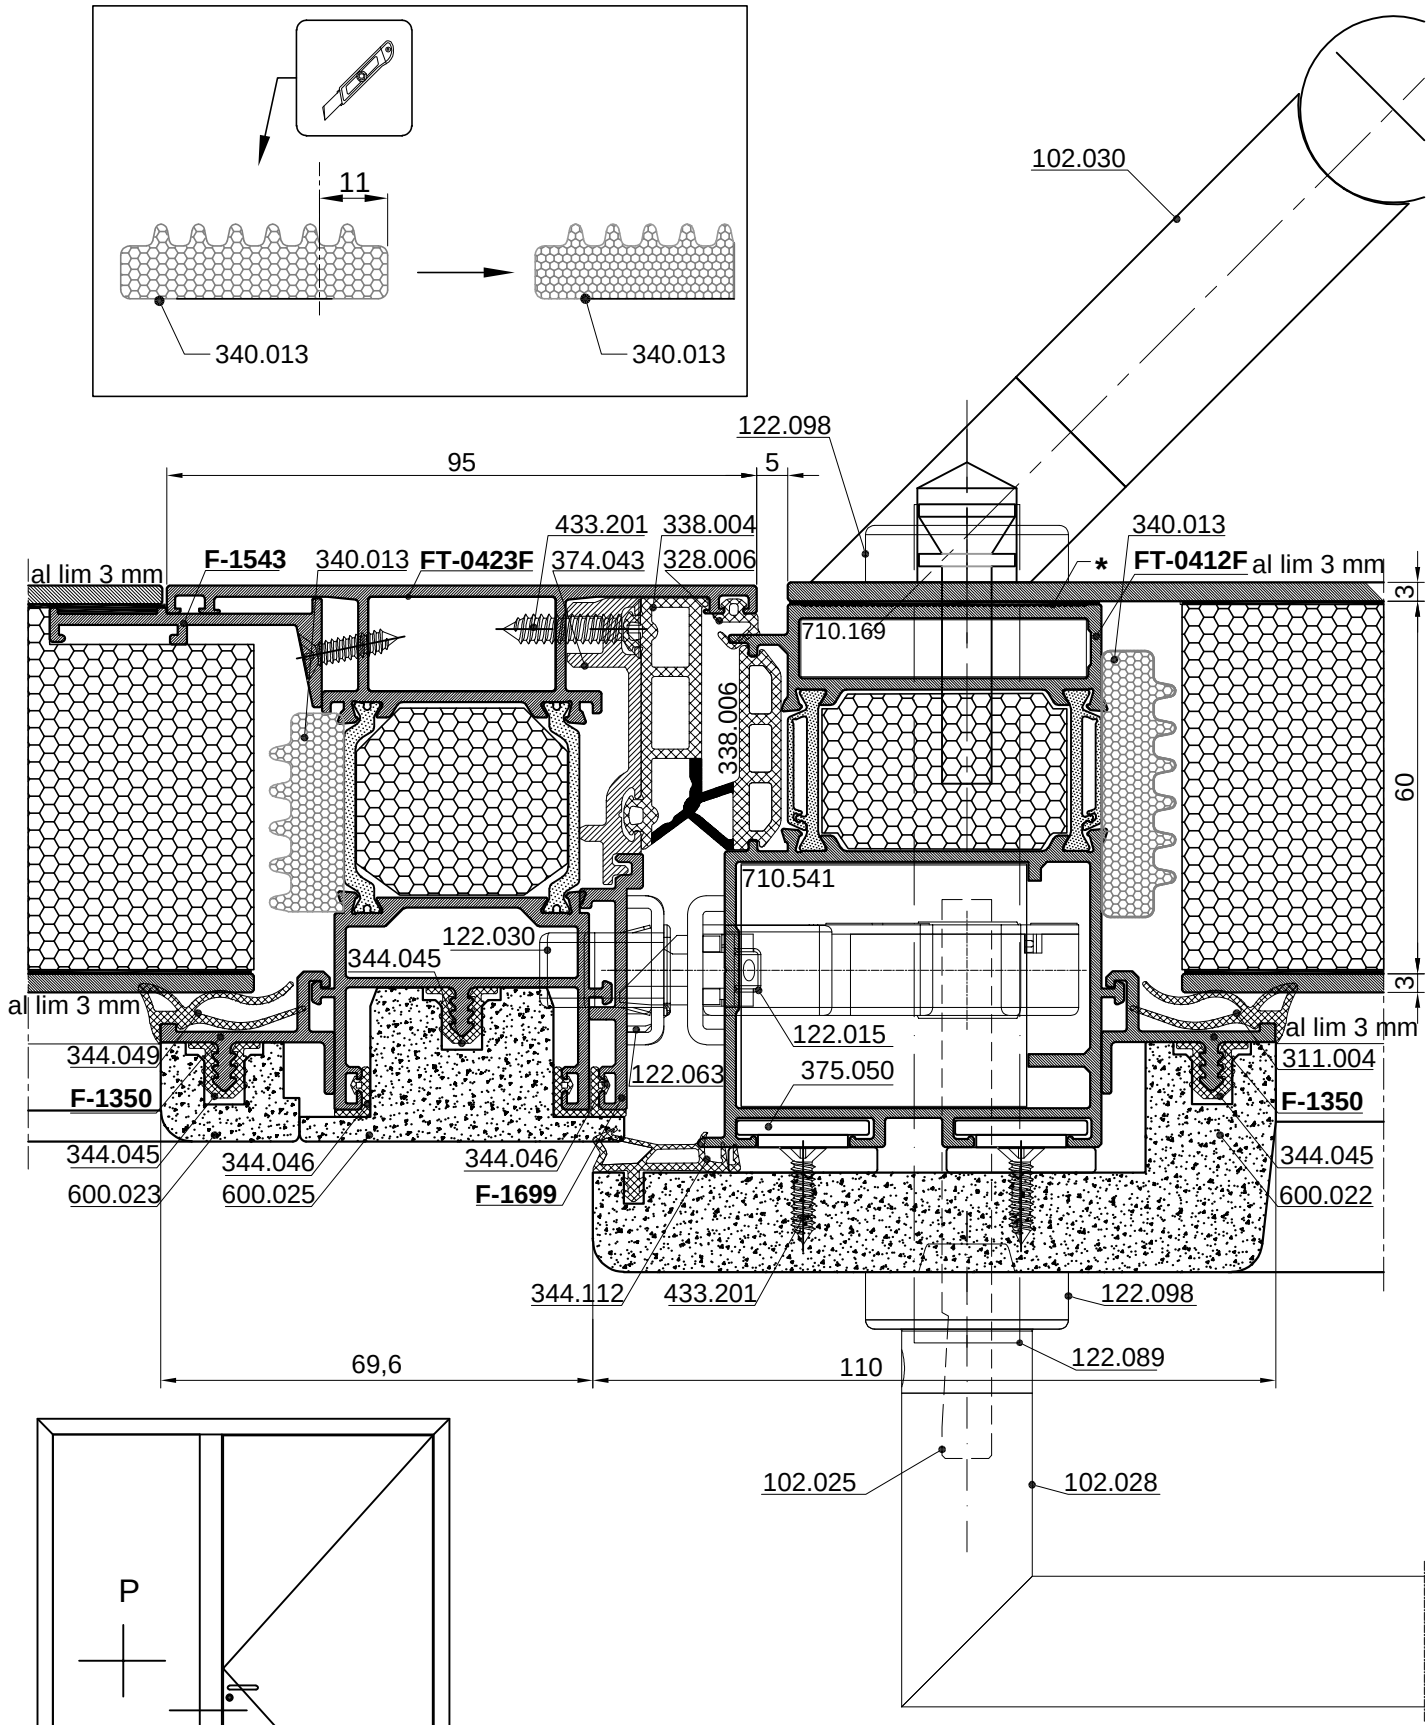


* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002
* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002

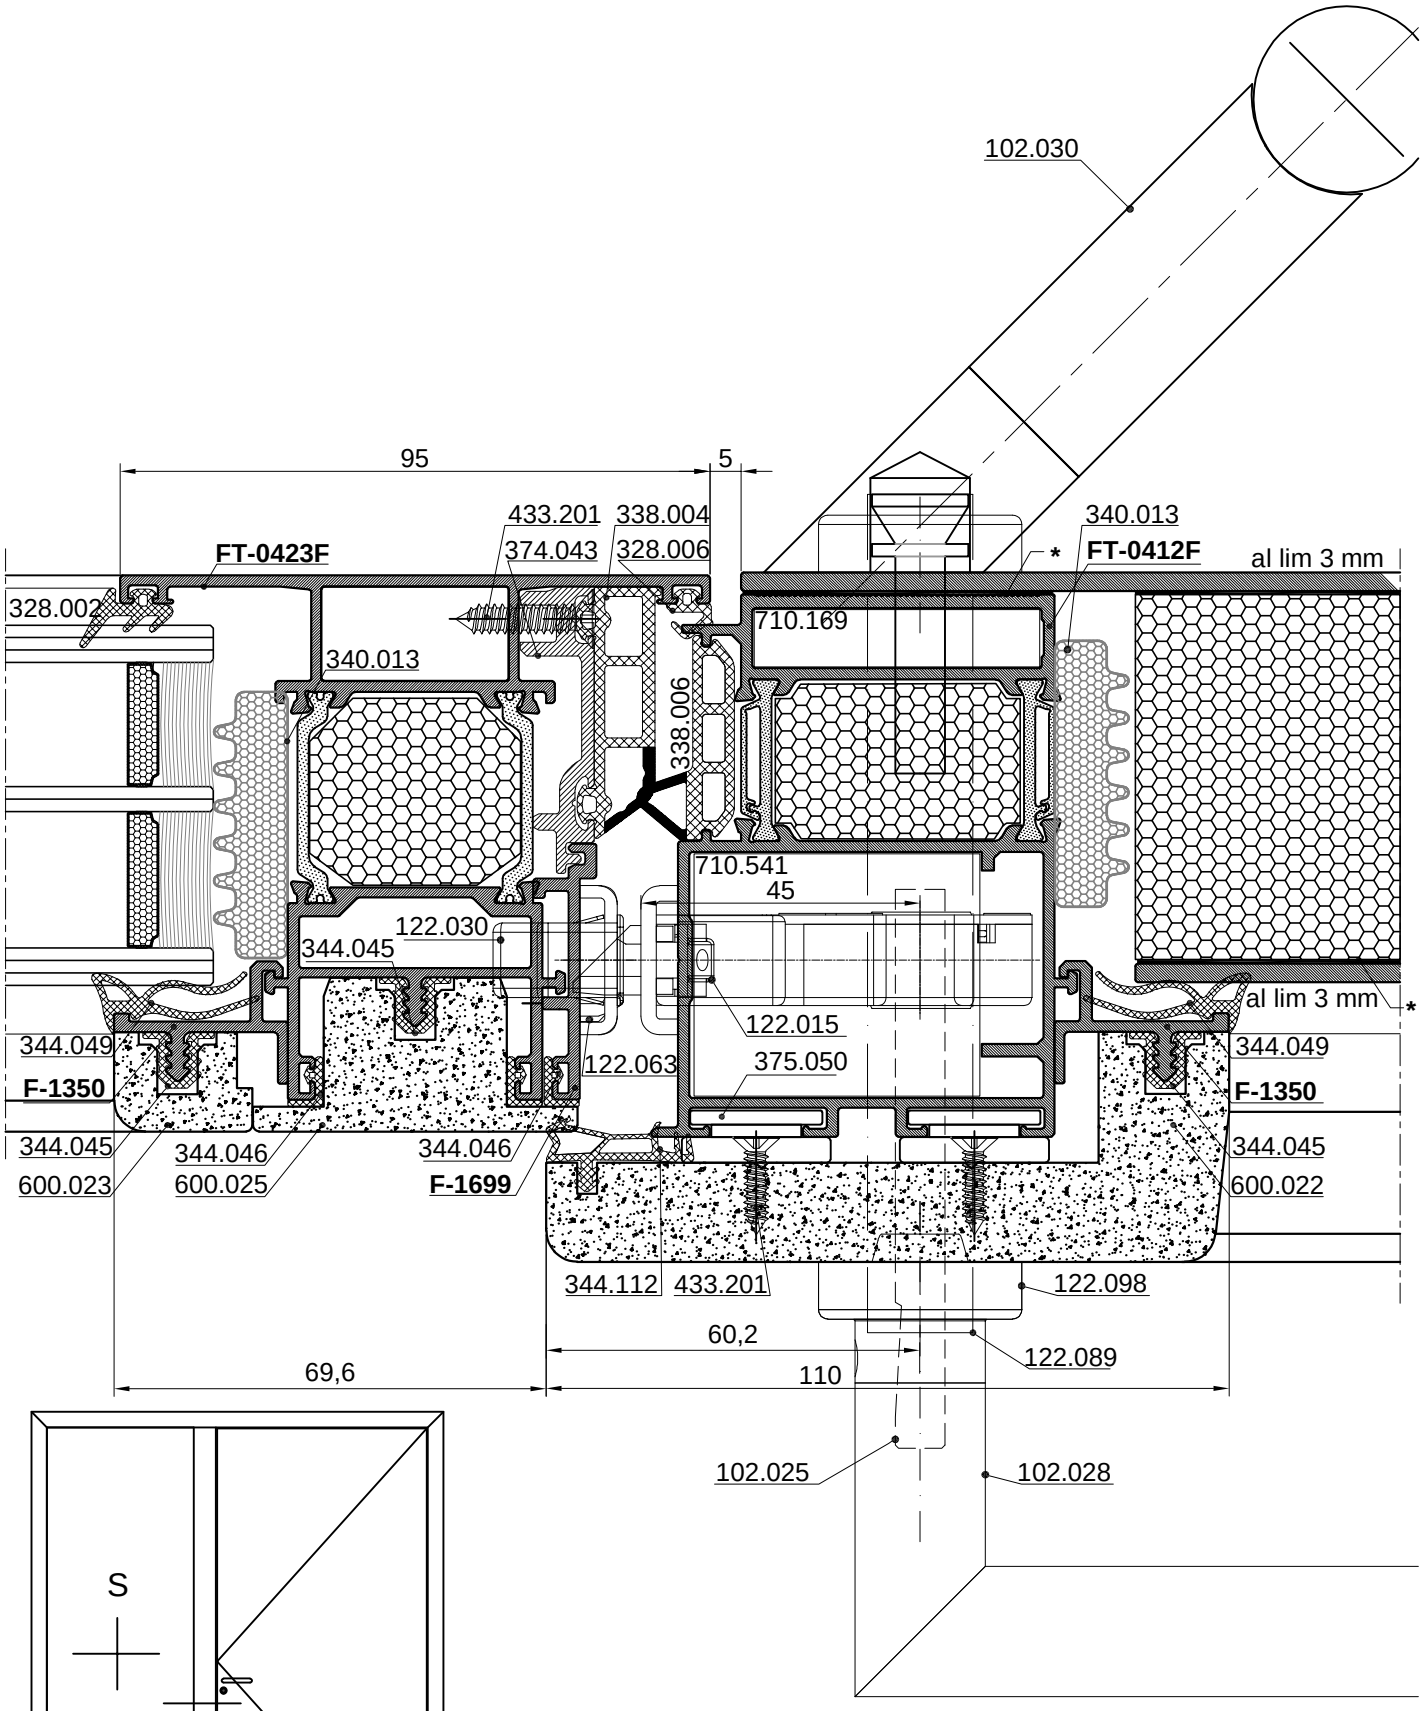



* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002
* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002

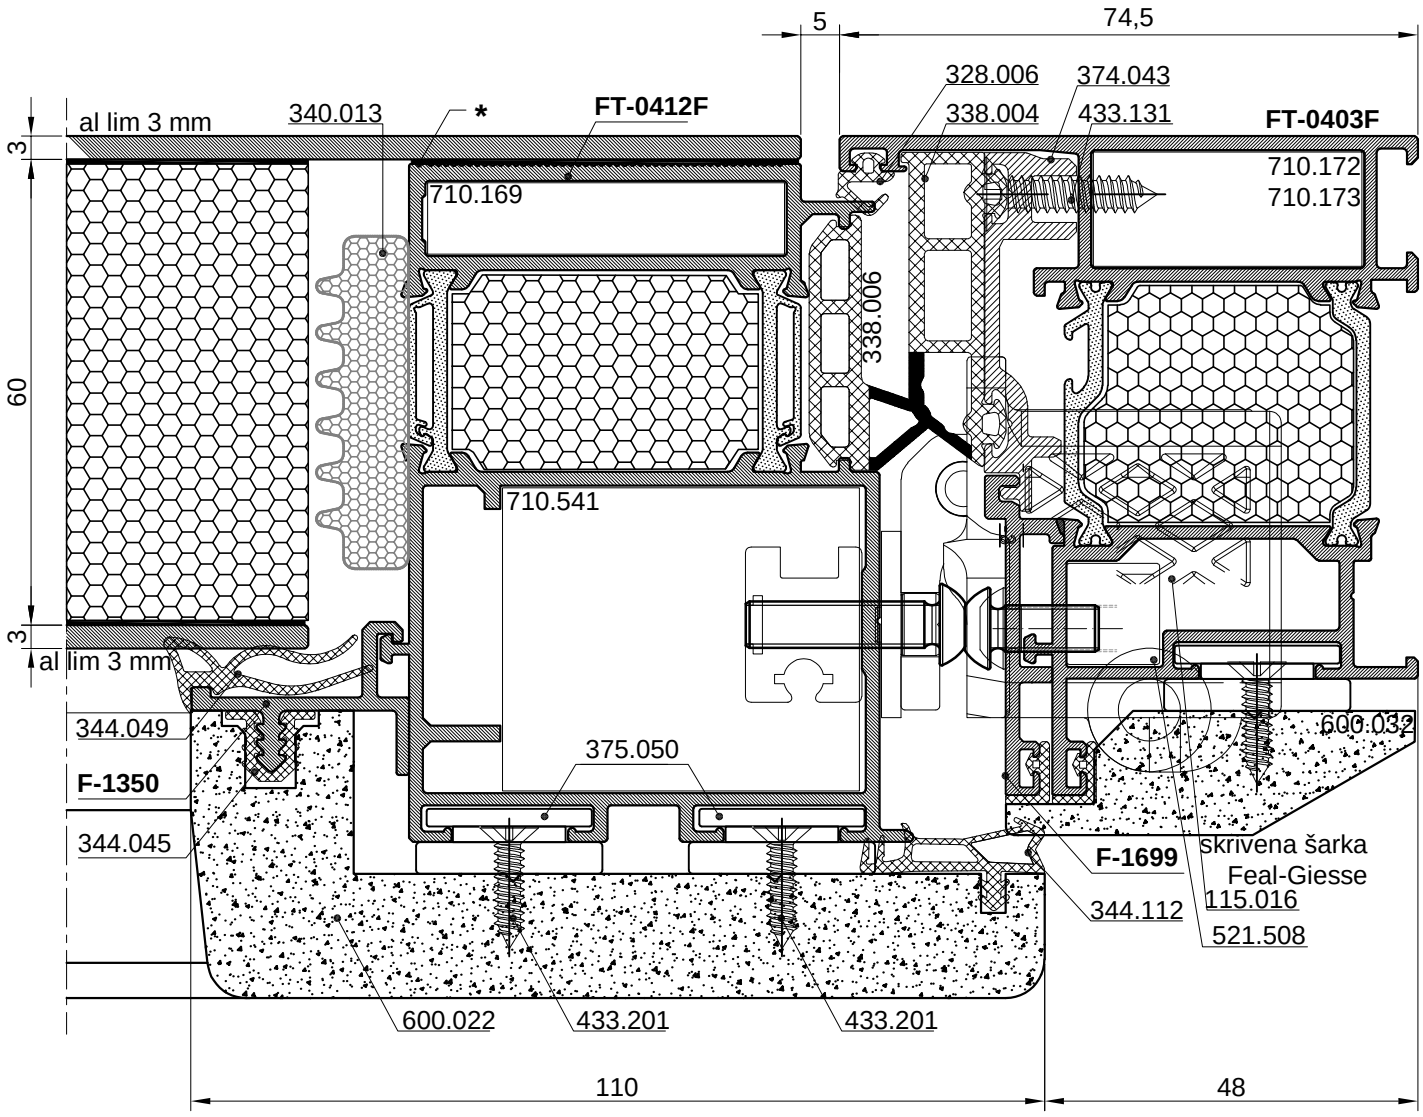

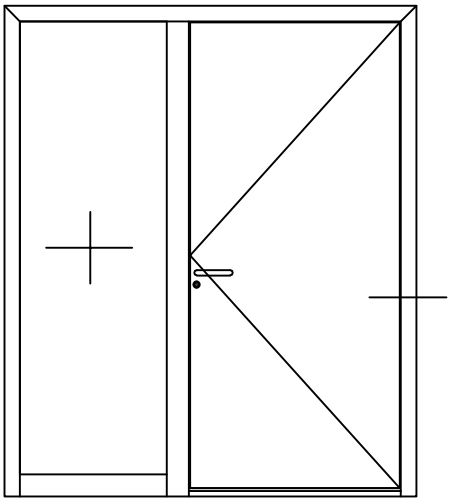



* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002
* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002

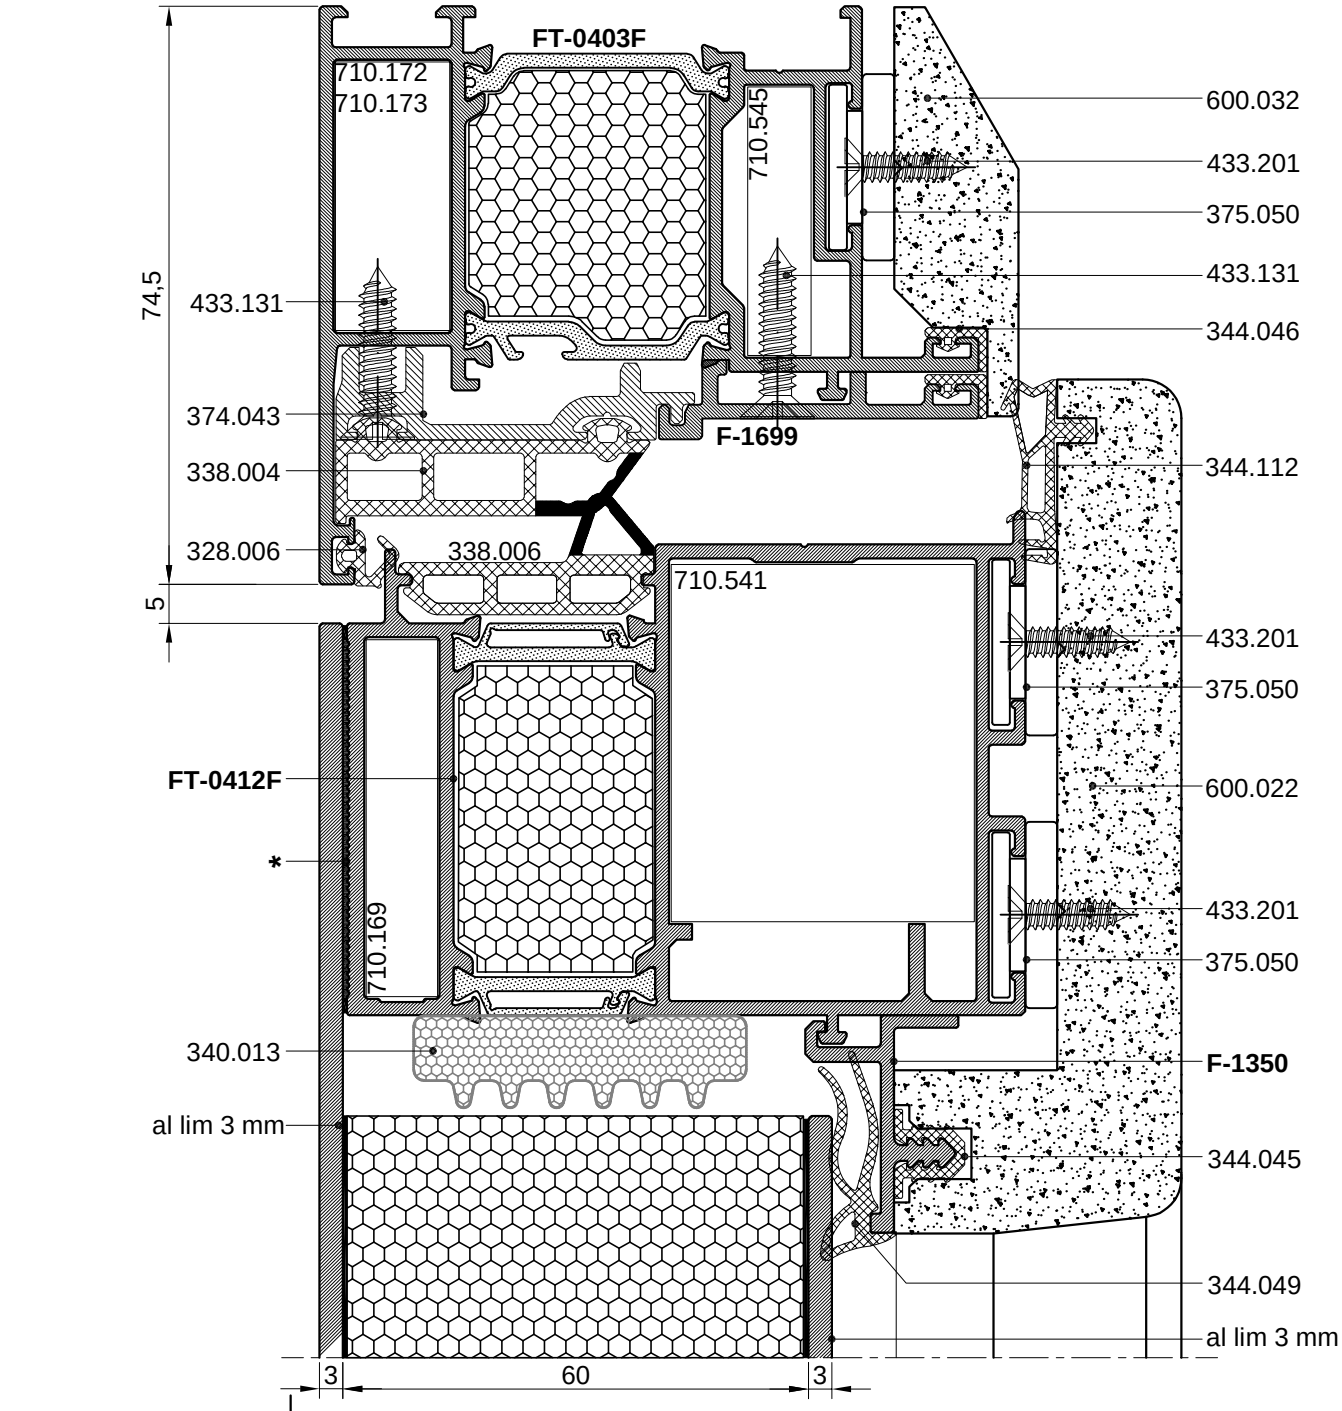


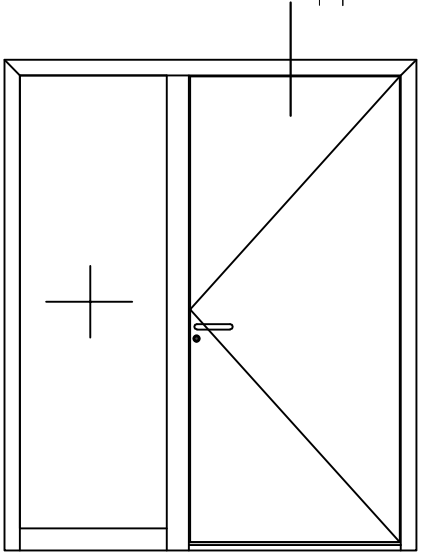


* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002
* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002

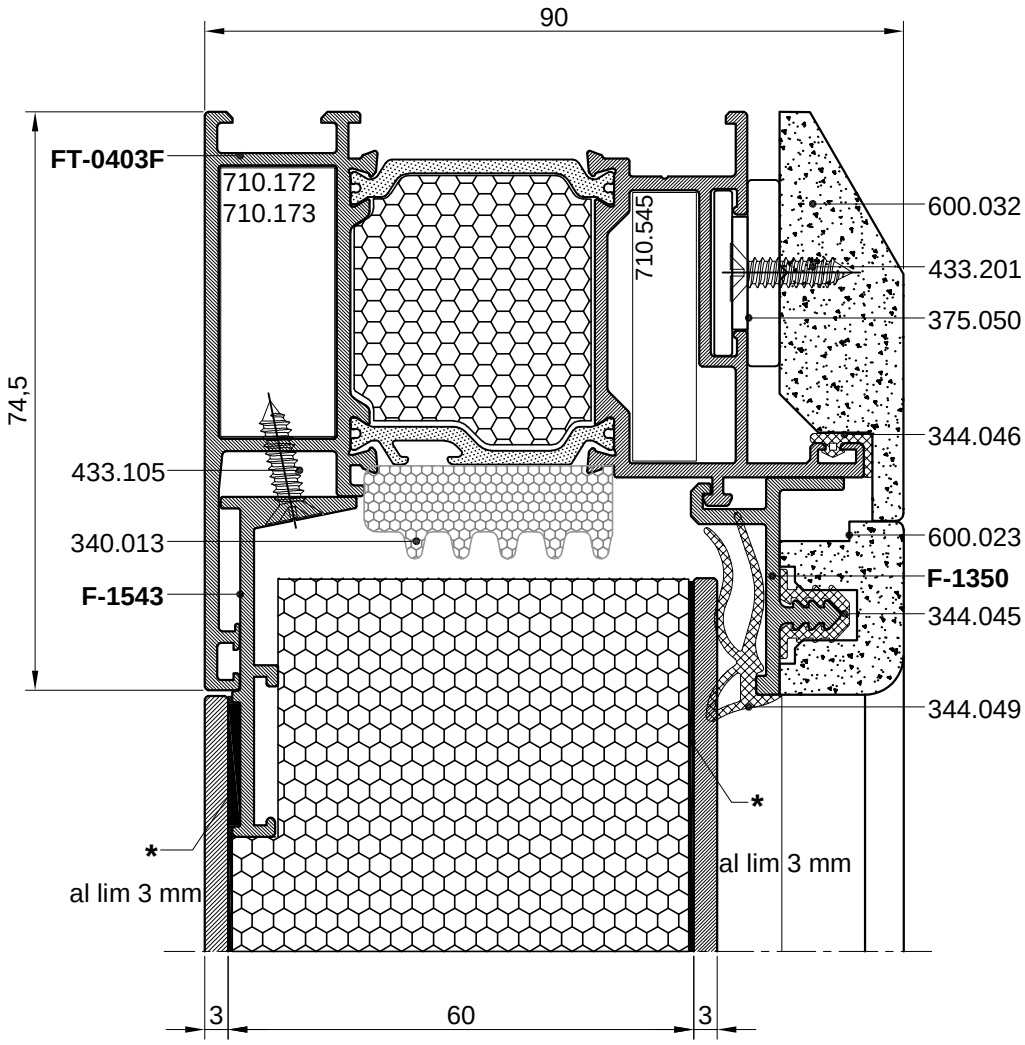


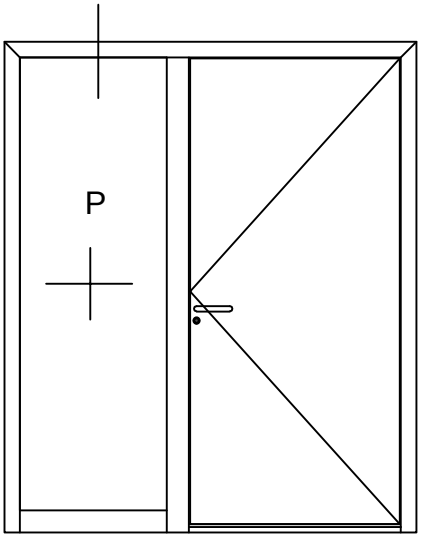


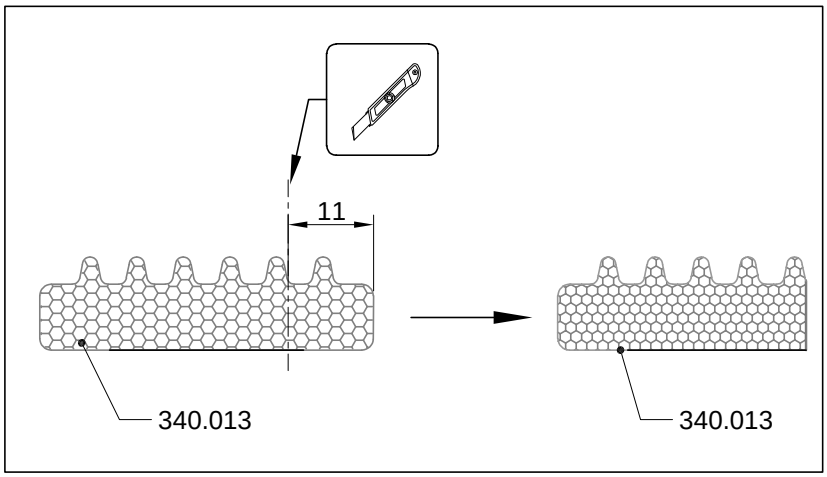



* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002
* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002

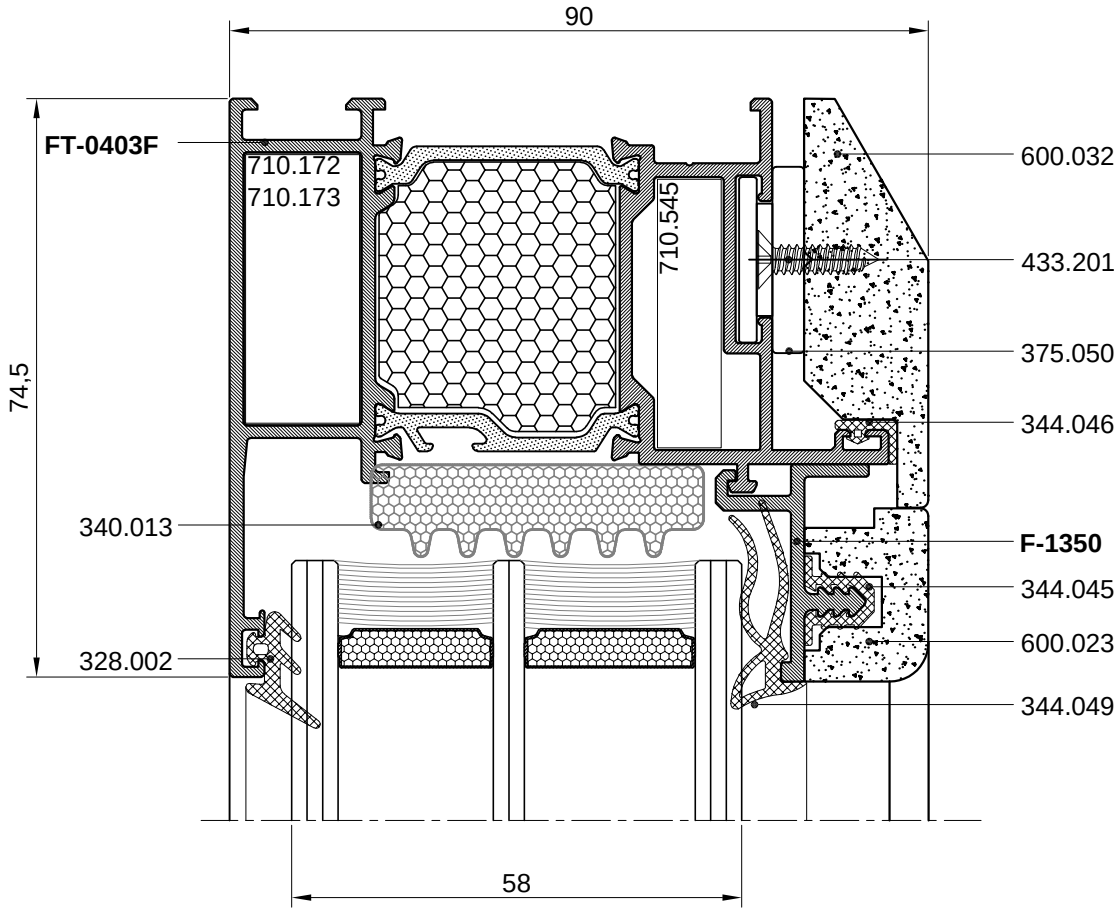
90
FT-0403F
710.172
710.173
710.545
600.032
433.201
375.050
344.046
74,5
340.013
F-1350
344.045
600.023
328.002
344.049
58

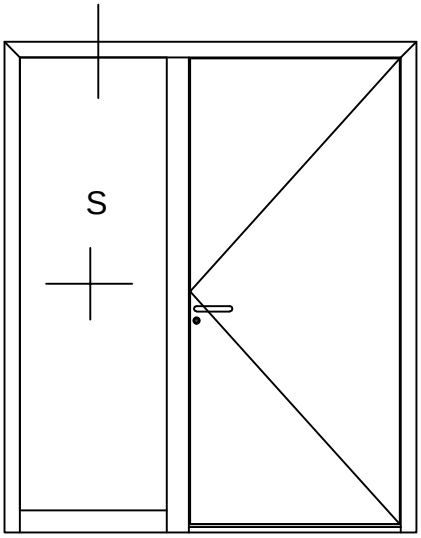

S

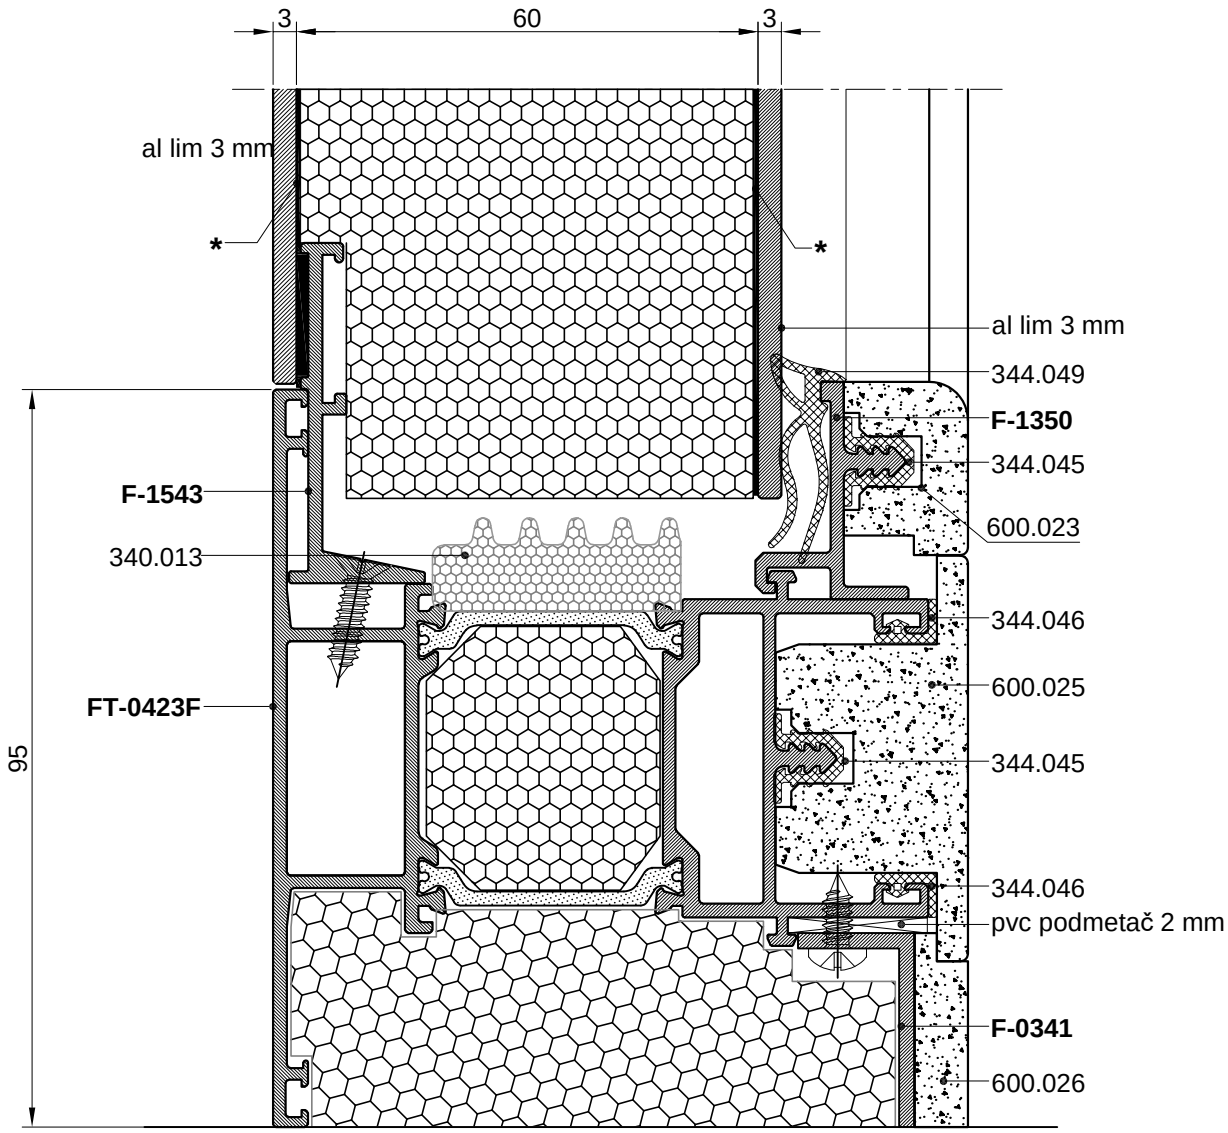


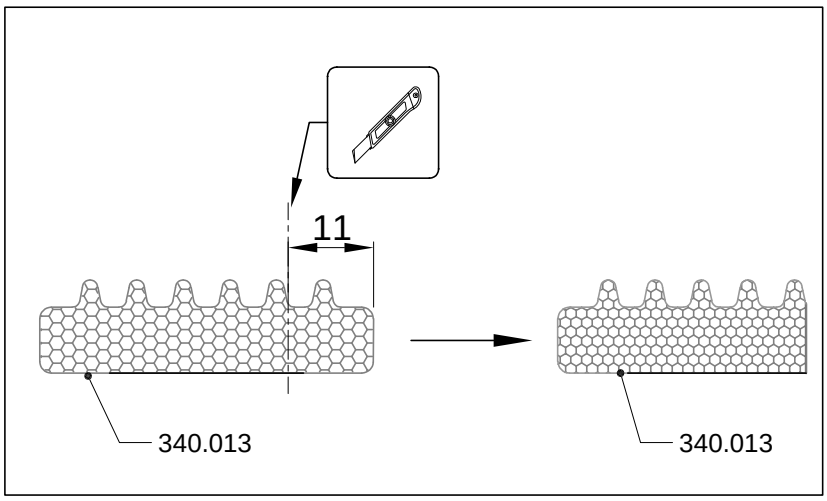

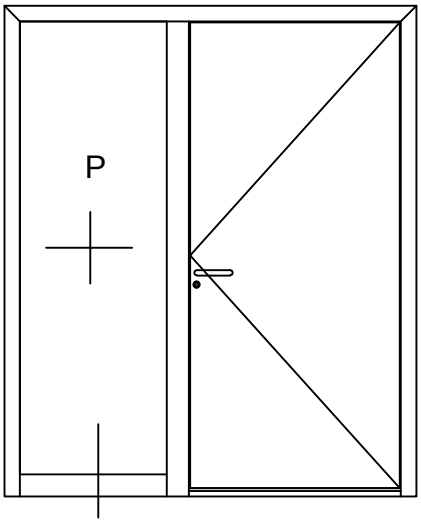



* Teroson VR 20 cleaner
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 adhesive-414.002
* Teroson VR 20 čistač
* Teroson PU 8519P primer-414.001
* Teroson MS 9399 ljepilo-414.002

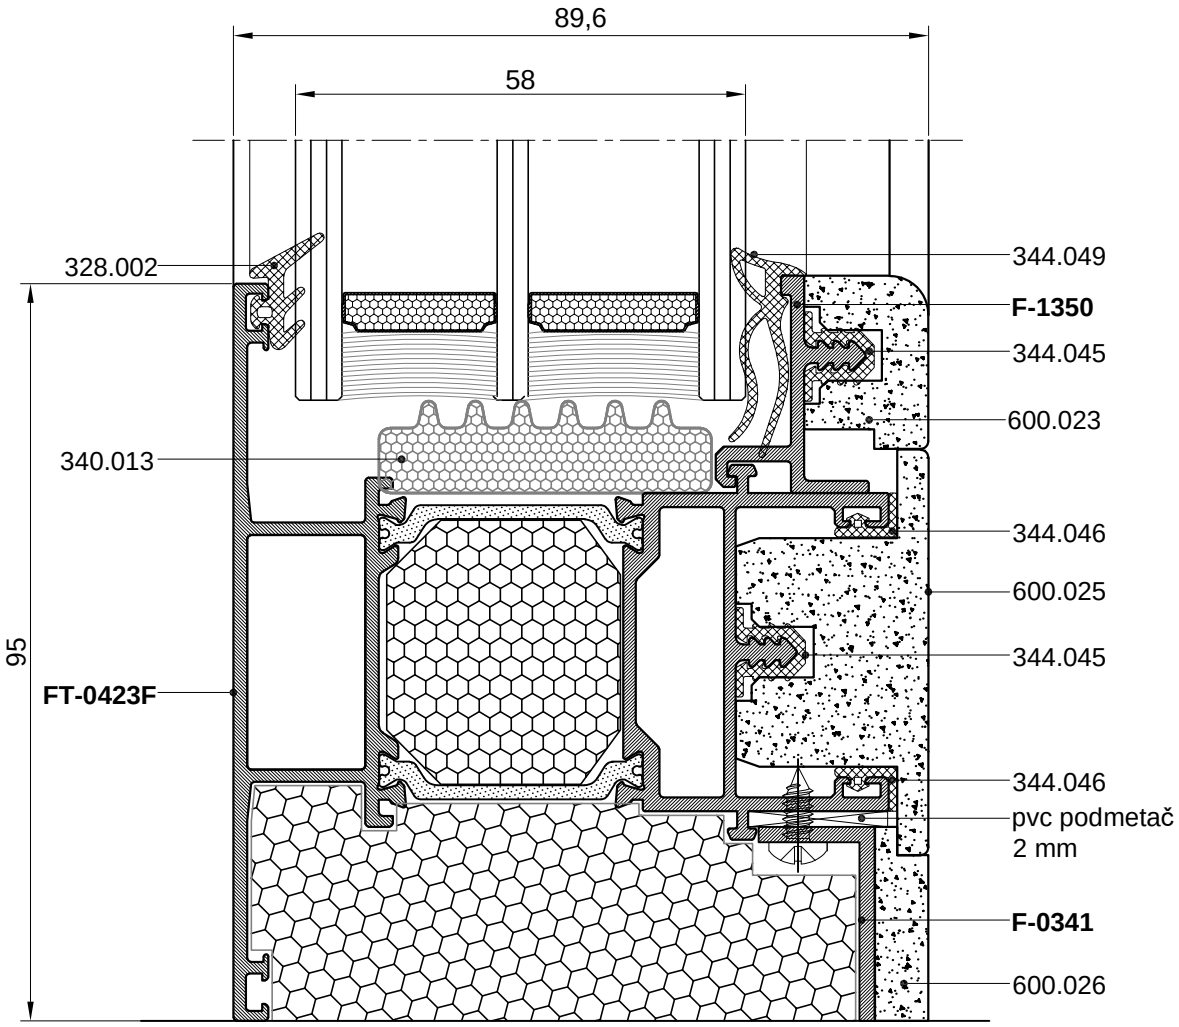
89,6
58
328.002
340.013
95
FT-0423F
344.049
F-1350
344.045
600.023
344.046
600.025
344.045
344.046
pvc podmetač
2 mm
F-0341
600.026

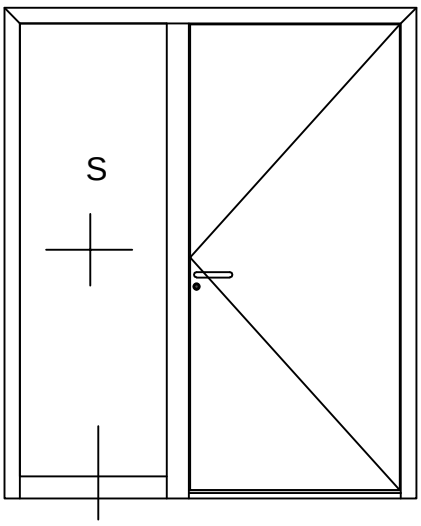

S


ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

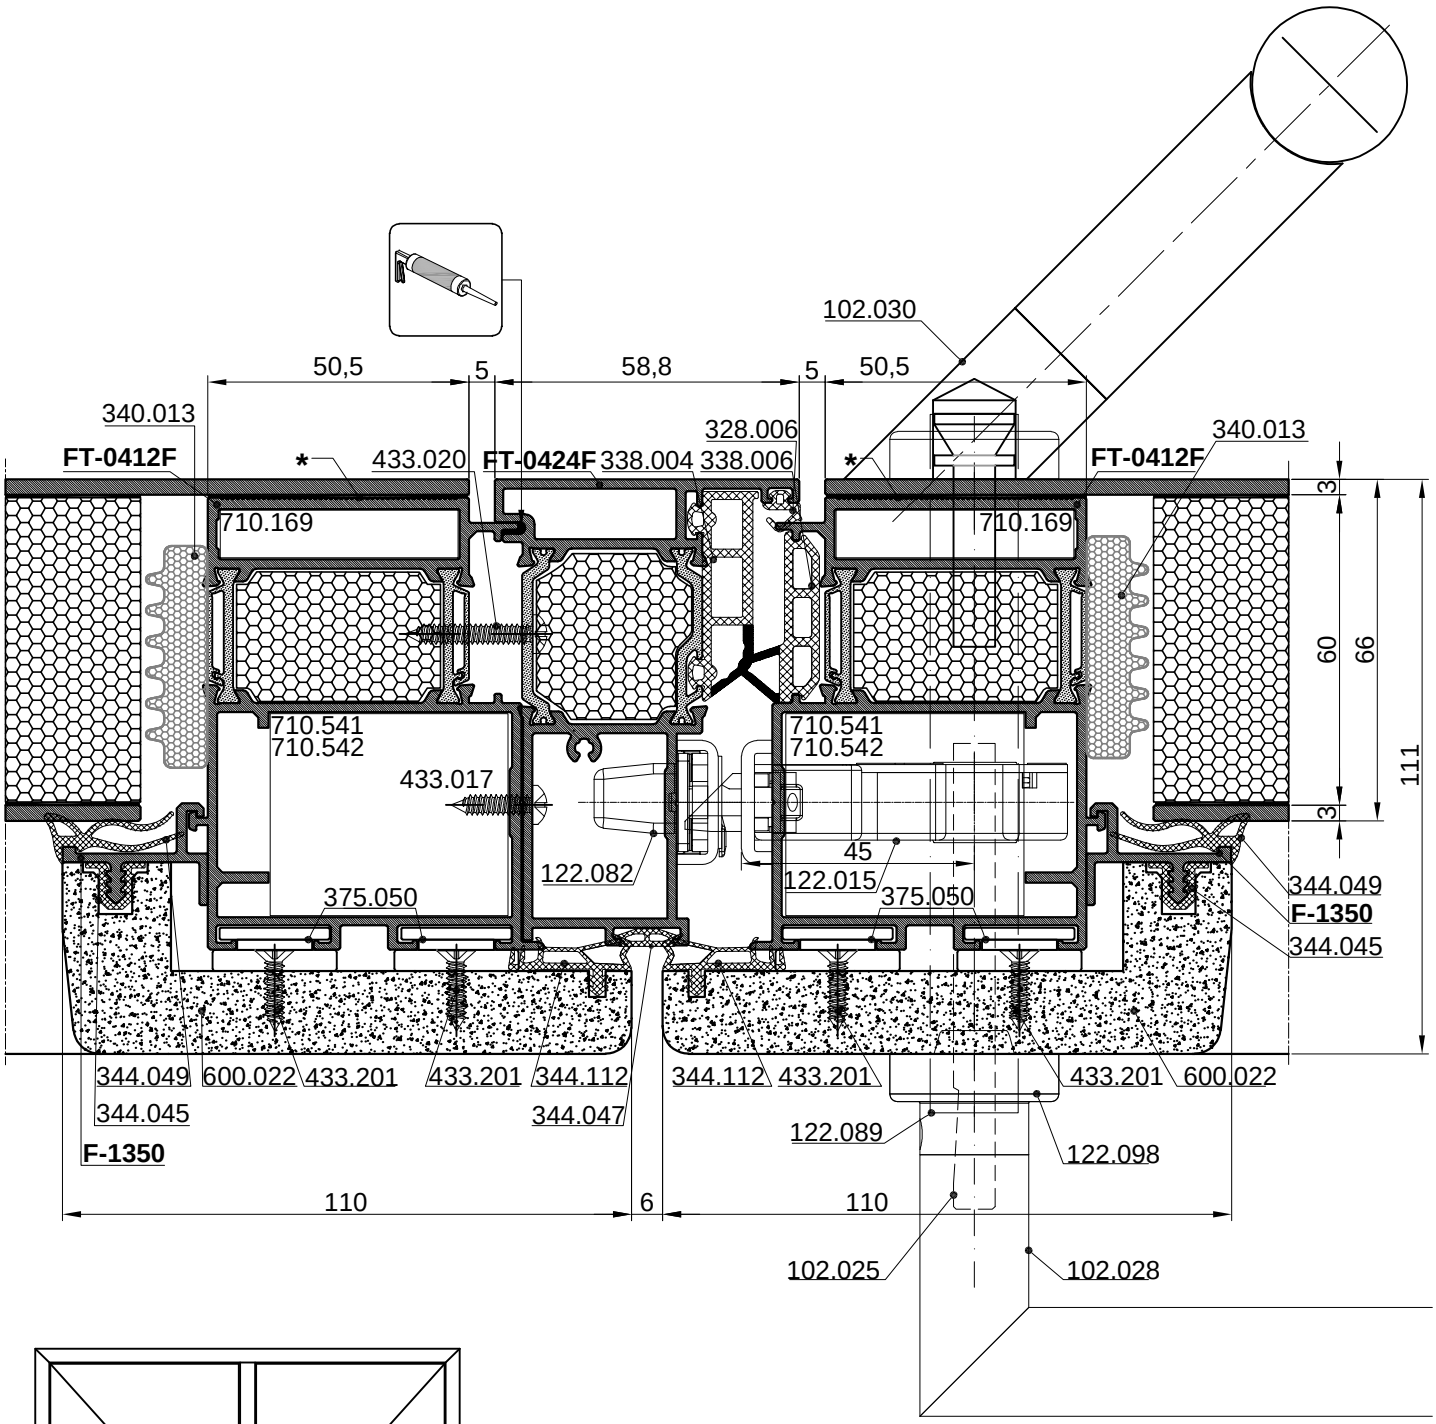


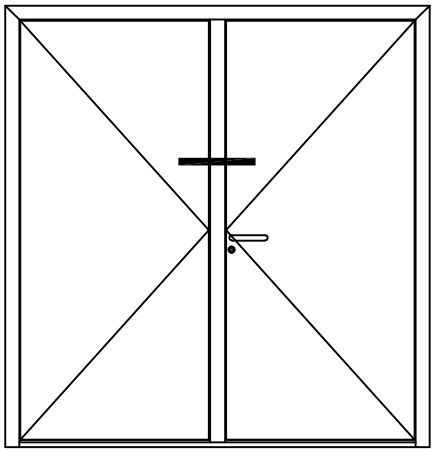



*Teroson VR 20 cleaner
*Teroson PU 8519P primer-414.001
*Teroson MS 9399 adhesive-414.002
*Teroson VR 20 čistač
*Teroson PU 8519P primer-414.001
*Teroson MS 9399 ljepilo-414.002

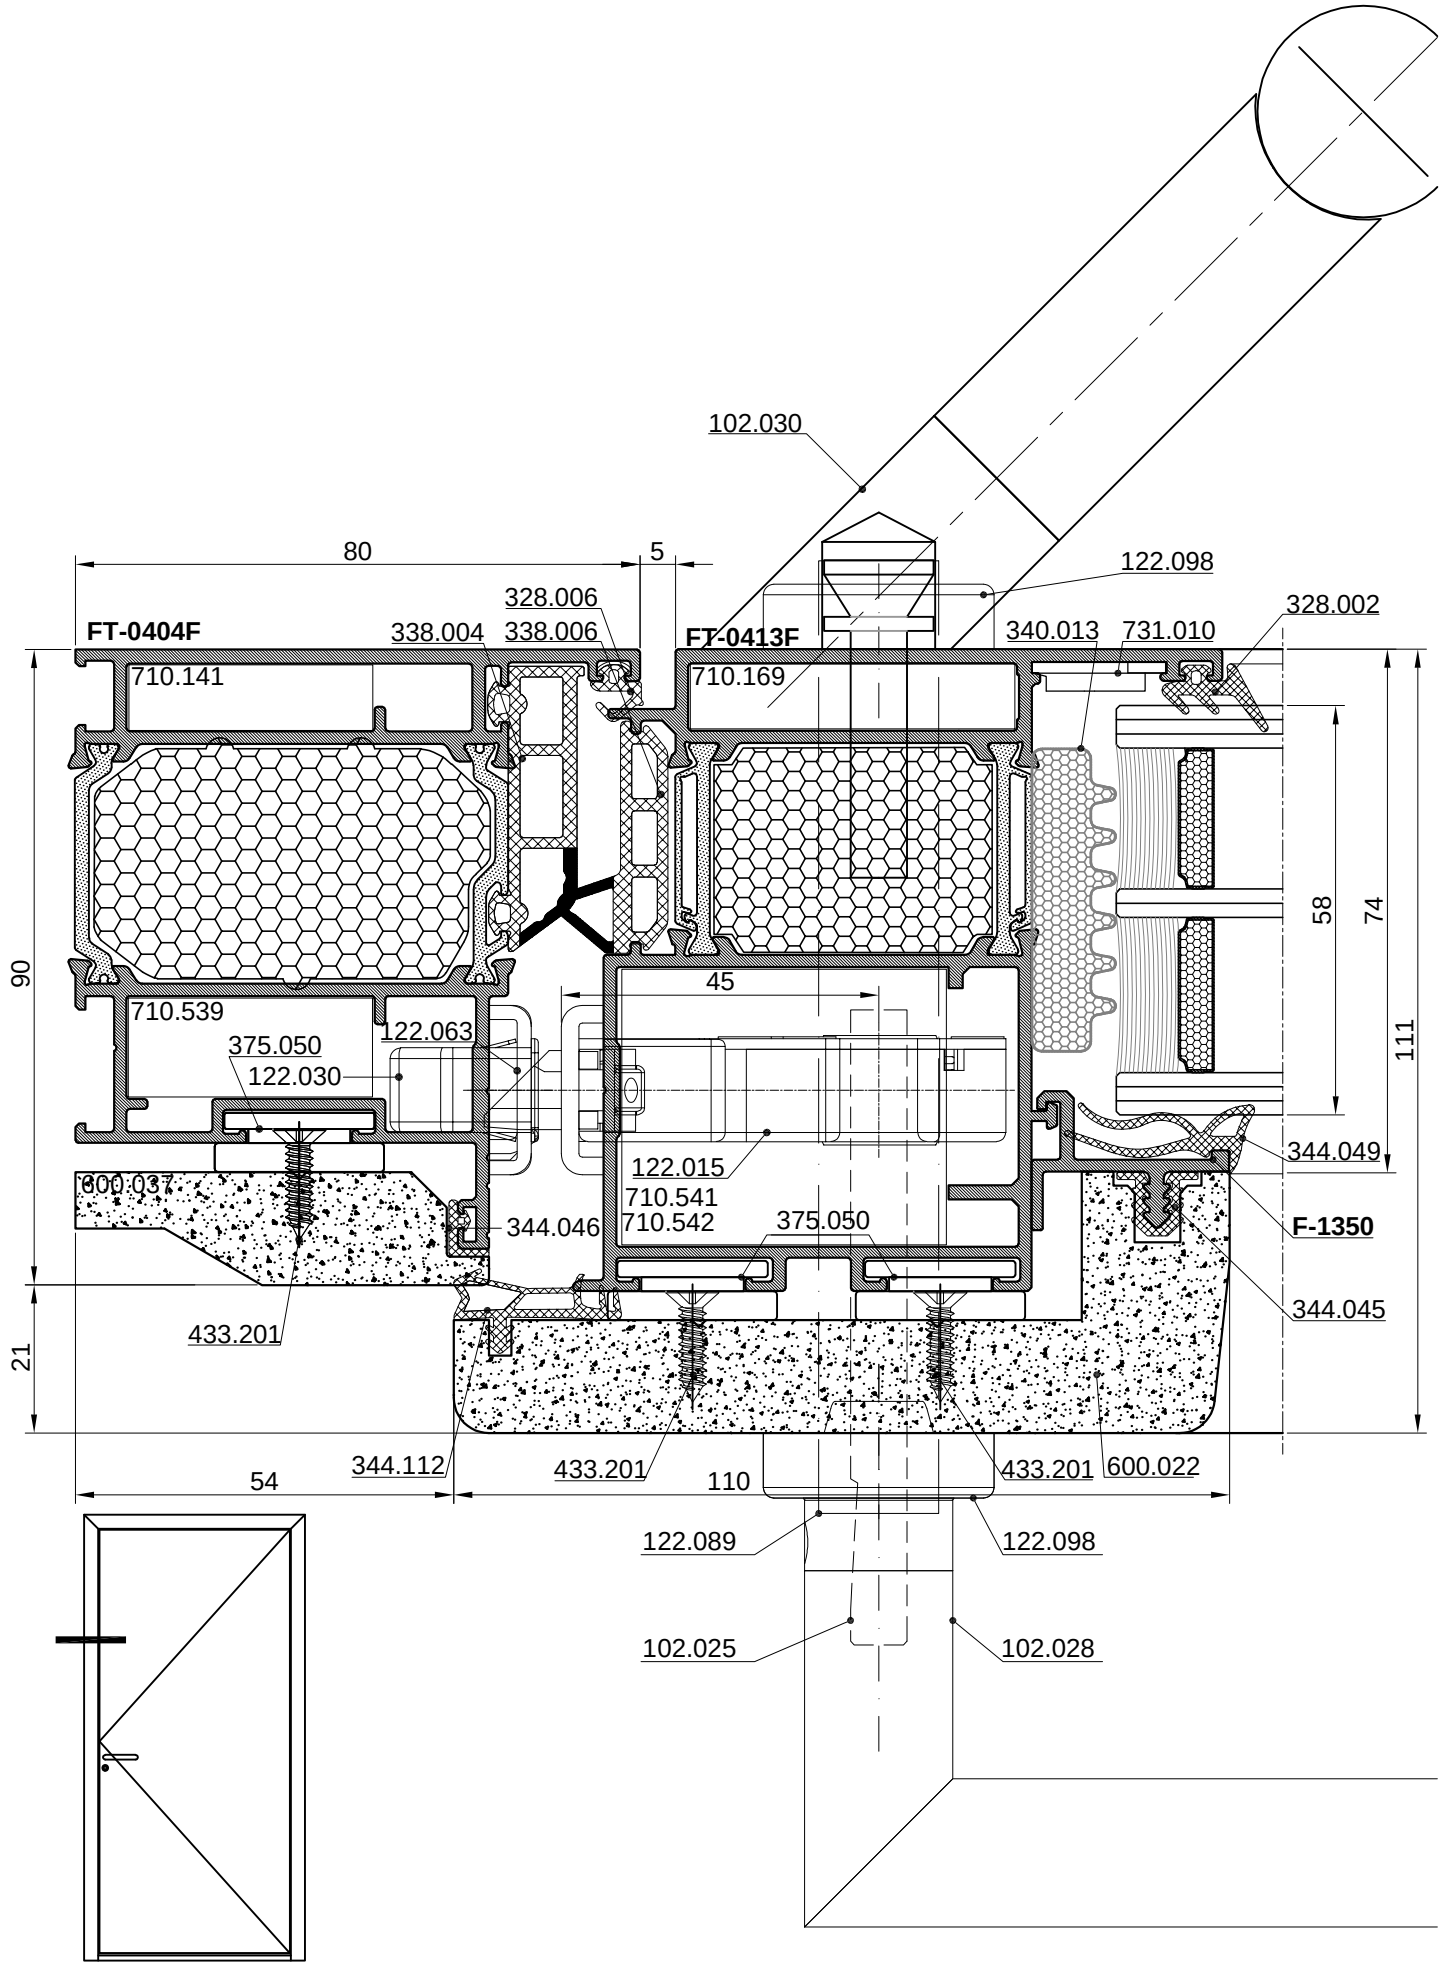

102.030
80
5
122.098
328.006
328.002
FT-0404F
338.004
338.006
FT-0413F
340.013
731.010
710.141
710.169
90
58
74
111
45
710.539
122.063
375.050
122.030
122.015
710.541
710.542
600.037
344.046
375.050
344.049
F-1350
344.045
433.201
21
344.112
433.201
433.201
600.022
54
110
122.089
122.098
102.025
102.028

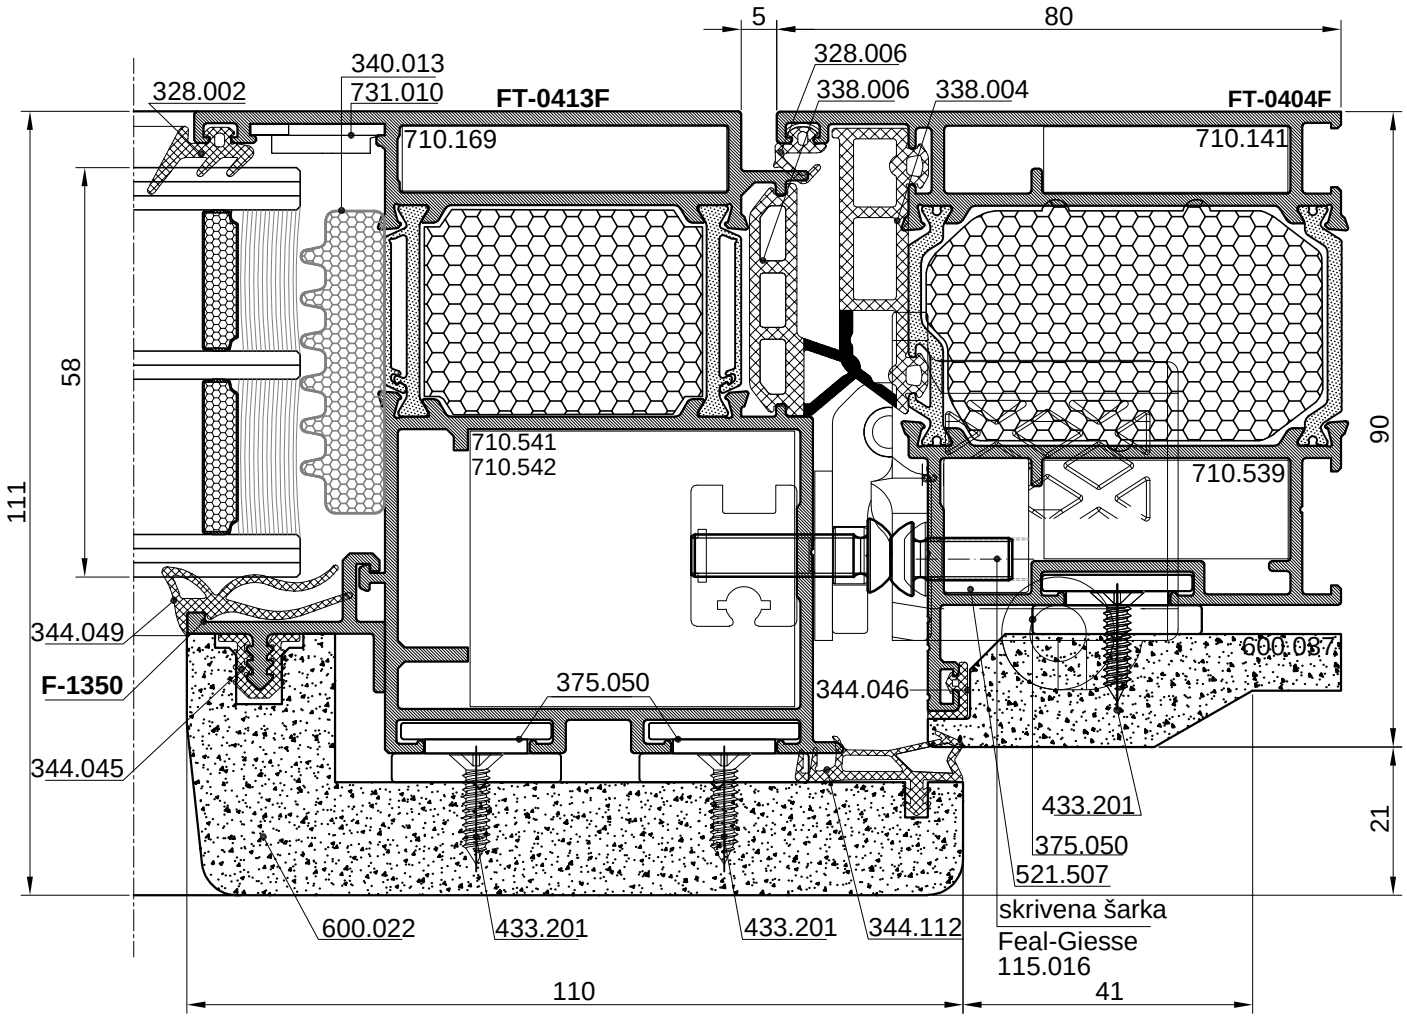

5
80
328.006
340.013
731.010
328.002
FT-0413F
338.006
338.004
FT-0404F
710.169
710.141
58
111
90
710.541
710.542
710.539
344.049
F-1350
344.045
375.050
344.046
600.087
433.201
375.050
521.507
21
skrivena šarka
Feal-Giesse
115.016
600.022
433.201
433.201
344.112
110
41

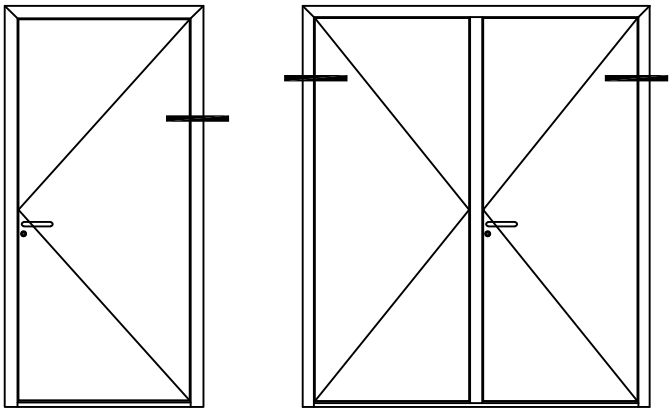

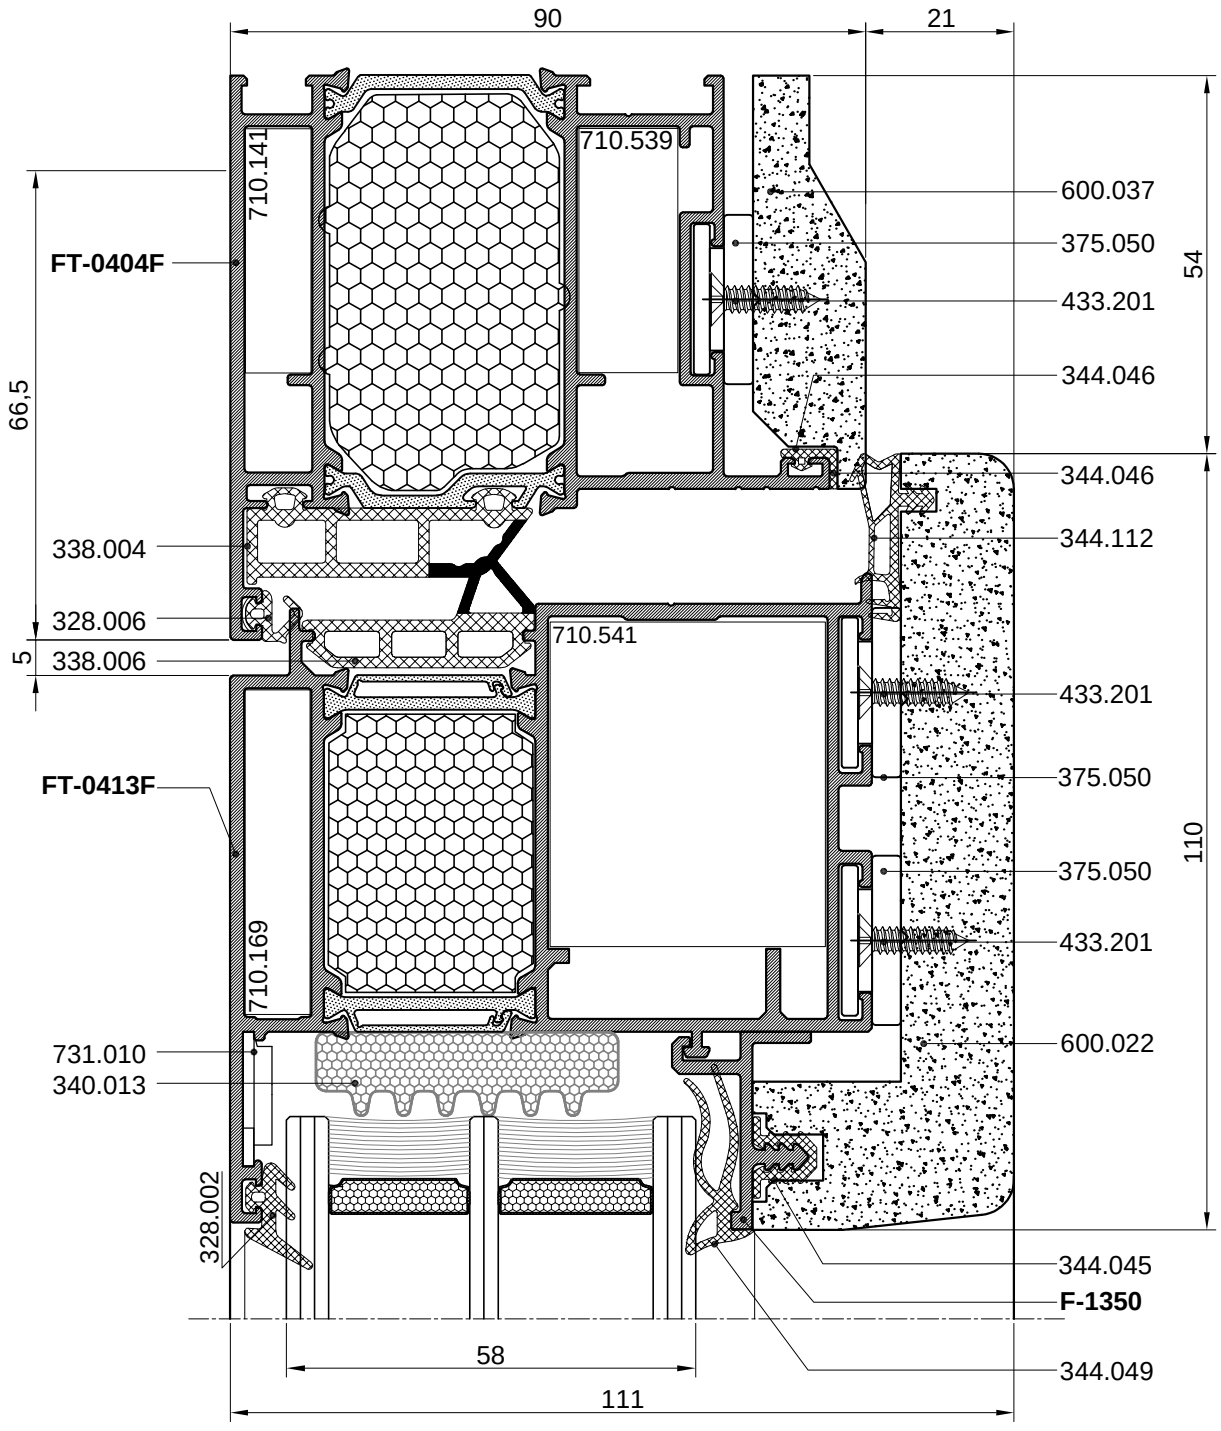
90
21
710.141
710.539
FT-0404F
66,5
600.037
375.050
433.201
344.046
54
344.046
338.004
344.112
328.006
710.541
5
338.006
433.201
FT-0413F
375.050
110
375.050
710.169
433.201
731.010
600.022
340.013
328.002
344.045
F-1350
58
344.049
111

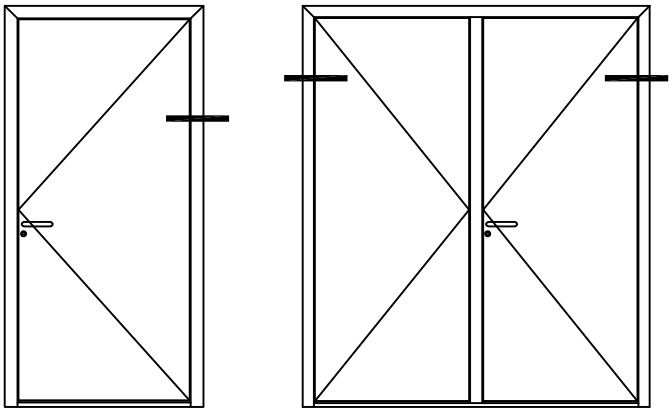


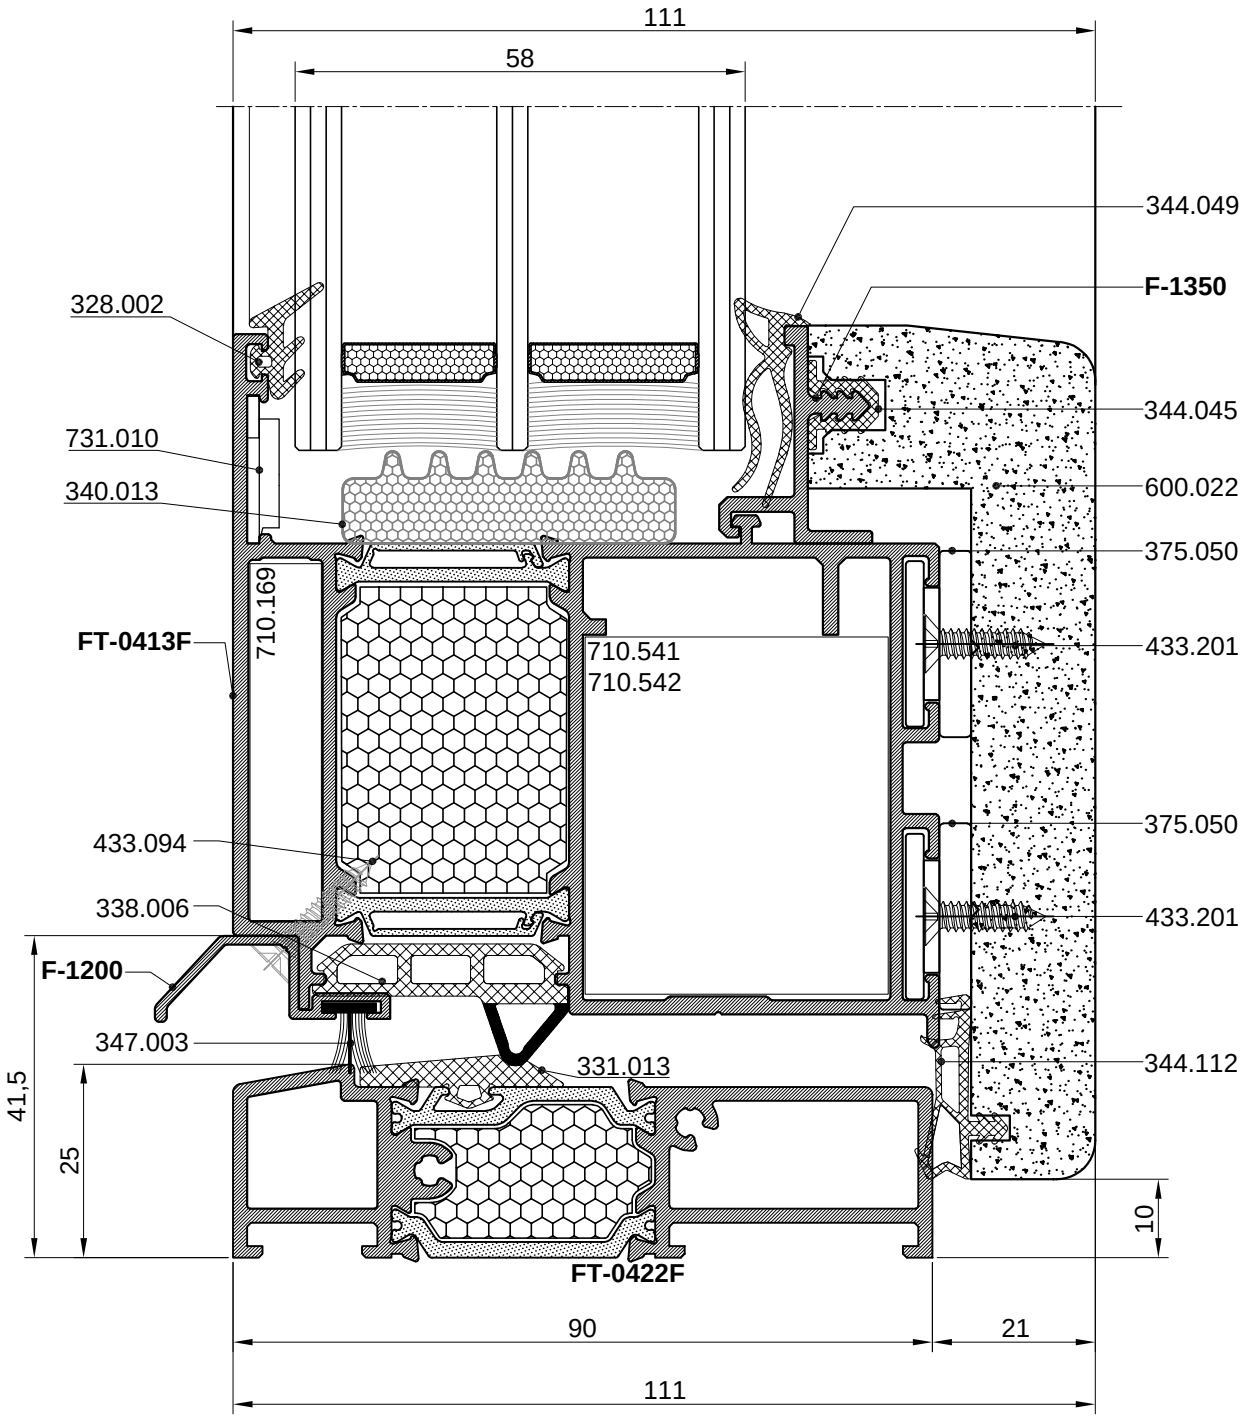

111
58
344.049
F-1350
328.002
344.045
731.010
600.022
340.013
375.050
710.169
FT-0413F
710.541
710.542
433.201
375.050
433.094
338.006
433.201
F-1200
347.003
331.013
344.112
41,5
25
10
FT-0422F
90
21
111

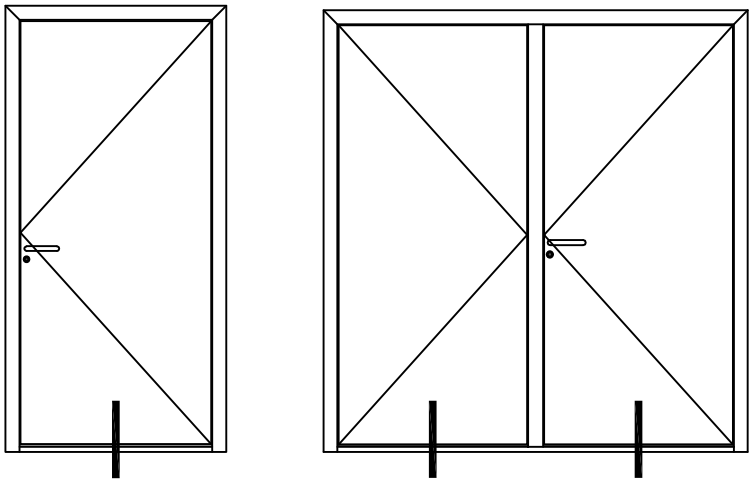





ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

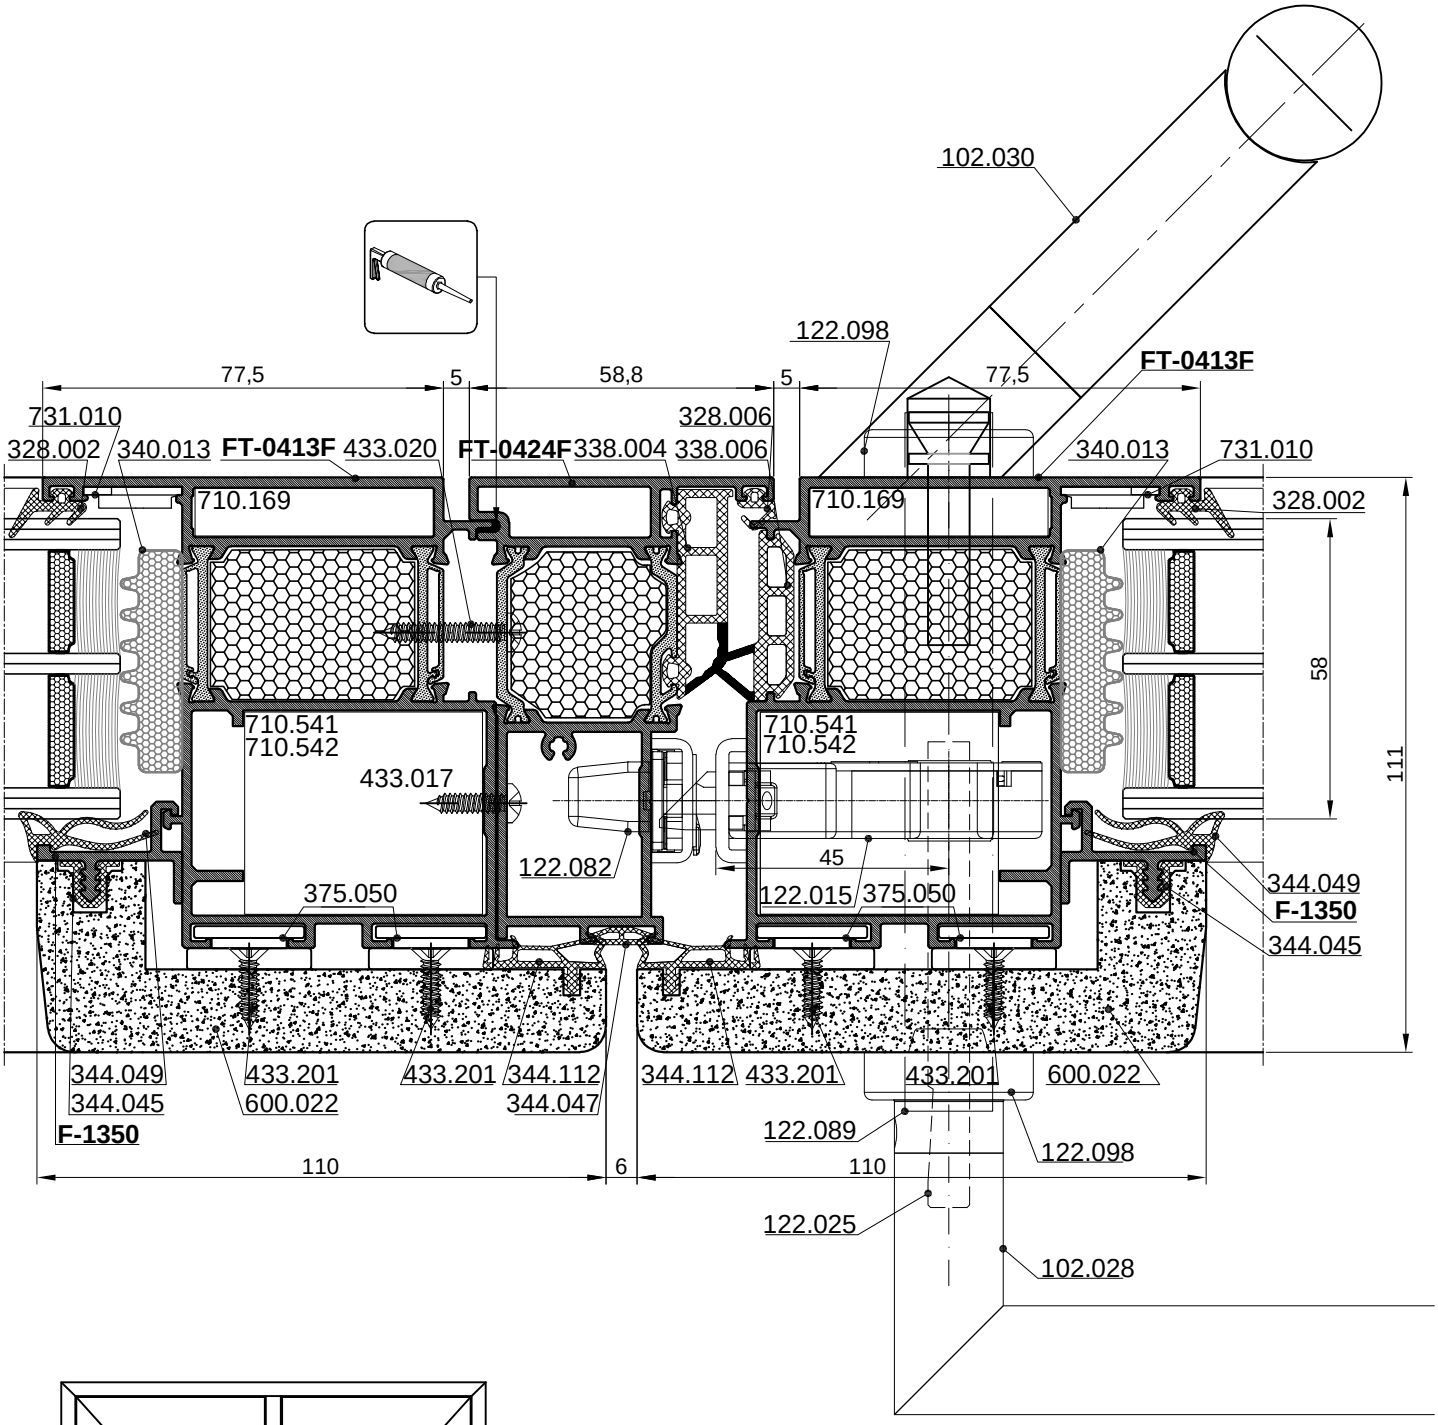


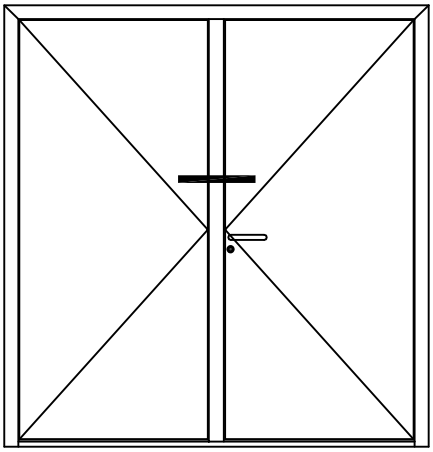



Presjeci-dvoslojno staklo
Cross sections-double glazing




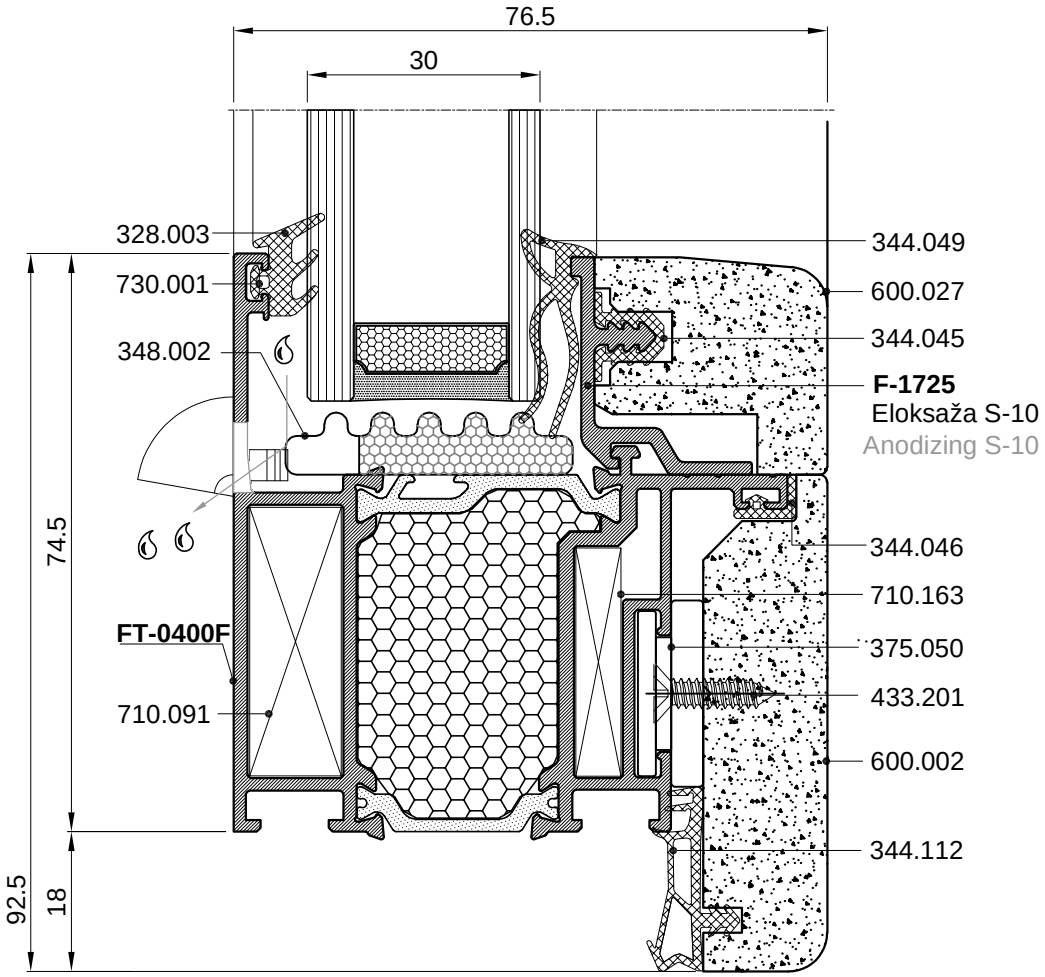
76.5
30
328.003
730.001
348.002
FT-0400F
710.091
74.5
92.5
18
344.049
600.027
344.045
F-1725
Eloksaža S-10
Anodizing S-10
344.046
710.163
375.050
433.201
600.002
344.112

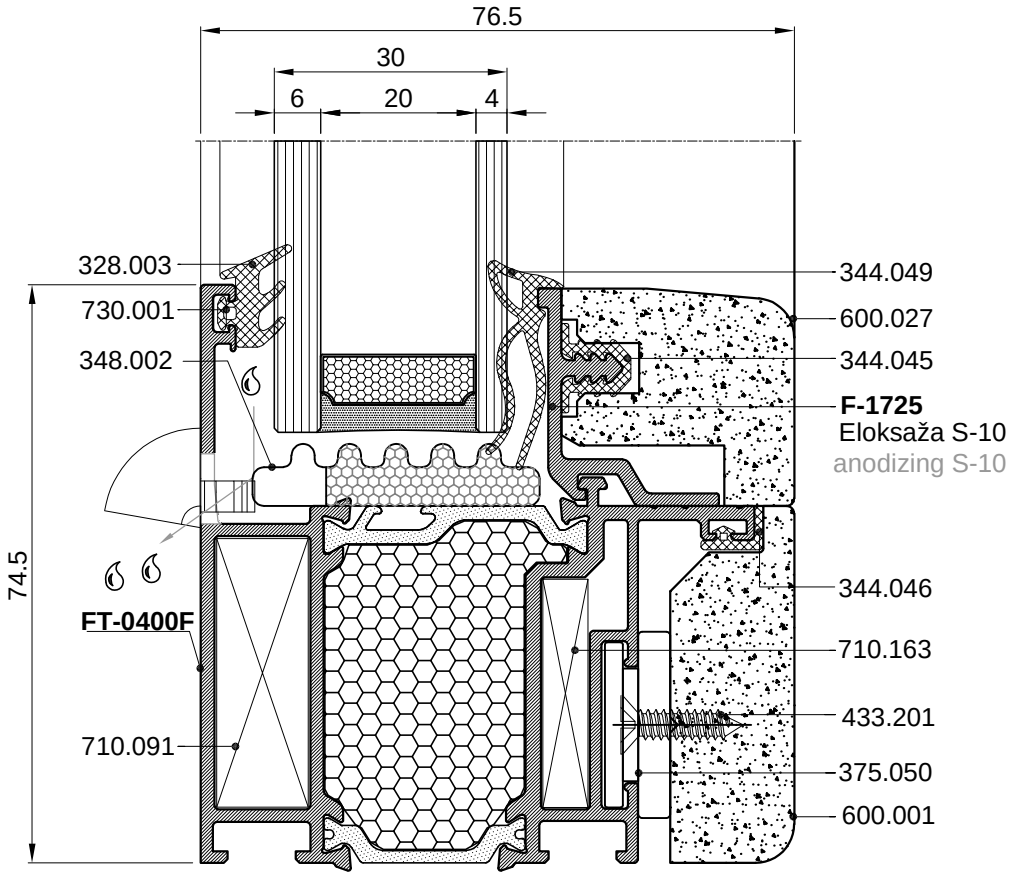
76.5
30
6
20
4
328.003
730.001
348.002
FT-0400F
710.091
74.5
344.049
600.027
344.045
F-1725
Eloksaža S-10
anodizing S-10
344.046
710.163
433.201
375.050
600.001

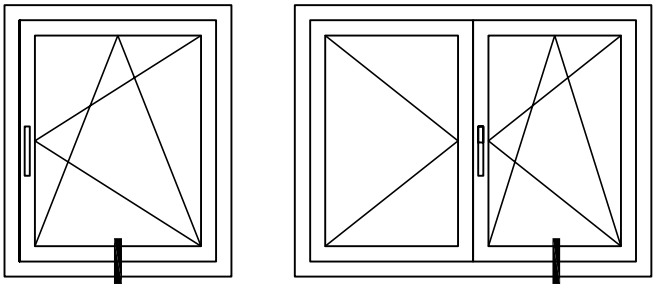


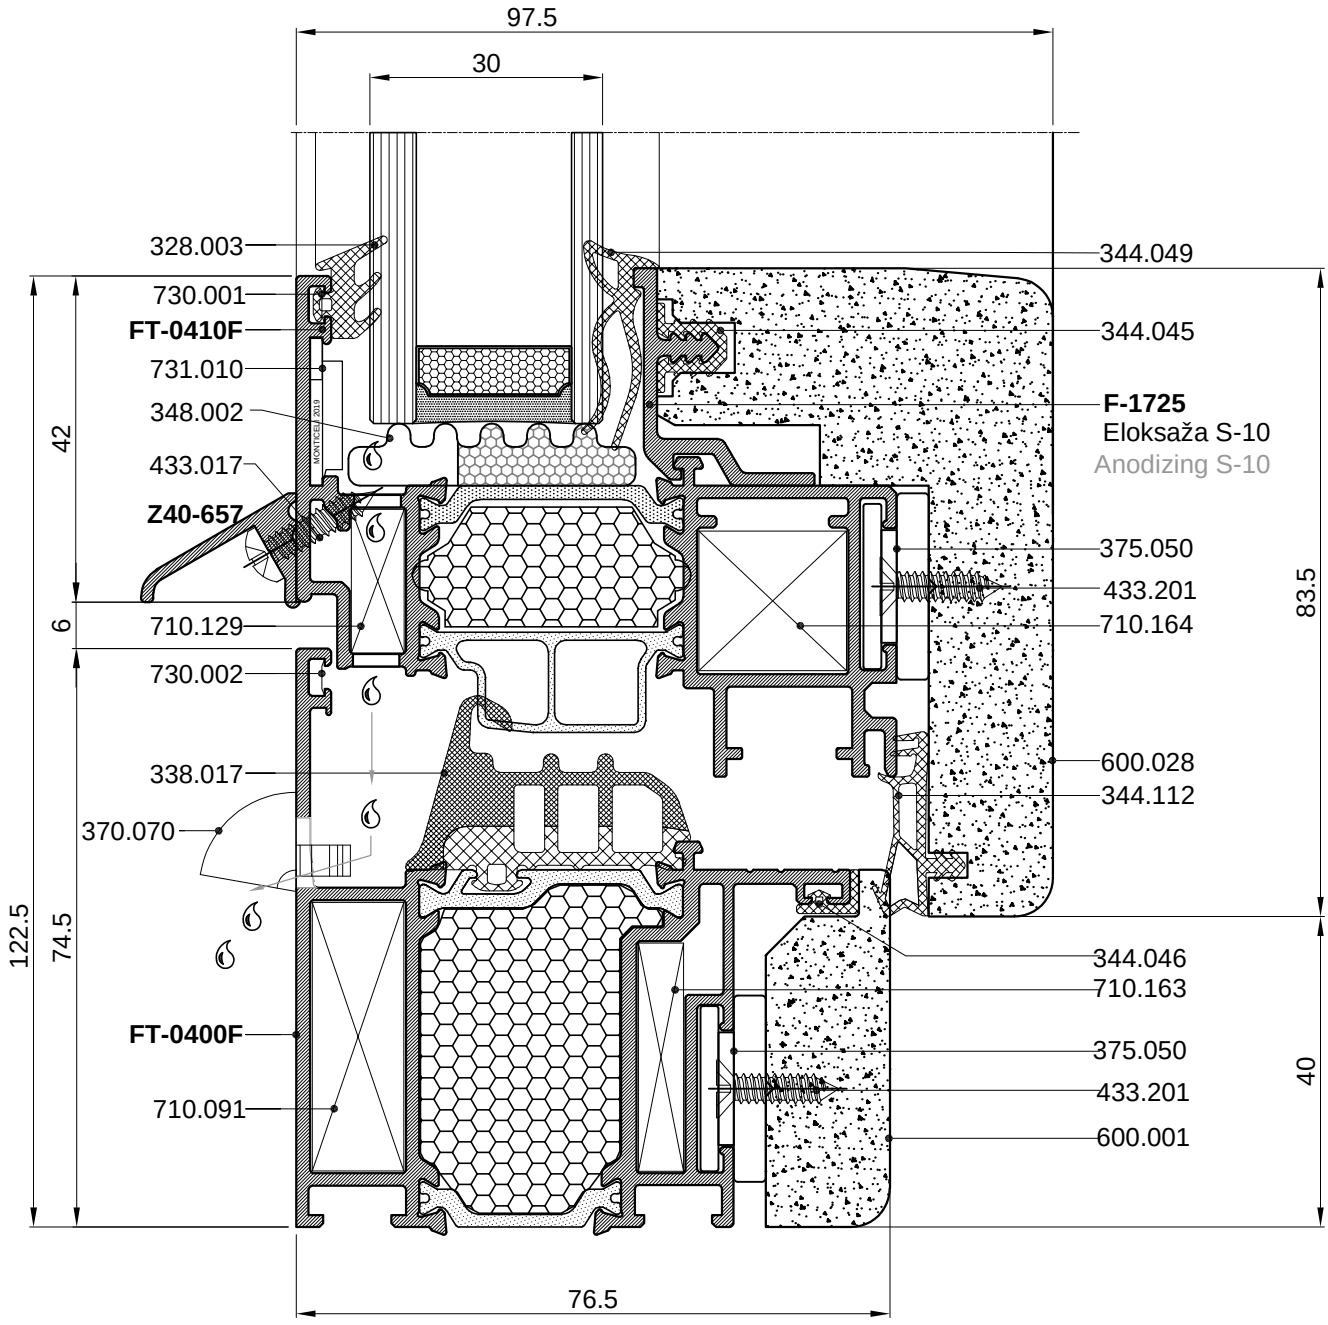

97.5
30
328.003
730.001
FT-0410F
731.010
348.002
433.017
Z40-657
710.129
730.002
338.017
370.070
FT-0400F
710.091
344.049
344.045
F-1725
Eloksaža S-10
Anodizing S-10
375.050
433.201
710.164
600.028
344.112
344.046
710.163
375.050
433.201
600.001
42
6
74.5
122.5
83.5
40
76.5





Izvod kapljevina iz profila pomoću cijevčice Monodrain 360.009
Water drainage using Monodrain pipe 360.009


Cijevčicu Monodrain 360.009 odsjeći u ravnini profila.
Monodrain pipe 360.009 should be cut off in the plane of the profile

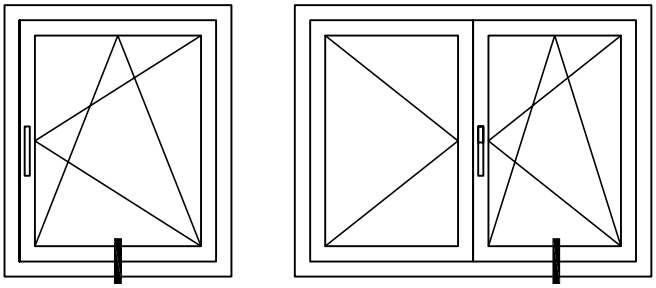

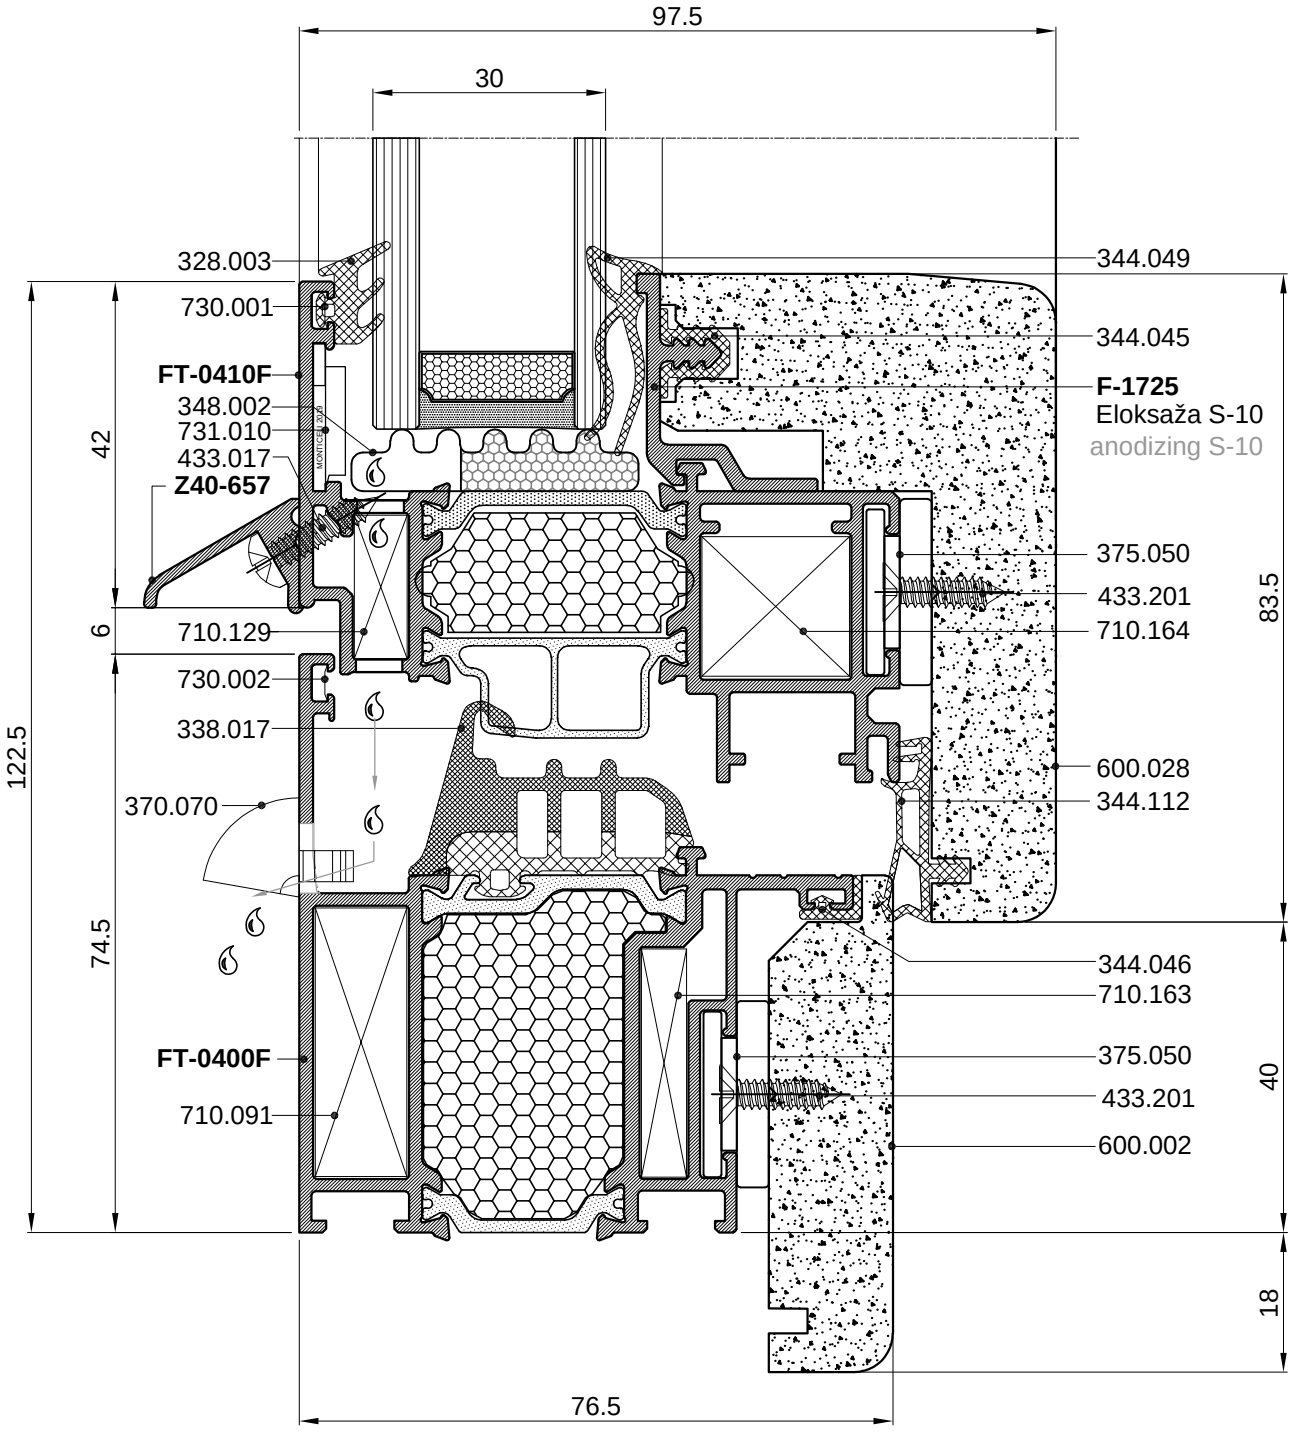
97.5
30
328.003
730.001
FT-0410F
348.002
731.010
433.017
Z40-657
42
6
710.129
730.002
338.017
370.070
74.5
122.5
FT-0400F
710.091
344.049
344.045
F-1725
Eloksaža S-10
anodizing S-10
375.050
433.201
710.164
83.5
600.028
344.112
344.046
710.163
375.050
433.201
600.002
40
18
76.5




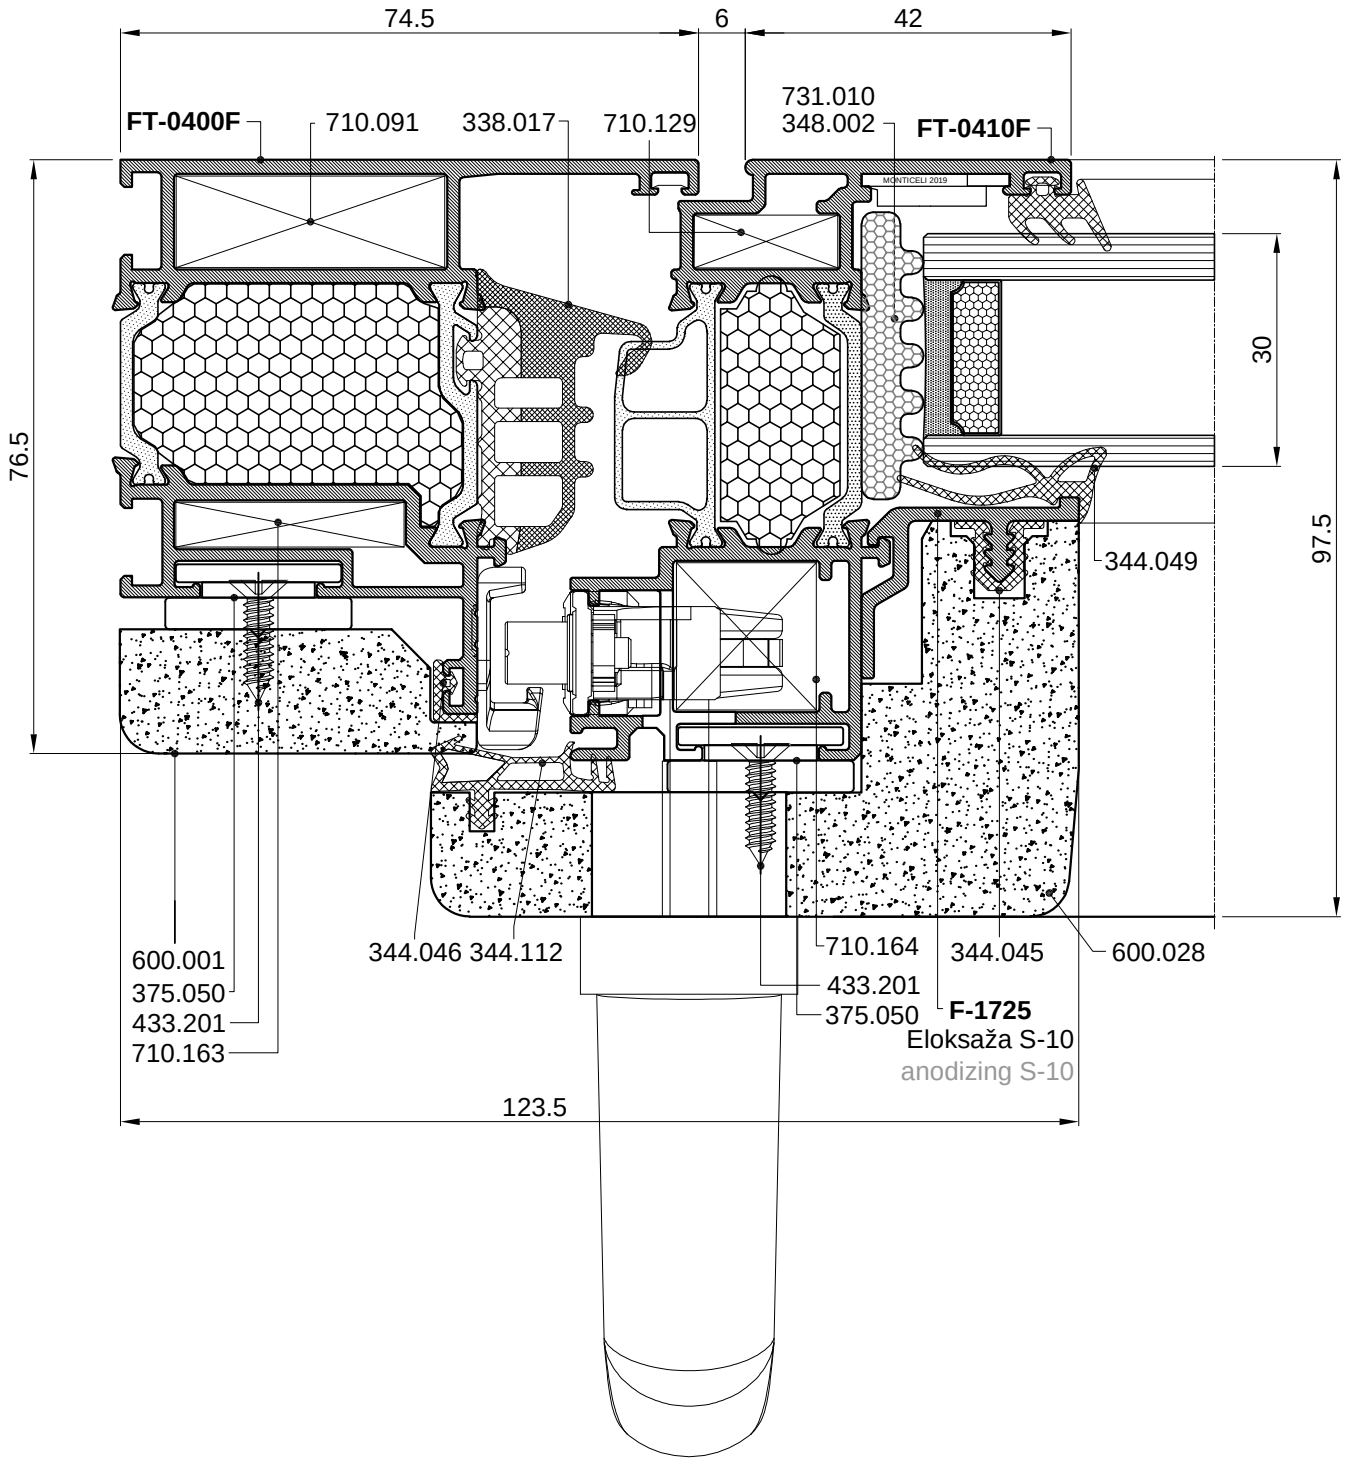

74.5
6
42
731.010
348.002
FT-0400F
710.091
338.017
710.129
FT-0410F
76.5
30
97.5
344.049
600.001
375.050
433.201
710.163
344.046 344.112
710.164
433.201
375.050
344.045
600.028
F-1725
Eloksaža S-10
anodizing S-10
123.5

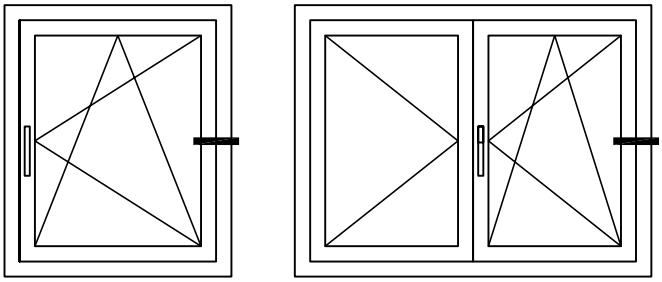


- Okov: Roto NT - Designo
- Sistem: 12/18 - 13

- Hardware: Roto NT - Designo
- System: 12/18 - 13

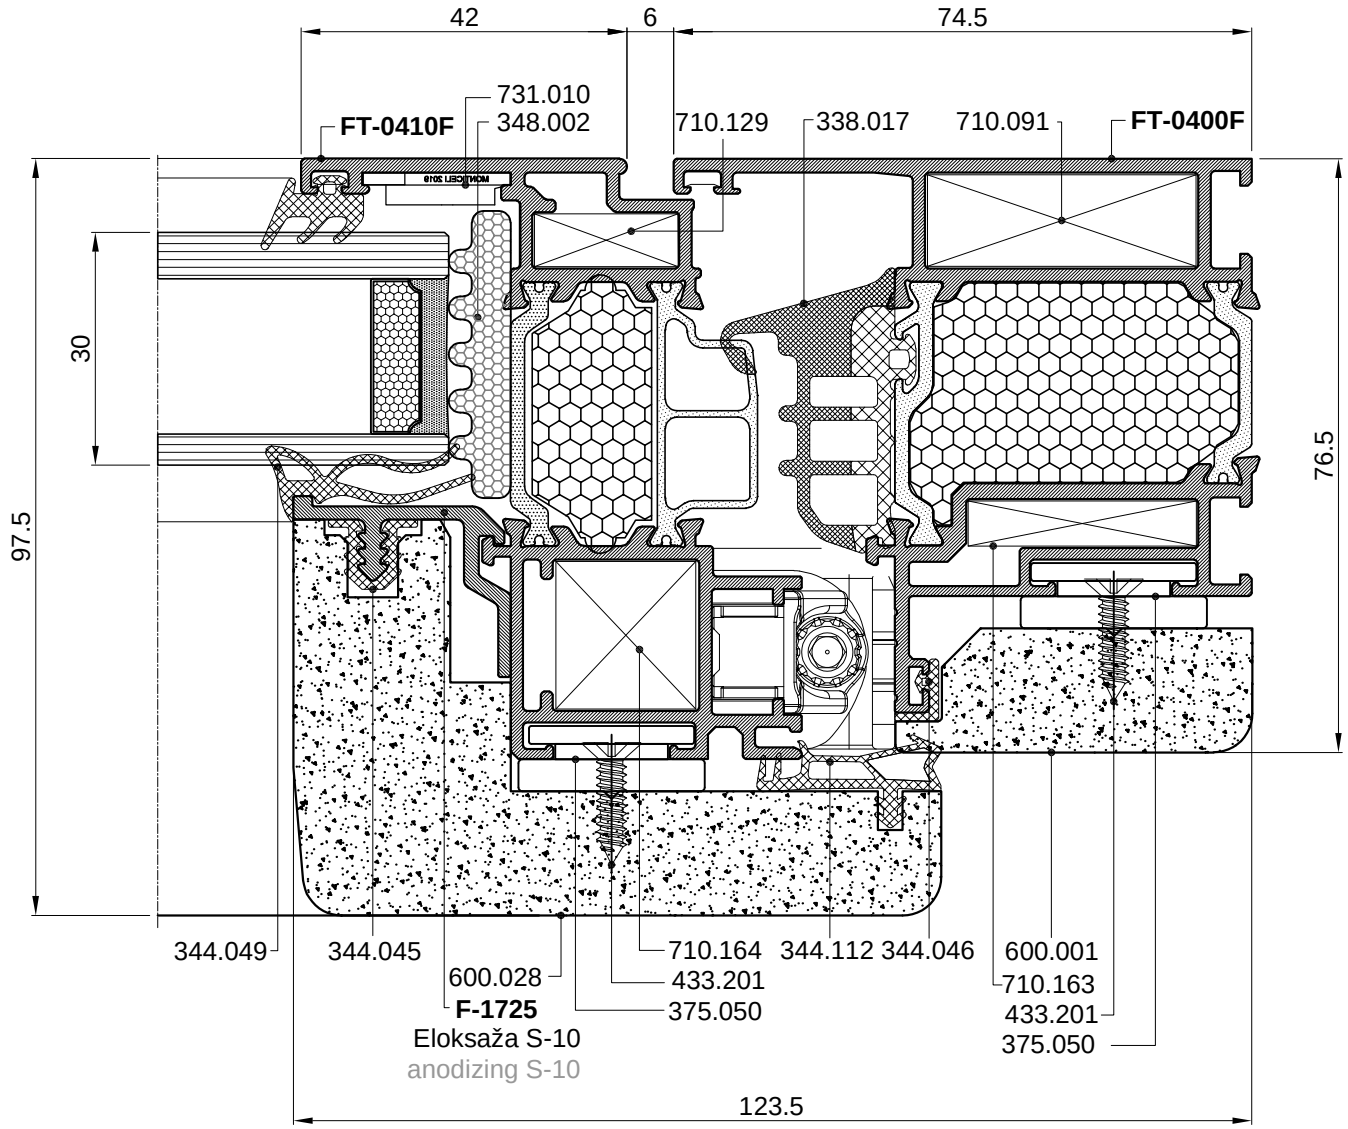

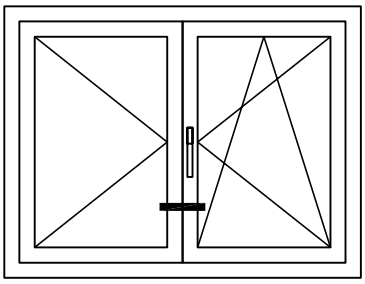

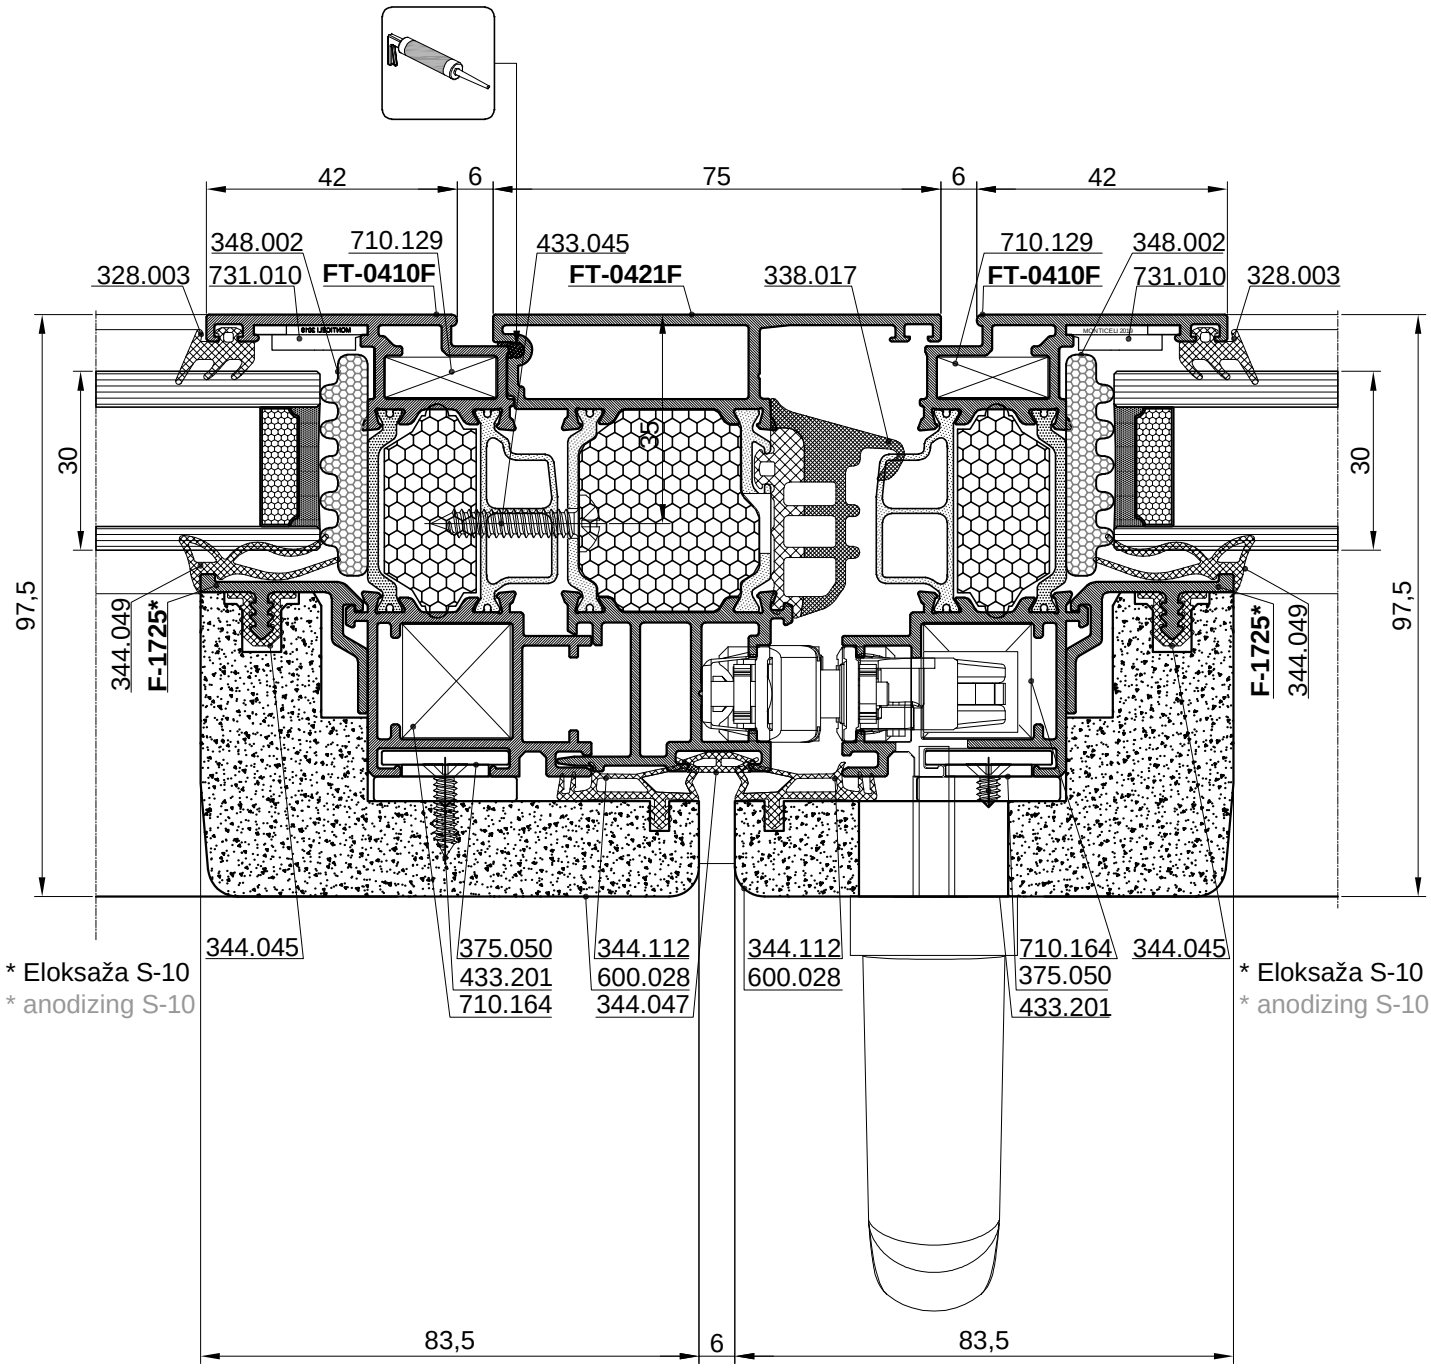



* Eloksaža S-10
* anodizing S-10


* Eloksaža S-10
* anodizing S-10




ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

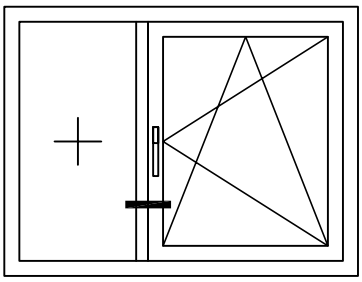


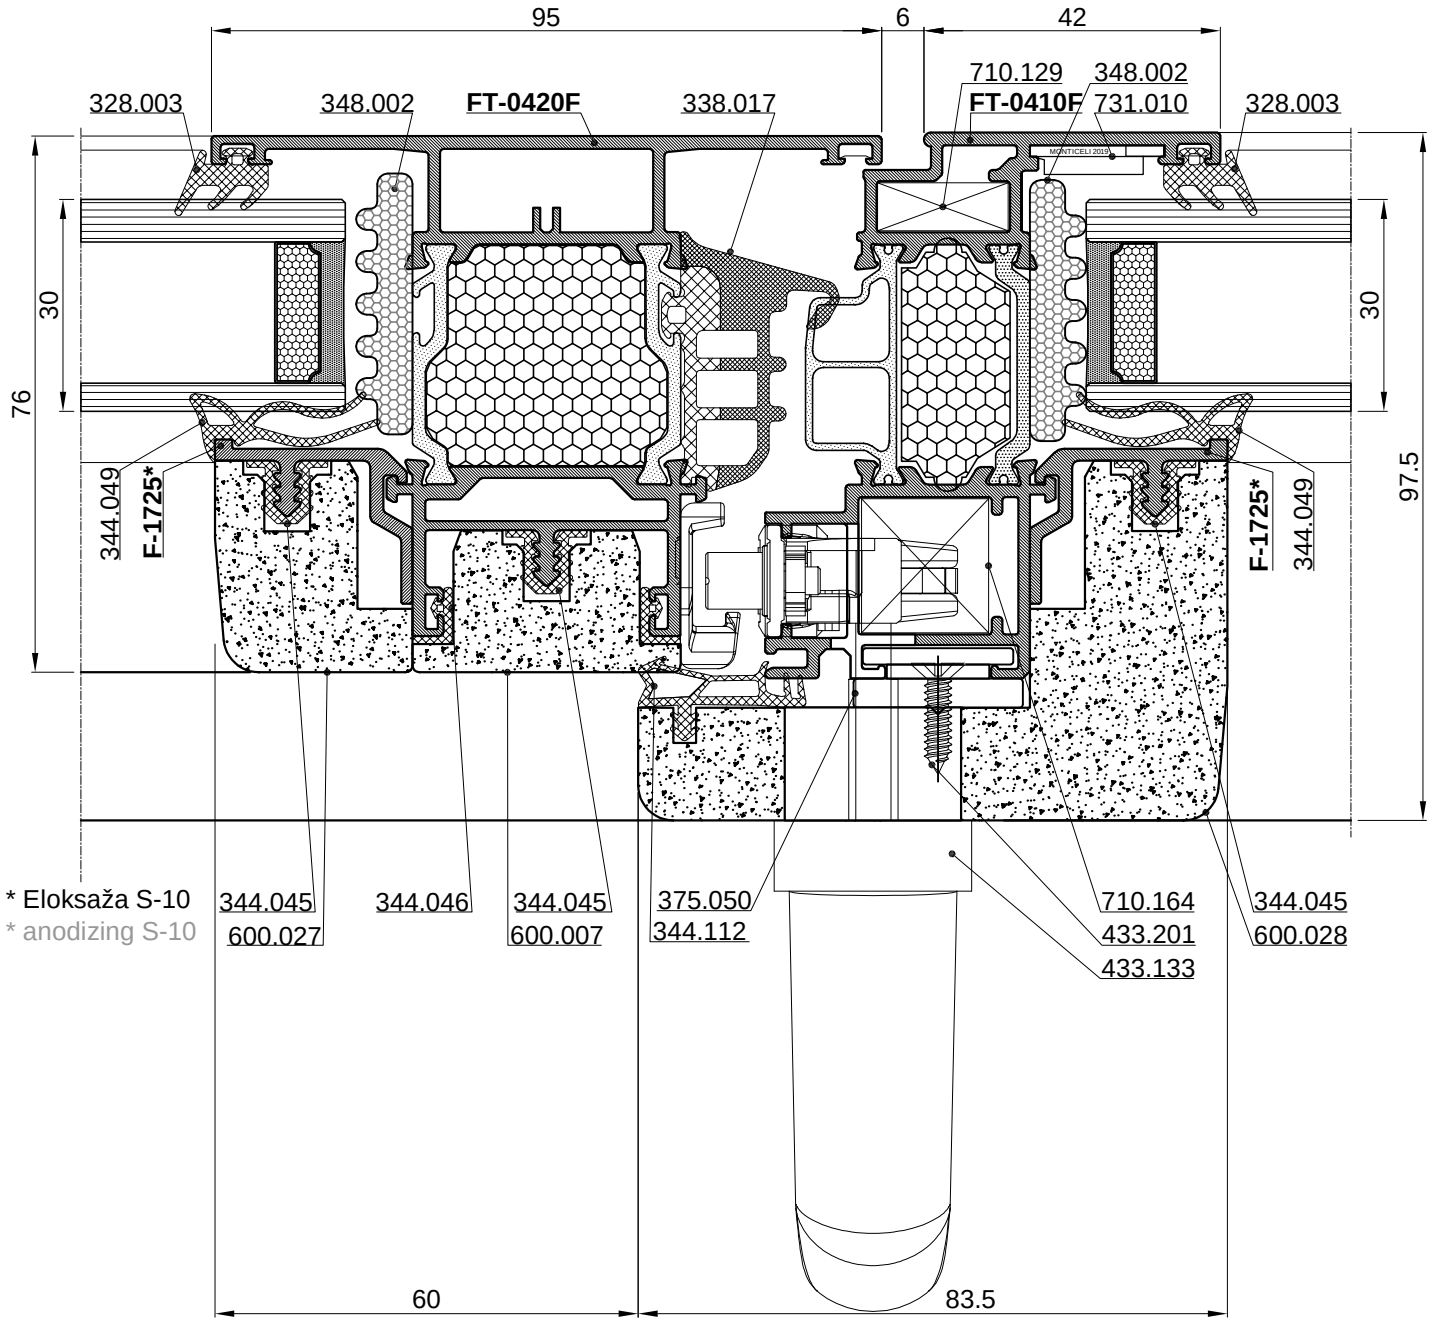

95
6
42
328.003
348.002
FT-0420F
338.017
710.129
348.002
FT-0410F
731.010
328.003
76
30
30
97.5
344.049
F-1725*
F-1725*
344.049
* Eloksaža S-10
* anodizing S-10
344.045
600.027
344.046
344.045
600.007
375.050
344.112
710.164
433.201
433.133
344.045
600.028
60
83.5

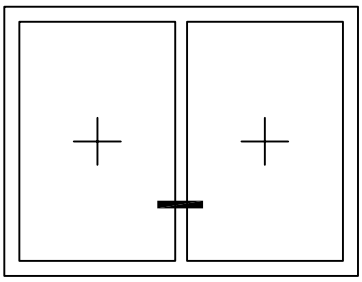


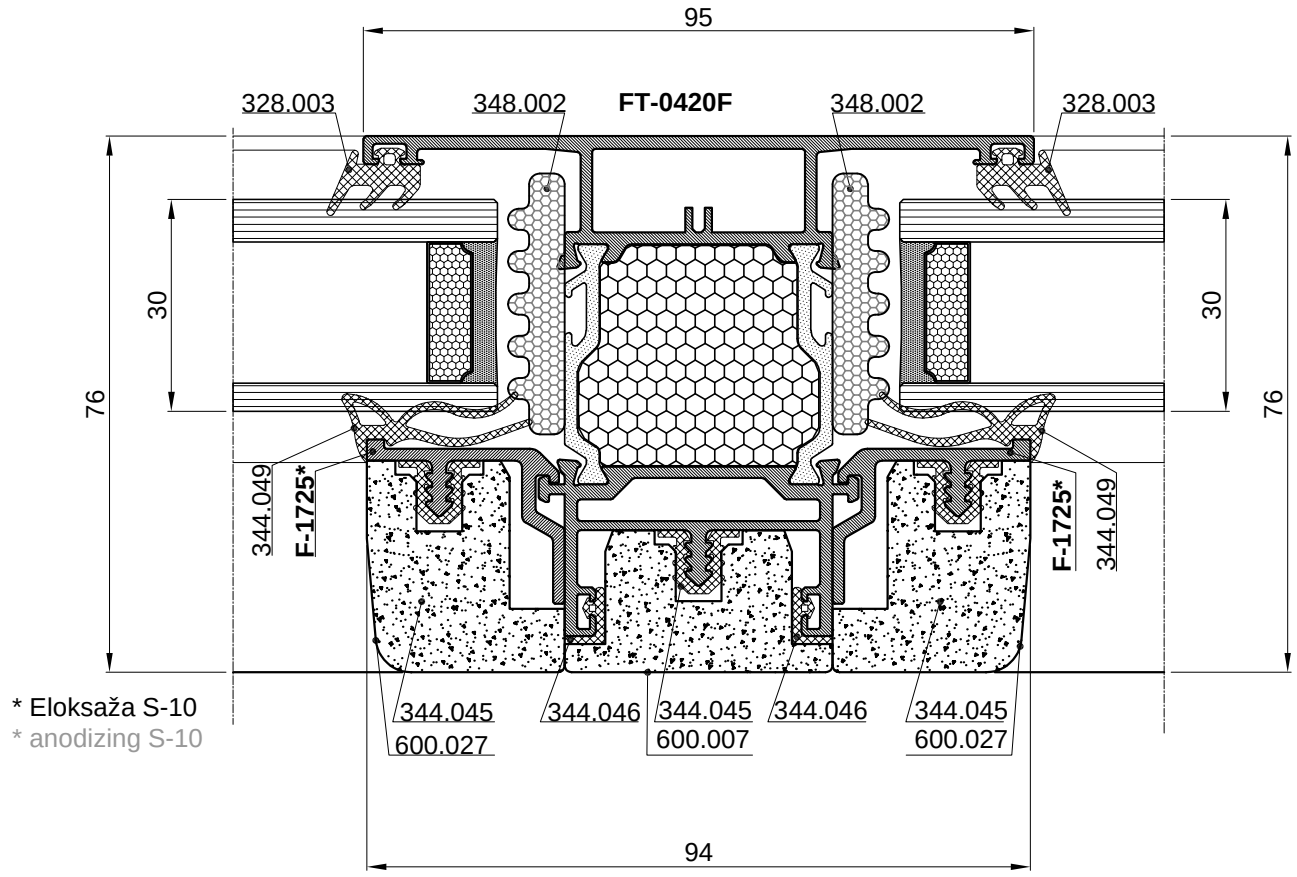



* Eloksaža S-10
* anodizing S-10




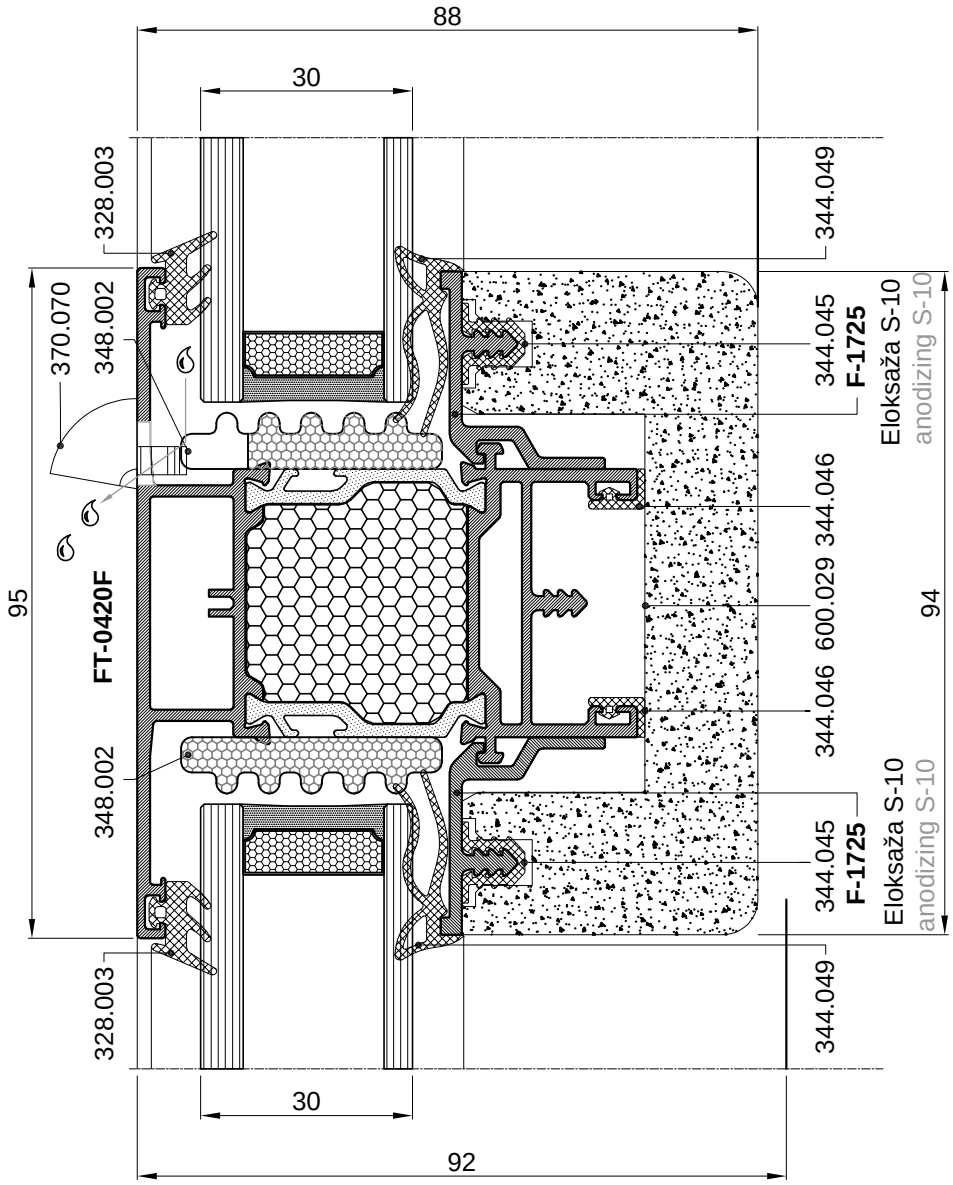

88
30
328.003
344.049
370.070
348.002
344.045
F-1725
Eloksaža S-10
anodizing S-10
344.046
600.029
344.046
95
FT-0420F
94
348.002
344.045
F-1725
Eloksaža S-10
anodizing S-10
328.003
344.049
30
92

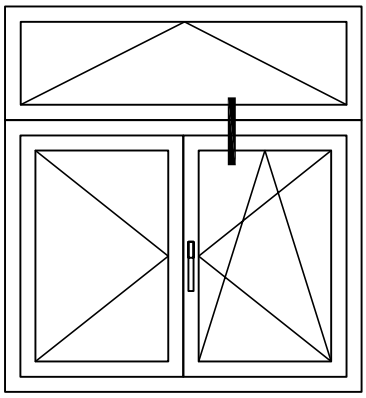

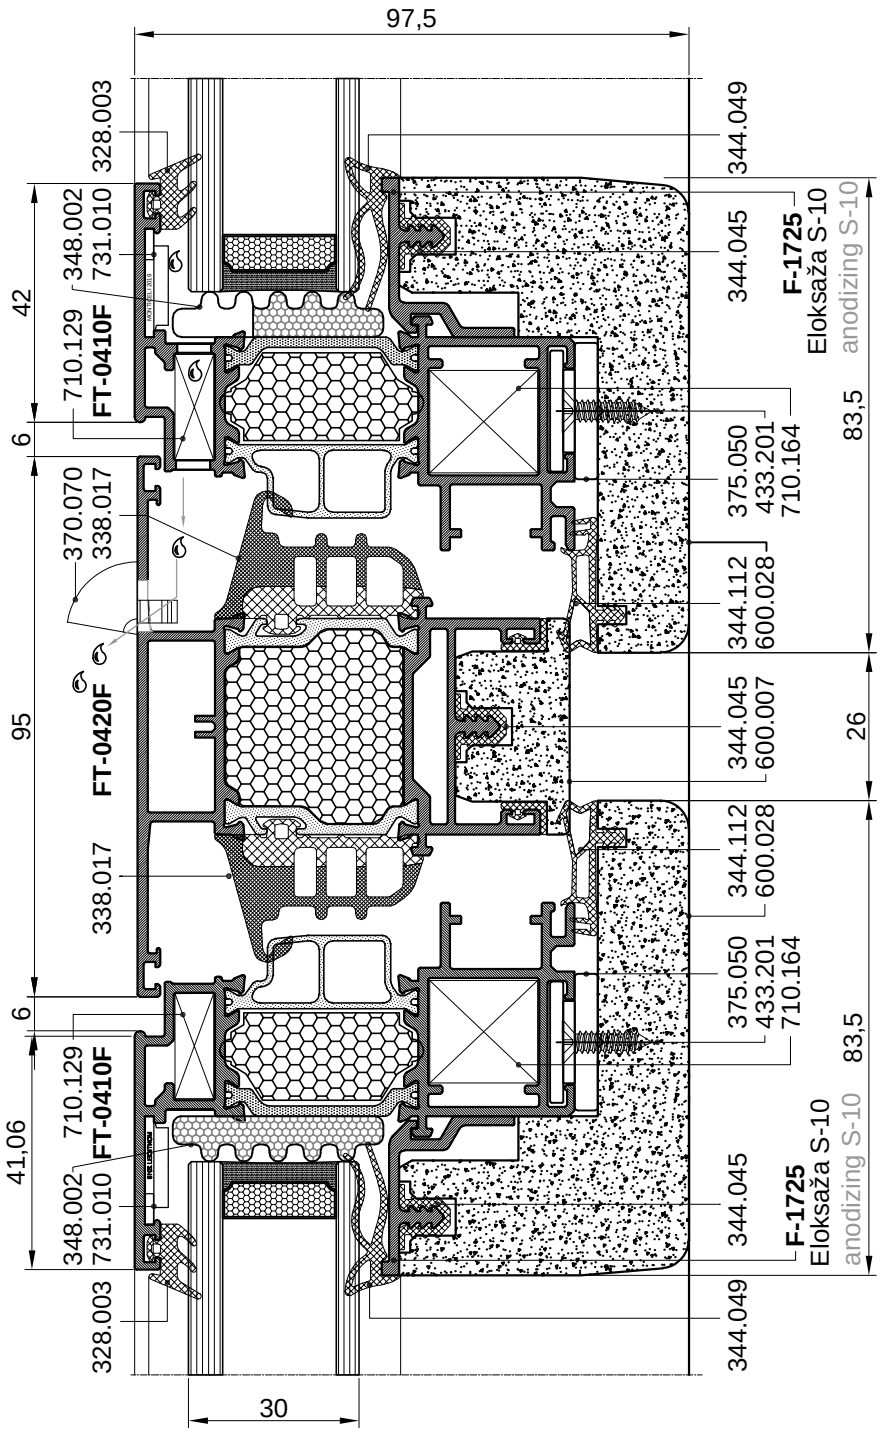

97,5
328.003
348.002
731.010
710.129
FT-0410F
42
6
370.070
338.017
FT-0420F
95
338.017
6
710.129
FT-0410F
41,06
348.002
731.010
328.003
30
344.049
344.045
F-1725
Eloksaža S-10
anodizing S-10
83,5
375.050
433.201
710.164
344.112
600.028
344.045
600.007
26
344.112
600.028
375.050
433.201
710.164
83,5
344.045
F-1725
Eloksaža S-10
anodizing S-10
344.049




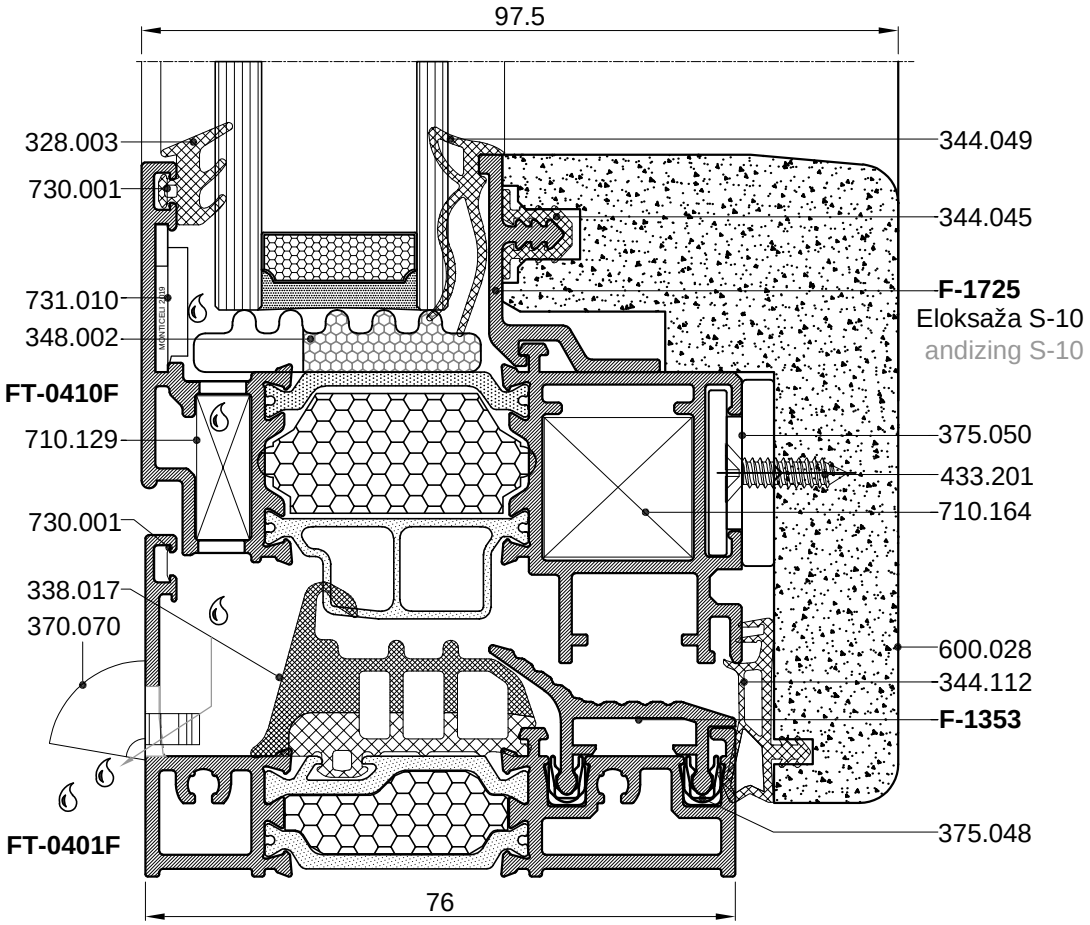


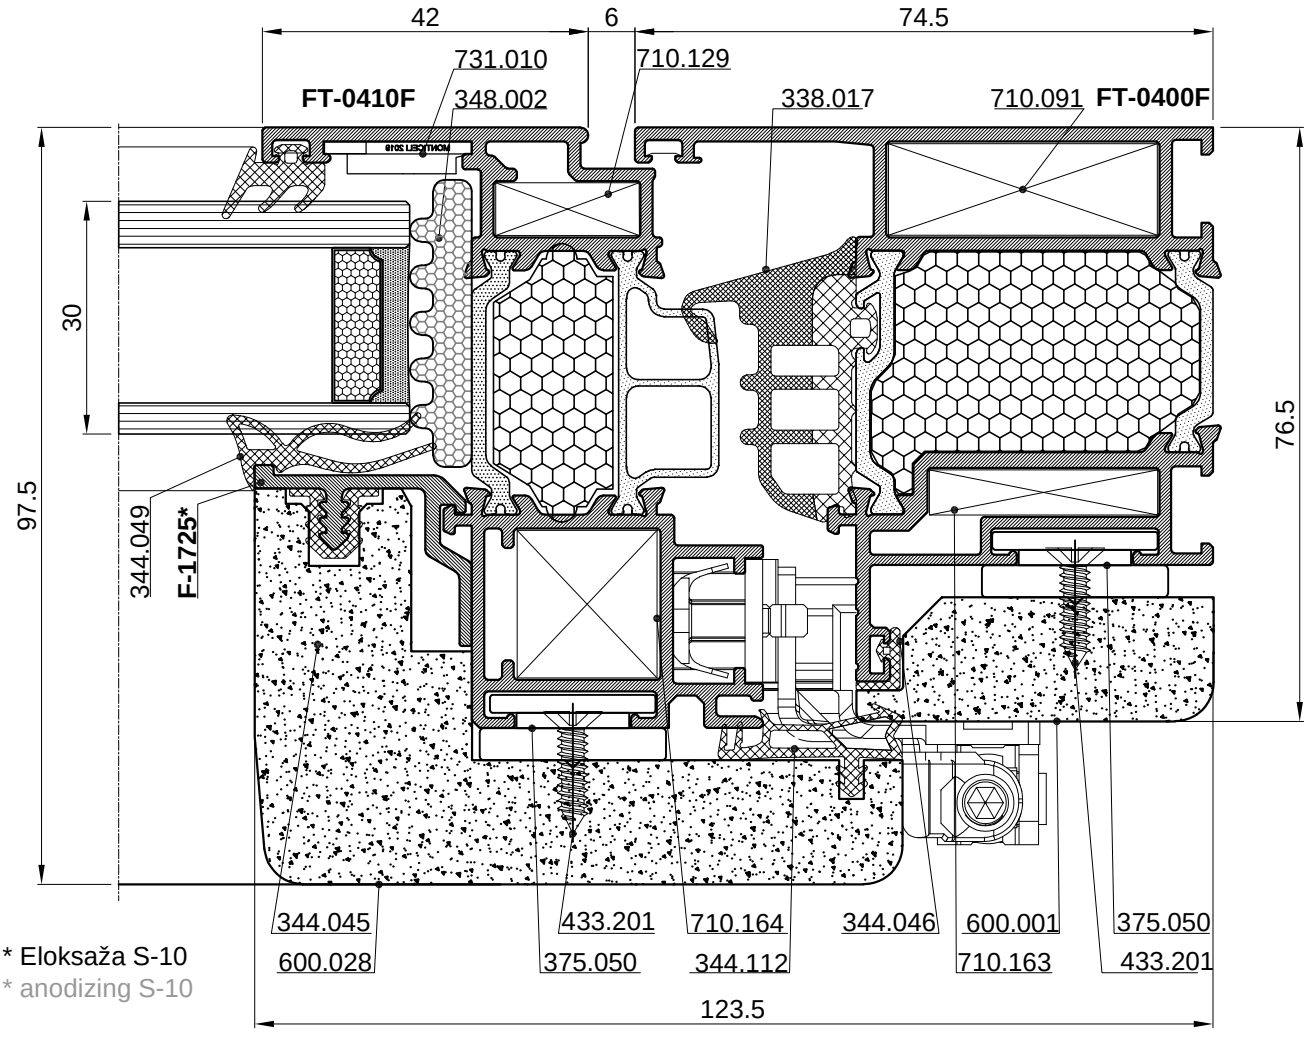


* Eloksaža S-10
* anodizing S-10

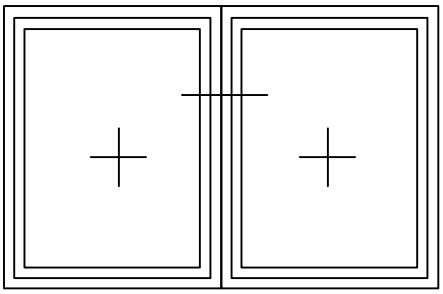

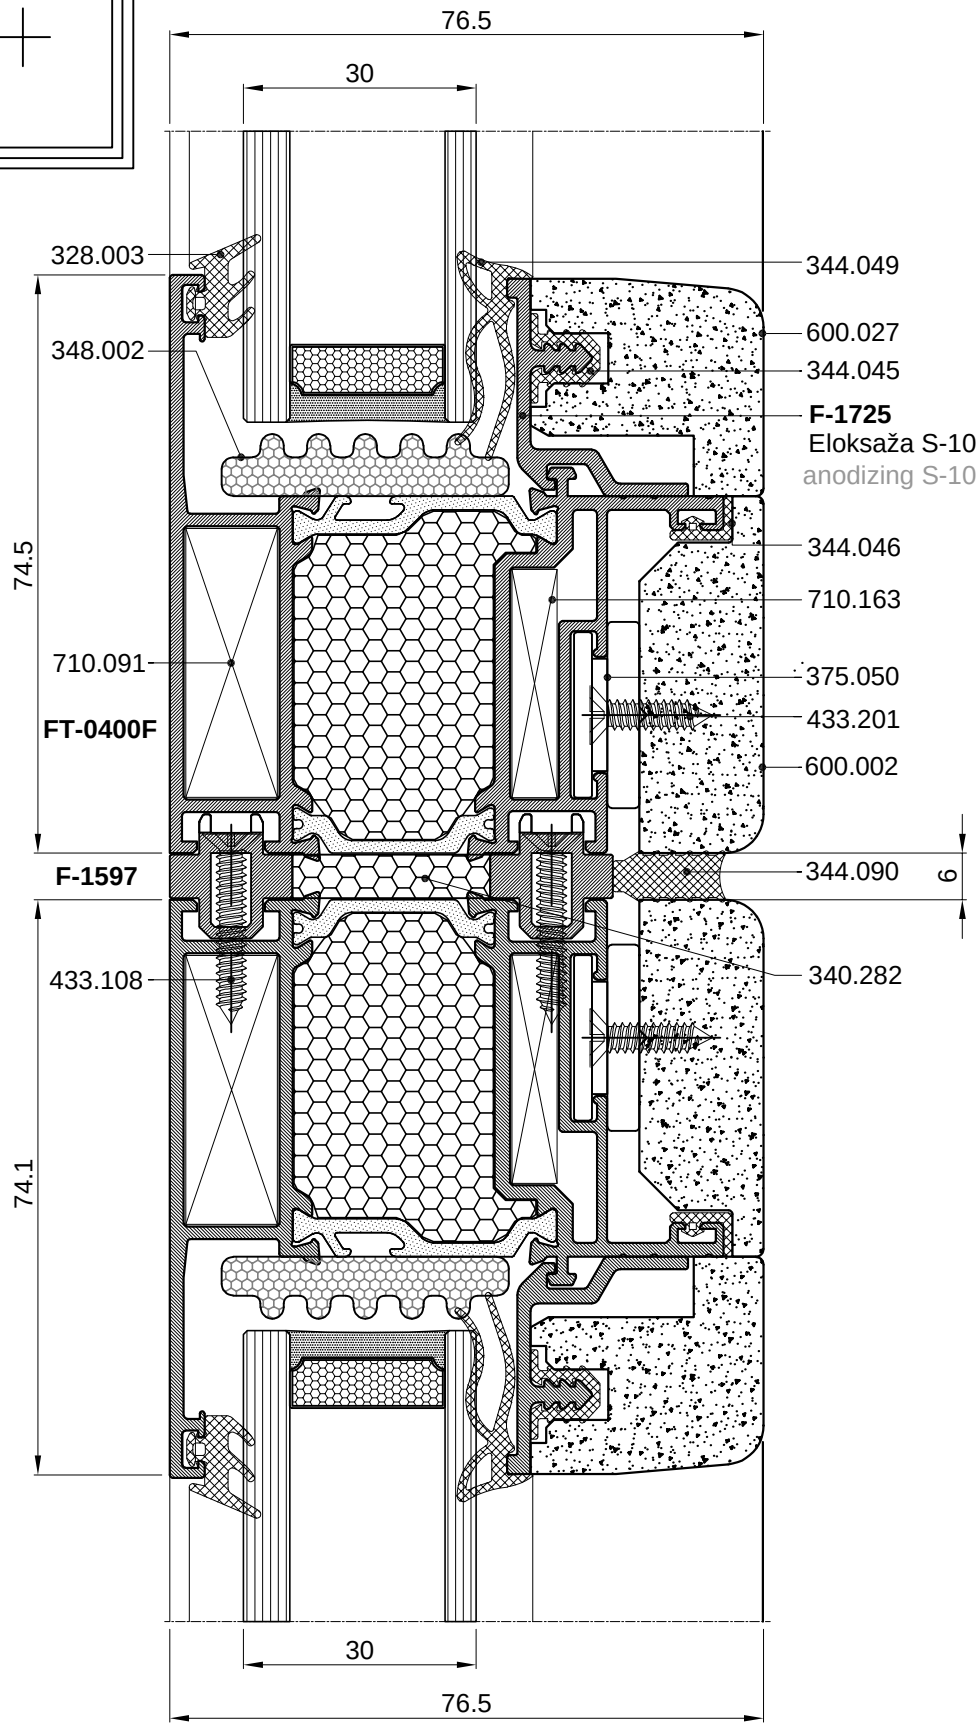

76.5
30
328.003
348.002
74.5
710.091
FT-0400F
F-1597
433.108
74.1
344.049
600.027
344.045
F-1725
Eloksaža S-10
anodizing S-10
344.046
710.163
375.050
433.201
600.002
344.090
6
340.282
30
76.5

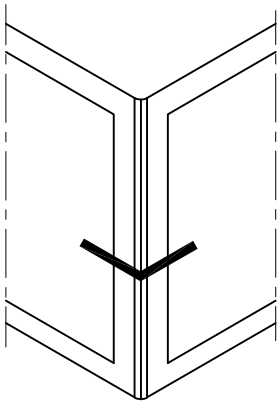


76.5
30
74.5
328.003
348.002
710.091
FT-0400F
433.018
F-1232
344.039
061046
344.049
600.027
344.045
F-1725
Eloksaža S-10
anodizing S-10
344.046
710.163
375.050
433.201
600.001
Promjenom kuta mjenjaju se i dimenzije drvene obloge
By changing the angle, the dimensions of the wooden coverings also change
Sikabond AT - universal
Al. profil
F-0559
F-0288
433.020
Silikonirati po želji:
npr. Sikasil
WS 605 S
45°
20
5.2
100
60
20
1.5
Ø2.9
17
a/2
39
Al nosač raditi:
Kut raditi ovisno o stanju na objektu
- svako 300 mm
Perform al support profile:
angle depending on object condition
- every approx. 300 mm

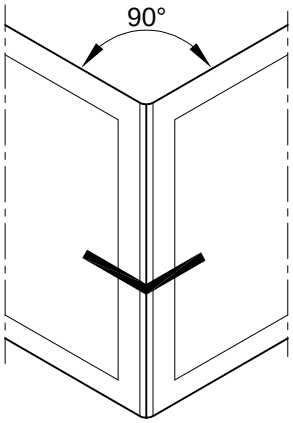



KUT PREMA VANI
CORNER TO OUTSIDE

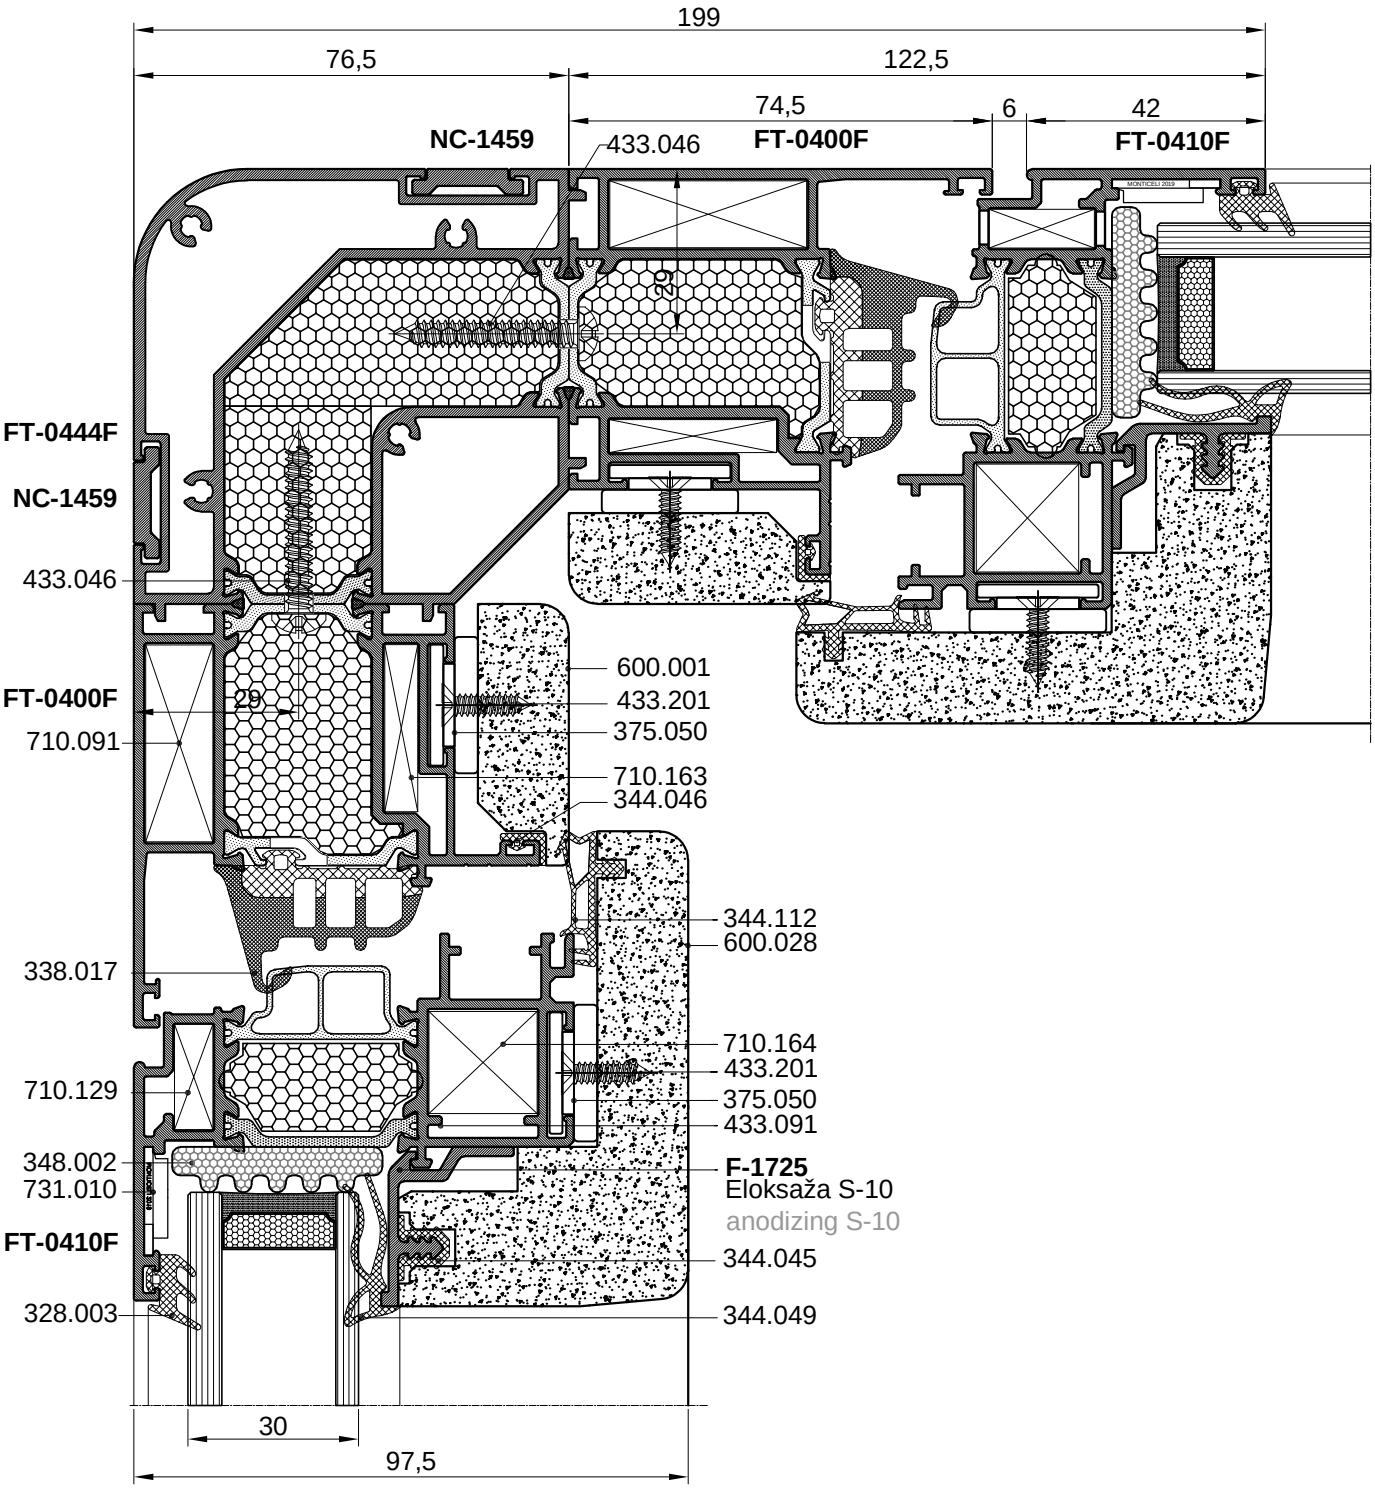

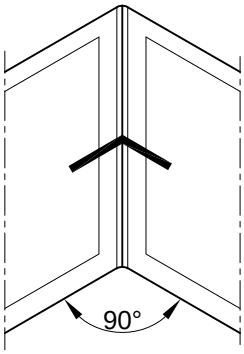

KUT PREMA UNUTRA
CORNER TO INSIDE

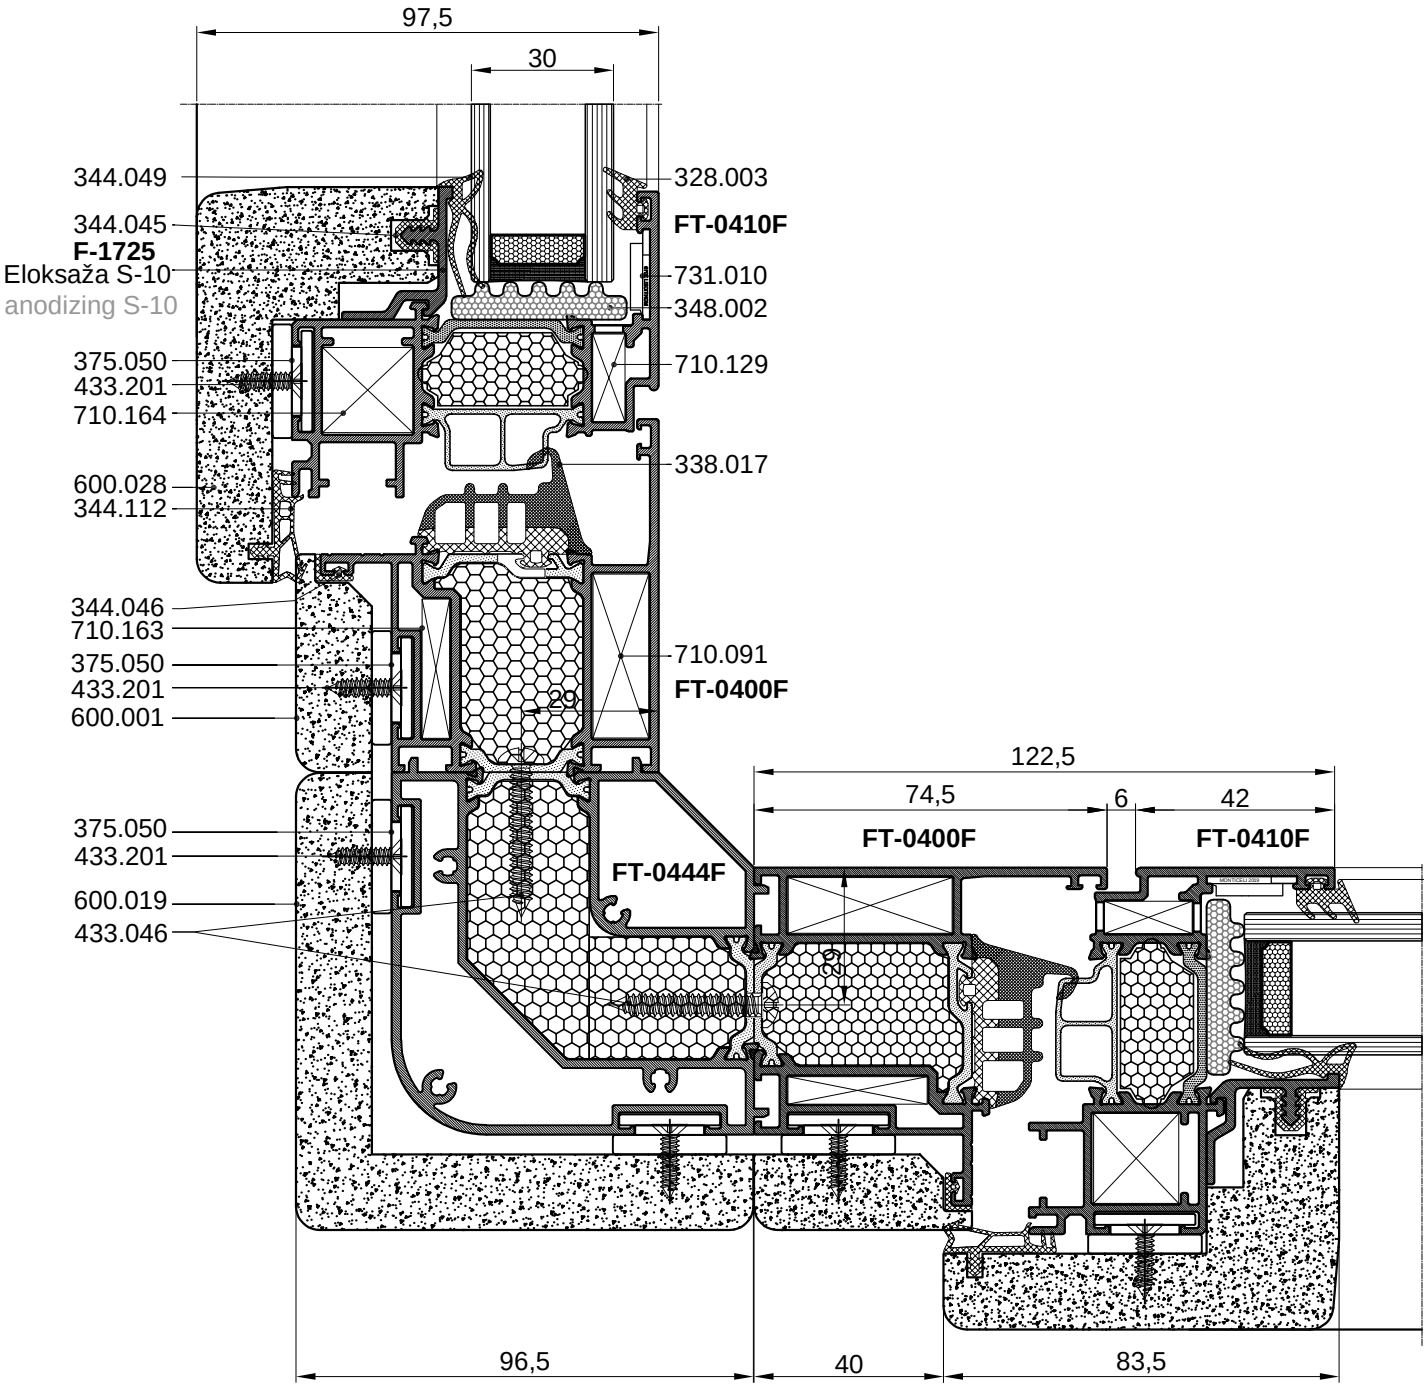



Beton
Concrete

Vanjska završna obrada
Outside finish


Unutarnja završna obrada
Inside finish


Termoizolacija
Thermal insulation

Parna brana (paro- i vodonepropusna traka) (npr. Iso Chemie: Iso Connect Inside CX)
Vapour barier (vapour and water proof tape) (eg. Iso Chemie: Iso Connect Inside CX)

Hidroizolacija (paropropusna i vodonepropusna traka) (npr. Iso Chemie: Iso Connect Outside CX)
Weather protection (vapourpermable and water proof tape) (eg. Iso Chemie: Iso Connect Outside CX)

Termoizolacija (exp.spužvica: Iso Chemie: ISO Bloco One)
Thermal insulation (Expanding joint sealing foam tape: Iso Chemie ISO Bloco One)



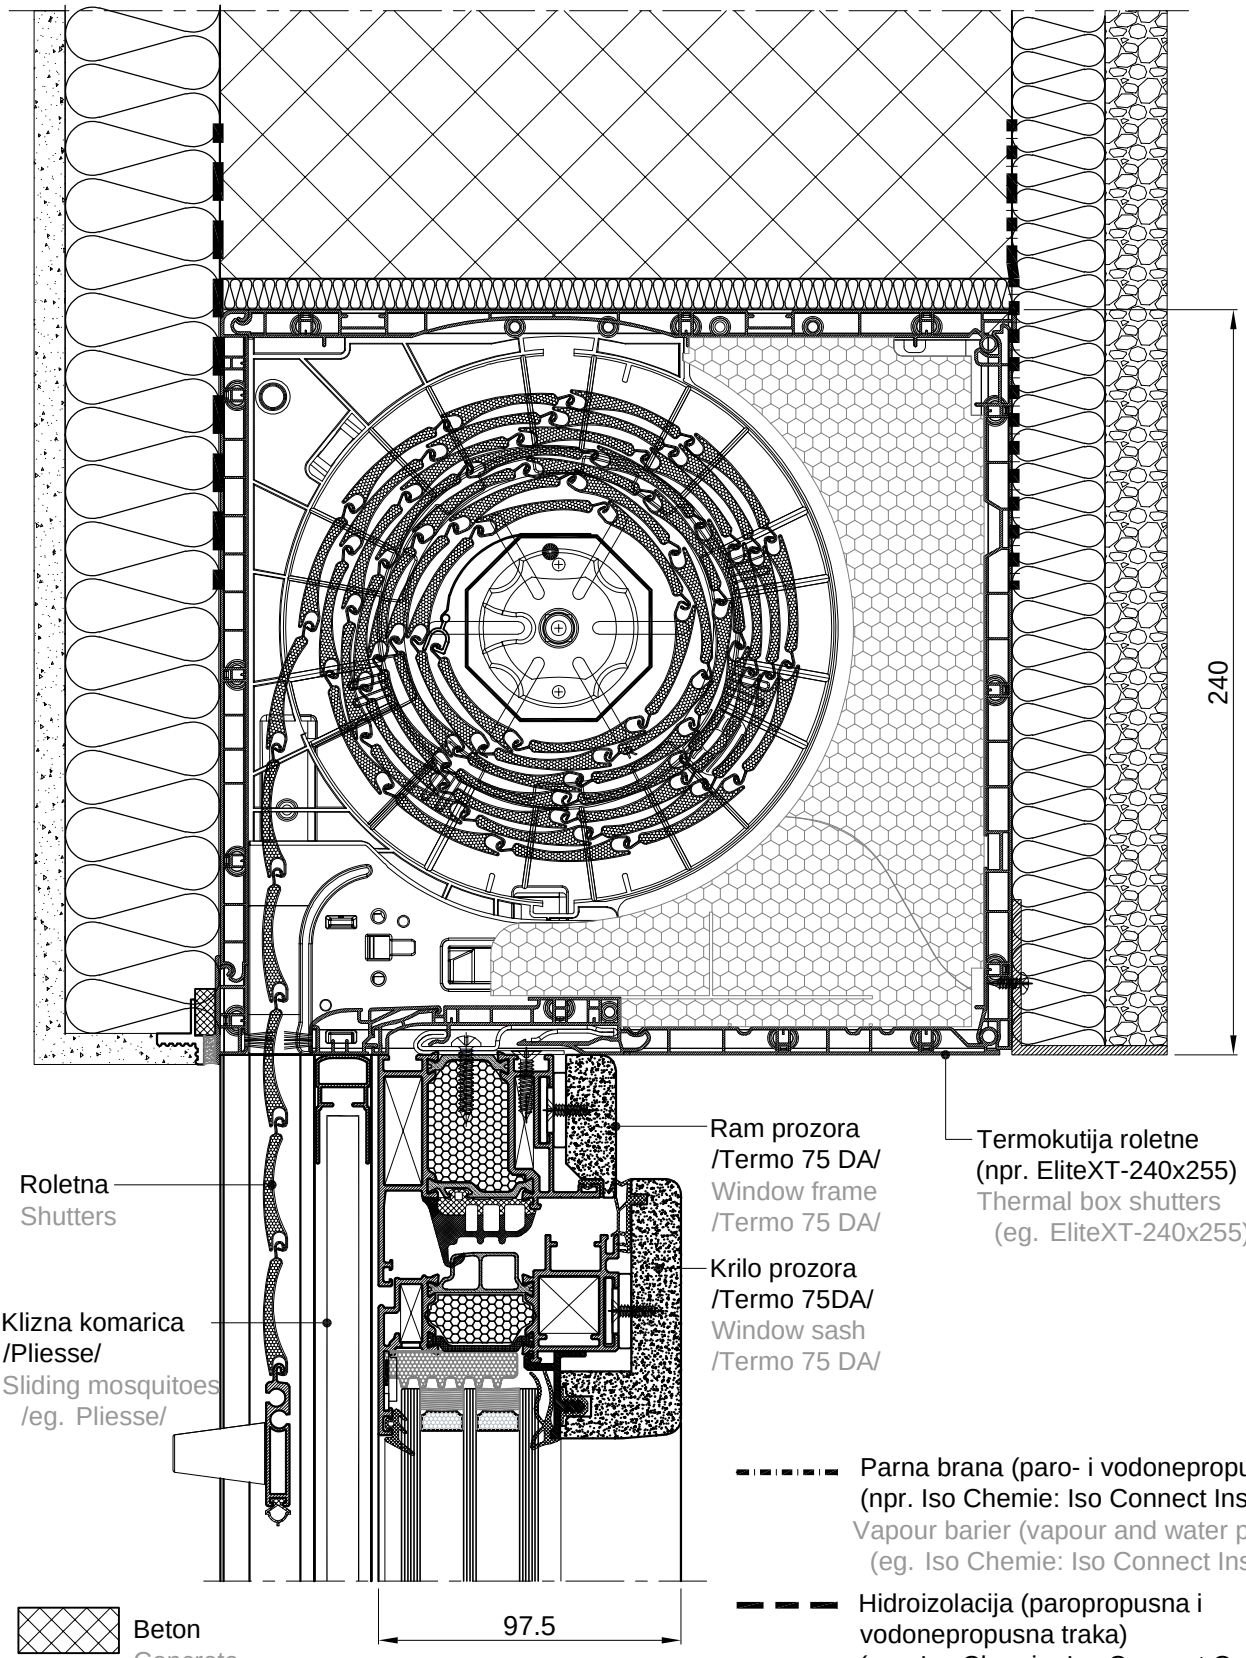

Roletna
Shutters

Klizna komarica
/Pliesse/
Sliding mosquitoes
/eg. Pliesse/

Ram prozora
/Termo 75 DA/
Window frame
/Termo 75 DA/

Krilo prozora
/Termo 75DA/
Window sash
/Termo 75 DA/

Termokutija roletne
(npr. EliteXT-240x255)
Thermal box shutters
(eg. EliteXT-240x255)

Beton
Concrete

Vanjska završna obrada
Outside finish


Unutarnja završna obrada
Inside finish


Termoizolacija
Thermal insulation

Parna brana (paro- i vodonepropusna traka)
(npr. Iso Chemie: Iso Connect Inside CX)
Vapour barier (vapour and water proof tape)
(eg. Iso Chemie: Iso Connect Inside CX)

Hidroizolacija (paropropusna i vodonepropusna traka)
(npr. Iso Chemie: Iso Connect Outside CX)
Weather protection (vapourpermable and water proof tape)
(eg. Iso Chemie: Iso Connect Outside CX)

Termoizolacija (exp.spužvica:
Iso Chemie: ISO Bloco One)
Thermal insulation (Expanding joint sealing foam tape: Iso Chemie ISO Bloco One)



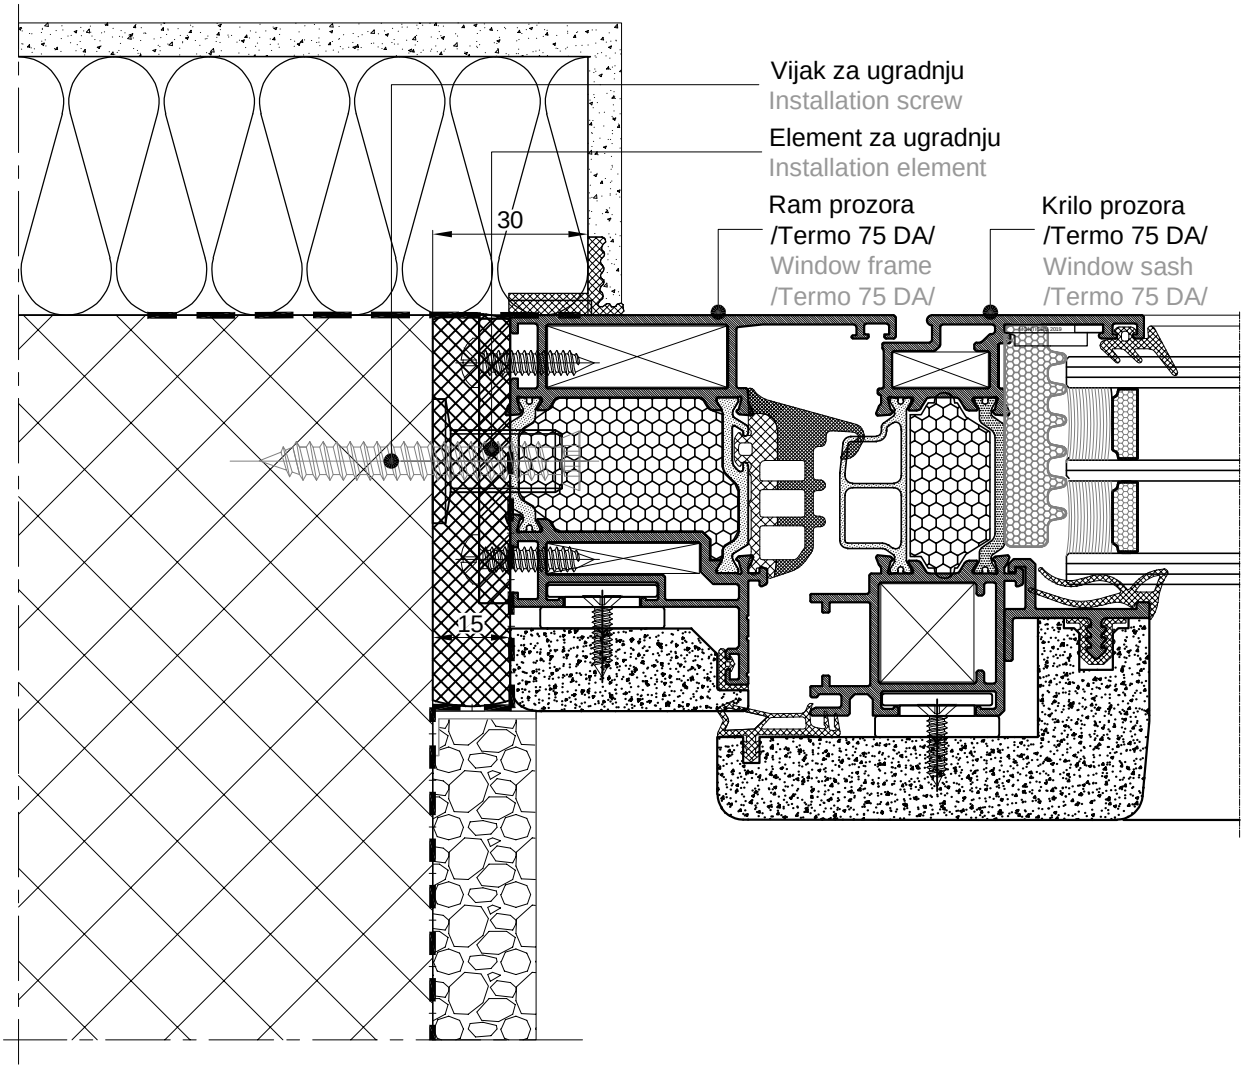

Beton
Concrete

Vanjska završna obrada
Outside finish


Unutarnja završna obrada
Inside finish

Termoizolacija
Thermal insulation

Parna brana (paro- i vodonepropusna traka)
(npr. Iso Chemie: Iso Connect Inside CX)
Vapour barier (vapour and water proof tape)
(eg. Iso Chemie: Iso Connect Inside CX)

Hidroizolacija (paropropusna i vodonepropusna traka)
(npr. Iso Chemie: Iso Connect Outside CX)
Weather protection (vapourpermable and water proof tape)
(eg. Iso Chemie: Iso Connect Outside CX)

Termoizolacija (exp.spužvica:
Iso Chemie: ISO Bloco One)
Thermal insulation (Expanding joint sealing foam
tape: Iso Chemie ISO Bloco One)

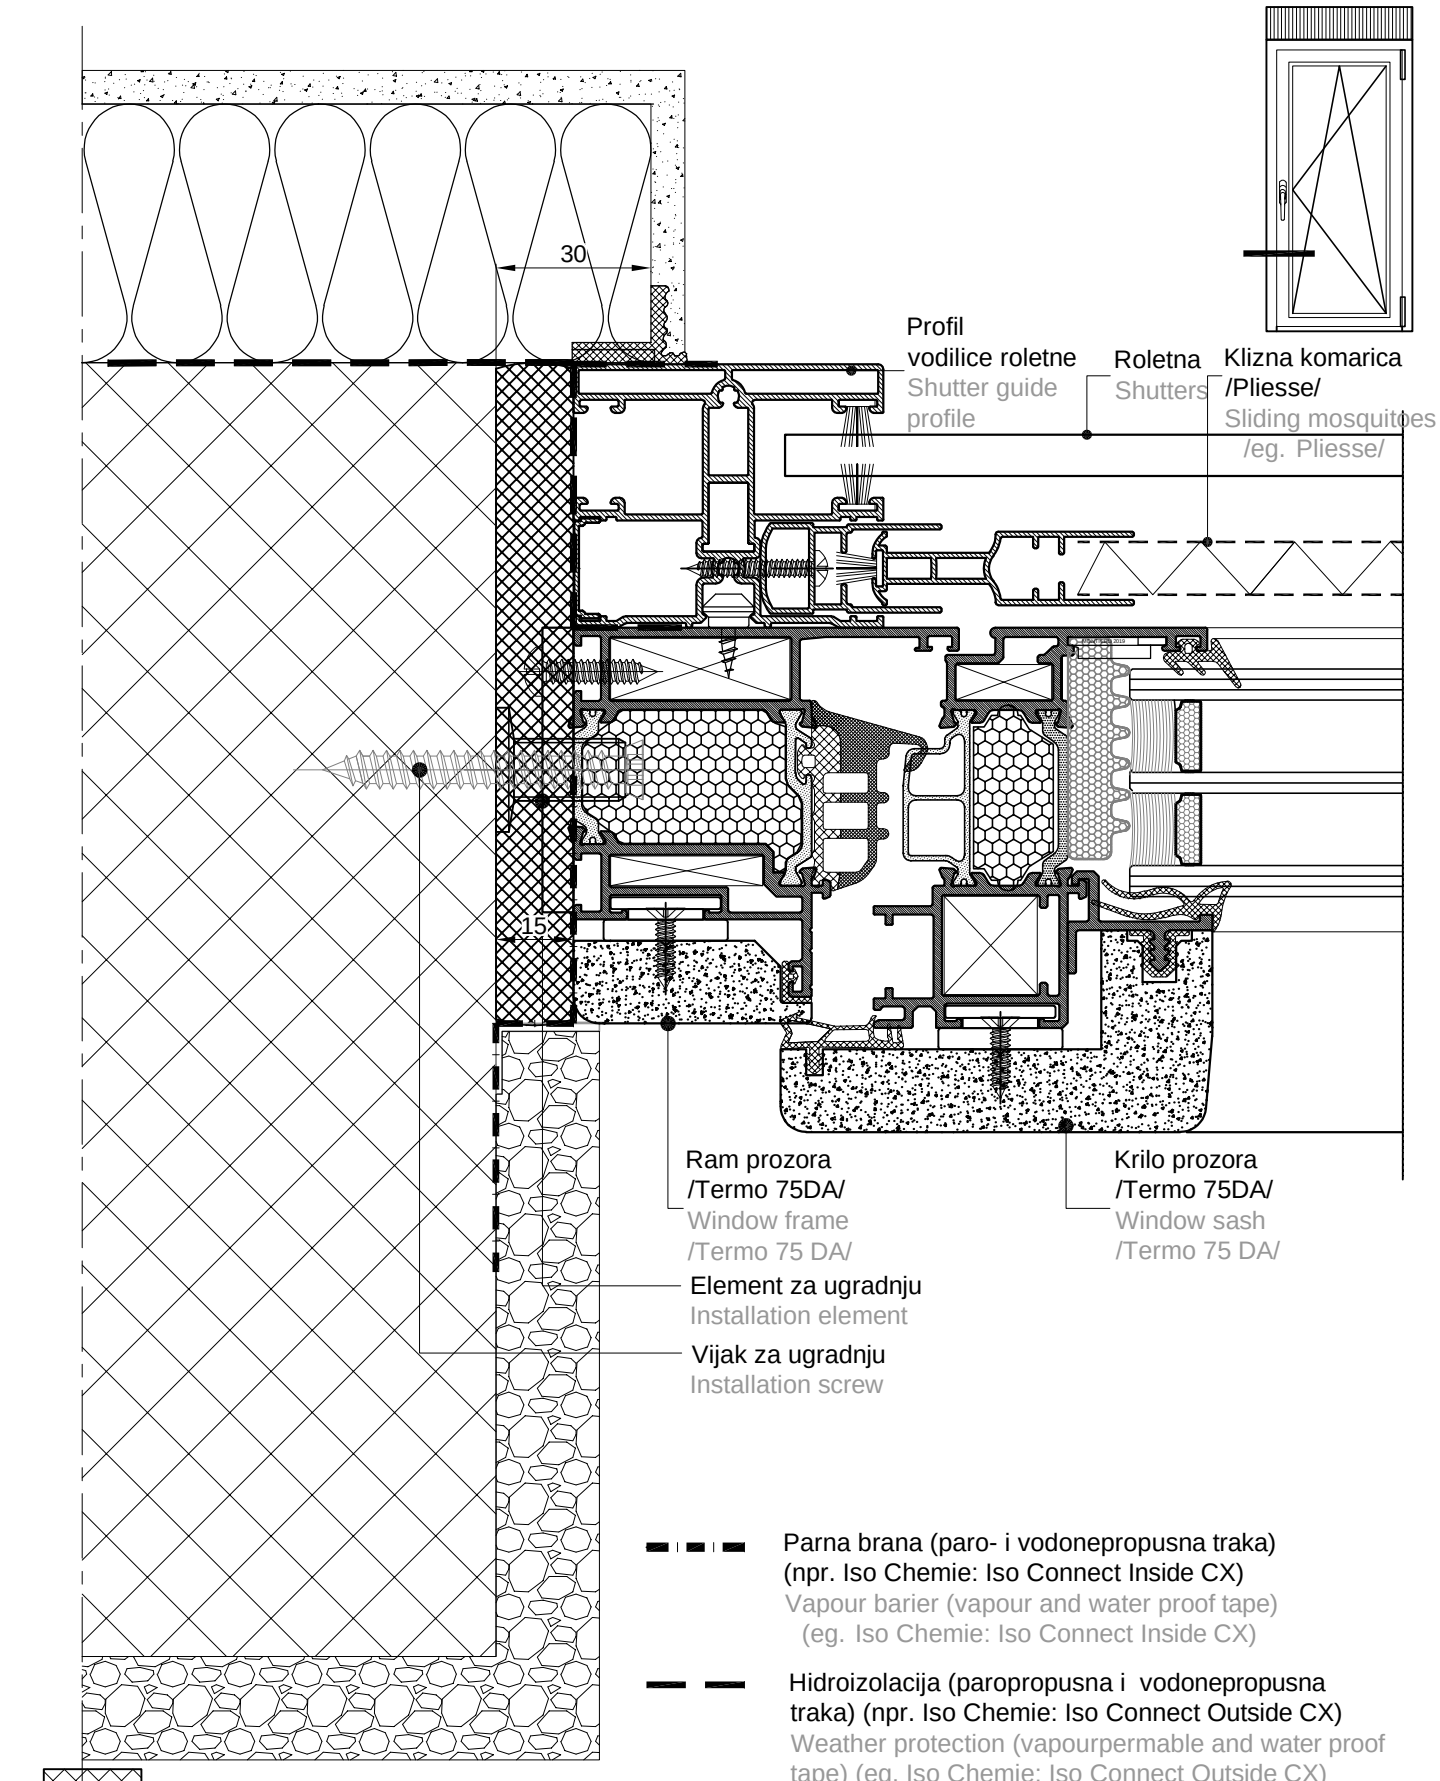

Parna brana (paro- i vodonepropusna traka) (npr. Iso Chemie: Iso Connect Inside CX)
Vapour barier (vapour and water proof tape) (eg. Iso Chemie: Iso Connect Inside CX)

Hidroizolacija (paropropusna i vodonepropusna traka) (npr. Iso Chemie: Iso Connect Outside CX)
Weather protection (vapourpermable and water proof tape) (eg. Iso Chemie: Iso Connect Outside CX)

Beton
Concrete

Vanjska završna obrada
Outside finish


Unutarnja završna obrada
Inside finish

Termoizolacija (exp.spužvica: Iso Chemie: ISO Bloco One)
Thermal insulation (Expanding joint sealing foam tape: Iso Chemie ISO Bloco One)


Termoizolacija
Thermal insulation

Obrada i montaža
Processing and montage


PREPORUKE ZA RASPORED PODMETAČA KOD UGRADNJE ELEMENATA ZA ISPUNU
RECOMMENDATIONS FOR POSITIONING OF PACKERS DURING MONTAGE OF INFILL ELEMENTS

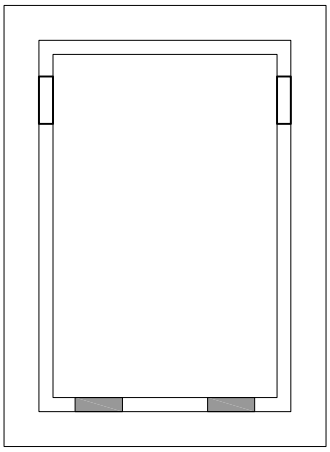


Fiksno
Fixed

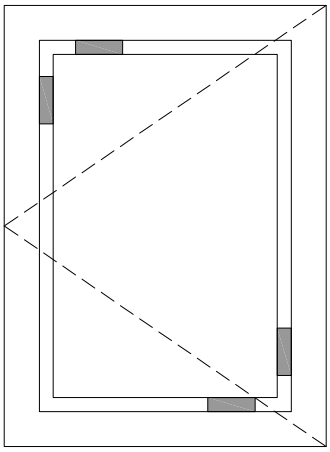


Zaokretno
Turn

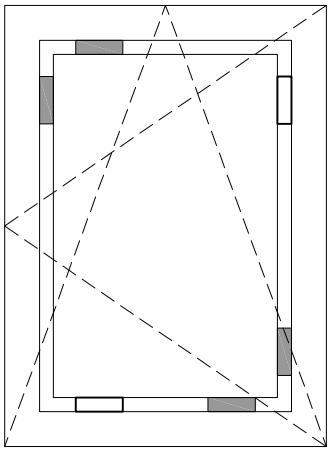


otklopno-zaokretno
Tilt and Turn

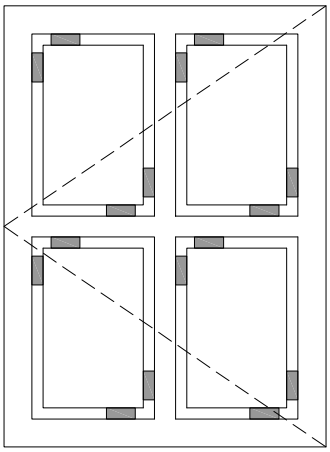

Zaokretno
Turn

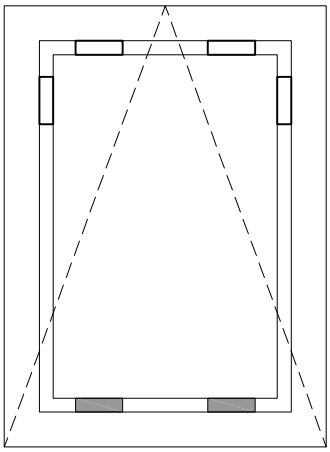

Otklopno
Tilt

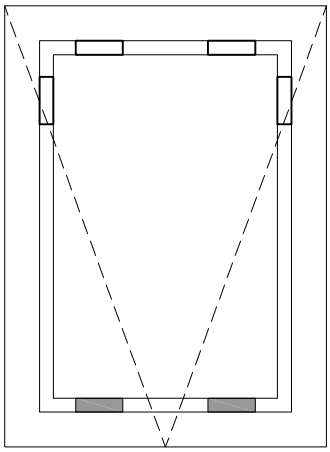



Otklopno
Tilt


nosivi podmetač
carrier packer
odstojni podmetač
spacing packer


Materijal podmetača: PVC
Packer material: PVC


- UMETAK ZA PROFIL KOMBATUTE FT-0421F KOD DVOKRILNOG OTVARANJA
- INSERT FOR THE FLYING MULLION PROFILE FT-0421F FOR DOUBLE-SASH OPENING

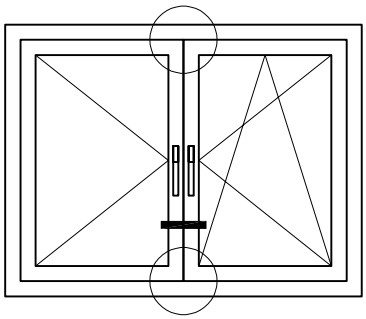

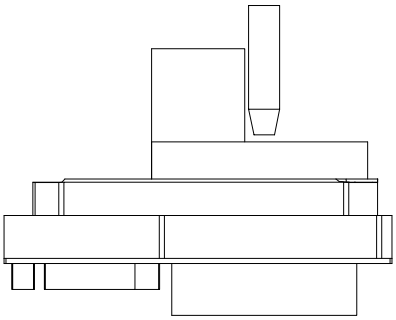

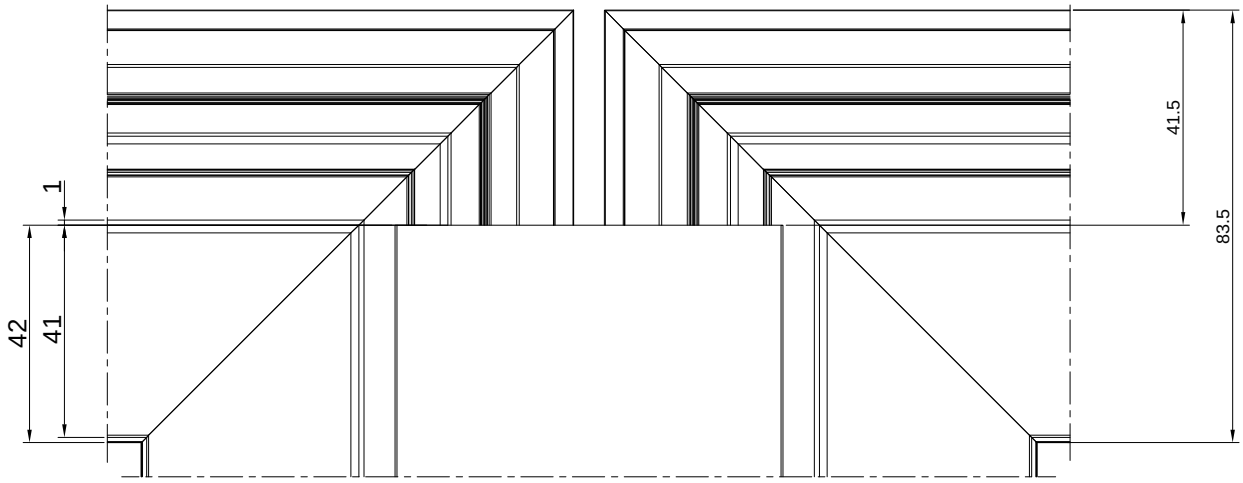

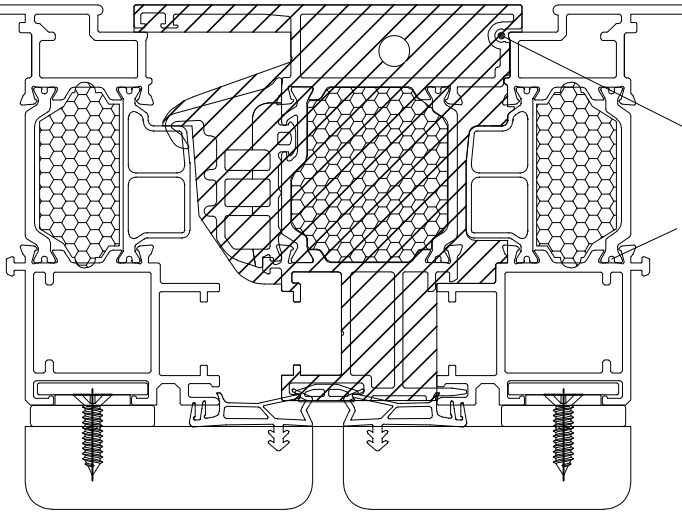








ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

ispuniti ljepilom za metal
(cijelom dužinom profila)
to be filled with metal glue
(throughout the length of
the profile)

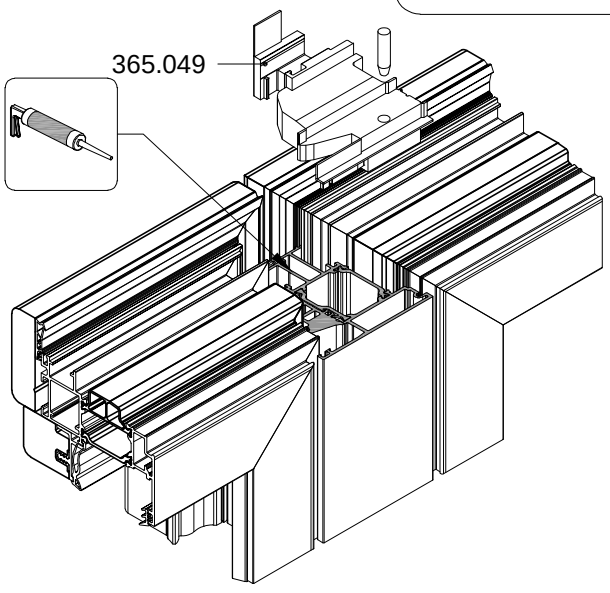

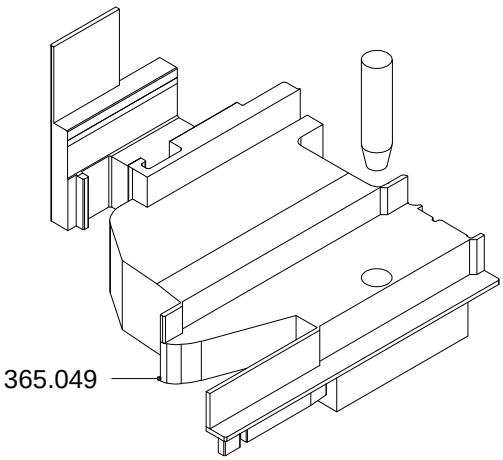


SPAJANJE PROFILA KUTNIM SPOJNICAMA
CONNECTING OF PROFILES WITH CORNER BRACKETS

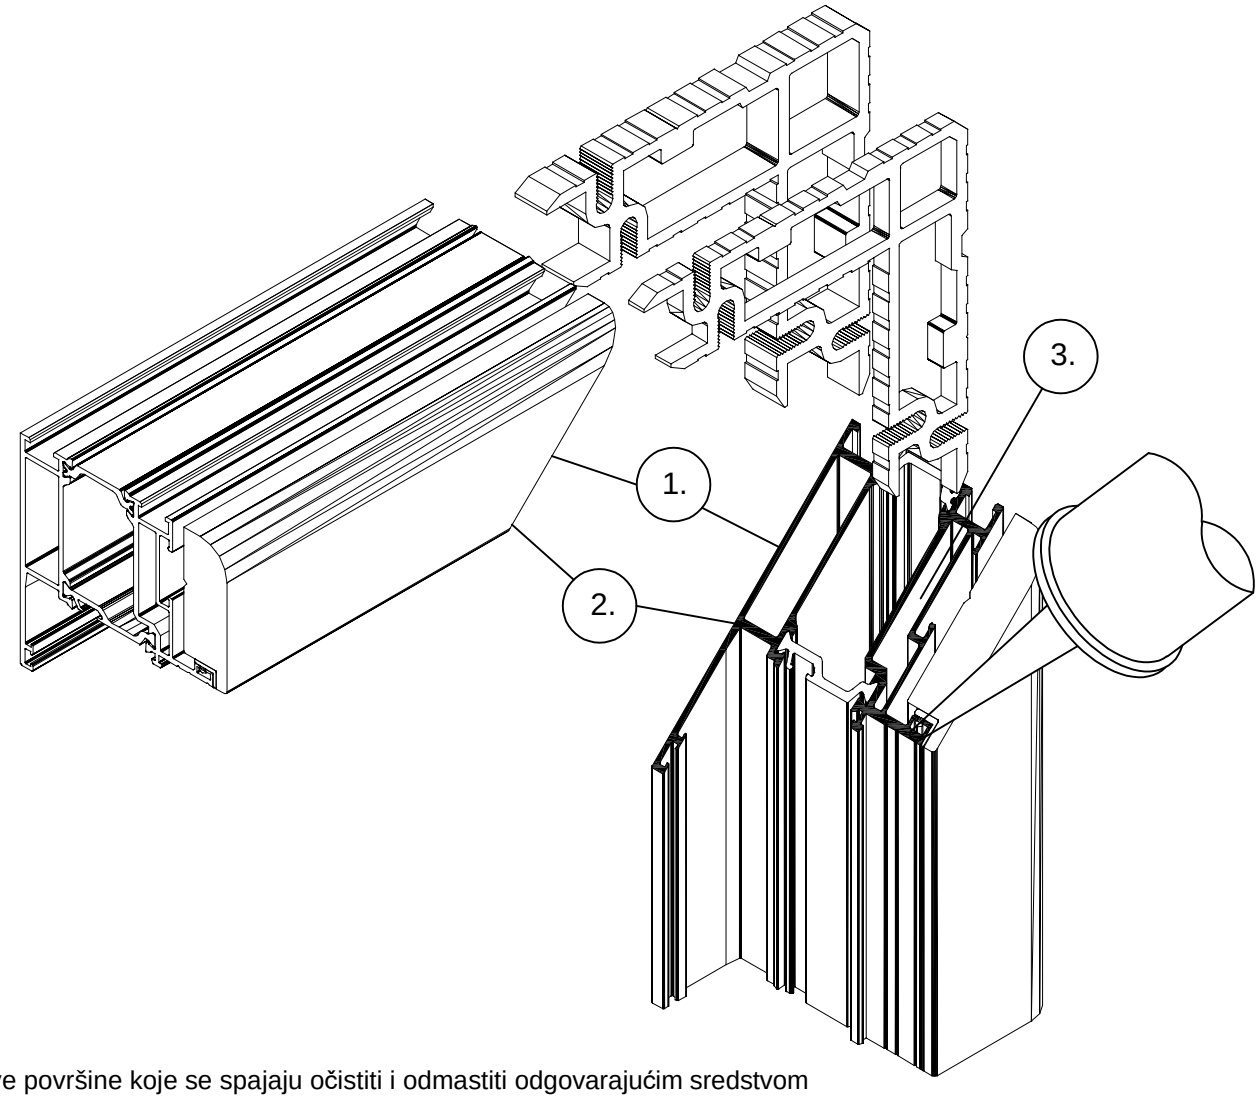


1. Sve površine koje se spajaju očistiti i odmastiti odgovarajućim sredstvom (npr. Teroson VR 20 ili FL+).
2. Premazati površine koje se spajaju ljepilom (npr.Teroson MS 939) .
3. Ljepilo ušpricati u komoru za kutnik - po opsegu komore
4. Profile s kutnikom izravnati i spojiti
5. Dio ljepila što iscuri između rezova očistiti sredstvom za čišćenje i odmašćivanje (npr. Teroson VR 20 ili FL+).

1. Clean and degrease all connecting surfaces with suitable products (e.g. Teroson VR 20 ili FL+).
2. Smear connecting surfaces with an adhesive (e.g.Teroson MS 939) .
3. Inject adhesive into chambers for the corner bracket (on chamber edges)
4. Level profiles with corner brackets and connect.
5. Remove the leaked adhesive with a cleaning and degreasing agent (e.g. Teroson VR 20 ili FL+).

- aluminium profile F-1552
- connection screw 433.018
- aluminium sill
- hydro insulation (vapor permeable and liquid impermeable)-for thermal insulation protection from outside liquids (e.g. Würth 0875 350 201)
- FT-0443F
- screw 430.179
- vapor barrier (vapor impermeable)-for stopping vapor from entering into thermal insulation (e.g.Würth 0875 071 00)
- permanently elastic sealant
- inside processing and final look

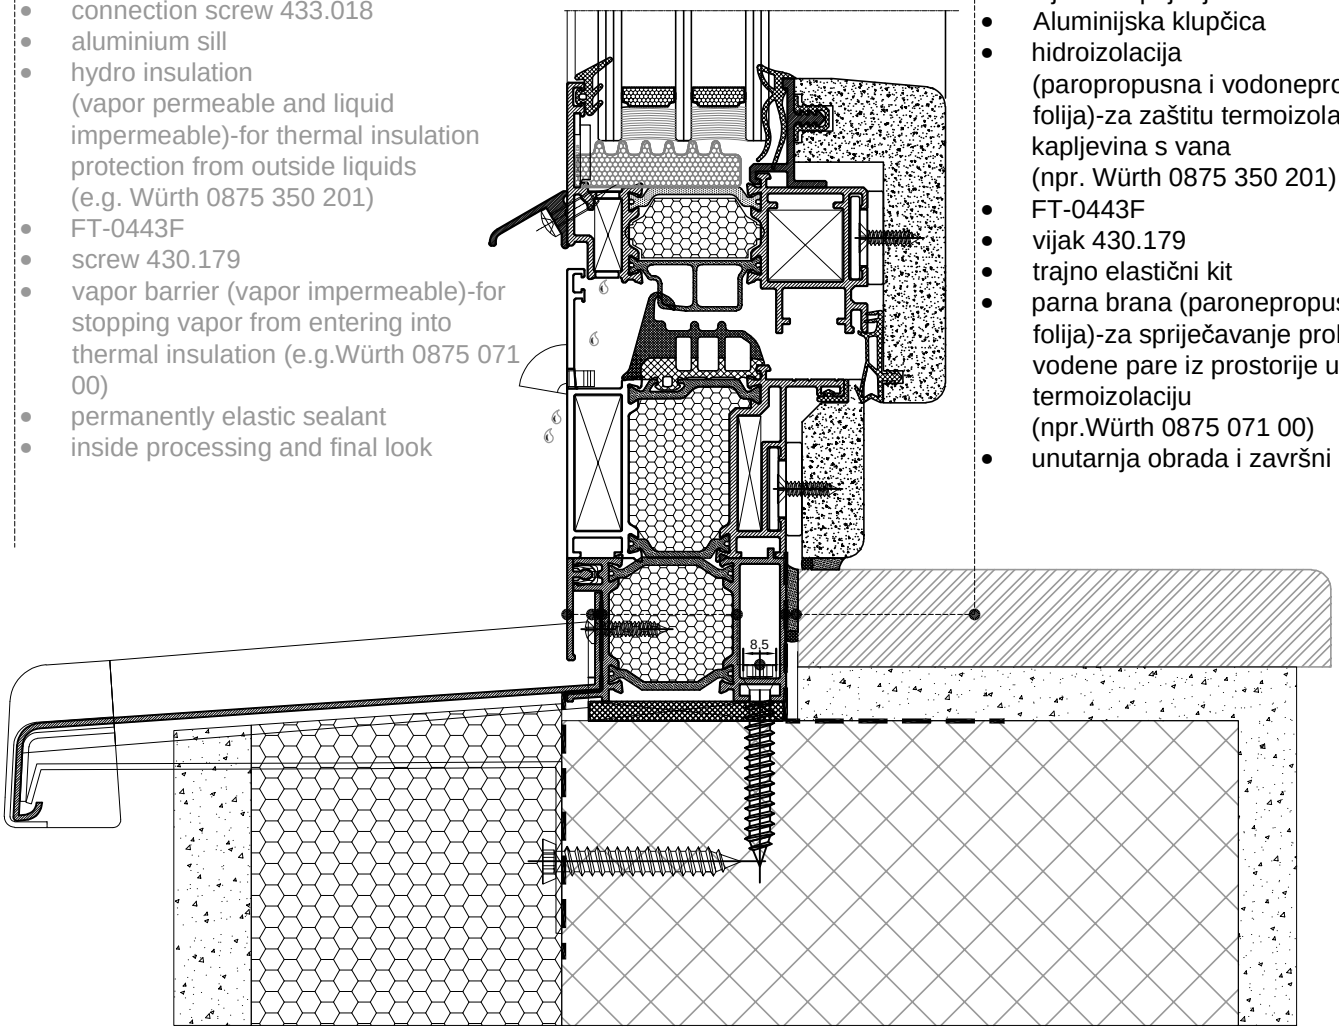

- aluminjski profil F-1552
- vijak za spajanje 433.018
- Aluminijska klupčica
- hidroizolacija (paropropusna i vodonepropusna folija)-za zaštitu termoizolacije od kapljevina s vana (npr. Würth 0875 350 201)
- FT-0443F
- vijak 430.179
- trajno elastični kit
- parna brana (paronepropusna folija)-za spriječavanje prolaska vodene pare iz prostorije u termoizolaciju (npr.Würth 0875 071 00)
- unutarnja obrada i završni izgled

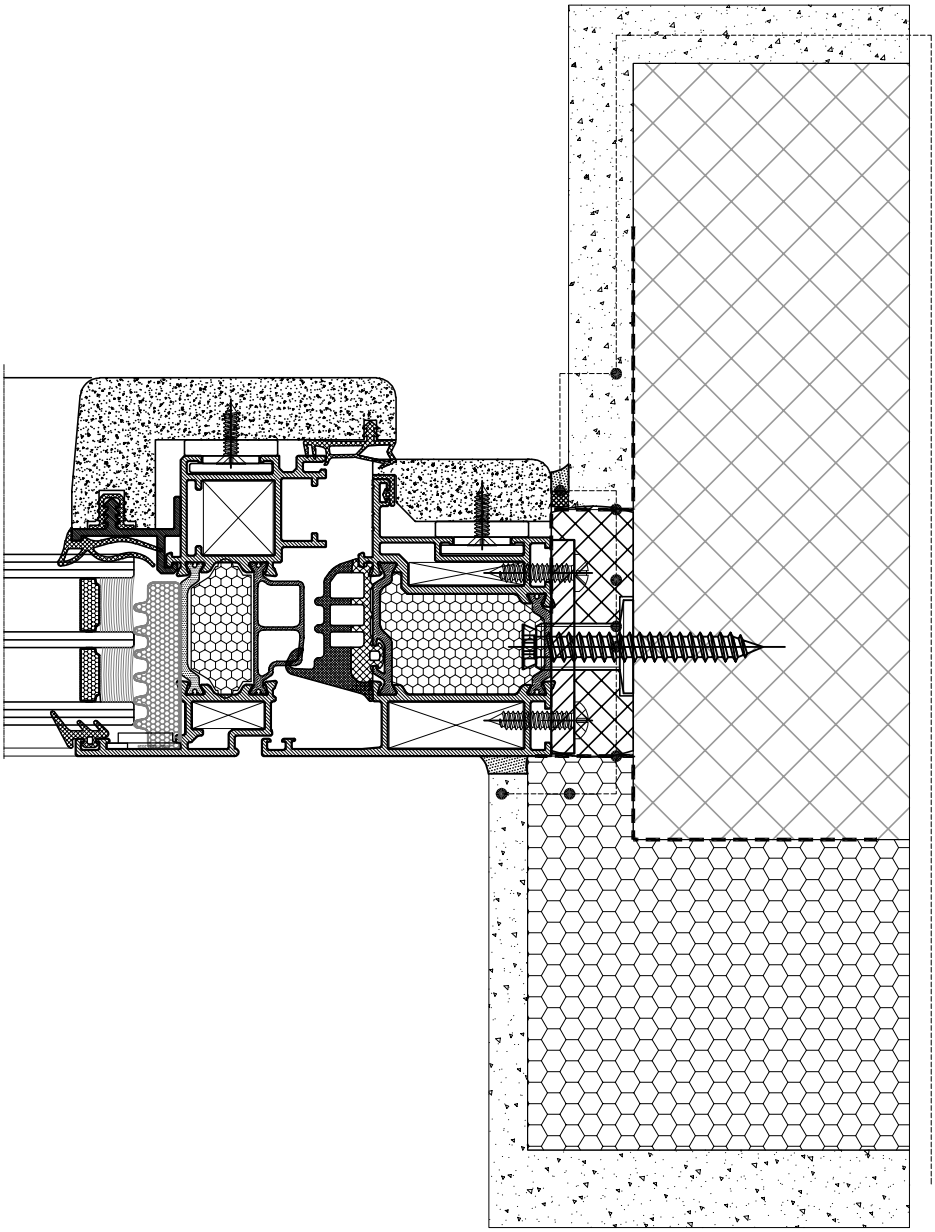

- vanjska žbuka
- termoizolacija
- hidroizolacija (paropropusna i vodonepropusna folija)-za zaštitu termoizolacije od kapljevina s vana
  (npr. Würth 0875 350 201)
- vijak 430.184
- element za ugradnju 521.107
- termoizolacija(exp. spužvica, pur-pjena)
- parna brana (paronepropusna folija)-za spriječavanje prolaska vodene pare iz prostorije u termoizolaciju
  (npr. Würth 0875 071 00)
- trajno elastični kit
- unutarnja obrada i završni izgled


- exterior plaster
- thermal insulation
- hydro insulation (vapor permeable and liquid impermeable)-for thermal insulation protection from outside liquids
  (e.g. Würth 0875 350 201)
- screw 730.184
- installation element 521.107
- termal insulation (exp. sponge, polyurethane foam)
- vapor barrier (vapor impermeable)-for stopping vapor from entering into thermal insulation
  (e.g. Würth 0875 071 00)
- permanently elastic sealant
- inside processing and final look


MONTAŽA ELEMENTA ZA UGRADNJU


1. Na profilu rama, kroz oba poliamida izbušiti rupu Ø13 mm na udaljenosti 28.2 od kraja vanjske strane profila.
2. PVC vijak s pločicom dovesti u položaj otvora Ø13 mm.
3. Vijcima 4.8x22 */DIN 7981/* pločicu s PVC vijkom pričvrstiti za stijenku profila.
4. Imbus ključem 6 mm, s unutarnje strane profila, kroz otvor Ø13 mm zaokretanjem PVC vijka dovodimo prozor u *ispravan* položaj.
5. Vijkom 430.184 /FFS 7.5x62/ kroz profil i PVC vijak, fiksirati položaj prozora.
6. Element za ugradnju (521.107) montirati na udaljenosti cca 250 mm od krajeva profila rama, a razmak između 2 elementa za ugradnju je max. 500 mm.


MONTAGE OF ELEMENTS FOR INSTALLATION


1. On the frame profile drill Ø13 mm hole with 28.2 mm distance from the end of the exterior side of the profile.
2. Place the PVC screw with the plate in position of the Ø13 mm hole.
3. Fasten the plate with the PVC screw on the profile wall with the screws 4.8x22 */DIN 7981/.*
4. Rotate the PVC screw from the interior side of frame profile with Allen key 6 mm through Ø 13 mm hole to bring the window in the correct position.
5. Fix a window with the screw 430.184 /FFS 7.5x62/ through the frame profile and the PVC screw.
6. Mount the installation element (521.107) at a distance of about 250 mm from the ends of the profile, whereby is the max. distance between the two installation elements 500 mm.

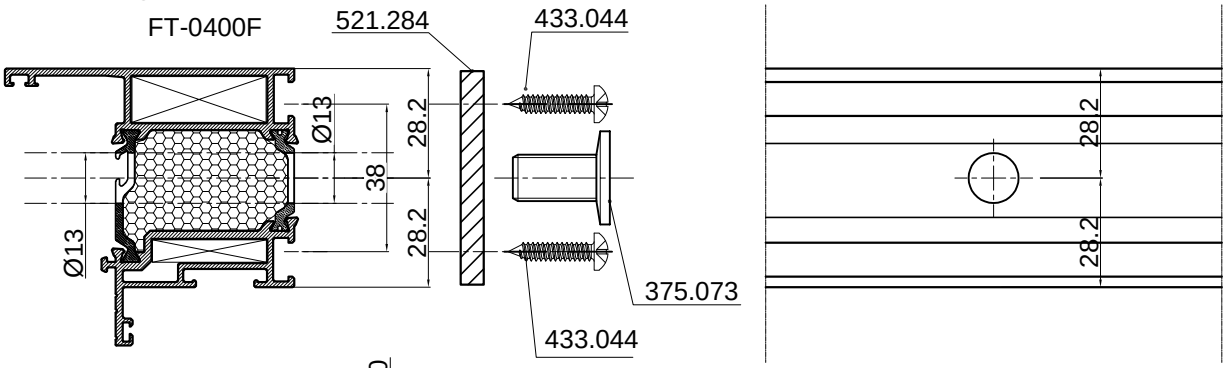

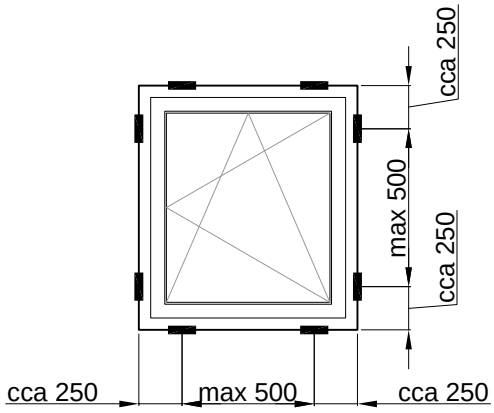

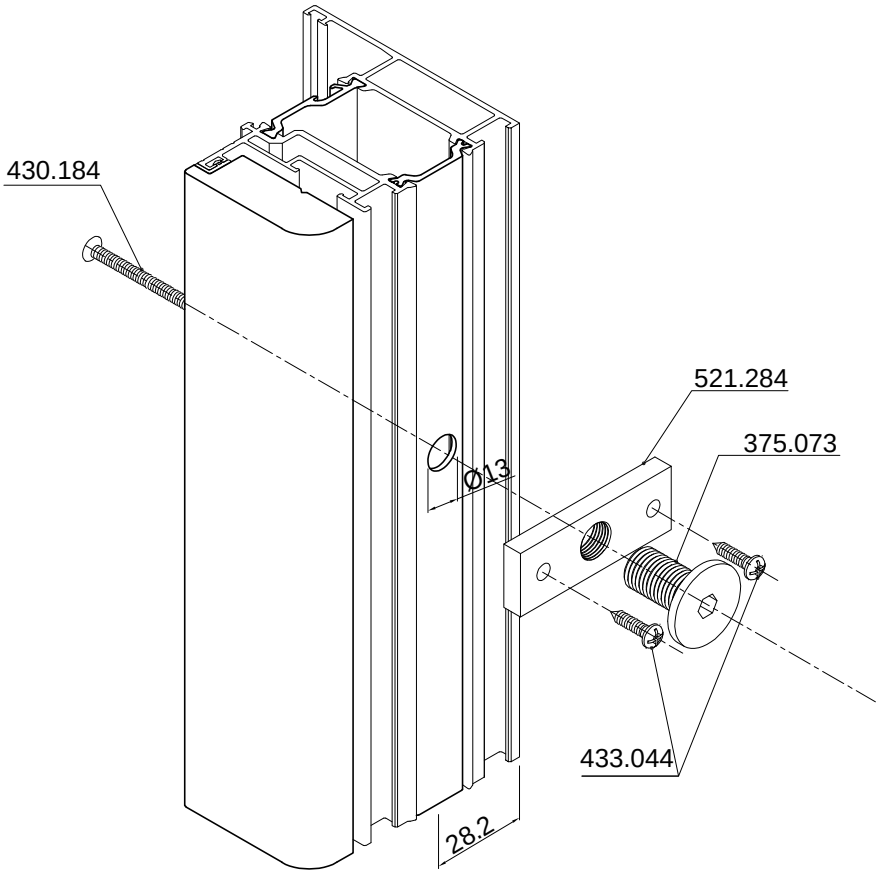

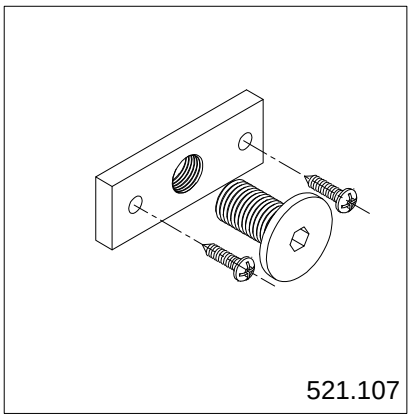

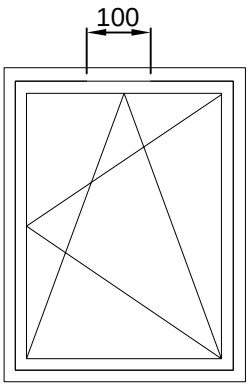

UPORABA BRTVE 314.001

-Ako je prozor izložen većoj količini padalina, postoji mogućnost da dođe do "zagušenja" (otvori za kondenzat na profilu rama ne mogu odvesti sve kapljevine koje uđu u za to predviđeni prostor u profilu rama), te postoji mogućnost ulaska vode u unutarnji dio profila tj. u objekt. Da bi se ovo spriječilo preporučuje se uporaba brtve 314.001.

-Brtvu 314.001 umetnuti po opsegu prozora osim u gornjem pojasu gdje se prekida radi omogućavanja ventilacije prozora (vidjeti skicu).


-Korištenje brtve 314.001 zahtjeva uporabu kutnika 730.001 umjesto kutnika 730.002

APPLICATION OF THE GASKET 314.001

-If the window is exposed to a larger amount of precipitation, there is possibility for "congestion" (openings for condensate on the frame profile can't take out all the liquids that enter the appropriated space in the frame profile), and possibility of entering liquids into interior part of profile ie. into object. Hence, for prevention, it is recommended to use the gasket 314.001.


-Place the gasket 314.001 around window circumference except in upper portion where part of the gasket needs to be removed for window ventilation (see scheme).


-Usage of the gasket 314.001 demands usage of the corner bracket 730.001 instead of 730.002

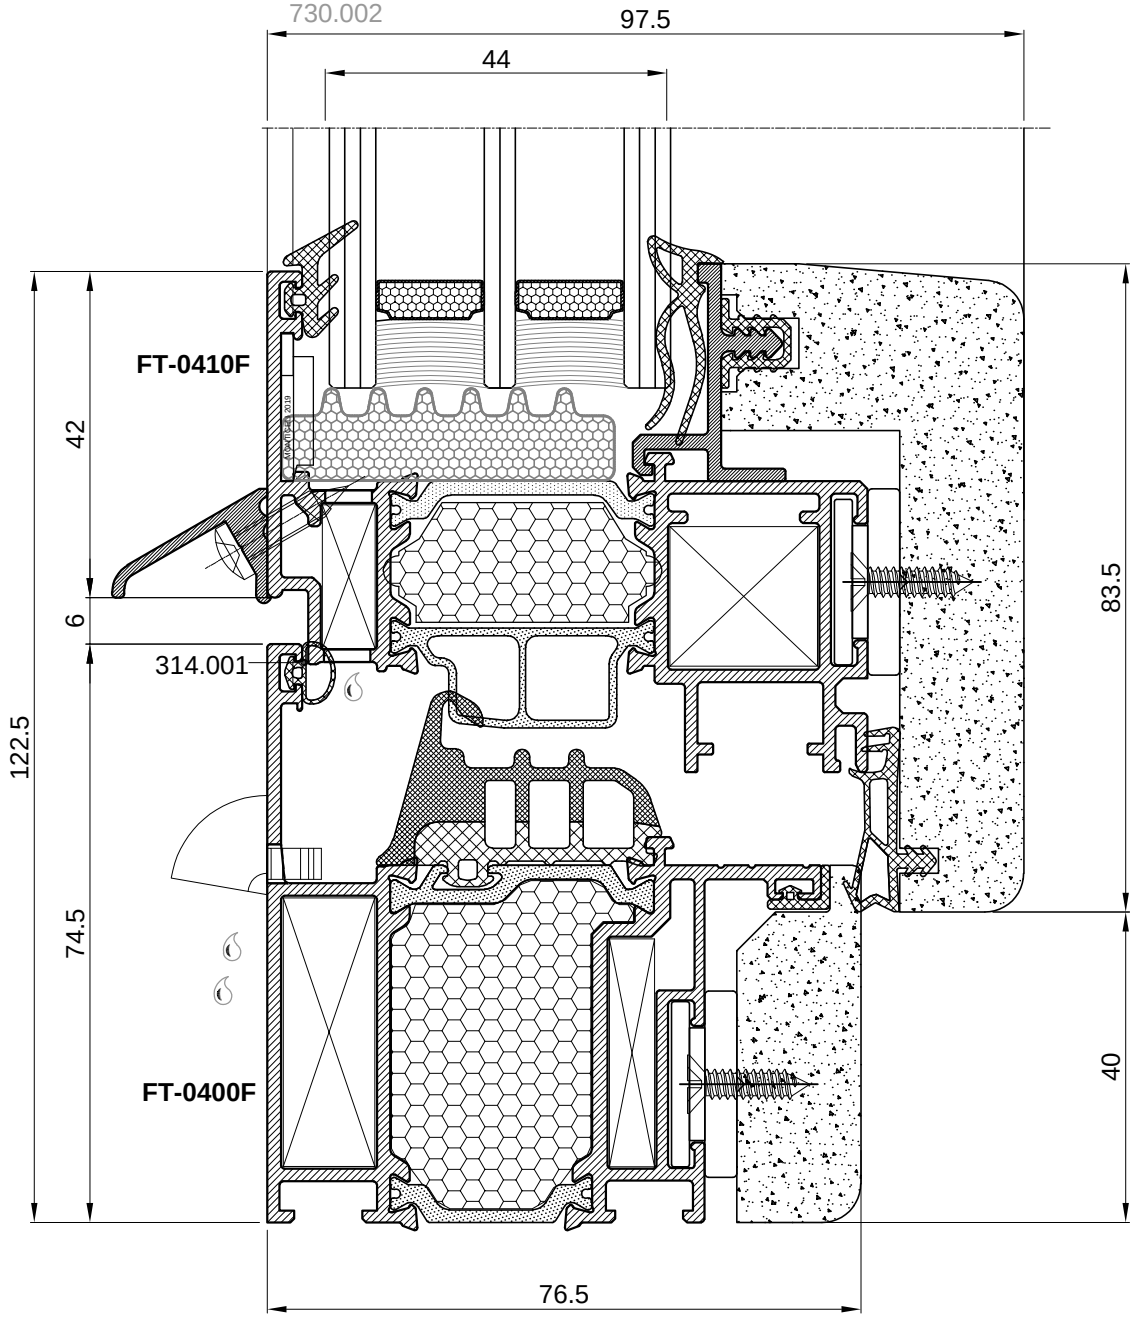


UPREŠAVANJE STIJENKE PROFILA U KUTNU SPOJNICU
AL.PROFILE CORNER CRIMPING


FT-0400F

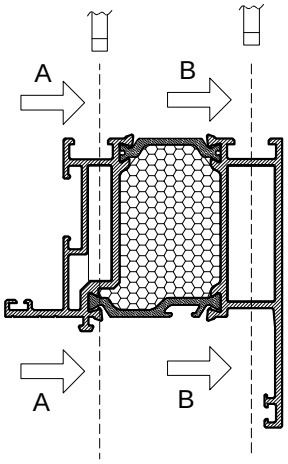

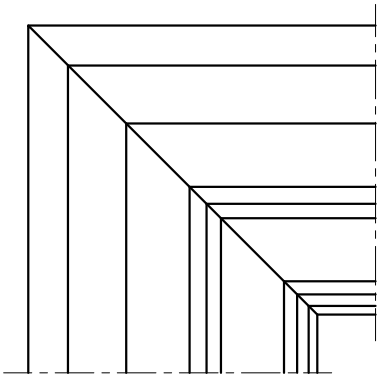


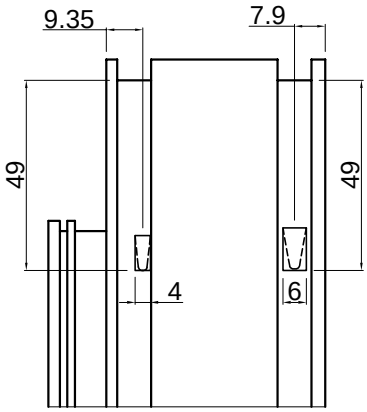


Spajanje kutnikom 710.163
uprešavanjem stijenke profila
prema kutniku
Corn. brac. connection 710.163
aluminium profile corner crimping

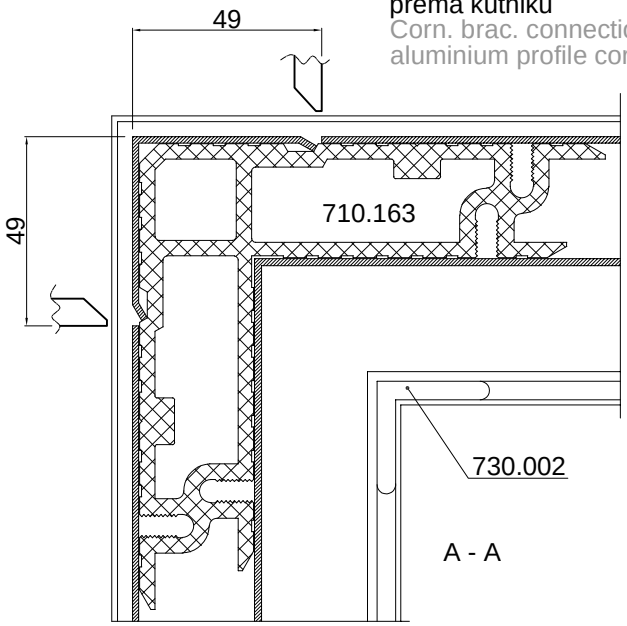


Spajanje kutnikom 710.091
uprešavanjem stijenke profila
prema kutniku
Corn. brac. connection 710.091
aluminium profile corner
crimping

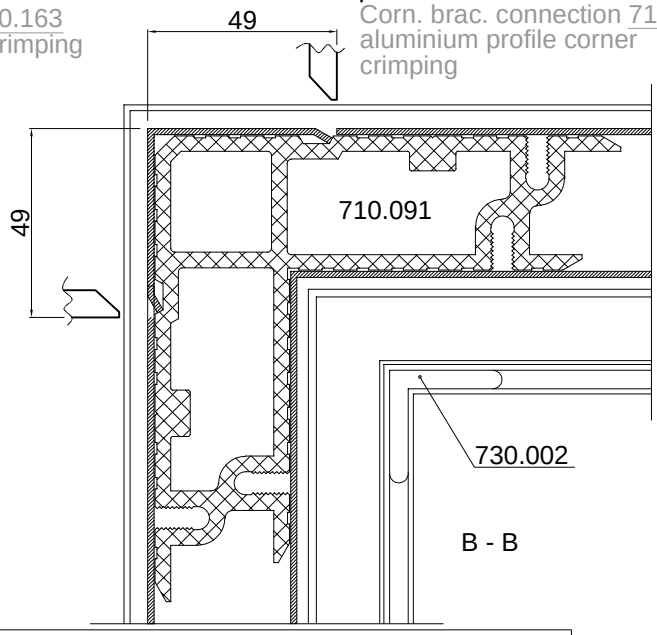

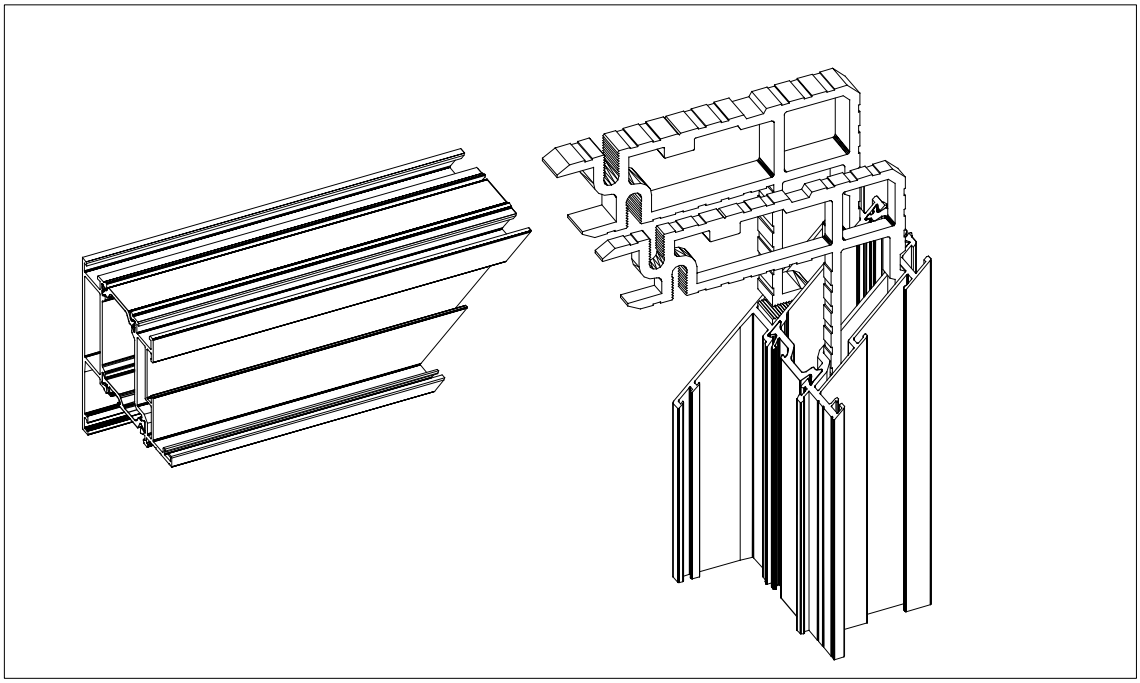


FT-0400F


UPREŠAVANJE STIJENKE PROFILA U KUTNU SPOJNICU KAO I SPAJANJE PROFILA I KUTNE SPOJNICE VIJKOM
AL.PROFILE CORNER CRIMPING AND SCREW CONNECTION BETWEEN PROFILE AND COR. BRACK.

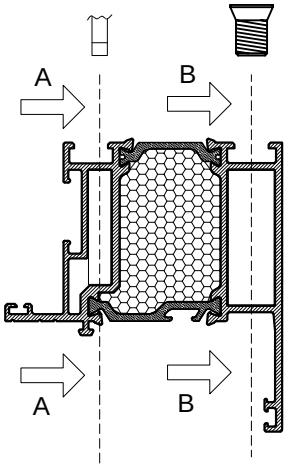


- Processing on the frame profile FT-0400F
Processing profile with drilling on drill press
Tool: end mill Ø 10.5
template 230.001


- Obrada na profilu rama FT-0400F
Obrada profila bušenjem na stubnoj bušilici Alat: svrdlo Ø 10.5
šablon 230.001

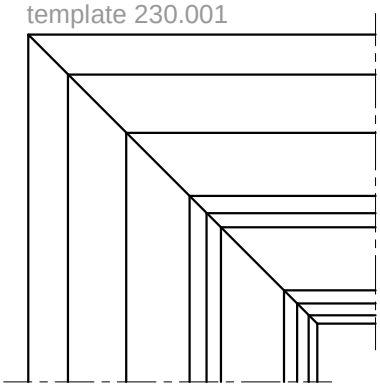

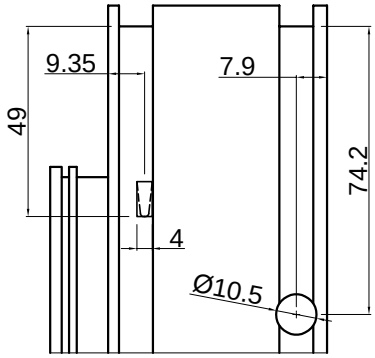


Spajanje kutnikom 710.163 upreševanjem stijenke profila prema kutniku
Corn. brac. connection 710.163 aluminium profile corner crimping

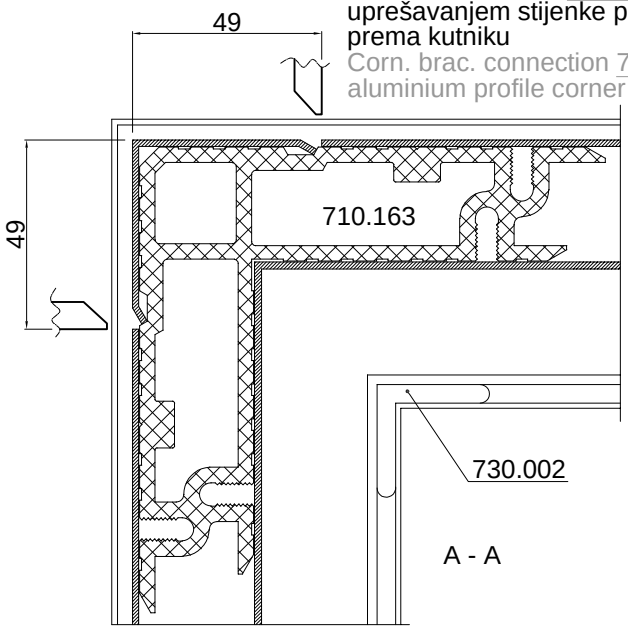

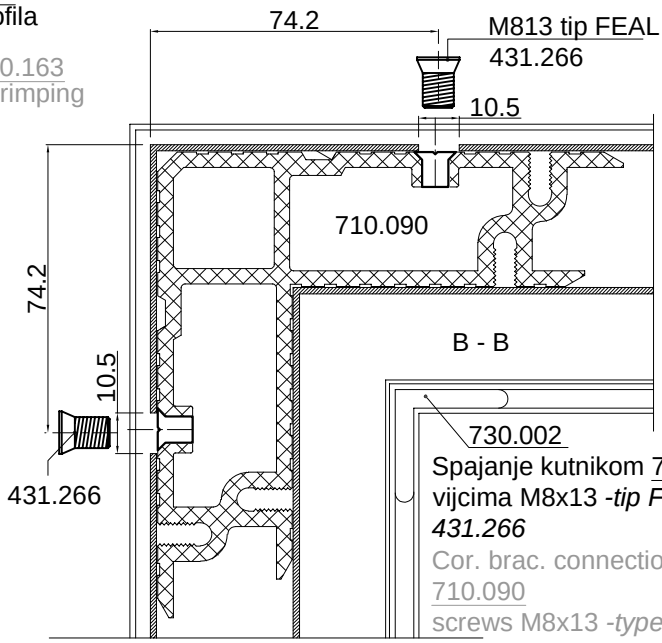



Spajanje kutnikom 710.090 vijcima M8x13 *-tip Feal- 431.266*
Cor. brac. connection 710.090 screws M8x13 *-type Feal - 431.266*

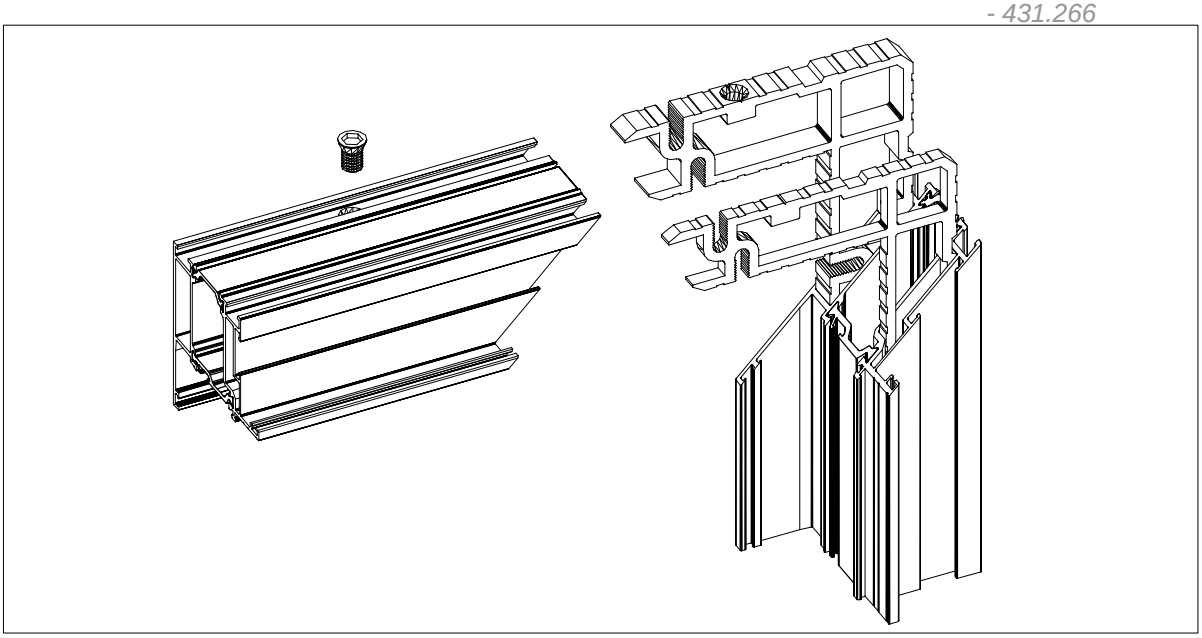


FT-0410F


UPREŠAVANJE STIJENKE PROFILA U KUTNU SPOJNICU
AL.PROFILE CORNER CRIMPING

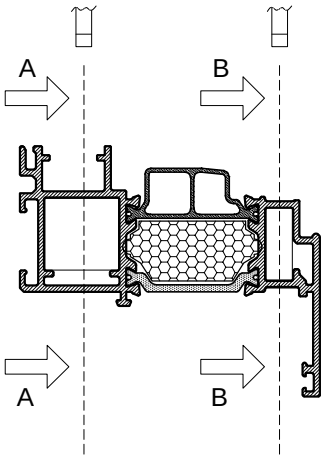



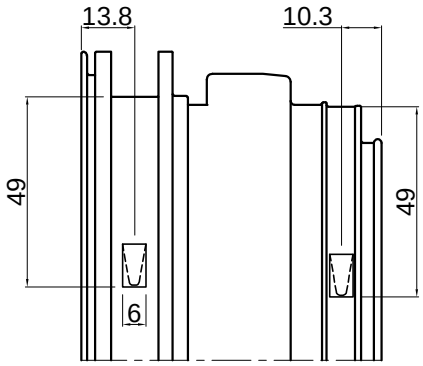


Spajanje kutnikom 710.164
upreševanjem stijenke profila u kutnik
Corn. brac. connection 710.164
al. profile corner crimping

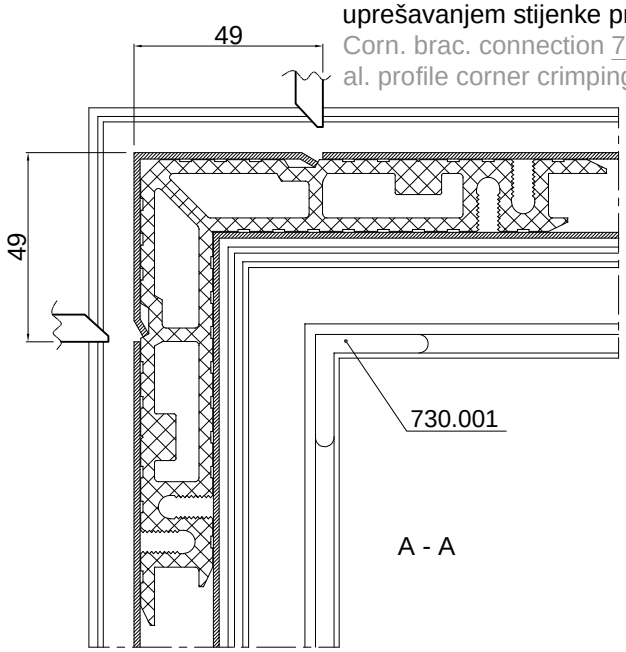


A - A

Spajanje kutnikom 710.129
upreševanjem stijenke profila u kutnik
Corn. brac. connection 710.129
al. profile corner crimping

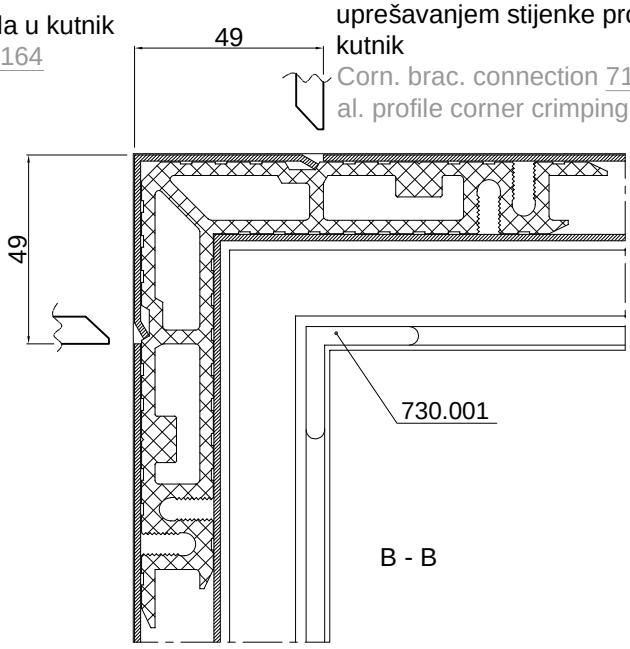


B - B

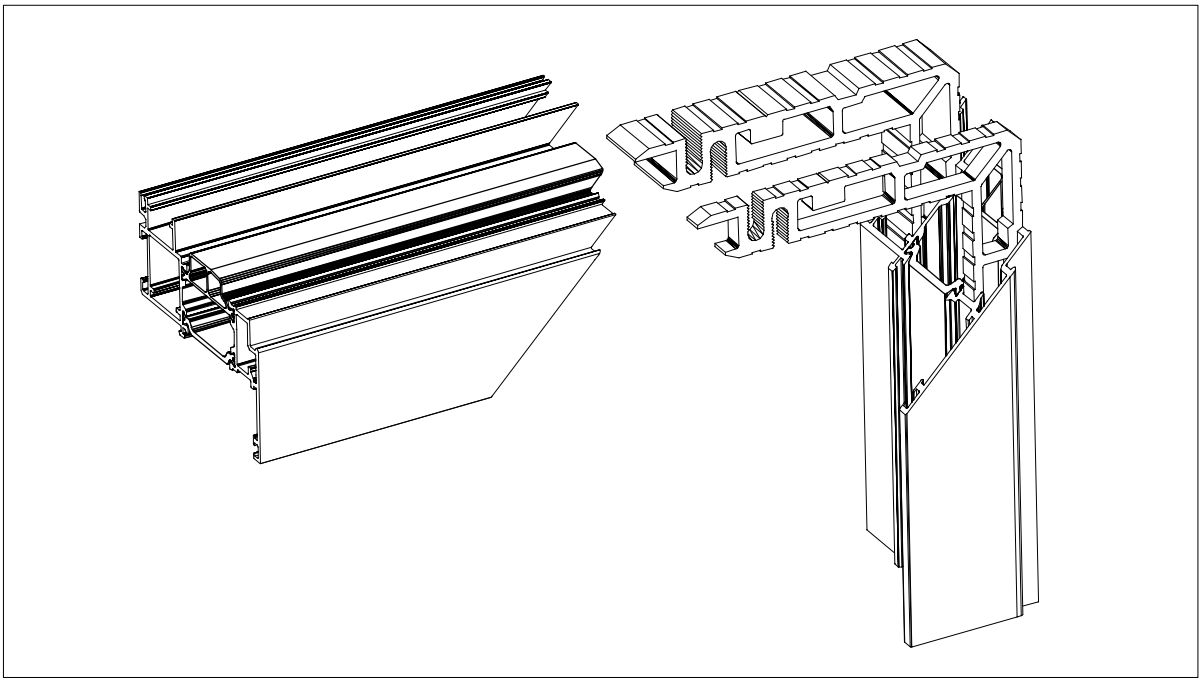


FT-0410F

UPREŠAVANJE STIJENKE PROFILA U KUTNU SPOJNICU KAO I SPAJANJE PROFILA I KUTNE SPOJNICE VIJKOM
AL.PROFILE CORNER CRIMPING AND SCREW CONNECTION BETWEEN PROFILE AND COR. BRACK.

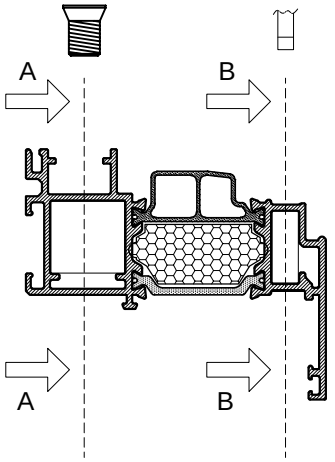


- Processing on the sash profile FT-0410F

Processing profile with drilling on drill press
Tool: end mill Ø 10.5
template 230.001




- Obrada na profilu krila FT-0410F


Obrada profila bušenjem na stubnoj bušilici
Alat: svrdlo Ø 10.5
šablon 230.001

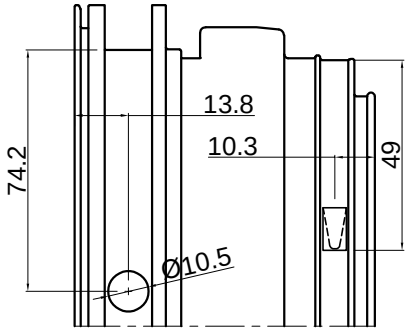


Spajanje kutnikom 710.165
vijcima M8x13 *-tip Feal*
Corner bracket connection 710.165
screws M8x13 *-type Feal*

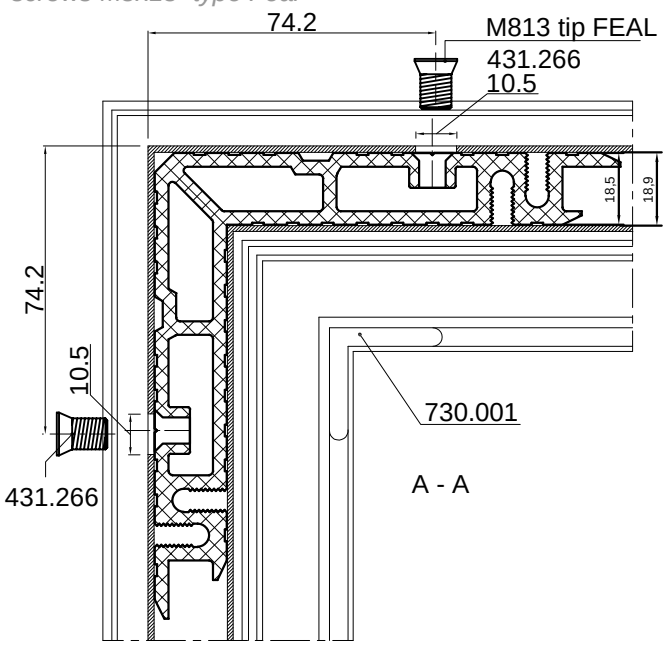


Spajanje kutnikom 710.129
uprešavanjem stijenke profila
prema kutniku
Corn. brac. connection 710.129
al. profile corner crimping

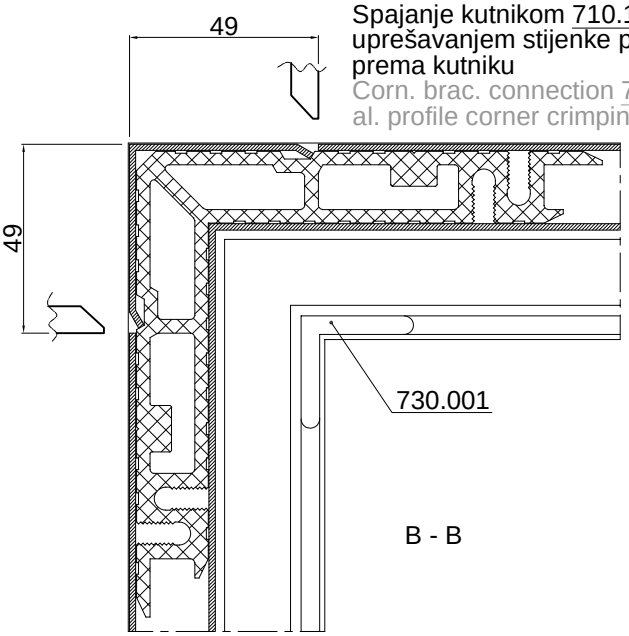


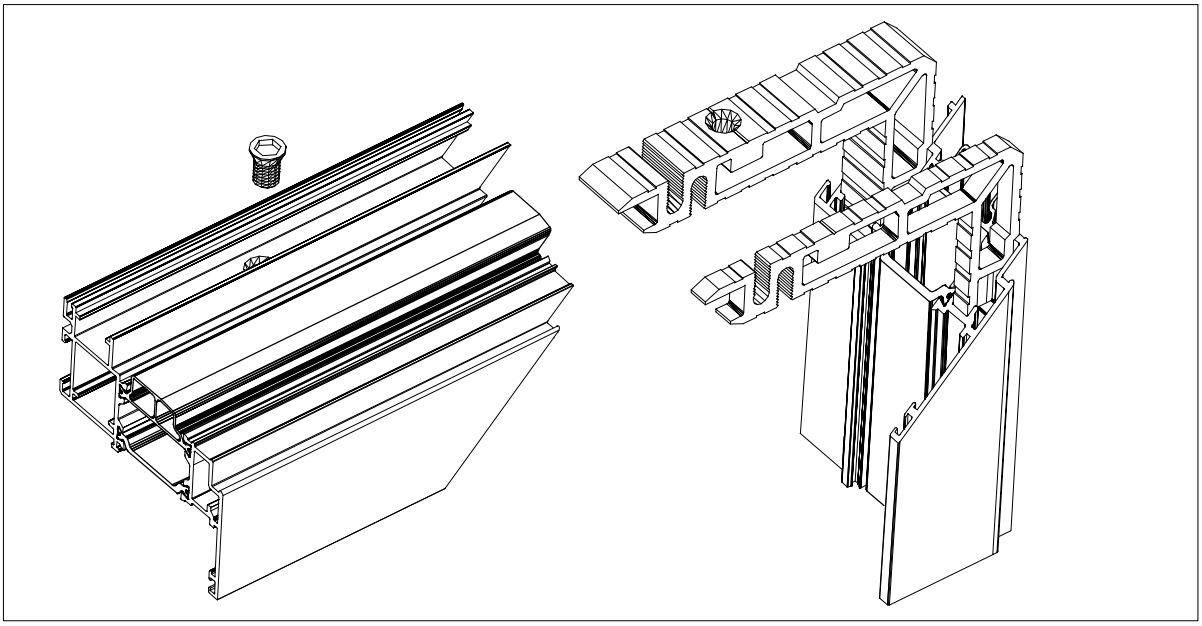


FT-0411F


UPREŠAVANJE STIJENKE PROFILA U KUTNU SPOJNICU
AL.PROFILE CORNER CRIMPING

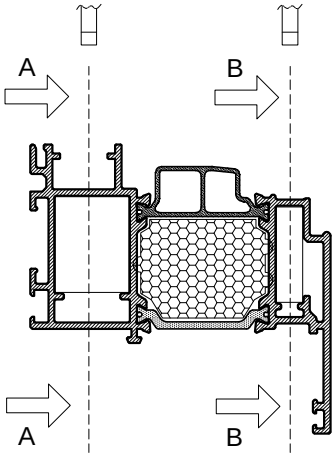

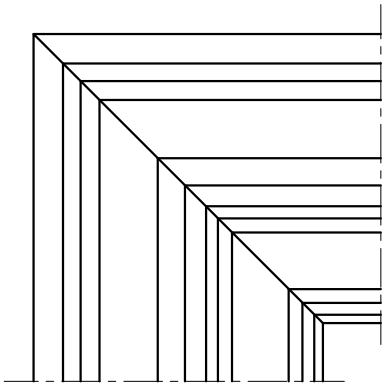


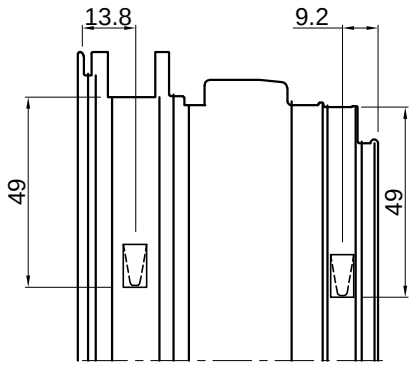


Spajanje kutnikom 710.166
uprešavanjem stijenke profila
prema kutniku
Corn. brac. connection 710.166
al. profile corner crimping

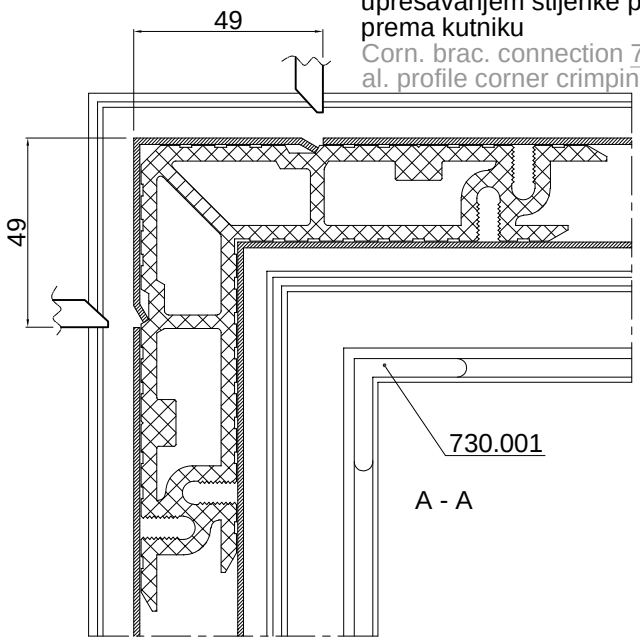


Spajanje kutnikom 710.157
uprešavanjem stijenke profila
prema kutniku
Corn. brac. connection 710.157
al. profile corner crimping

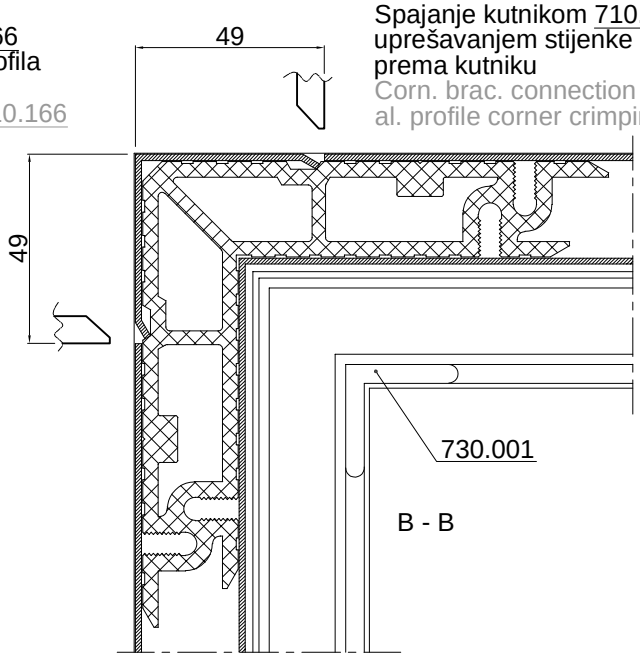

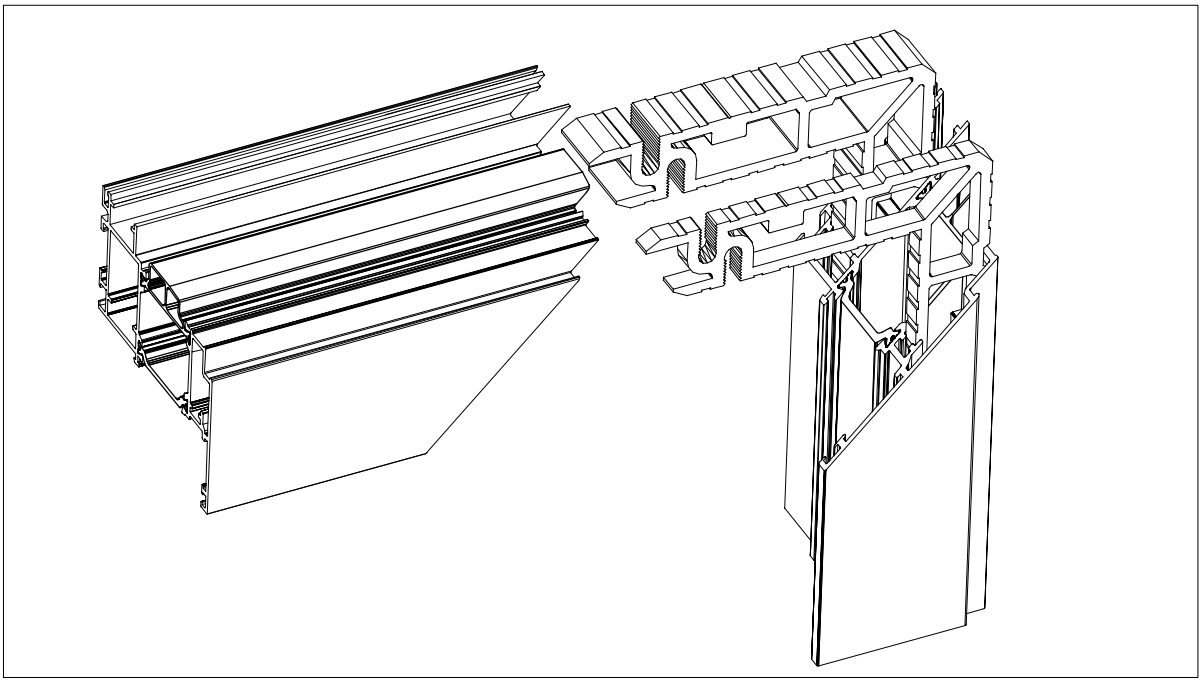



FT-0411F

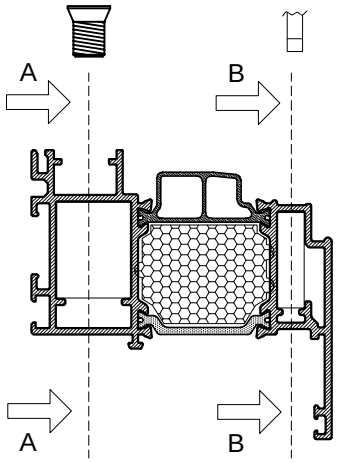

UPREŠAVANJE STIJENKE PROFILA U KUTNU SPOJNICU KAO I SPAJANJE PROFILA I KUTNE SPOJNICE VIJKOM

AL.PROFILE CORNER CRIMPING AND SCREW CONNECTION BETWEEN PROFILE AND COR. BRACK.

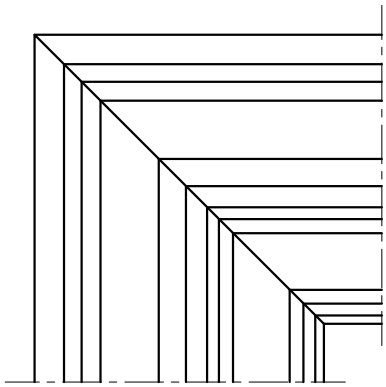

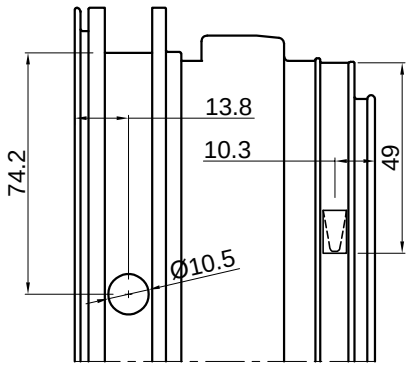


- Obrada na profilu krila FT-0411F

Obrada profila bušenjem na stubnoj bušilici
Alat: svrdlo Ø 10.5
šablon 230.001

- Processing on the sash profile FT-0411F

Processing profile with drilling on drill press
Tool: end mill Ø 10.5
template 230.001

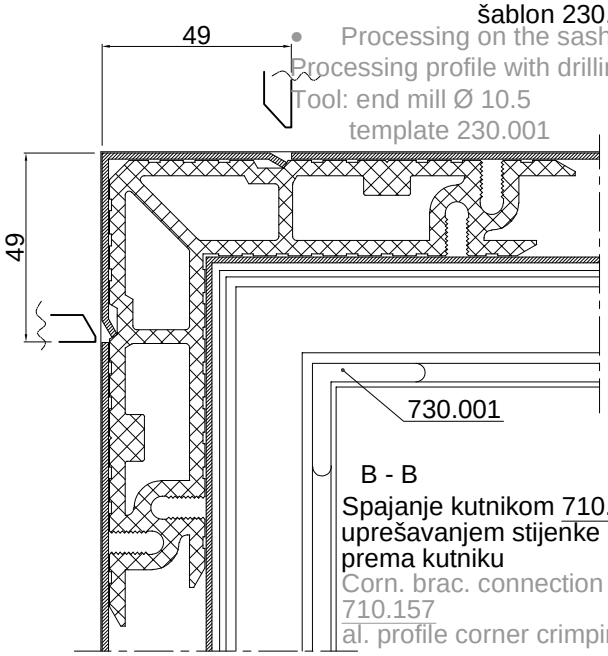


B - B

Spajanje kutnikom 710.157
uprešavanjem stijenke profila
prema kutniku

Corn. brac. connection
710.157
al. profile corner crimping

M813 tip FEAL
431.266


M813 type FEAL
431.266

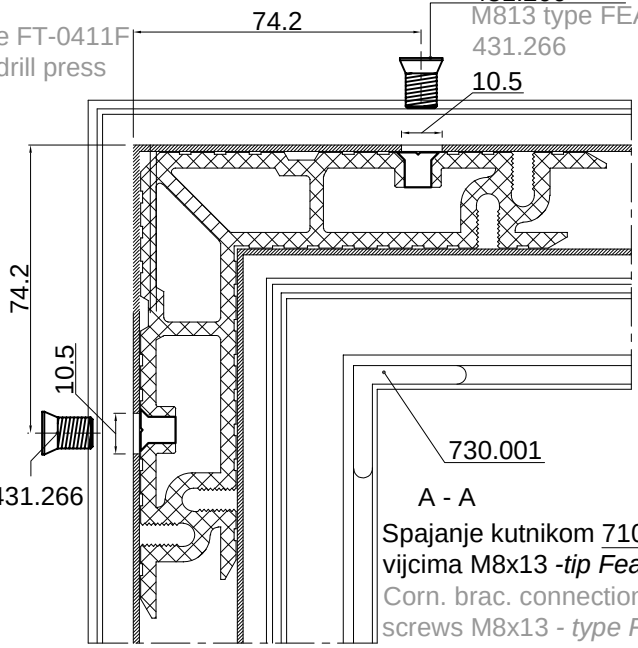

A - A

Spajanje kutnikom 710.167
vijcima M8x13 *-tip Feal*


Corn. brac. connection 710.167
screws M8x13 - *type Feal*

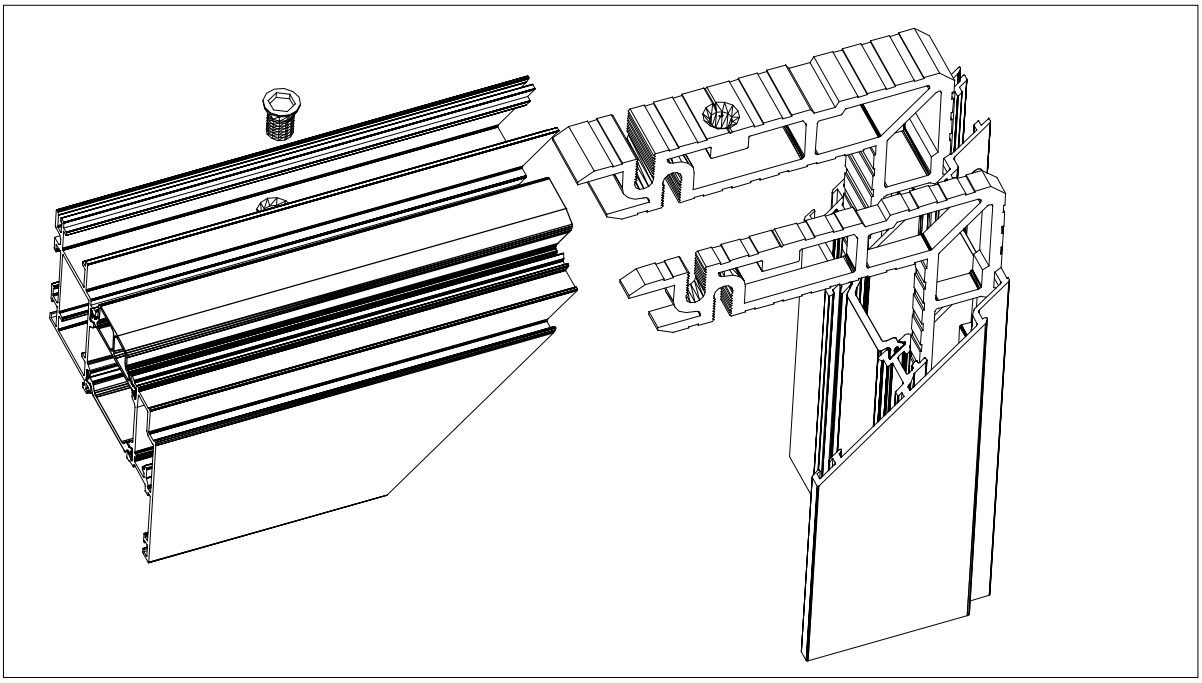


UPREŠAVANJE STIJENKE PROFILA U KUTNU SPOJNICU KAO I SPAJANJE PROFILA I KUTNE SPOJNICE VIJKOM

AL.PROFILE CORNER CRIMPING AND SCREW CONNECTION BETWEEN PROFILE AND COR. BRACK.

FT-0400F

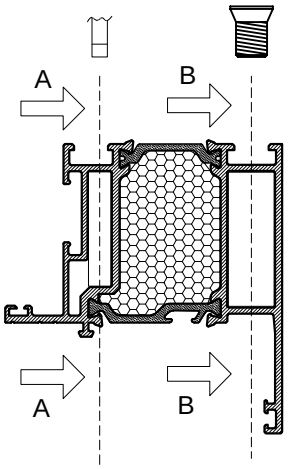

A - A

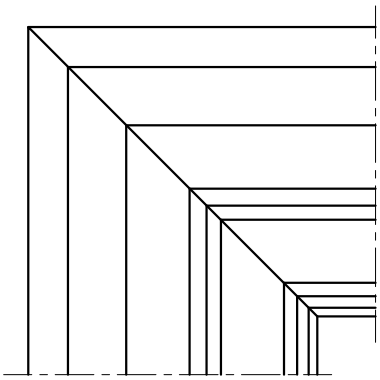



- Obrada na profilu rama FT-0400F


Obrada profila bušenjem na stubnoj bušilici
Alat: svrdlo Ø 10.5
šablon 230.001

- Processing on the frame profile FT-0400F


Processing profile with drilling on drill press
Tool: end mill Ø 10.5
template 230.001

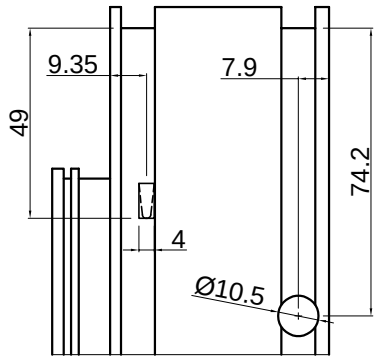

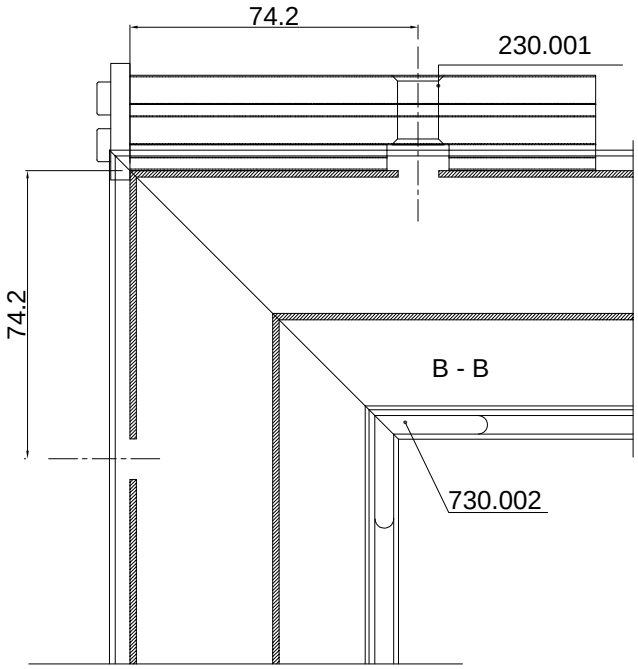

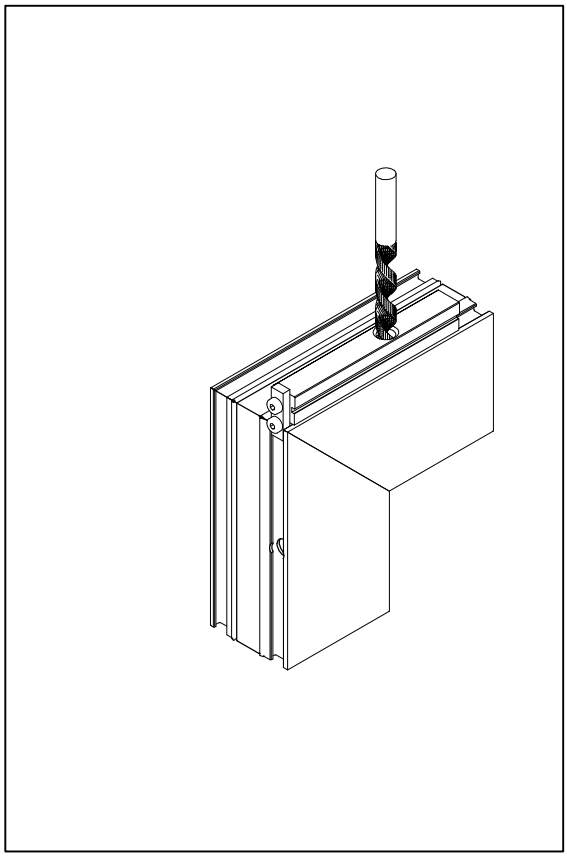

FT-0410F

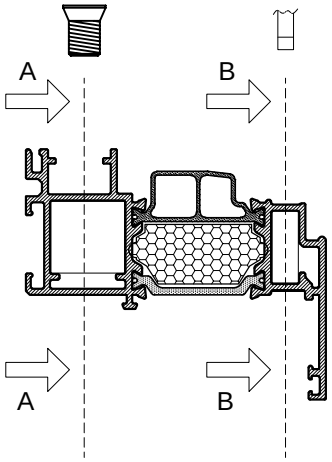

UPREŠAVANJE STIJENKE PROFILA U KUTNU SPOJNICU KAO I SPAJANJE PROFILA I KUTNE SPOJNICE VIJKOM


AL.PROFILE CORNER CRIMPING AND SCREW CONNECTION BETWEEN PROFILE AND COR. BRACK.


- Obrada na profilu krila FT-0410F

Obrada profila bušenjem na stubnoj bušilici Alat: svrdlo Ø 10.5
šablon 230.001


- Processing on the sash profile FT-0410F


Processing profile with drilling on drill press
Tool: end mill Ø 10.5
template 230.001



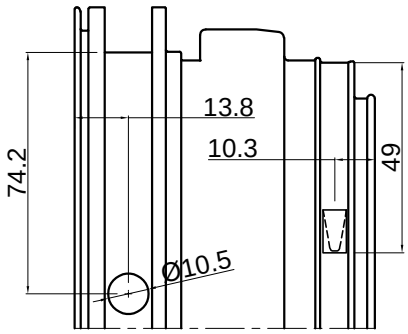


A - A

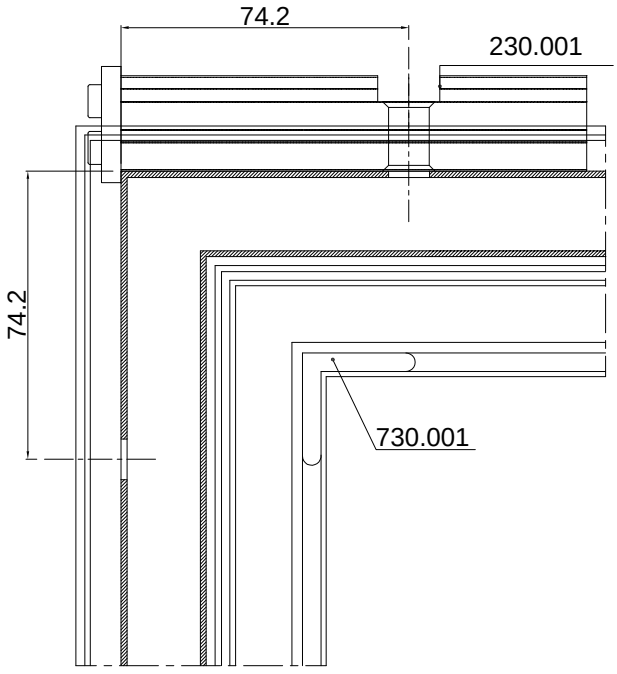


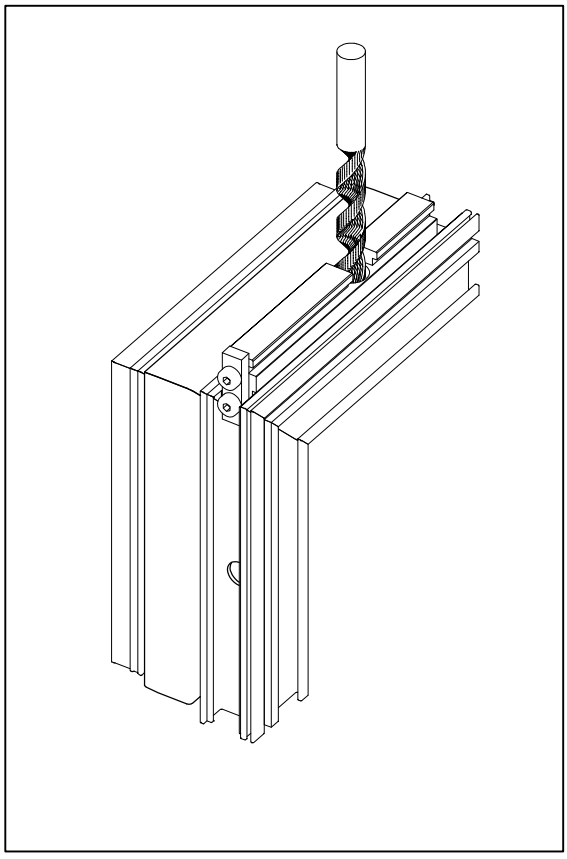

FT-0411F

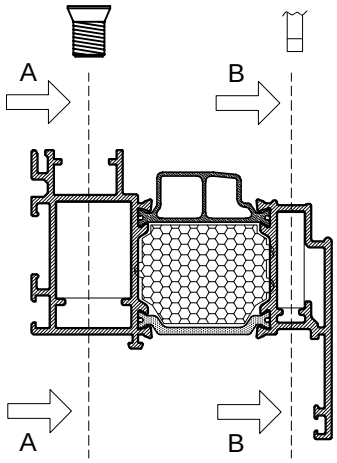

UPREŠAVANJE STIJENKE PROFILA U KUTNU SPOJNICU
KAO I SPAJANJE PROFILA I KUTNE SPOJNICE VIJKOM
AL.PROFILE CORNER CRIMPING AND
SCREW CONNECTION BETWEEN PROFILE AND COR. BRACK.

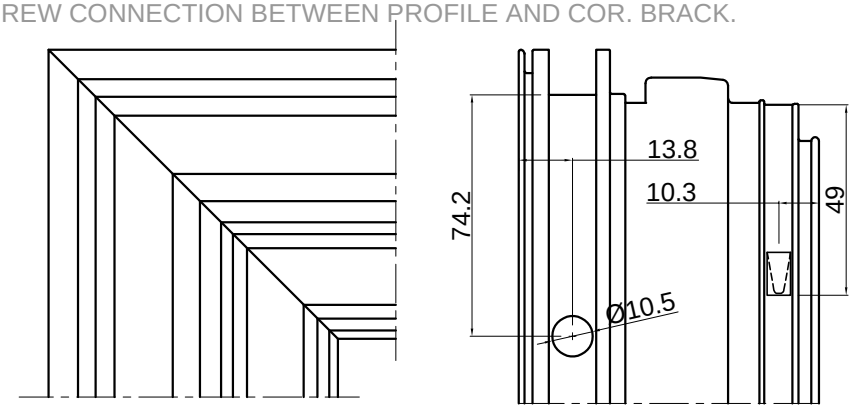


- Obrada na profilu krila FT-0411F


Obrada profila bušenjem na stubnoj bušilici Alat: svrdlo Ø 10.5
šablon 230.001

- Processing on the sash profile FT-0411F


Processing profile with drilling on drill press
Tool: end mill Ø 10.5
template 230.001

A - A

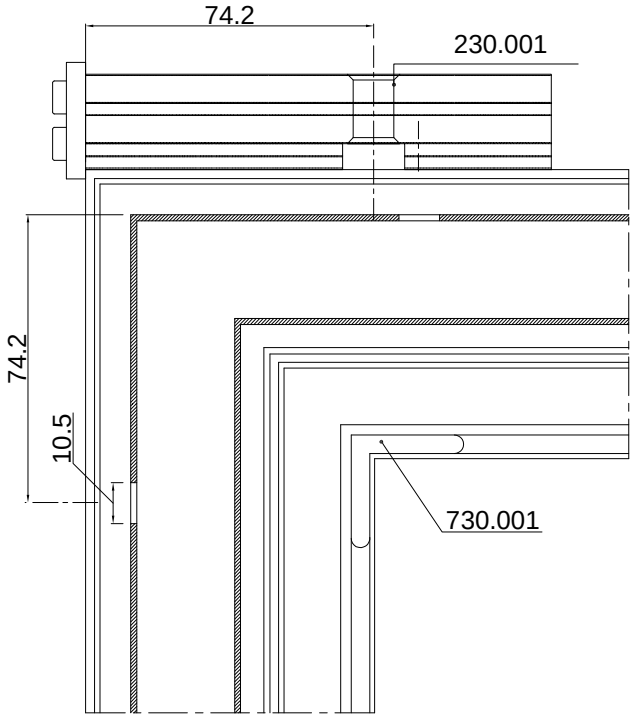

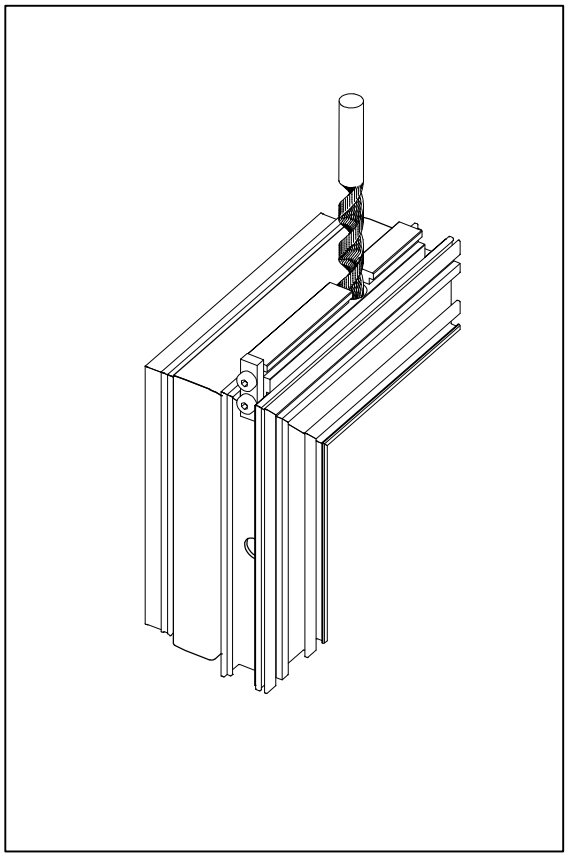

SPAJANJE PROFILA I KUTNE SPOJNICE VIJKOM
AL.PROFILE CORNER SCREW CONNECTION BETWEEN PROFILE AND COR. BRACK.

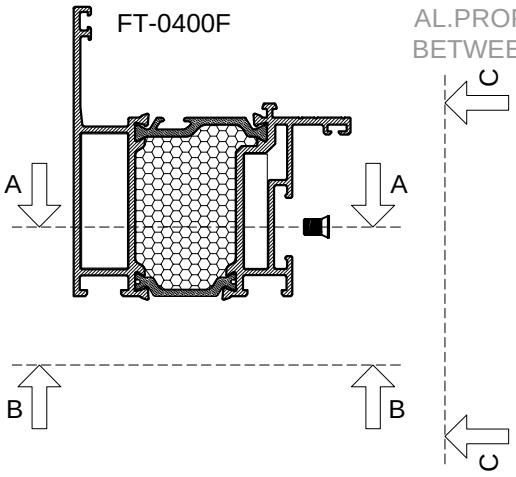


- Obrada na profilu rama FT-0400F


Obrada profila bušenjem na stubnoj bušilici
Alat: svrdlo Ø 8.5

- Processing on the frame profile FT-0400F


Processing profile with drilling on drill press
Tool: end mill Ø 8.5

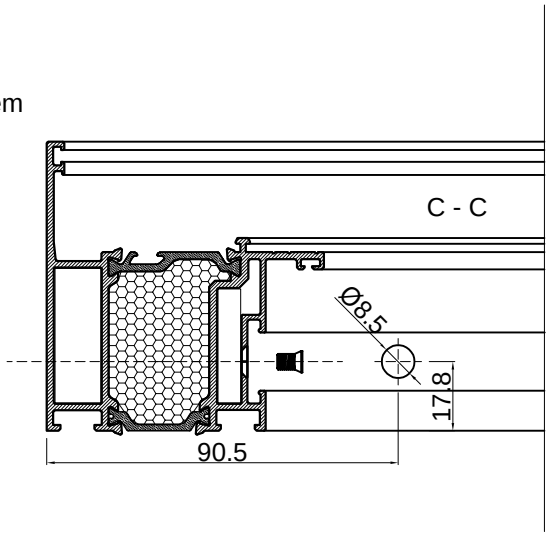

Spajanje kutnikom 710.431
vijcima M6x16 -*Tip FEAL- 431.293*
Cor. brac. connection 710.431
screws M6x16 -*Type FEAL - 431.293*

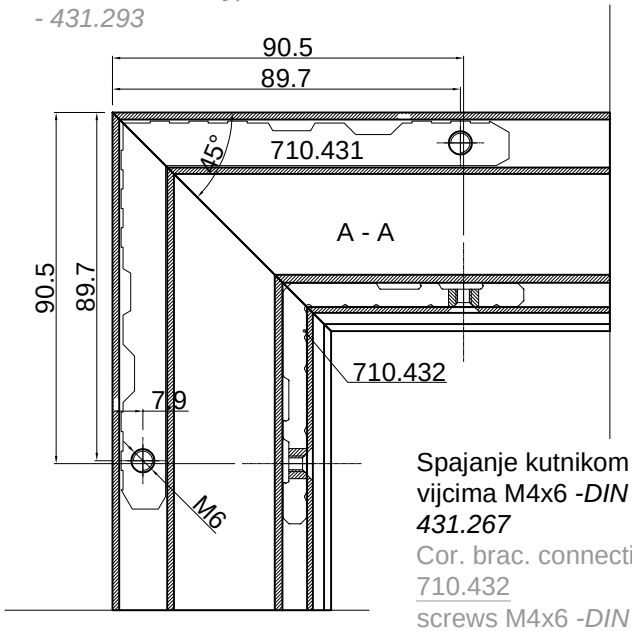

Spajanje kutnikom 710.432
vijcima M4x6 -*DIN 7991- 431.267*
Cor. brac. connection 710.432
screws M4x6 -*DIN 7991 - 431.267*

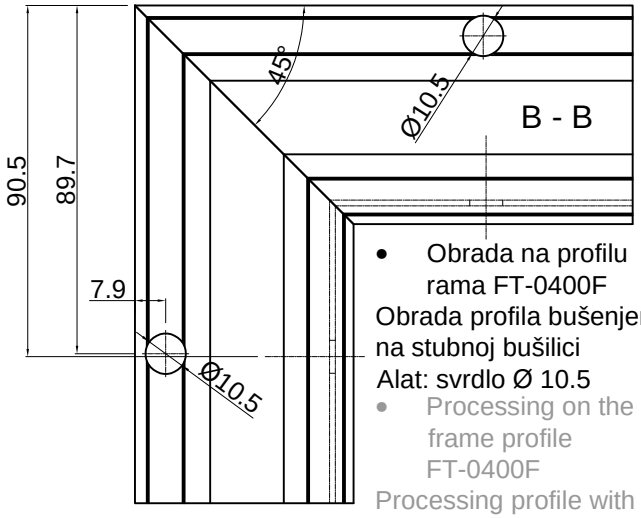


- Obrada na profilu rama FT-0400F


Obrada profila bušenjem na stubnoj bušilici
Alat: svrdlo Ø 10.5

- Processing on the frame profile FT-0400F


Processing profile with drilling on drill press
Tool: end mill Ø 10.5

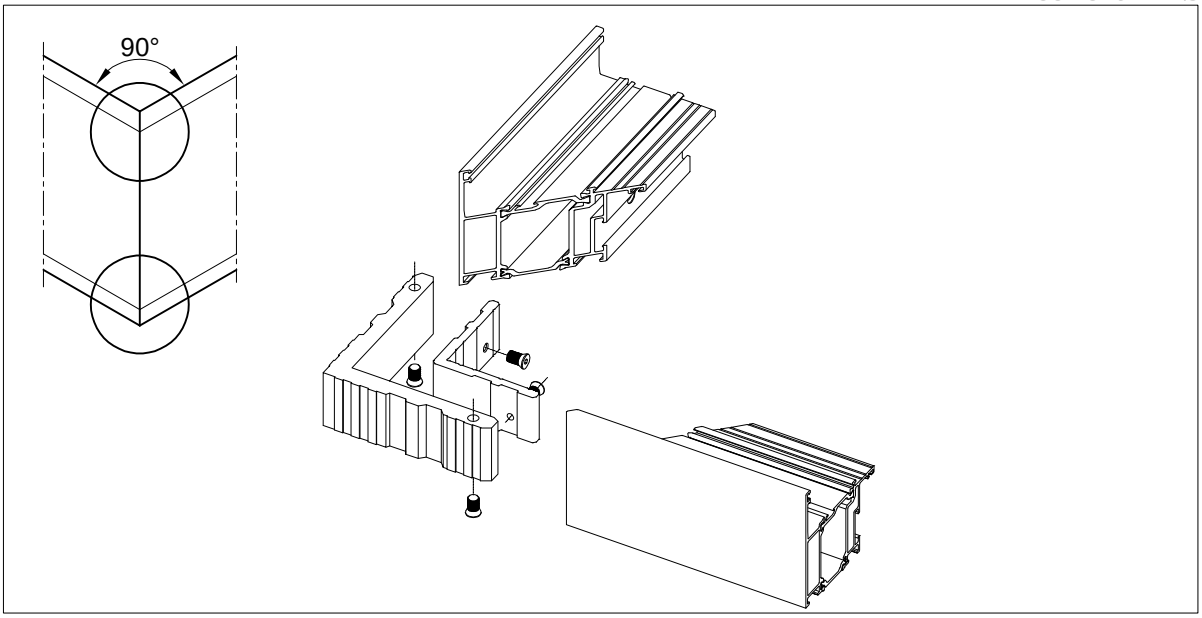


KLIPSANJE PROFILA OKAPNICE
CLAMPING OF THE DRIP CAP PROFILE




Raspored vijaka za klipsanje 433.204 (4.2.x13)
razmak između vijaka je 300 mm.
Clamping screws layout 433.204 (4.2x13)
distance between screws is 300 mm.

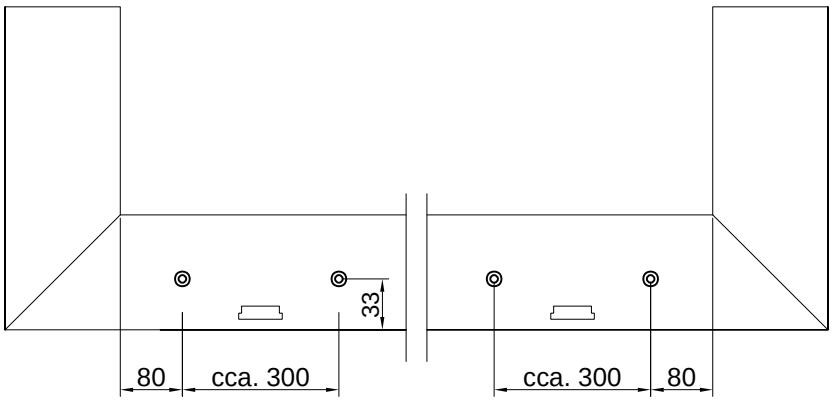

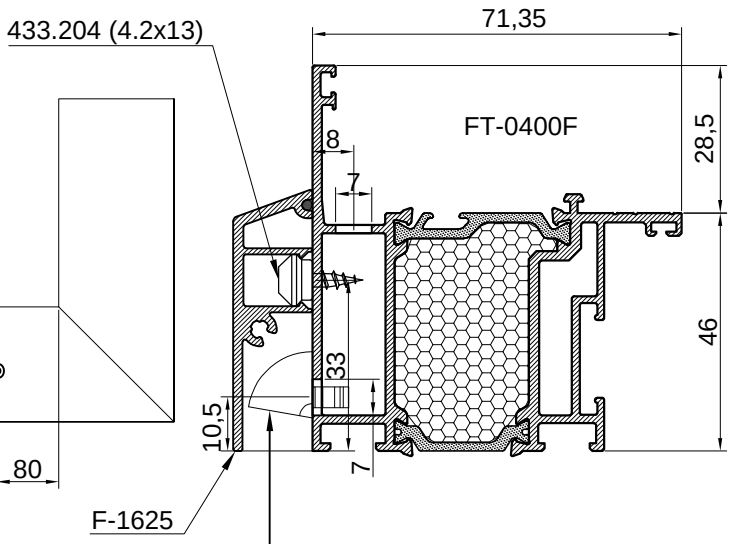


Maska s klapnom za drenažni otvor
370.070
Drainage slot mask with the flap
370.070

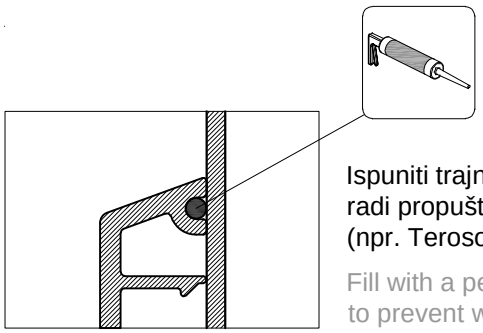

Ispuniti trajno elastičnim ljepilom
radi propuštanja vode
(npr. Teroson MS 939)

Fill with a permanently elastic adhesive
to prevent water leakage
(e.g. Teroson MS 939)

OBRADA PROFILA ZA ODVOD KAPLJEVINA
PROCESSING OF THE PROFILE FOR DRAINAGE

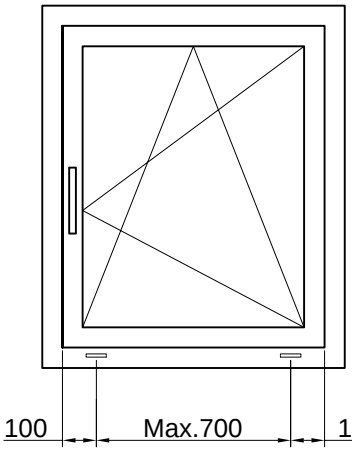


- Obrada na profilu rama FT-0400F za odvod kapljevina


Obrada profila glodanjem
Alat: vretenasto glodalo Ø7


- Processing on the frame profile FT-0400F for drainage

Process profile with milling
Tool: end mill Ø7


Presjek A-A
Cross-section A-A

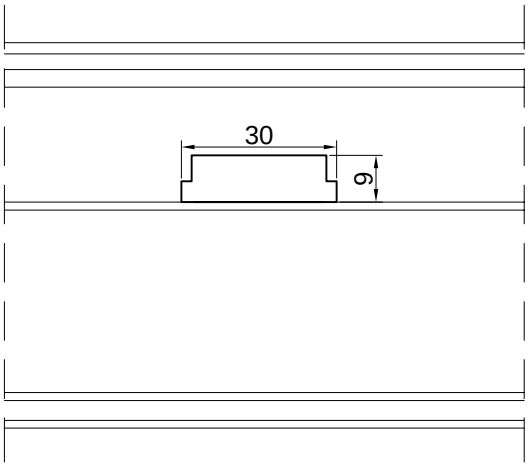

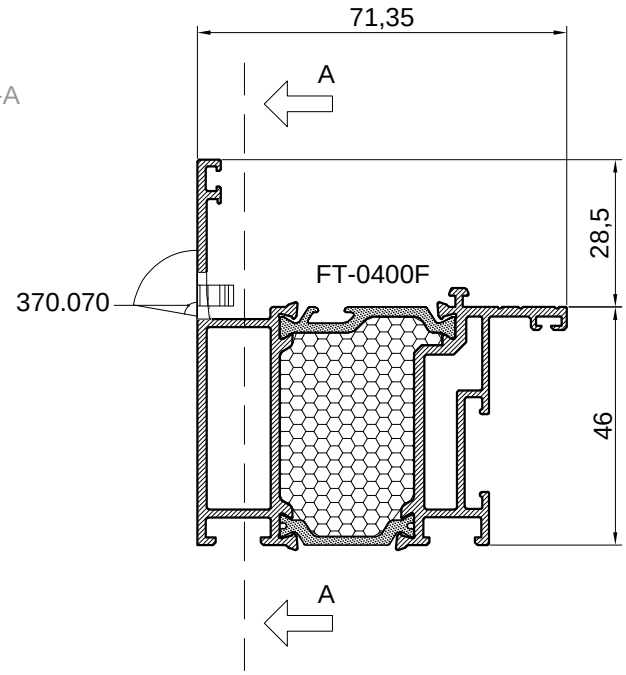

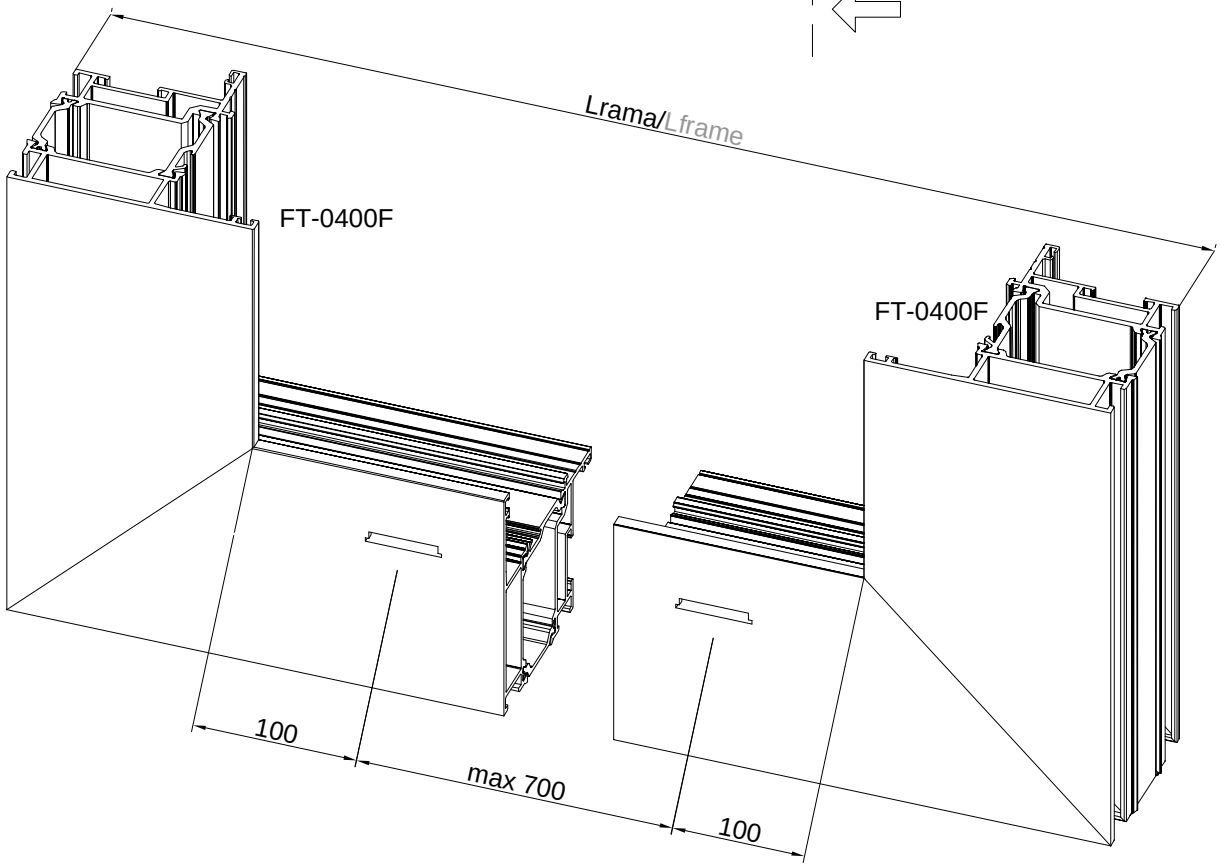


OBRADA PROFILA ZA ODVOD KAPLJEVINA
PROCESSING OF THE PROFILE FOR DRAINAGE

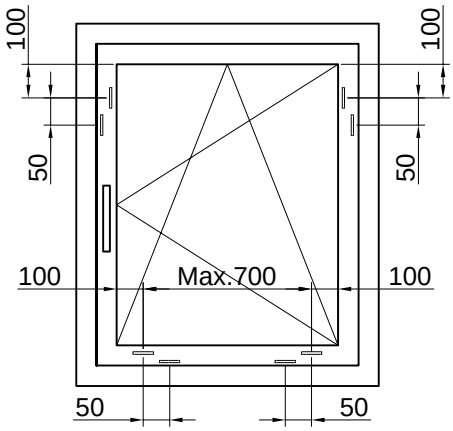



- Obrada na profilu krila FT-0410F za odvod kapljevina i ventiliranje komora krila prozora
Obrada donjeg pojasa krila / glodanjem
Obrada vertikalnog pojasa krila / glodanjem
Alat: vretenasto glodalo Ø5


- Processing on the sash profile FT-0410F for drainage and window sash chamber ventilation
Processing of the lower sash zone / milling
Processing of the vertical sash zone / milling
Tool: end mill Ø5

Presjek A-A
Cross-section A-A

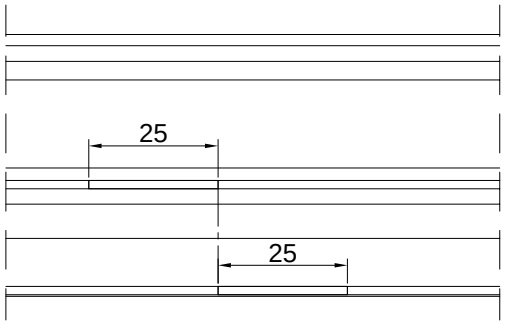

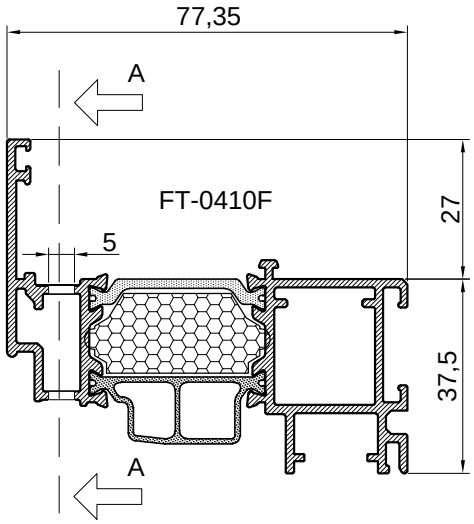

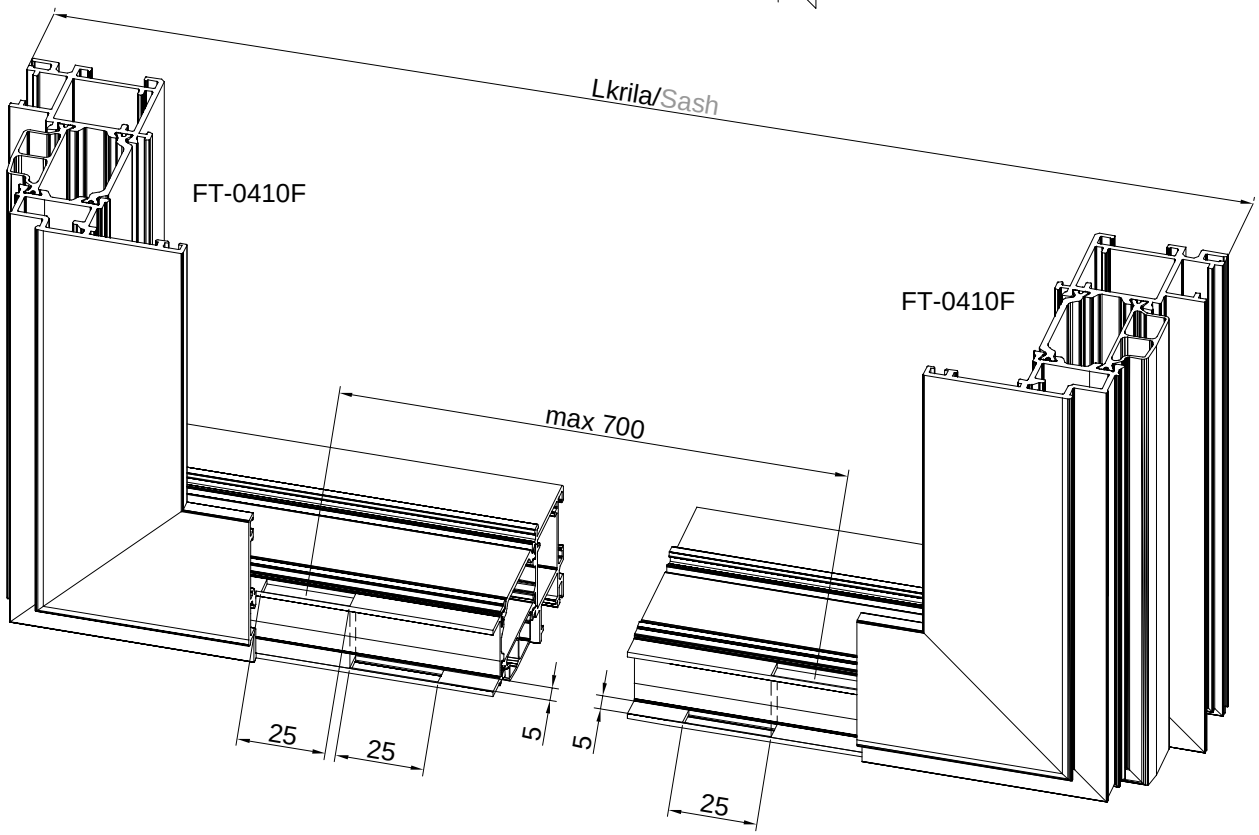

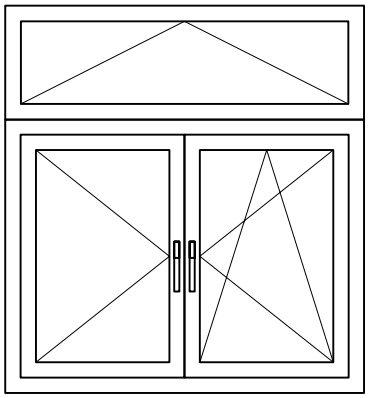


OBRADA PROFILA ZA ODVOD KAPLJEVINA
PROCESSING OF THE PROFILE FOR DRAINAGE


- Obrada na profilu prečke FT-0420F - odvod kapljevina


Obrada glodanjem
Alat: vretenasto glodalo Ø7

- Processing on the mullion profile FT-0420F for drainage

Processing / milling
Tool: end mill Ø7

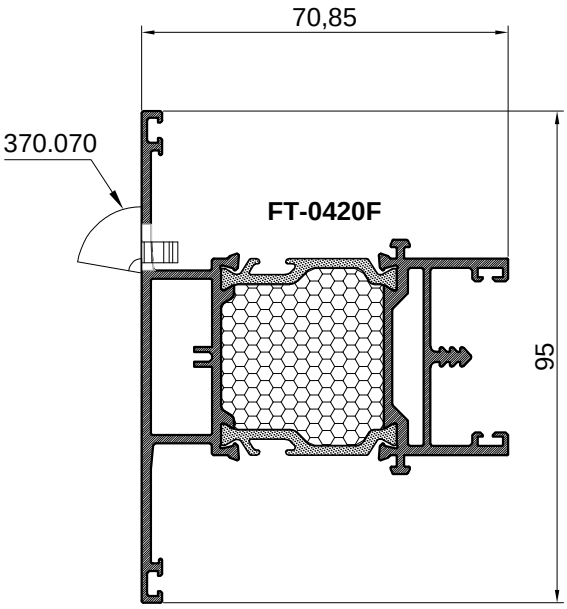


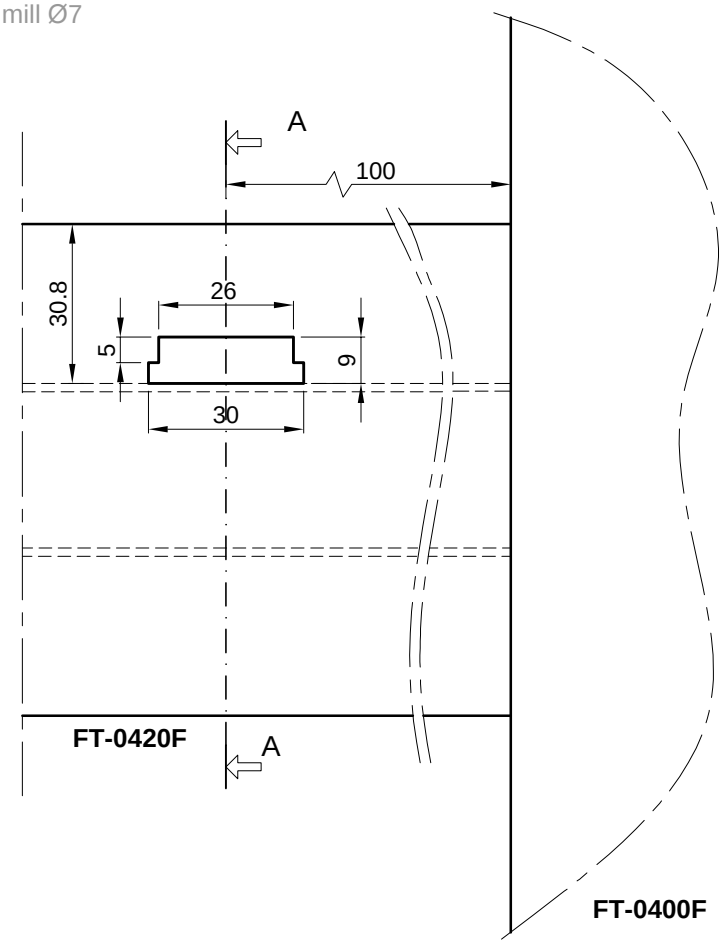


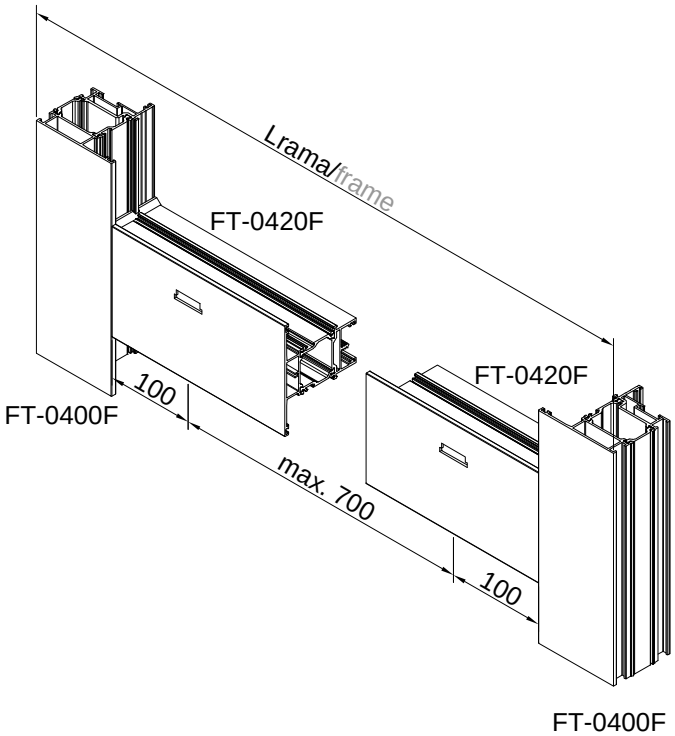


OBRADA PROFILA RAMA I PREČKE ZA SKRIVENI ODVOD KAPLJEVINA
PROCESSING OF FRAME AND MULLION PROFILE FOR HIDDEN DRAINAGE

FT-0400F

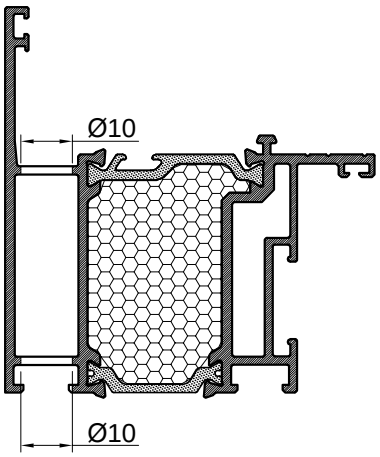

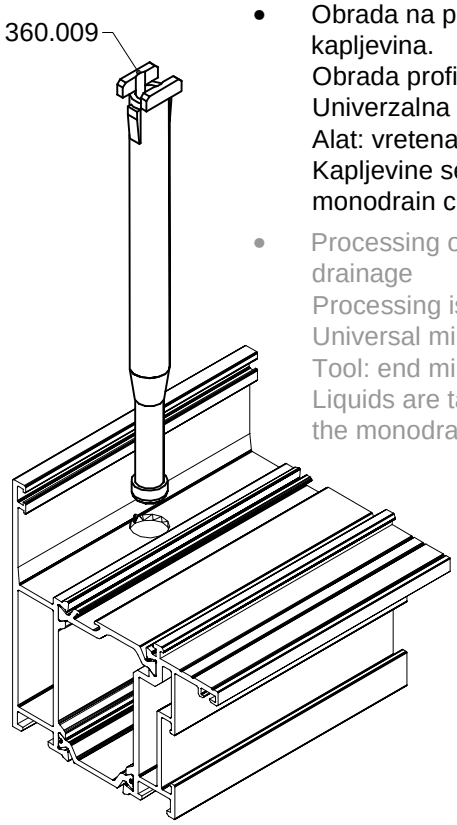



- Obrada na profilu rama FT-0400F za odvod kapljevina.
  Obrada profila se izvodi na:
  Univerzalna glodalica / stubna bušilica
  Alat: vretenasto glodalo Ø10 / svrdlo Ø10
  Kapljevine se izvode van pomoću monodrain cijevčice 360.009
- Processing of the frame profile FT-0400F for drainage
  Processing is done on:
  Universal mill / drill press
  Tool: end mill Ø10 / drill Ø10
  Liquids are taken out with the help of the monodrain tube 360.009

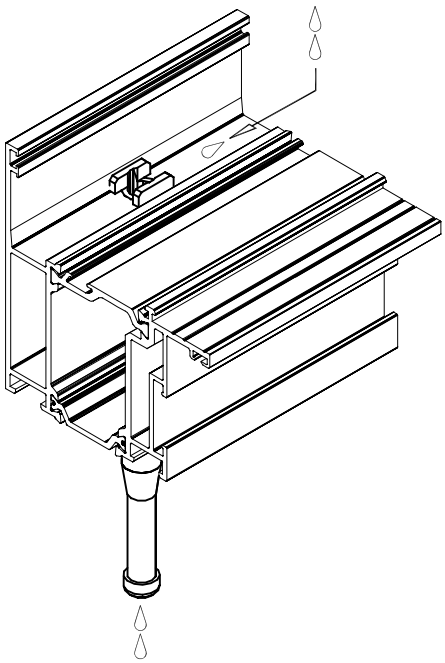



- Obrada na profilu prečke FT-0420F za odvod kapljevina.
  Obrada profila se izvodi na:
  Univerzalna glodalica / stubna bušilica
  Alat: vretenasto glodalo Ø10 / svrdlo Ø10
  Kapljevine se izvode van pomoću monodrain cijevčice 360.009
- Processing of the profile FT-0420F for drainage.
  Processing is done on:
  Universal mill / drill press
  Tool: end mill Ø10 / drill Ø10
  Liquids are drained using the monodrain tube 360.009

FT-0420F

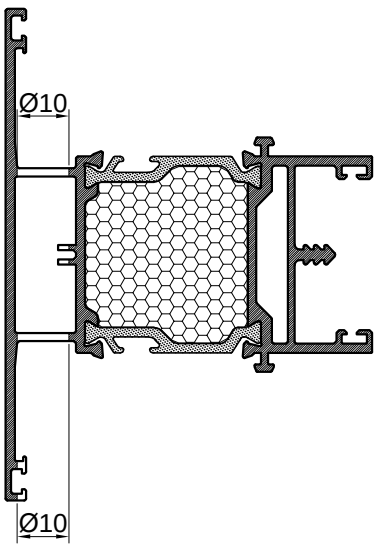

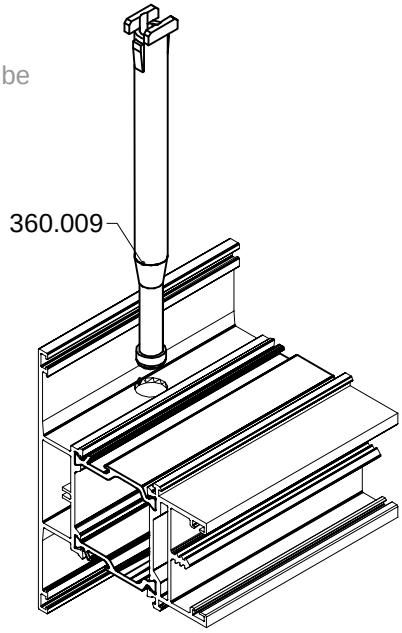

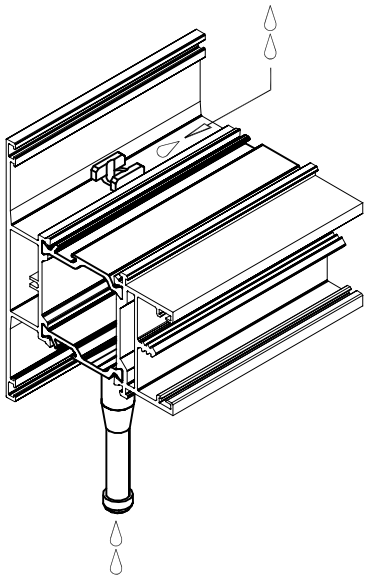

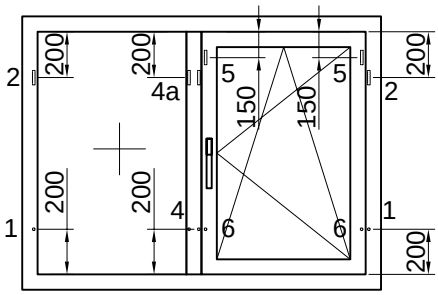


OBRADA PROFILA ZA VENTILIRANJE KOMORA
PROCESSING OF PROFILES FOR CHAMBERS VENTILATION

- Obrada na profilima prečke, krila i rama za ventiliranje komora


Obrada glodanjem
Alat: vretenasto glodalo Ø5

- Processing on mullion, sash and frame profiles for chambers ventilation


Processing / milling
Tool: end mill Ø5

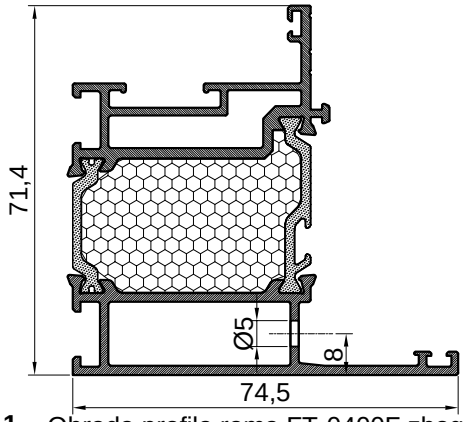


1 Obrada profila rama FT-0400F zbog ventiliranja komora (rupa Ø5 mm)
Processing of the frame profile FT-0400F for chambers ventilation (hole Ø5 mm)

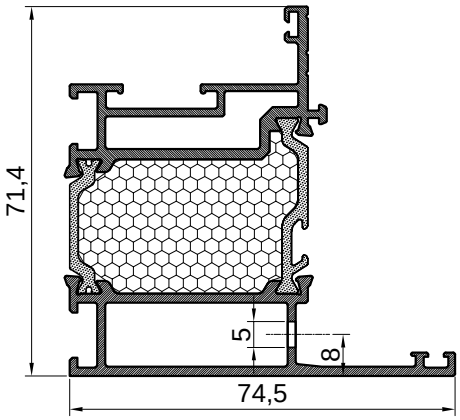


2 Obrada profila rama FT-0400F zbog ventiliranja komora (žlijeb 20x5)
Processing of the frame FT-0400F for chambers ventilation (groove 20x5)

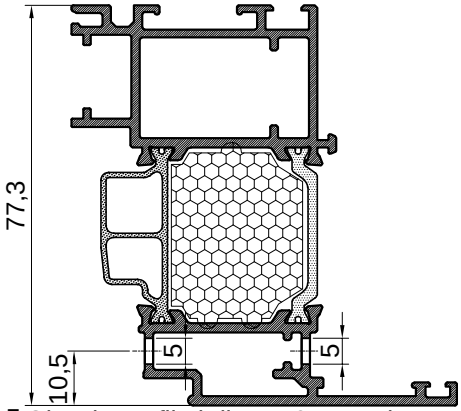


5 Obrada profila krila FT-0411F zbog ventiliranja komora (žlijeb 20x5)
Processing of the sash profile FT-0411F for chambers ventilation (groove 20x5)

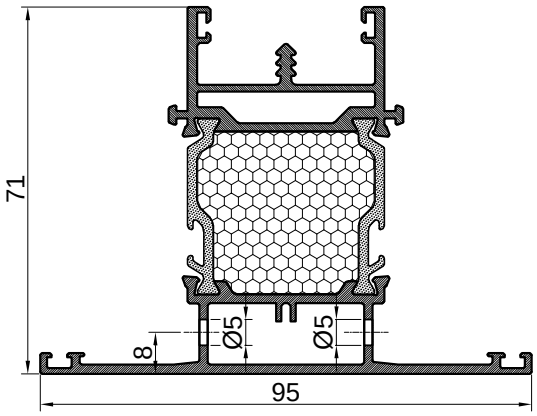


4 Obrada profila prečke FT-0420F zbog ventiliranja komora (rupa Ø5 mm)
Processing of the mullion profile FT-0420F for chambers ventilation (hole Ø5 mm)

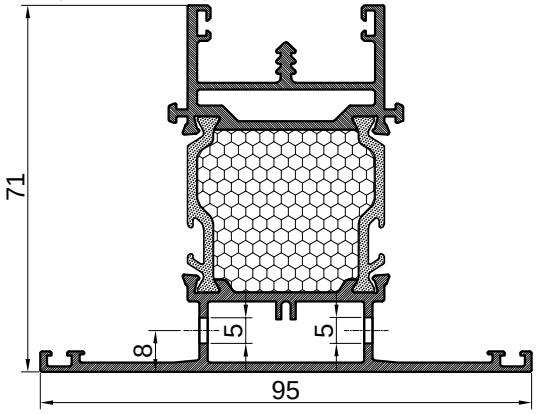



4a Obrada profila prečke FT-0420F zbog ventiliranja komora (žlijeb 20x5 mm)
Processing of the mullion profile FT-0420F for chambers ventilation (groove 20x5 mm)

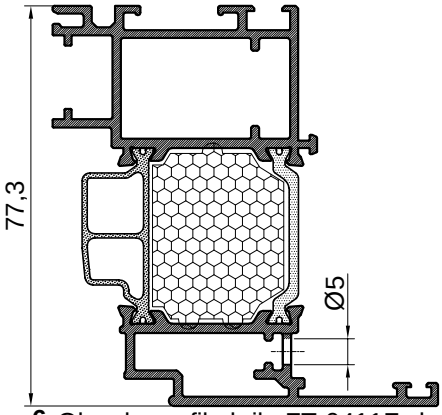


6 Obrada profila krila FT-0411F zbog ventiliranja komora (rupa Ø5)
Processing of the sash profile FT-0411F for chambers vent. (hole Ø5)






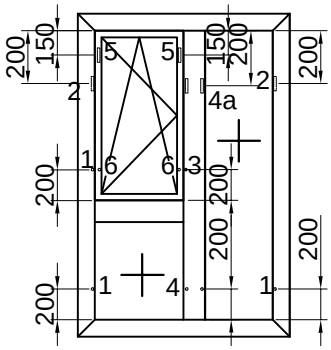

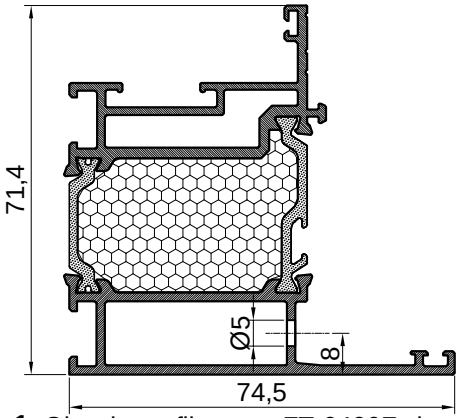


1 Obrada profila rama FT-0400F zbog ventiliranja komora (rupa Ø5 mm)

Processing of the frame profile FT-0400F for chambers ventilation (hole Ø5 mm)

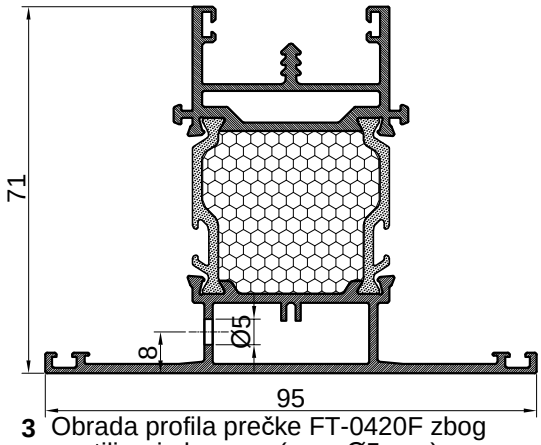


3 Obrada profila prečke FT-0420F zbog ventiliranja komora (rupa Ø5 mm)

Processing of the mullion profile FT-0420F for chambers ventilation (hole Ø5 mm)

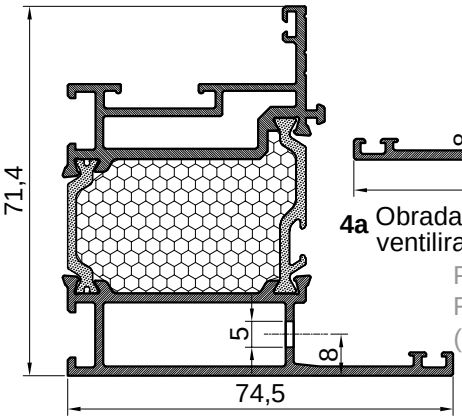


2 Obrada profila rama FT-0400F zbog ventiliranja komora (žlijeb 20x5)

Processing of the frame profile FT-0400F for chambers ventilation (groove 20x5)

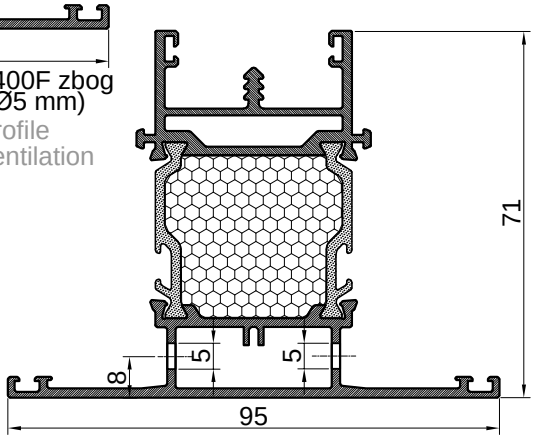


4a Obrada profila prečke FT-0420F zbog ventiliranja komora (žlijeb 20x5 mm)

Processing of the mullion profile FT-0420F for chambers ventilation (groove 20x5 mm)

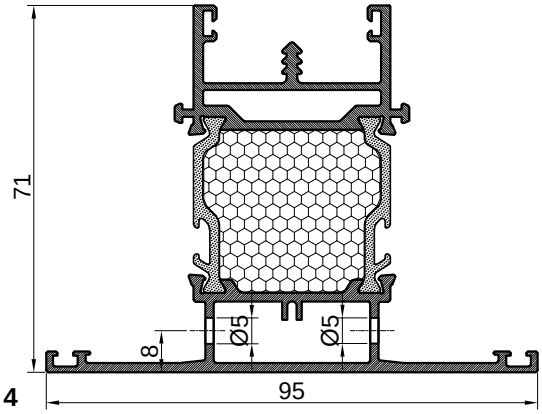


4 Obrada profila prečke FT-0420F zbog ventiliranja komora (rupa Ø5 mm)

Processing of the mullion profile FT-0420F for chambers ventilation (hole Ø5 mm)

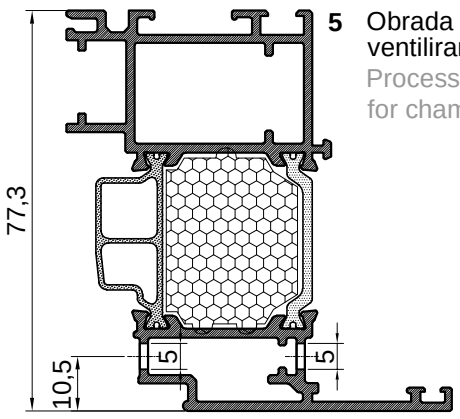

5 Obrada profila krila FT-0411F zbog ventiliranja komora (žlijeb 20x5)


Processing of the sash profile FT-0411F for chambers ventilation (groove 20x5)

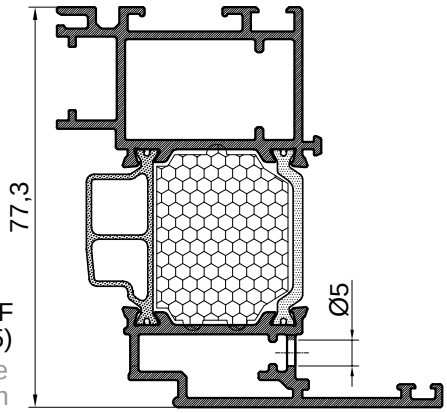



6 Obrada profila krila FT-0411F zbog ventiliranja komora (rupa Ø5)

Processing of the sash profile FT-0411F for chambers ventilation (hole Ø5)

PRIKAZ MONTAŽE PVC UMETKA 373.031 U UTORU VANJSKOG DIJELA RAMA
MONTAGE OF THE PVC INSERT 373.031 IN THE SLOT OF THE OUTER FRAME PART

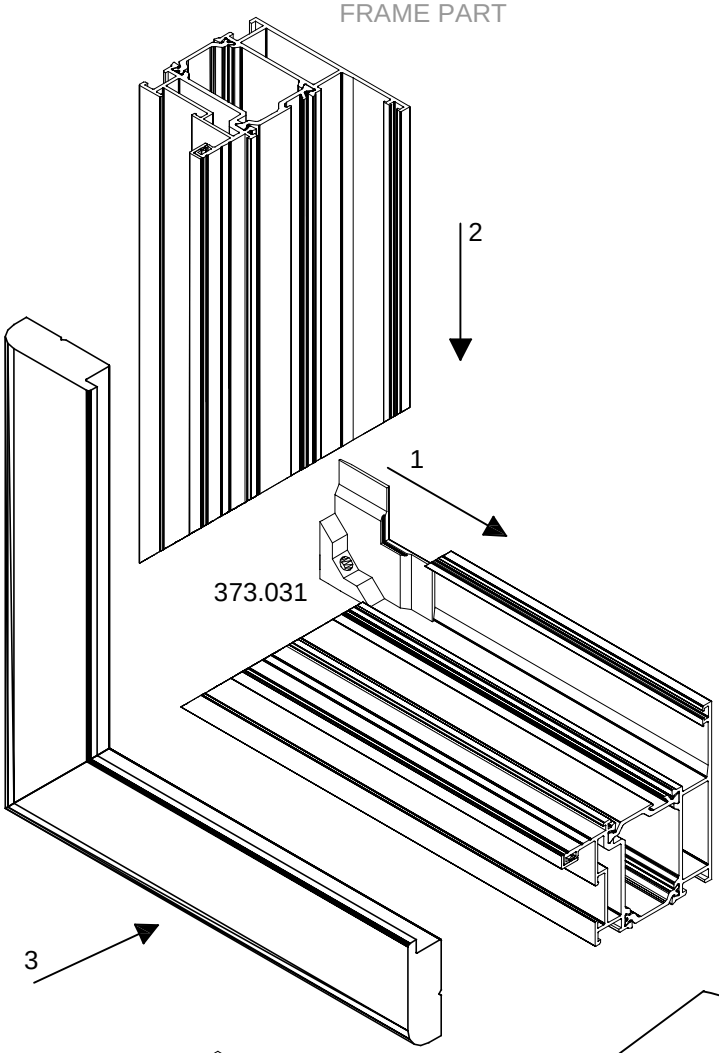

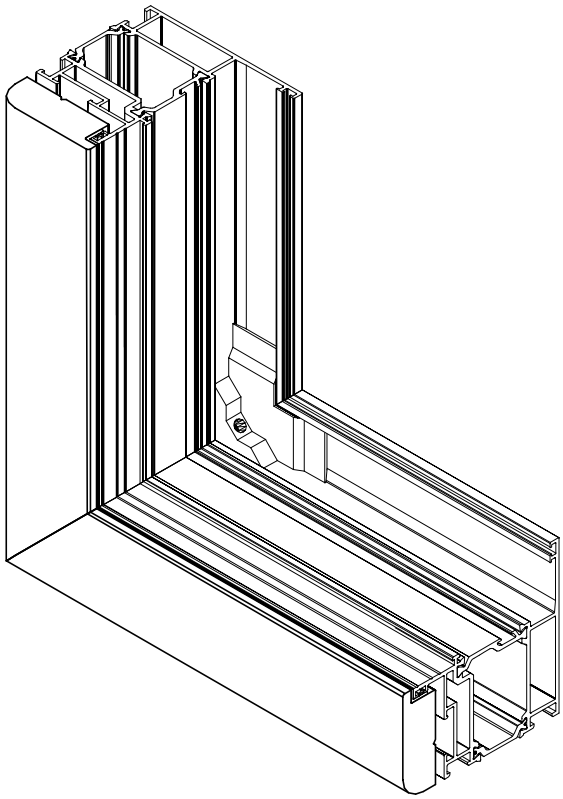


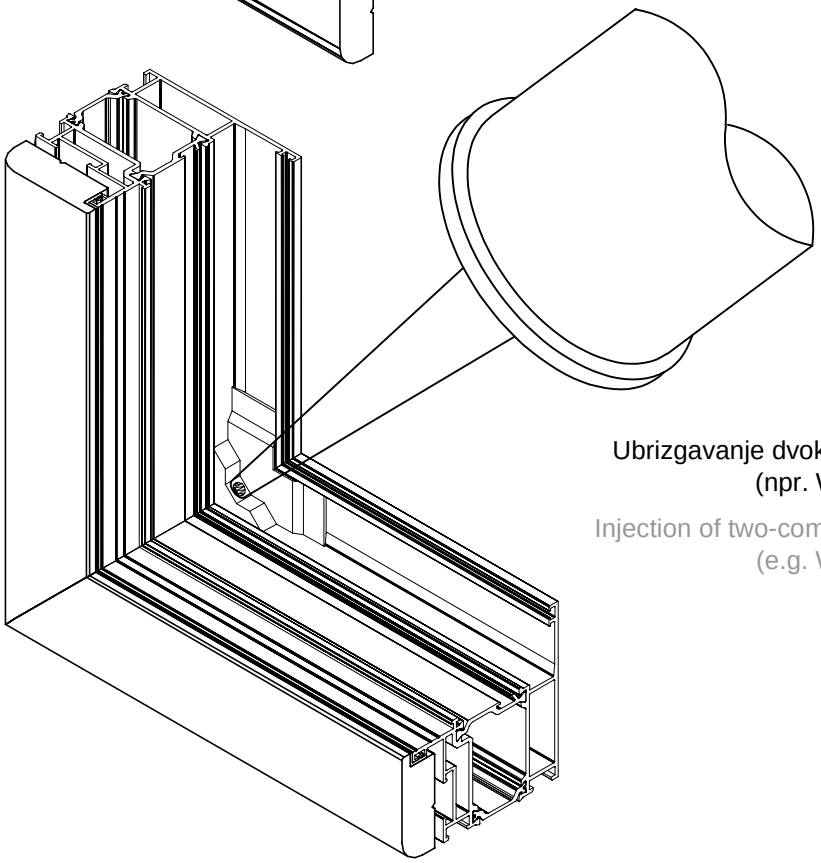


Ubrizgavanje dvokomponentnog ljepila kroz PVC umetak
(npr. Wurth 2K-PUR - 0892 135)

Injection of two-component adhesive through the PVC insert
(e.g. Wurth 2K-PUR - 0892 135)


PRIKAZ OBRADE PREČKE FT-0420F ZA RAM FT-0400F
PROCESSING OF THE MULLION FT-0420F FOR THE FRAME FT-0400F

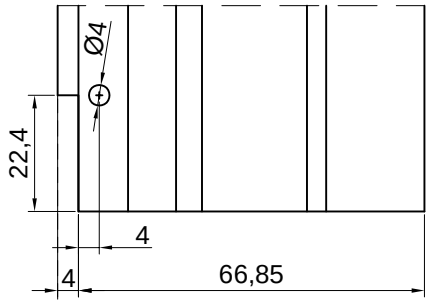


FT-0420F




NAPOMENA:
Koristiti snop glodala 220.015
gdje se graničnik podesi na 22.4 mm
REMARK:
Use the mill bundle 220.015
with the adjuster set to 22.4 mm

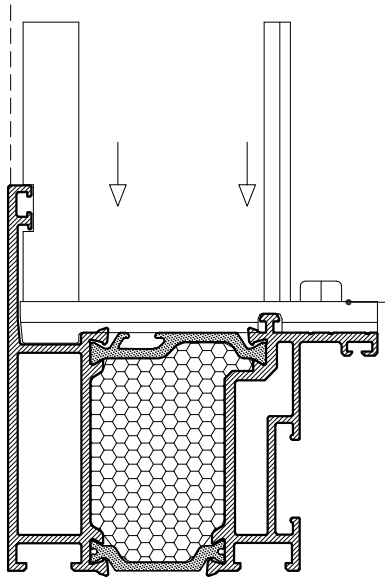


FT-0400F




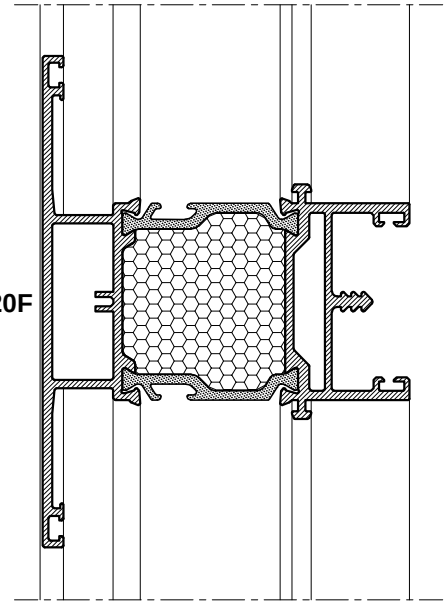

FT-0420F

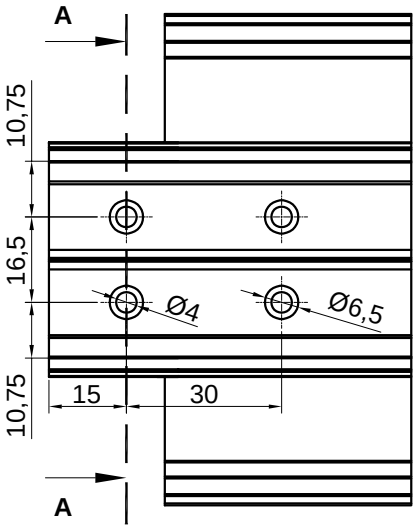

Presjek A-A

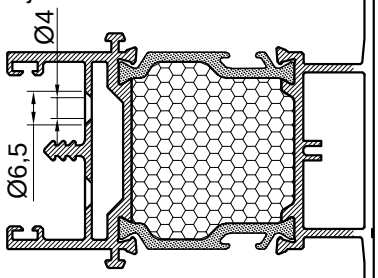


- Obrada profila prečke FT-0420F


Bušenje rupa za spoj s ramom FT-0400F
Alat: svrdlo Ø4 i Ø6.5

- Processing of the mullion profile FT-0420F


Drilling holes for connection with the frame FT-0400F
Tool: end mill Ø4 and Ø6.5


PRIKAZ OBRADE PREČKE FT-0420F ZA KRILO FT-0410F
PROCESSING OF THE MULLION FT-0420F FOR THE SASH FT-0410F

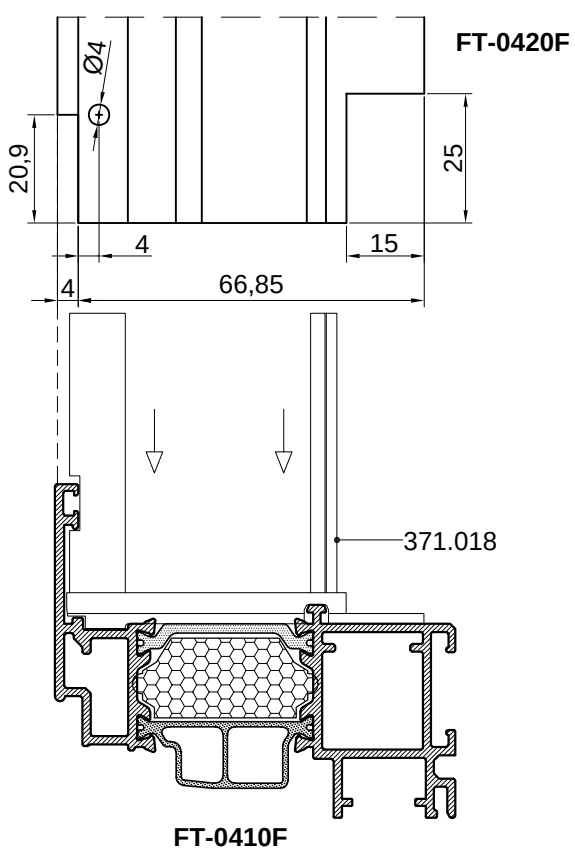




- Obrada profila prečke FT-0420F za žlijeb 20.9x4 mm i 15x25mm
Obrada glodanjem
Alat: čeono glodalo
- Processing of the mullion profile FT-0420F for the groove 20.9x4 mm and 15x25mm
Milling processing
Tool: shell end mill



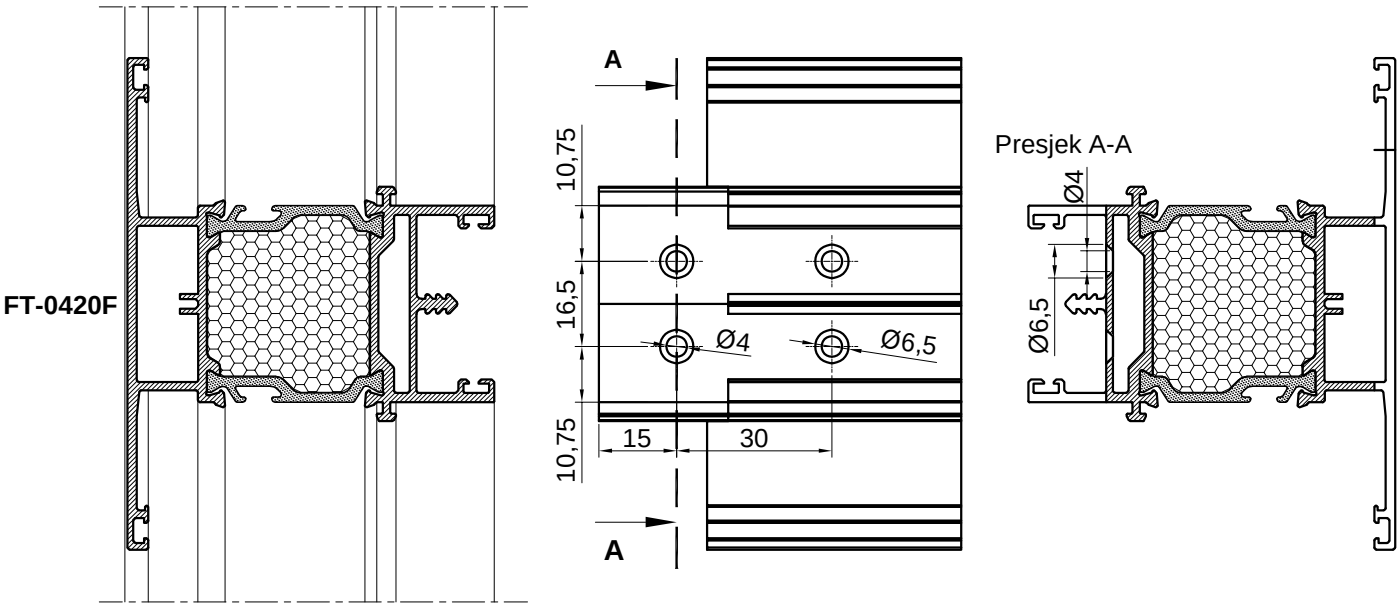


SPAJANJE PREČKE FT-0420F I RAMA FT-0400F POMOĆU PVC UMETKA 375.051
CONNECTING OF THE MULLION PROFILE FT-0420F AND FRAME PROFILE FT-0400F USING THE PVC INSERT 375.051


Napomena: Postupak spajanja je isti i kod spajanja prečke FT-0420F i krila FT-0410F pri čemu se koristi PVC umetak 371.018
Remark: The connecting procedure is the same for the profiles FT-0420F and FT-0410F whereby the PVC insert 371.018 is used

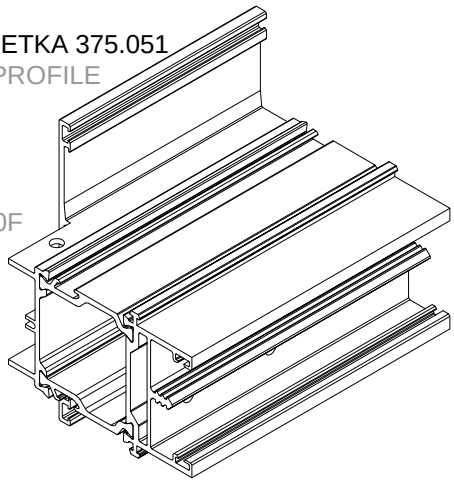

FT-0420F

FT-0400F

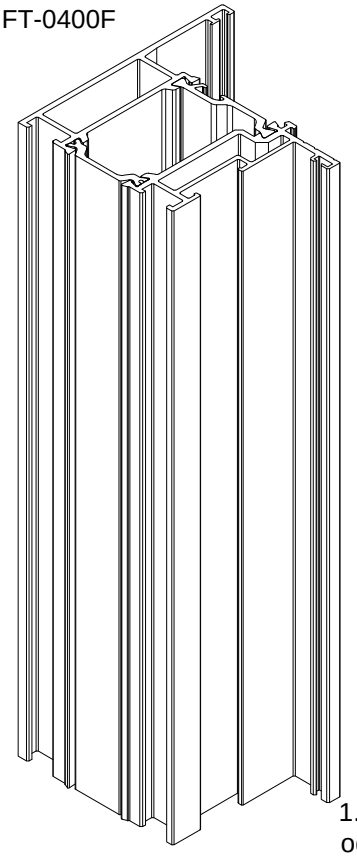


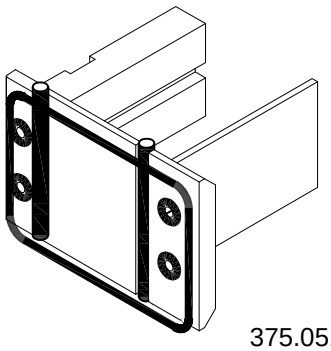

375.051




FT-0400F

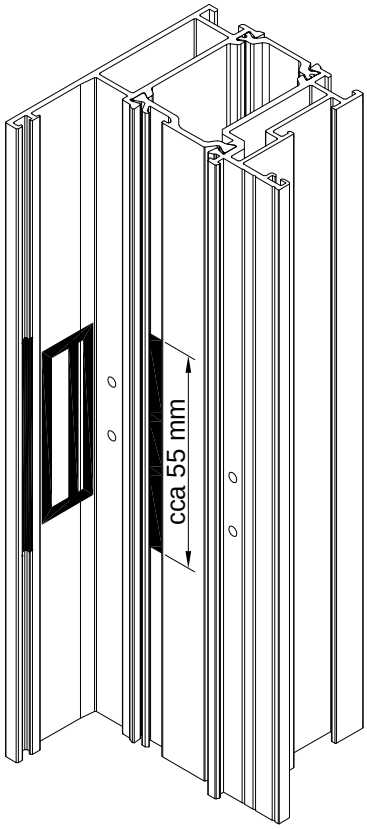


1. Površine koje se spajaju očistiti i odmastiti odgovarajućim sredstvom (npr. Teroson VR 20 ili FL+).
Premazati površine koje se spajaju ljepilom (npr.Teroson MS 939) .
1. Clean and degrease the connecting surfaces with suitable products (e.g. Teroson VR 20 or FL+).
Smear connecting surfaces with an adhesive (e.g. Teroson MS 939)

FT-0420F

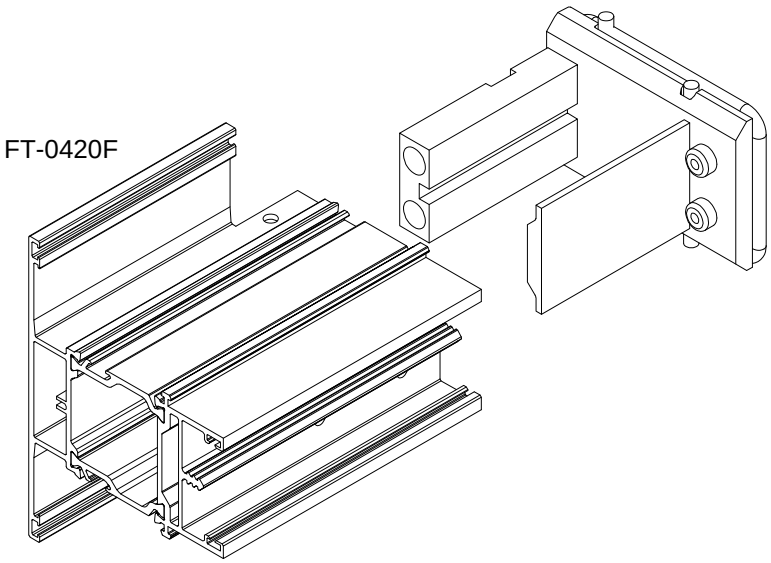


FT-0400F

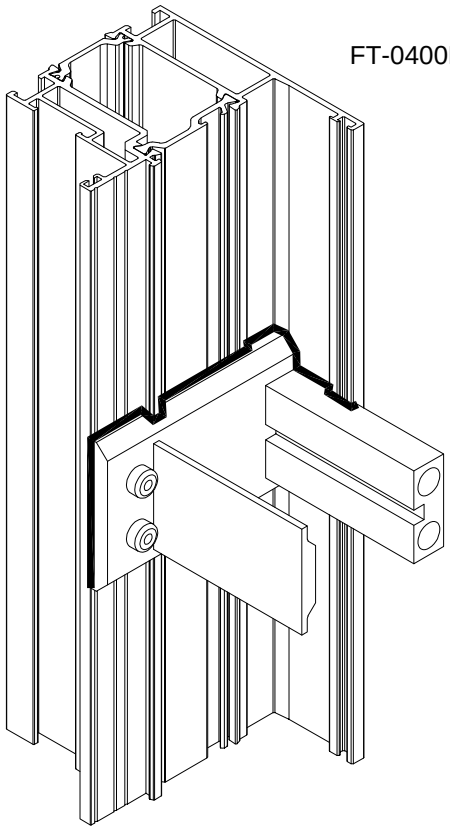


2. Dio ljepila koji iscuri između spojeva očistiti.
2. Clean the leaked adhesive.

FT-0400F

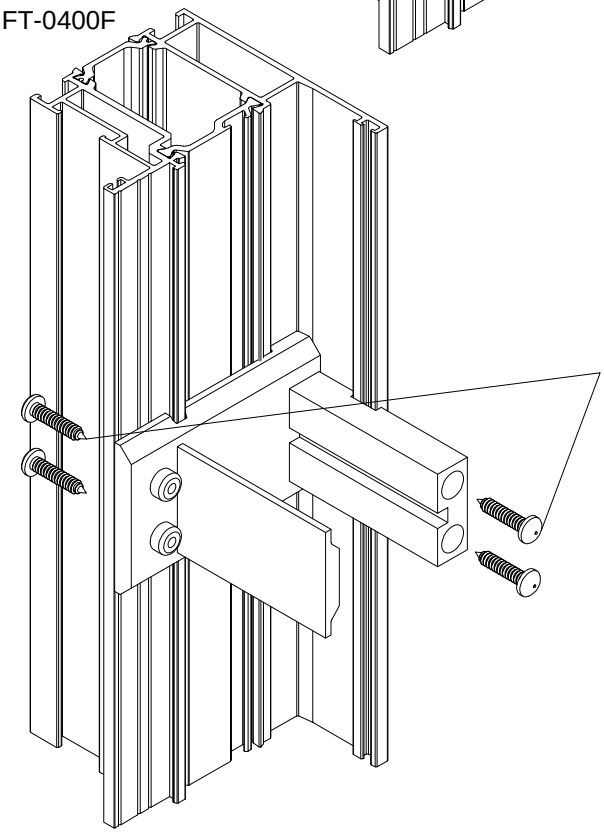



3. PVC umetak 375.051 spojiti vijcima 433.018 (3.9x19 DIN 7981)
3. Connect the PVC insert 375.051 with screws 433.018 (3.9x19 DIN 7981)

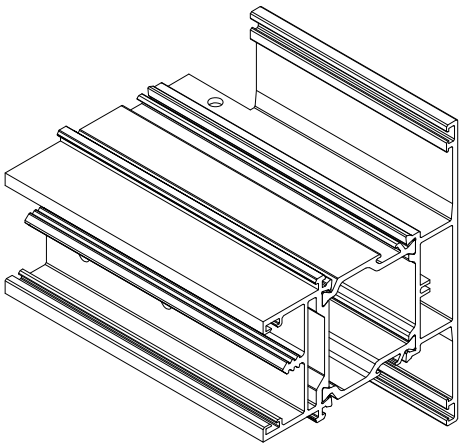

FT-0420F

FT-0400F

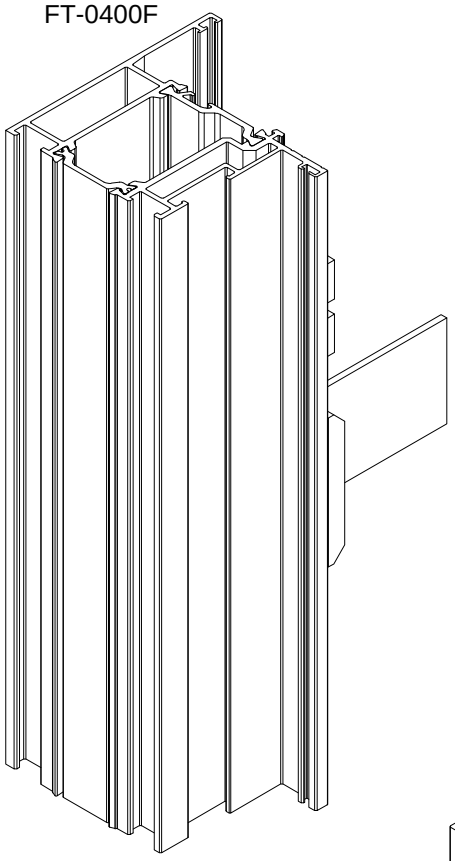

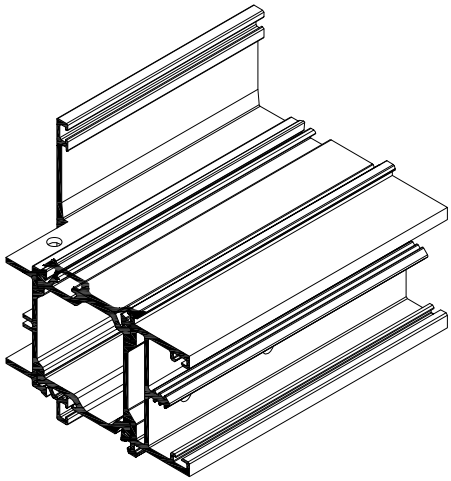


FT-0420F




4. Površine koje se spajaju očistiti i odmastiti odgovarajućim sredstvom (npr. Teroson VR 20 ili FL+).
Premazati površine koje se spajaju ljepilom (npr.Teroson MS 939) .

4. Clean and degrease the connecting surfaces with suitable products (e.g. Teroson VR 20 or FL+).
Smear the connecting surfaces with an adhesive (e.g. Teroson MS 939)

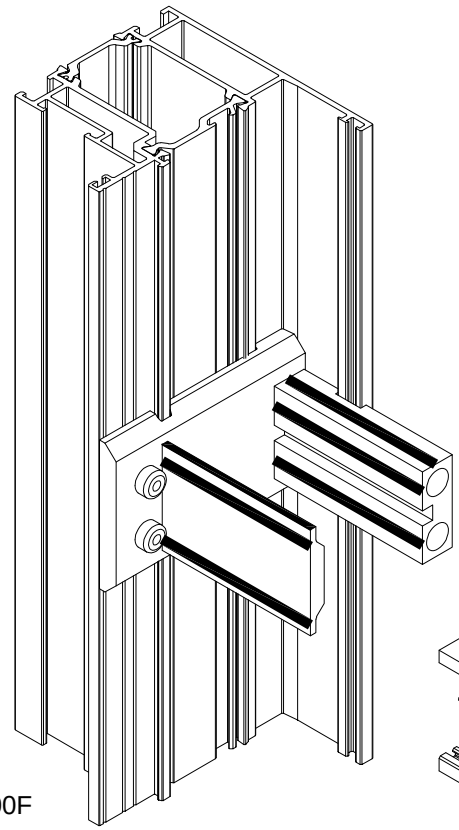


FT-0400F

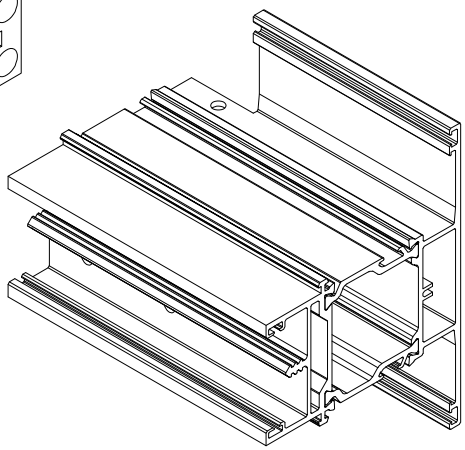

FT-0420F


4. Površine koje se spajaju očistiti i odmastiti odgovarajućim sredstvom (npr. Teroson VR 20 ili FL+).
Premazati površine koje se spajaju ljepilom (npr.Teroson MS 939) .

4. Clean and degrease the connecting surfaces with suitable agents (e.g. Teroson VR 20 or FL+).
Smear the connecting surfaces with an adhesive (e.g. Teroson MS 939)

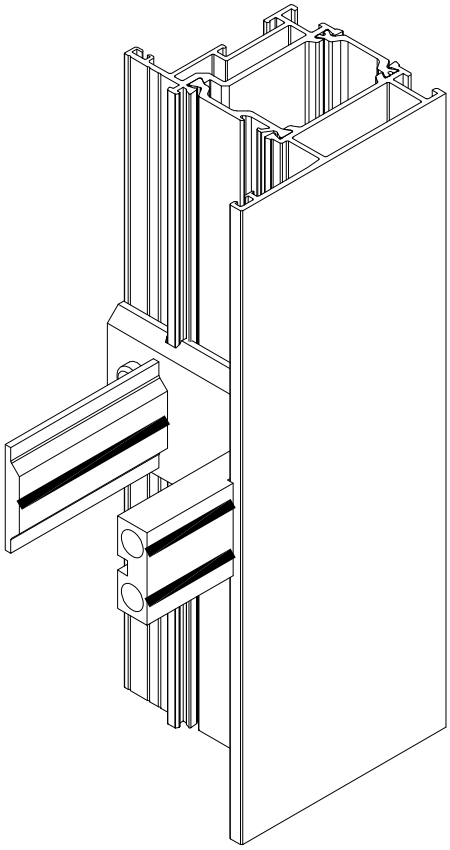


FT-0400F

FT-0420F

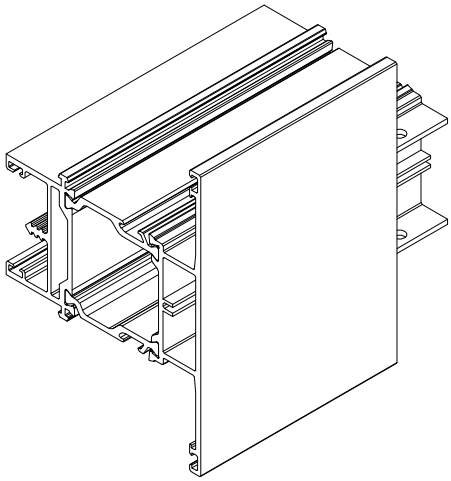


5. Nakon spajanja profila sve žljebove ispuniti ljepilom (npr. Teroson MS 939)

5. After joining the profiles, all profile joints must be filled with an adhesive (e.g. Teroson MS 939)




6. Dio ljepila koji iscuri između profila i PVC umetka 375.051 očistiti sredstvom za čišćenje i odmašćivanje
(npr. Teroson VR 20 ili FL+).


6. Remove the adhesive that has leaked between the profile and the PVC insert 375.051 with cleaning and degreasing agents
(e.g. Teroson VR 20 of FL+).

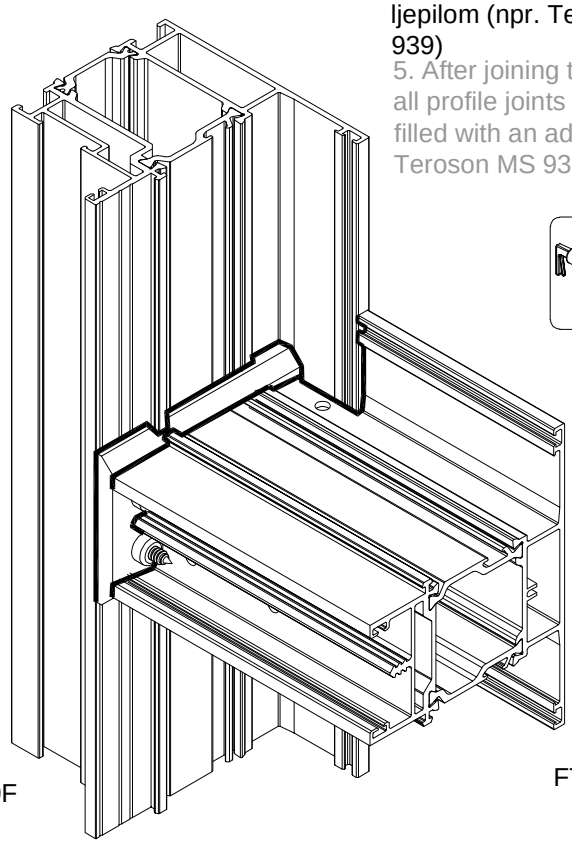

FT-0400F


FT-0420F

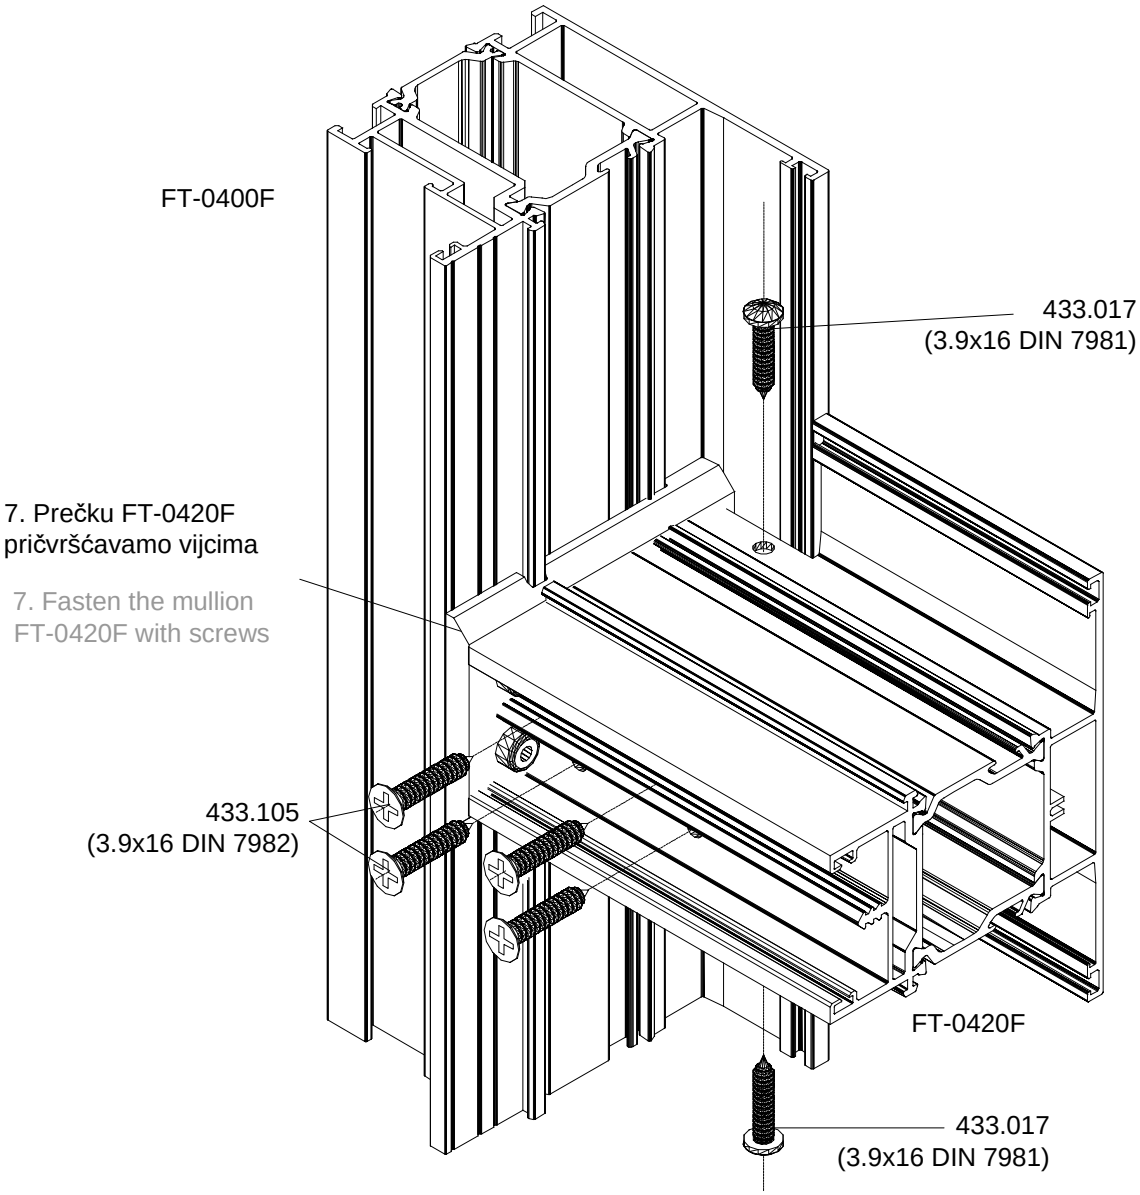

FT-0400F
433.017
(3.9x16 DIN 7981)
7. Prečku FT-0420F
pričvršćavamo vijcima
7. Fasten the mullion
FT-0420F with screws
433.105
(3.9x16 DIN 7982)
FT-0420F
433.017
(3.9x16 DIN 7981)

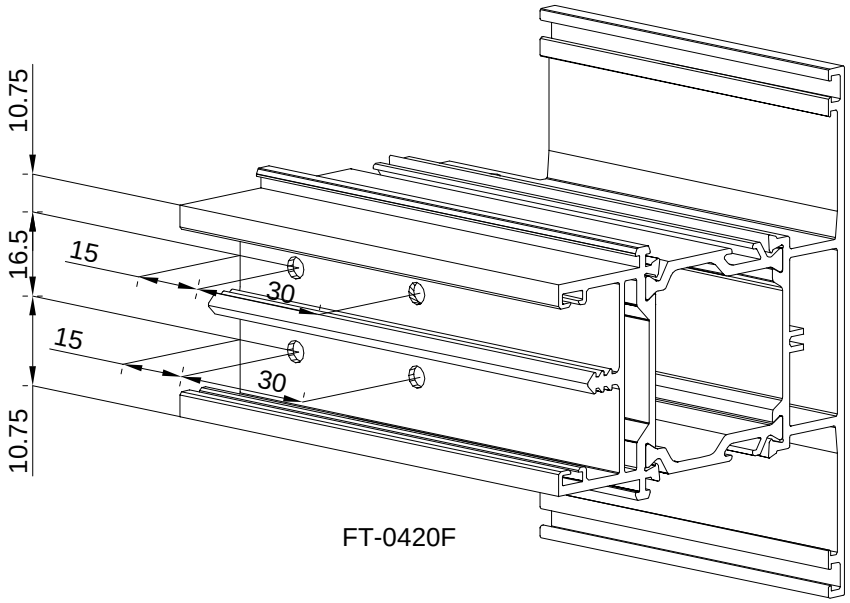

10.75
16.5
15
30
15
30
10.75
FT-0420F


8. Obrada drvene obloge 600.007 za prečku FT-0420F

Processing of the wooden covering 600.007 for the mullion FT-0420F




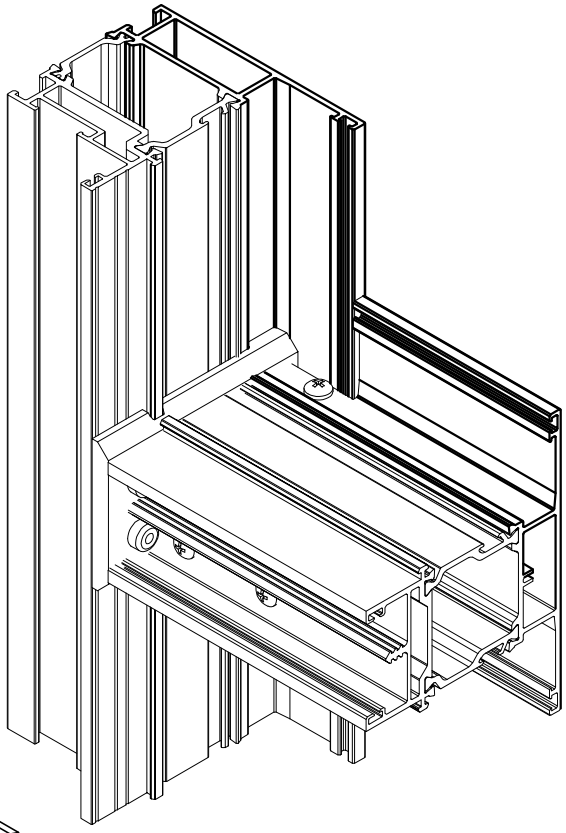




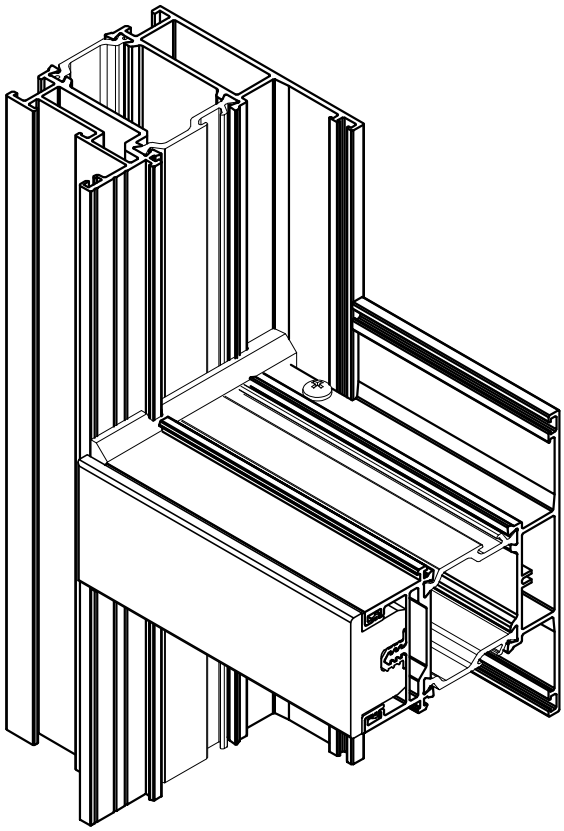


OBRADA PROFILA RAMA ZA MONTAŽU PVC UMETKA 375.051
PROCESSING OF THE FRAME PROFILE FOR THE MONTAGE OF THE PVC INSERT 375.051

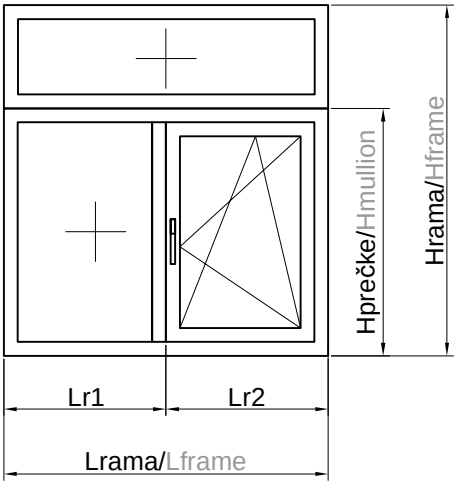


mjera bušenja na ramu
measure for drilling on the frame

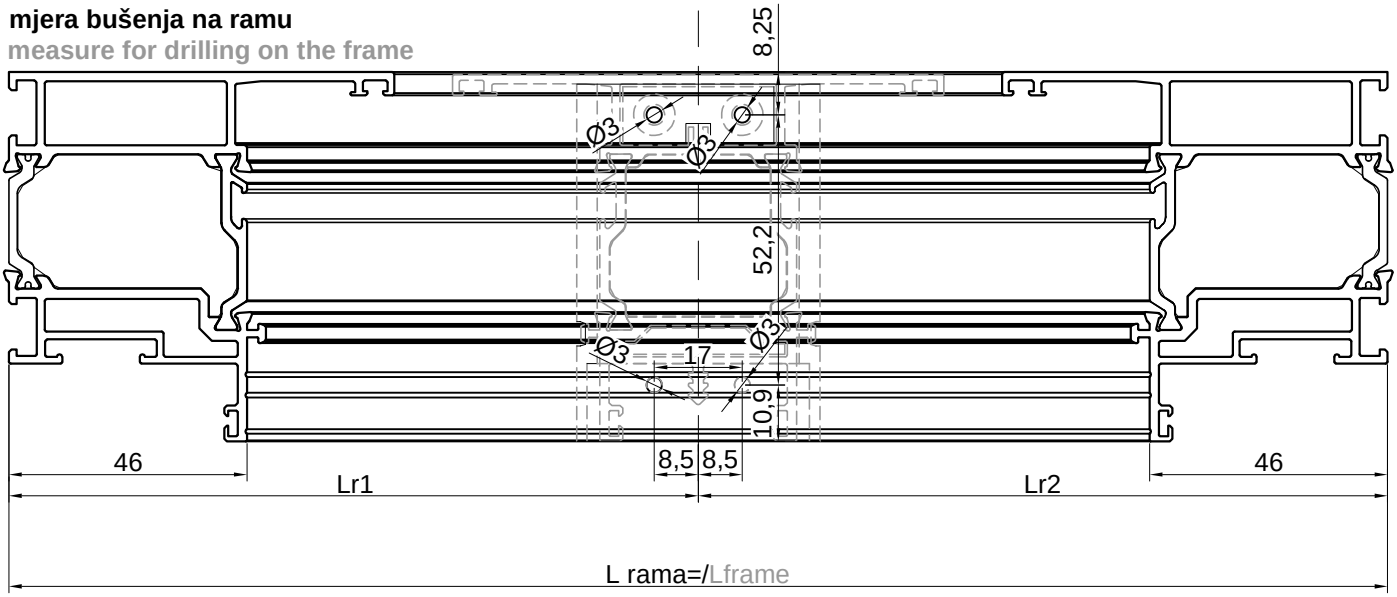


mjera bušenja na ramu
measure for drilling on the frame

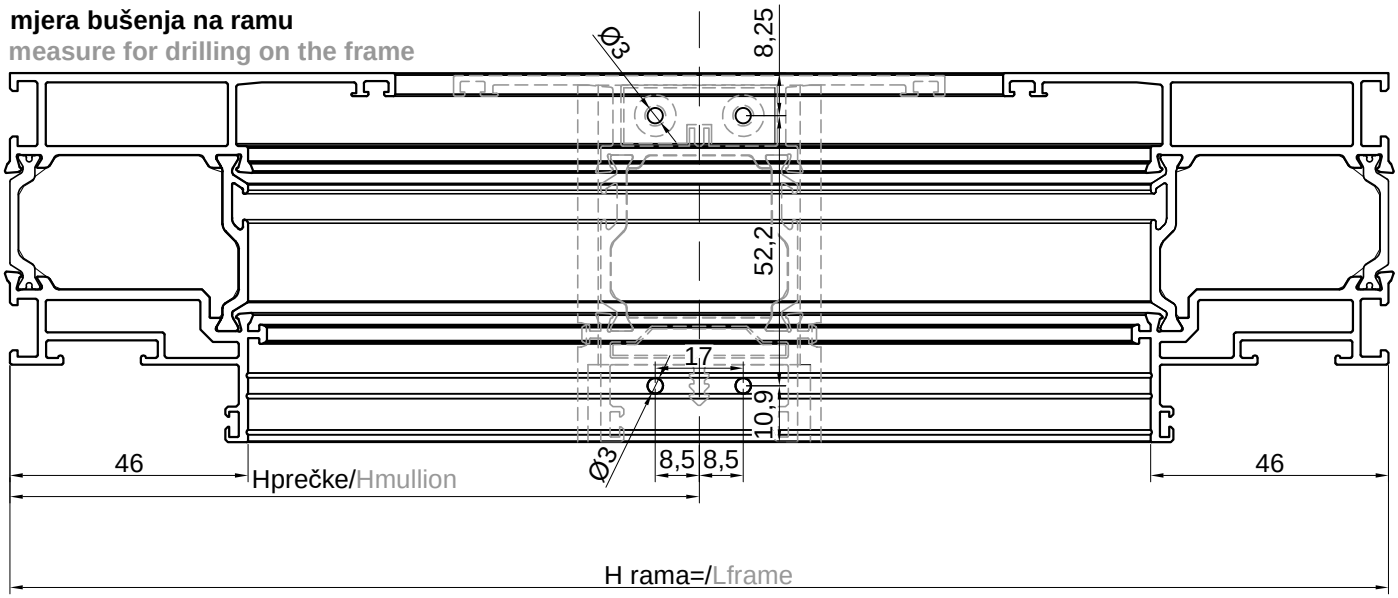


- UGRADNJA PVC PODMETAČA ZA STAKLO 370.001
- MONTAGE OF THE PVC GLASS PACKERS 370.001

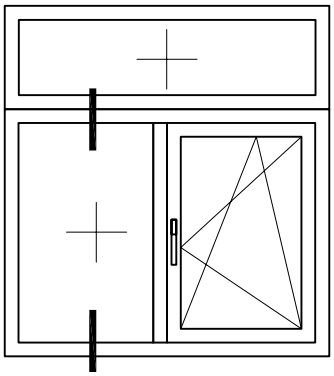


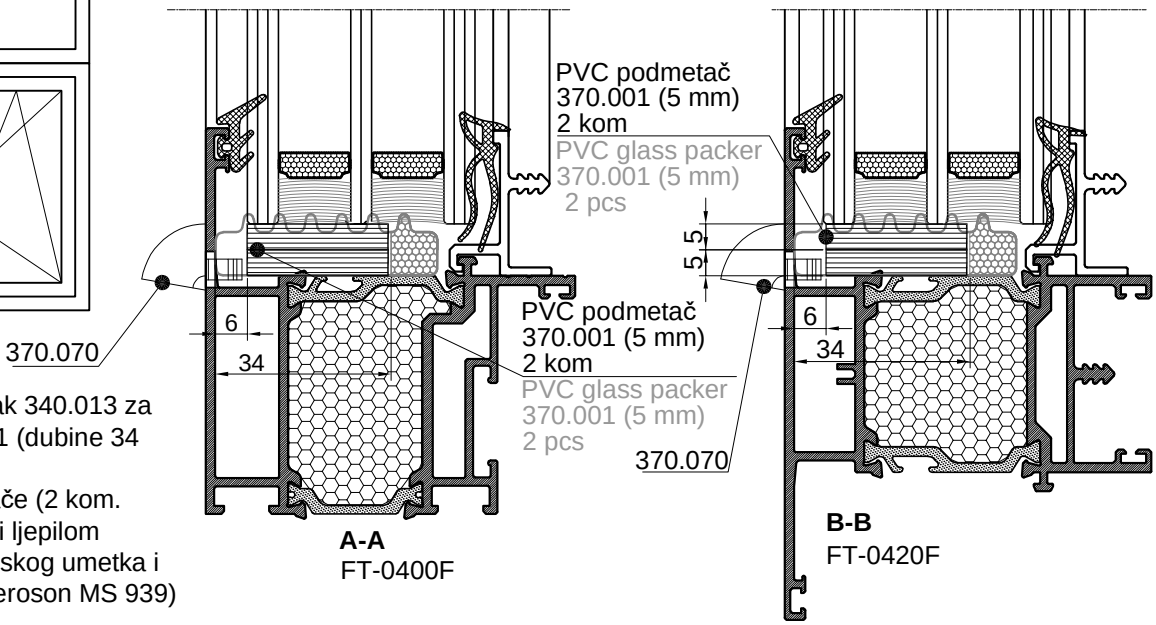


- isjeći izolacijski umetak 340.013 za pvc podmetače 370.001 (dubine 34 mm i širine 18 mm)
- postaviti pvc podmetače (2 kom. debljine 5 mm) i ispuniti ljepilom spojeve između izolacijskog umetka i pvc podmetača (npr. Teroson MS 939)


- cut the insulation insert 340.013 for glass packers 370.001 (depth 34 mm and width 18 mm)
- place the glass packers (2 pcs. thickness 5 mm) and apply an adhesive between insulation insert and glass packers (eg. Teroson MS 939)

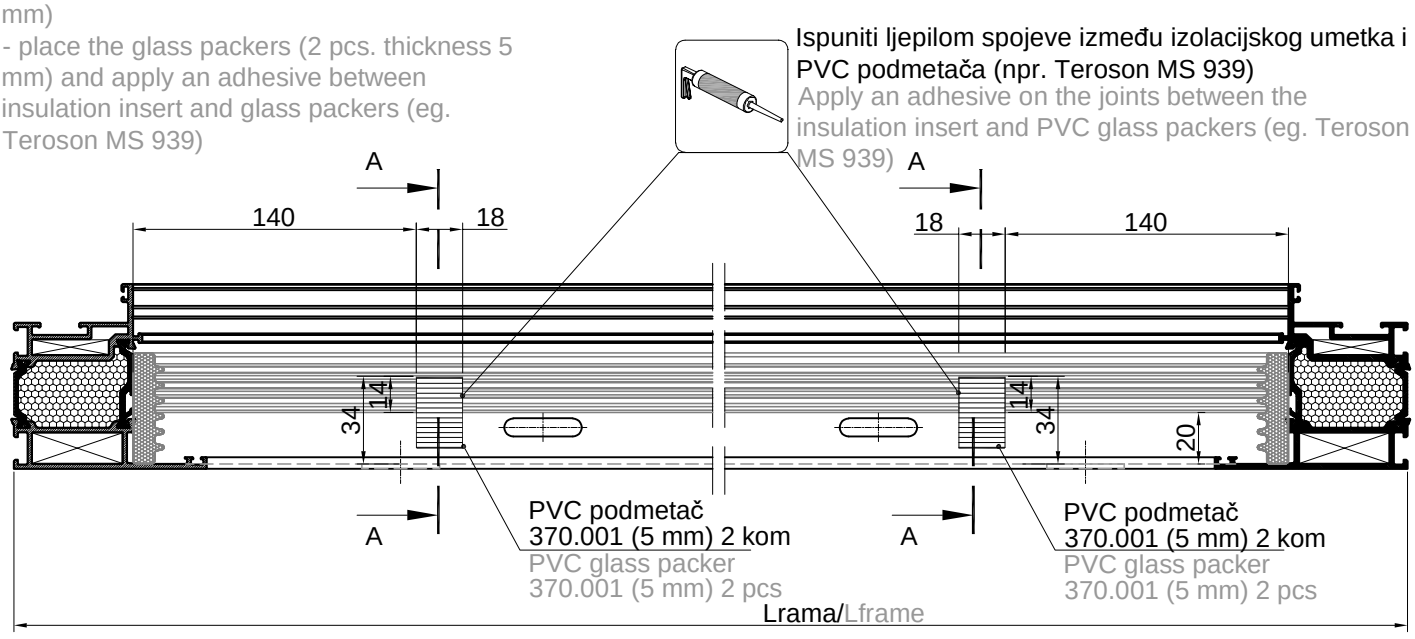

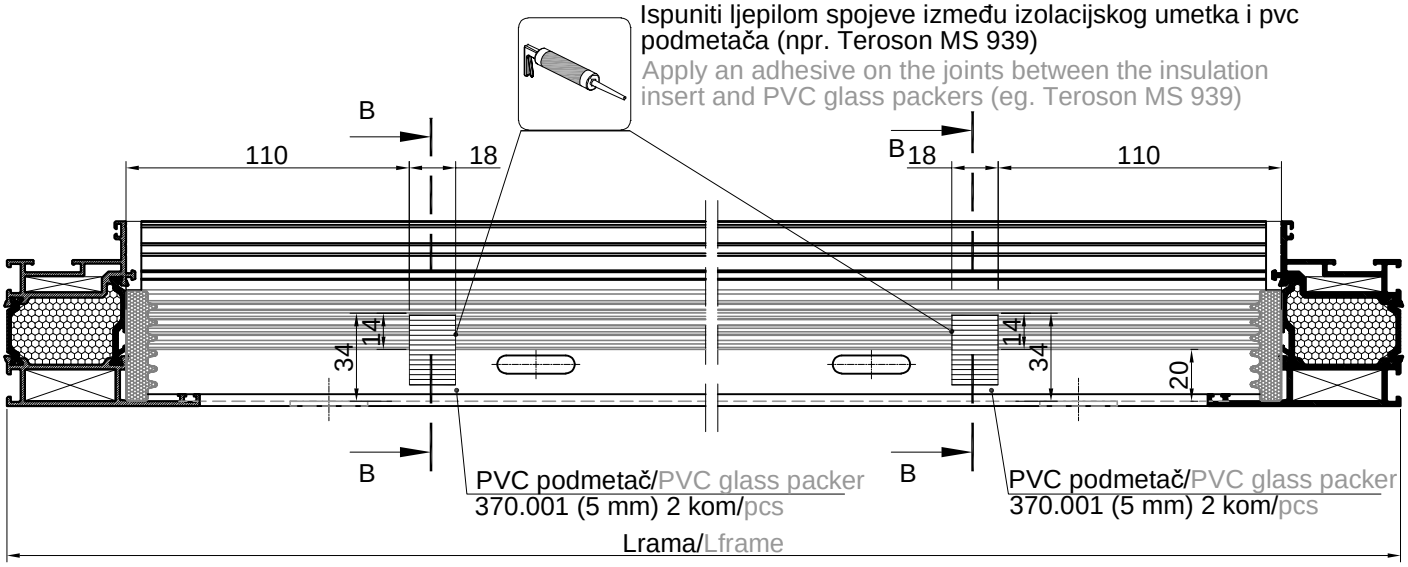

- UGRADNJA PVC PODMETAČA ZA STAKLO 370.000 I 370.001
- MONTAGE OF THE PVC GLASS PACKERS 370.000 AND 370.001

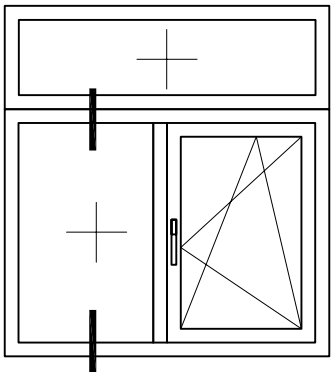


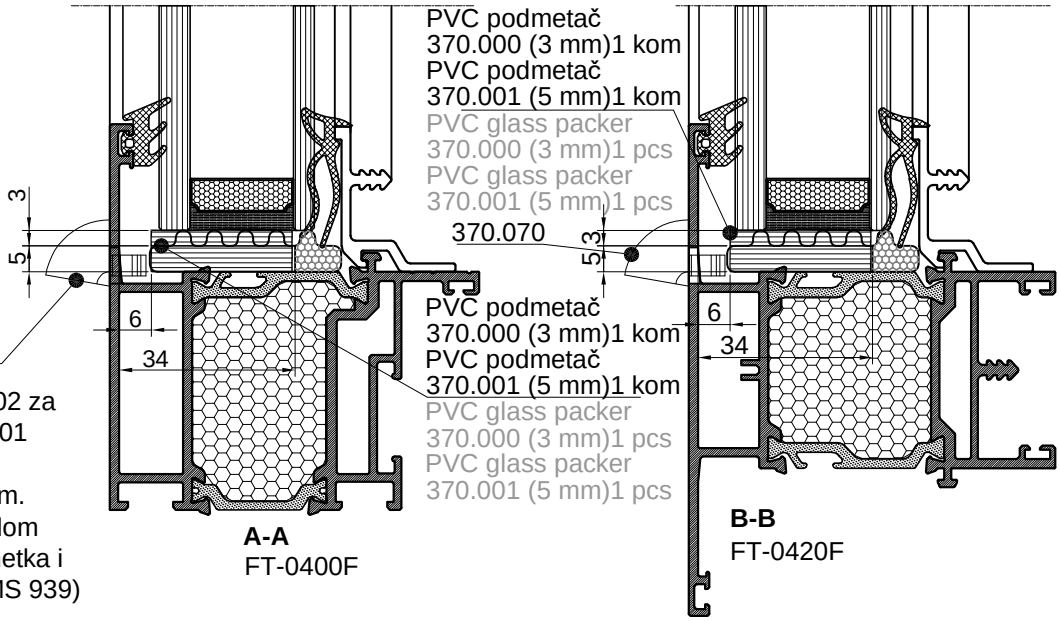


- isjeći izolacijski umetak 348.002 za pvc podmetače 370.000 i 370.001 (dubine 34 mm i širine 18 mm)
- postaviti pvc podmetače (1 kom. debljine 3 i 5 mm) i ispuniti ljepilom spojeve između izolacijskog umetka i pvc podmetača (npr. Teroson MS 939)

- cut the insulation insert 348.002 for the glass packers 370.000 and 370.001 (depth 34 mm and width 18 mm)
- place the glass packers (1 pcs. thickness 3 and 5 mm) and apply an adhesive between insulation insert and glass packers (eg. Teroson MS 939)


Ispuniti ljepilom spojeve između izolacijskog umetka i PVC podmetača (npr. Teroson MS 939)
Apply an adhesive on the joints between the insulation insert and PVC glass packers (eg. Teroson MS 939)

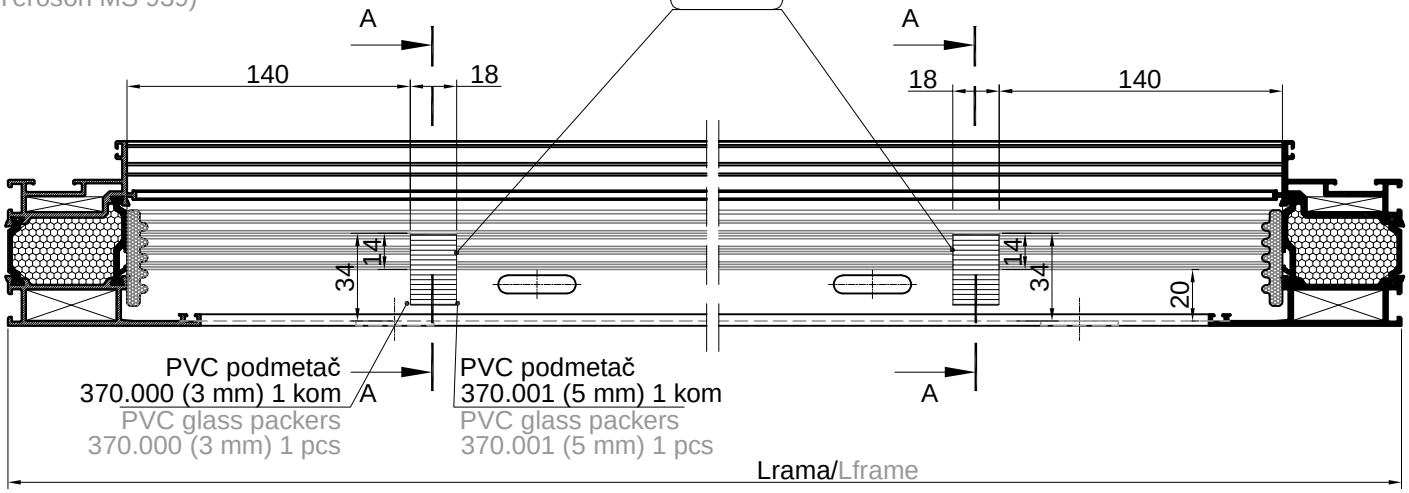

silikonirati spojeve između izolacijskog umetka i pvc podmetača (npr. Teroson MS 939)
Apply an adhesive on the joints between the insulation insert and PVC glass packers (eg. Teroson MS 939)

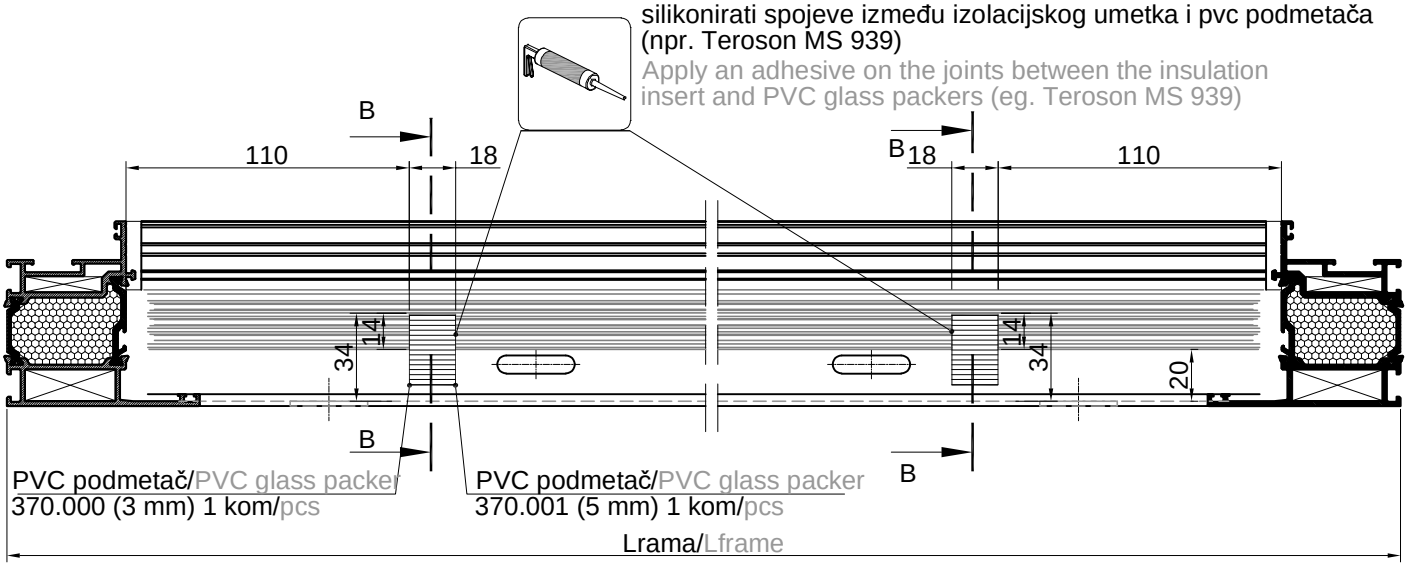


- OBRADA HORIZONTALNE STAKLO LAJSNE F-1350
- PROCESSING OF THE GLAZING BEAD F-1350

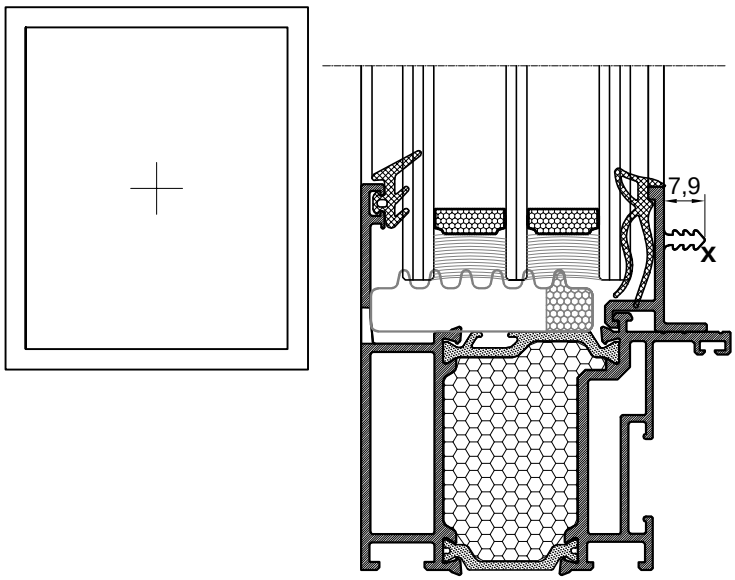


B-B
FT-0400F

Obrada profila je ista i za profil:
Profile processing is the same for the profile:




mjera pilanja na ramu
cutting measure on the frame

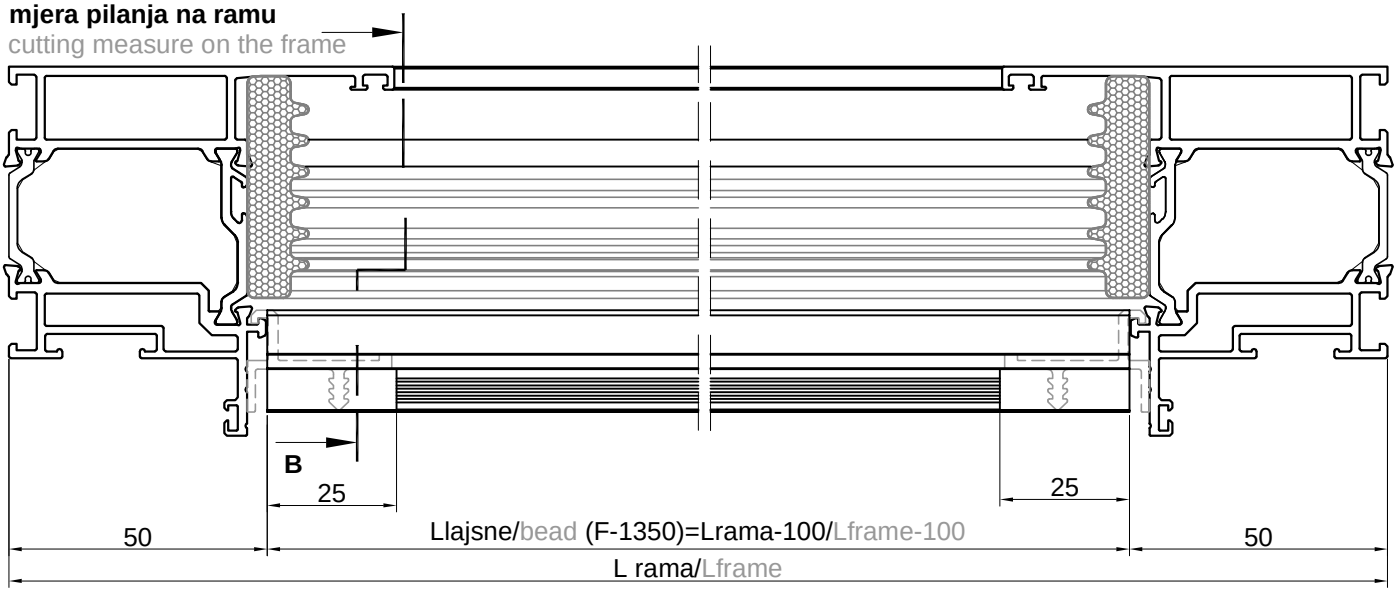


- mjera pilanja lajsne za ram FT-0400F Lrama-100
- skidanje dijela profila (x) s krajeva po 25 mm zbog ugradnje drvene obloge pod kutem

- cutting measure of the glazing bead for the frame FT-0400F Lframe-100
- cut part of the profile (x) from the end 25 mm due to installation of wooden coverings at an angle

- OBRADA HORIZONTALNE STAKLO LAJSNE F-1350
- PROCESSING OF THE GLAZING BEAD F-1350

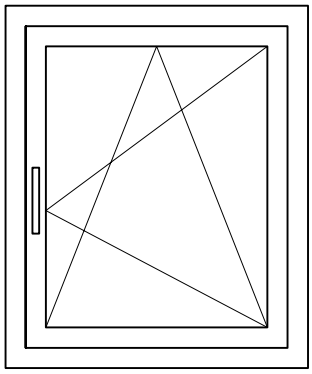


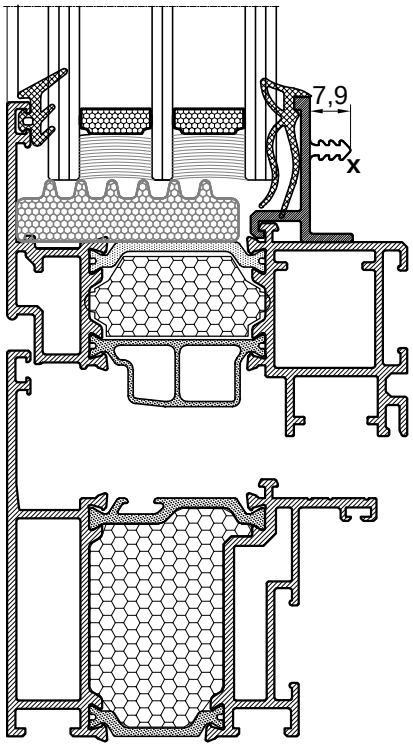

A-A
FT-0410F

FT-0400F

Obrada profila je ista i za profil:
Profile processing is the same for the profile:




F-1725


- mjera pilanja lajsne za krilo FT-0410F Lkr-83
- skidanje dijela profila (x) s krajeva po 25 mm zbog ugradnje drvene obloge pod kutem


- cutting measure of the glazing bead for the sash FT-0410F Lsa-83
- cut part of the profile (x) from the end 25 mm due to installation of wooden coverings at an angle

mjera pilanja na krilu
cutting measure on the sash

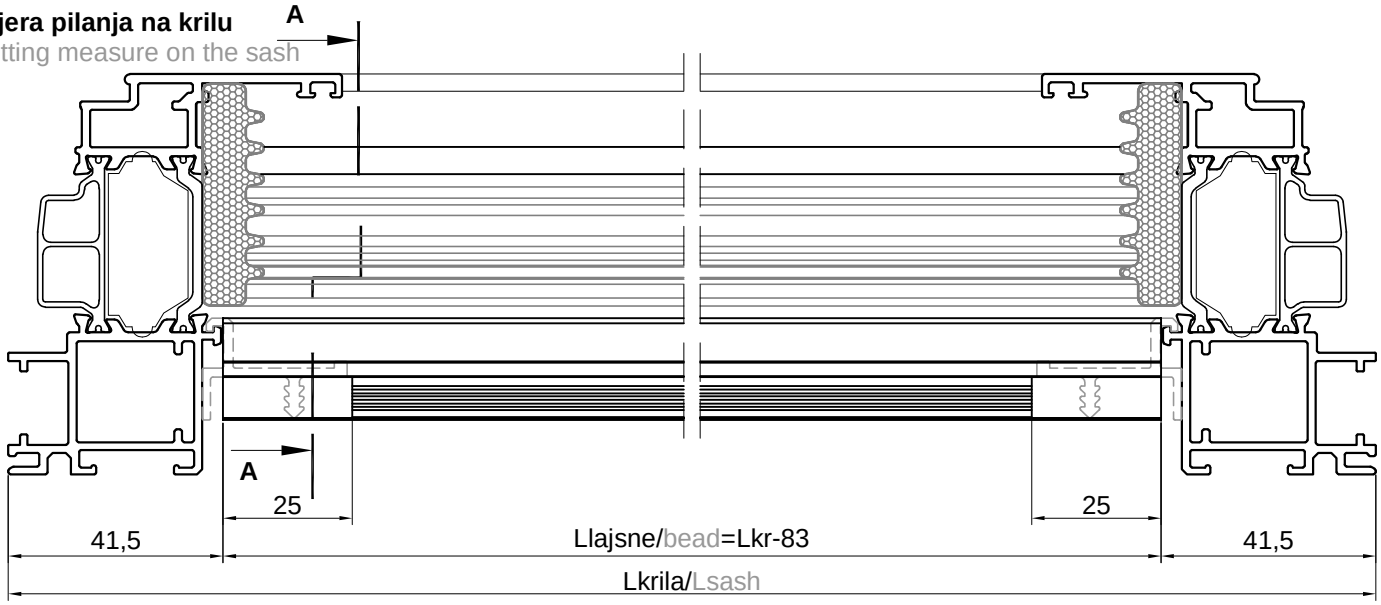

- OBRADA HORIZONTALNE STAKLO LAJSNE F-1350
- PROCESSING OF THE GLAZING BEAD F-1350

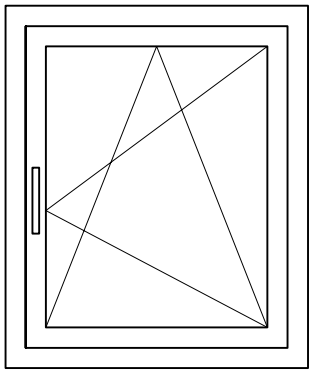


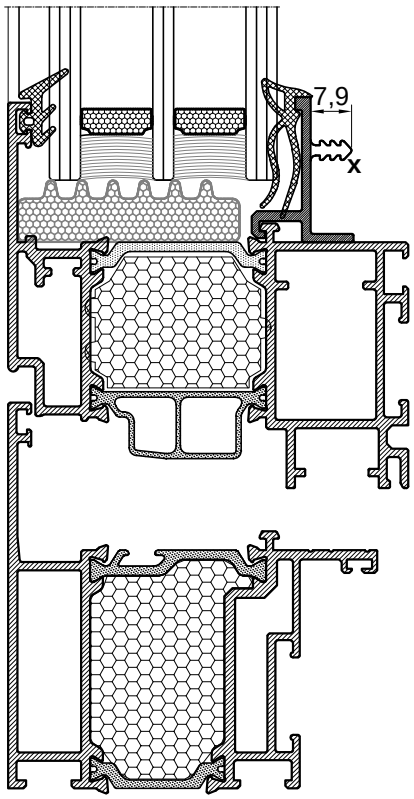

A-A
FT-0411F

FT-0400F

Obrada profila je ista i za profil:
Profile processing is the same for the profile:




F-1725


- mjera pilanja lajsne za krilo FT-0411F Lkr-103
- skidanje dijela profila (x) s krajeva po 25 mm zbog ugradnje drvene obloge pod kutem


- cutting measure of the glazing bead for the sash FT-0411F Lsa-103
- cut part of the profile (x) from the end 25 mm due to installation of wooden coverings at an angle


mjera pilanja na krilu
cutting measure on the sash

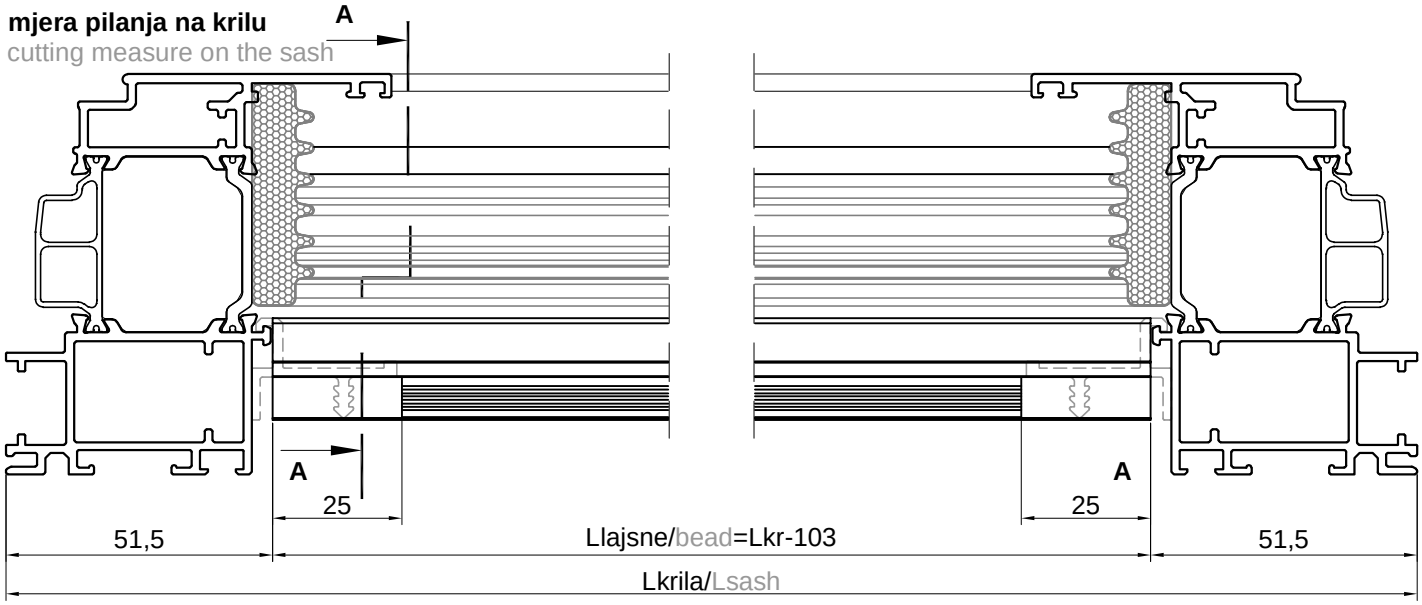


- PILANJE STAKLO LAJSNI I OBRADA HORIZONTALNE STAKLO LAJSNE F-1350
- CUTTING OF GLAZING BEADS AND PROCESSING OF THE HORIZONTAL GLAZING BEADS F-1350

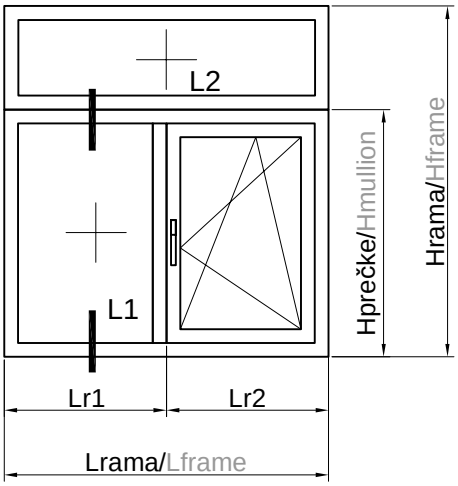

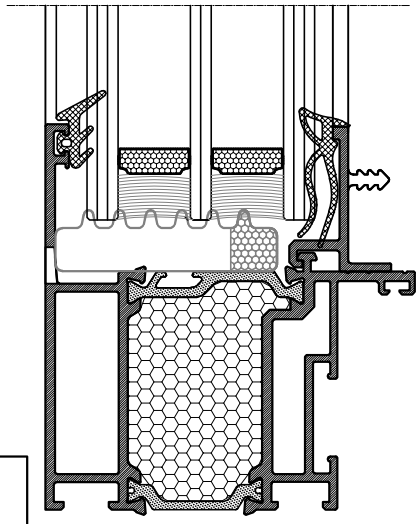


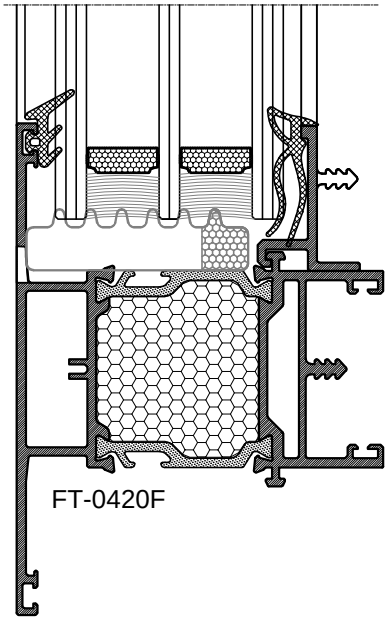



Obrada profila je ista i za profil:
Profile processing is the same for the profile:




L1 (mjera pilanja donje horizontalne lajsne F-1350 na ramu).....L1=Lr1-73.5
L2 (mjera pilanja donje horizontalne lajsne F-1350 na prečki)....Lr2=Lrama-104.5
L1 (cutting measure for the lower horizontal bead F-1350 on the frame).....L1=Lr1-73.5
L2 (cutting measure for the lower horizontal bead F-1350 on the mullion)....Lr2=Lframe-104.5

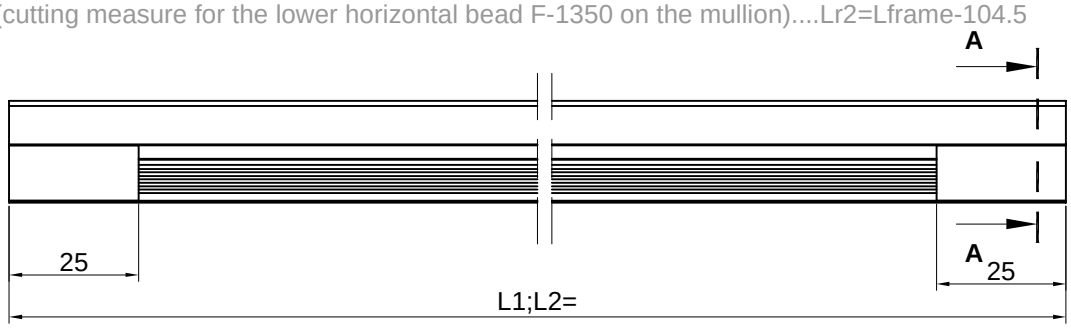




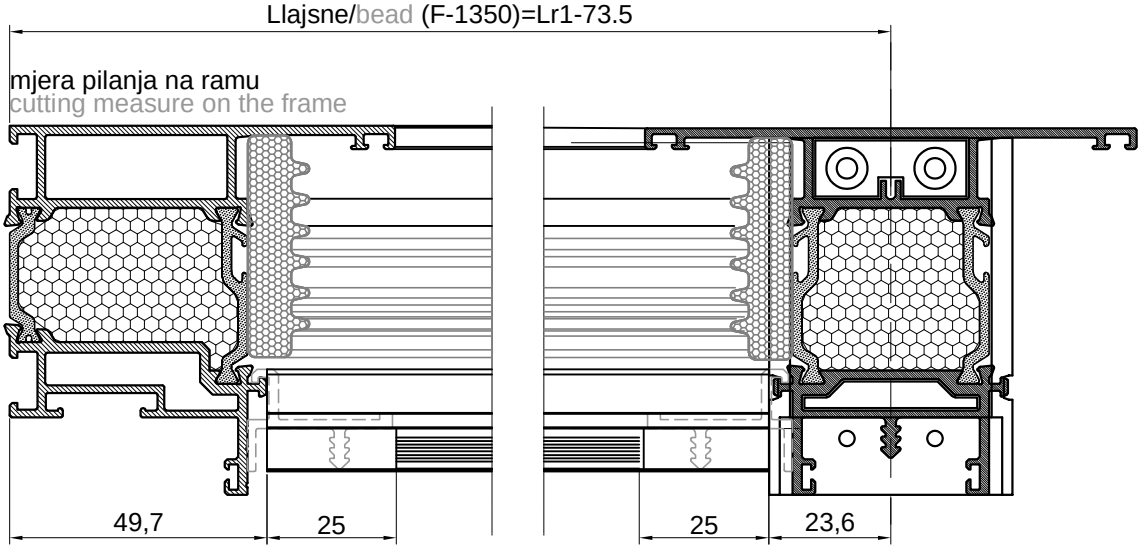


- OBRADA HORIZONTALNE STAKLO LAJSNE F-1350
- PROCESSING OF THE GLAZING BEAD F-1350

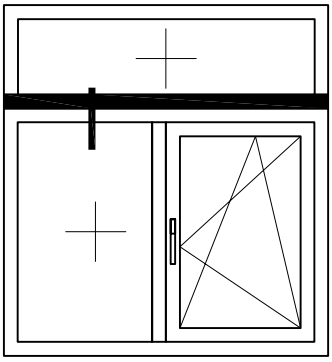

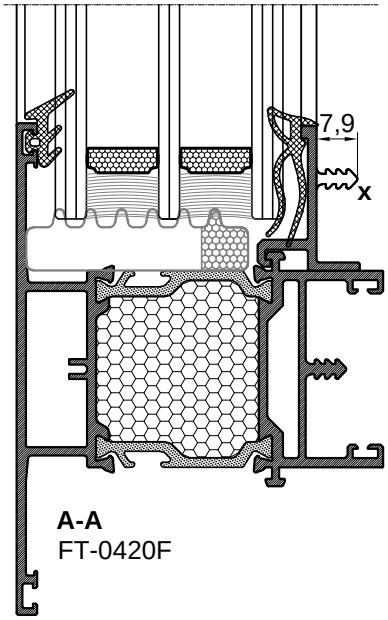


A-A
FT-0420F

Obrada profila je ista i za profil:
Profile processing is the same for the profile:





mjera pilanja na prečki
cutting measure on the mullion

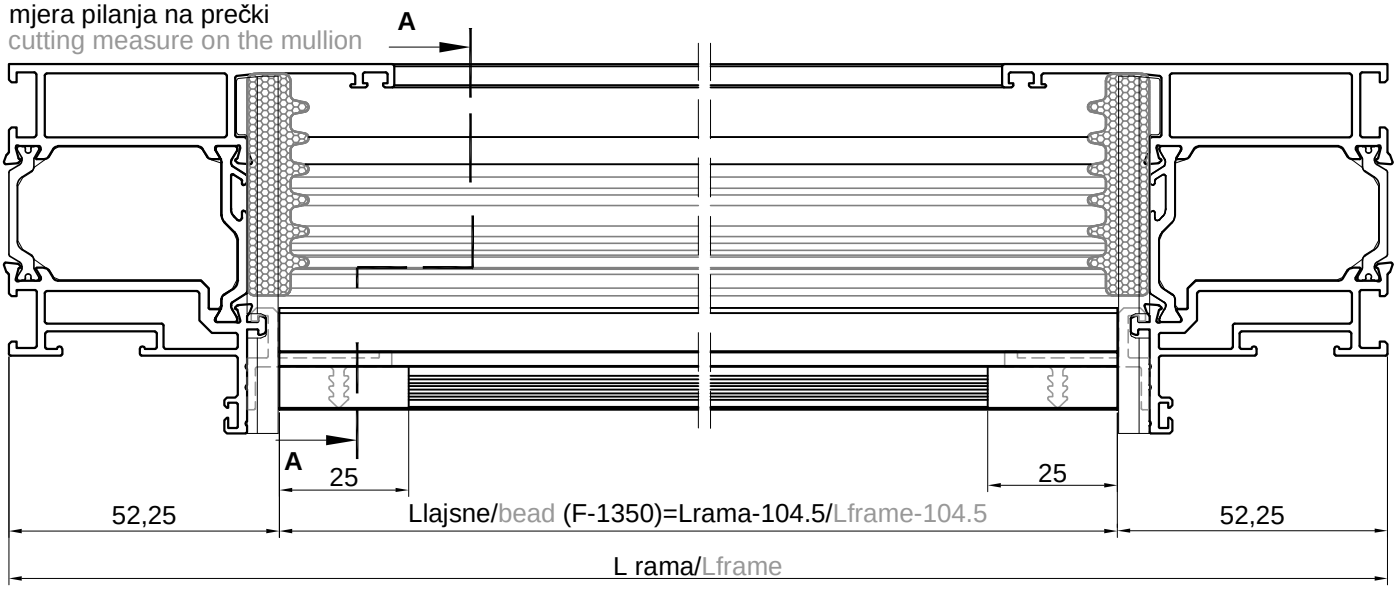


- mjera pilanja lajsne za prečku FT-0420F Lrama-104.5
- skidanje dijela profila (x) s krajeva po 25 mm zbog ugradnje drvene obloge pod kutem

- cutting measure of the glazing bead for the mullion FT-0420F Lframe-104.5
- cut part of the profile (x) from the end 25 mm due to installation of wooden coverings at an angle

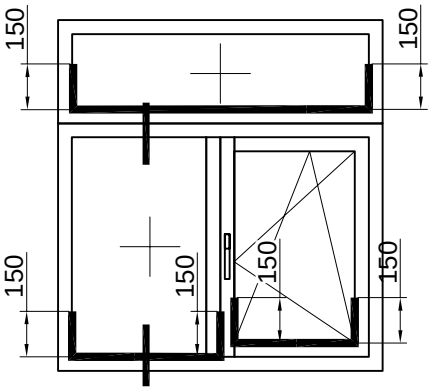




Obrada profila je ista i za profil:
Profile processing is the same for the profile:

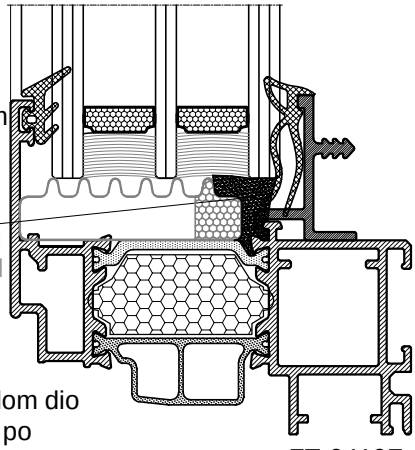


prije postavljanja staklo lajsne ispuniti ljepilom dio između stakla, izolacijskog umetka i krila, po horizontali i vertikali 150 mm. (npr.Teroson MS-939)
before montage of the glazing bead, apply an adhesive between insulation insert, glass and sash profile, horizontally and vertically 150 mm (eg. Teroson MS 939)

FT-0410F

prije postavljanja staklo lajsne ispuniti ljepilom dio između stakla, izolacijskog umetka i rama, po horizontali i po vertikali 150 mm. (npr.Teroson MS-939)
before montage of the glazing bead, apply an adhesive between insulation insert, glass and frame profile, horizontally and vertically 150 mm (eg. Teroson MS 939)

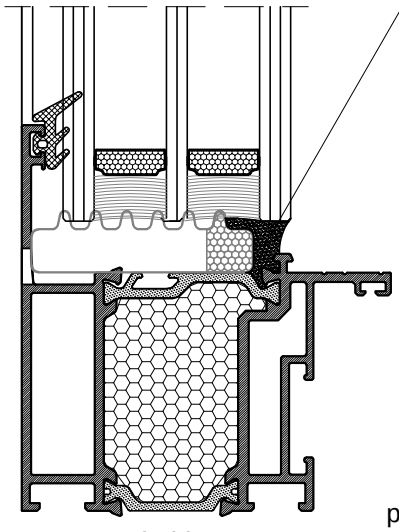


FT-0400F




F-1350

nakon nanošenja ljepila postaviti brtvu i staklo lajsnu
after applying an adhesive, set gasket and the glazing bead

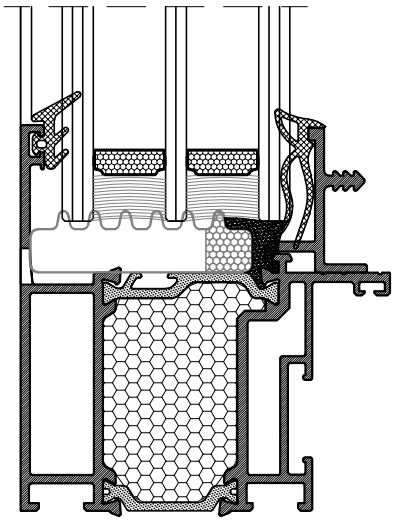


FT-0400F

prije postavljanja staklo lajsne ispuniti ljepilom dio između stakla, izolacijskog umetka i prečke, po horizontali i vertikali 150 mm. (npr.Teroson MS-939)
before montage of the glazing bead, apply an adhesive between insulation insert, glass and mullion profile, horizontally and vertically 150 mm (eg. Teroson MS 939)

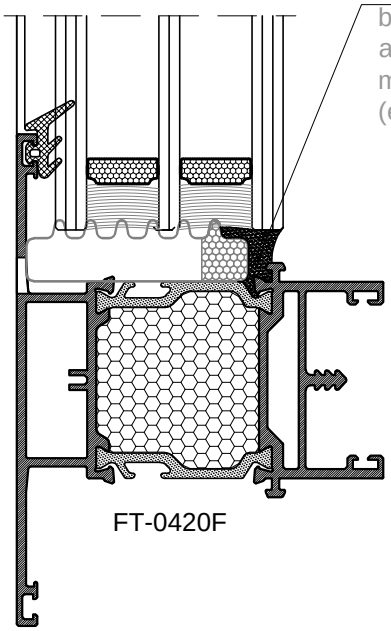


FT-0420F




F-1350

nakon nanošenja ljepila postaviti brtvu i staklo lajsnu
after applying an adhesive, set gasket and the glazing bead

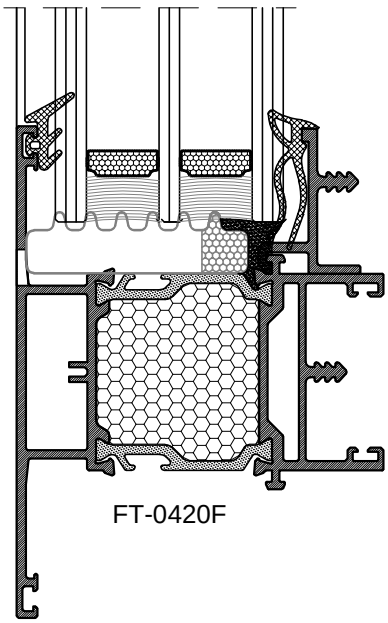


FT-0420F

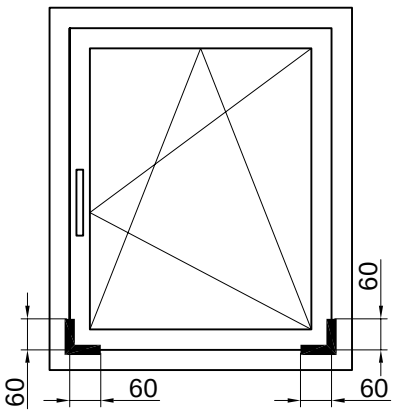



DETALJ UGRADNJE KUTNOG UMETKA CENTRALNE BRTVE
INSTALLATION DETAIL OF CORNER INSERT FOR THE CENTRAL GASKET

-Preporučuje se, na mjestu dodira, lijepljenje centralne brtve 338.017 i kutnog umetka 368.003 ljepilom za EPDM (npr. trenutno ljepilo Loctite 4090).
-Preporučuje se lijepljenje kutnog umetka 368.003 za podlogu, neutralnim ljepilom / npr. "Henkel" - *Teroson MS 939* /, prema crtežu (u donjem dijelu prozora).
-Ljepljenjem se osigurava neprekidnost centralne brtve čime se osigurava potrebna zrakopropusnost i vodonepropusnost spoja.

-It is recommended, at the point of contact, bonding of the central gasket 338.017 and the corner insert 368.003 with EPDM adhesive (e.g. Loctite 4090 instant adhesive).
-To prevent possible leakage of rainwater, it is recommended to glue the corner insert 368.003 to the profile with neutral glue / e.g. "Henkel" - *Teroson MS 939* /, as shown in the drawing (at the bottom of the window).
-Gluing ensures the continuity of the central gasket, ensuring the necessary airtightness and watertightness of the joint.

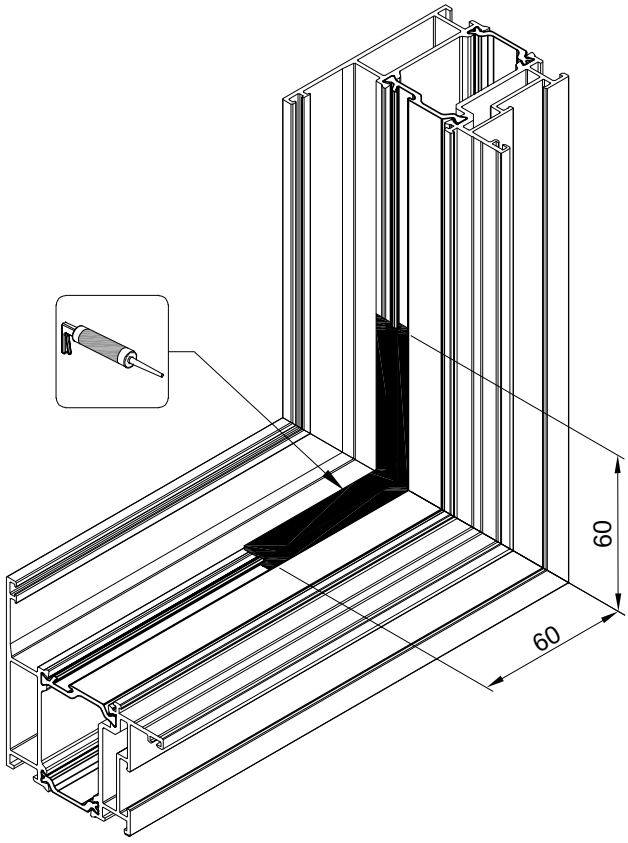


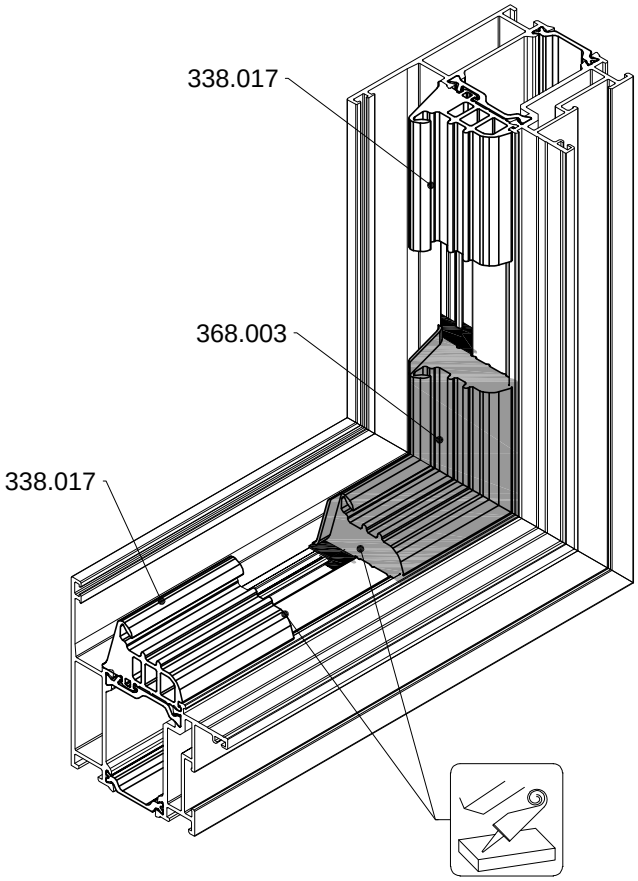





368.003 -Kutni umetak za centralnu brtvu 338.017
368.003 -Corner insert for central gasket 338.017

OBRADA PROFILA PRAGA FT-0401F PREMA RAMU FT-0400F
PROCESSING OF THE THRESHOLD PROFILE FT-0401F TOWARDS THE FRAME FT-0400F

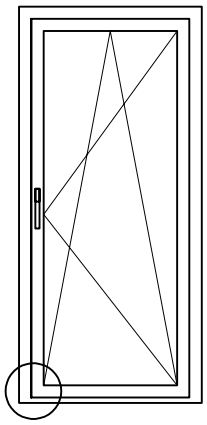

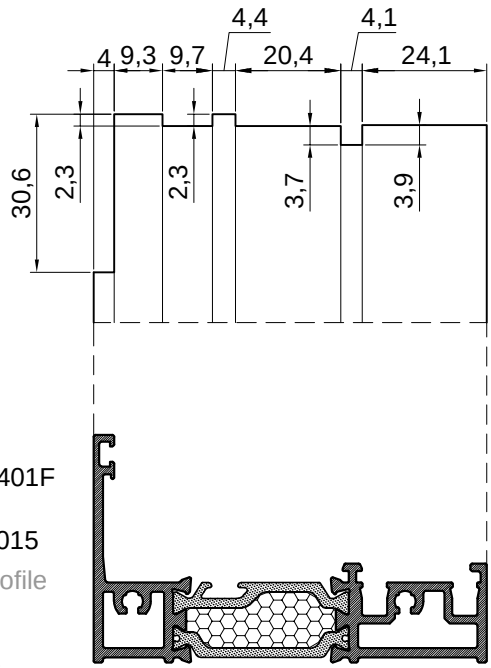

FT-0400F

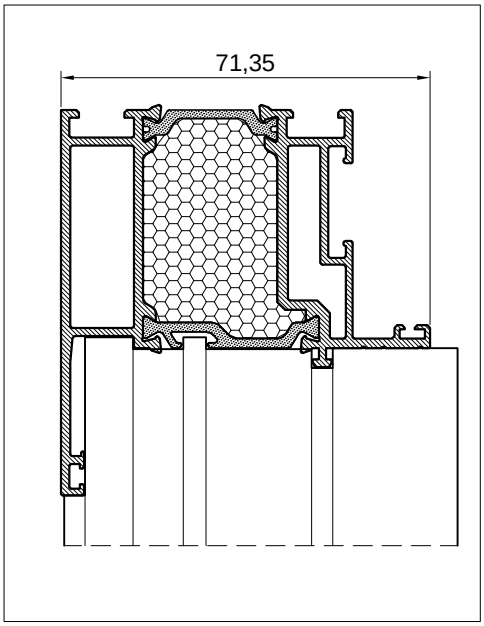



- Obrada profila FT-0401F

Obrada glodanjem
Alat: Snopa glodala 220.015

- Processing of the profile FT-0401F


Milling processing
Tool: Mill bundle 220.015





1. Postavljanje šablona 230.002 na profil FT-0400F

1. Placing of the template 230.002 on the profile FT-0400F



- Obrada profila rama FT-0400F


Bušenje rupa za spoj s pragom FT-0401F
Alat: svrdlo Ø4 i Ø8
šablon 230.002


- Processing of the frame profile FT-0400F

Drilling holes for connection with the threshold FT-0401F
Tool: end mill Ø4 i Ø8
template 230.002

2. Bušenje rupa Ø4 kroz stijenke profila FT-0400F


2. Drilling holes Ø4 through the walls of the profile FT-0400F

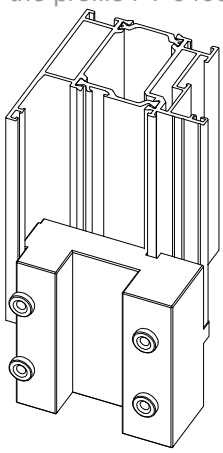




3. Bušenje rupe Ø8 na vanjskoj stijenci profila za prolaz glave vijka


3. Drilling a Ø8 hole on the outer wall of the profile for the passage of the screw head

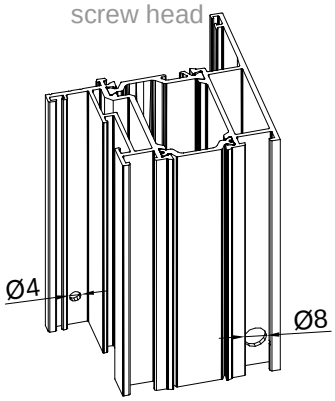


OBRADA PROFILA KRILA ZA UGRADNJU POGONSKOG MEHANIZMA I RUČKE OKOV ROTO

PROCESSING OF THE SASH PROFILE FOR INSTALLATION OF THE T&T ESPAGNOLETTE AND HANDLE HARDWARE ROTO

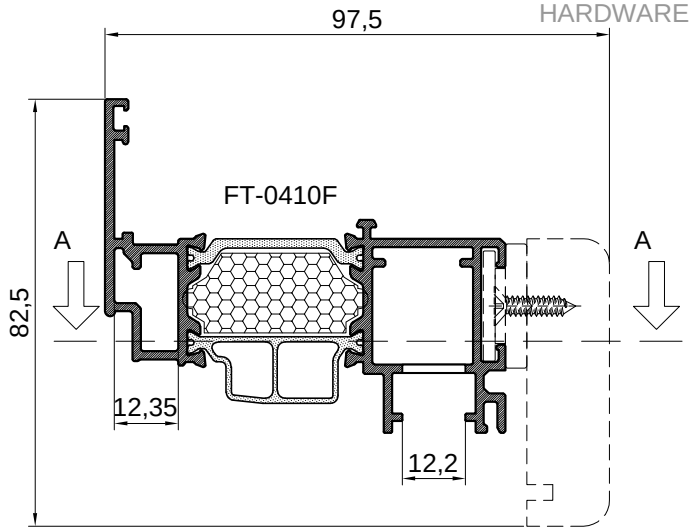


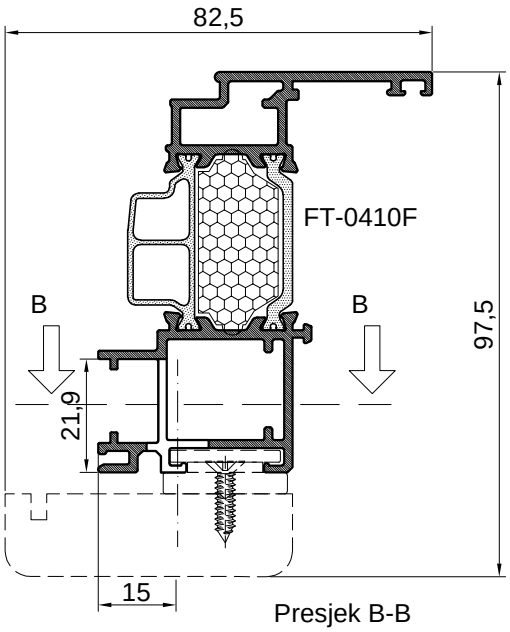

Presjek A-A
Cross-section A-A

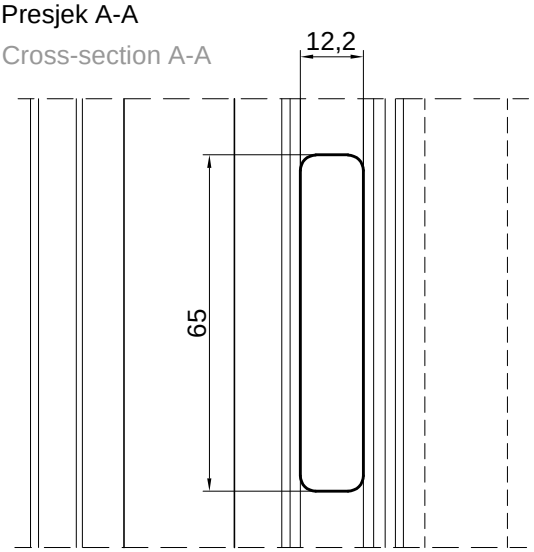

Presjek B-B
Cross-section B-B

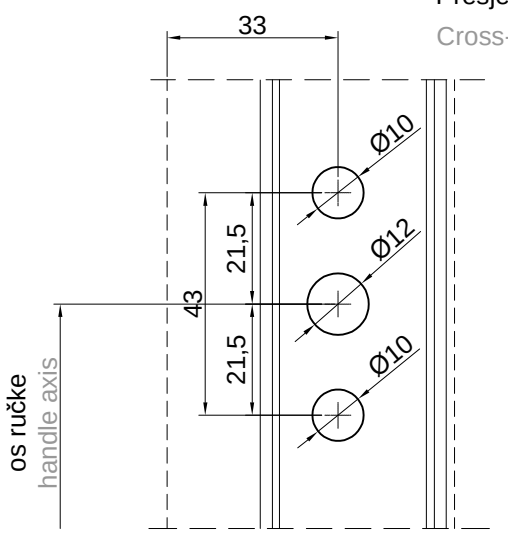


Obrada profila glodanjem
Alat: glodalo Ø6

Processing of the profile with milling
Tool: milling cutter Ø6


Obrada profila bušenjem
Alat: Svrdlo Ø10 i Ø12

Processing of the profile with drilling
Tool: end mill Ø10 i Ø12


FT-0410F

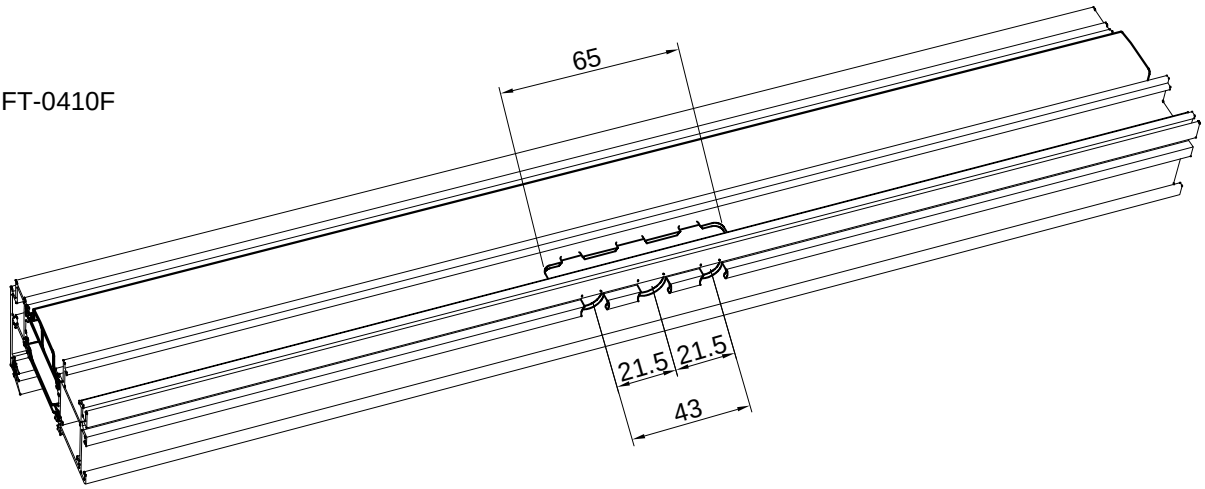


OBRADA DRVENE OBLOGE NA PROFILU KRILA ZA UGRADNJU RUČKE
OKOV ROTO
PROCESSING OF THE WOODEN COVERING ON THE SASH PROFILE FOR INSTALLATION OF THE HANDLE
HARDWARE ROTO

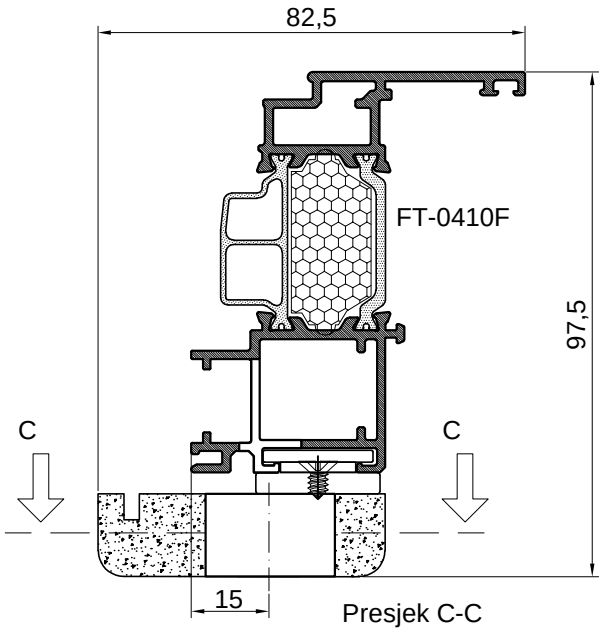


Presjek C-C
Cross-section C-C

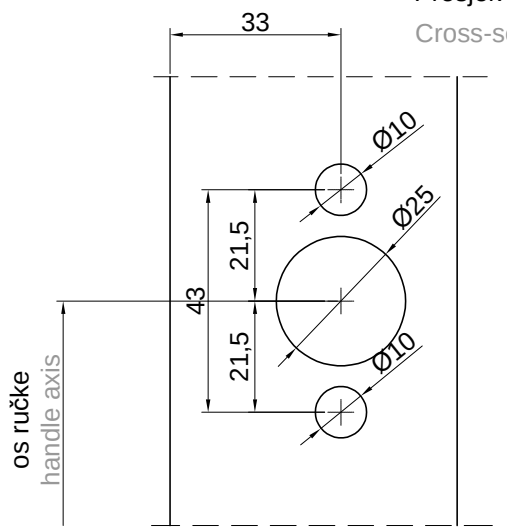


Obrada profila bušenjem
Alat: Svrdlo Ø10 i Ø25
Processing of the profile with drilling
Tool: end mill Ø10 i Ø25

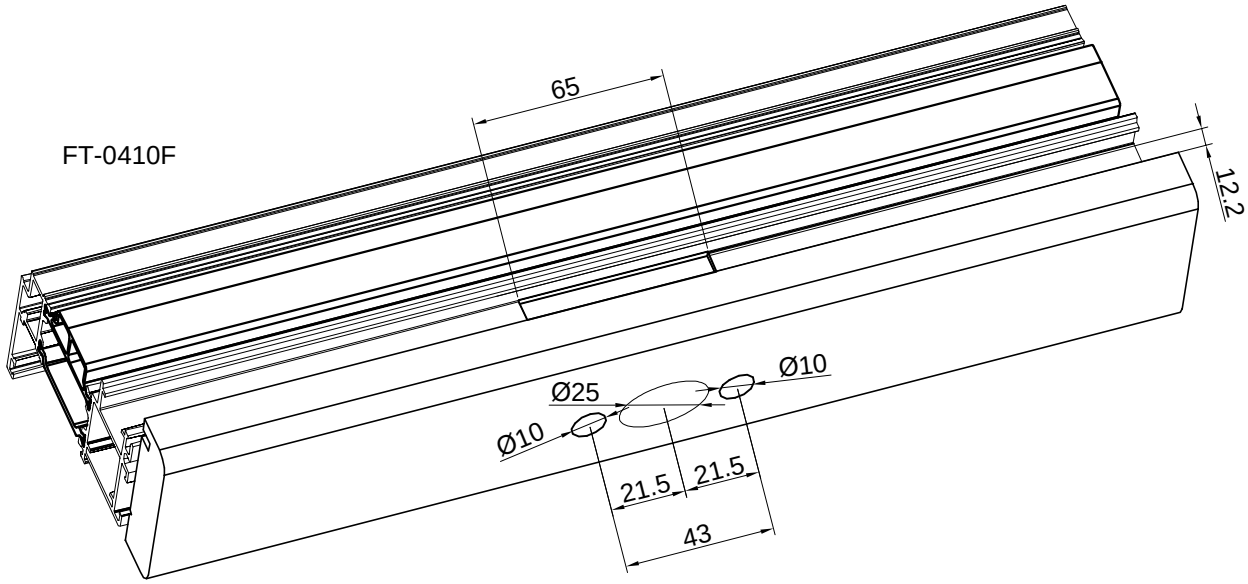


OBRADA PROFILA RAMA ZA PRIHVAT ŠARKI
OKOV ROTO NT - A
PROCESSING OF THE FRAME PROFILE FOR HINGE PLACEMENT
HARDWARE ROTO NT - A

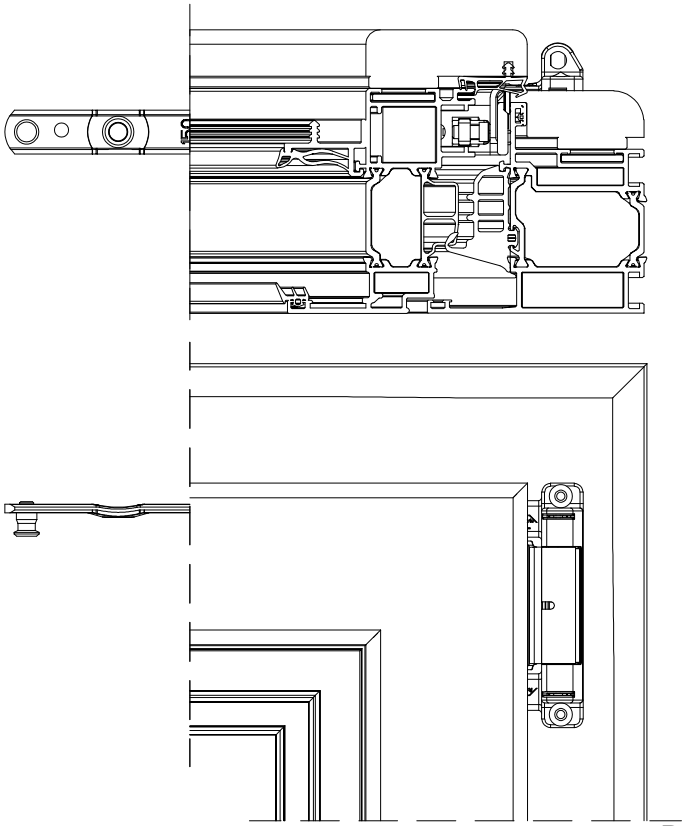


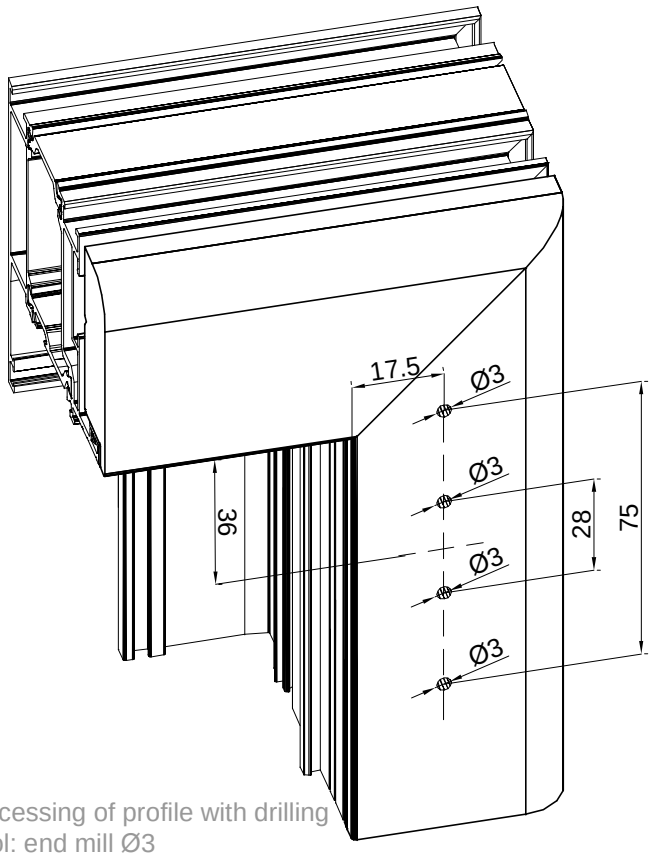

Obrada profila bušenjem
Alat: svrdlo Ø3
Donja i gornja šarka su ujedno i šabloni za pozicioniranje


Processing of profile with drilling
Tool: end mill Ø3
Lower and upper hinge are at the same time templates for drilling

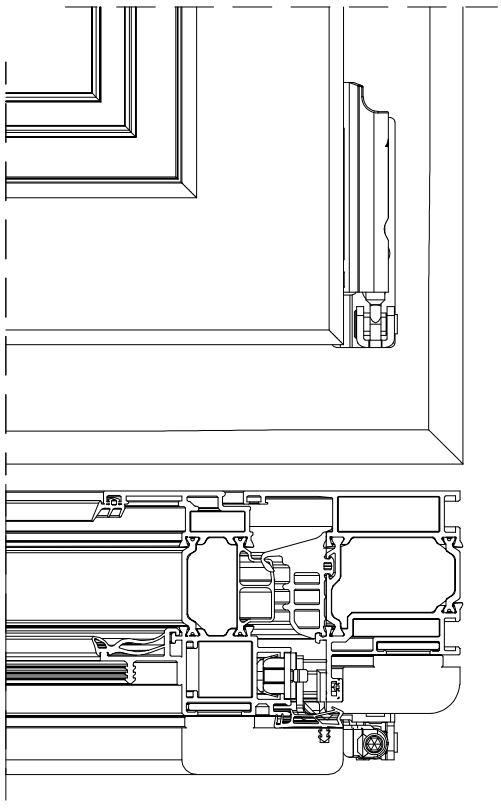


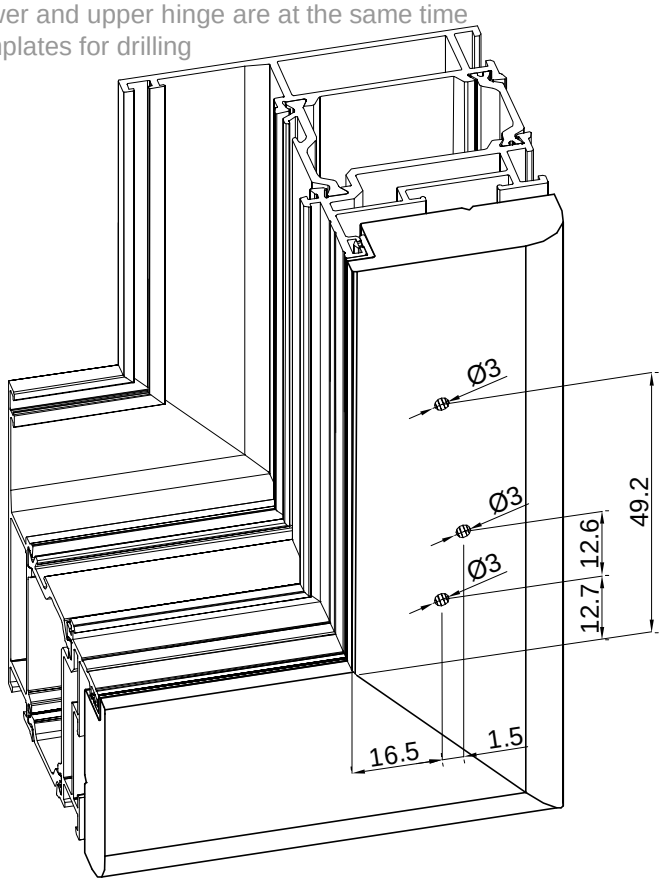



PODEŠAVANJE ŠARKI U 3 OSI
OKOV ROTO NT - A


HINGE ADJUSTMENT IN 3 AXES
HARDWARE ROTO NT - A

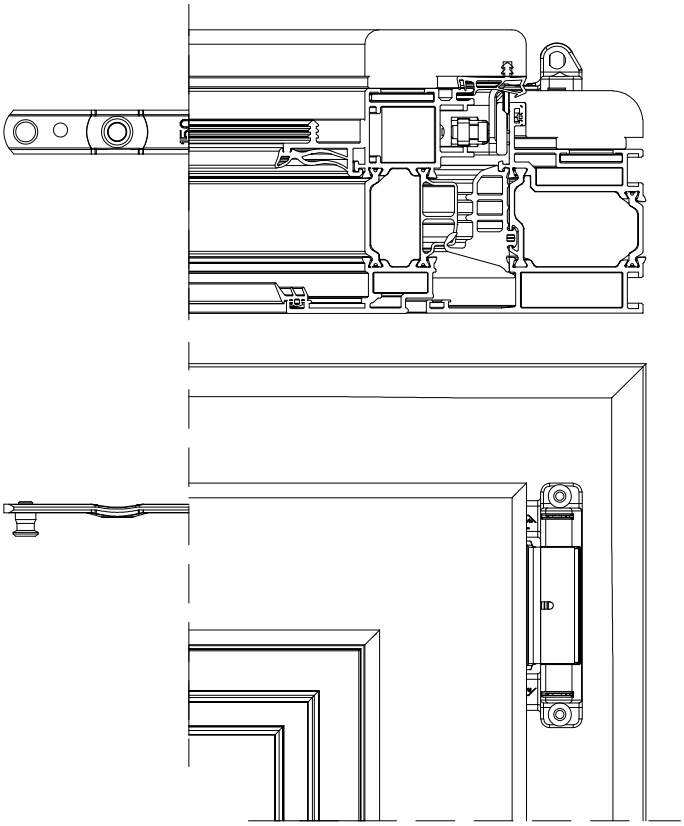


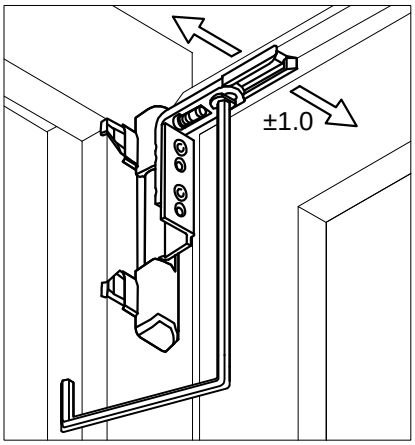

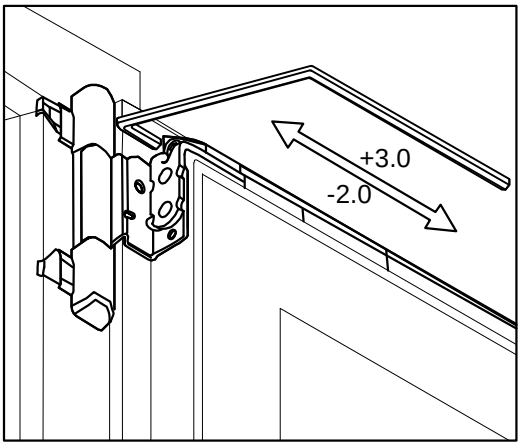

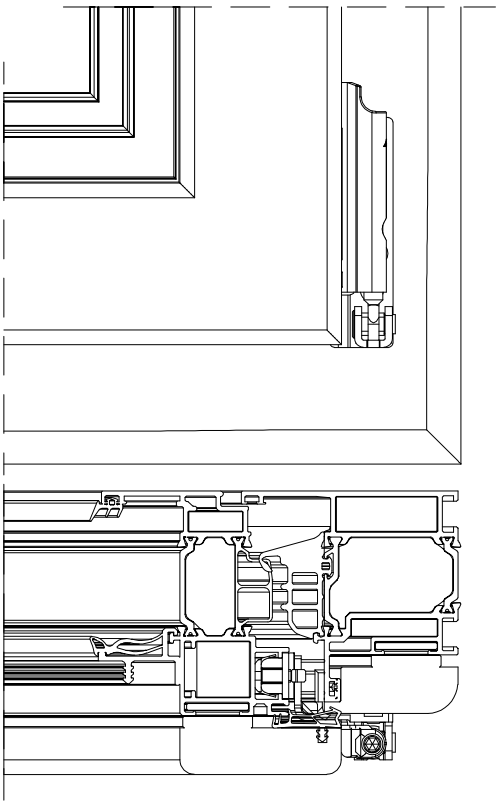


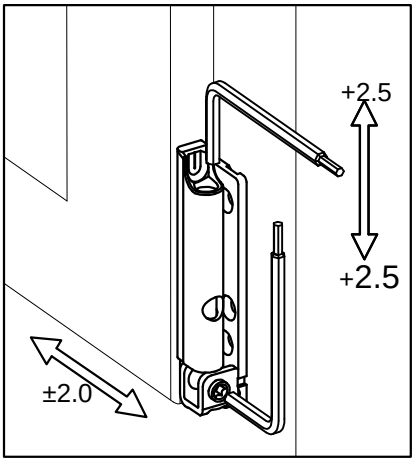

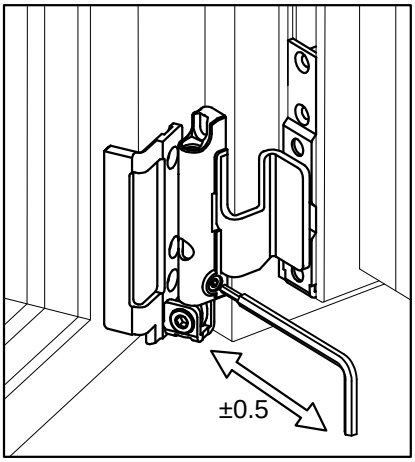

Obrada profila rama za okov
Roto NT - Designo


Procesing of the frame profile for hardware
Roto NT - Designo

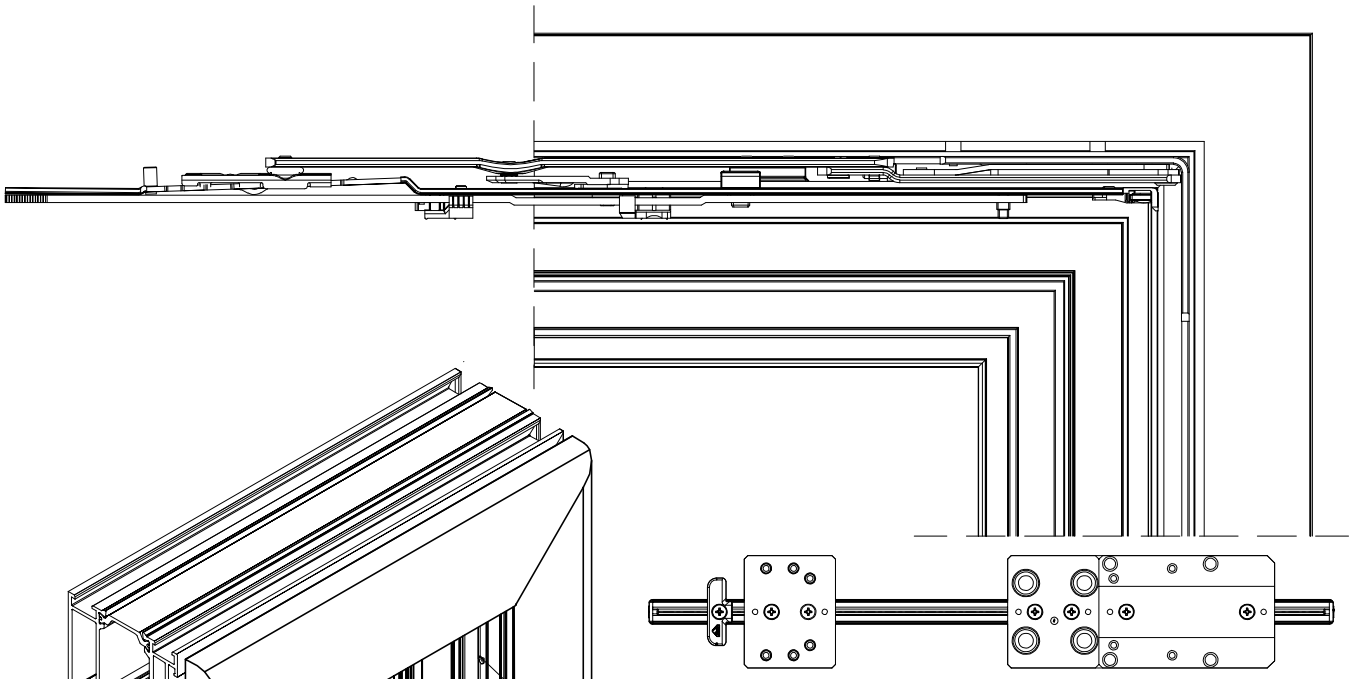


- Obrada profila rama za prihvat Roto okova - Designo
  Obrada bušenjem
  Alat: Svrdlo Ø6
  Šablon Roto - 602.577
- Proc. of frame profile for placement of the Roto - Designo hardware
  Drilling processing
  Tool: end mill Ø6
  Template Roto - 602.577

Obrada profila rama za kutni ležaj i kutnu sponu u donjem dijelu i za škare u gornjem dijelu je potpuno ista. Koristi se šablon Roto 602.577


Processing of the frame profile for the pivot rest and corner hinge in the lower part is the same for the stay arm in the upper part.
Template Roto 602.577 is used.

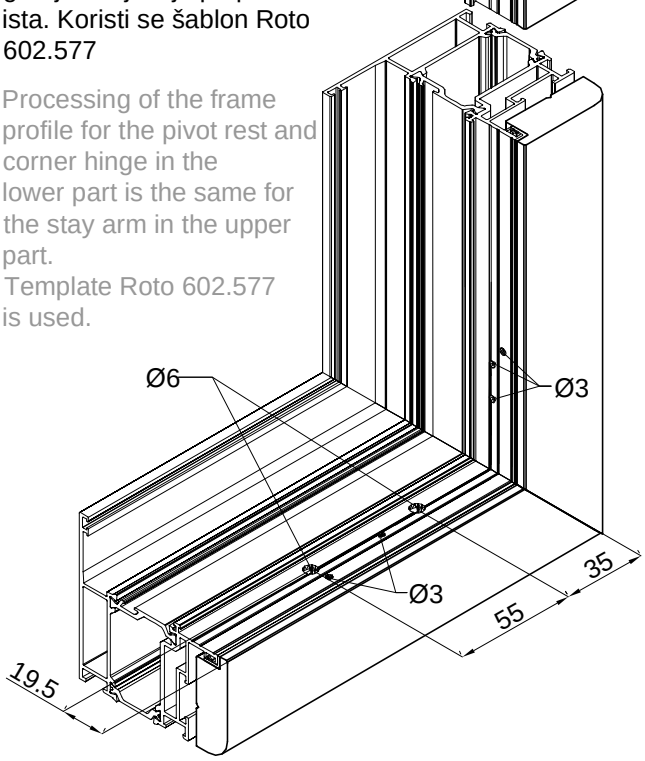


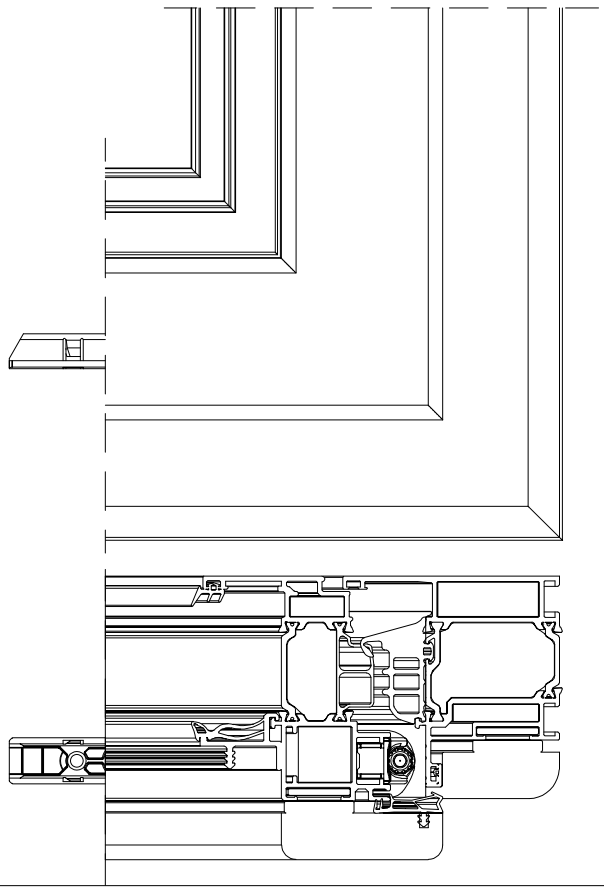

Prikaz podešavanja kutnog ležaja i kutne spone u donjem dijelu i škara u gornjem dijelu
Okov Roto NT-Designo


Adjustment of the pivot rest and corner hinge in the lower part and the stay arm in the upper part
Hardware Roto NT-Designo

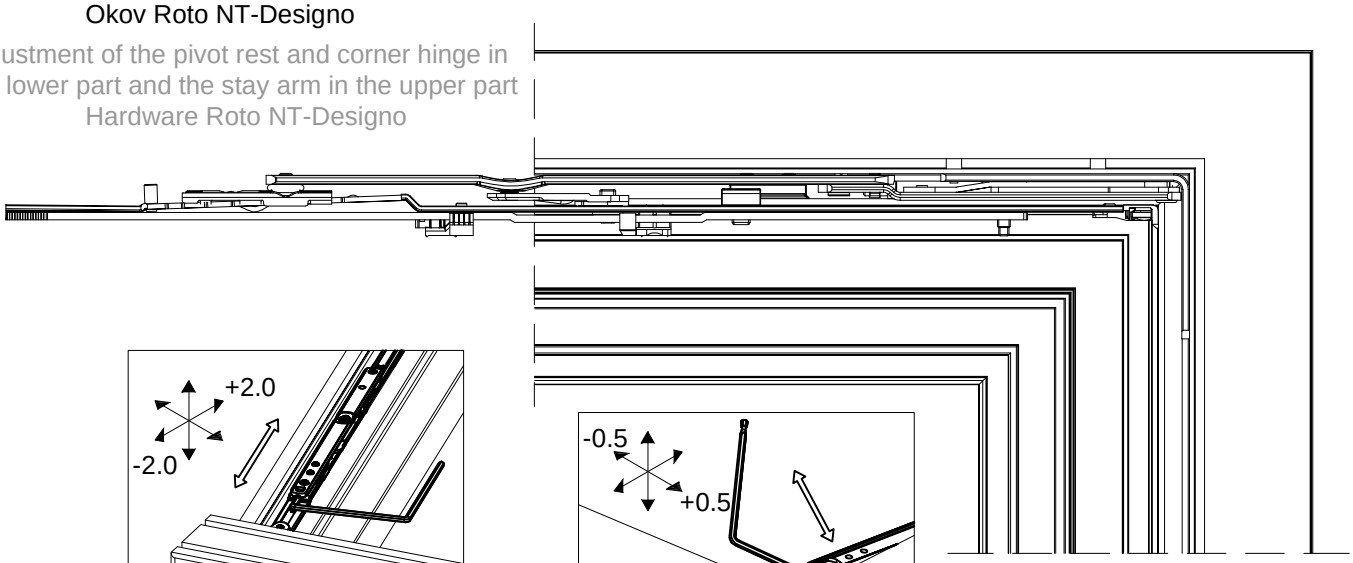






- Mogućnost podešavanja škara u dvije ose
- Possibility of stay arm adjustment in two axes

- Mogućnost podešavanja kutnog ležaja Designo u tri ose
- Possibility of pivot rest Designo adjustment in three axes









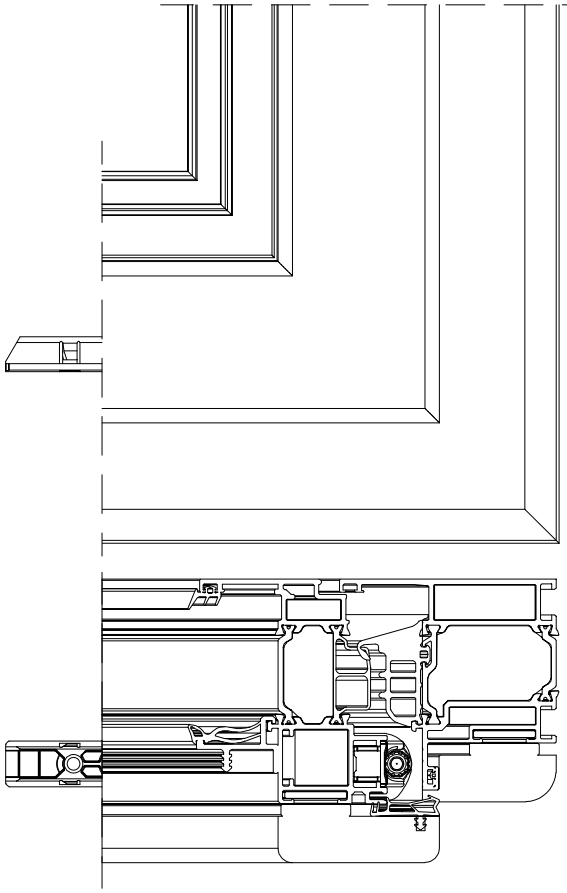


PRIKAZ MONTAŽE DRVENE OBLOGE 600.008 NA KRILO FT-0410F
MONTAGE OF THE WOODEN COVERING 600.008 ON THE SASH FT-0410F

375.050




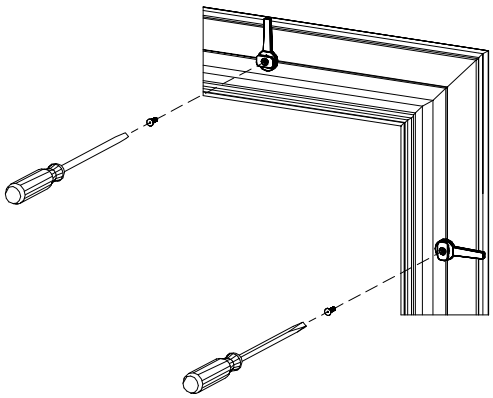

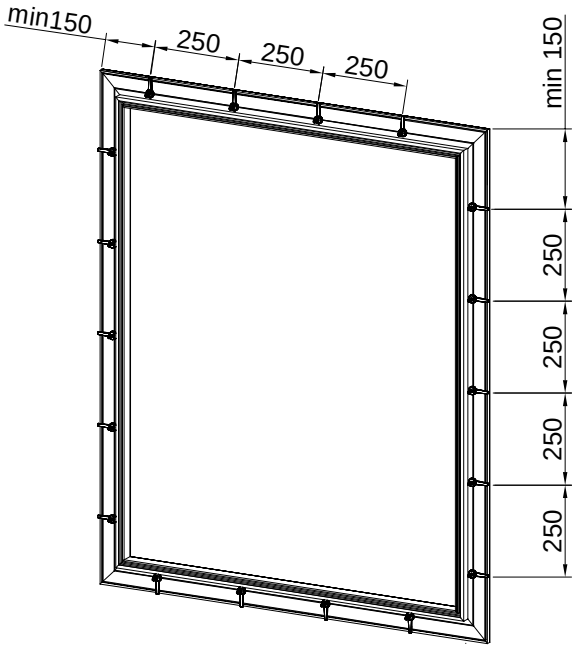


1. Montiranje kopči na drvenu oblogu pomoću vijaka
1. Mounting of clamps on the wooden covering with screws

2. Rasporediti kopče po obodu drvene obloge s pravilnim razmacima u položaju otključano
2. Array the clamps in unlocked position around wooden covering edge with equal spacing

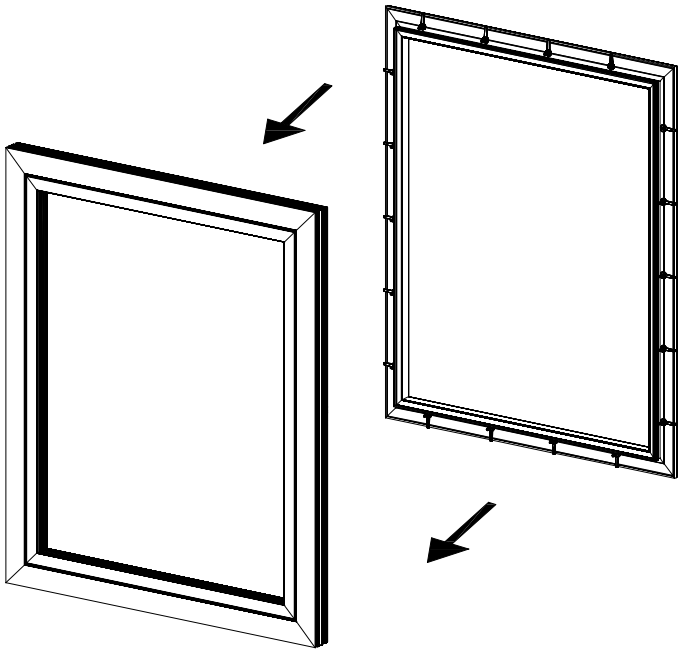


3. Postaviti drvenu oblogu na krilo
3. Place the wooden covering on the sash

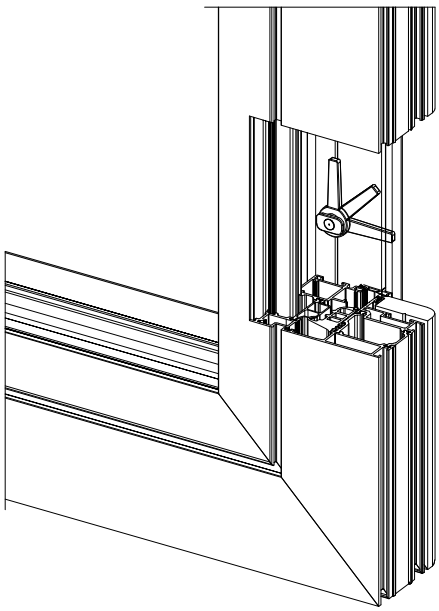

4. Postaviti kopče u položaj zaključano
4. Adjust the clamps into the locked position


- MOGUĆNOSTI ISPORUKE I PRIKAZ NAČINA SPAJANJA DRVENIH OBLOGA
- DELIVERY OPTIONS AND WAYS OF CONNECTING OF THE WOODEN COVERINGS


1. Isporuka drvenih obloga u šipkama
1. Delivery of wooden coverings in bars

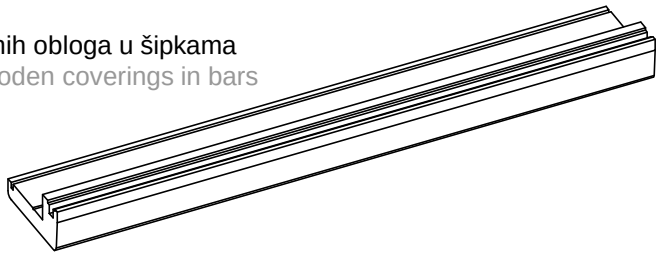


Isporuka drvenih obloga u šipkama
Materijal drvo
Max.dužina šipke 3250 mm
Delivery of wooden coverings in bars
Material wood
Max.bar length 3250 mm

2. Isporuka drvenih obloga s ugrađenim excentrima za spajanje
2. Delivery of wooden coverings with embedded cam locks

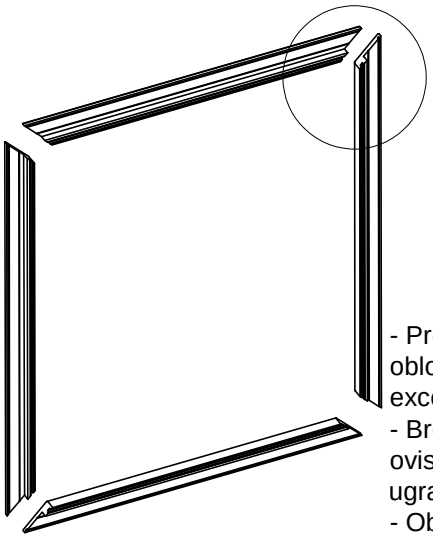

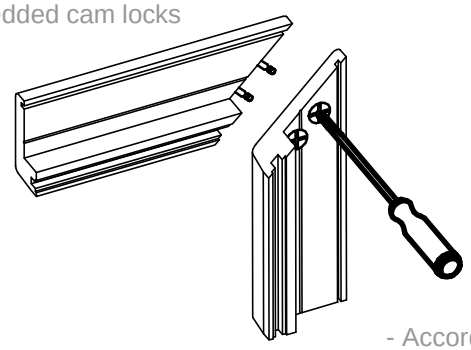






- Prema dostavljenoj dokumentaciji drvene obloge se pilaju na mjeru i u njih se ugrađuju excentri za spajanje.
- Broj ugrađenih excentara u jednom spoju ovisi od širine drvene obloge, a obično se ugrađuju 1 ili 2 excentra/spoju.
- Obrađene drvene obloge s ugrađenim excentrima se isporučuju rastavljeno
- Sastavljanje drvenih obloga se vrši na licu mjesta okretanjem excentara pomoću zavijača

- According to delivered documentation wooden coverings are cut to size and cam locks are inserted for connection
- Number of cam locks in one joint depends on width of a wooden covering, usually it is 1 or 2 per joint
- Processed wooden coverings with embedded cam locks are delivered unassembled
- Connecting of wooden coverings is done on the spot by turning the cam lock with a screwdriver

3. Isporuka spojenih drvenih obloga - namjenski za svaki otvor prema dostavljenoj radioničkoj dokumentaciji
3. Delivery of connected wooden coverings - dedicated for windows and doors according to delivered documentation

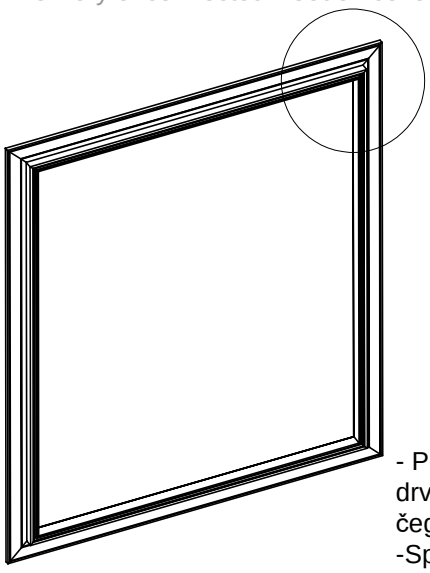

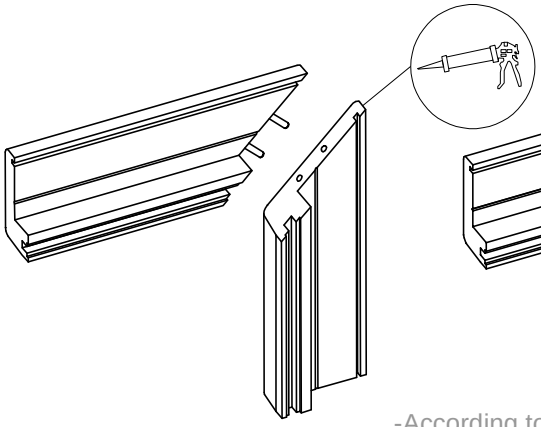



- Prema dostavljenoj dokumentaciji drvene obloge se pilaju na mjeru nakon čega se vrši spajanje
-Spajanje drvenih obloga se vrši pomoću ugrađenih drvenih tipla nakon čega se kontaktne površine između dvije obloge dodatno premažu ljepilom za drvo.
- Drvene obloge isporučuju se obrađene, obojene i spojene

-According to delivered documentation wooden coverings are cut to size whereupon connection follows up
-Connection of wooden coverings is done with embedded wooden dowels whereupon joining surfaces are smeared with wood glue
- Wooden coverings are delivered processed, painted and connected


PRIKAZ LIJEPLJENJA DRVENE OBLOGE 600.005 I 600.006 S BRTVOM 344.045 I STAKLO LAJSNOM F-1350
GLUING OF THE WOODEN COVERINGS 600.005 AND 600.006 WITH THE GASKET 344.045 AND THE GLAZING BEAD F-1350

1. U prvoj fazi lijepimo brtvu 344.045 za staklo lajsnu F-1350 na sljedeći način:
u utoru brtve 344.045 u razmacima 300 mm nanesemo ljepilo (npr. SikaBond AT Universal) u dužini 10 mm i nanesemo brtvu na staklo lajsnu.

1. In the first stage, glue the gasket 344.045 on the glazing bead F-1350 as follows:
In the gasket groove 344.045 at 300 mm intervals, apply an adhesive (e.g. SikaBond AT Universal) in the length of 10 mm and place the gasket on the glazing bead.


2. U drugoj fazi lijepimo drvenu oblogu 600.006 za brtvu 344.045 na sljedeći način:
u utoru drvene obloge 600.006 u razmacima 300 mm nanesemo ljepilo (npr. SikaBond AT Universal) u dužini 10 mm i nanesemo drvenu oblogu na brtvu.

2. In second stage, glue the wooden covering 600.006 to the gasket 344.045 as follows:
In the groove of the wooden covering 600.006 at 300 mm intervals, apply an adhesive (e.g. SikaBond AT Universal) in the length of 10 mm and place the wooden covering on the gasket.

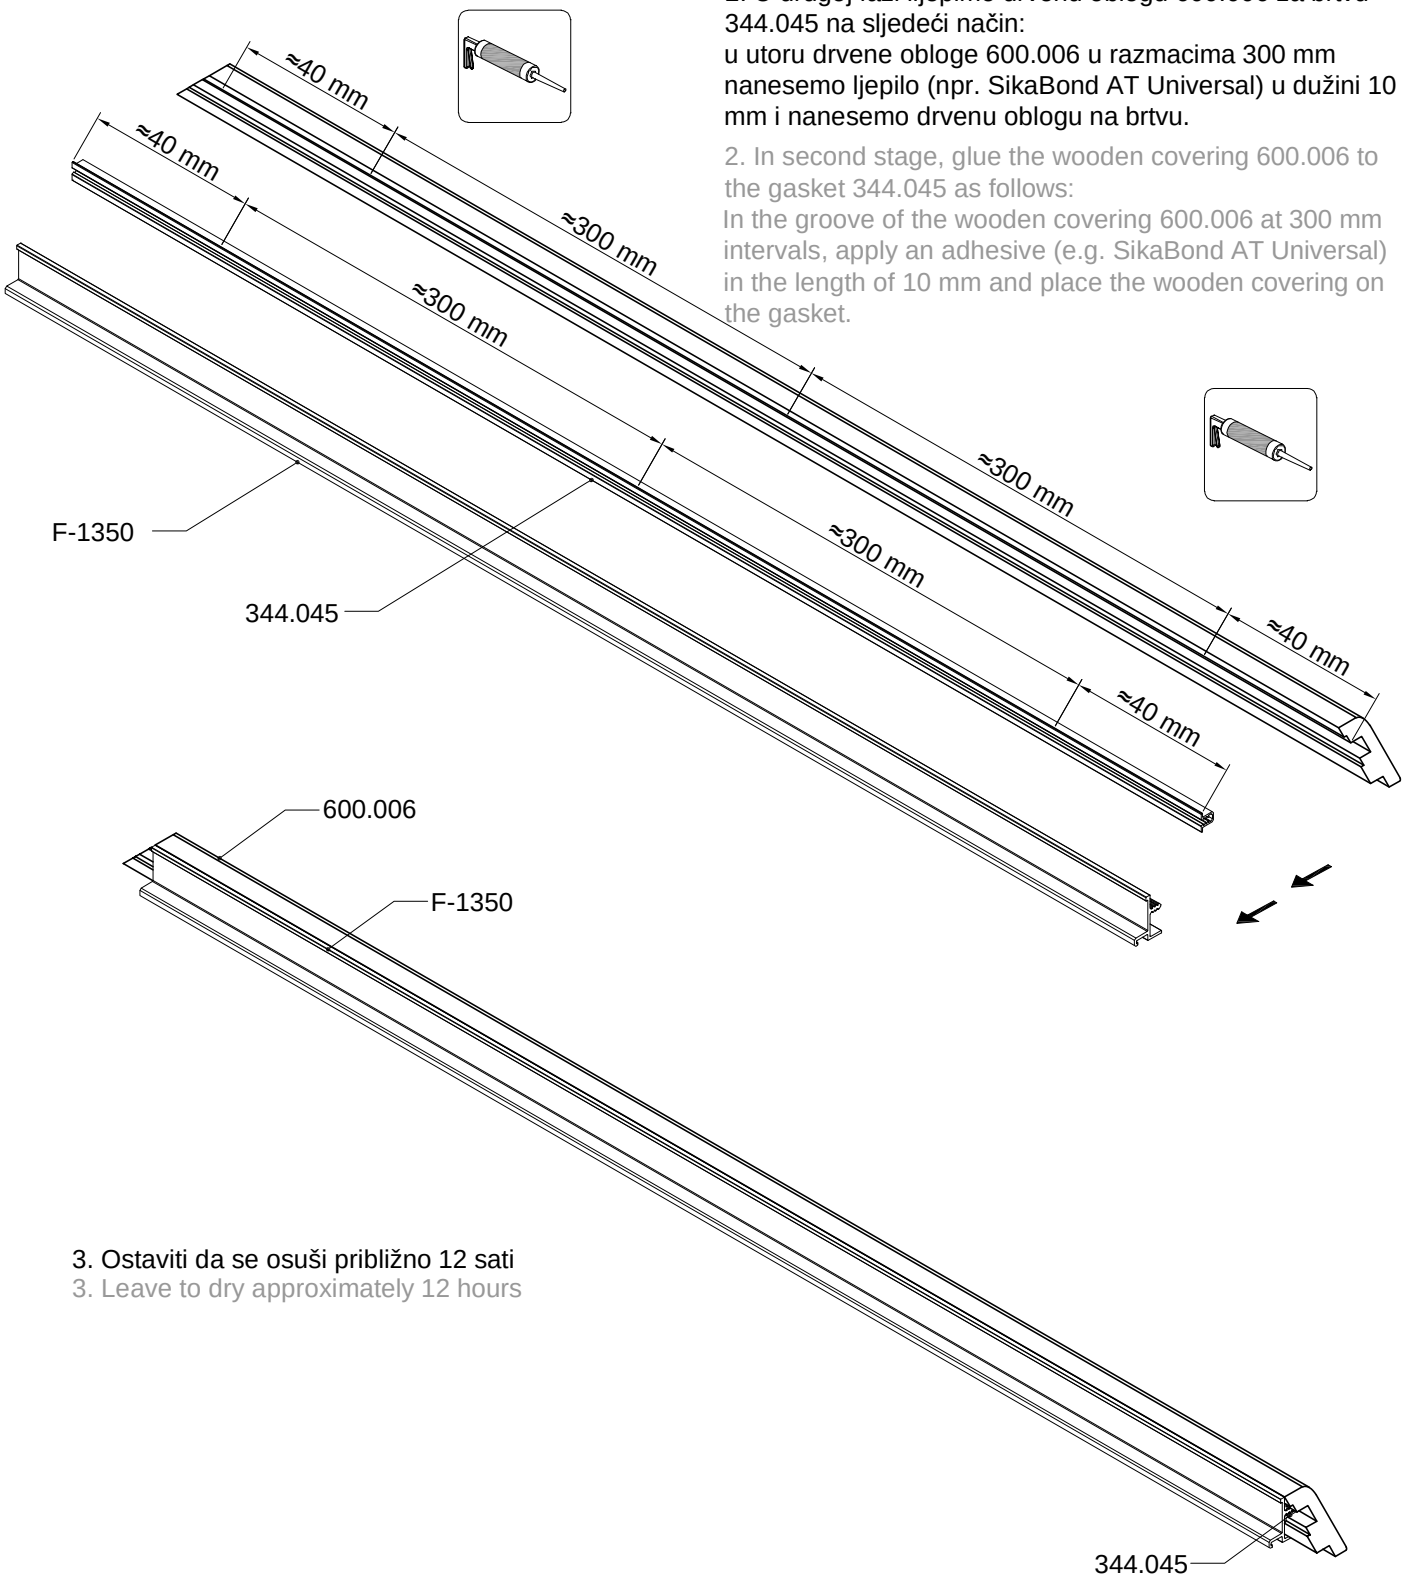


3. Ostaviti da se osuši približno 12 sati
3. Leave to dry approximately 12 hours


REDOSLIJED MONTAŽE STAKLJENJA
GLAZING ASSEMBLY SEQUENCE

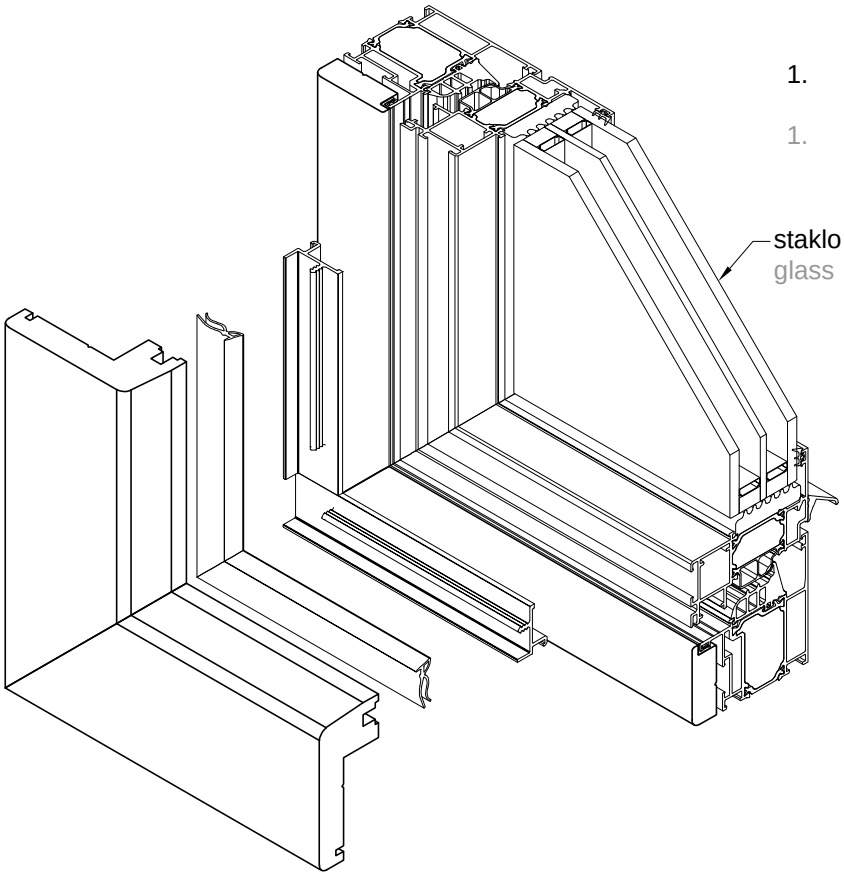


1. Na krilo(ram) FT-0410F(FT-0400F) postaviti staklo
1. Place the glass on the sash(frame) FT-0410F(FT-0400F)

2. Na krilo (ram) FT-0410F (FT-0400F) montirati staklo lajsnu F-1350,
2. Place the glazing bead F-1350 on the sash (frame) FT-0410F (FT-0400F),

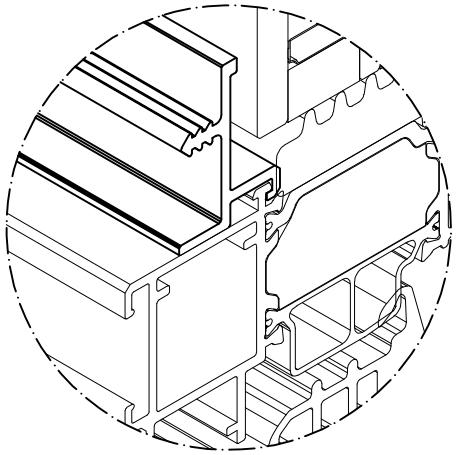

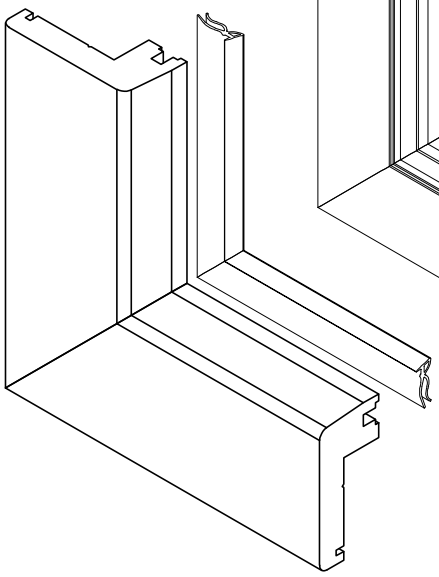


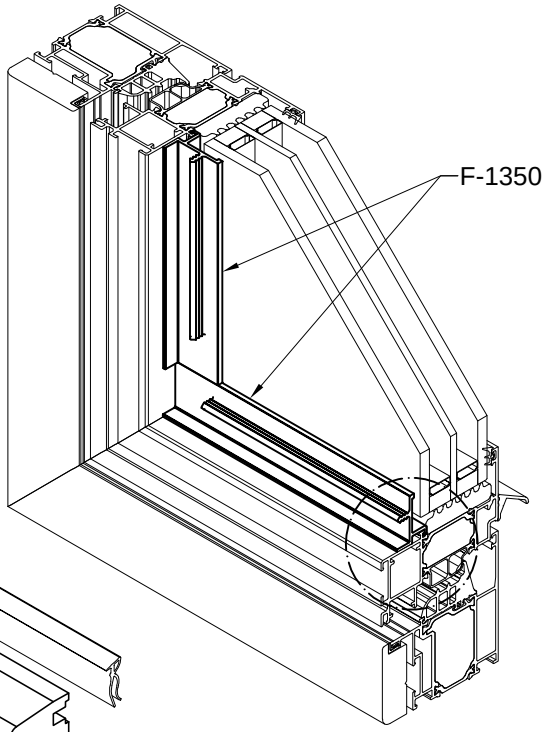

REDOSLJED MONTAŽE STAKLENJA
GLAZING ASSEMBLY SEQUENCE


3. Na tako postavljenu staklo lajsnu F-1350, montirati brtvu 344.049 između stakla i staklo lajsne F-1350.

3. When the glazing bead F-1350 is on place, place the gasket 344.049 between the glass and the glazing bead F-1350.

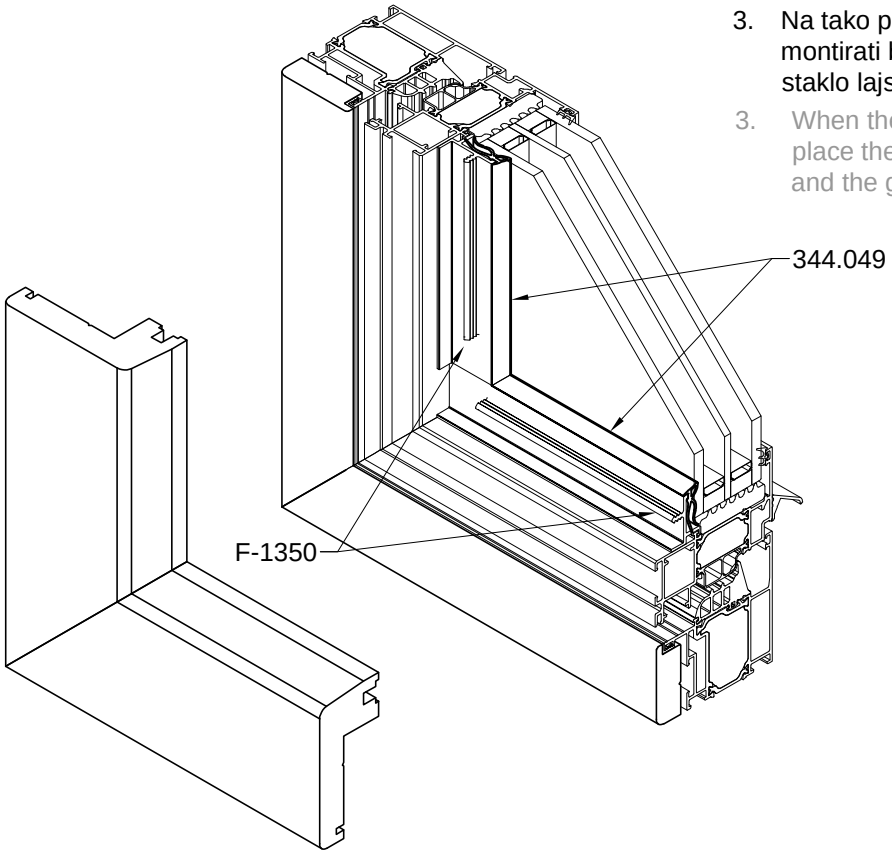


4. Postaviti mjestimično komade brtve 344.045 na staklo lajsnu F-1350 u razmacima cca 250 mm (kontinurano kada se montira na fiksni prozor).

4. Place the pieces of the gasket 344.045 on the glazing bead F-1350 in intervals of approx. 250 mm (continuous when it is mounted on fixed window).

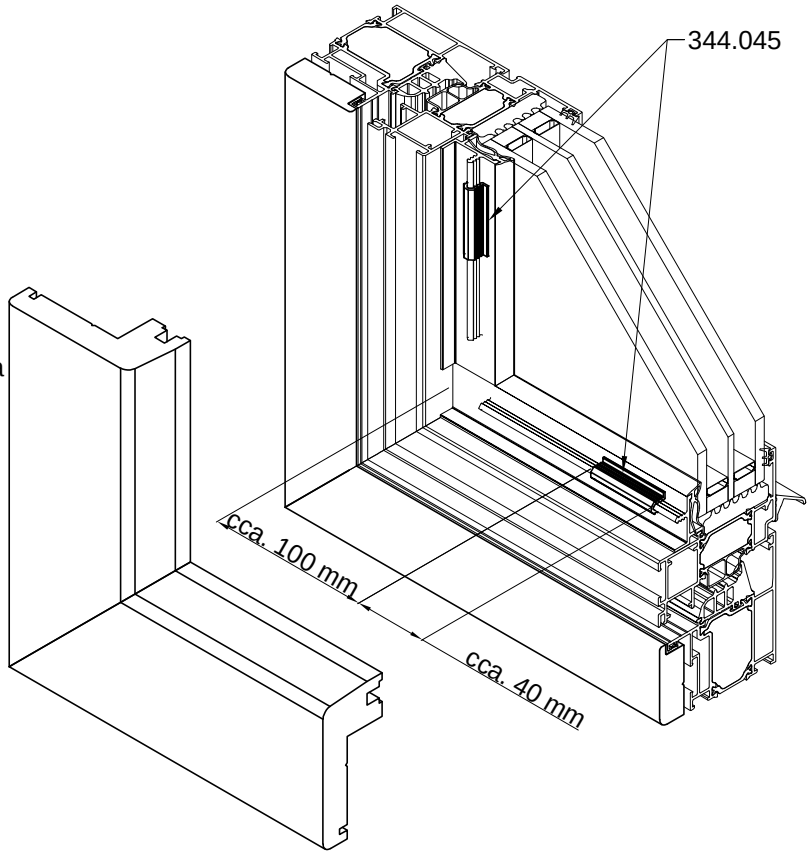


REDOSLJED MONTAŽE STAKLENJA
GLAZING ASSEMBLY SEQUENCE


5. Montaža odgovarajuće drvene obloge.
5. Montage of an appropriate wooden covering.

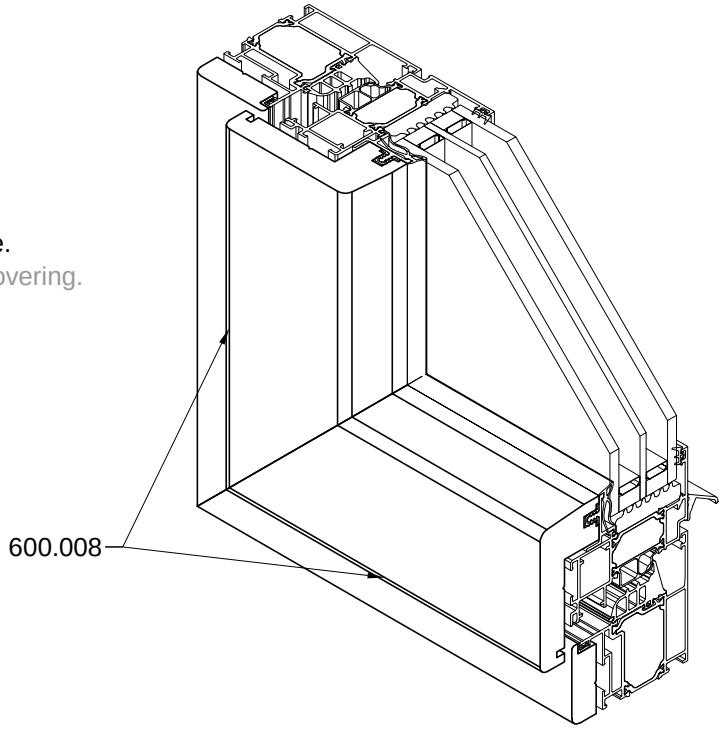



6. Montaža brtve 344.112 između krila FT-0410F i drvene obloge 600.008
6. Montage of the gasket 344.112 between the sash FT-0410F and the wooden covering 600.008

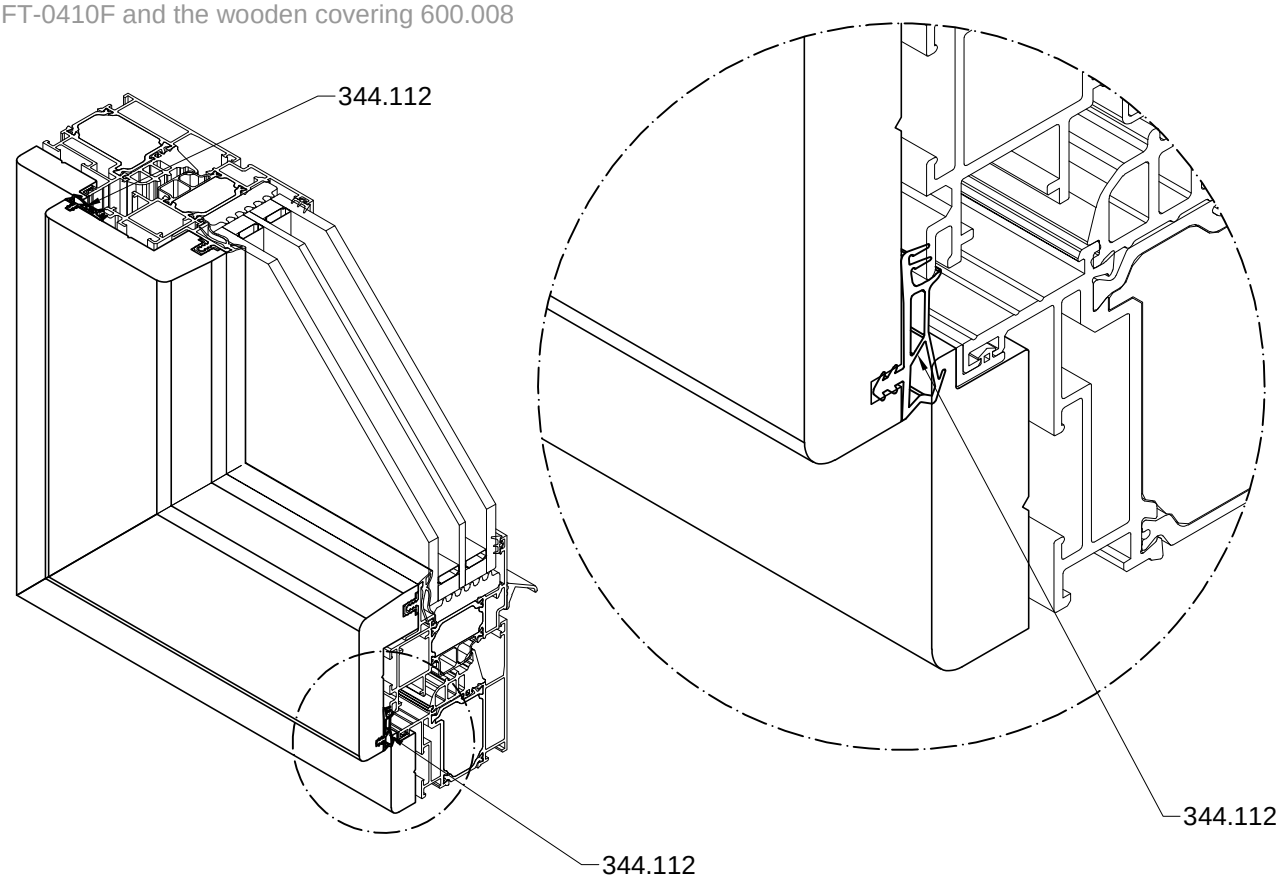



Obrada i montaža.....vrata
Processing and montage.....door

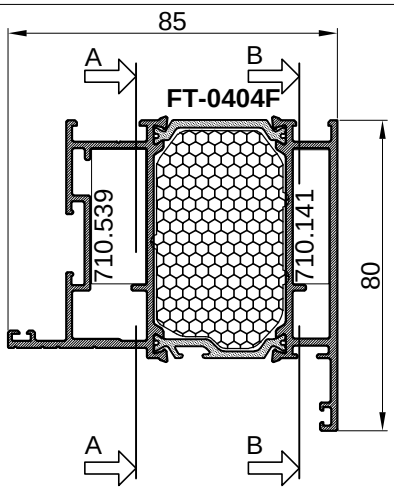

85
A
B
FT-0404F
710.539
710.141
80
A
B

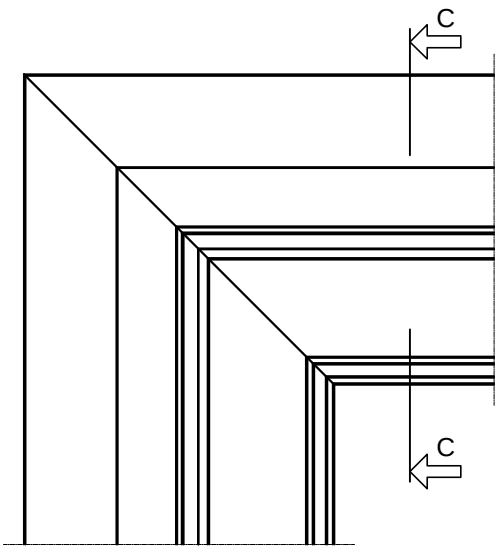

C
C

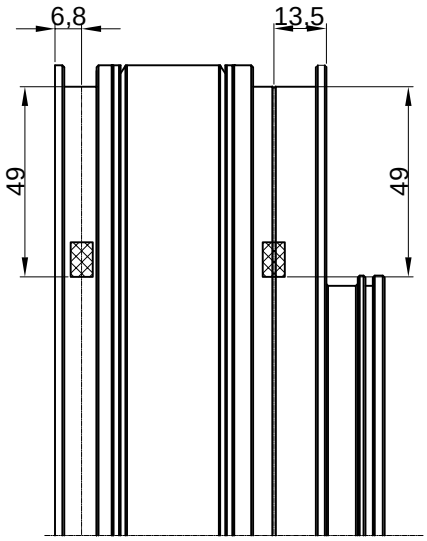

6,8
13,5
49
49

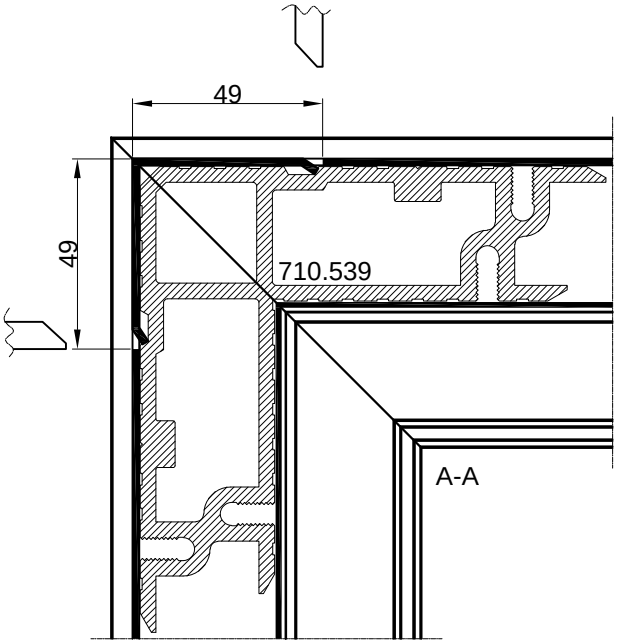

49
49
710.539
A-A

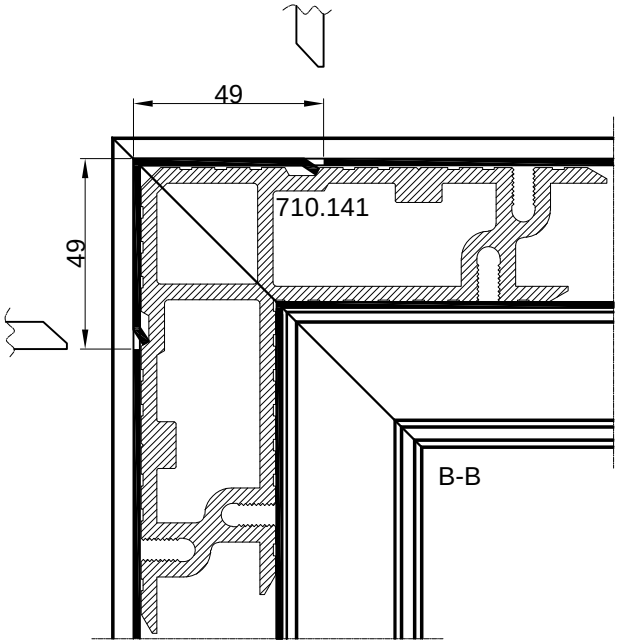

49
49
710.141
B-B

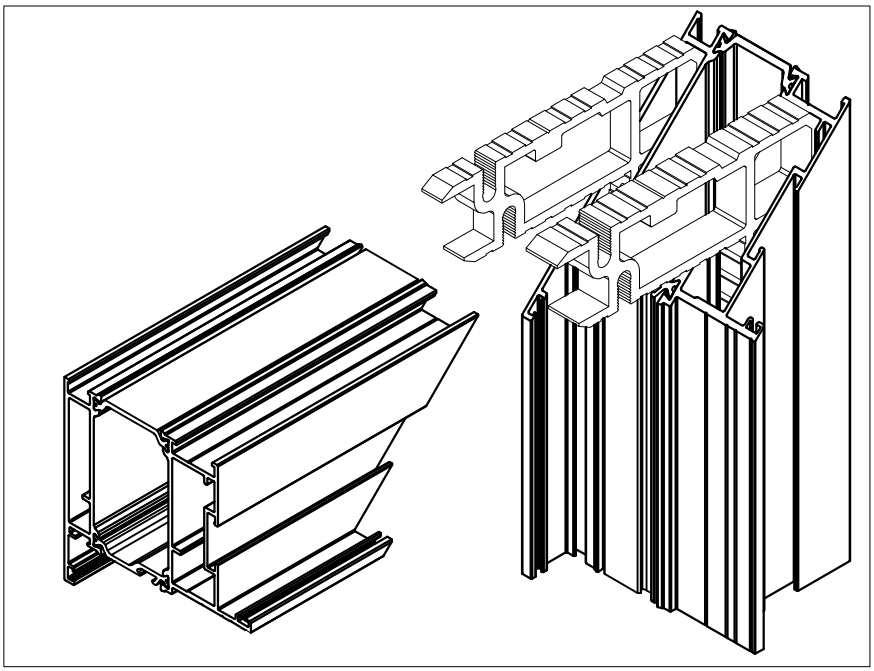


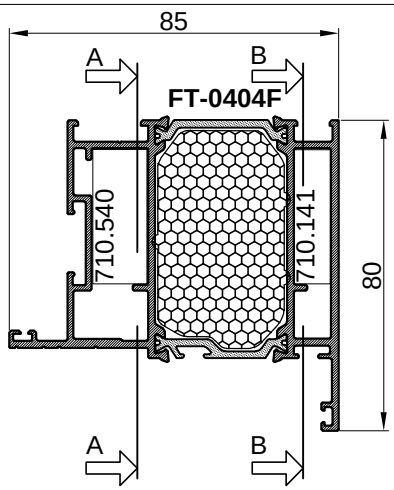

85
A
B
FT-0404F
710.540
710.141
80
A
B

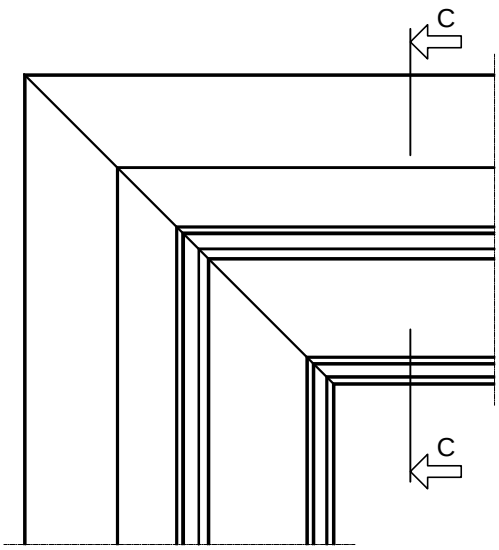

C
C

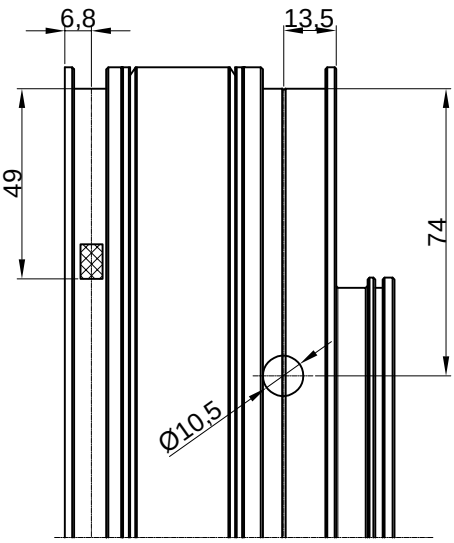

6,8
13,5
49
74
Ø10,5

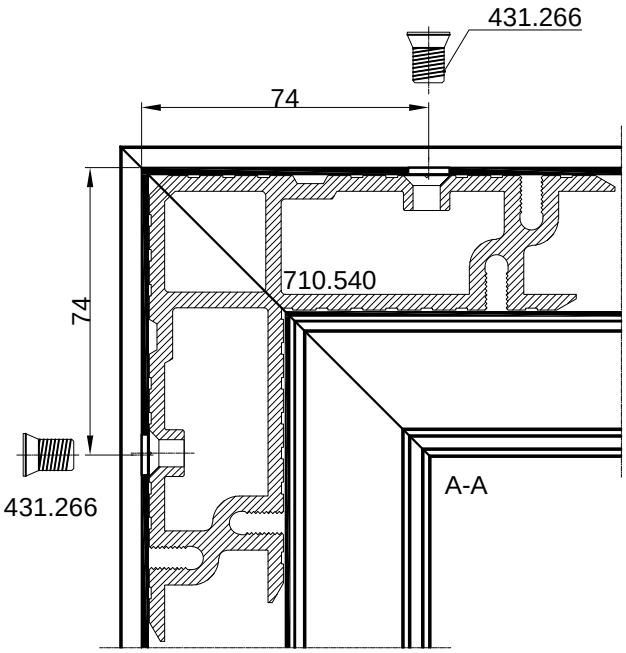

431.266
74
710.540
74
431.266
A-A

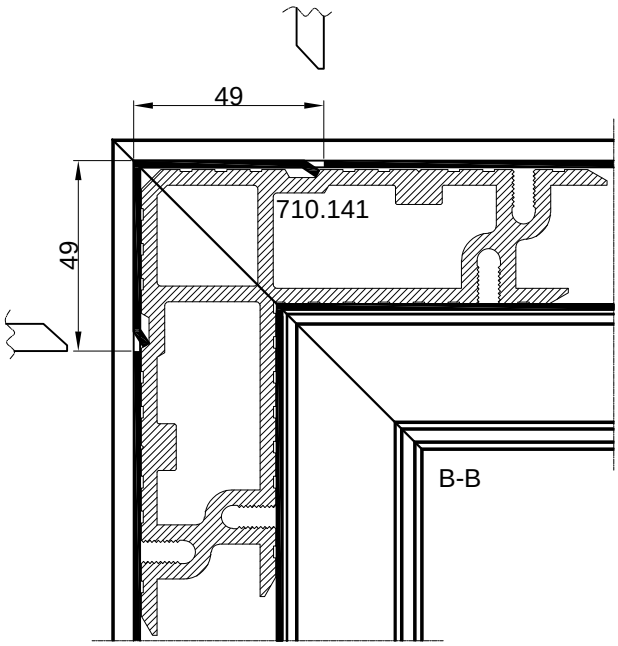

49
710.141
49
B-B

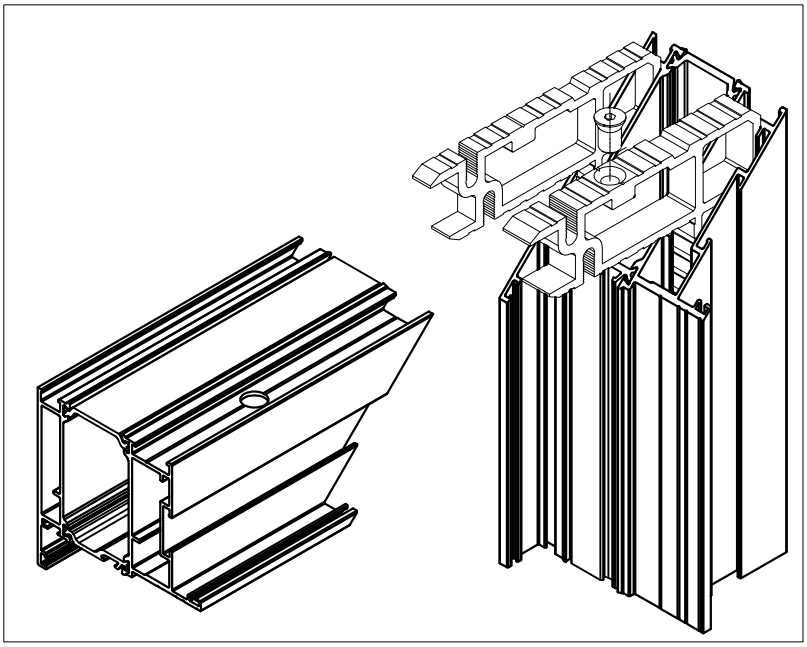


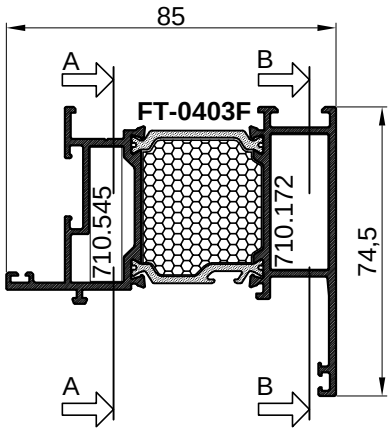

85
A
B
FT-0403F
710.545
710.172
74,5
A
B

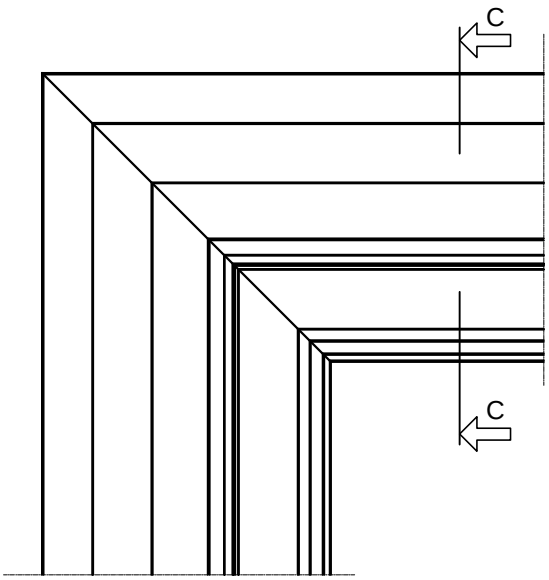

C
C

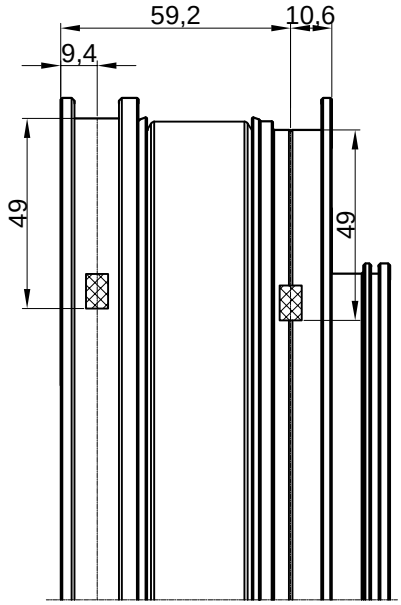

59,2
10,6
9,4
49
49

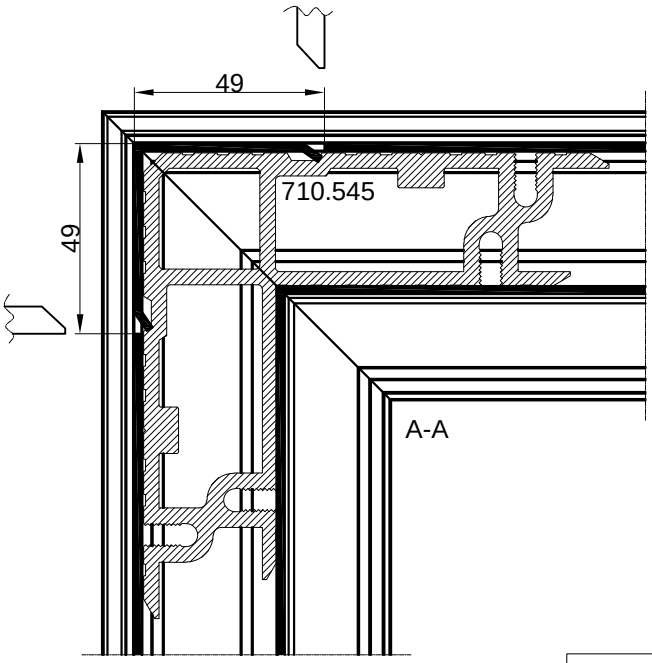

49
710.545
49
A-A

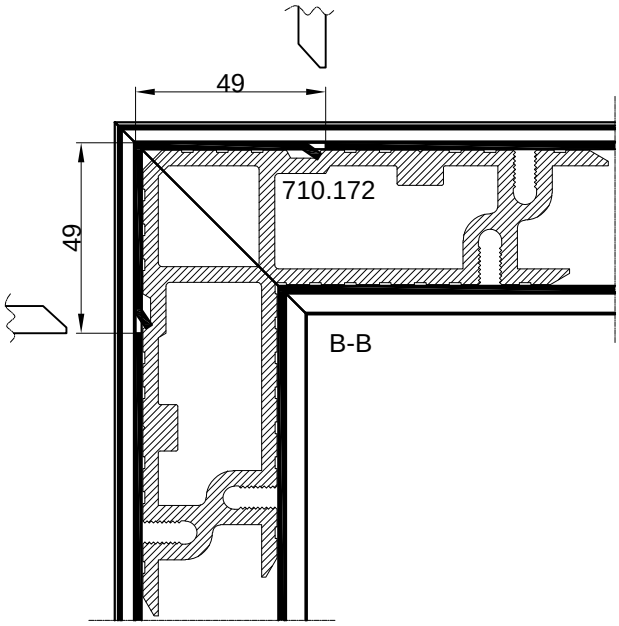

49
710.172
49
B-B

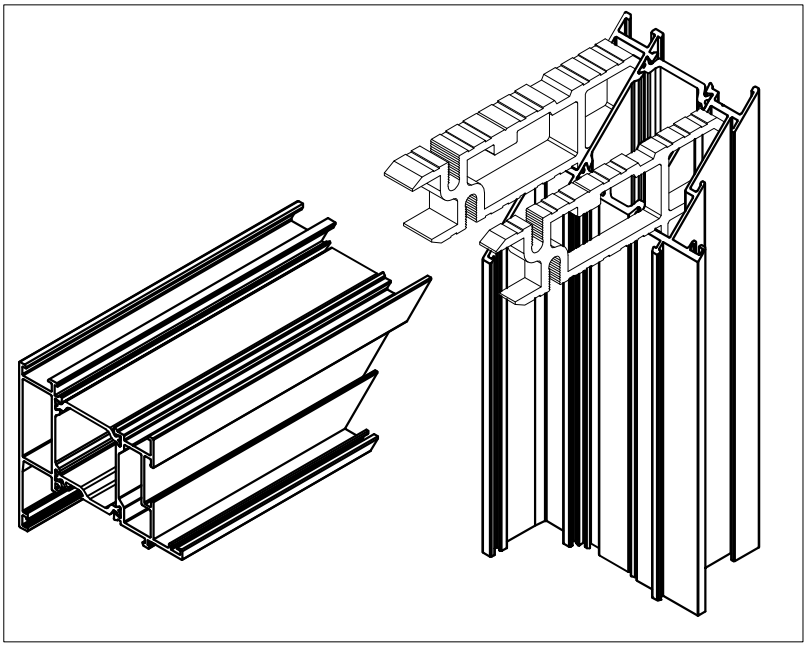


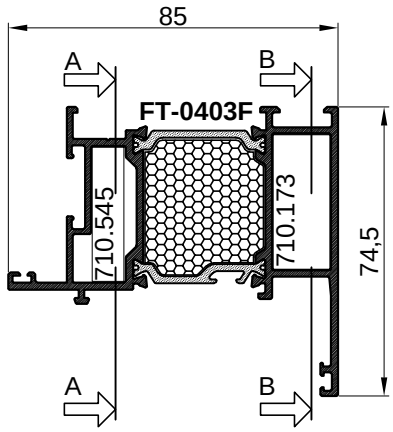

85
A
B
FT-0403F
710.545
710.173
74,5
A
B

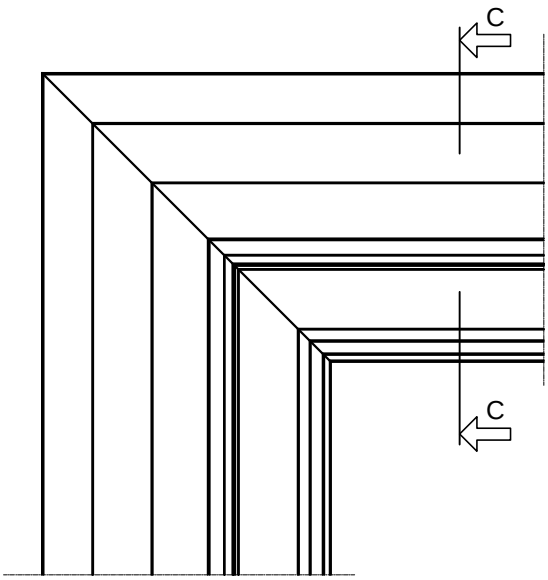

C
C

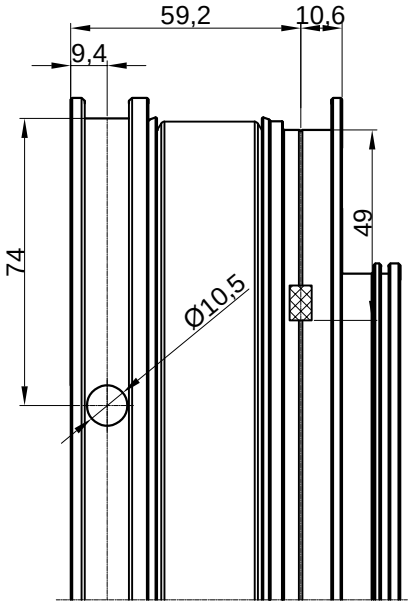

59,2
10,6
9,4
74
49
Ø10,5

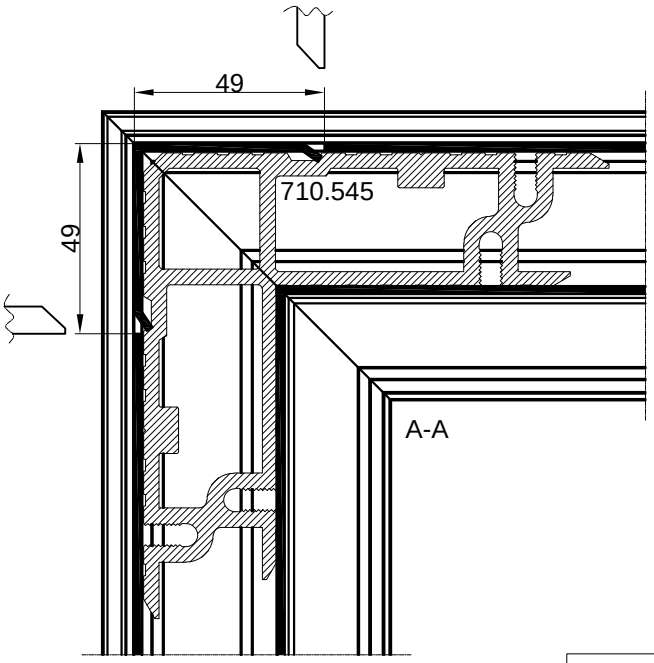

49
49
710.545
A-A

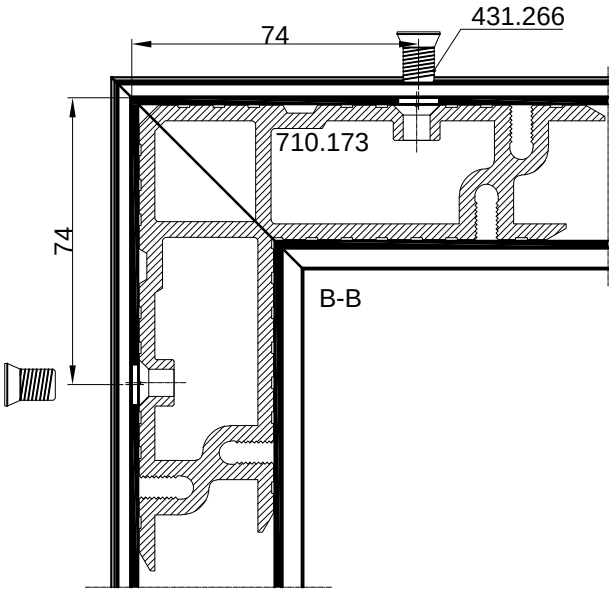

74
431.266
710.173
74
B-B

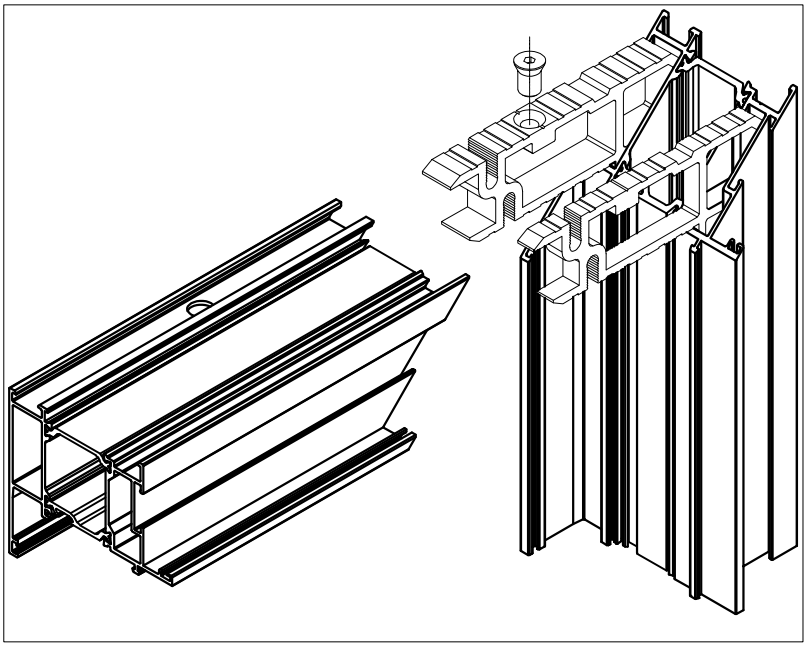


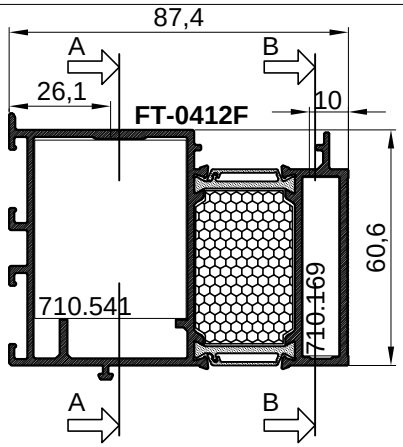

87,4
A
B
26,1
FT-0412F
10
60,6
710.169
710.541
A
B

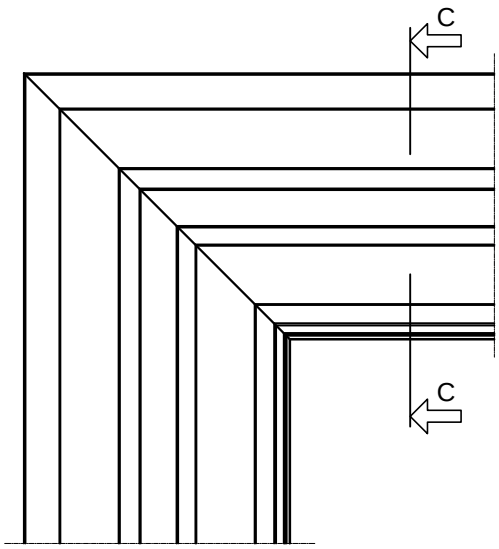

C
C

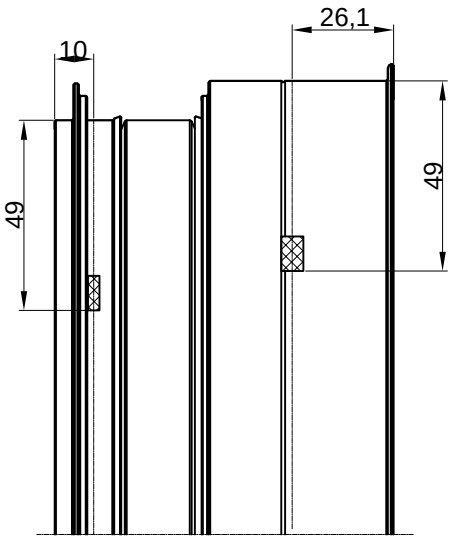

26,1
10
49
49

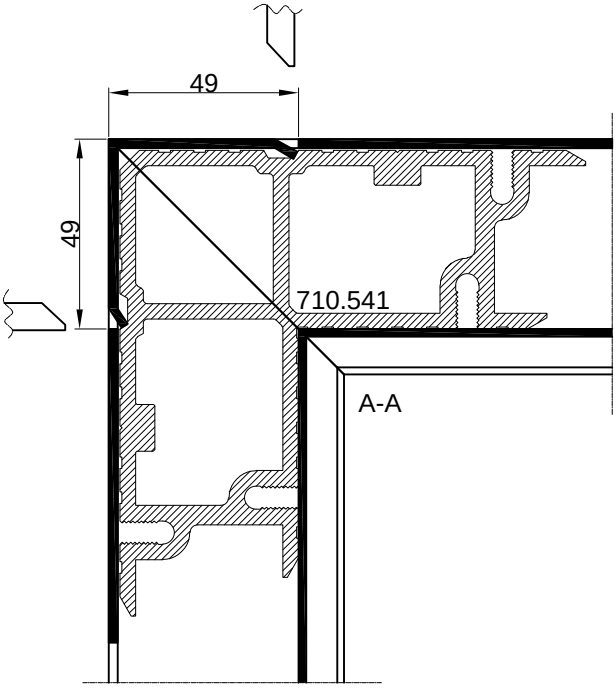

49
49
710.541
A-A

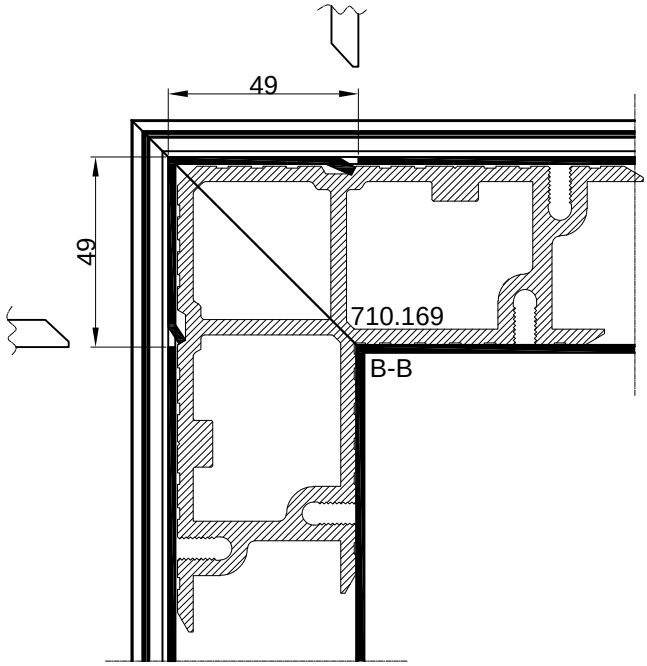

49
49
710.169
B-B

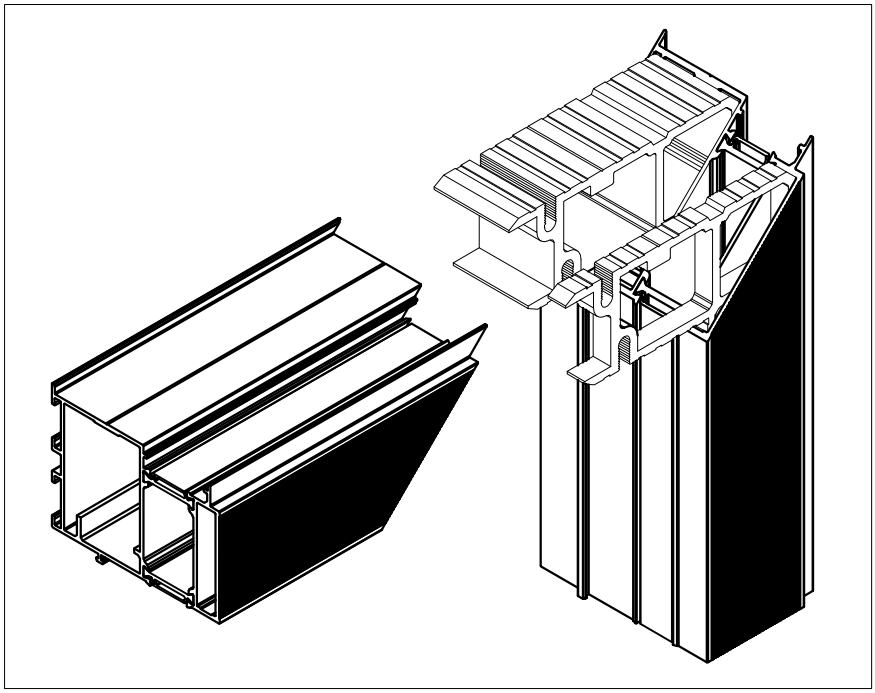


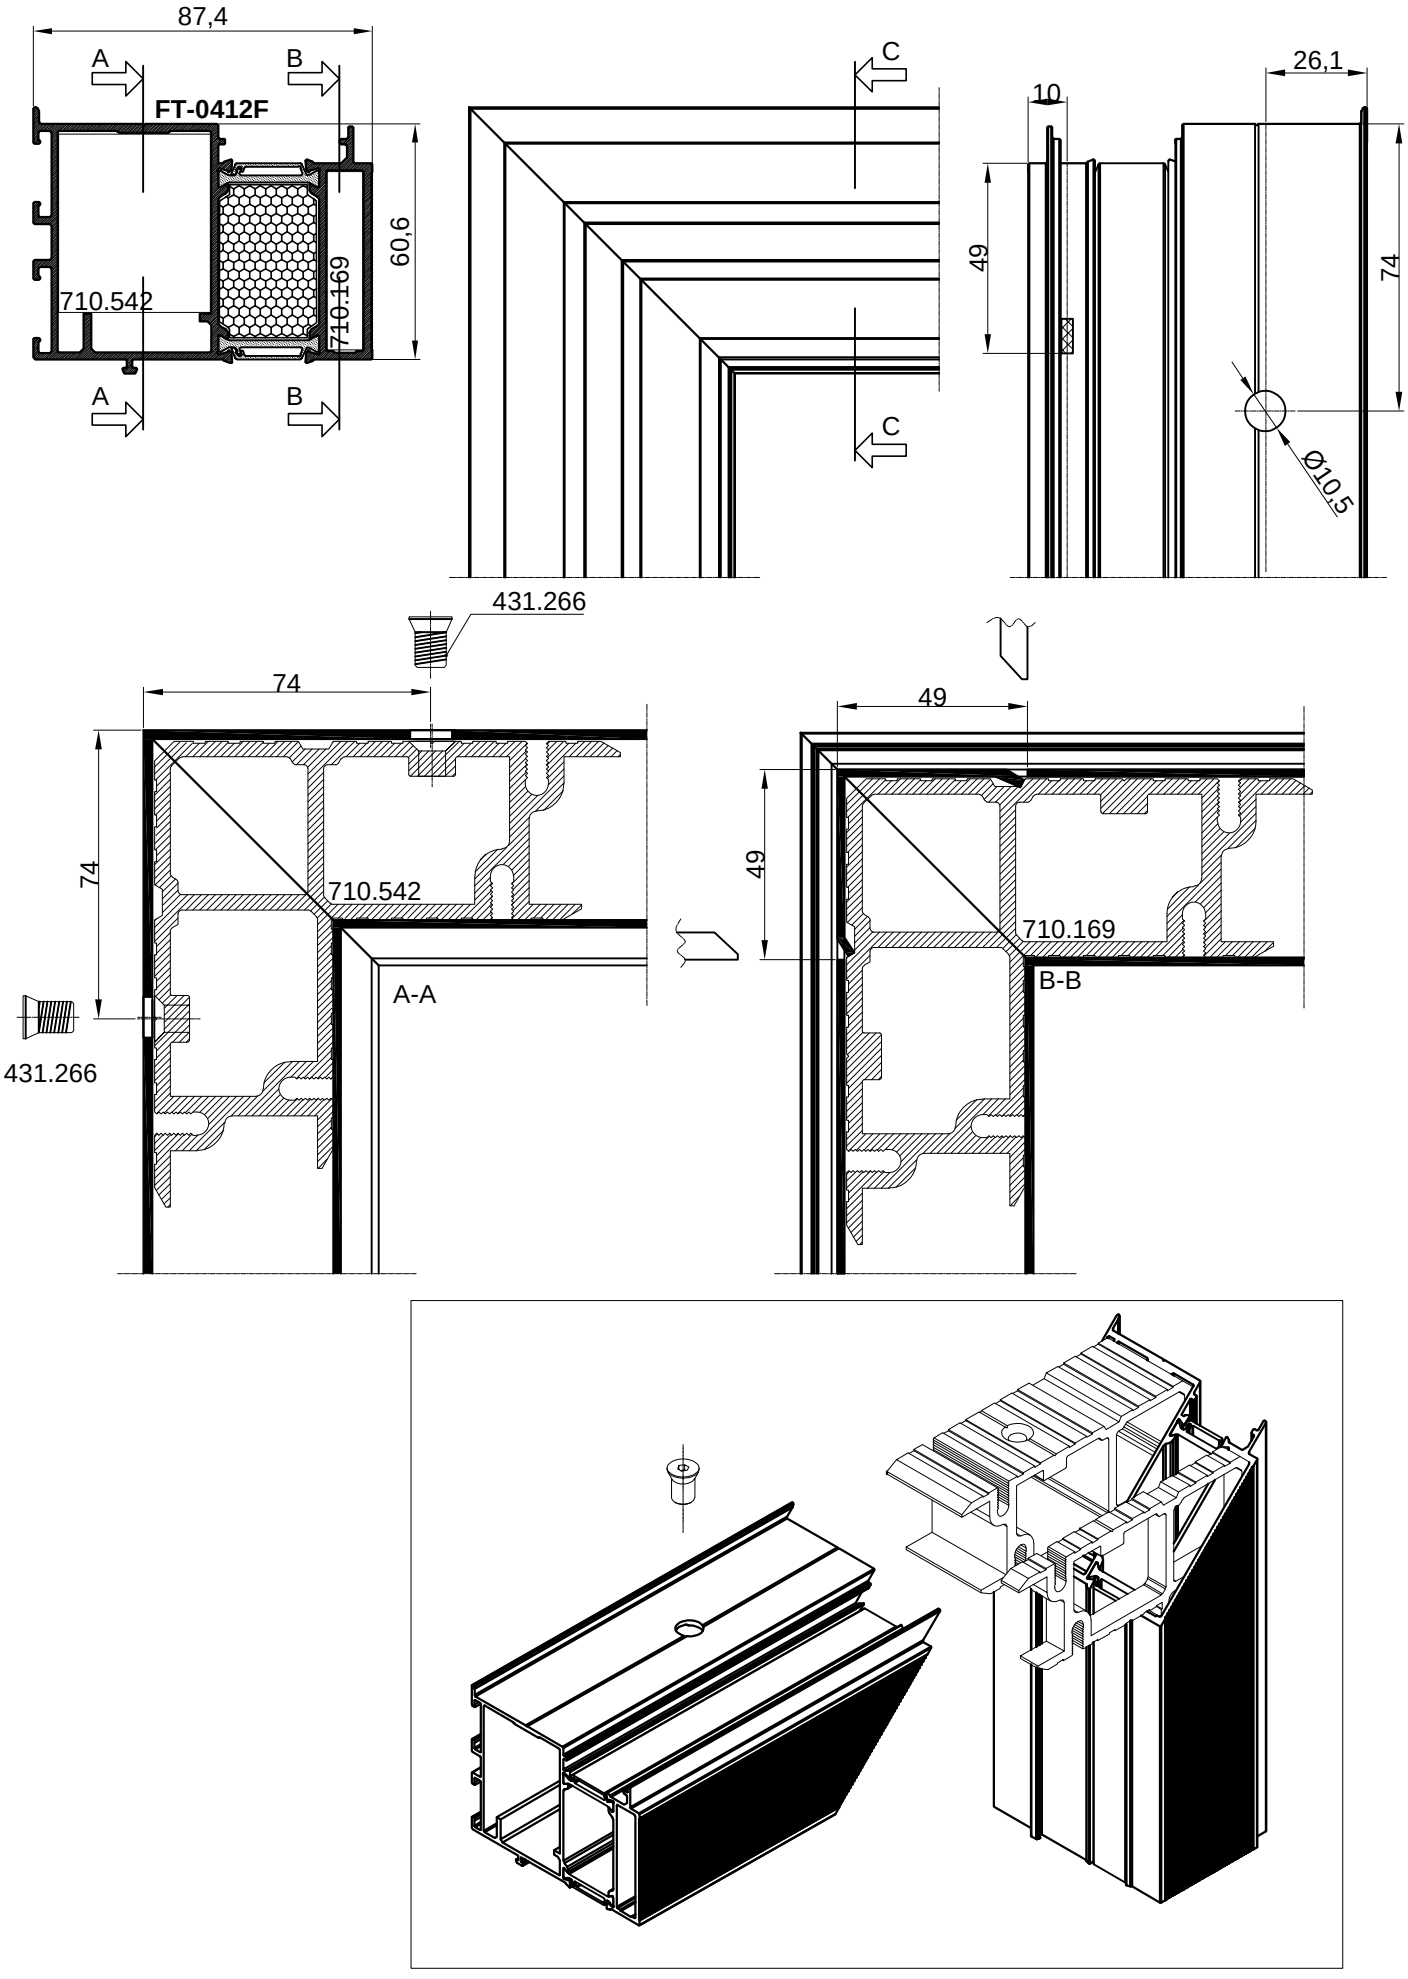

87,4
A
B
FT-0412F
60,6
710.542
710.169
A
B
C
C
26,1
10
49
74
Ø10,5
431.266
74
74
710.542
A-A
431.266
49
49
710.169
B-B

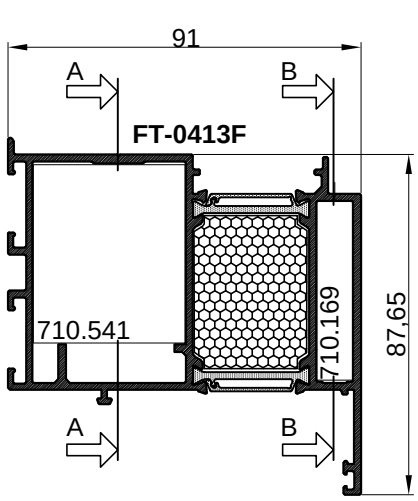

91
A
B
FT-0413F
710.541
710.169
87,65
A
B

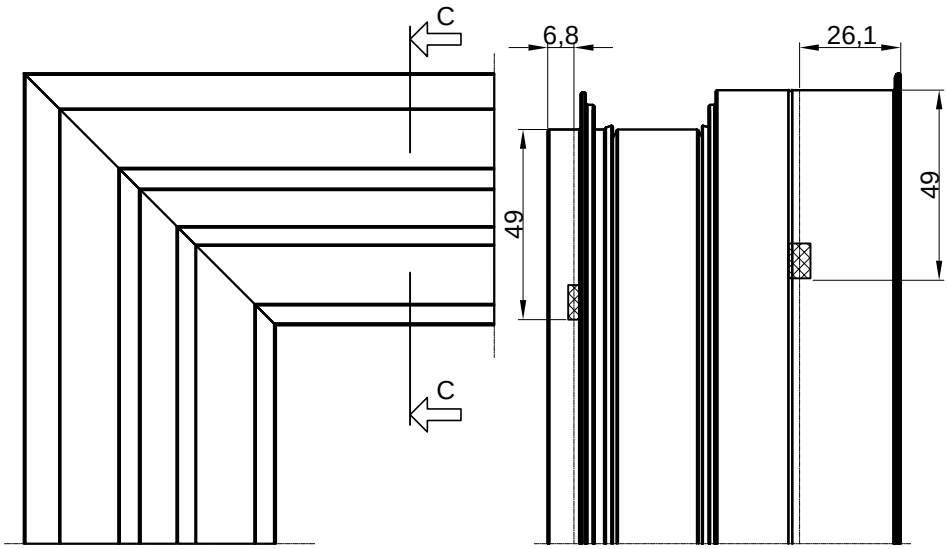

C
6,8
26,1
49
49
C

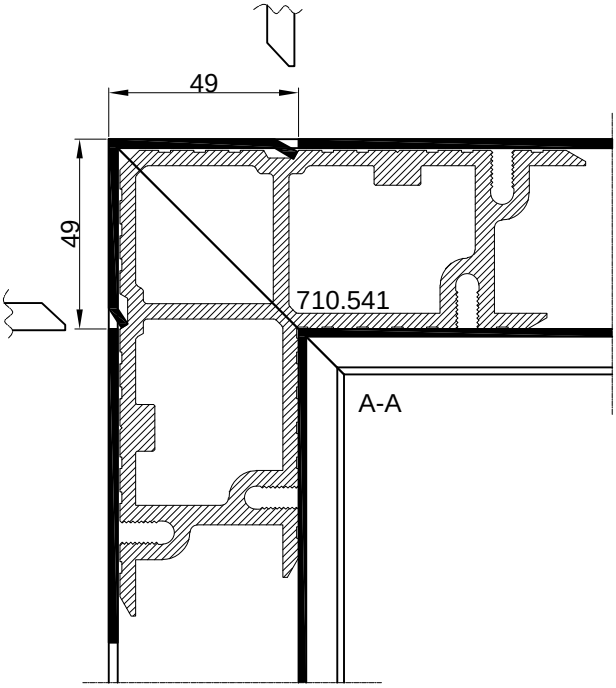

49
49
710.541
A-A

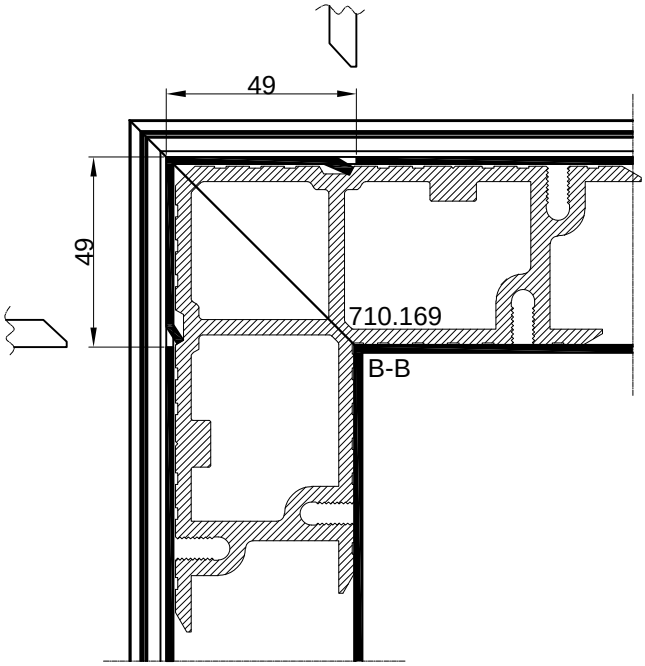

49
49
710.169
B-B

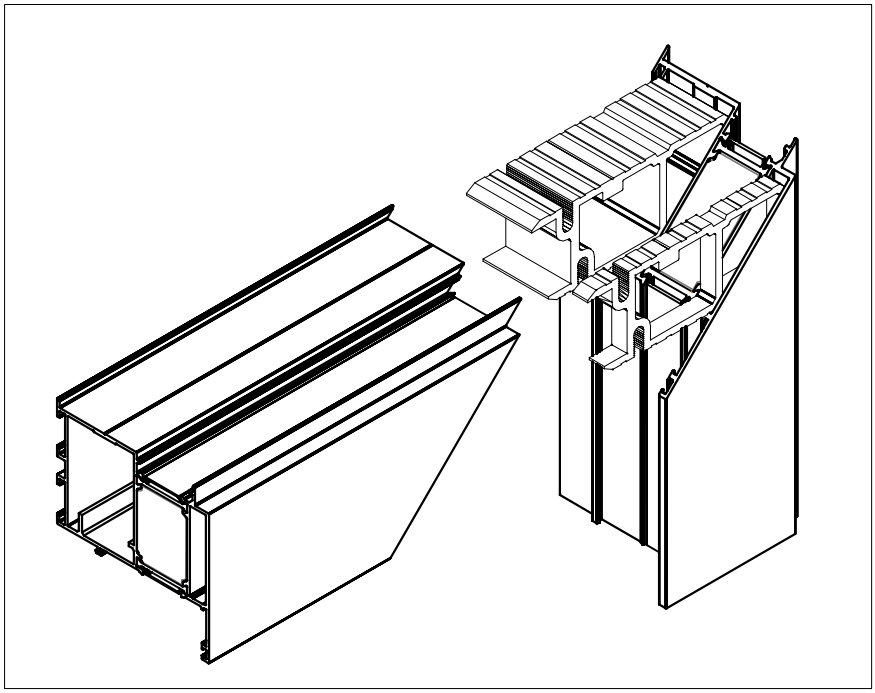


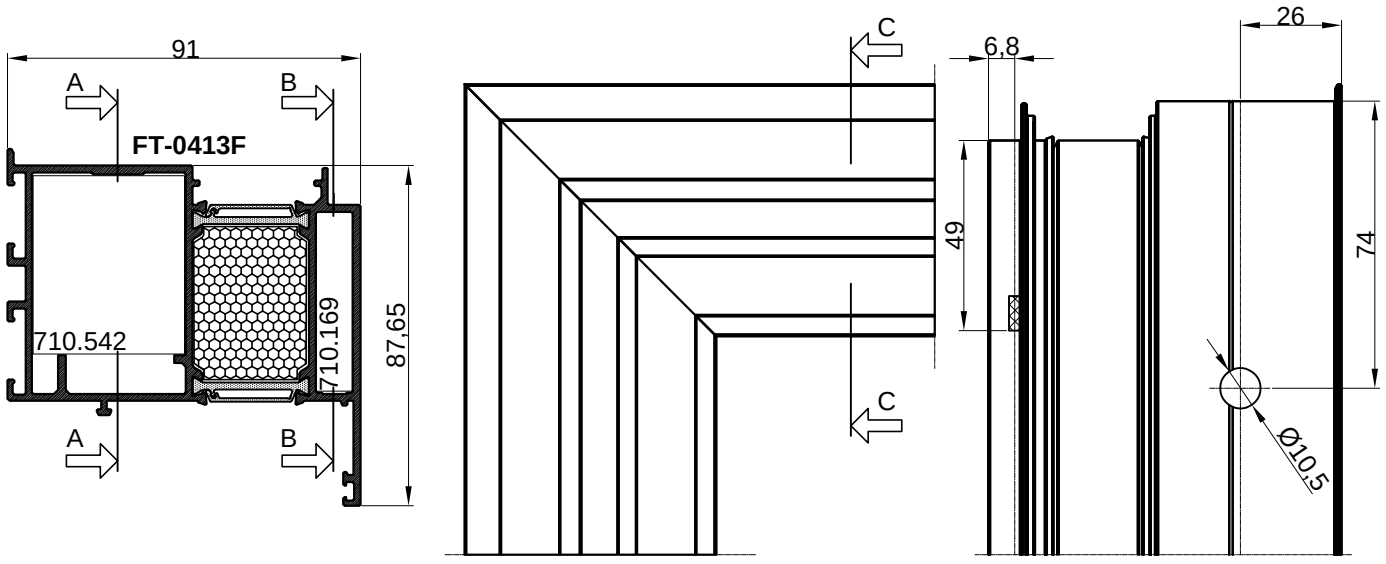

91
A
B
FT-0413F
710.542
710.169
87,65
A
B
C
C
6,8
26
49
74
Ø10,5

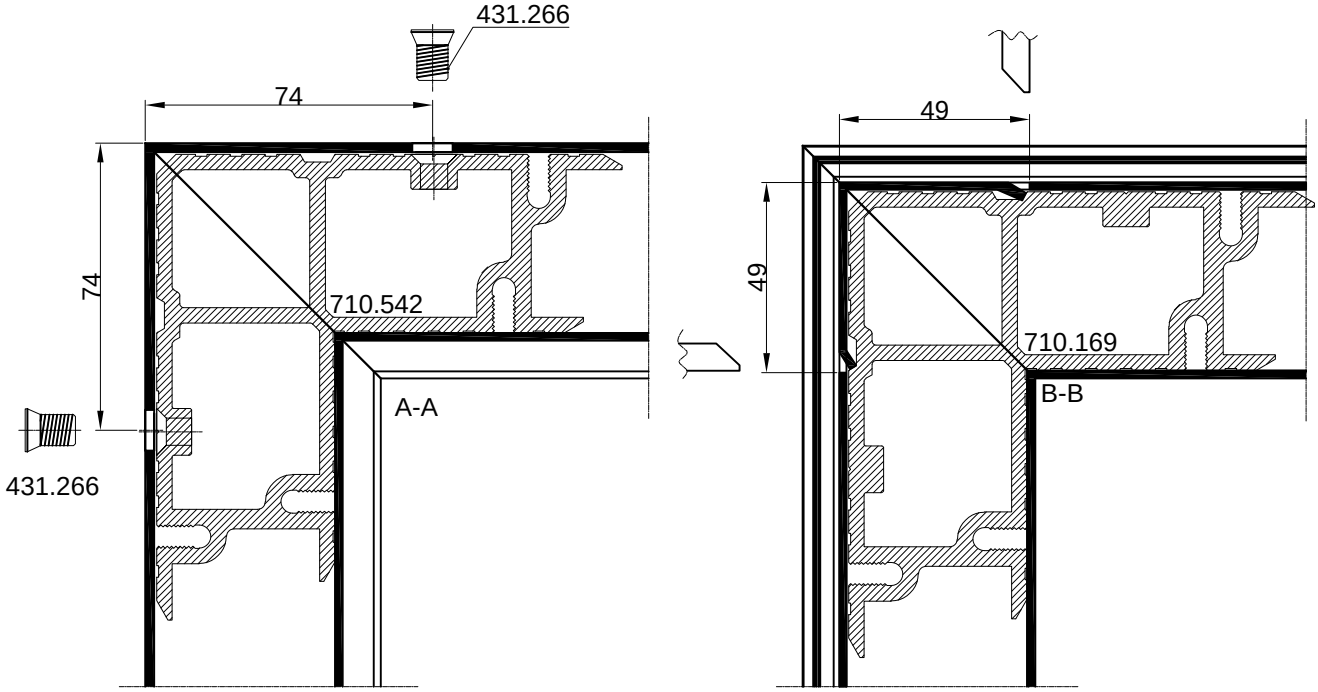
431.266
74
74
710.542
A-A
431.266
49
49
710.169
B-B

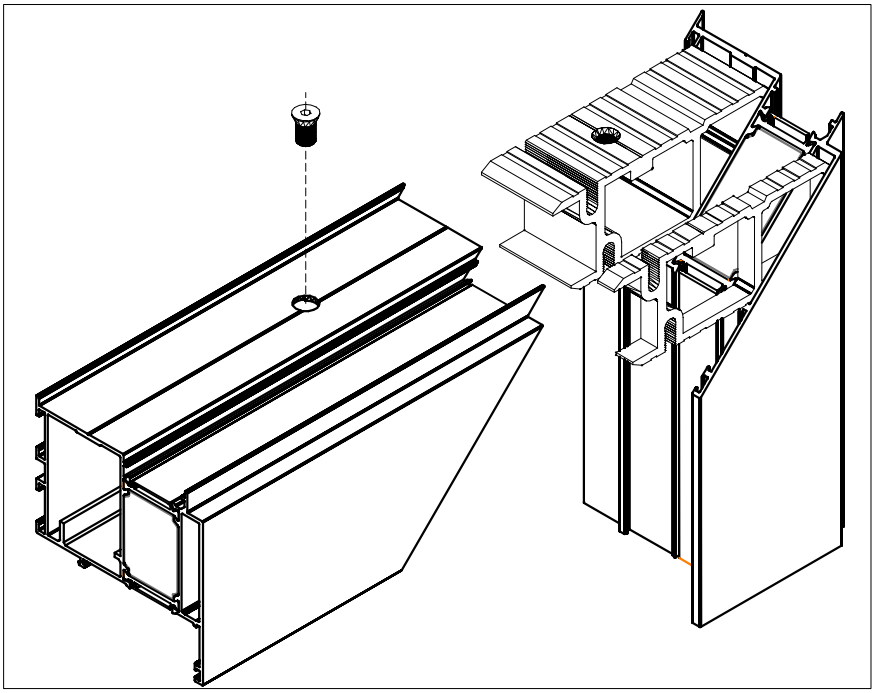

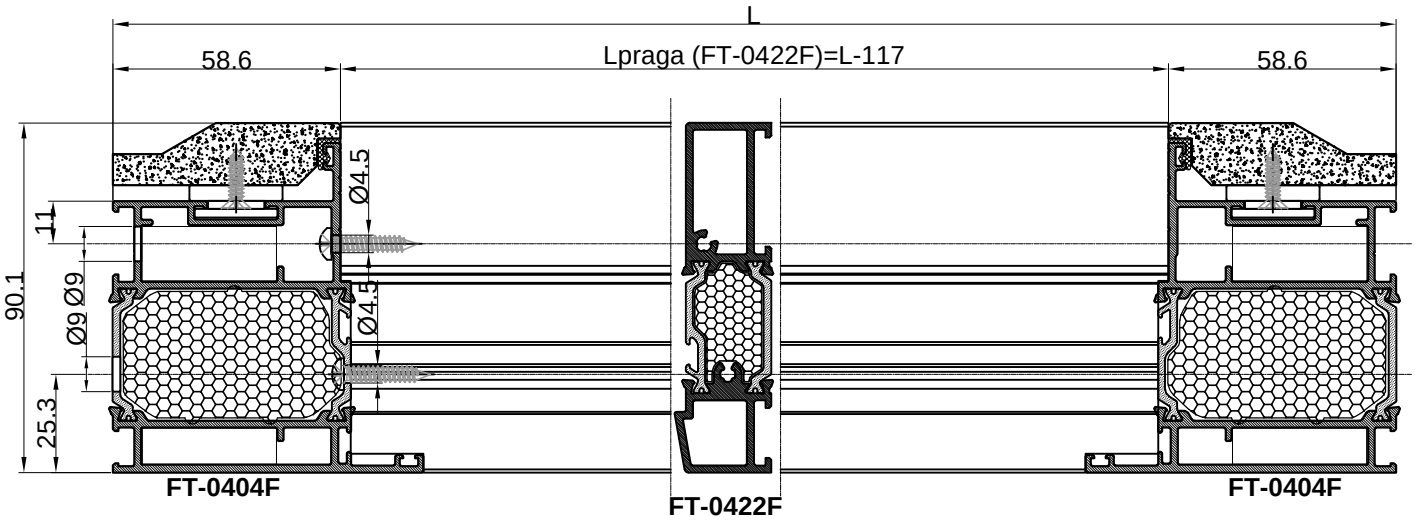

L
58.6
Lpraga (FT-0422F)=L-117
58.6
90.1
11
Ø9 Ø9
25.3
Ø4.5
Ø4.5
FT-0404F
FT-0422F
FT-0404F

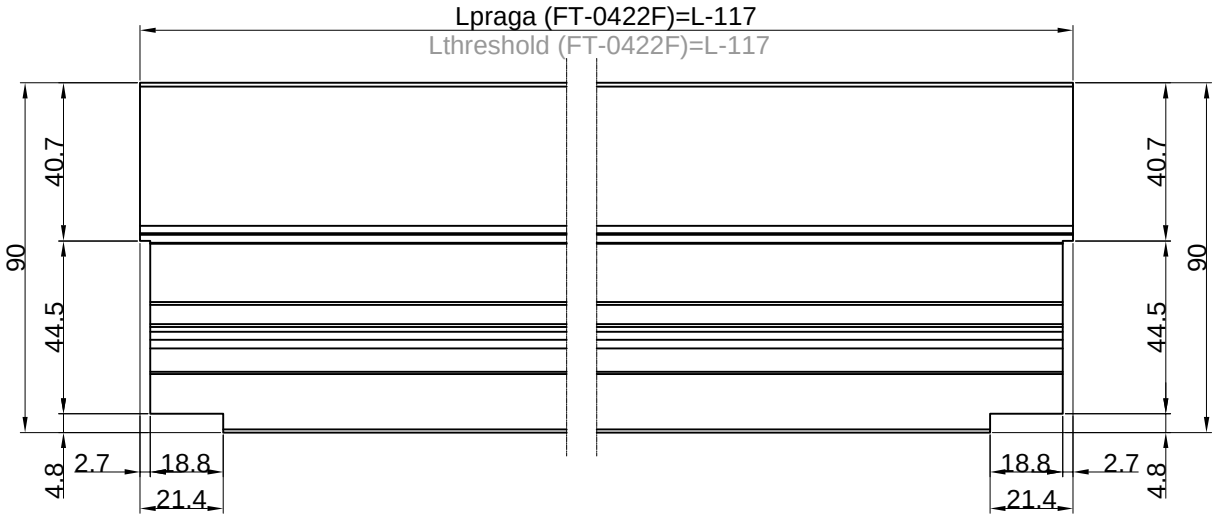

Lpraga (FT-0422F)=L-117
Lthreshold (FT-0422F)=L-117
90
40.7
44.5
40.7
44.5
90
4.8
2.7
18.8
21.4
18.8
2.7
21.4
4.8

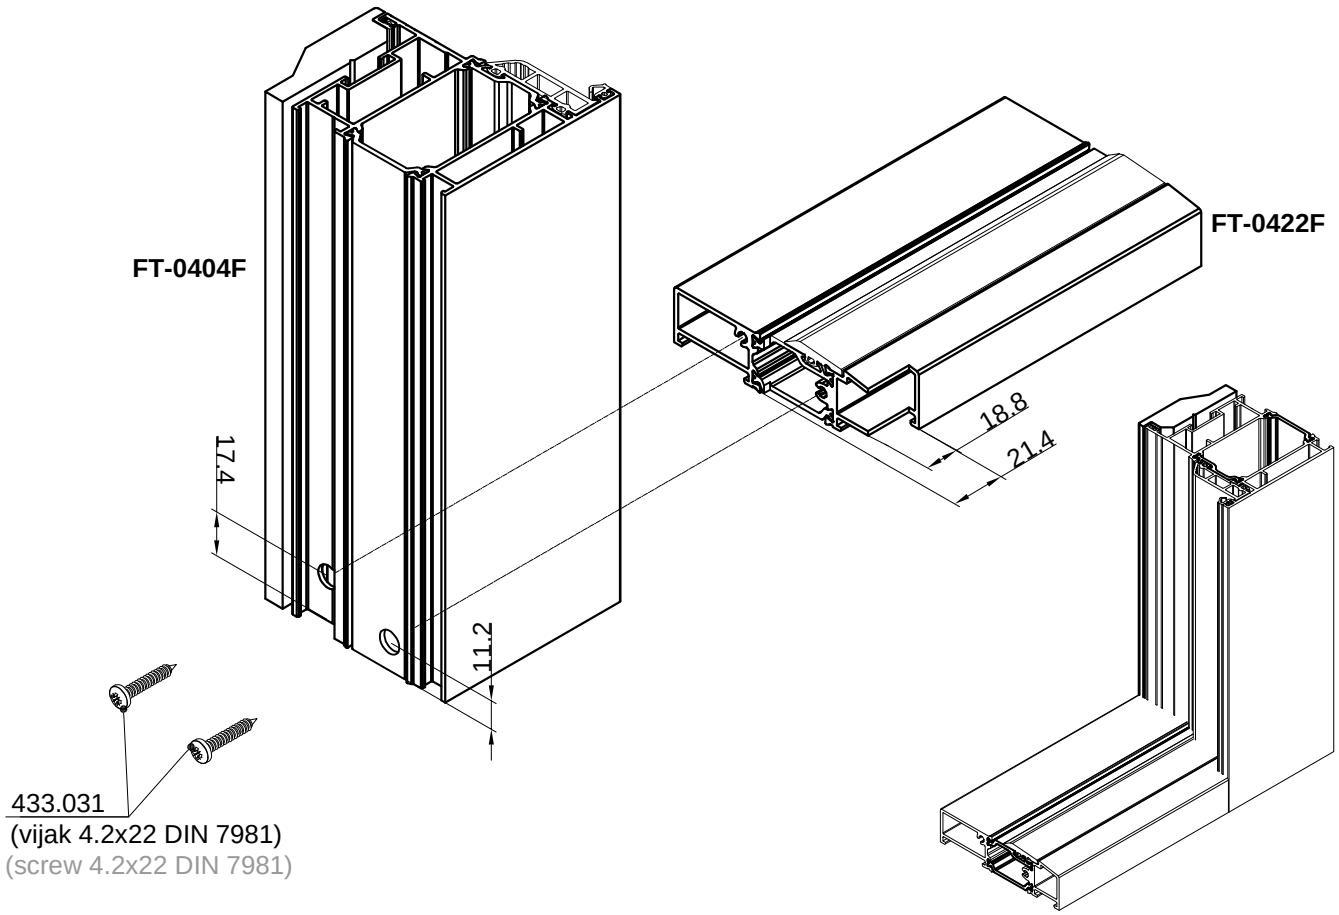

FT-0404F
FT-0422F
17.4
11.2
18.8
21.4
433.031
(vijak 4.2x22 DIN 7981)
(screw 4.2x22 DIN 7981)


SPAJANJE PROFILA PREČKE **FT-0423F** S PROFILOM RAMA **FT-0403F** - POMOĆU VEZNIKA
CONNECTING THE CROSSBAR PROFILE **FT-0423F** WITH THE FRAME PROFILE **FT-0403F** - BY USING CONNECTING ELEMENT- (T BRACKET)


Mjera pilanja prečke **FT-0423F**:
Lpr = So /svijetli otvor/ + 59 mm
Sawing length of the crossbar **FT-0423F**:
Lcr = So /clear opening/ + 59 mm

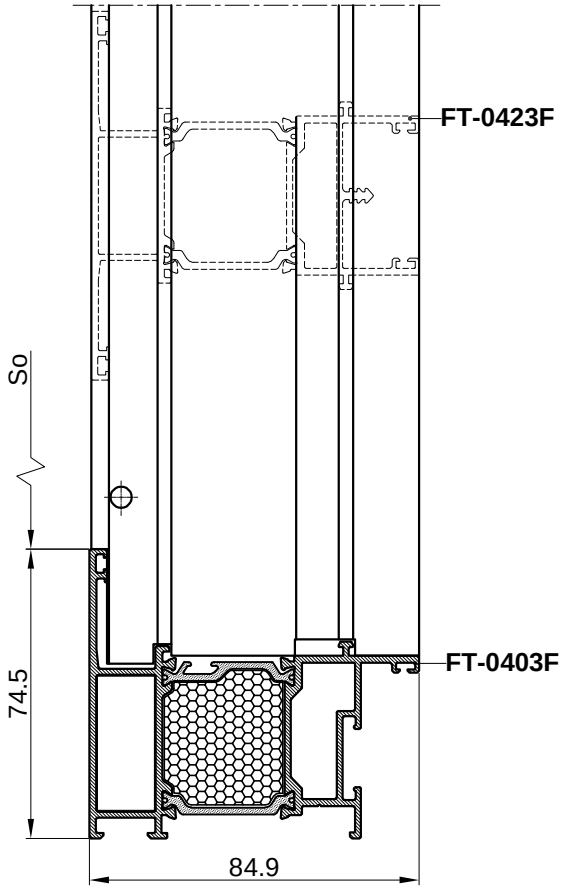


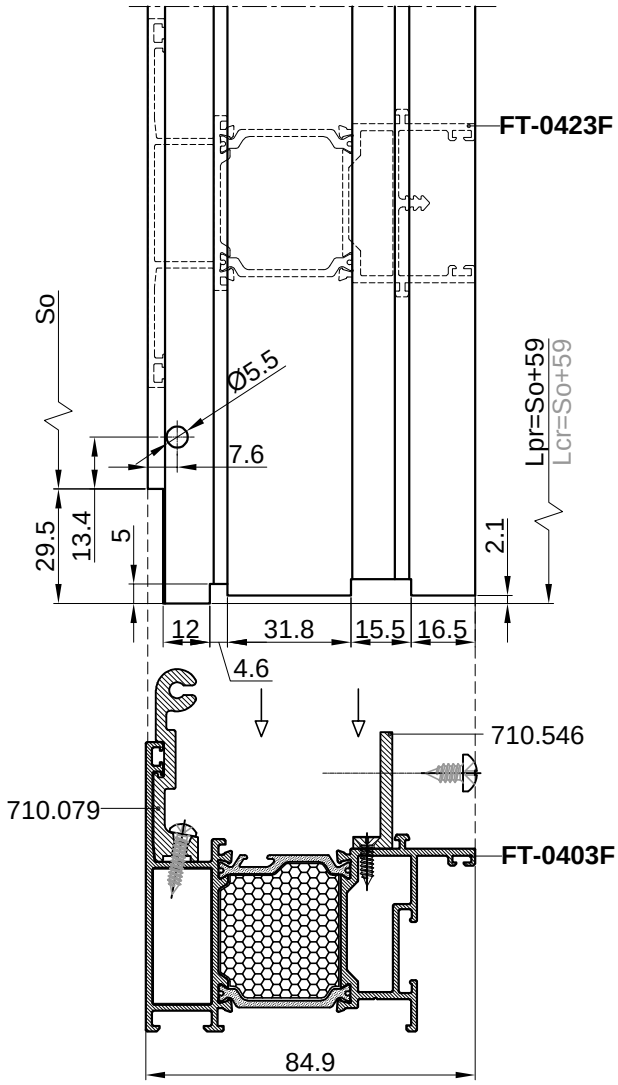

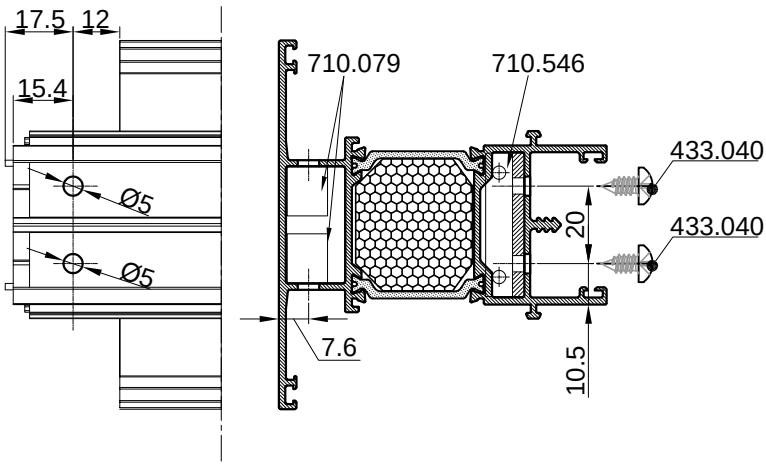

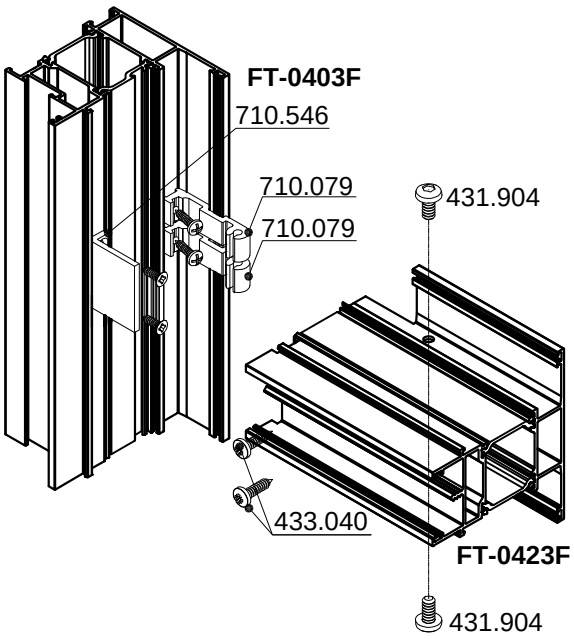




710.079



710.546


SPAJANJE PROFILA PREČKE **FT-0423F** S PROFILOM PREČKE **FT-0423F** - POMOĆU VEZNIKA
CONNECTING THE CROSSBAR PROFILE **FT-0423F** WITH THE CROSSBAR PROFILE **FT-0423F**
- BY USING CONNECTING ELEMENT- (T BRACKET)


Mjera pilanja prečke **FT-0423F**:
Lpr = So /svijetli otvor/ + 59 mm
Sawing length of the crossbar **FT-0423F**:
Lcr = So /clear opening/ + 59 mm

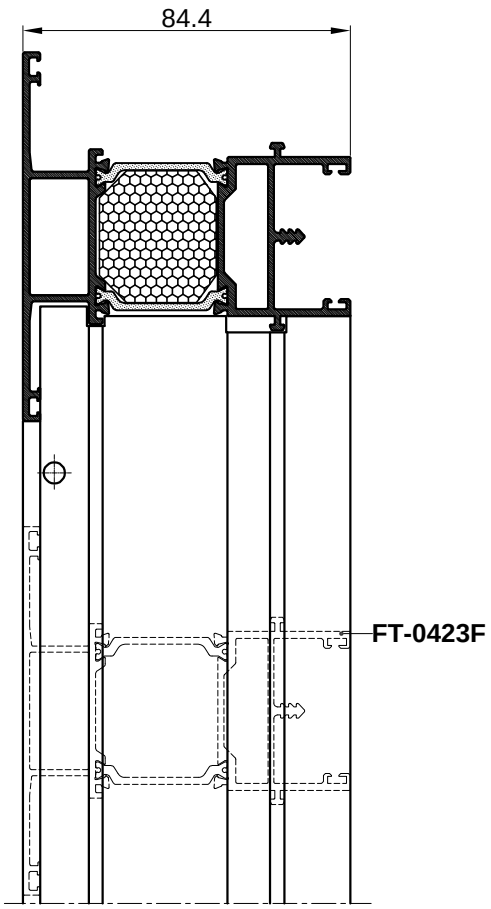


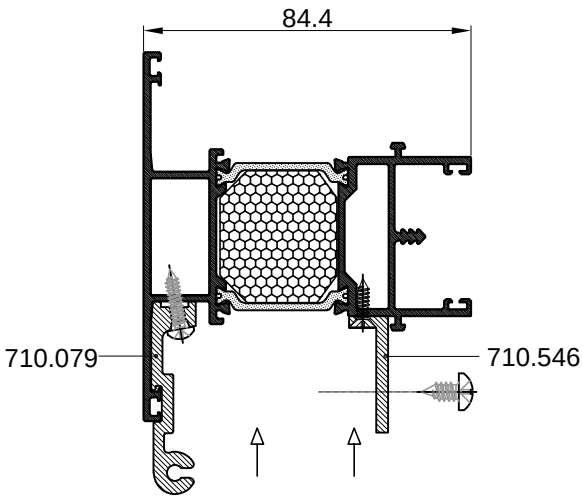


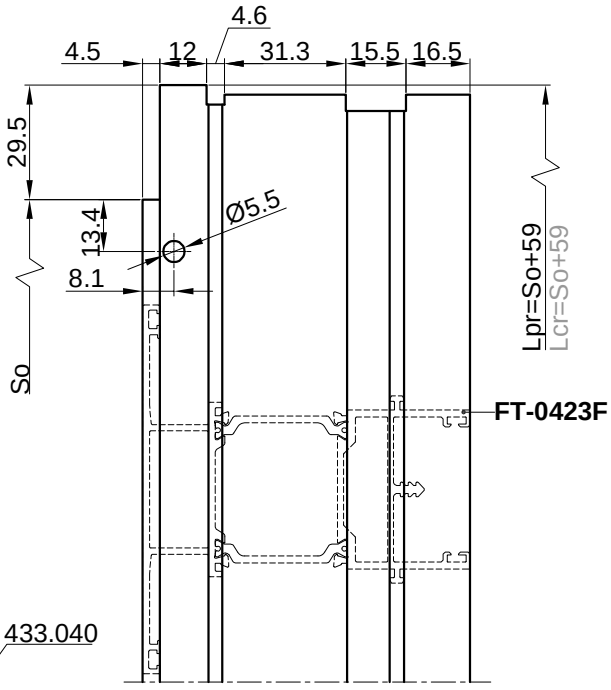


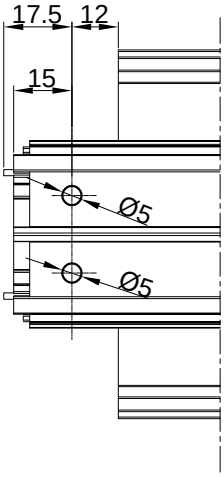


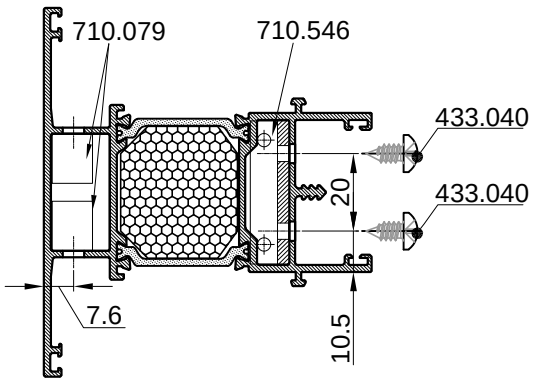








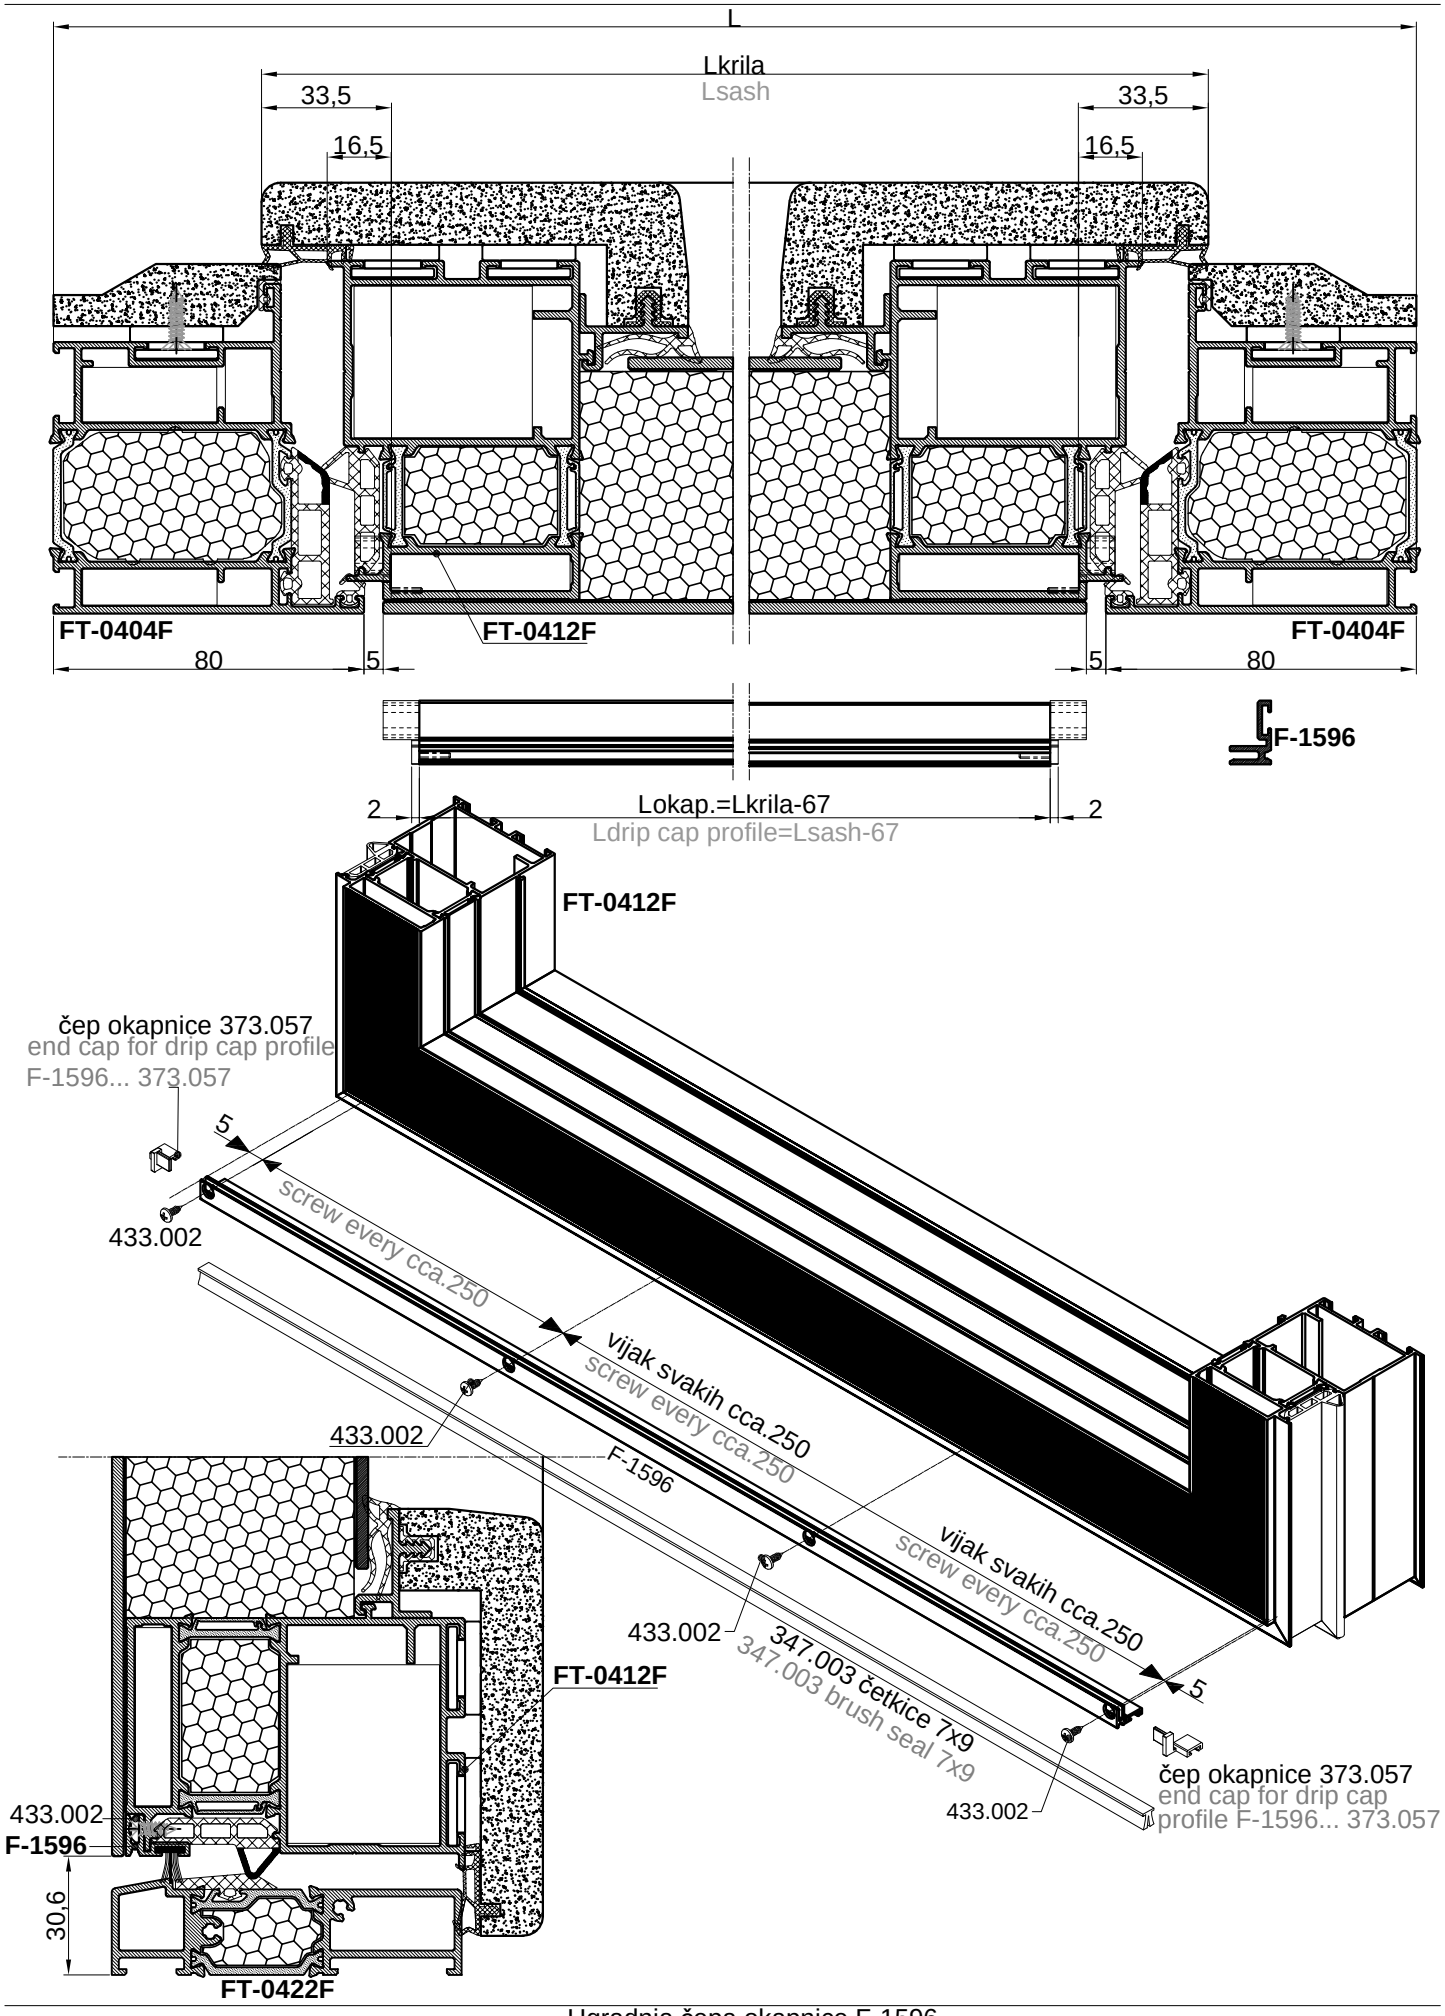

L
Lkrila
Lsash
33,5
16,5
33,5
16,5
FT-0404F
FT-0412F
FT-0404F
80
5
5
80
F-1596
2
Lokap.=Lkrila-67
Ldrip cap profile=Lsash-67
2
FT-0412F
čep okapnice 373.057
end cap for drip cap profile
F-1596... 373.057
5
433.002
screw every cca.250
vijak svakih cca.250
screw every cca.250
433.002
F-1596
vijak svakih cca.250
screw every cca.250
433.002
347.003 četkice 7x9
347.003 brush seal 7x9
5
FT-0412F
433.002
F-1596
30,6
FT-0422F
433.002
čep okapnice 373.057
end cap for drip cap
profile F-1596... 373.057



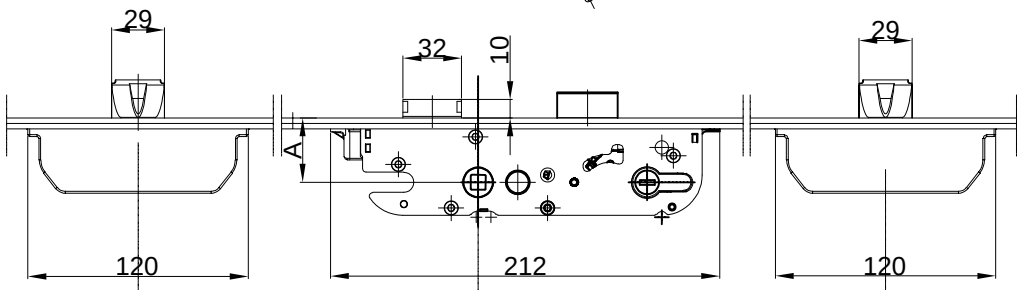





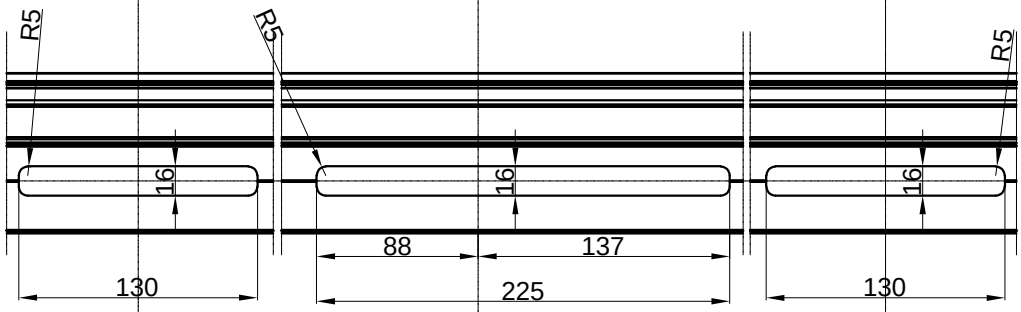





Obrada krila za bravu 45 (MR2)
Processing of sash for multipoint lock with massive bolt 45 (MR2)

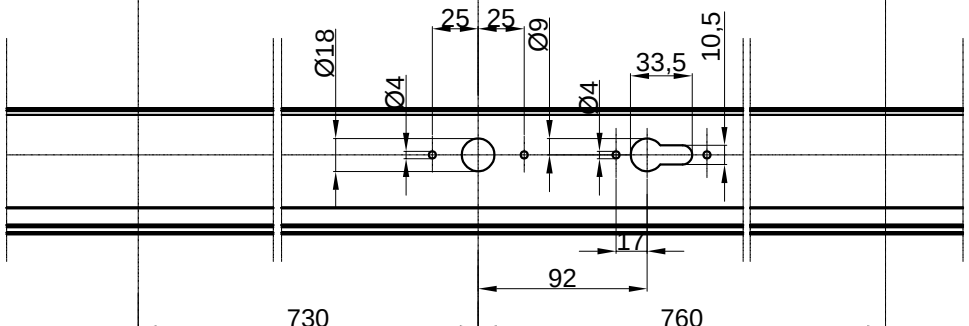

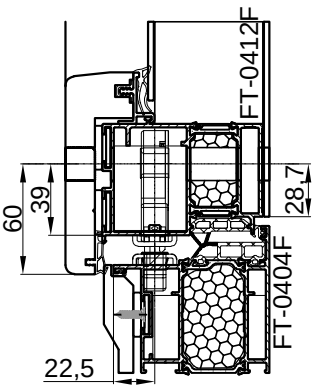


Obrada krila za bravu 45 (MR2)
Processing of sash for multipoint lock with massive bolt 45 (MR2)

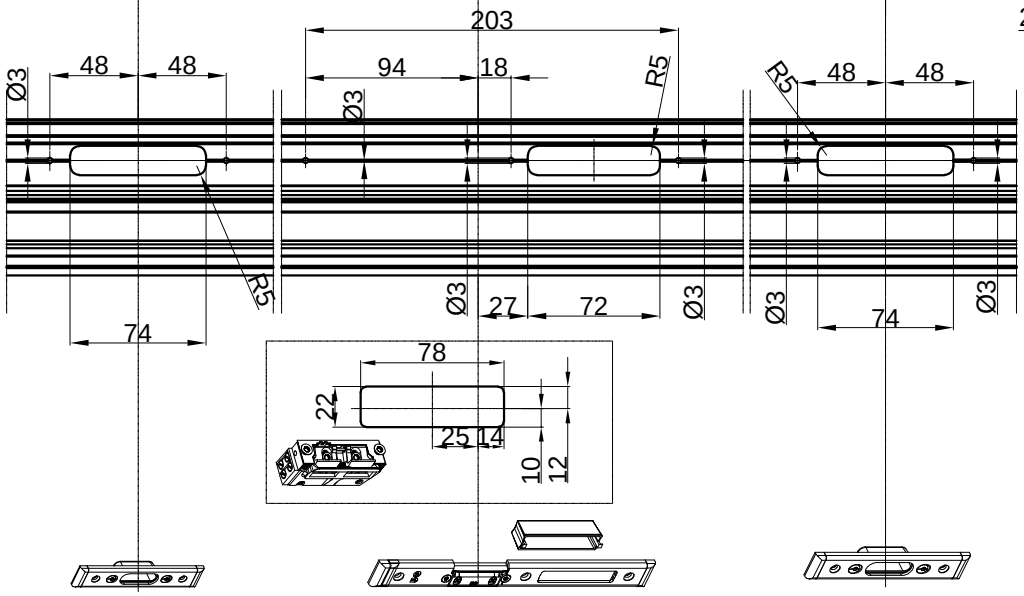


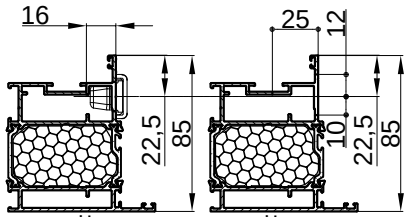


Obrada rama za prihvatne pločice FT-0404F
Processing of frame for striking plate

Obrada rama za elektro otvarač FT-0404F
Processing of frame for electric door opener

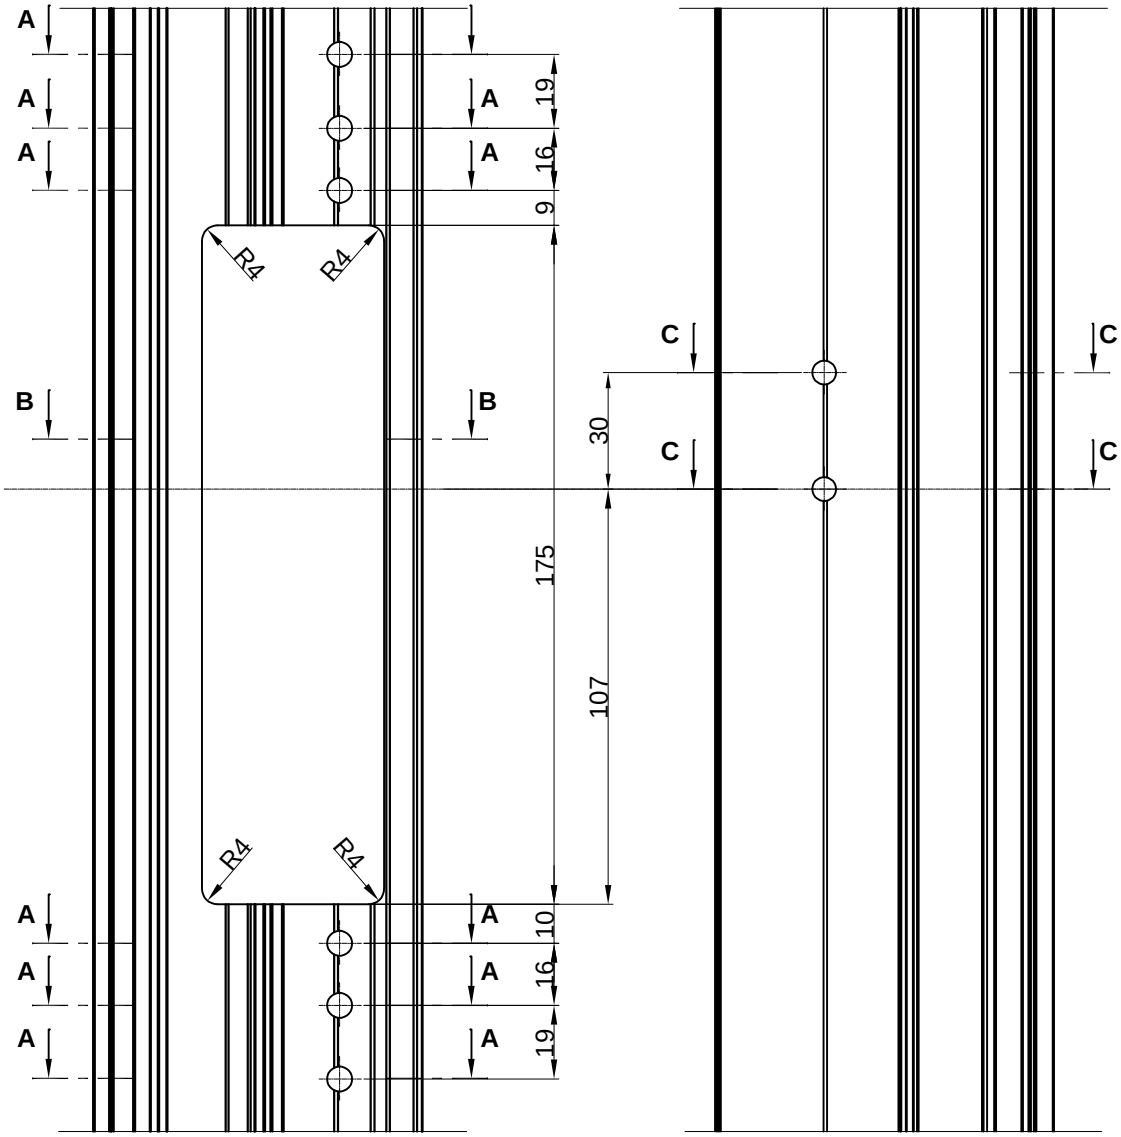


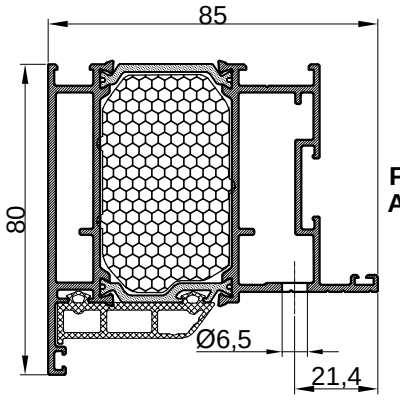


FT-0404F
A-A

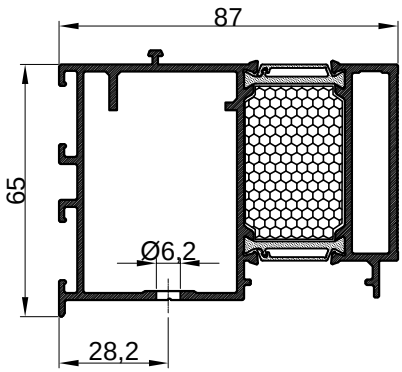



FT-0412F
C-C

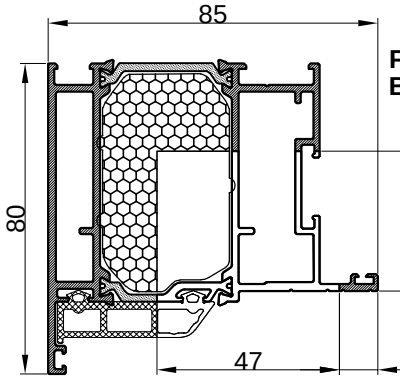



FT-0404F
B-B

115.016.01 **02** **03**		- Skrivena šarka FEAL-GIESE za vrata otvaranje unutra - Boje: 01- bijela; 02 - siva; 03 - crna - Concealed door hinge FEAL-GIESSE (door - inward opening) - Color: 01- white; 02 - gray;03- black

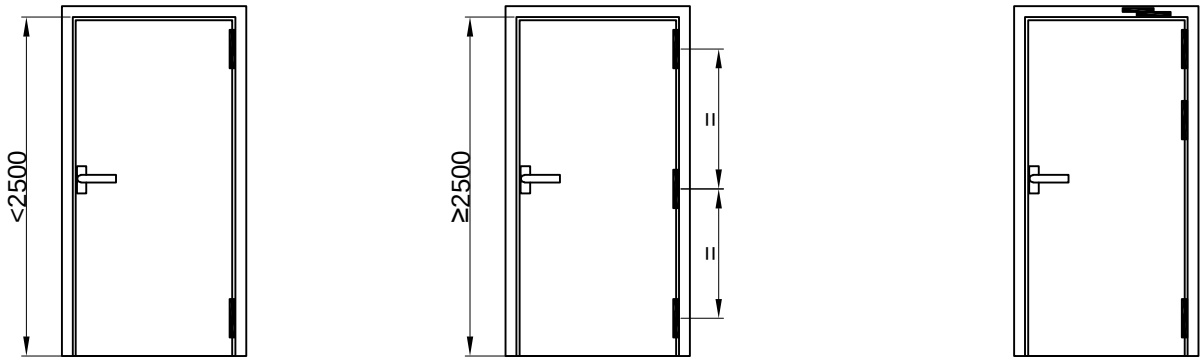

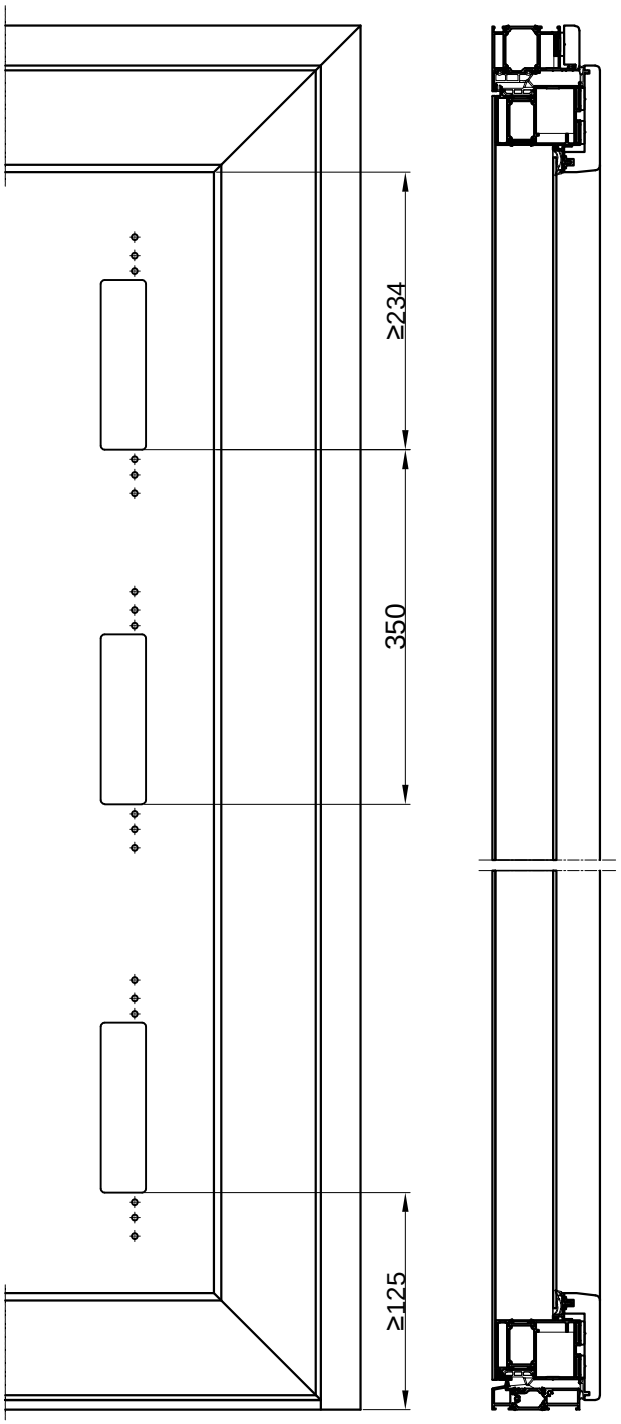

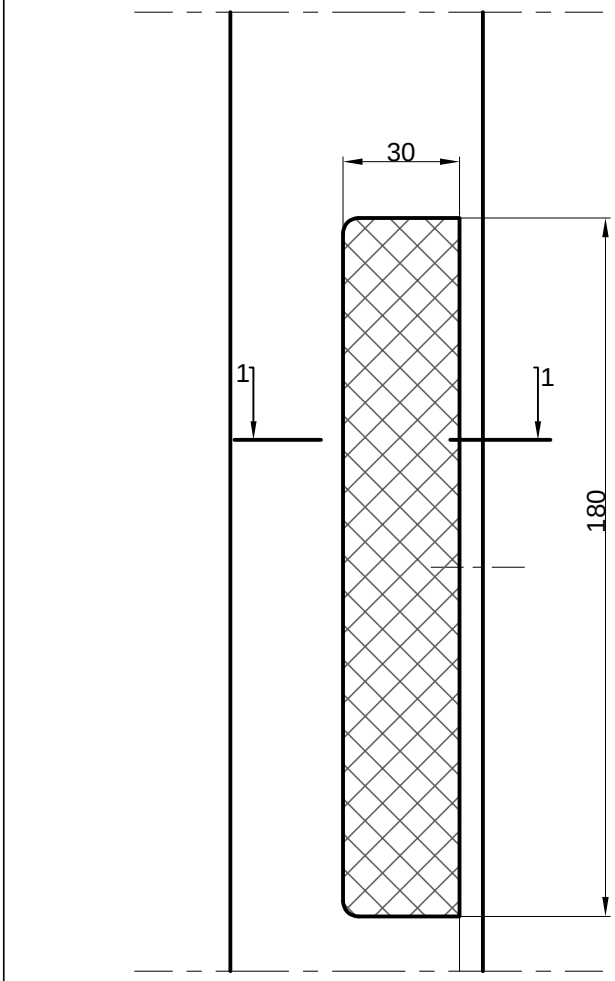





Presjek 1-1
Obrada drvene obloge za šarke
Processing of wooden covering for the hinges

Izrezivanje termo štapića (poliamida) radi kompenziranja širenja profila
Cutting of thermo sticks (polyamide) to compensate profile expansion


Profil krila-vrata
Profile sash-door


FT-0412F

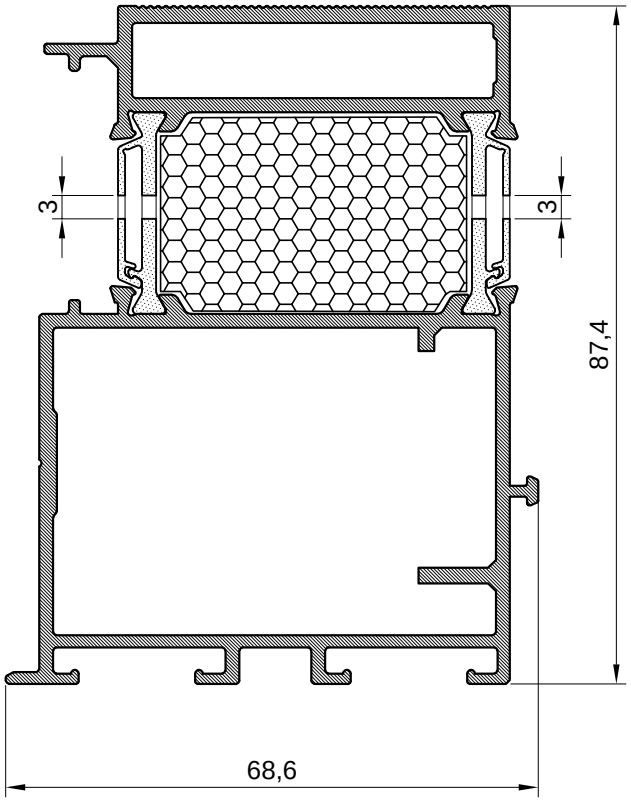

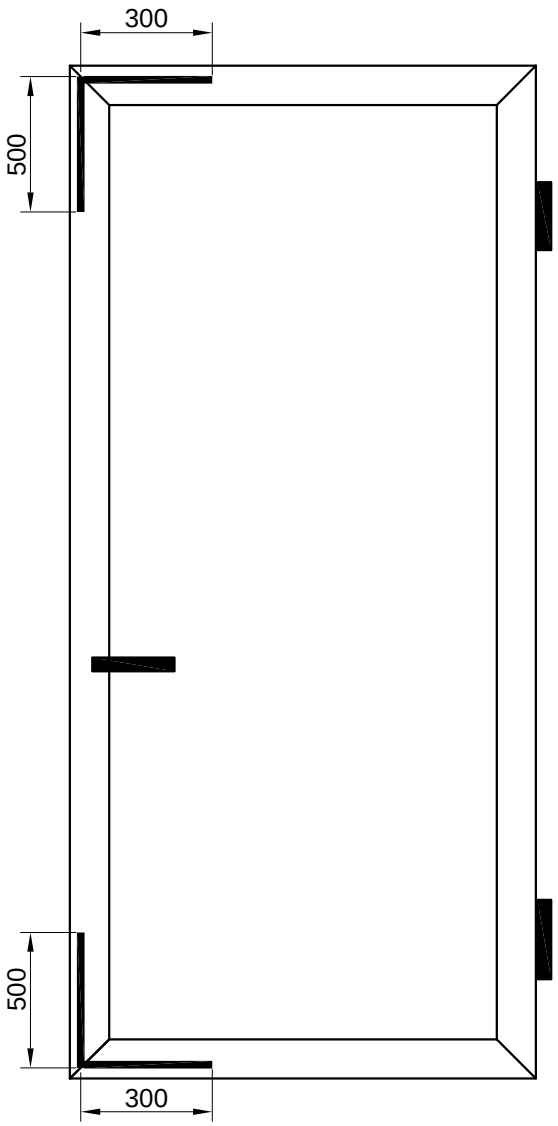


Pozicija izrezivanja termo štapića (poliamida) na krilu
Position of cutting thermo sticks (polyamide) on sash

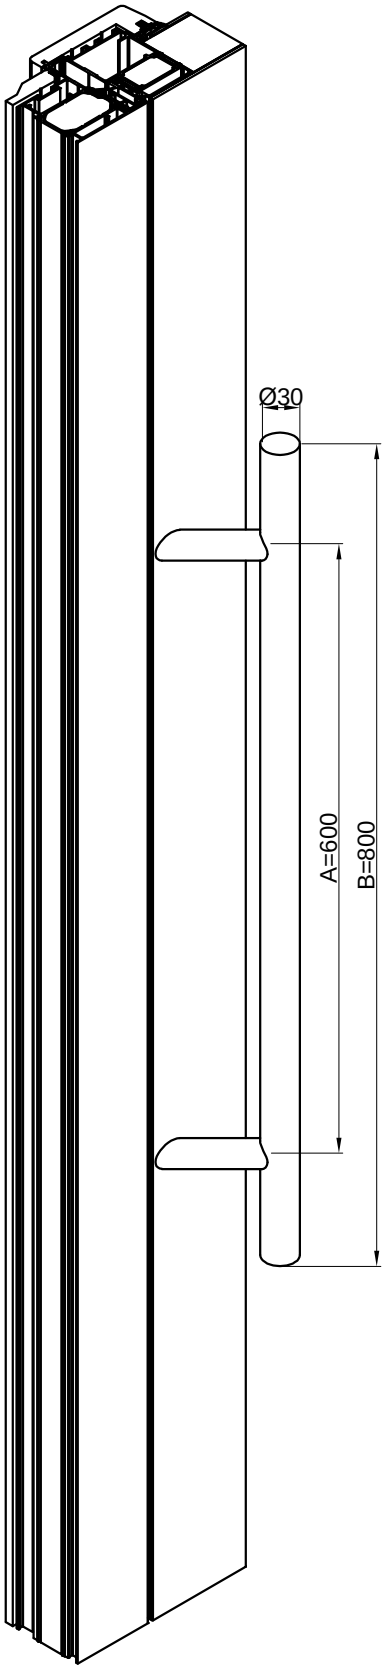

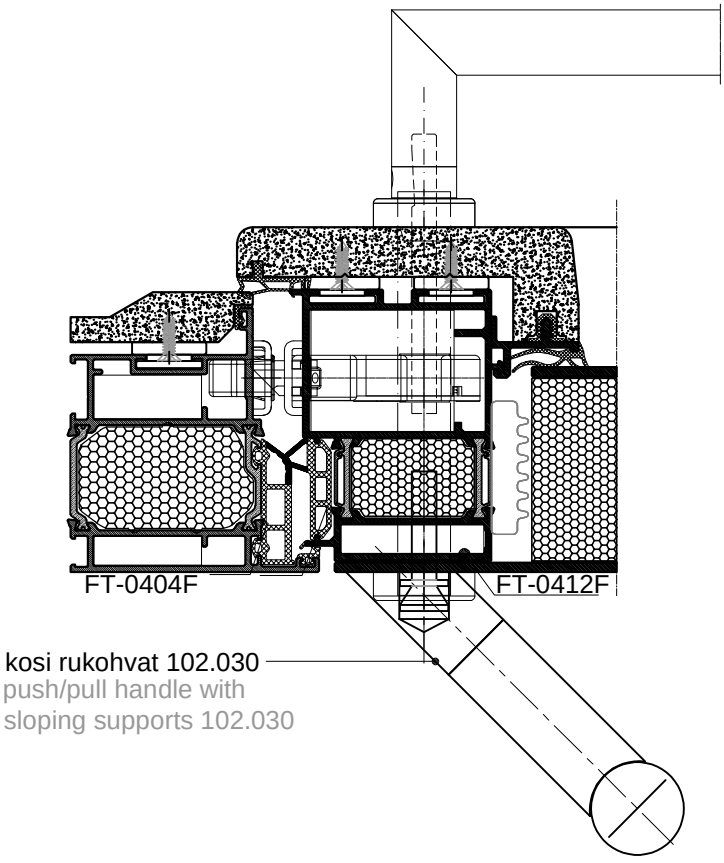



	Mjera "A" Dimension "A"	Mjera "B" Dimension "B"	Oznaka FEAL FEAL code	Oznaka proizvođača Manufacturer code
1	600	800	102.030	B-78820-0C-0-8


373.066- UMETAK ZA PROFIL FT-0424F - ZA KRILO VRATA FT-0412F
373.066- INSERT FOR PROFILE FT-0424F - FOR DOOR SASH FT-0412F




OTVARANJE UNUTRA
INSIDE OPENING

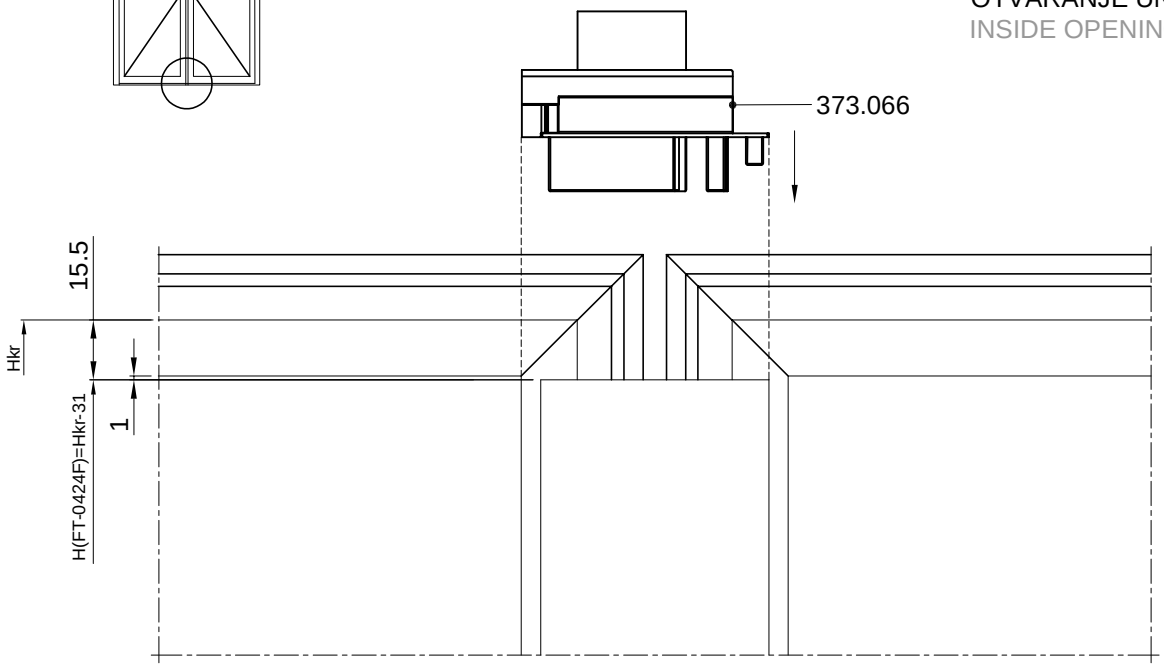

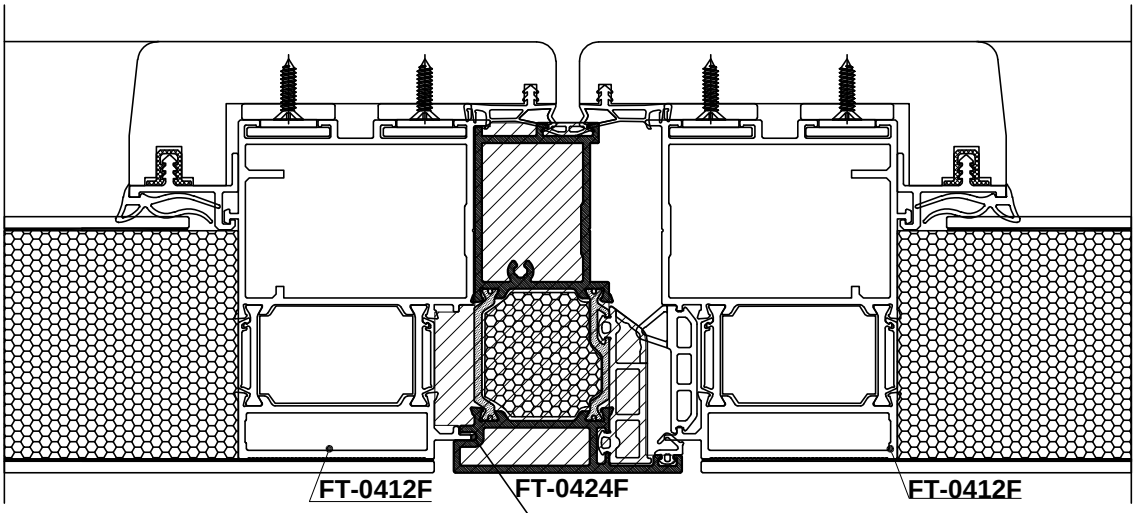

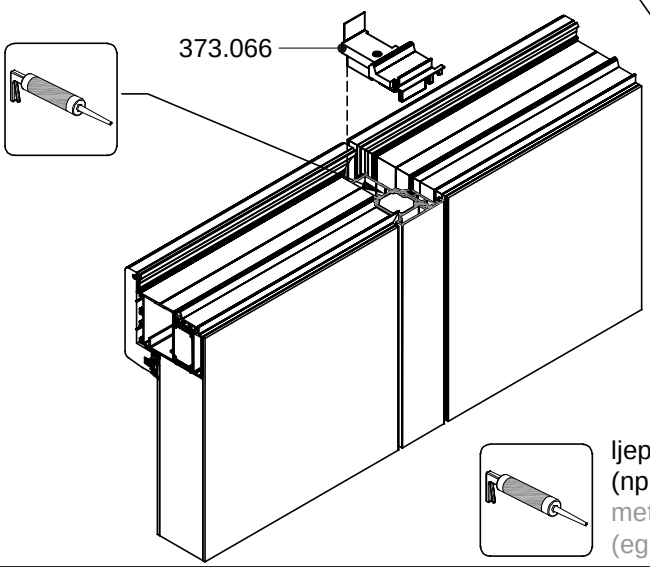




ispuniti ljepilom za metal
(cijelom dužinom profila)
to be filled with metal glue
(throughout the length of
the profile)

ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)


373.066
-gornji i donji umetak-simetrično
-materijal: tvrda guma
-mjera pilanja profila FT-0424F
H=Hkr - 31


373.066
-upper and lower insert-symetrical
-material:hard rubber
-cutting length of the profile FT-0424F
H=Hsh - 31


373.066- UMETAK ZA PROFIL FT-0424F - ZA KRILO VRATA FT-0413F
373.066- INSERT FOR PROFILE FT-0424F - FOR DOOR SASH FT-0413F




OTVARANJE UNUTRA
INSIDE OPENING

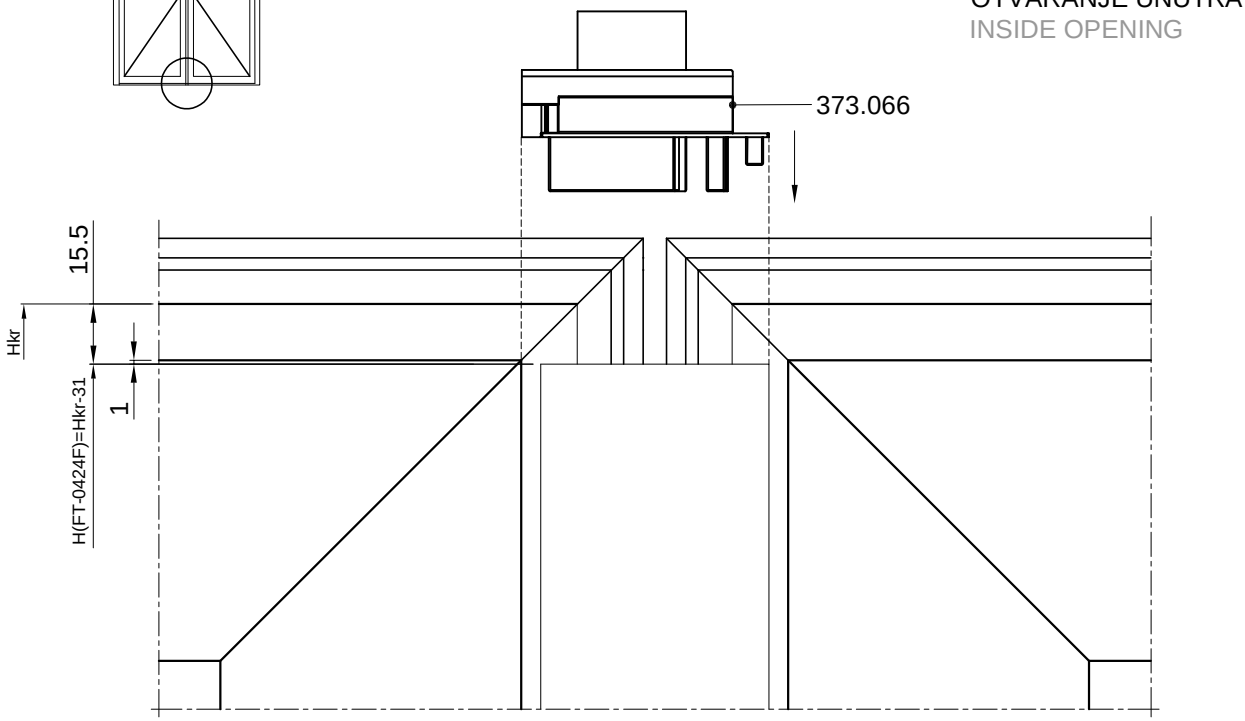

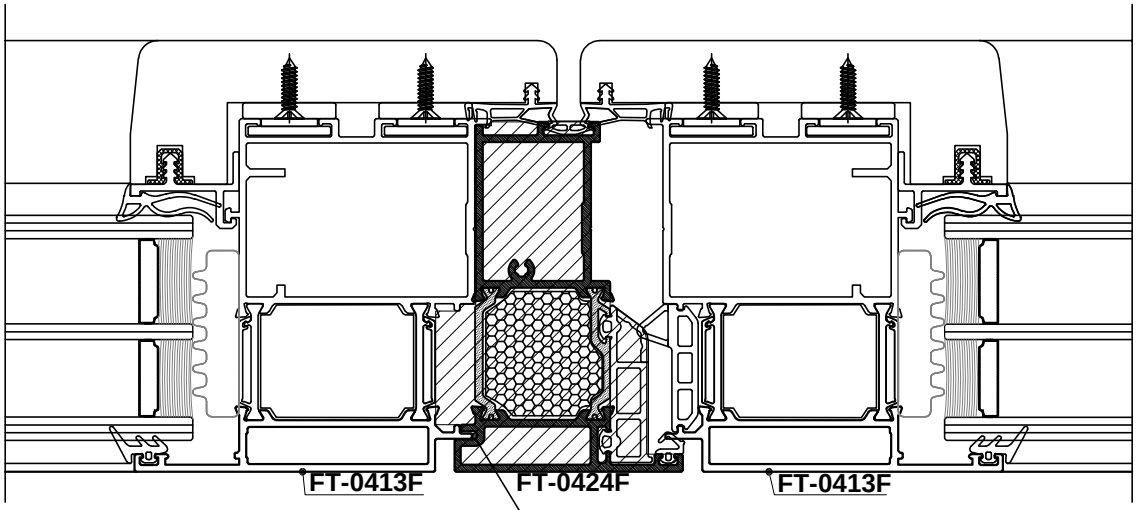

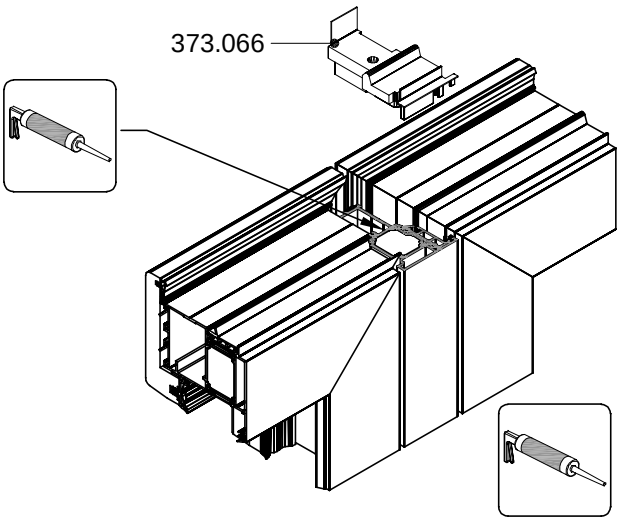




ispuniti ljepilom za metal
(cijelom dužinom profila)
to be filled with metal glue
(throughout the length of
the profile)


ljepilo za metal
(npr. Teroson MS 939)
metal glue
(eg. Teroson MS 939)

373.066
-gornji i donji umetak-simetrično
-materijal: tvrda guma
-mjera pilanja profila FT-0424F
H=Hkr - 31

373.066
-upper and lower insert-symetrical
-material:hard rubber
-cutting length of the profile FT-0424F
H=Hsh - 31

Rezne liste
Cutting lists



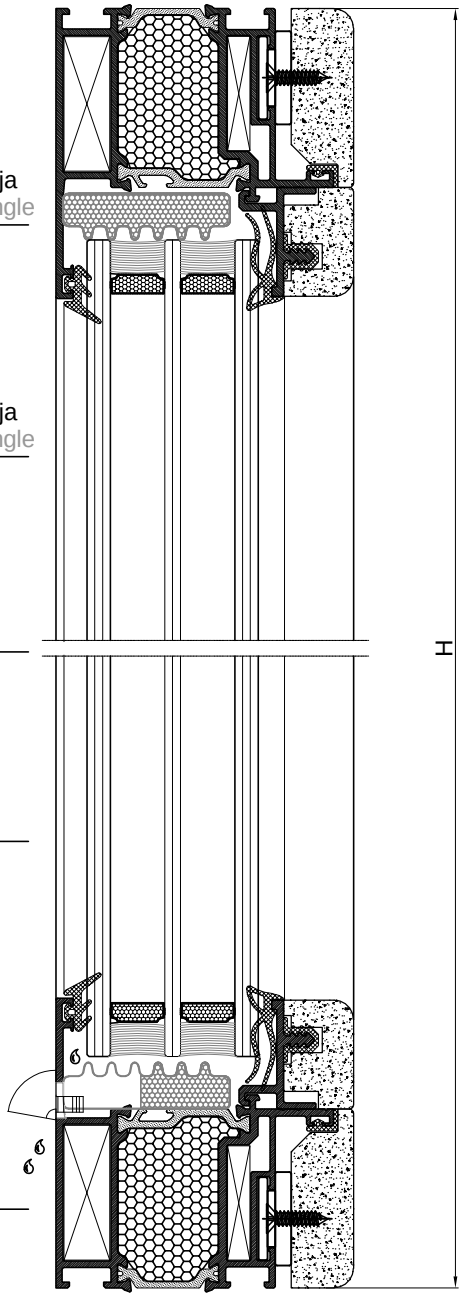


PROFILI PROFILES			kom pcs	mjera dimension	kut pilanja sawing angle
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
F-1350	Horizontalna lajsna	Horizontal bead	2	Ll=L-100	90-90
F-1350	Vertikalna lajsna	Vertical bead	2	Hl=H-148	90-90


DRVENE OBLOGE WOODEN COVERINGS			kom pcs	mjera dimension	kut pilanja sawing angle
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.006	Horizontalna lajsna	Horizontal bead	2	Ll=L-92	45-45
600.006	Vertikalna lajsna	Vertical bead	2	Hl=H-92	45-45

OKOVI HARDWARE			kom pcs
710.090	Kutna spojnica okvira	Frame corner bracket	4
710.163	Kutna spojnica okvira	Frame corner bracket	4
730.001	Kutna spojnica okvira	Frame corner bracket	4
373.031	PVC kutni umetak rama	PVC frame corner bracket	4

BRTVE I DODATCI GASKETS AND ACCESSORIES			kom pcs	mjera dimension
344.046	Brtva u ramu	Gasket in frame		2L+2H
344.045	Brtva za staklo lajsnu	Gasket for the glazing bead		2L+2H
344.049	Brtva prema staklu/unutarnja	Glazing gasket/interior		2L+2H
328.002	Brtva prema staklu/vanjska	Glazing gasket/exterior		2L+2H
370.070	Maska za drenažni otvor	Mask for drainage hole	2	
340.013	Ispuna ispod stakla	Insulation around the glass		2L+2H
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	8	
370.002	PVC podmetač 7 mm	PVC glazing packer 7 mm	8	
375.050	PVC kopča	PVC clamp	(2L+2H)/250	

STAKLO GLASS			
44 mm		1	L -119 x H -119

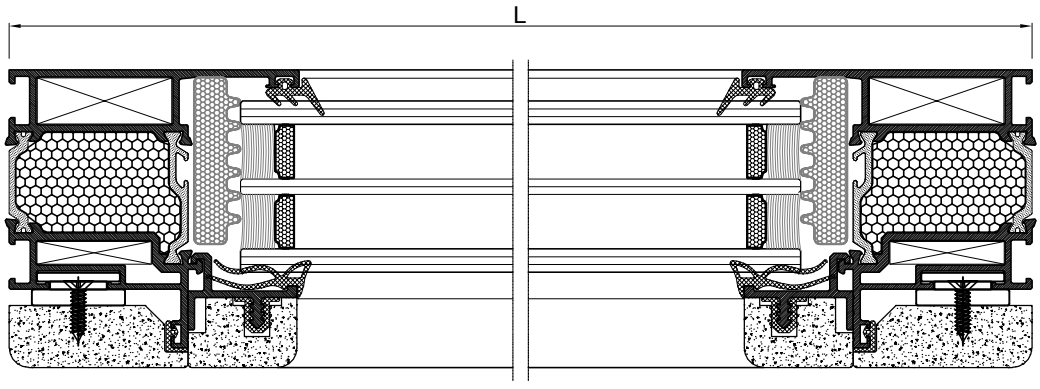




PROFILI PROFILES		kom pcs	mjera dimension	kut pilanja sawing angle
FT-0400F Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F Vertikala okvira	Vert. frame	2	H	45-45
FT-0410F Horizontala krila	Hor. sash	2	Lkr=L-116	45-45
FT-0410F Vertikala krila	Vert. sash	2	Hkr=H-116	45-45
F-1350 Horizontalna lajsna	Horizontal bead	2	Ll=Lkr-83	90-90
F-1350 Vertikalna lajsna	Vertical bead	2	Hl=Hkr-131	90-90
Z40-657 Okapnica	Drip profile	1	Lok=Lkr-49	90-90


DRVENE OBLOGE WOODEN COVERINGS				
600.001 Horizontala okvira	Hor. frame	2	L	45-45
600.001 Vertikala okvira	Vert. frame	2	H	45-45
600.008 Horizontala krila	Hor. sash	2	Lkr=L-80	45-45
600.008 Vertikala krila	Vert. sash	2	Hkr=H-80	45-45


OKOVI HARDWARE		
710.090 Kutna spojnica okvira	Frame corner bracket	4
710.163 Kutna spojnica okvira	Frame corner bracket	4
730.002 Kutna spojnica okvira	Frame corner bracket	4
373.031 PVC kutni umetak rama	PVC corner bracket for frame	4
710.165 Kutna spojnica krila	Sash corner bracket	4
710.129 Kutna spojnica krila	Sash corner bracket	4
730.001 Kutna spojnica krila	Sash corner bracket	4
731.010 Kutna spojnica krila	Sash corner bracket	4
Otklopno zaokretni okov ROTO NT-A	Tilt and turn hardware ROTO NT-A	

BRTVE I DODATCI GASKETS AND ACCESSORIES		
338.017 Centralna brtva	Central gasket	2L+2H
344.112 Brtva u krilu	Gasket in sash	2L+2H
344.046 Brtva u ramu	Gasket in frame	2L+2H
344.045 Brtva uz staklo lajsnu	Gasket for the glazing bead	2L+2H
344.049 Brtva prema staklu/unutarnja	Glazing gasket/interior	2L+2H
328.002 Brtva prema staklu/vanjska	Glazing gasket/exterior	2L+2H
340.013 Ispuna ispod stakla	Insulation around the glass	2L+2H
370.001 PVC podmetač 5 mm	PVC glazing packer 5 mm	12
370.002 PVC podmetač 7 mm	PVC glazing packer 7 mm	12
373.002 Umetak profila okapnice	End insert for drip profile	2
370.070 Maska za drenažni otvor	Mask for drainage hole	2
375.050 PVC kopča	PVC clamp	((2L+2H)/250)x2
368.003 Kutni umetak za centralnu brtvu	Corner insert	4

STAKLO GLASS			
44 mm	1	Lkr(drvo) -135 x Hkr(drvo) -135	

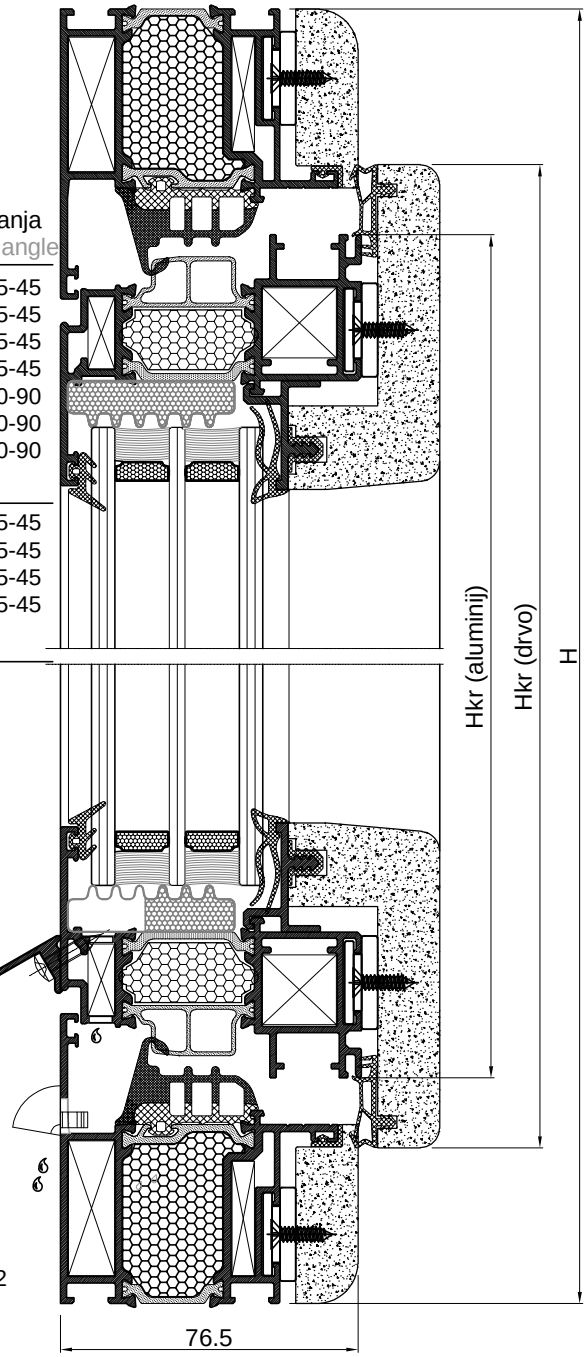

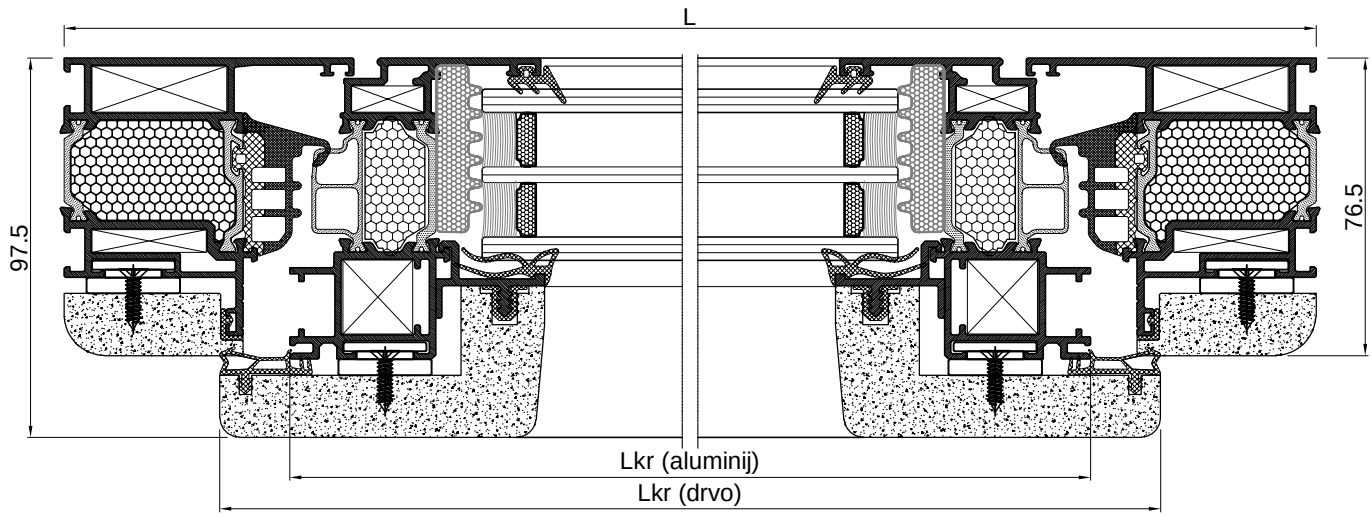


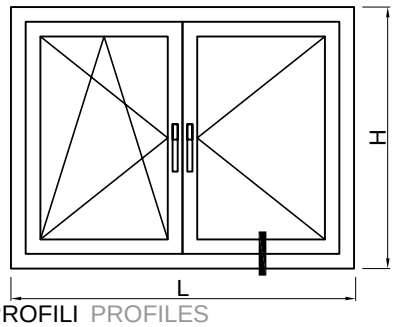


PROFILI PROFILES			kom pcs	mjera dimension	kut pilanja sawing angle
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0410F	Horizontala krila	Hor. sash	4	Lkr=L/2-79	45-45
FT-0410F	Vertikala krila	Vert. sash	4	Hkr=H-116	45-45
FT-0421F	Profil kombatute	Flying mullion	1	Hk=Hkr-47	45-45
F-1350	Horizontalna lajsna	Horizontal glazing bead	4	Ll=Lkr-83	90-90
F-1350	Vertikalna lajsna	Vertical glazing bead	4	Hl=Hkr-131	90-90
Z40-657	Okapnica (gl. krilo)	Drip profile	1	Lok=Lkr-49	90-90
Z40-657	Okapnica (pom. krilo)	Drip profile	1	Lok=Lkr+32	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.008	Horizontala krila	Hor. sash	4	Lkr=L/2-43	45-45
600.008	Vertikala krila	Vert. sash	4	Hkr=H-80	45-45


OKOVI HARDWARE			
710.090	Kutna spojnica okvira	Frame corner bracket	4
710.163	Kutna spojnica okvira	Frame corner bracket	4
730.002	Kutna spojnica okvira	Frame corner bracket	4
373.031	PVC kutni umetak rama	PVC corner bracket for frame	4
710.165	Kutna spojnica krila	Sash corner bracket	8
710.129	Kutna spojnica krila	Sash corner bracket	8
730.001	Kutna spojnica krila	Sash corner bracket	8
731.010	Kutna spojnica krila	Sash corner bracket	8
Otklopno zaokretni okov ROTO NT-A		Tilt and turn hardware ROTO NT-A	

BRTVE I DODATCI GASKETS AND ACCESSORIES			
338.017	Centralna brtva	Central gasket	2L+3H
344.112	Brtva u krilu	Gasket in sash	2L+4H
344.046	Brtva u ramu	Gasket in frame	2L+2H
344.045	Brtva za staklo lajsnu	Gasket for the glazing bead	2L+4H
344.049	Brtva uz staklo/unutarnja	Glazing gasket/interior	2L+4H
328.002	Brtva uz staklo/vanjska	Glazing gasket/exterior	2L+4H
344.047	Brtva uz profil kombatute	Gasket along the flying mullion profile	1H
340.013	Ispuna ispod stakla	Insulation around the glass	2L+4H
365.049	Čep kombatute	Insert for the flying mullion	2
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	20
370.002	PVC podmetač 7 mm	PVC glazing packer 7 mm	20
373.002	Umetak profila okapnice	End insert for drip profile	4
370.070	Maska za drenažni otvor	Mask for drainage hole	4
375.050	PVC kopča	PVC clamp	(4L+6H)/250
368.003	Kutni umetak za centralnu brtvu	Corner insert	4

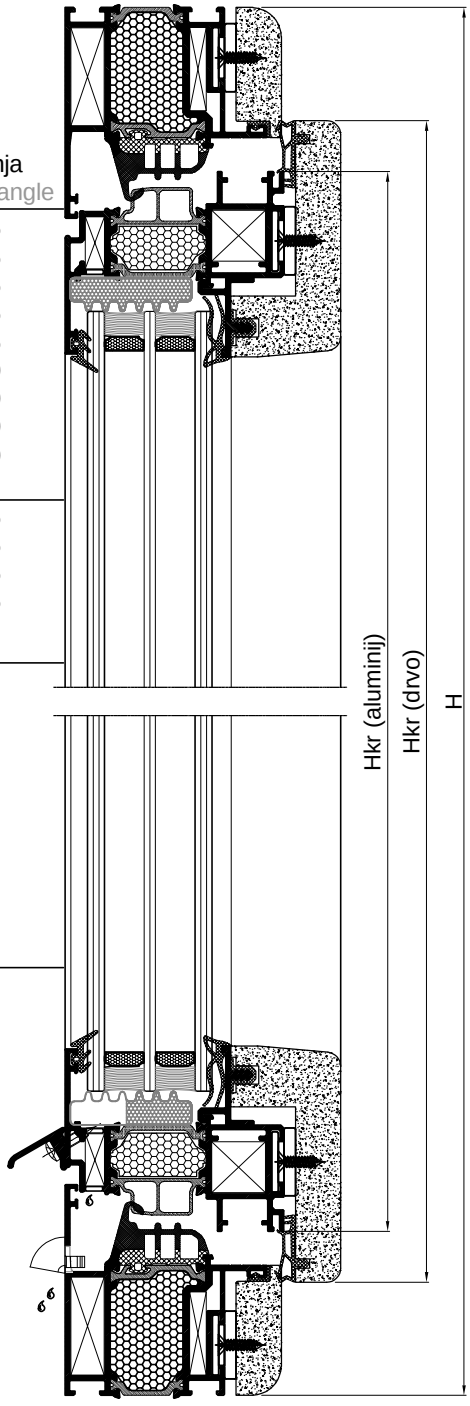


STAKLO GLASS			
44 mm		2	Lkr(drvo) - 135 x Hkr(drvo) - 135

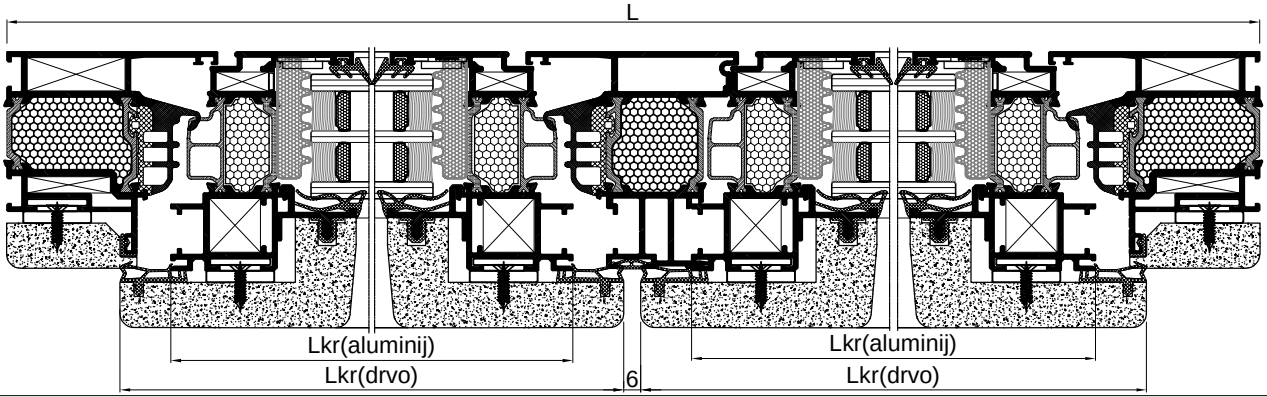


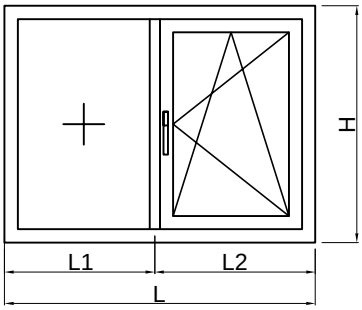



			kom pcs	mjera dimension	kut pilanja sawing angle
PROFILI PROFILES					
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0410F	Horizontala krila	Hor. sash	2	Lkr=L2-89	45-45
FT-0410F	Vertikala krila	Vert. sash	2	Hkr=H-116	45-45
FT-0420F	Prečka	Mullion	1	Hpr=H-104.2	90-90
F-1350	Horiz. lajsna okvira	Horizontal bead-frame	2	Llf=L1-73.5	90-90
F-1350	Vertikalna lajsna okvira	Vertical bead-frame	2	Hlf=H-148	90-90
F-1350	Horizontalna lajsna-krilo	Horizontal bead-sash	2	Llk=Lkr-83	90-90
F-1350	Vertikalna lajsna-krilo	Vertical bead-sash	2	Hlk=Hkr-131	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.008	Horizontala krila	Hor. sash	2	Lkr=L2-53	45-45
600.008	Vertikala krila	Vert. sash	2	Hkr=H-80	45-45
600.006	Horiz. lajsna okvira	Horizontal bead-frame	2	Ll=L1-65	45-45
600.006	Vertikalna lajsna okvira	Vertical bead-frame	2	Hl=H-92	45-45
600.007	Obloga prečke	Mullion covering	1	Hpr=H-92.2	90-90
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	4		
710.163	Kutna spojnica okvira	Frame corner bracket	4		
730.002	Kutna spojnica okvira	Frame corner bracket	4		
373.031	PVC kutni umetak rama	PVC corner bracket for frame	4		
710.165	Kutna spojnica krila	Sash corner bracket	4		
710.129	Kutna spojnica krila	Sash corner bracket	4		
730.001	Kutna spojnica krila	Sash corner bracket	4		
731.010	Kutna spojnica krila	Sash corner bracket	4		
Otklopno zaokretni okov ROTO NT-A		Tilt and turn hardware ROTO NT-A			
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket	L+2H		
344.112	Brtva u krilu	Gasket in sash	L+2H		
344.046	Brtva u ramu	Gasket in frame	2L+4H		
344.045	Brtva za staklo lajsnu	Gasket for the glazing bead	2L+5H		
344.049	Brtva uz staklo/unutarnja	Glazing gasket/interior	2L+4H		
328.002	Brtva uz staklo/vanjska	Glazing gasket/exterior	2L+4H		
340.013	Ispuna ispod stakla	Insulation around the glass	2L+4H		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	20		
370.002	PVC podmetač 7 mm	PVC glazing packer 7 mm	20		
373.002	Umetak profila okapnice	End insert for drip profile	2		
370.070	Maska za drenažni otvor	Mask for drainage hole	4		
375.050	PVC kopča	PVC clamp	(3L+4H)/250		
375.051	PVC umetak prečke	PVC insert for the mullion	2		
368.003	Kutni umetak za centralnu brtvu	Corner insert	4		

STAKLO GLASS		mjera dimension	
44 mm		L1-92 x H-119 - Fiksno	1
44 mm		Lkr(drvo)-135 x Hkr(drvo)-135	1

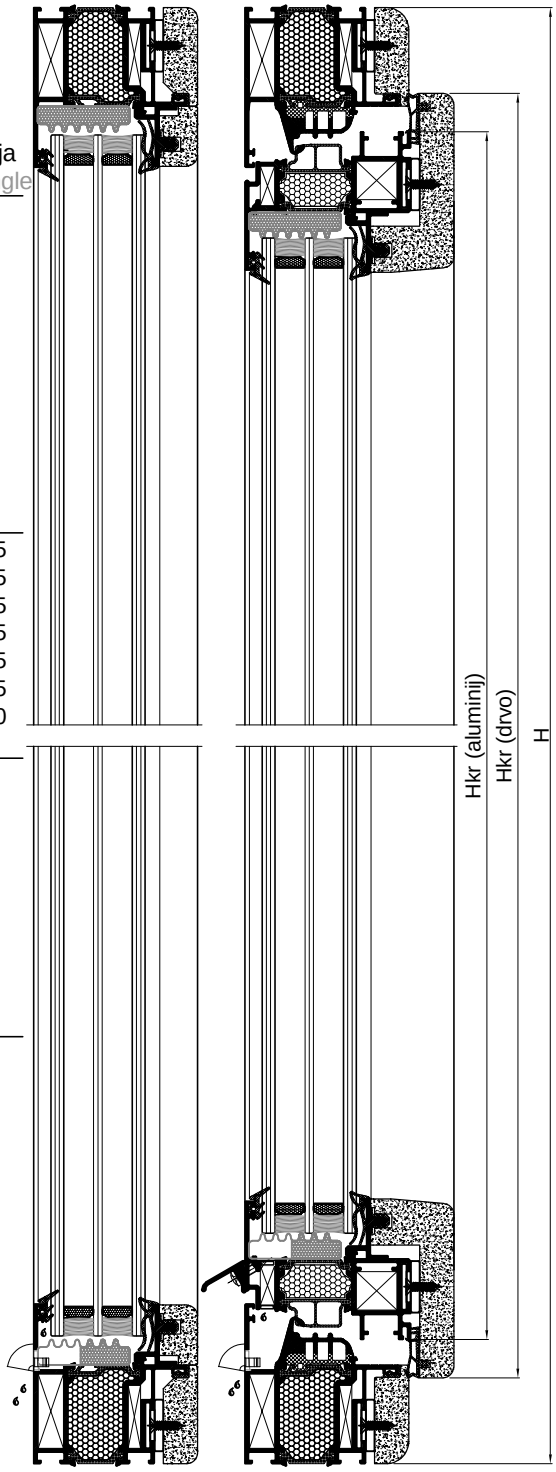

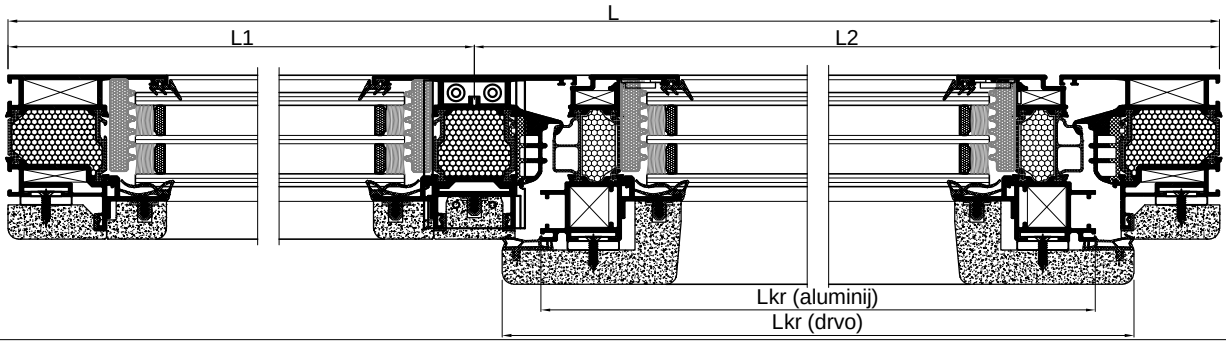



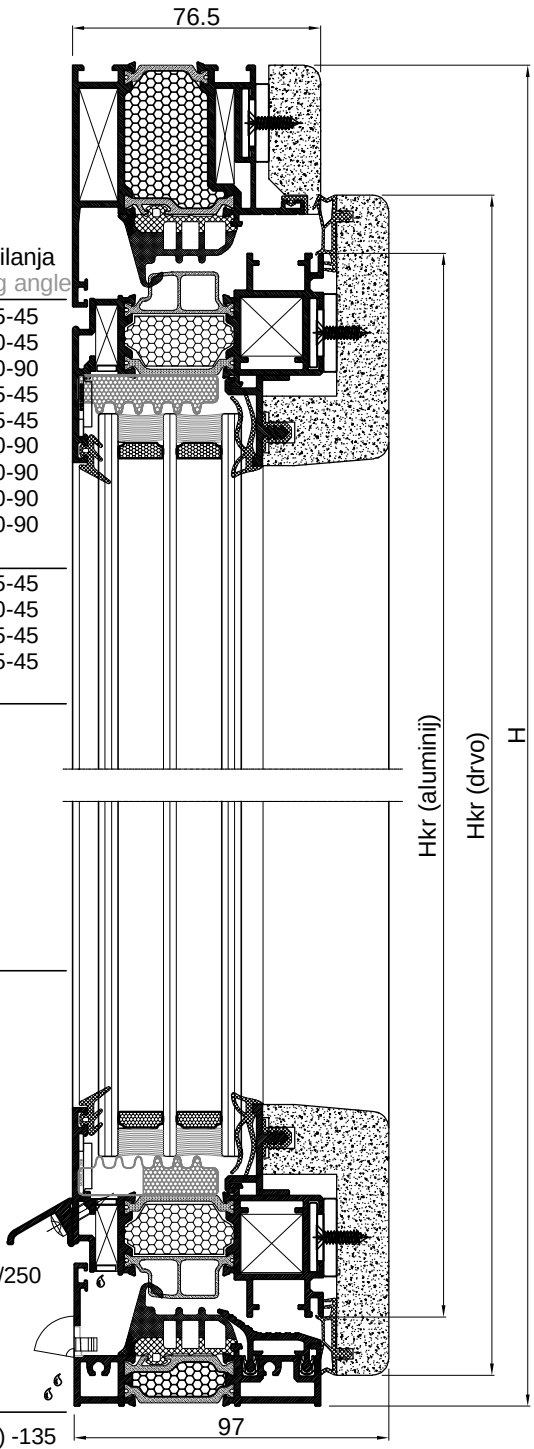



PROFILI PROFILES			kom pcs	mjera dimension	kut pilanja sawing angle
FT-0400F	Horizontala okvira	Hor. frame	1	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	90-45
FT-0401F	Profil praga	Threshold profile	1	Lpr=L-87.4	90-90
FT-0410F	Horizontala krila	Hor. sash	2	Lkr=L-116	45-45
FT-0410F	Vertikala krila	Vert. sash	2	Hkr=H-85.5	45-45
F-1350	Horizontalna lajsna	Horizontal bead	2	Ll=Lkr-83	90-90
F-1350	Vertikalna lajsna	Vertical bead	2	Hl=Hkr-131	90-90
F-1353	Profil na pragu	Profile on the threshold	1	Lpp=L-87.4	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
DRVENE OBLOGE WOODEN COVERINGS				mjera	
600.001	Horizontala okvira	Hor. frame	1	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	90-45
600.008	Horizontala krila	Horiz. sash	2	Lkr=L-80	45-45
600.008	Vertikala krila	Vert. sash	2	Hkr=H-49.5	45-45


OKOVI HARDWARE			kom
710.090	Kutna spojnica okvira	Frame corner bracket	2
710.163	Kutna spojnica okvira	Frame corner bracket	2
730.002	Kutna spojnica okvira	Frame corner bracket	2
373.031	PVC kutni umetak rama	PVC corner bracket of frame	2
710.165	Kutna spojnica krila	Sash corner bracket	4
710.129	Kutna spojnica krila	Sash corner bracket	4
730.001	Kutna spojnica krila	Sash corner bracket	4
731.010	Kutna spojnica krila	Sash corner bracket	4
Otklopno zaokretni okov ROTO NT-A		Tilt and turn hardware ROTO NT-A	

BRTVE I DODATCI GASKETS AND ACCESSORIES			kom	mjera
338.017	Centralna brtva	Central gasket		2L+2H
344.112	Brtva u krilu	Gasket in sash		2L+2H
344.046	Brtva u ramu	Gasket in frame		2L+2H
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		2L+2H
344.049	Brtva prema staklu/unutarnja	Glazing gasket/interior		2L+2H
328.002	Brtva prema staklu/vanjska	Glazing gasket/exterior		2L+2H
340.013	Ispuna ispod stakla	Insulation around the glass		2L+2H
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	12	
370.002	PVC podmetač 7 mm	PVC glazing packer 7 mm	12	
373.002	Umetak profila okapnice	End insert for drip profile	2	
370.070	Maska za drenažni otvor	Mask for drainage hole	2	
375.050	PVC kopča	PVC clamp		(3L+4H)/250
368.003	Kutni umetak za centralnu brtvu	Corner insert	4	

STAKLO GLASS		
44 mm	1	Lkr(drvo) -135 x Hkr(drvo) -135

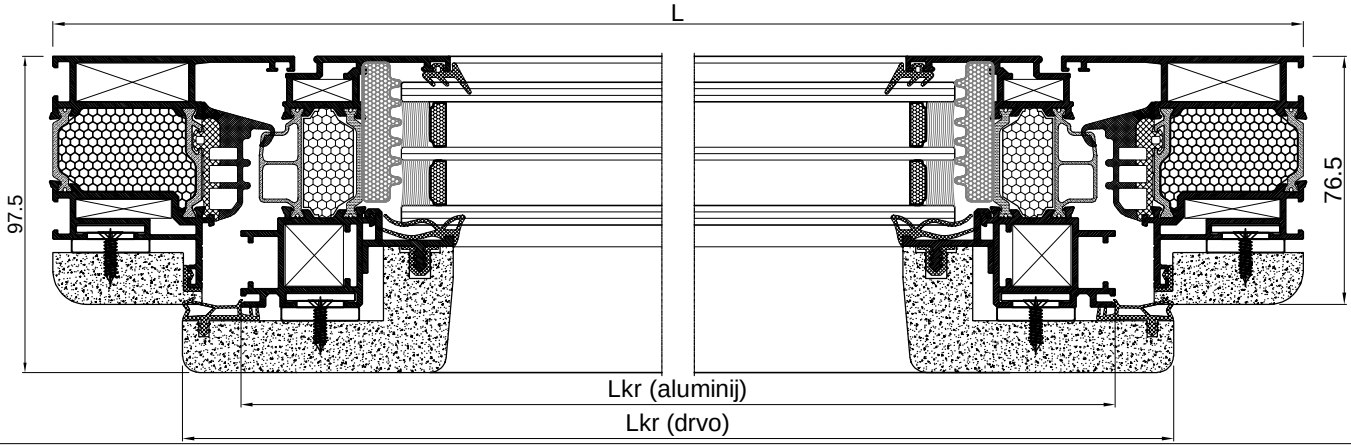




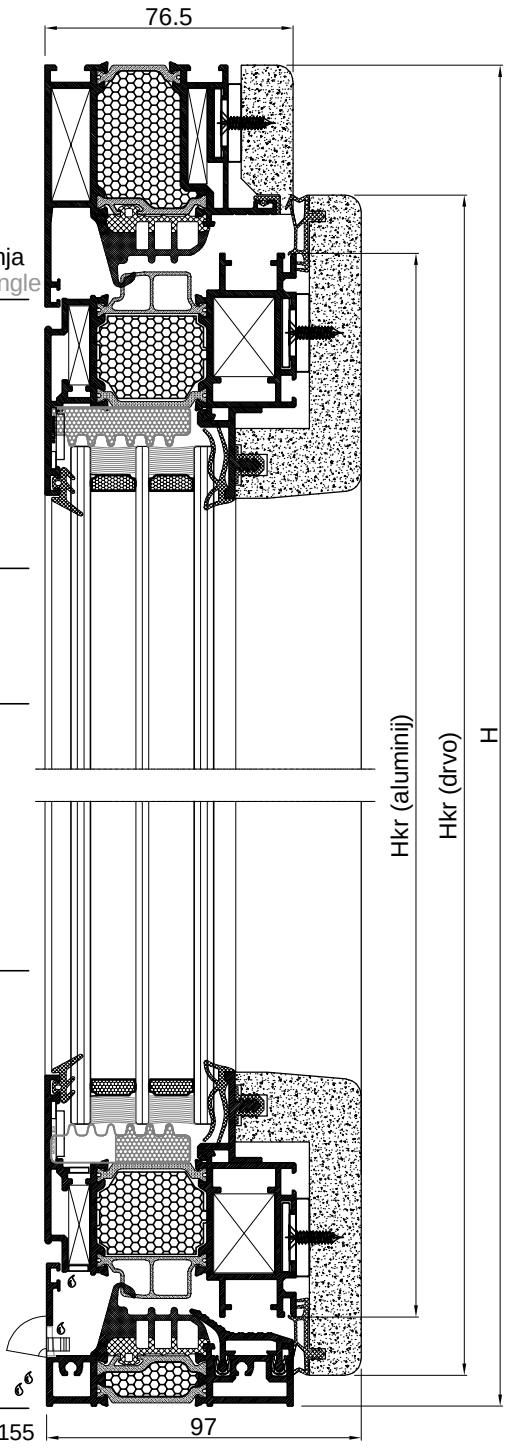


			kom	mjera	kut pilanja
PROFILI PROFILES			pcs	dimension	sawing angle
FT-0400F	Horizontala okvira	Hor. frame	1	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	90-45
FT-0401F	Profil praga	Threshold profile	1	Lpr=L-87.4	90-90
FT-0411F	Horizontala krila	Hor. sash	2	Lkr=L-116	45-45
FT-0411F	Vertikala krila	Vert. sash	2	Hkr=H-85.5	45-45
F-1350	Horizontalna lajsna	Horizontal bead	2	Ll=Lkr-103	90-90
F-1350	Vertikalna lajsna	Vertical bead	2	Hl=Hkr-151	90-90
F-1353	Profil na pragu	Profile on threshold	1	Lpp=L-87.4	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	1	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	90-45
600.009	Horizontala krila	Hor. sash	2	Lkr=L-80	45-45
600.009	Vertikala krila	Vert. sash	2	Hkr=H-49.5	45-45
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	2		
710.163	Kutna spojnica okvira	Frame corner bracket	2		
730.002	Kutna spojnica okvira	Frame corner bracket	2		
373.031	PVC kutni umetak rama	PVC corner bracket of frame	2		
710.165	Kutna spojnica krila	Sash corner bracket	4		
710.129	Kutna spojnica krila	Sash corner bracket	4		
730.001	Kutna spojnica krila	Sash corner bracket	4		
731.010	Kutna spojnica krila	Sash corner bracket	4		
Otklopno zaokretni okov ROTO NT-A		Tilt and turn hardware ROTO NT-A			
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket	2L+2H		
344.112	Brtva u krilu	Gasket in sash	2L+2H		
344.046	Brtva u ramu	Gasket in frame	2L+2H		
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead	2L+2H		
344.049	Brtva prema staklu/unutarnja	Glazing gasket/interior	2L+2H		
328.002	Brtva prema staklu/vanjska	Glazing gasket/exterior	2L+2H		
340.013	Ispuna ispod stakla	Insulation around the glass	2L+2H		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	12		
370.002	PVC podmetač 7 mm	PVC glazing packer 7 mm	12		
373.002	Umetak profila okapnice	End insert for drip profile	2		
370.070	Maska za drenažni otvor	Mask for drainage hole	2		
375.050	PVC kopča	PVC clamp	(3L+4H)/250		
368.003	Kutni umetak za centralnu brtvu	Corner insert	4		

STAKLO GLASS

44 mm	1	Lkr(drvo) -155 x Hkr(drvo) -155

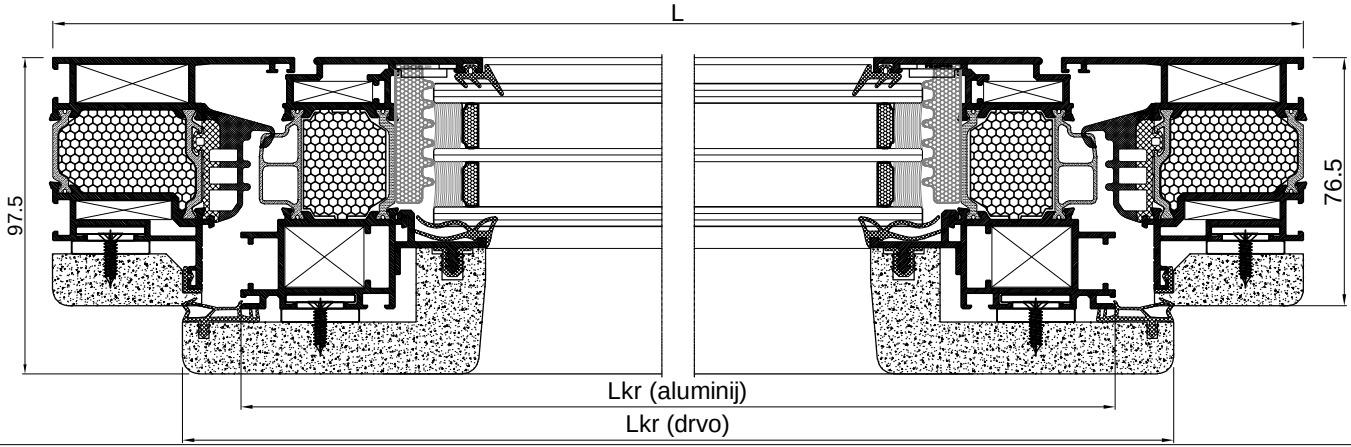





PROFILI PROFILES			kom pcs	mjera dimension	kut pilanja sawing angle
FT-0400F	Horizontala okvira	Hor. frame	1	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	90-45
FT-0401F	Profil praga	Threshold profile	1	Lpr=L-87.4	90-90
FT-0410F	Horizontala krila	Hor. sash	2	Lkr=L-116	45-45
FT-0410F	Vertikala krila	Vert. sash	2	Hkr=H-85.5	45-45
FT-0420F	Prečka krila	Sash mullion	1	Lprkr=Lkr-87.2	90-90
F-1350	Horiz. lajsna-krilo	Horizontal bead-sash	2	Ll=Lkr-83	90-90
F-1350	Horiz. lajsna-prečka	Horizontal bead-mullion	2	Ll=Lkr-87.5	90-90
F-1350	Vertikalna lajsna	Vertical bead	2	Hl=H1-140	90-90
F-1350	Vertikalna lajsna	Vertical bead	2	Hl=H2-170.5	90-90
F-1353	Profil na pragu	Profile on threshold	1	Lpp=L-87.4	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	1	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	90-45
600.008	Horizontala krila	Hor. sash	2	Lkr=L-80	45-45
600.008	Vertikala krila	Vert. sash	2	Hkr=H-49.5	45-45
600.010	Prečka krila	Sash mullion	1	Lprkr=Lkr-131	90-90


OKOVI HARDWARE				
710.090	Kutna spojnica okvira	Frame corner bracket	2	
710.163	Kutna spojnica okvira	Frame corner bracket	2	
730.002	Kutna spojnica okvira	Frame corner bracket	2	
373.031	PVC kutni umetak rama	PVC corner bracket of frame	2	
710.165	Kutna spojnica krila	Sash corner bracket	4	
710.129	Kutna spojnica krila	Sash corner bracket	4	
730.001	Kutna spojnica krila	Sash corner bracket	4	
731.010	Kutna spojnica krila	Sash corner bracket	4	
Otklopno zaokretni okov ROTO NT-A		Tilt and turn hardware ROTO NT-A		


BRTVE I DODATCI GASKETS AND ACCESSORIES				
338.017	Centralna brtva	Central gasket		2L+2H
344.112	Brtva u krilu	Gasket in sash		2L+2H
344.046	Brtva u ramu	Gasket in frame		2L+2H
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		2L+2H
344.049	Brtva prema staklu/unutarnja	Glazing gasket/interior		2L+2H
328.002	Brtva prema staklu/vanjska	Glazing gasket/exterior		2L+2H
340.013	Ispuna ispod stakla	Insulation around the glass		2L+2H
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	12	
370.002	PVC podmetač 7 mm	PVC glazing packer 7 mm	12	
373.002	Umetak profila okapnice	End insert for drip profile	2	
370.070	Maska za drenažni otvor	Mask for drainage hole	2	
375.050	PVC kopča	PVC clamp		(3L+4H)/250
368.003	Kutni umetak za centralnu brtvu	Corner insert	4	

STAKLO GLASS	mjera dimension	kom pcs
44 mm	Lkr(drvo) -135 x Hkr(drvo) -135	1

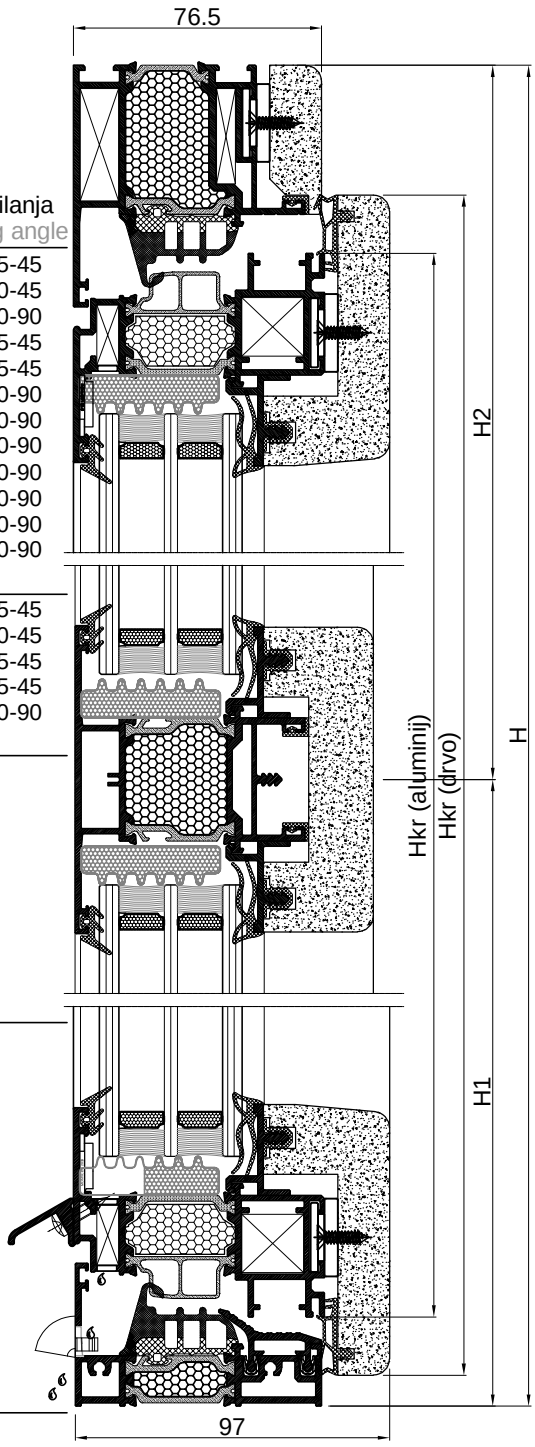

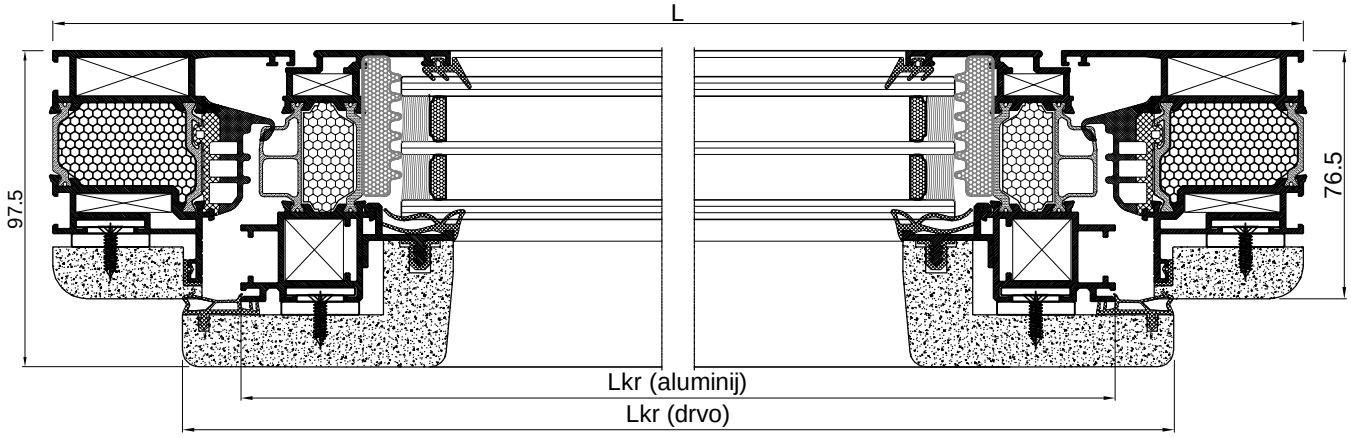


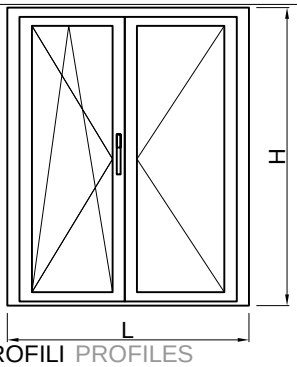


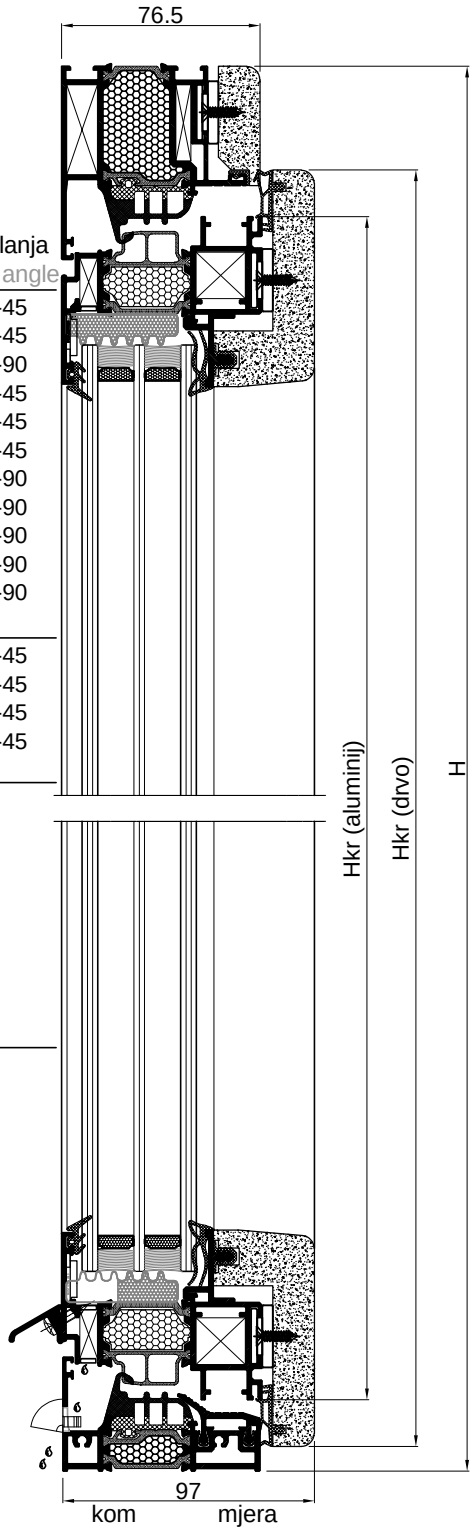


			kom	mjera	kut pilanja
PROFILI PROFILES			pcs	dimension	sawing angle
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0401F	Profil praga	Threshold profile	1	Lpr=L-87.4	90-90
FT-0410F	Horizontala krila	Hor. sash	4	Lkr=L/2-79	45-45
FT-0410F	Vertikala krila	Vert. sash	4	Hkr=H-85.5	45-45
FT-0421F	Profil kombatute	Flying mullion	1	Hk=Hkr-47	45-45
F-1350	Horizontalna lajsna	Horizontal bead	4	Hl=Lkr-83	90-90
F-1350	Vertikalna lajsna	Vertical bead	4	Hl=Hkr-131	90-90
F-1353	Profil na pragu	Profile on threshold	1	Lpp=-87.4	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-45	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr+32	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.008	Horizontala krila	Hor. sash	4	Lkr=L/2-43	45-45
600.008	Vertikala krila	Vert. sash	4	Hkr=H-49.5	45-45
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	2		
710.163	Kutna spojnica okvira	Frame corner bracket	2		
730.002	Kutna spojnica okvira	Frame corner bracket	2		
373.031	PVC kutni umetak rama	PVC corner bracket for frame	2		
710.165	Kutna spojnica krila	Sash corner bracket	8		
710.129	Kutna spojnica krila	Sash corner bracket	8		
730.001	Kutna spojnica krila	Sash corner bracket	8		
731.010	Kutna spojnica krila	Sash corner bracket	8		
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket		2L+3H	
344.112	Brtva u krilu	Gasket in sash		2L+4H	
344.046	Brtva u ramu	Gasket in frame		2L+2H	
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		2L+4H	
344.049	Brtva uz staklo/unutarnja	Glazing gasket/interior		2L+4H	
328.002	Brtva uz staklo/vanjska	Glazing gasket/exterior		2L+4H	
344.047	Brtva uz profil kombatute	Gasket along the flying mullion profile	H		
327.002	Brtva u profilu kombatute (vani)	Gasket in the flying mullion profile (outside)	H		
368.003	Kutni umetak za centralnu brtvu	Corner insert	4		
340.013	Ispuna ispod stakla	Insulation around the glass		2L+4H	
365.049	Čep kombatute	Insert for the flying mullion	2		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	20		
370.002	PVC podmetač 7 mm	PVC glazing packer 7 mm	20		
373.002	Umetak profila okapnice	End insert for drip profile	4		
370.070	Maska za drenažni otvor	Mask for drainage hole	4		
375.050	PVC kopča	PVC clamp	(4L+6H)/250		

		kom	mjera
STAKLO GLASS		pcs	dimension
44 mm		2	Lkr(drvo) - 135 x Hkr(drvo) - 135

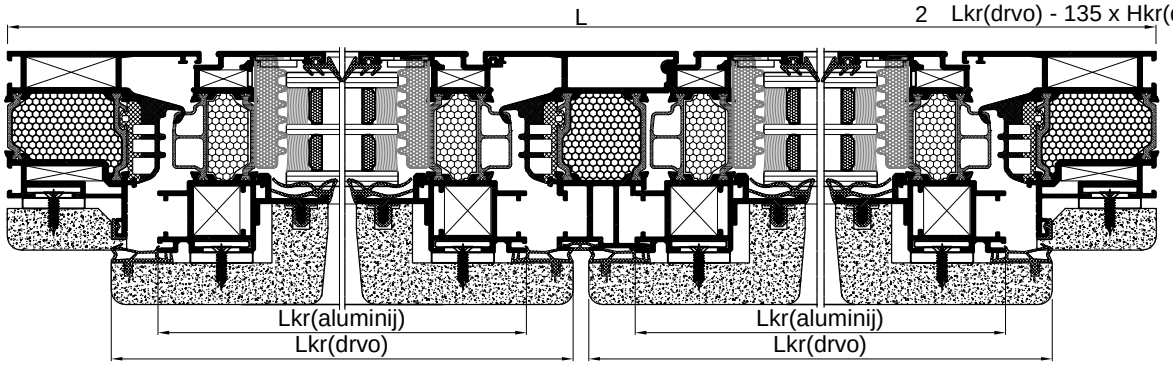





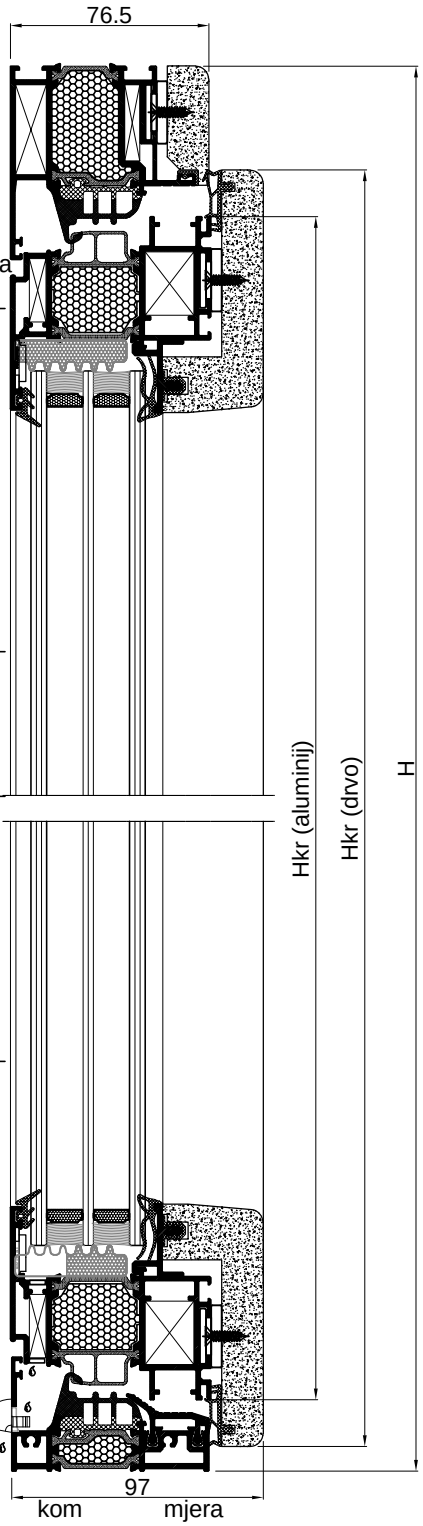


			kom	mjera	kut pilanja
PROFILI PROFILES			pcs	dimension	sawing
FT-0400F	Horizontala okvira	Hor. frame	1	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	90-45
FT-0401F	Profil praga	Threshold profile	1	Lpr=L-87.4	90-90
FT-0411F	Horizontala krila	Hor. sash	4	Lkr=L/2-79	45-45
FT-0411F	Vertikala krila	Vert. sash	4	Hkr=H-85.5	45-45
FT-0421F	Profil kombatute	Flying mullion	1	Hk=Hkr-47	45-45
F-1350	Horizontalna lajsna	Horizontal bead	4	Ll=Lkr-103	90-90
F-1350	Vertikalna lajsna	Vertical bead	4	Hl=Hkr-151	90-90
F-1353	Profil na pragu	Profile on threshold	1	Lpp=L-87.4	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-45	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr+32	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	1	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.009	Horizontala krila	Hor. sash	4	Lkr=L/2-43	45-45
600.009	Vertikala krila	Vert. sash	4	Hkr=H-49.5	45-45
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	2		
710.163	Kutna spojnica okvira	Frame corner bracket	2		
730.002	Kutna spojnica okvira	Frame corner bracket	2		
373.031	PVC kutni umetak rama	PVC corner bracket for frame	2		
710.165	Kutna spojnica krila	Sash corner bracket	8		
710.129	Kutna spojnica krila	Sash corner bracket	8		
730.001	Kutna spojnica krila	Sash corner bracket	8		
731.010	Kutna spojnica krila	Sash corner bracket	8		
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket		2L+3H	
344.112	Brtva u krilu	Gasket in sash		2L+4H	
344.046	Brtva u ramu	Gasket in frame		2L+2H	
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		2L+4H	
344.049	Brtva uz staklo/unutarnja	Glazing gasket/interior		2L+4H	
328.002	Brtva uz staklo/vanjska	Glazing gasket/exterior		2L+4H	
344.047	Brtva uz profil kombatute	Gasket along the flying mullion profile		H	
327.002	Brtva u profilu kombatute (vani)	Gasket in the flying mullion profile (outside)		H	
368.003	Kutni umetak za centralnu brtvu	Corner insert	4		
340.013	Ispuna ispod stakla	Insulation around the glass		2L+4H	
365.049	Čep kombatute	Insert for the flying mullion	2		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	20		
370.002	PVC podmetač 7 mm	PVC glazing packer 7 mm	20		
373.002	Umetak profila okapnice	End insert for drip profile	4		
370.070	Maska za drenažni otvor	Mask for drainage hole	4		
375.050	PVC kopča	PVC clamp	(4L+6H)/250		

STAKLO GLASS	kom pcs	mjera dimension
44 mm	2	Lkr(drvo) - 155 x Hkr(drvo) - 155

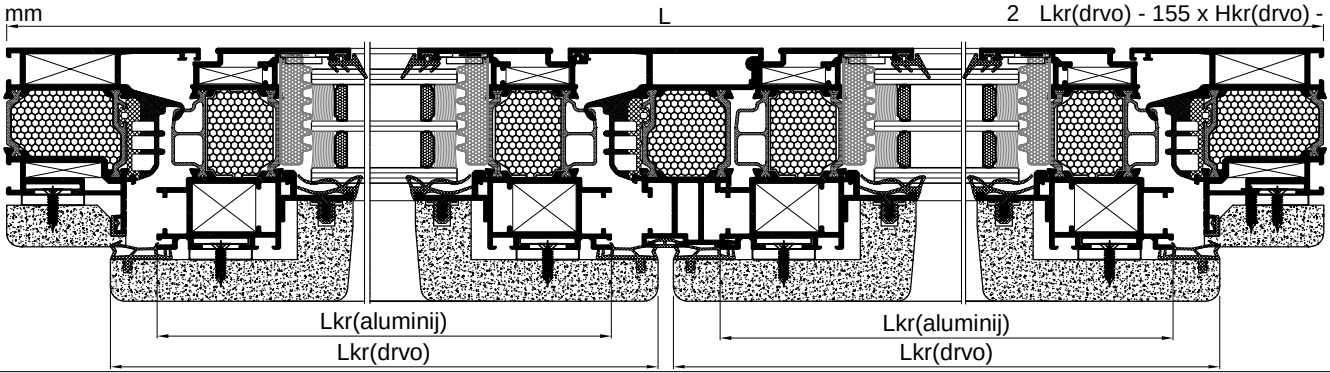





			kom	mjera	kut pilanja
PROFILI PROFILE			pcs	dimension	sawing angle
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0410F	Horizontala krila	Hor. sash	4	Lkr=L/2-79	45-45
FT-0410F	Vertikala krila	Vert. sash	4	Hkr=H2-89	45-45
FT-0410F	Horizontala nadsvjetla	Hor. part of top light	2	Lsv=L-116	45-45
FT-0410F	Vertikala nadsvjetla	Vert. part of top light	2	Hsv=H1-89	45-45
FT-0421F	Kombatuta	Flying mullion	1	Hk=Hkr-47	45-45
FT-0420F	Prečka	Transom	1	Lpr=L-104.4	90-90
F-1350	Horizontalna lajsna	Horizontal bead - sash	4	Llkr=Lkr-83	90-90
F-1350	Vertikalna lajsna	Vertical bead - sash	4	Hlkr=Hkr-131	90-90
F-1350	Horizontalna lajsna	Horizontal bead - top light	2	Llsv=Lsv-83	90-90
F-1350	Vertikalna lajsna	Vertical bead - top light	2	Hlsv=Hsv-131	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr+32	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.008	Horizontala krila	Hor. sash	4	Lkr=L/2-43	45-45
600.008	Vertikala krila	Vert. sash	4	Hkr=H2-53	45-45
600.008	Horizontala nadsvjetla	Horiz. part of top light	2	Lsv=L-80	45-45
600.008	Vertikala nadsvjetla	Vert. part of top light	2	Hsv=H1-53	45-45
600.007	Prečka	Transom	1	Lpr=L-92.2	90-90
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	4		
710.163	Kutna spojnica okvira	Frame corner bracket	4		
730.002	Kutna spojnica okvira	Frame corner bracket	4		
373.031	PVC kutni umetak rama	PVC corner bracket for frame	4		
375.051	PVC umetak rama	PVC bracket for frame	2		
710.165	Kutna spojnica krila	Sash corner bracket	12		
710.129	Kutna spojnica krila	Sash corner bracket	12		
730.001	Kutna spojnica krila	Sash corner bracket	12		
731.010	Kutna spojnica krila	Sash corner bracket	12		
	Otklopno zaokretni okov ROTO NT-A	Tilt and turn hardware ROTO NT-A			
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket		4L+2H+H2	
344.112	Brtva u krilu	Gasket in sash		4L+2H+2H2	
344.046	Brtva u ramu	Gasket in frame		4L+2H	
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		5L+2H+2H2	
344.049	Brtva uz staklo	Glazing gasket		4L+2H+2H2	
328.002	Brtva uz staklo	Glazing gasket		4L+2H+2H2	
344.047	Brtva uz profil kombatute	Gasket along flying mullion		H2	
340.013	Ispuna ispod stakla	Insulation around the glass		4L+2H+2H2	
365.049	Čep kombatute	Insert for the flying mullion	2		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	14		
370.002	PVC podmetač 7 mm	PVC glazing packer 7 mm	14		
373.002	Umetak profila okapnice	End insert for drip profile	4		
370.070	Maska za drenažni otvor	Mask for drainage hole	4		
375.050	PVC kopča	PVC clamp	(6L+4H+2H2)/250		
368.003	Kutni umetak za centralnu brtvu	Corner insert	8		

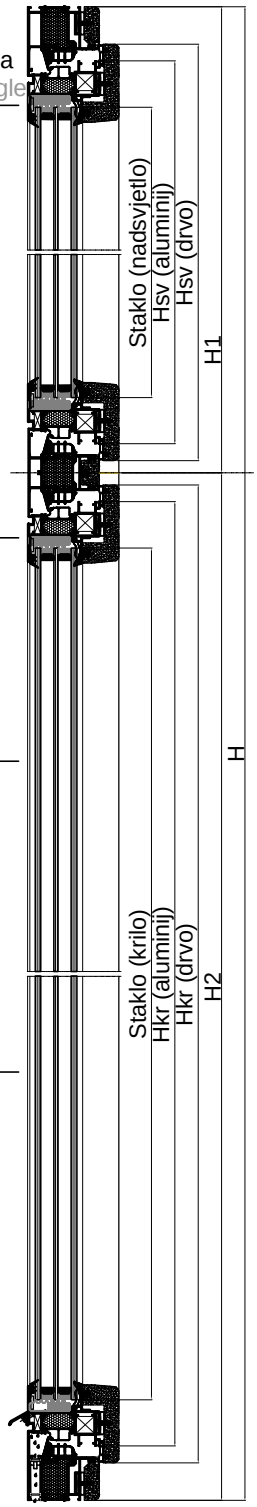


STAKLO GLASS


44 mm	2	Lkr(drvo) - 135 x Hkr(drvo) - 135	
44 mm	1	Lsv(drvo) - 135 x Hsv(drvo) - 135	

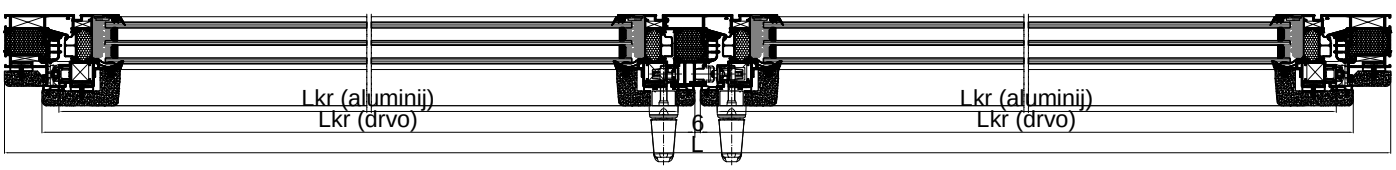


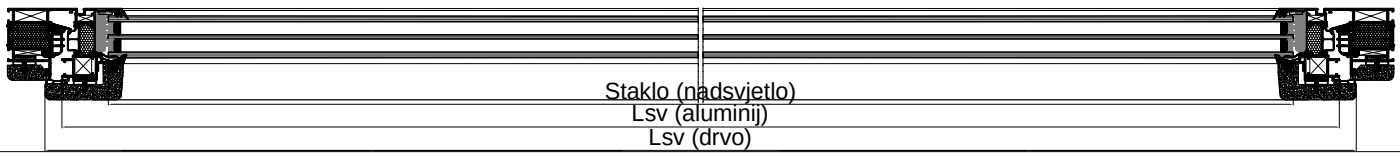




			kom pcs	mjera measure	kut pilanja sawing angle
PROFILI PROFILE					
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0410F	Horizontala krila	Hor. sash	4	Lkr=L/2-79	45-45
FT-0410F	Vertikala krila	Vert. sash	4	Hkr=H2-89	45-45
FT-0421F	Kombatuta	Flying mullion	1	Hk=Hkr-47	45-45
FT-0420F	Prečka	Transom	1	Lpr=L-104.4	90-90
F-1350	Horizontalna lajsna-krilo	Horizontal bead-sash	4	Llkr=Lkr-83	90-90
F-1350	Vertikalna lajsna-krilo	Vertical bead-sash	4	Hlkr=Hkr-131	90-90
F-1350	Horiz. lajsna-prečka	Horizontal bead-top light	1	Llsv=L-104.5	90-90
F-1350	Horiz. lajsna-ram	Horizontal bead-frame	1	Llsv=L-104.5	90-90
F-1350	Vertikalna lajsna-ram	Vertical bead-frame	2	Hlsv=H1-121	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr+32	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
DRVENE OBLOGE WOODEN COVERINGS					90-90
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.008	Horizontala krila	Hor. sash	4	Lkr=L/2-43	45-45
600.008	Vertikala krila	Vert. sash	4	Hkr=H2-53	45-45
600.006	Horizontala nadsvjetla	Horizontal part of top light	2	Lsv=L-92	45-45
600.006	Vertikala nadsvjetla	Vertical part of top light	2	Hsv=H1-65	45-45
600.007	Prečka	Transom	1	Lpr=L-92.2	90-90
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	4		
710.163	Kutna spojnica okvira	Frame corner bracket	4		
730.002	Kutna spojnica okvira	Frame corner bracket	4		
373.031	PVC kutni umetak rama	PVC corner bracket for frame	4		
375.051	PVC umetak rama	PVC bracket for frame	2		
710.165	Kutna spojnica krila	Sash corner bracket	8		
710.129	Kutna spojnica krila	Sash corner bracket	8		
730.001	Kutna spojnica krila	Sash corner bracket	8		
731.010	Kutna spojnica krila	Sash corner bracket	8		
	Otklopno zaokretni okov ROTO NT-A	Tilt and turn hardware ROTO NT-A			
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket		2L+3H2	
344.112	Brtva u krilu	Gasket in sash		2L+4H2	
344.046	Brtva u ramu	Gasket in frame		4L+2H	
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		5L+2H+2H2	
344.049	Brtva uz staklo	Glazing gasket		4L+2H+2H2	
328.002	Brtva uz staklo	Glazing gasket		4L+2H+2H2	
344.047	Brtva uz profil kombatute	Gasket along flying mullion		H2	
340.013	Ispuna ispod stakla	Insulation around the glass		4L+2H+2H2	
365.049	Čep kombatute	Insert for the flying mullion	2		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	14		
370.002	PVC podmetač 7 mm	PVC glazing packer 7 mm	14		
373.002	Umetak profila okapnice	End insert for drip profile	4		
370.070	Maska za drenažni otvor	Mask for drainage hole	4		
375.050	PVC kopča	PVC clamp	(6L+4H+2H2)/250		
368.003	Kutni umetak za centralnu brtvu	Corner insert	8		
STAKLO GLASS					
44 mm			2	Lkr(drvo) - 135 x Hkr(drvo) - 135	
44 mm			1	Lsv(drvo) - 27 x Hsv(drvo) - 27	

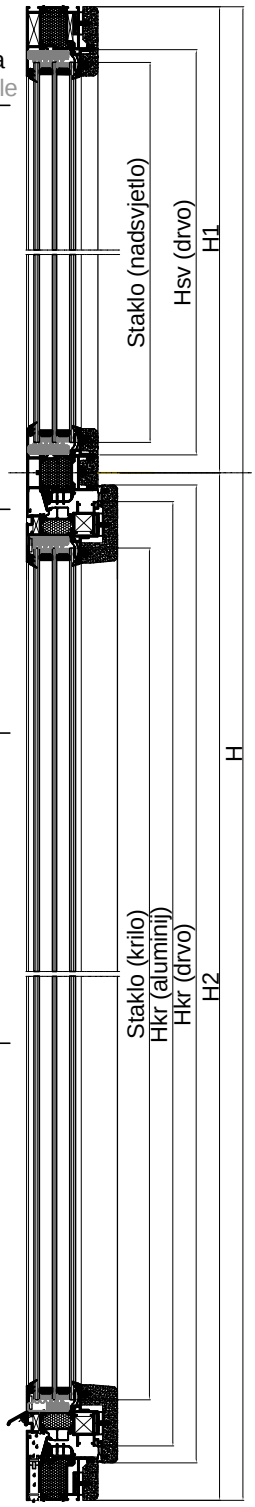

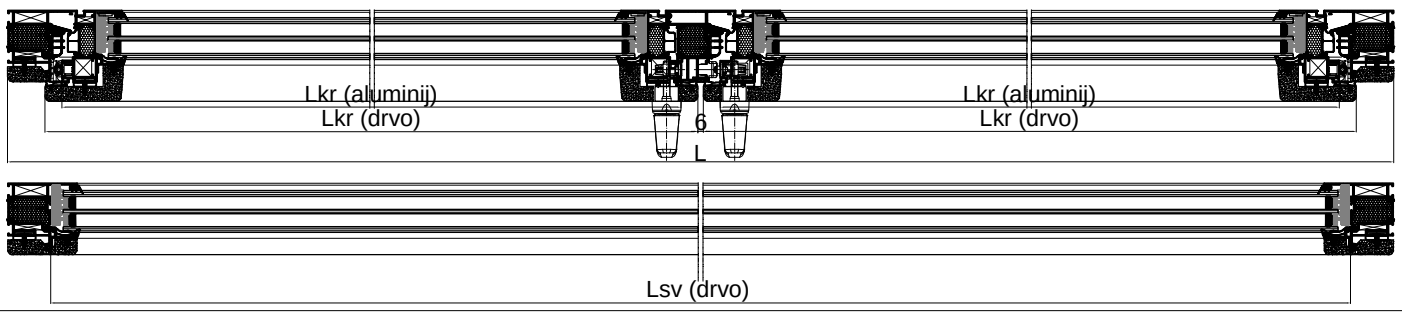


PROFILI	PROFILES		mjera dimension	kom. pcs.	pilanje sawing angle
FT-0404F	Horizontala okvira	Hor. frame	L	1	45-45
FT-0404F	Vertikala okvira	Vert. frame	H	2	45-90
FT-0412F	Horizontala krila	Hor. sash	L-141	2	45-45
FT-0412F	Vertikala krila	Vert. sash	H-98	2	45-45
FT-0422F	Prag	Threshold	L-117	1	90-90
F-1596	Okapnica	Drip cap profile	Lkr-67	1	90-90
F-1350	Staklo lajsna	Glazing bead	Lkr-138	2	90-90
F-1350	Staklo lajsna	Glazing bead	Hkr-186	2	90-90
DRVENE OBLOGE	WOODEN COVERINGS				
600.037	Horizontala okvira	Hor. frame	L	1	45-45
600.037	Vertikala okvira	Vert. frame	H	2	45-90
600.022	Horizontala krila	Hor. sash	L-107	2	45-45
600.022	Vertikala krila	Vert. sash	H-64	2	45-45
OKOVI	HARDWARE				
710.141	Kutna spojnica	Corner bracket		2	
710.540	Kutna spojnica	Corner bracket		2	
710.169	Kutna spojnica	Corner bracket		4	
710.542	Kutna spojnica	Corner bracket		4	
730.001	Kutna spojnica	Corner bracket		2	
122.015	Brava G-U Secury MR2 (45) s tri ključanja	Multipoint lock - G-U Secury MR2 (45)		1	
122.065	Prihvatna pločica 24x6x2	Striking plate 24x6x2		2	
122.063	Prihvatni lim 24x6 (desni)	Striking plate 24x6 (right)		1	
115.016 *	Skrivena šarka	Concealed door hinge		1	
521.507	Kontraploča (2 po šarki)	Counterplate (2 per hinge)		1	
102.028	Ručka za vrata	Door handle		1	
102.030	Rukohvat	Push/ pull handle		1	
122.089	Cilindar (60-75)	Cylinder (60-75)		1	
122.098	Štitnik cilindra	Cylinder rosette		1 par	
BRTVE I DODATCI	GASKETS AND ACCESSORIES				
338.004	Centr. brtva rama	Cent. gasket-frame	1L+2H		
338.006	Centr. brtva krila	Cent. gasket-sash	2Lkr+2Hkr		
328.006	Brtva	Rebate gasket	1L+2H		
331.013	Brtva praga	Threshold gasket	L-117	1	90-90
347.003	Četkica 7x9	Brush seal 7x9	Lkr-48	1	90-90
344.112	Brtva	Gasket	2L+2H		
344.049	Brtva	Gasket	2Lkr+2Hkr		
344.045	Brtva	Gasket	2Lkr+2Hkr		
344.046	Brtva	Gasket	L+2H		
363.093	K. umetak za c. brtvu	Corner insert for c. gasket		2	
363.094	K. umetak za c. brtvu	Corner insert for c. gasket		4	
375.050	PVC kopča	PVC clamp	(4Lkr+L+4Hkr+2H)/250		
373.057	Čep okapnice F-1596	End cap for F-1596		1 par	


PANEL	PANEL	
Vanjski lim panela 3 mm	Exterior sheet 3 mm	(L-170)x(H-116)
Unutarnji lim panela	Interior sheet 3 mm	(L-297)x(H-254)
Stirodur (ispuna panela 60 mm)	Stirodur (panel 60 mm)	(L-297)x(H-254)

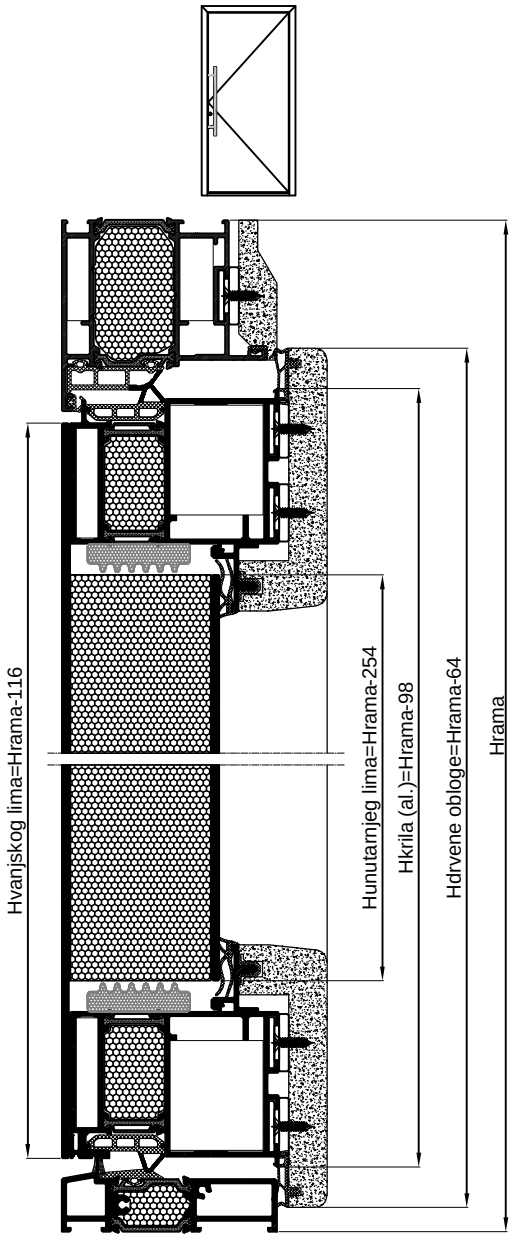


* 2 ili 3 po krilu ovisno o visini i tež.krila
2 or 3 per sash(depending on the height and weight of the sash)

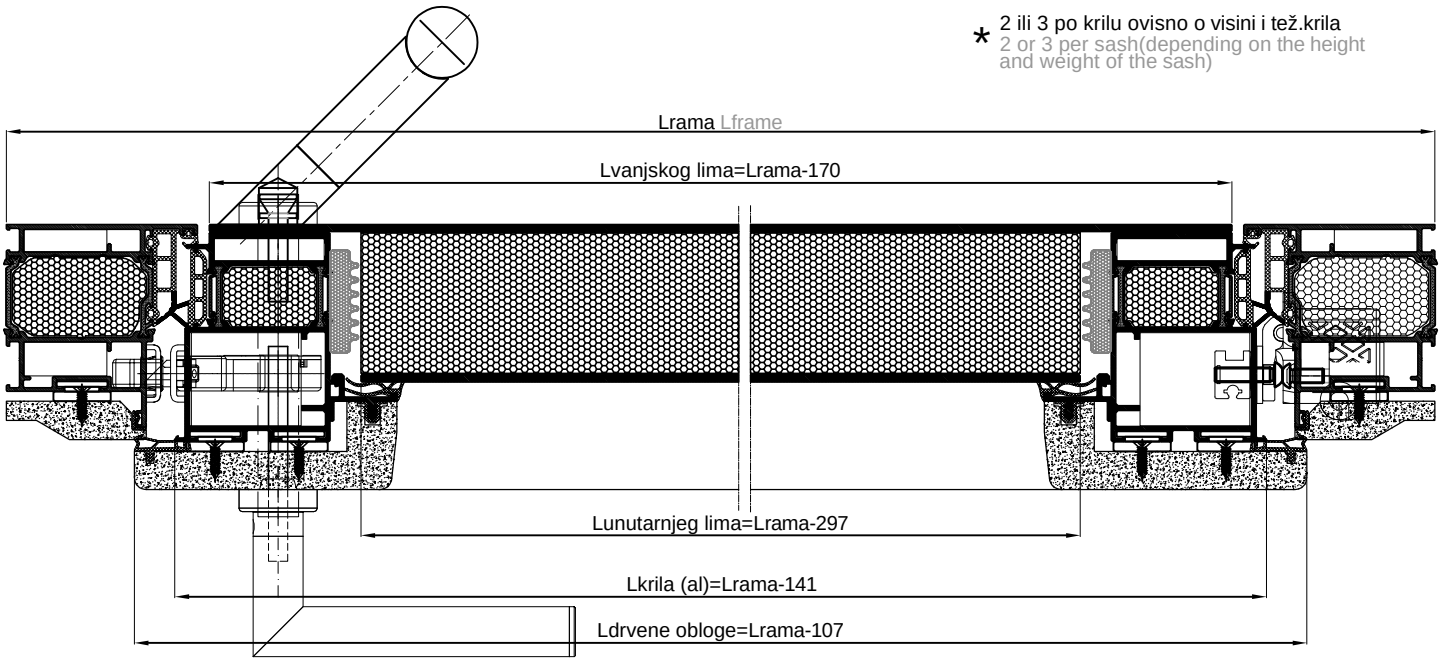



PROFILI	PROFILES		mjera dimension	kom. pcs.	pilanje sawing angle
FT-0403F	Horizontala okvira	Hor. frame	L	1	45-45
FT-0403F	Vertikala okvira	Vert. frame	H	2	45-90
FT-0412F	Horizontala krila	Hor. sash	L-Lpreč.-103	2	45-45
FT-0412F	Vertikala krila	Vert. sash	H-92	2	45-45
FT-0422F	Prag	Threshold	L-Lpreč-79	1	90-90
FT-0423F	Prečka	Transom	Lpreč-61	1	90-90
FT-0423F	Prečka	Transom	H-44	1	90-90
F-1596	Okapnica	Drip cap profile	Lkr-67	1	90-90
F-1699	Al. profil	Al. profile	L-Lpreč-65	1	45-45
F-1699	Al. profil	Al. profile	H-45.5	2	45-90
F-1350	Staklo lajsna	Glazing bead	Lkr(al)-138	2	90-90
F-1350	Staklo lajsna	Glazing bead	Hkr-186	2	90-90
F-1350	Staklo lajsna	Glazing bead	Lpreč.-75	2	90-90
F-1350	Staklo lajsna	Glazing bead	H-171	2	90-90
F-1543	Al. umetak	Additional profile	Lpreč.-72	2	90-90
F-1543	Al. umetak	Additional profile	H-207	2	90-90
F-0341	Al. umetak	Additional profile	Lpreč.-67.5	1	90-90
DRVENE OBLOGE	WOODEN COVERINGS				
600.032	Horizontala okvira	Hor. frame	L	1	45-45
600.032	Vertikala okvira	Vert. frame	H	2	45-90
600.022	Horizontala krila	Hor. sash	L-Lpreč.-69	2	45-45
600.022	Vertikala krila	Vert. sash	H-58	2	45-45
600.025	Vert. prečka	Mullion	H-53	2	90-90
600.025	Horiz. prečka	Transom	Lpreč.-79.5	2	90-90
600.023	Horiz. lajsna fiks.	Hor. bead fix.	Lpreč.-79	2	45-45
600.023	Vert. lajsna fiks.	Vert. bead fix.	H-127	2	45-45
600.026	Obloga fiks.	Covering of fix.	Lpreč.-79	1	90-90
OKOVI	HARDWARE				
710.545	Kutna spojnica	Corner bracket		2	
710.173	Kutna spojnica	Corner bracket		2	
710.542	Kutna spojnica	Corner bracket		4	
710.169	Kutna spojnica	Corner bracket		4	
730.001	Kutna spojnica	Corner bracket		2	
710.079	Veznik	T bracket		6	
710.546	Veznik	T bracket		3	
122.015	Brava G-U Secury MR2 (45) s tri ključanja	Multipoint lock - G-U Secury MR2 (45)		1	
122.065	Prihvatna pločica 24x6x2	Striking plate 24x6x2		2	
122.063	Prihvatni lim 24x6 (desni)	Striking plate 24x6 (right)		1	
115.016 *	Skrivena šarka	Concealed door hinge			
521.508	Kontrapločica (2 po šarki)	Counterplate (2 per hinge)			
102.028	Ručka za vrata	Door handle		1	
102.030	Rukohvat	Push/ pull handle		1	
122.089	Cilindar (60-75)	Cylinder (60-75)		1	
122.098	Štitnik cilindra	Cylinder rosette		1 par	
BRTVE I DODATCI	GASKETS AND ACCESSORIES				
338.004	Centr. brtva rama	Cent. gasket-frame	L-Lprečke+2MH		
338.006	Centr. brtva krila	Cent. gasket-sash	2Lkr+2Hkr		
328.006	Brtva	Rebate gasket	L-Lprečke+2MH		
331.013	Brtva praga	Threshold gasket	L-Lpreč.-79	1	90-90
347.003	Četkica 7x9	Brush seal 7x9	Lkr-48	1	90-90
375.050	PVC kopča	PVC clamp	(4Lkr+L+4Hkr+2H)/250		
373.057	Čep okapnice F-1596	End cap for F-1596		1 par	
374.043	Umetak na ramu	Add. pvc profile	L-Lpreč.-61	1	45-45
374.043	Umetak na ramu	Add. pvc profile	H-44	2	45-90
344.112	Brtva	Gasket	2Lkr(dr)+2Hkr(dr)		
344.049	Brtva	Gasket	2Lkr+2Hkr+2Lpreč+2Hpreč		
344.045	Brtva	Gasket	3Lpreč.+2Lkr+3H+2Hkr		
344.046	Brtva	Gasket	1L+2Lpreč+1(ML-Lpreč.)+6H		
363.093	K. umetak za c. brtvu	Corner insert for c. gasket		2	
363.094	K. umetak za c. brtvu	Corner insert for c. gasket		4	



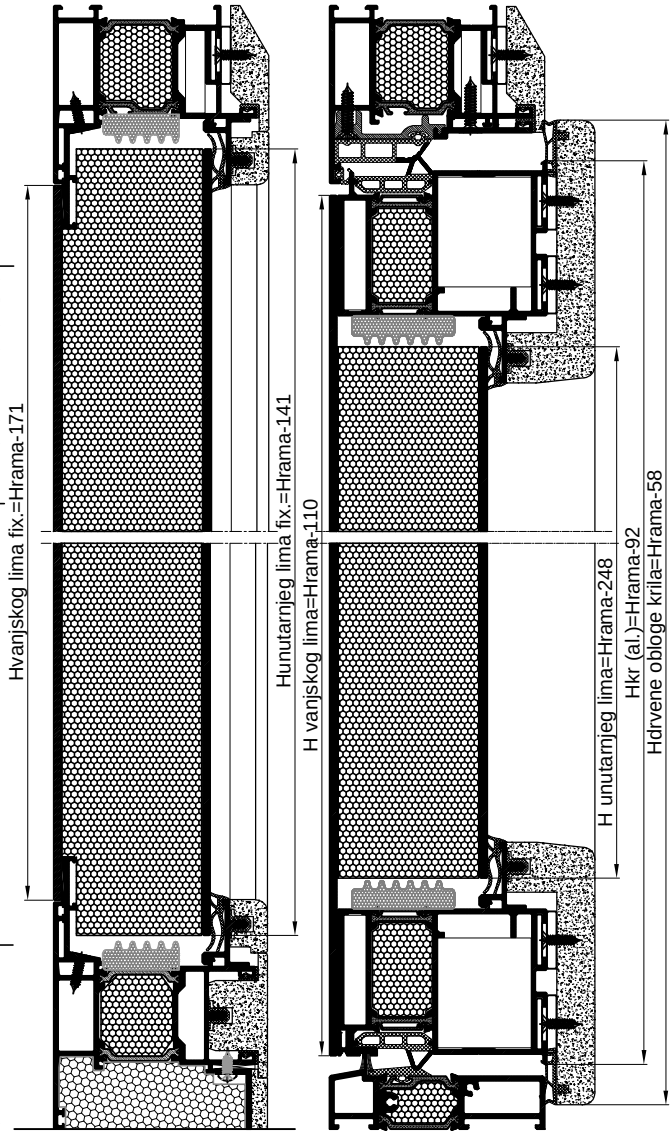

* 2 ili 3 po krilu ovisno o visini i tež.krila
2 or 3 per sash(depending on the height and weight of the sash)

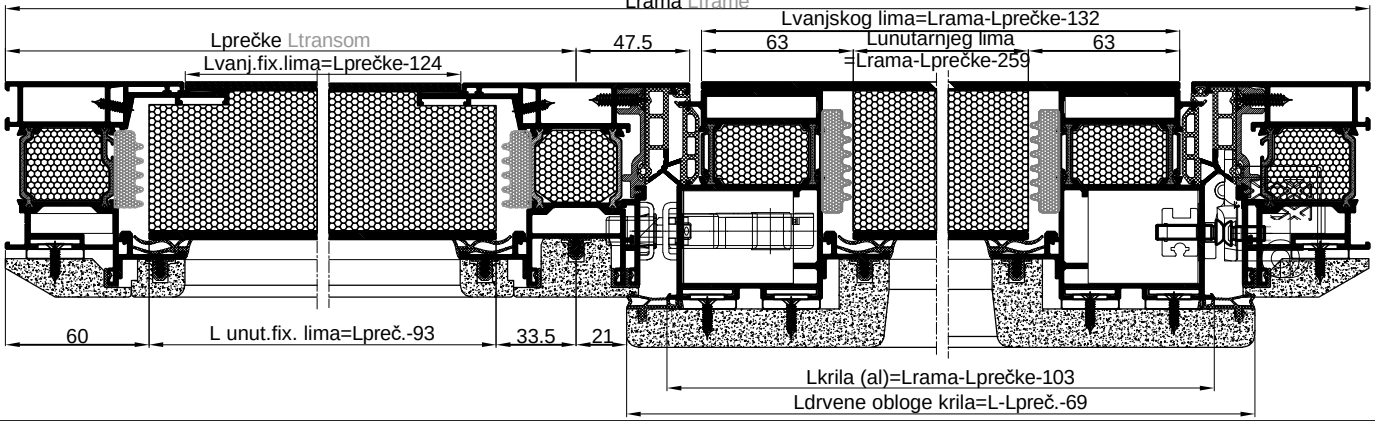




PROFILI	PROFILES		mjera measure	kom pcs	kut pilanja sawing angle
FT-0404F	Horizontala okvira	Hor. frame	L	1	45-45
FT-0404F	Vertikala okvira	Vert. frame	H	2	90-45
FT-0422F	Profil praga	Threshold profile	Lpr=L-117	1	90-90
FT-0413F	Horizontala krila	Hor. sash	Lkr=L-141	2	45-45
FT-0413F	Vertikala krila	Vert. sash	Hkr=H-98	2	45-45
F-1350	Horizontalna lajsna	Horizontal bead	Ll=Lkr-138	2	90-90
F-1350	Vertikalna lajsna	Vertical bead	Hl=Hkr-186	2	90-90
F-1200	Okapnica	Drip profile	Lok=Lkr-33	1	90-90
DRVENE OBLOGE	WOODEN COVERINGS				
600.037	Horizontala okvira	Hor. frame	L	1	45-45
600.037	Vertikala okvira	Vert. frame	H	2	90-45
600.022	Horizontala krila	Hor. sash	Lkr=L-108	2	45-45
600.022	Vertikala krila	Vert. sash	Hkr=H-64	2	45-45


OKOVI	HARDWARE			
710.540	Kutna spojnica okvira	Frame corner bracket	2	
710.141	Kutna spojnica okvira	Frame corner bracket	2	
710.542	Kutna spojnica krila	Sash corner bracket	4	
710.169	Kutna spojnica krila	Sash corner bracket	4	
731.010	Kutna spojnica krila	Sash corner bracket	4	
122.015	Brava G-U Secury MR2 (45) s tri ključanja	Multipoint lock - G-U Secury MR2 (45)	1	
122.065	Prihvatna pločica 24x6x2	Striking plate 24x6x2	2	
122.063	Prihvatni lim 24x6 (desni)	Striking plate 24x6 (right)	1	
115.016	Skrivena šarka *	Concealed door hinge		
521.507	Kontrapločica (2 po šarki)	Counterplate (2 per hinge)		
102.028	Ručka za vrata	Door handle	1	
102.030	Rukohvat	Push/ pull handle	1	
122.089	Cilindar (60-75)	Cylinder (60-75)	1	
122.098	Štitnik cilindra	Cylinder rosette	1	par

BRTVE I DODATCI	GASKETS AND ACCESSORIES			
338.004	Centralna brtva rama	Central gasket-frame	L+2H	
338.006	Centralna brtva krila	Central gasket-sash	2L+2H	
328.006	Brtva na spoju rama i krila	Rebate gasket	2L+2H	
344.049	Brtva prema staklu/unutarnja	Glazing gasket/interior	2L+2H	
328.002	Brtva prema staklu/vanjska	Glazing gasket/exterior	2L+2H	
331.013	Brtva praga	Threshold gasket	L-117	
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead	2L+2H	
344.046	Brtva u ramu	Gasket in frame	2L+2H	
344.112	Brtva u krilu	Gasket in sash	2L+2H	
340.013	Ispuna ispod stakla	Fill under the glass	2L+2H	
347.003	Četkica 7x9	Brush seal 7x9	Lkr-14	1 90-90
375.050	PVC kopča	PVC clamp	(5L+6H)/250	
373.027	Čep okapnice F-1200	End cap for F-1200		1 par
363.093	K. umetak za c. brtvu	Corner insert for c. gasket		2
363.094	K. umetak za c. brtvu	Corner insert for c. gasket		4

STAKLO	GLASS	
58 mm		Lkr(al.) -154 x Hkr(al.) -154

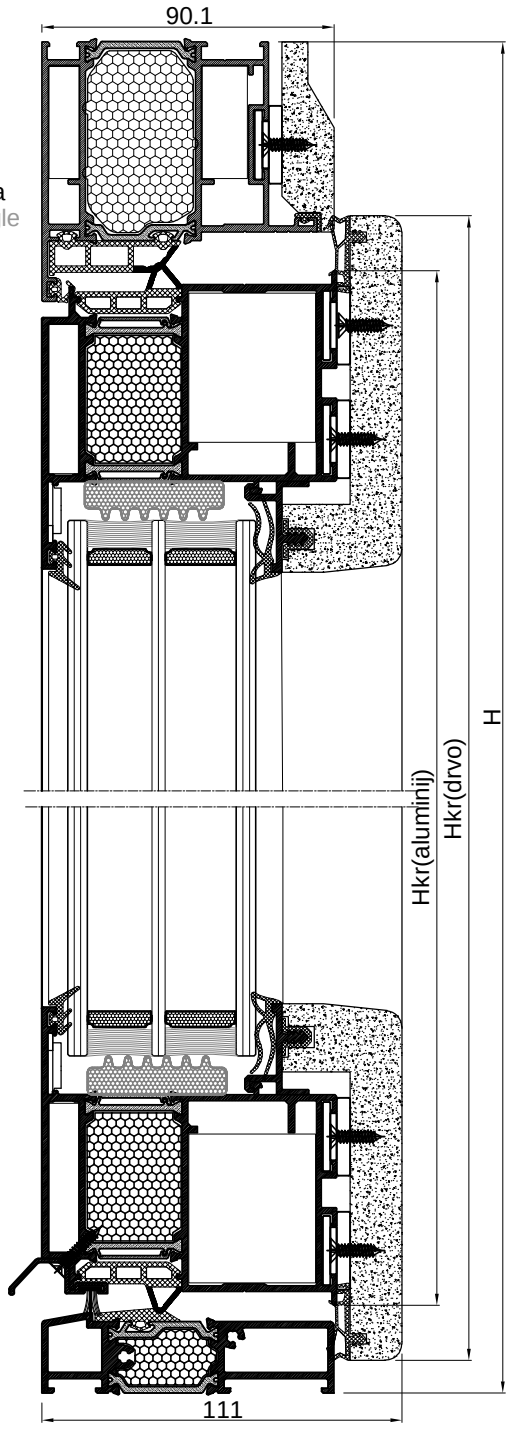



* 2 ili 3 po krilu ovisno o visini i tež.krila
2 or 3 per sash(depending on the height and weight of the sash)

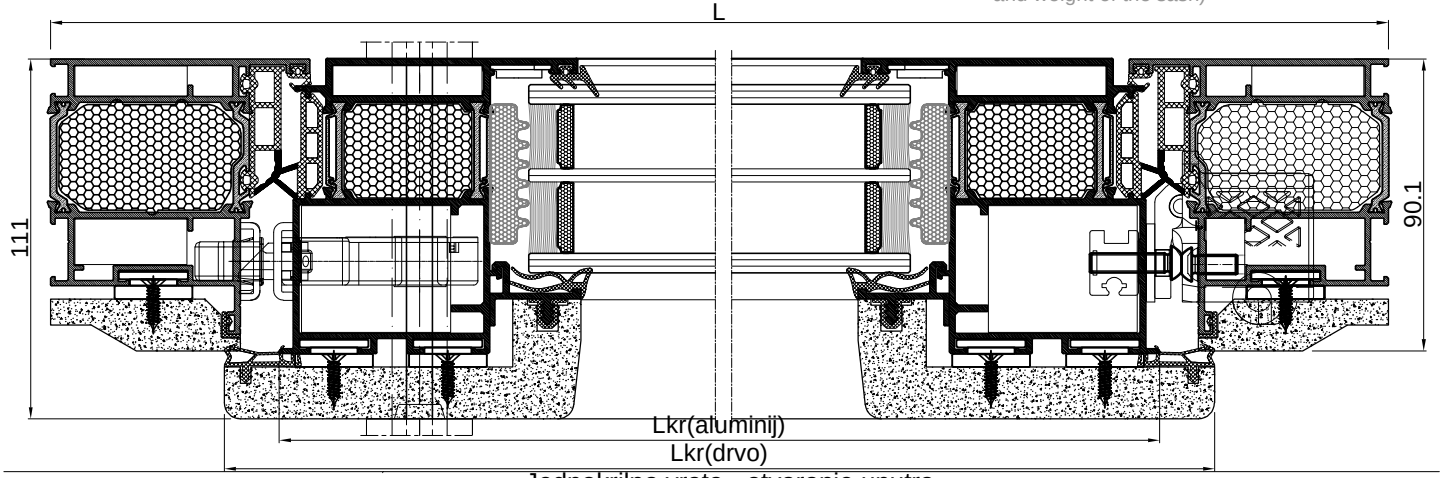


Jednokrilna vrata - otvaranje unutra
Single-leaf door- inward opening


PROFILI	PROFILES		mjera dimension	kom. pcs.	pilanje sawing angle
FT-0403F	Horizontala okvira	Hor. frame	L	1	45-45
FT-0403F	Vertikala okvira	Vert. frame	H	2	45-90
FT-0413F	Horizontala krila	Hor. sash	L-Lpreč.-103	2	45-45
FT-0413F	Vertikala krila	Vert. sash	H-92	2	45-45
FT-0422F	Prag	Threshold	L-Lpreč-79	1	90-90
FT-0423F	Prečka	Transom	Lpreč-61	1	90-90
FT-0423F	Prečka	Transom	H-44	1	90-90
F-1200	Okapnica	Drip cap profile	Lok=Lkr-33	1	90-90
F-1699	Al. profil	Al. profile	L-Lpreč-65	1	45-45
F-1699	Al. profil	Al. profile	H-45.5	2	45-90
F-1350	Staklo lajsna	Glazing bead	Lkr(al)-138	2	90-90
F-1350	Staklo lajsna	Glazing bead	Hkr-186	2	90-90
F-1350	Staklo lajsna	Glazing bead	Lpreč.-75	2	90-90
F-1350	Staklo lajsna	Glazing bead	H-171	2	90-90
F-0341	Al. umetak	Additional profile	Lpreč.-67.5	1	90-90
DRVENE OBLOGE	WOODEN COVERINGS				
600.032	Horizontala okvira	Hor. frame	L	1	45-45
600.032	Vertikala okvira	Vert. frame	H	2	45-90
600.022	Horizontala krila	Hor. sash	L-Lpreč.-69	2	45-45
600.022	Vertikala krila	Vert. sash	H-58	2	45-45
600.025	Vert. prečka	Mullion	H-53	2	90-90
600.025	Horiz. prečka	Transom	Lpreč.-79.5	2	90-90
600.023	Horiz. lajsna fiks.	Hor. bead fix.	Lpreč.-79	2	45-45
600.023	Vert. lajsna fiks.	Vert. bead fix.	H-127	2	45-45
600.026	Obloga fiks.	Covering of fix.	Lpreč.-79	1	90-90
OKOVI	HARDWARE				
710.545	Kutna spojnica	Corner bracket		2	
710.173	Kutna spojnica	Corner bracket		2	
710.542	Kutna spojnica	Corner bracket		4	
710.169	Kutna spojnica	Corner bracket		4	
730.001	Kutna spojnica	Corner bracket		2	
731.010	Kutna spojnica	Corner bracket		4	
710.079	Veznik	T bracket		6	
710.546	Veznik	T bracket		3	
122.015	Brava G-U Secury MR2 (45) s tri ključanja	Multipoint lock - G-U Secury MR2 (45)		1	
122.028	Prihvatna pločica 24x6x2	Striking plate 24x6x2		2	
122.063	Prihvatni lim 24x6 (desni)	Striking plate 24x6 (right)		1	
115.016 *	Skrivena šarka	Concealed door hinge			
521.508	Kontrapločica (2 po šarki)	Counterplate (2 per hinge)			
102.028	Ručka za vrata	Door handle		1	
102.030	Rukohvat	Push/ pull handle		1	
122.089	Cilindar (60-75)	Cylinder (60-75)		1	
122.098	Štitnik cilindra	Cylinder rosette		1 par	
BRTVE I DODATCI	GASKETS AND ACCESSORIES				
338.004	Centr. brtva rama	Cent. gasket-frame	L-Lprečke+2MH		
338.006	Centr. brtva krila	Cent. gasket-sash	2Lkr+2Hkr		
328.006	Brtva	Rebate gasket	L-Lprečke+2MH		
331.013	Brtva praga	Threshold gasket	L-Lpreč.-79	1	90-90
347.003	Četkica 7x9	Brush seal 7x9	Lkr-48	1	90-90
375.050	PVC kopča	PVC clamp	(4Lkr+L+4Hkr+2H)/250		
373.027	Čep okapnice F-1200	End cap for F-1200		1 par	
374.043	Umetak na ramu	Add. pvc profile	L-Lpreč.-61	1	45-45
374.043	Umetak na ramu	Add. pvc profile	H-44	2	45-90
344.112	Brtva	Gasket	2Lkr(dr)+2Hkr(dr)		
344.049	Brtva	Gasket	2Lkr+2Hkr+2Lpreč+2Hpreč		
344.045	Brtva	Gasket	3Lpreč.+2Lkr+3H+2Hkr		
344.046	Brtva	Gasket	1L+2Lpreč+1(ML-Lpreč.)+6H		
363.093	K. umetak za c. brtvu	Corner insert for c. gasket		2	
363.094	K. umetak za c. brtvu	Corner insert for c. gasket		4	



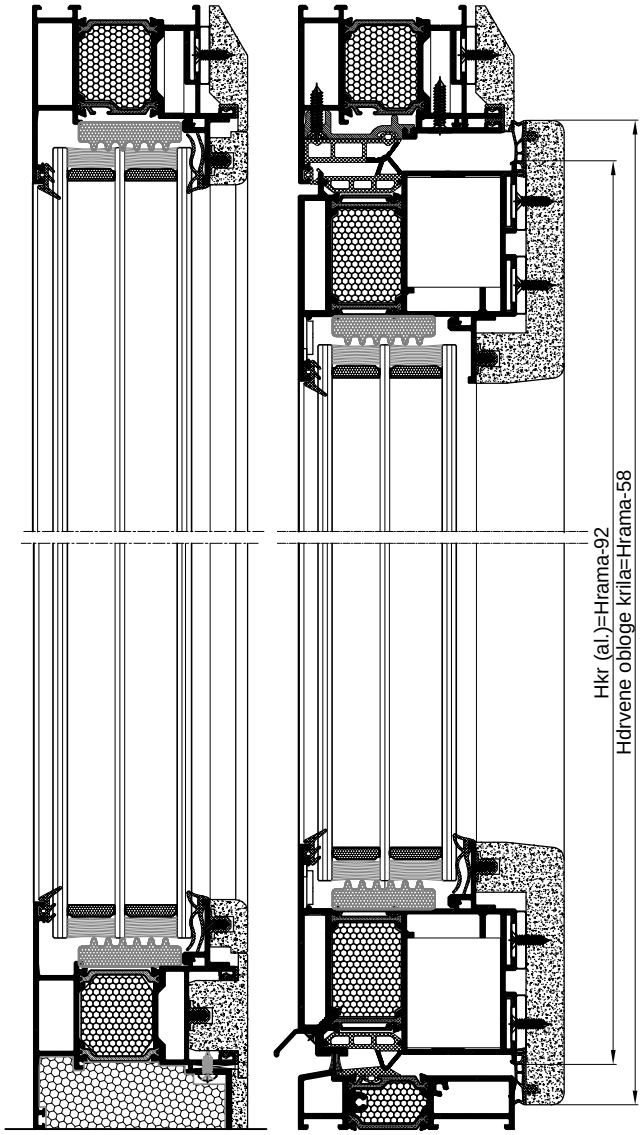


* 2 ili 3 po krilu ovisno o visini i tež.krila
2 or 3 per sash(depending on the height and weight of the sash)

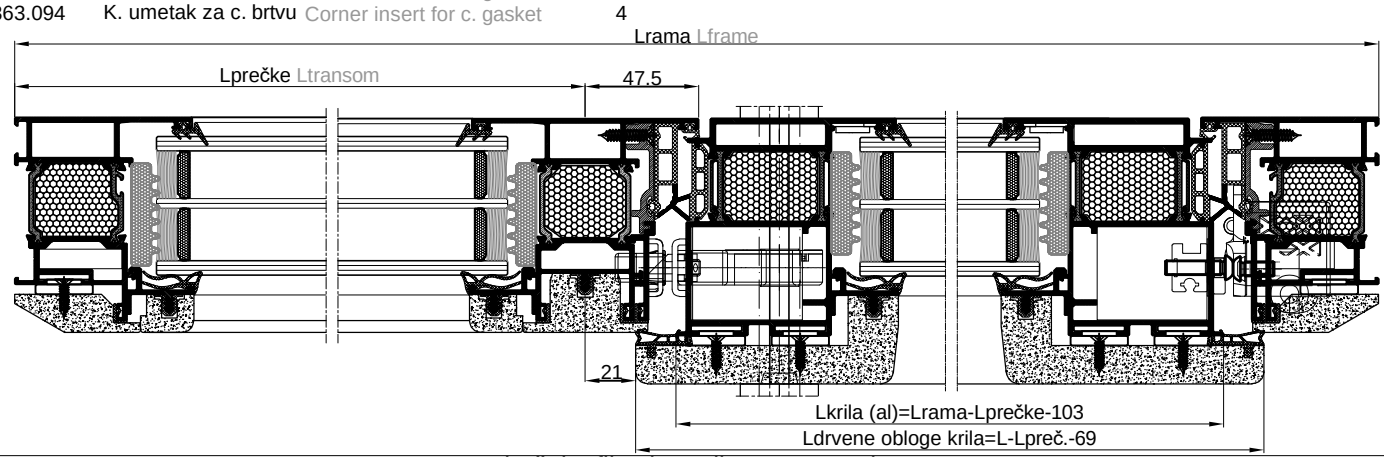





			mjera dimension	kom. pcs.	pilanje sawing angle
PROFILI PROFILES					
FT-0404F	Horizontala okvira	Hor. frame	L	1	45-45
FT-0404F	Vertikala okvira	Vert. frame	H	2	45-90
FT-0412F	Horizontala krila	Hor. sash	L/2-91	4	45-45
FT-0412F	Vertikala krila	Vert. sash	H-98	4	45-45
FT-0422F	Profil praga	Threshold profile	L-117	1	90-90
F-1596	Okapnica	Drip cap profile	Lkr-33	2	90-90
F-1350	Horizontalna lajsna	Horizontal bead	Lkr(aluminij)-138	4	90-90
F-1350	Vertikalna lajsna	Vertical bead	Hkr(aluminij)-186	4	90-90
FT-0424F	Profil kombatute	Flying mullion	Hkr(aluminij)-31	1	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.037	Horizontala okvira	Hor. frame	L	1	45-45
600.037	Vertikala okvira	Vert. frame	H	2	45-90
600.022	Horizontala krila	Hor. sash	L/2-57	4	45-45
600.022	Vertikala krila	Vert. sash	H-64	4	45-45
OKOVI HARDWARE					
710.141	Kutna spojnica	Corner bracket		2	
710.540	Kutna spojnica	Corner bracket		2	
710.169	Kutna spojnica	Corner bracket		8	
710.542	Kutna spojnica	Corner bracket		8	
122.015	Brava G-U Secury MR2 (45) s tri ključanja	Multipoint lock - G-U Secury MR2 (45)		1	
122.082	Brava G-U za pom. krilo (desna)	Lever-operated gear for passive leaf G-U (right)		1	
122.026	Gornji element za nastavljanje	Top shoot bolt unit		1	
122.027	Donji element za nastavljanje	Bottom shoot bolt unit		1	
122.065	Prihvatna pločica gore	Top striking plate		1	
122.080	Prihvatna pločica dolje	Bottom striking plate		1	
115.016 *	Skrivena šarka	Concealed door hinge		1	
521.507	Kontrapločica (2 po šarki)	Counterplate (2 per hinge)			
102.028	Ručka za vrata	Door handle		1	
102.030	Rukohvat	Push/ pull handle		1	
122.089	Cilindar (60-75)	Cylinder (60-75)		1	
122.098	Štitnik cilindra	Cylinder rosette		1 par	
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.004	Centralna brtva rama	Central gasket-frame	1L+3H		
338.006	Centralna brtva krila	Central gasket-sash	4Lkr+3Hkr		
328.006	Brtva na spoju rama i krila	Rebate gasket	1L+3H		
331.013	Brtva praga	Threshold gasket	L-117	1	
347.003	Četkica 7x9	Brush seal 7x9	Lkr(aluminij)-14	2	
344.112	Brtva	Gasket	4L+4H		
344.049	Brtva	Gasket	4Lkr+4Hkr		90-90
344.045	Brtva	Gasket	4Lkr+4Hkr		90-90
344.046	Brtva	Gasket	1L+2H		
373.027	Čep okapnice F-1200	End cap for F-1596		2 para	
373.066	Čep kombatute F-0424F	Insert for the flying mullion F-0424F		1 par	
375.050	PVC kopča	PVC clamp	(10L+8H)/250		
363.093	K. umetak za c. brtvu	Corner insert for c. gasket		2	
363.094	K. umetak za c. brtvu	Corner insert for c. gasket		8	
PANEL PANEL					
Vanjski lim panela 3 mm		Exterior sheet 3 mm	(L/2-120)x(H-116)	2	
Unutarnji lim panela 3 mm		Interior sheet 3 mm	(L/2-247)x(H-254)	2	
Stirodur (ispuna panela 60 mm)		Stirodur (panel 60 mm)	(L/2-247)x(H-254)	2	

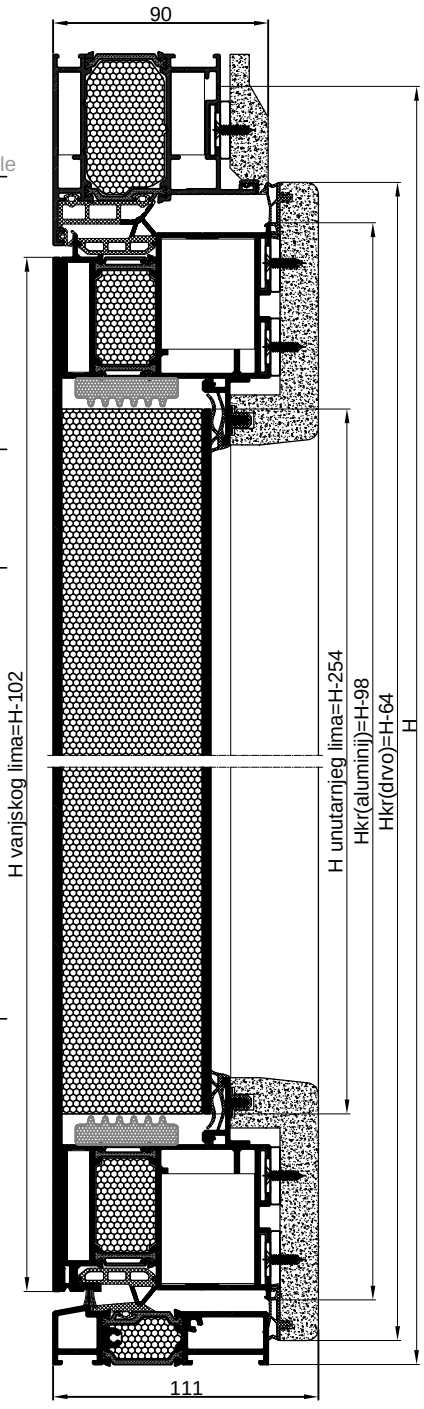


* 2 ili 3 po krilu ovisno o visini i tež.krila
2 or 3 per sash(depending on the height and weight of the sash)

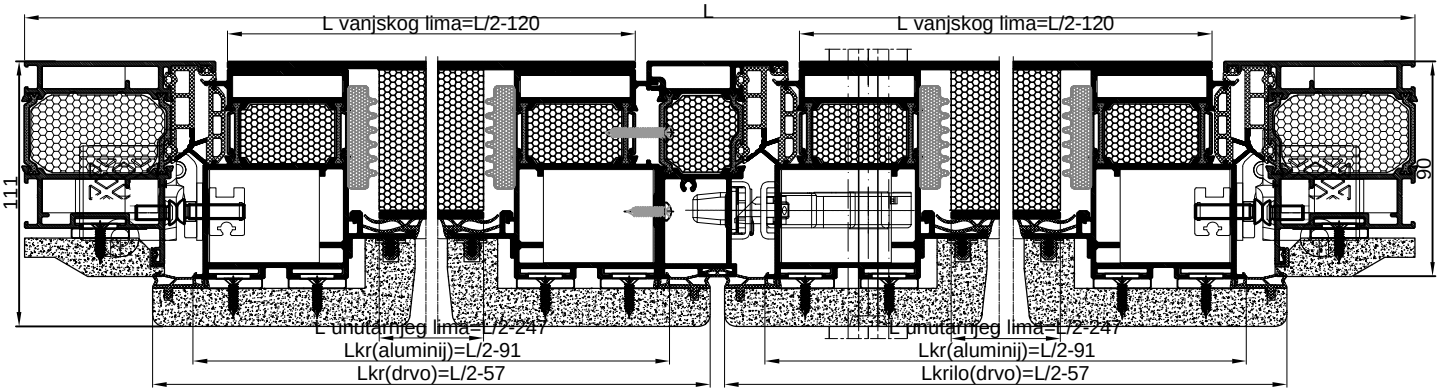






PROFILI	PROFILES		mjera dimension	kom. pcs.	pilanje sawing angle
FT-0404F	Horizontala okvira	Hor. frame	L	1	45-45
FT-0404F	Vertikala okvira	Vert. frame	H	2	45-90
FT-0413F	Horizontala krila	Hor. sash	L/2-91	4	45-45
FT-0413F	Vertikala krila	Vert. sash	H-98	4	45-45
FT-0422F	Profil praga	Threshold profile	L-117	1	90-90
F-1200	Okapnica	Drip cap profile	Lkr-33	2	90-90
F-1350	Horizontalna lajsna	Horizontal bead	Lkr(aluminij)-138	4	90-90
F-1350	Vertikalna lajsna	Vertical bead	Hkr(aluminij)-186	4	90-90
FT-0424F	Profil kombatute	Flying mullion	Hkr(aluminij)-31	1	90-90
DRVENE OBLOGE	WOODEN COVERINGS				
600.037	Horizontala okvira	Hor. frame	L	1	45-45
600.037	Vertikala okvira	Vert. frame	H	2	45-90
600.022	Horizontala krila	Hor. sash	L/2-43	4	45-45
600.022	Vertikala krila	Vert. sash	H-64	4	45-45
OKOVI	HARDWARE				
710.141	Kutna spojnica	Corner bracket		2	
710.540	Kutna spojnica	Corner bracket		2	
710.169	Kutna spojnica	Corner bracket		8	
710.542	Kutna spojnica	Corner bracket		8	
731.010	Kutna spojnica krila	Sash corner bracket		8	
122.015	Brava G-U Secury MR2 (45) s tri ključanja	Multipoint lock - G-U Secury MR2 (45)		1	
122.082	Brava G-U za pom. krilo (desna)	Lever-operated gear for passive leaf G-U (right)		1	
122.026	Gornji element za nastavljanje	Top shoot bolt unit		1	
122.027	Donji element za nastavljanje	Bottom shoot bolt unit		1	
122.065	Prihvatna pločica gore	Top striking plate		1	
122.080	Prihvatna pločica dolje	Bottom striking plate		1	
115.016 *	Skrivena šarka	Concealed door hinge			
521.507	Kontrapločica (2 po šarki)	Counterplate (2 per hinge)			
102.028	Ručka za vrata	Door handle		1	
102.030	Rukohvat	Push/ pull handle		1	
122.089	Cilindar (60-75)	Cylinder (60-75)		1	
124.098	Štitnik cilindra	Cylinder rosette		1	par
BRTVE I DODATCI	GASKETS AND ACCESSORIES				
338.004	Centralna brtva rama	Central gasket-frame	1L+3H		
338.006	Centralna brtva krila	Central gasket-sash	4Lkr+3Hkr		
328.006	Brtva na spoju rama i krila	Rebate gasket	1L+3H		
331.013	Brtva praga	Threshold gasket	L-117	1	
347.003	Četkica 7x9	Brush seal 7x9	Lkr(aluminij)-14	2	
344.112	Brtva	Gasket	4L+4H		
344.049	Brtva	Gasket	4Lkr+4Hkr		
344.045	Brtva	Gasket	4Lkr+4Hkr		
344.046	Brtva	Gasket	1L+2H		
373.027	Čep okapnice F-1200	End cap for F-1200		2	para
373.066	Čep kombatute F-0424F	Insert for the flying mullion F-0424F		1	par
375.050	PVC kopča	PVC clamp	(10L+8H)/250		
340.013	Ispuna ispod stakla	Insulation around the glass	2L+2H		
363.093	K. umetak za c. brtvu	Corner insert for c. gasket		2	
363.094	K. umetak za c. brtvu	Corner insert for c. gasket		8	
Staklo 58 mm		Glass 58 mm	(L/2-244)x(H-252)	2	

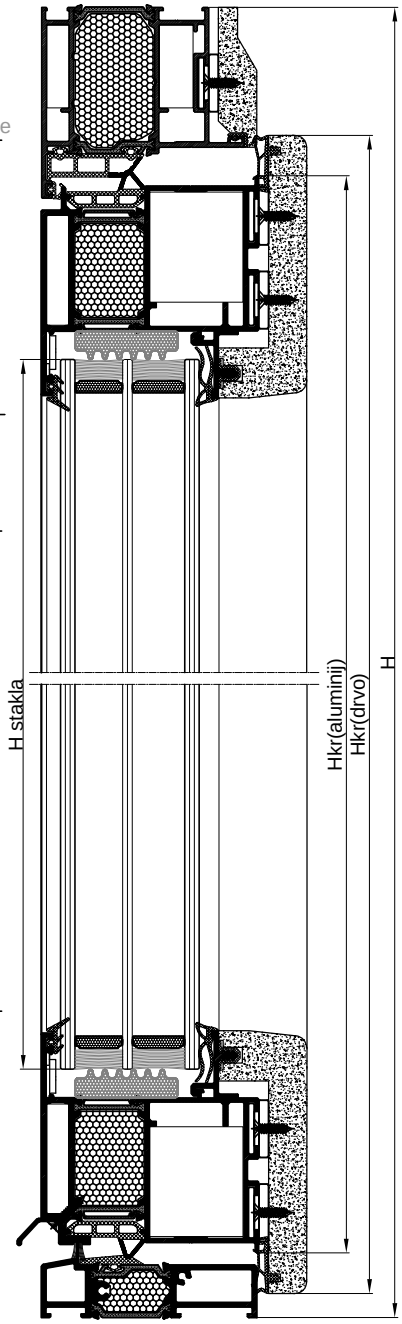

* 2 ili 3 po krilu ovisno o visini i tež.krila
2 or 3 per sash(depending on the height and weight of the sash)

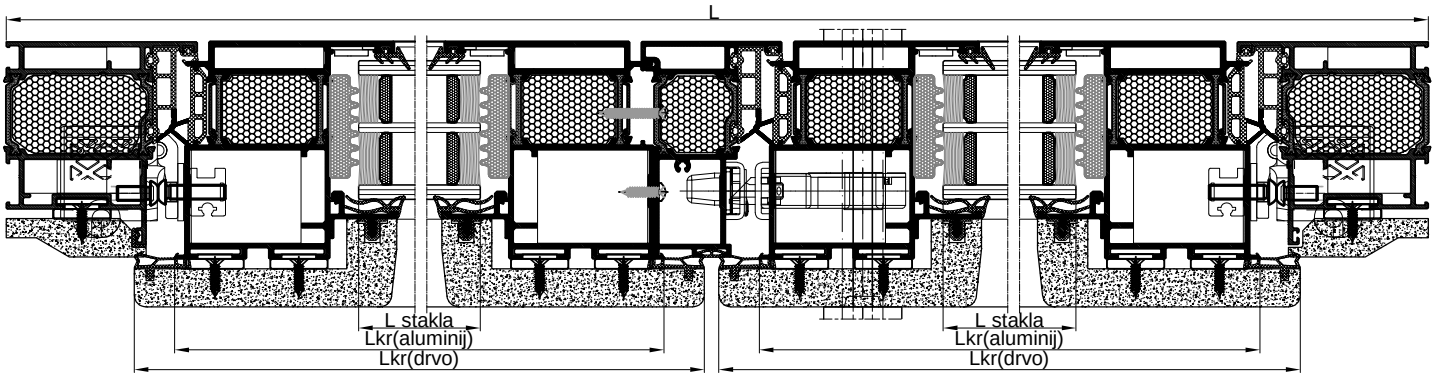



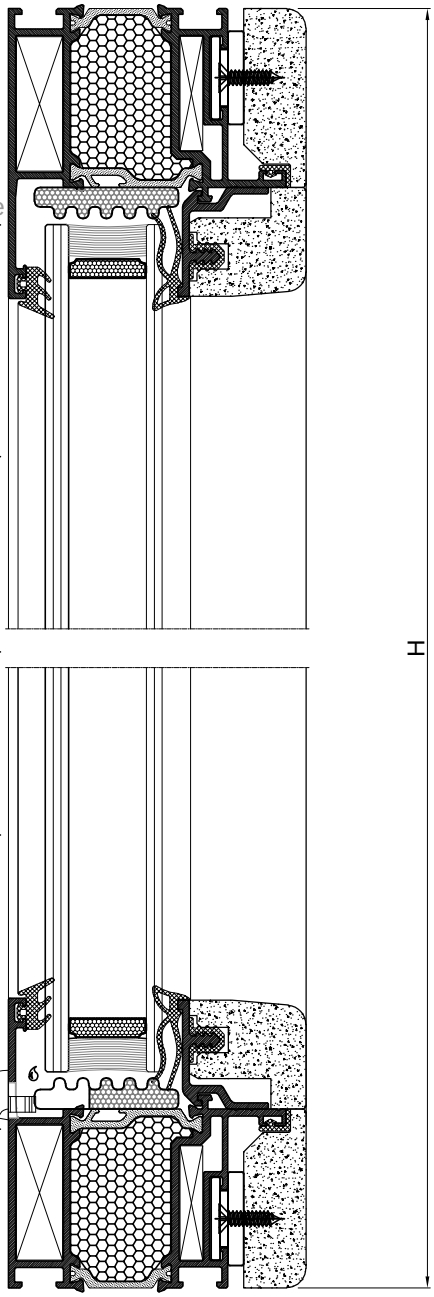


PROFILI PROFILES			kom pcs	mjera dimension	kut pilanja sawing angle
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
F-1725	Horizontalna lajsna	Horizontal bead	2	Ll=L-100	90-90
F-1725	Vertikalna lajsna	Vertical bead	2	Hl=H-148	90-90


DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.027	Horizontalna lajsna	Horizontal bead	2	Ll=L-92	45-45
600.027	Vertikalna lajsna	Vertical bead	2	Hl=H-92	45-45

OKOVI HARDWARE			
710.090	Kutna spojnica okvira	Frame corner bracket	4
710.163	Kutna spojnica okvira	Frame corner bracket	4
730.001	Kutna spojnica okvira	Frame corner bracket	4
373.031	PVC kutni umetak rama	PVC corner bracket for frame	4


BRTVE I DODATCI GASKETS AND ACCESSORIES			
344.046	Brtva u ramu	Gasket in frame	2L+2H
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead	2L+2H
344.049	Brtva prema staklu/unutarnja	Glazing gasket/interior	2L+2H
328.003	Brtva prema staklu/vanjska	Glazing gasket/exterior	2L+2H
370.070	Maska za drenažni otvor	Mask for drainage hole	2
348.002	Ispuna ispod stakla	Insulation around the glass	2L+2H
370.000	PVC podmetač 3 mm	PVC glazing packer 3 mm	8
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	8
375.050	PVC kopča	PVC clamp	(2L+2H)/250

STAKLO GLASS			
30 mm		1	L -111 x H -111

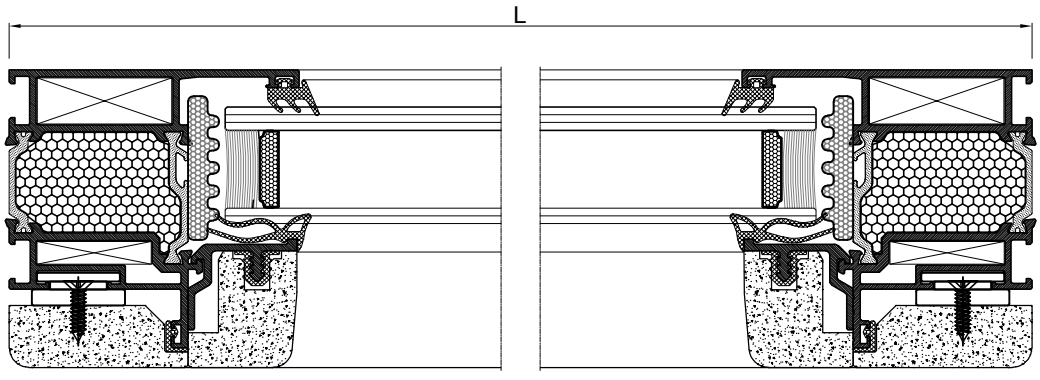





PROFILI PROFILES			kom pcs	mjera dimension	kut pilanja sawing angle
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0410F	Horizontala krila	Hor. sash	2	Lkr=L-116	45-45
FT-0410F	Vertikala krila	Vert. sash	2	Hkr=H-116	45-45
F-1725	Horizontalna lajsna	Horizontal bead	2	Ll=Lkr-83	90-90
F-1725	Vertikalna lajsna	Vertical bead	2	Hl=Hkr-131	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.028	Horizontala krila	Hor. sash	2	Lkr=L-80	45-45
600.028	Vertikala krila	Vert. sash	2	Hkr=H-80	45-45
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	4		
710.163	Kutna spojnica okvira	Frame corner bracket	4		
730.002	Kutna spojnica okvira	Frame corner bracket	4		
373.031	PVC kutni umetak rama	PVC corner bracket for frame	4		
710.165	Kutna spojnica krila	Sash corner bracket	4		
710.129	Kutna spojnica krila	Sash corner bracket	4		
730.001	Kutna spojnica krila	Sash corner bracket	4		
731.010	Kutna spojnica krila	Sash corner bracket	4		
Otklopno zaokretni okov ROTO NT-A		Turn and tilt hardware ROTO NT-A			
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket	2L+2H		
344.112	Brtva u krilu	Gasket in sash	2L+2H		
344.046	Brtva u ramu	Gasket in frame	2L+2H		
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead	2L+2H		
344.049	Brtva prema staklu/unutarnja	Glazing gasket/interior	2L+2H		
328.003	Brtva prema staklu/vanjska	Glazing gasket/exterior	2L+2H		
348.002	Ispuna ispod stakla	Insulation around the glass	2L+2H		
370.000	PVC podmetač 3 mm	PVC glazing packer 3 mm	12		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	12		
373.002	Umetak profila okapnice	End insert for drip profile	2		
370.070	Maska za drenažni otvor	Mask for drainage hole	2		
375.050	PVC kopča	PVC clamp	((2L+2H)/250)x2		
368.003	Kutni umetak za centralnu brtvu	Corner insert	4		

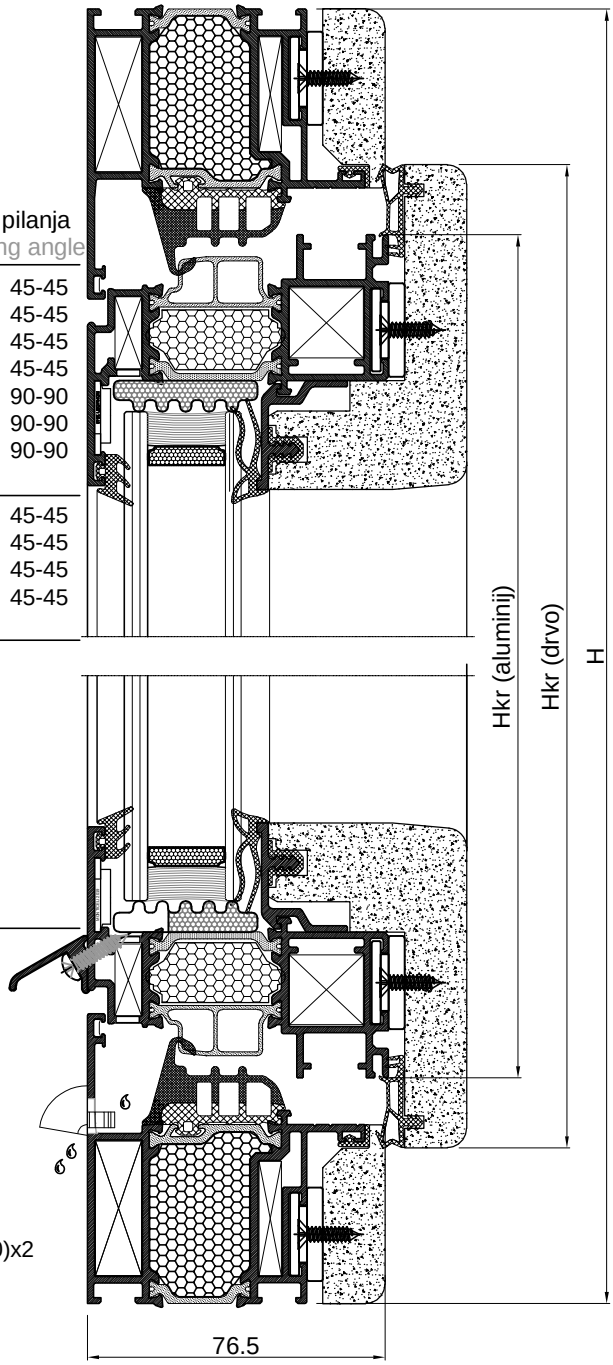


STAKLO GLASS


30 mm	1	Lkr(drvo) -127 x Hkr(drvo) -127

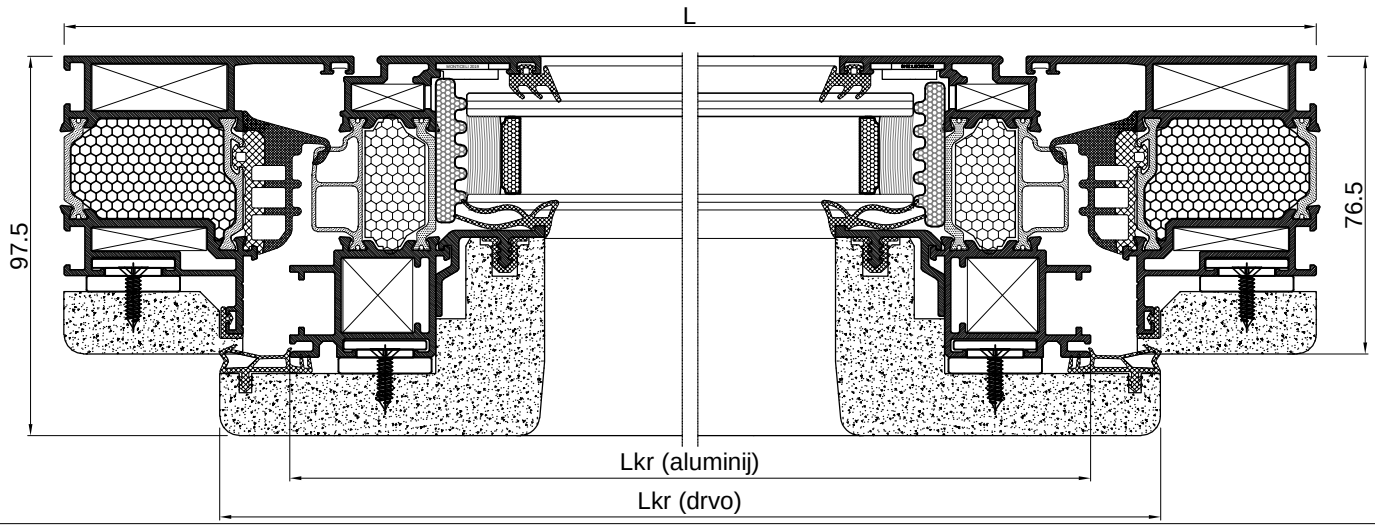


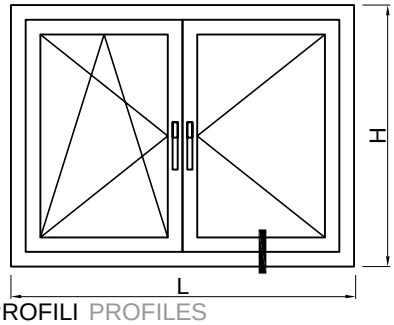

			kom pcs	mjera dimension	kut pilanja sawing angle
PROFILI PROFILES					
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0410F	Horizontala krila	Hor. sash	4	Lkr=L/2-79	45-45
FT-0410F	Vertikala krila	Vert. sash	4	Hkr=H-116	45-45
FT-0421F	Profil kombatute	Flying mullion	1	Hk=Hkr-47	45-45
F-1725	Horizontalna lajsna	Horizontal bead	4	Ll=Lkr-83	90-90
F-1725	Vertikalna lajsna	Vertical bead	4	Hl=Hkr-131	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr+32	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.028	Horizontala krila	Hor. sash	4	Lkr=L/2-43	45-45
600.028	Vertikala krila	Vert. sash	4	Hkr=H-80	45-45
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	4		
710.163	Kutna spojnica okvira	Frame corner bracket	4		
730.002	Kutna spojnica okvira	Frame corner bracket	4		
373.031	PVC kutni umetak rama	PVC corner bracket for frame	4		
710.165	Kutna spojnica krila	Sash corner bracket	8		
710.129	Kutna spojnica krila	Sash corner bracket	8		
730.001	Kutna spojnica krila	Sash corner bracket	8		
731.010	Kutna spojnica krila	Sash corner bracket	8		
Otklopno zaokretni okov ROTO NT-A		Turn and tilt hardware ROTO NT-A			
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket		2L+3H	
344.112	Brtva u krilu	Gasket in sash		2L+4H	
344.046	Brtva u ramu	Gasket in frame		2L+2H	
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		2L+4H	
344.049	Brtva uz staklo/unutarnja	Glazing gasket/interior		2L+4H	
328.003	Brtva uz staklo/vanjska	Glazing gasket/exterior		2L+4H	
344.047	Brtva uz profil kombatute	Gasket along the flying mullion		1H	
348.002	Ispuna ispod stakla	Insulation around the glass		2L+4H	
365.049	Čep kombatute	Insert for the flying mullion	2		
370.000	PVC podmetač 3 mm	PVC glazing packer 3 mm	20		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	20		
373.002	Umetak profila okapnice	End insert for drip profile	4		
370.070	Maska za drenažni otvor	Mask for drainage hole	4		
375.050	PVC kopča	PVC clamp	(4L+6H)/250		
375.050	Kutni umetak za centralnu brtvu	Corner insert	4		
STAKLO GLASS					
30 mm			2	Lkr(drvo) - 127 x Hkr(drvo) - 127	

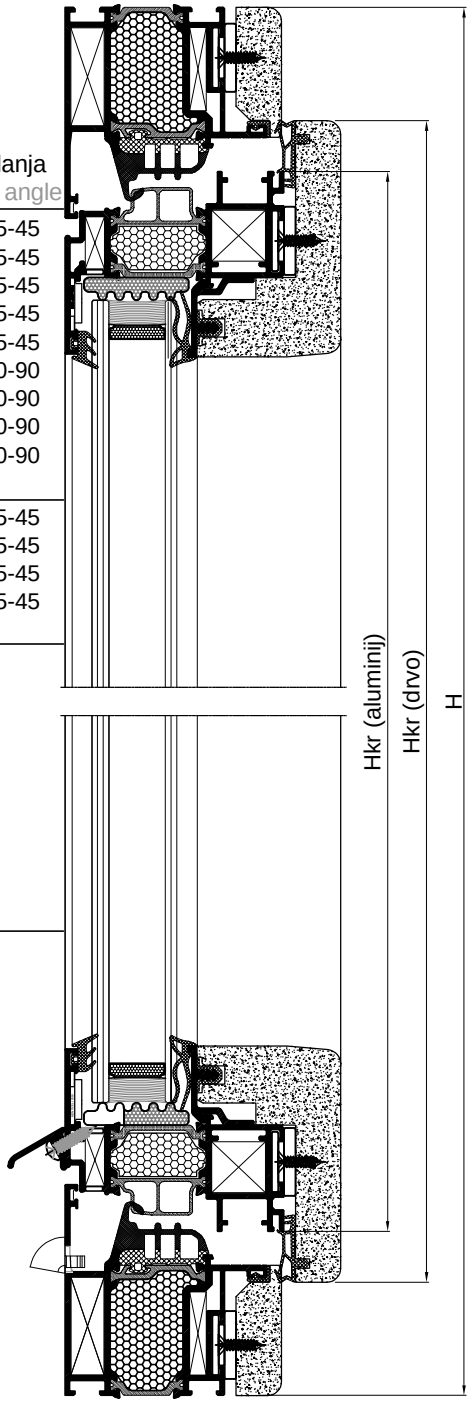

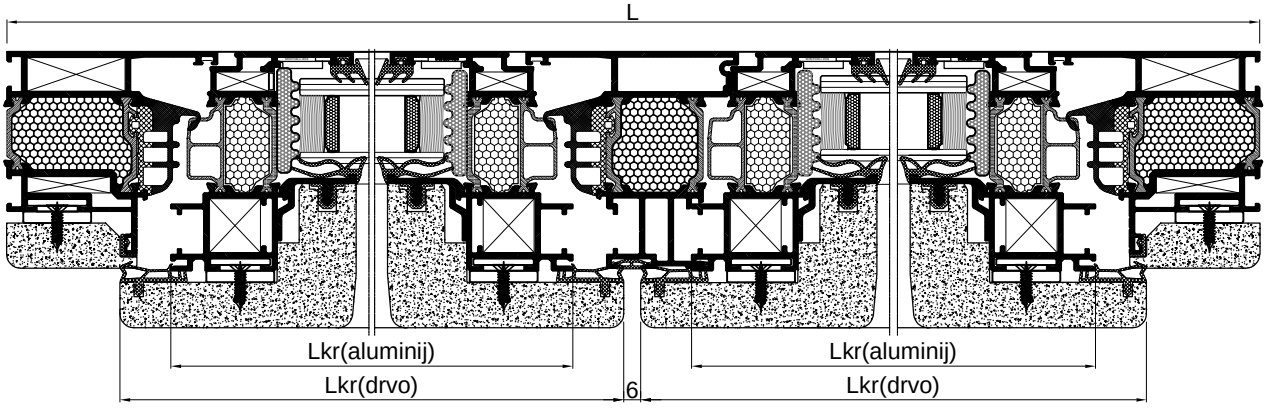

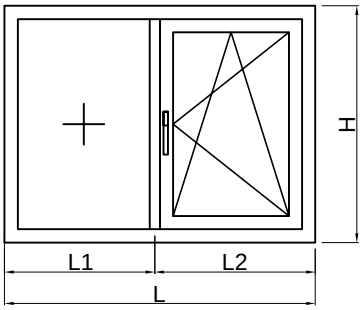


PROFILI PROFILES			kom pcs	mjera dimension	kut pilanja sawing angle
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0410F	Horizontala krila	Hor. sash	2	Lkr=L2-89	45-45
FT-0410F	Vertikala krila	Vert. sash	2	Hkr=H-116	45-45
FT-0420F	Prečka	Mullion	1	Hpr=H-104.2	90-90
F-1725	Horizontalna lajsna-fik.	Horizontal bead-frame	2	Llf=L1-73.5	90-90
F-1725	Vertikalna lajsna-fik.	Vertical bead-frame	2	Hlf=H-148	90-90
F-1725	Horizontalna lajsna-krilo	Horizontal bead-sash	2	Llk=Lkr-83	90-90
F-1725	Vertikalna lajsna-krilo	Vertical bead-sash	2	Hlk=Hkr-131	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90


DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.028	Horizontala krila	Hor. sash	2	Lkr=L2-53	45-45
600.028	Vertikala krila	Vert. sash	2	Hkr=H-80	45-45
600.027	Horiz. lajsna-fiksno	Horizontal bead-frame	2	Ll=L1-65	45-45
600.027	Vertikalna lajsna-fiksno	Vertical bead-frame	2	Hl=H-92	45-45
600.007	Vertikalna lajsna-fiksno	Vertical bead-frame	1	Hpr=H-92.2	90-90


OKOVI HARDWARE			
710.090	Kutna spojnica okvira	Frame corner bracket	4
710.163	Kutna spojnica okvira	Frame corner bracket	4
730.002	Kutna spojnica okvira	Frame corner bracket	4
373.031	PVC kutni umetak rama	PVC corner bracket for frame	4
710.165	Kutna spojnica krila	Sash corner bracket	4
710.129	Kutna spojnica krila	Sash corner bracket	4
730.001	Kutna spojnica krila	Sash corner bracket	4
731.010	Kutna spojnica krila	Sash corner bracket	4
Otklopno zaokretni okov ROTO NT-A		Turn and tilt hardware ROTO NT-A	

BRTVE I DODATCI GASKETS AND ACCESSORIES			
338.017	Centralna brtva	Central gasket	L+2H
344.112	Brtva u krilu	Gasket in sash	L+2H
344.046	Brtva u ramu	Gasket in frame	2L+4H
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead	2L+5H
344.049	Brtva uz staklo/unutarnja	Glazing gasket/interior	2L+4H
328.003	Brtva uz staklo/vanjska	Glazing gasket/exterior	2L+4H
348.002	Ispuna ispod stakla	Insulation around the glass	2L+4H
370.000	PVC podmetač 3 mm	PVC glazing packer 3 mm	20
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	20
373.002	Umetak profila okapnice	End insert for drip profile	2
370.070	Maska za drenažni otvor	Mask for drainage hole	4
375.050	PVC kopča	PVC clamp	(3L+4H)/250
375.051	PVC umetak prečke	PVC insert of mullion	2
368.003	Kutni umetak za centralnu brtvu	Corner insert	4

STAKLO GLASS		mjera dimension	
30 mm		L1-84 x H-111 - Fiksno	1
30 mm		Lkr(drvo)-127 x Hkr(drvo)-127	1

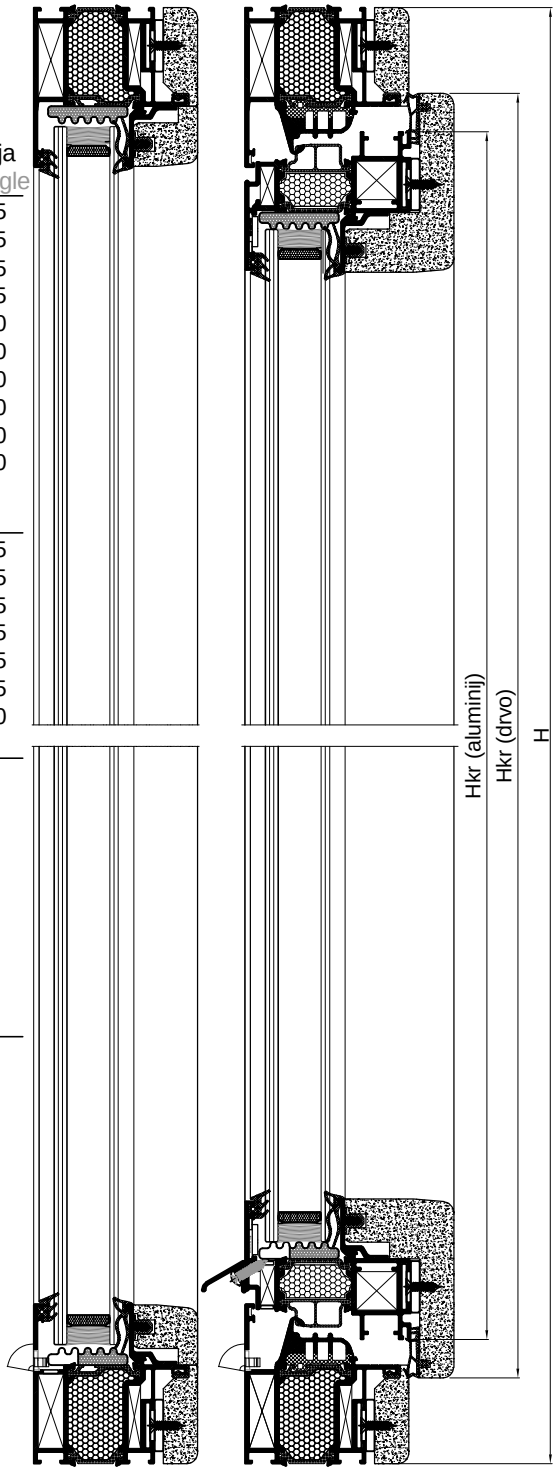


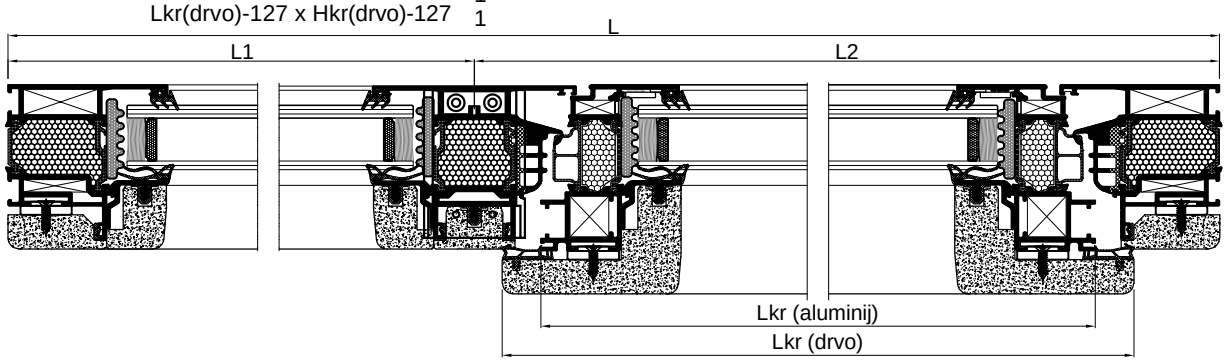






PROFILI PROFILES			kom pcs	mjera dimension	kut pilanja sawing angle
FT-0400F	Horizontala okvira	Hor. frame	1	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	90-45
FT-0401F	Profil praga	Threshold profile	1	Lpr=L-87.4	90-90
FT-0410F	Horizontala krila	Hor. sash	2	Lkr=L-116	45-45
FT-0410F	Vertikala krila	Vert. sash	2	Hkr=H-85.5	45-45
FT-0420F	Prečka krila	Sash mullion	1	Lprkr=Lkr-87.2	90-90
F-1725	Horiz. lajsna-krilo	Horizontal bead-sash	2	Ll=Lkr-83	90-90
F-1725	Horiz. lajsna-prečka	Horizontal bead-mullion	2	Ll=Lkr-82.8	90-90
F-1725	Vertikalna lajsna	Vertical bead	2	Hl=H1-140	90-90
F-1725	Vertikalna lajsna	Vertical bead	2	Hl=H2-170.5	90-90
F-1353	Profil na pragu	Profile on the threshold	1	Lpp=L-87.4	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	1	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	90-45
600.028	Horizontala krila	Hor. sash	2	Lkr=L-80	45-45
600.028	Vertikala krila	Vert. sash	2	Hkr=H-49.5	45-45
600.029	Prečka krila	Sash mullion	1	Lprkr=Lkr-131	90-90
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	2		
710.163	Kutna spojnica okvira	Frame corner bracket	2		
730.002	Kutna spojnica okvira	Frame corner bracket	2		
373.031	PVC kutni umetak rama	PVC corner bracket of frame	2		
710.165	Kutna spojnica krila	Sash corner bracket	4		
710.129	Kutna spojnica krila	Sash corner bracket	4		
730.001	Kutna spojnica krila	Sash corner bracket	4		
731.010	Kutna spojnica krila	Sash corner bracket	4		
Otklopno zaokretni okov ROTO NT-A		Turn and tilt hardware ROTO NT-A			
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket		2L+2H	
344.112	Brtva u krilu	Gasket in sash		2L+2H	
344.046	Brtva u ramu	Gasket in frame		2L+2H	
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		2L+2H	
344.049	Brtva prema staklu/unutarnja	Glazing gasket/interior		2L+2H	
328.003	Brtva prema staklu/vanjska	Glazing gasket/exterior		2L+2H	
340.013	Ispuna ispod stakla	Insulation around the glass		2L+2H	
370.000	PVC podmetač 3 mm	PVC glazing packer 3 mm	12		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	12		
373.002	Umetak profila okapnice	End insert for drip profile	2		
370.070	Maska za drenažni otvor	Mask for drainage hole	2		
375.050	PVC kopča	PVC clamp		(3L+4H)/250	
368.003	Kutni umetak za centralnu brtvu	Corner insert	4		

STAKLO GLASS	mjera measure	kom pcs
30 mm	Lkr(Al.)-91 x H1-101.5	1
	Lkr(Al.)-91 x H2-132	1

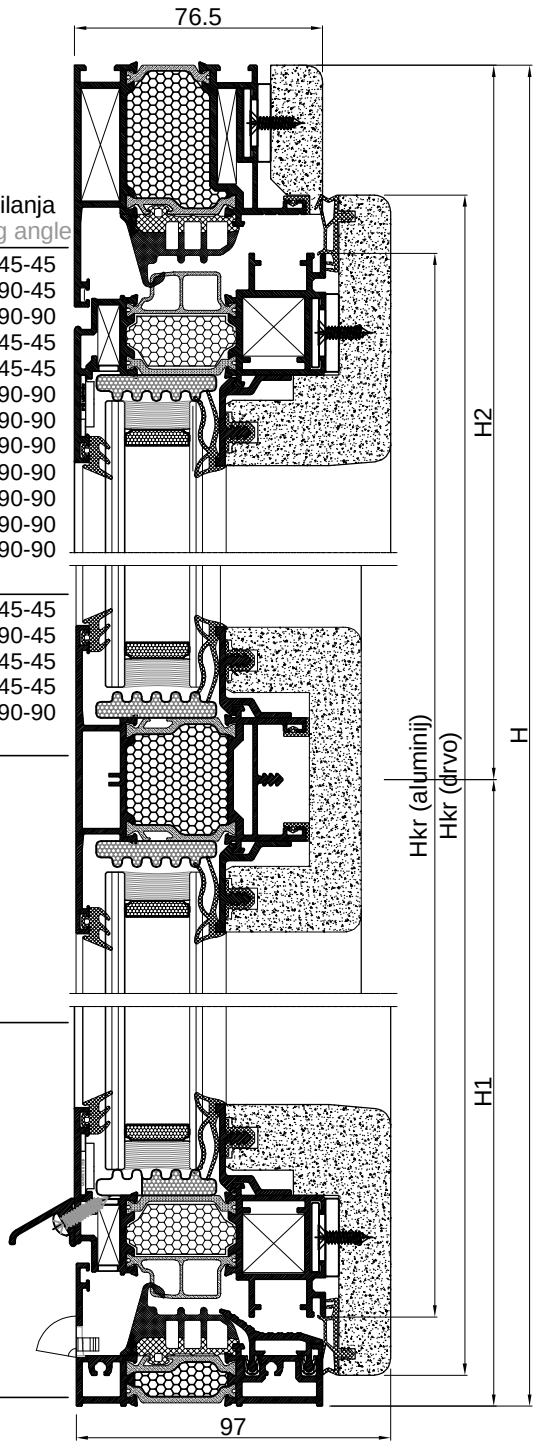

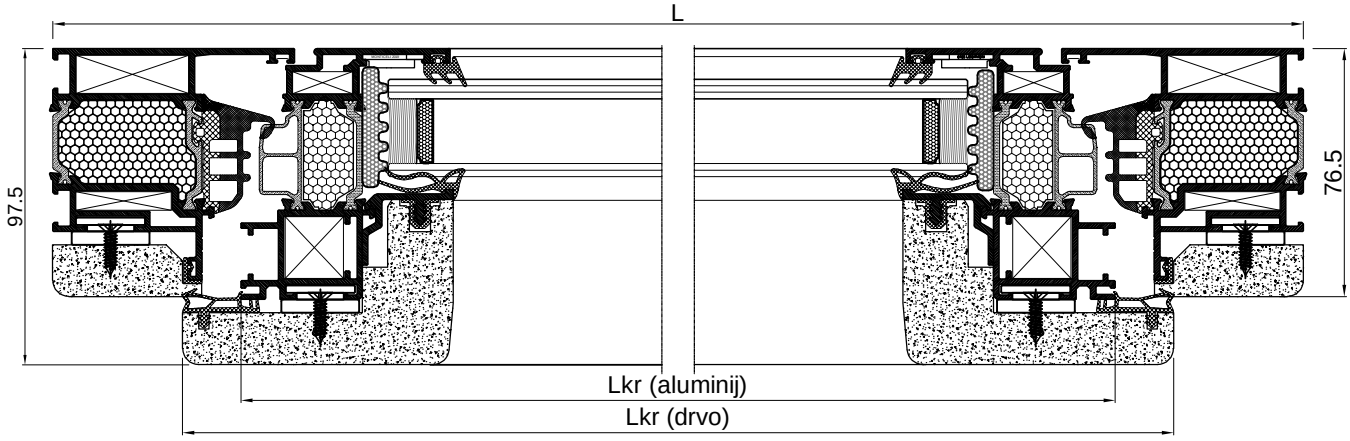





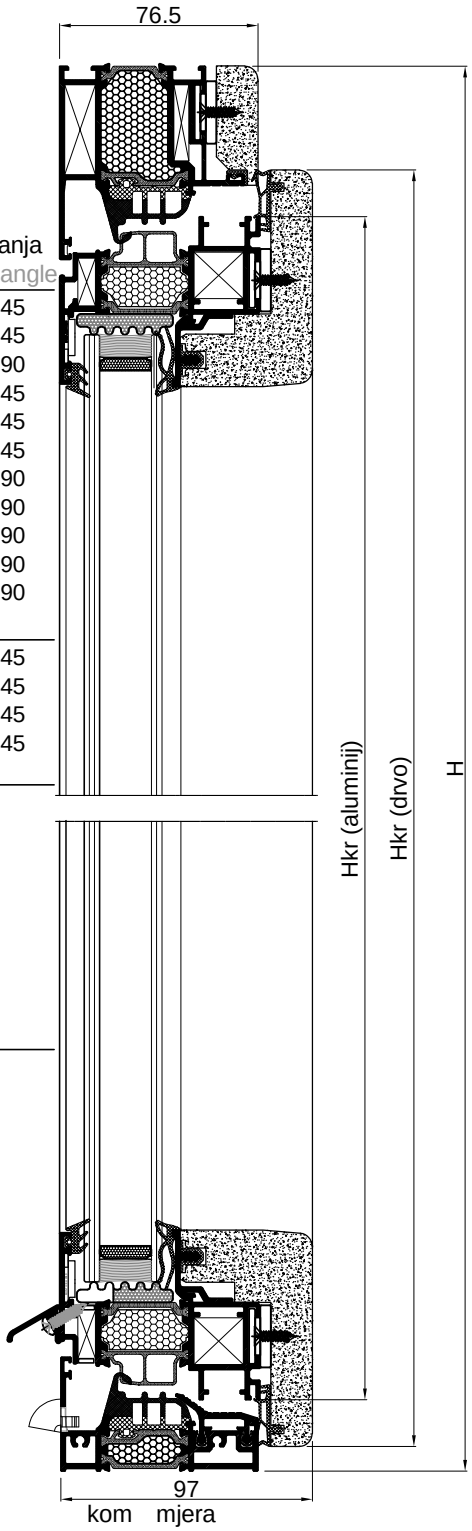

			kom	mjera	kut pilanja
PROFILI PROFILES			pcs	dimension	sawing angle
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0401F	Profil praga	Threshold profile	1	Lpr=L-87.4	90-90
FT-0410F	Horizontala krila	Hor. sash	4	Lkr=L/2-79	45-45
FT-0410F	Vertikala krila	Vert. sash	4	Hkr=H-85.5	45-45
FT-0421F	Profil kombatute	Flying mullion	1	Hk=Hkr-47	45-45
F-1350	Horizontalna lajsna	Horizontal bead	4	Ll=Lkr-83	90-90
F-1350	Vertikalna lajsna	Vertical bead	4	Hl=Hkr-131	90-90
F-1353	Profil na pragu	Profile on threshold	1	Lpp=-87.4	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-45	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr+32	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.028	Horizontala krila	Hor. sash	4	Lkr=L/2-43	45-45
600.028	Vertikala krila	Vert. sash	4	Hkr=H-49.5	45-45
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	2		
710.163	Kutna spojnica okvira	Frame corner bracket	2		
730.002	Kutna spojnica okvira	Frame corner bracket	2		
373.031	PVC kutni umetak rama	PVC corner bracket for frame	2		
710.165	Kutna spojnica krila	Sash corner bracket	8		
710.129	Kutna spojnica krila	Sash corner bracket	8		
730.001	Kutna spojnica krila	Sash corner bracket	8		
731.010	Kutna spojnica krila	Sash corner bracket	8		
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket		2L+3H	
344.112	Brtva u krilu	Gasket in sash		2L+4H	
344.046	Brtva u ramu	Gasket in frame		2L+2H	
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		2L+4H	
344.049	Brtva uz staklo/unutarnja	Glazing gasket/interior		2L+4H	
328.003	Brtva uz staklo/vanjska	Glazing gasket/exterior		2L+4H	
344.047	Brtva uz profil kombatute	Gasket along the flying mullion		1H	
340.013	Ispuna ispod stakla	Insulation around the glass		2L+4H	
365.049	Čep kombatute	Insert for the flying mullion	2		
370.000	PVC podmetač 3 mm	PVC glazing packer 3 mm	20		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	20		
373.002	Umetak profila okapnice	End insert for drip profile	4		
370.070	Maska za drenažni otvor	Mask for drainage hole	4		
375.050	PVC kopča	PVC clamp	(4L+6H)/250		
368.003	Kutni umetak za centralnu brtvu	Corner insert	4		


		kom	mjera
STAKLO GLASS		pcs	measure
30 mm		2	Lkr(drvo) - 127 x Hkr(drvo) - 127

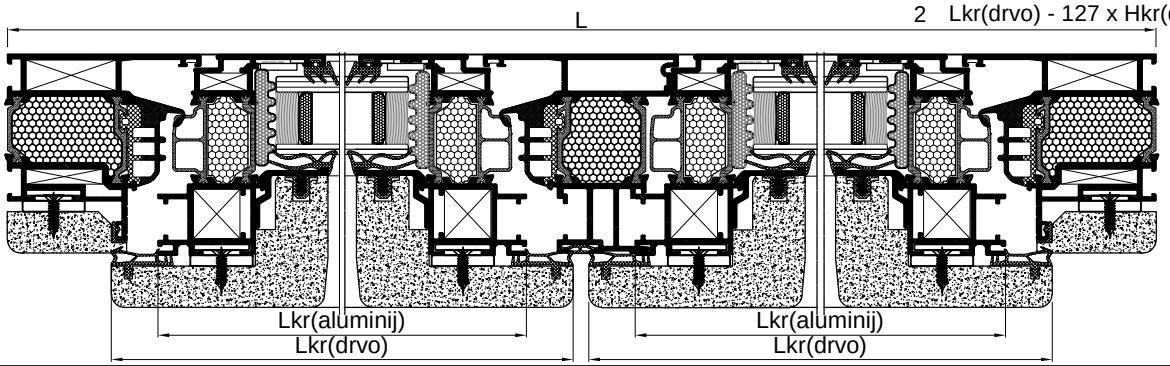





			kom pcs	mjera dimension	kut pilanja sawing angle
PROFILI PROFILE					
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0410F	Horizontala krila	Hor. sash	4	Lkr=L/2-79	45-45
FT-0410F	Vertikala krila	Vert. sash	4	Hkr=H2-89	45-45
FT-0410F	Horizontala nadsvjetla	Hor. part of top light	2	Lsv=L-116	45-45
FT-0410F	Vertikala nadsvjetla	Vert. part of top light	2	Hsv=H1-89	45-45
FT-0421F	Kombatuta	Flying mullion	1	Hk=Hkr-47	45-45
FT-0420F	Prečka	Mullion	1	Lpr=L-104.4	90-90
F-1725	Horizontalna lajsna	Horizontal bead - sash	4	Llkr=Lkr-83	90-90
F-1725	Vertikalna lajsna	Vertical bead - sash	4	Hlkr=Hkr-131	90-90
F-1725	Horizontalna lajsna	Horizontal bead - top light	2	Llsv=Lsv-83	90-90
F-1725	Vertikalna lajsna	Vertical bead - top light	2	Hlsv=Hsv-131	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr+32	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.028	Horizontala krila	Hor. sash	4	Lkr=L/2-43	45-45
600.028	Vertikala krila	Vert. sash	4	Hkr=H2-53	45-45
600.028	Horizontala nadsvjetla	Hor. part of top light	2	Lsv=L-80	45-45
600.028	Vertikala nadsvjetla	Vert. part of top light	2	Hsv=H1-53	45-45
600.007	Prečka	Mullion	1	Lpr=L-92.2	90-90
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	4		
710.163	Kutna spojnica okvira	Frame corner bracket	4		
730.002	Kutna spojnica okvira	Frame corner bracket	4		
373.031	PVC kutni umetak rama	PVC corner bracket for frame	4		
375.051	PVC umetak rama	PVC bracket for frame	2		
710.165	Kutna spojnica krila	Sash corner bracket	12		
710.129	Kutna spojnica krila	Sash corner bracket	12		
730.001	Kutna spojnica krila	Sash corner bracket	12		
731.010	Kutna spojnica krila	Sash corner bracket	12		
	Otklopno zaokretni okov ROTO NT-A	Tilt and turn hardware ROTO NT-A			
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket		4L+2H+H2	
344.112	Brtva u krilu	Gasket in sash		4L+2H+2H2	
344.046	Brtva u ramu	Gasket in frame		4L+2H	
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		5L+2H+2H2	
344.049	Brtva uz staklo	Glazing gasket		4L+2H+2H2	
328.003	Brtva uz staklo	Glazing gasket		4L+2H+2H2	
344.047	Brtva uz profil kombatute	Gasket along flying mullion		H2	
340.013	Ispuna ispod stakla	Insulation around the glass		4L+2H+2H2	
365.049	Čep kombatute	Insert for the flying mullion	2		
370.000	PVC podmetač 3 mm	PVC glazing packer 3 mm	14		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	14		
373.002	Umetak profila okapnice	End insert for drip profile	4		
370.070	Maska za drenažni otvor	Mask for drainage hole	4		
375.050	PVC kopča	PVC clamp	(6L+4H+2H2)/250		
368.003	Kutni umetak za centralnu brtvu	Corner insert	8		


STAKLO		GLASS
30 mm	2	Lkr(drvo) - 127 x Hkr(drvo) - 127
30 mm	1	Lsv(drvo) - 127 x Hsv(drvo) - 127

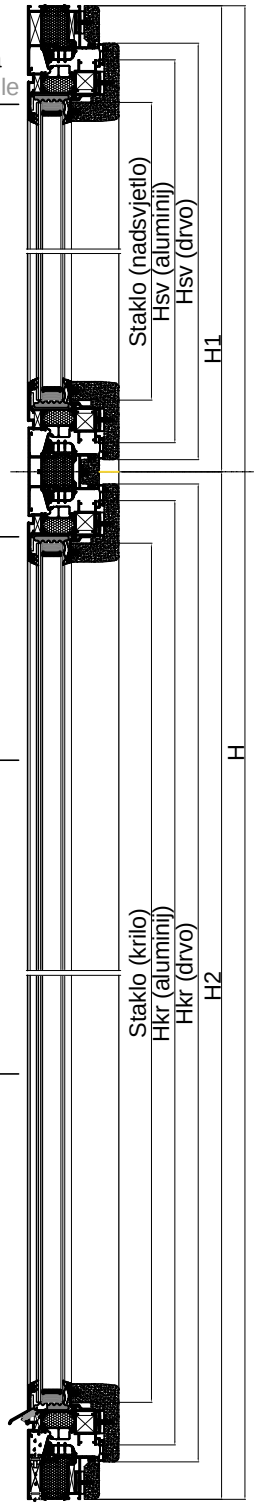


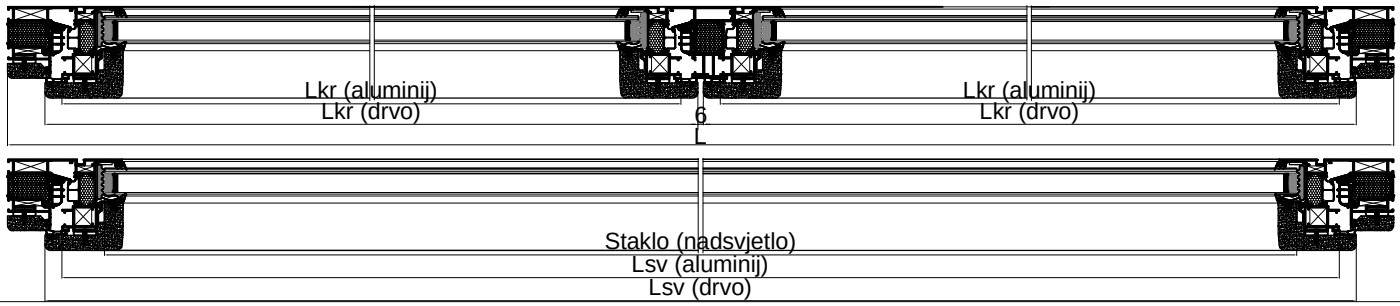




			kom	mjera	kut pilanja
PROFILI PROFILE			pcs	dimension	sawing angle
FT-0400F	Horizontala okvira	Hor. frame	2	L	45-45
FT-0400F	Vertikala okvira	Vert. frame	2	H	45-45
FT-0410F	Horizontala krila	Hor. sash	4	Lkr=L/2-79	45-45
FT-0410F	Vertikala krila	Vert. sash	4	Hkr=H2-89	45-45
FT-0421F	Profil za okretanje	Flying mullion	1	Hk=Hkr-47	45-45
FT-0420F	Prečka	Mullion	1	Lpr=L-104.4	90-90
F-1725	Horizontalna lajsna	Horizontal bead-sash	4	Llkr=Lkr-83	90-90
F-1725	Vertikalna lajsna	Vertical bead-sash	4	Hlkr=Hkr-131	90-90
F-1725	Horizontalna lajsna	Horizontal bead-top light	2	Llsv=L-104.5	90-90
F-1725	Vertikalna lajsna	Vertical bead-top light	2	Hlsv=H1-121	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr+32	90-90
Z40-657	Okapnica	Drip profile	1	Lok=Lkr-49	90-90
					90-90
DRVENE OBLOGE WOODEN COVERINGS					
600.001	Horizontala okvira	Hor. frame	2	L	45-45
600.001	Vertikala okvira	Vert. frame	2	H	45-45
600.028	Horizontala krila	Hor. sash	4	Lkr=L/2-43	45-45
600.028	Vertikala krila	Vert. sash	4	Hkr=H2-53	45-45
600.027	Horizontala nadsvjetla	Hor. part of top light	2	Lsv=L-92	45-45
600.027	Vertikala nadsvjetla	Vert. part of top light	2	Hsv=H1-65	45-45
600.007	Prečka	Mullion	1	Lpr=L-92.2	90-90
OKOVI HARDWARE					
710.090	Kutna spojnica okvira	Frame corner bracket	4		
710.163	Kutna spojnica okvira	Frame corner bracket	4		
730.002	Kutna spojnica okvira	Frame corner bracket	4		
373.031	PVC kutni umetak rama	PVC corner bracket for frame	4		
375.051	PVC umetak rama	PVC bracket for frame	2		
710.165	Kutna spojnica krila	Sash corner bracket	8		
710.129	Kutna spojnica krila	Sash corner bracket	8		
730.001	Kutna spojnica krila	Sash corner bracket	8		
731.010	Kutna spojnica krila	Sash corner bracket	8		
	Otklopno zaokretni okov ROTO NT-A	Tilt and turn hardware ROTO NT-A			
BRTVE I DODATCI GASKETS AND ACCESSORIES					
338.017	Centralna brtva	Central gasket		2L+3H2	
344.112	Brtva u krilu	Gasket in sash		2L+4H2	
344.046	Brtva u ramu	Gasket in frame		4L+2H	
344.045	Brtva uz staklo lajsnu	Gasket along glazing bead		5L+2H+2H2	
344.049	Brtva uz staklo	Glazing gasket		4L+2H+2H2	
328.003	Brtva uz staklo	Glazing gasket		4L+2H+2H2	
344.047	Brtva uz profil kombatute	Gasket along flying mullion		H2	
340.013	Ispuna ispod stakla	Insulation around the glass		4L+2H+2H2	
365.049	Čep kombatute	Insert for the flying mullion	2		
370.000	PVC podmetač 3 mm	PVC glazing packer 3 mm	14		
370.001	PVC podmetač 5 mm	PVC glazing packer 5 mm	14		
373.002	Umetak profila okapnice	End insert for drip profile	4		
370.070	Maska za drenažni otvor	Mask for drainage hole	4		
375.050	PVC kopča	PVC clamp	(6L+4H+2H2)/250		
368.003	Kutni umetak za centralnu brtvu	Corner insert	4		
STAKLO GLASS					
30 mm			2	Lkr(drvo) - 127 x Hkr(drvo) - 127	
30 mm			1	Lsv(drvo) - 19 x Hsv(drvo) - 19	

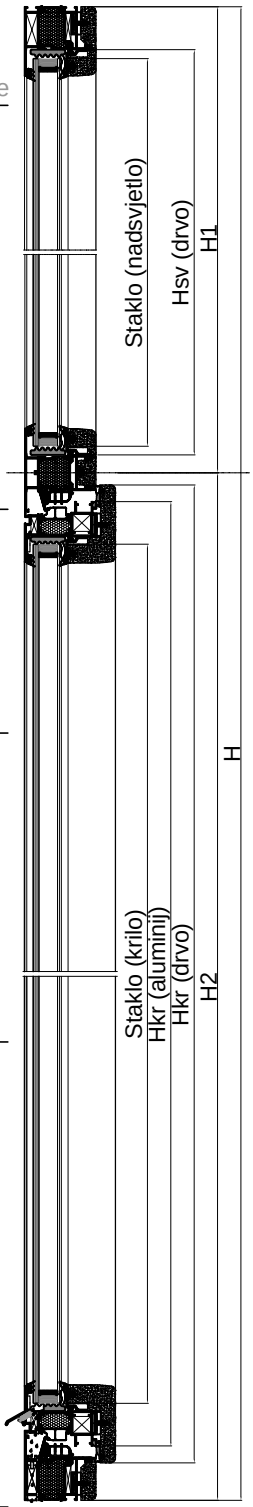

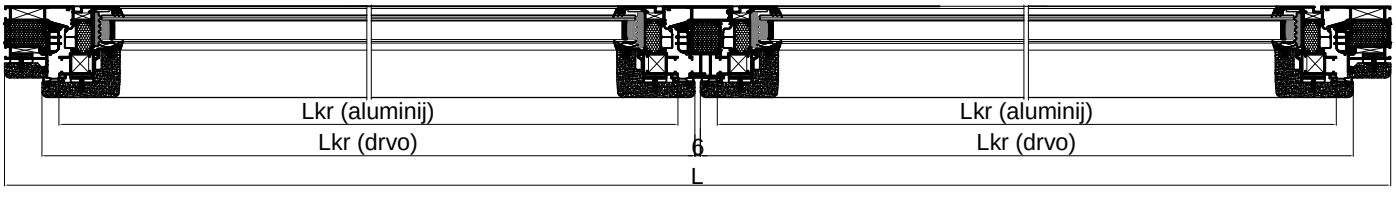



FEAL

Skenirajte QR kod i registrirajte se na partner.feal.ba

Scan the QR code and register on partner.feal.ba

TERMO **75 DA**

Travanj 2026. / *April 2026*

FEAL d.o.o.
Trnska cesta 146
88220 Široki Brijeg
Bosna i Hercegovina
Tel. +387 39 704-269; 705-807; 705-636
Fax. +387 39 704-358
info@feal.ba
www.feal.ba