
FEAL

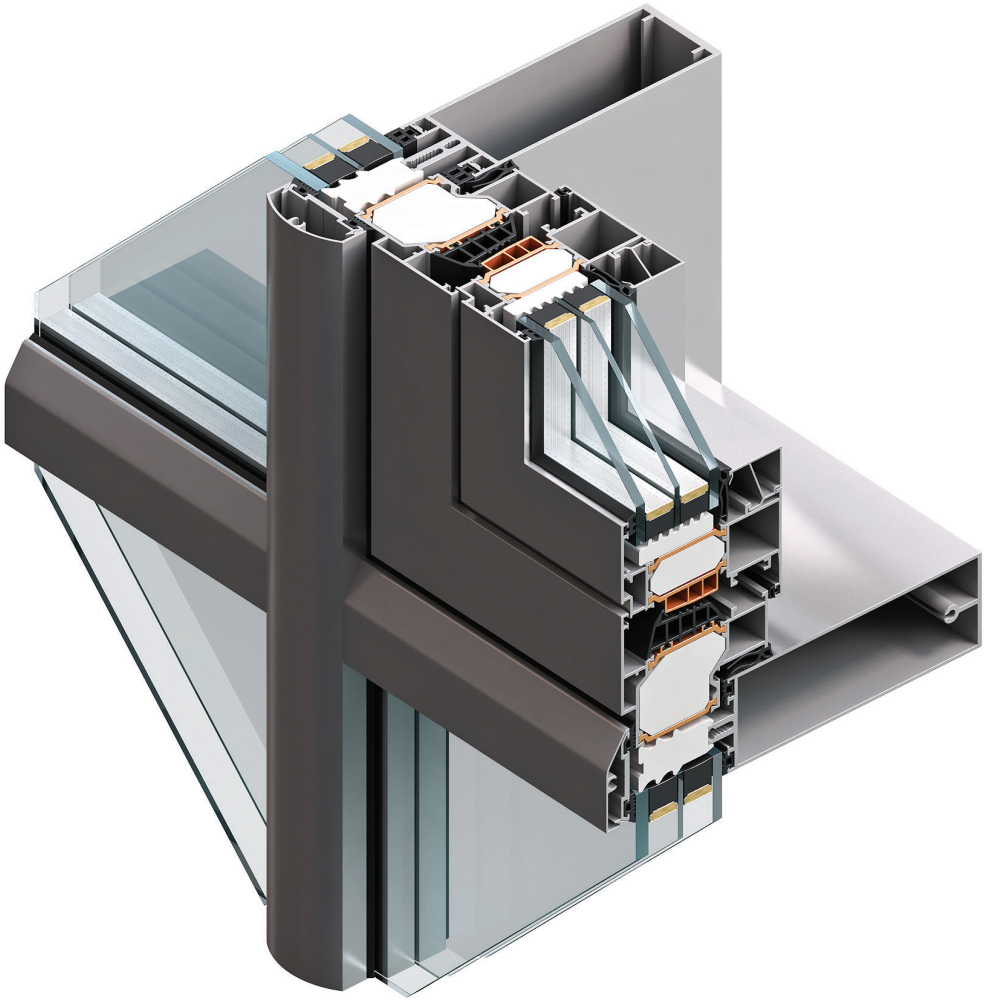

50 FK


AL. FASADA

AL. FACADE


Knjiga B / *Book B*

SADRŽAJ
CONTENT

06	VEZNI ELEMENTI	501.06.000
06	CONNECTION ELEMENTS	501.06.000
07	PVC ELEMENTI	501.07.000
07	PVC ELEMENTS	501.07.000
08	MEHANIZMI	501.08.000
08	MECHANISMS	501.08.000
09	BRTVE	501.09.000
09	GASKETS	501.09.000
10	DODACI	501.10.000
10	ACCESSORIES	501.10.000
11	OBRADA I MONTAŽA	501.11.000
11	PROCESSING AND MONTAGE	501.11.000
12	REZNE LISTE	501.12.000
12	CUTTING LISTS	501.12.000






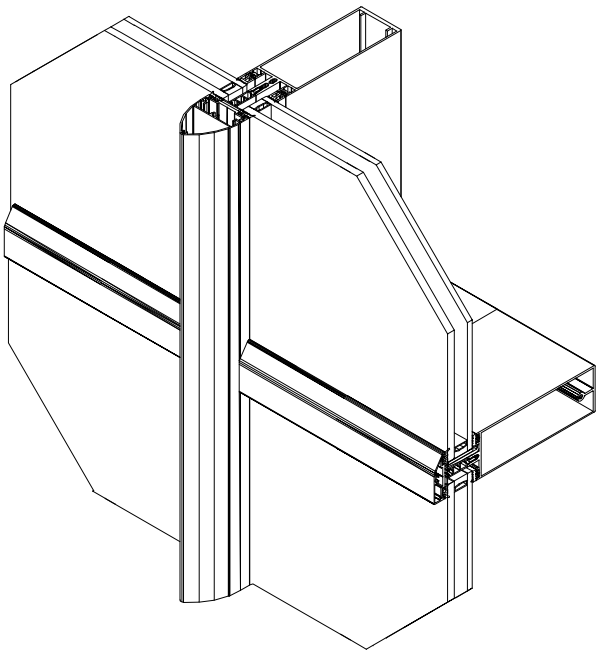





50 FK






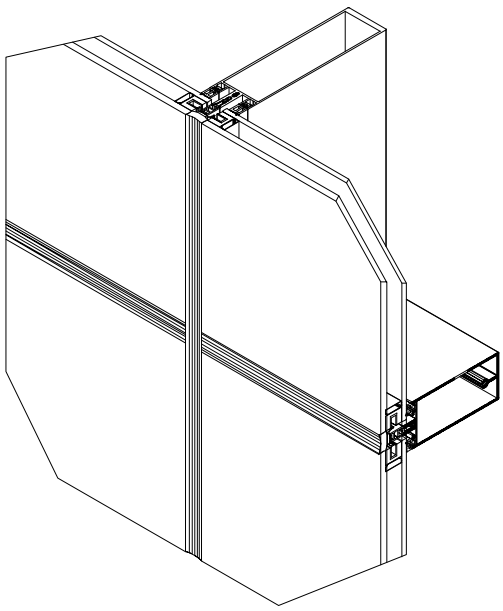





50 FS







Vezni elementi
Connection elements

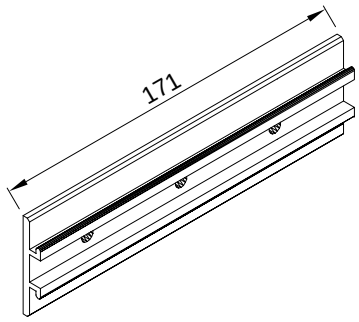



Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
720.204		- Klizač okomice za vodoravnicu FMV 50/198 - Mullion slider for transom FMV 50/198	Al.	
720.203		- Klizač okomice za vodoravnicu FMV 50/158 - Mullion slider for transom FMV 50/158	Al.	
720.208		- Klizač okomice za vodoravnicu FMV 50/138 - Mullion slider for transom FMV 50/138	Al.	
720.202		- Klizač okomice za vodoravnicu FMV 50/118 - Mullion slider for transom FMV 50/118	Al.	
720.201		- Klizač okomice za vodoravnicu FMV 50/88 - Mullion slider for transom FMV 50/88	Al.	
720.206		- Klizač okomice za pom.vodo. FVS 50/158 - Mullion slider for auxiliary transom FVS 50/158	Al.	






Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
720.207		- Klizač okomice za pom.vodo. FVS 50/118 - Mullion slider for auxiliary transom FVS 50/118	Al.	
720.209		- Klizač okomice za pomoćnu vodoravnicu FVS 50/88 - Mullion slider for auxiliary transom FVS 50/88	Al.	
720.205		- Klizač okomice za vodoravnicu FMV 50/32 - Mullion slider for transom FMV 50/32	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
721.204		- Klizač za vodoravnicu FMV 50/198 - Slider for transom FMV 50/198	Al.	
721.203		- Klizač za vodoravnicu FMV 50/158 - Slider for transom FMV 50/158	Al.	
721.217		- Klizač za vodoravnicu FMV 50/138 - Slider for transom FMV 50/138	Al.	
721.202		- Klizač za vodoravnicu FMV 50/118 - Slider for transom FMV 50/118	Al.	
721.201		- Klizač za vodoravnicu FMV 50/88 - Slider for transom FMV 50/88	Al.	
721.205		- Klizač za vodoravnicu FMV 50/32 - Slider for transom FMV 50/32	Al.	






Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
721.206		- Klizač za pom. vodoravnicu FVS 50/158 - Slider for transom FMV 50/158	Al.	
721.207		- Klizač za pom. vodoravnicu FVS 50/118 - Slider for transom FMV 50/118	Al.	
721.218		- Klizač za pom. vodoravnicu FVS 50/88 - Slider for auxiliary transom FMV 50/88	Al.	

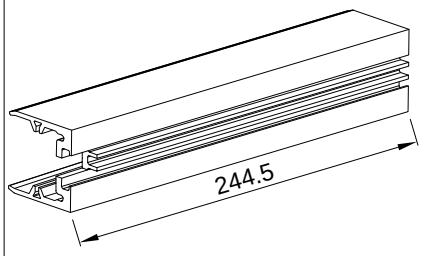
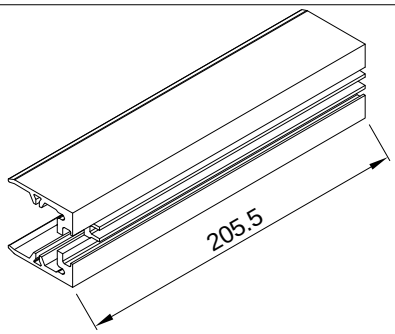




Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
721.223		- Klizač za vodoravnicu FMV 50/268 za ravni gumeni odstojnik 361.032 - Slider for transom FMV 50/268 for flat dilatation rubber 361.032	Al.	
721.233		- Klizač za vodoravnicu FMV 50/228 za ravni gumeni odstojnik 361.047 - Slider for transom FMV 50/228 for flat dilatation rubber 361.047	Al.	
721.211		- Klizač za vodoravnicu FMV 50/198 za ravni gumeni odstojnik 361.006 - Slider for transom FMV 50/198 for flat dilatation rubber 361.006	Al.	
721.210		- Klizač za vodoravnicu FMV 50/158 za ravni gumeni odstojnik 361.005 - Slider for transom FMV 50/158 for flat dilatation rubber 361.005	Al.	
721.214		- Klizač za vodoravnicu FMV 50/138 za ravni gumeni odstojnik 361.011 - Slider for transom FMV 50/138 for flat dilatation rubber 361.011	Al.	
721.209		- Klizač za vodoravnicu FMV 50/118 za ravni gumeni odstojnik 361.004 - Slider for transom FMV 50/118 for flat dilatation rubber 361.004	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
721.208		- Klizač za vodoravnicu FMV 50/88 za ravni gumeni odstojnik 361.003 - Slider for transom FMV 50/88 for flat dilatation rubber 361.003	Al.	
721.224		- Klizač za vodoravnicu FMO 50/200-S za ravni gumeni odstojnik - Slider for transom FMV 50/200-S for flat dilatation rubber	Al.	
721.225		- Klizač za vodoravnicu FMO 50/160-S za ravni gumeni odstojnik - Slider for transom FMV 50/160-S for flat dilatation rubber	Al.	
721.226		- Klizač za vodoravnicu FMO 50/120-S za ravni gumeni odstojnik - Slider for transom FMV 50/120-S for flat dilatation rubber	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
721.212		- Klizač za pom. vod. FVS 50/158 za ravni gumeni odstojnik 361.007 - Slider for auxiliary transom FVS 50/158 for flat dilatation rubber 361.007	Al.	
721.215		- Klizač za pom. vod FPV 50/138 za ravni gumeni odstojnik 361.012 - Slider for transom FPV 50/138 for flat dilatation rubber 361.012	Al.	
721.216		- Klizač vodoravnicu FPO 50/136 za ravni gumeni odstojnik 361.013 - Slider for transom FPO 50/136 for flat dilatation rubber 361.013	Al.	
721.213		- Klizač za pom. vod. FVS 50/118 za ravni gumeni odstojnik 361.008 - Slider for auxiliary transom FVS 50/118 for flat dilatation rubber 361.008	Al.	
721.221		- Klizač za pom. vod. FVS 50/88 za ravni gumeni odstojnik 361.009 - Slider for auxiliary transom FVS 50/88 for flat dilatation rubber 361.009	Al.	


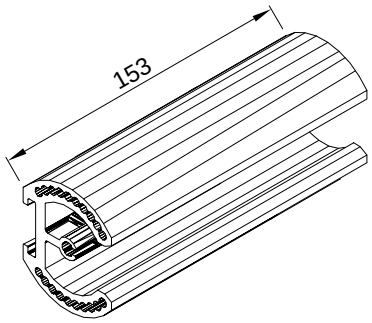




Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
722.211		- Klizač pod kutem za vodoravnicu FMV 50/268 - Angled slider for transom FMV 50/268	Al.	
722.206		- Klizač pod kutem za vodoravnicu FMV 50/198 - Angled slider for transom FMV 50/198	Al.	
722.205		- Klizač pod kutem za vodoravnicu FMV 50/158 - Angled slider for transom FMV 50/158	Al.	
722.207		- Klizač pod kutem za vodoravnicu FMV 50/138 - Angled slider for transom FMV 50/138	Al.	
722.204		- Klizač pod kutem za vodoravnicu FMV 50/118 - Angled slider for transom FMV 50/118	Al.	
722.203		- Klizač pod kutem za vodoravnicu FMV 50/88 - Angled slider for transom FMV 50/118	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
722.208		- Klizač pod kutem za pomoćnu vodoravnicu FVS 50/158 - Angled slider for auxiliary transom FVS 50/158	Al.	
722.209		- Klizač pod kutem za pomoćnu vodoravnicu FVS 50/138 - Angled slider for auxiliary transom FVS 50/138	Al.	
722.202		- Klizač pod kutem za pom.vodoravnicu FVS 50/118 - Angled slider for auxiliary transom FVS 50/118	Al.	
722.201		- Klizač pod kutem za pom.vodoranicu FVS 50/88 - Angled slider for auxiliary transom FVS 50/88	Al.	
722.210		- Klizač pod kutem za vodoravnicu FPO 50/136 - Angled slider for auxiliary transom FPO 50/138	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.025	l=53 mm 	- Kutna spojnica 16, L=53 - Corner bracket 16, L=53	Al.	
725.026	l=53 mm  M8x13	- Kutna spojnica 16, L=53 (V) - Corner bracket 16, L=53 (V)	Al.	
725.027	l=6.3 mm 	- Kutna spojnica 16, L=6.3 - Corner bracket 16, L=6.3	Al.	
725.028	l=7.3 mm 	- Kutna spojnica 16,L=7.3 - Corner bracket 16,L=7.3	Al.	
725.029	l=40 mm  M8x13	- Kutna spojnica 16,L=40 (V) - Corner bracket 16,L=40 (V)	Al.	
725.030	l=44 mm  M8x13	- Kutna spojnica 16,L=44 (V) - Corner bracket 16,L=44 (V)	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.031	l=7.8 mm 	- Kutna spojnica 16, L=7.8 - Corner bracket 16, L=7.8	Al.	
725.032	l=6 mm 	- Kutna spojnica 16, L=6 - Corner bracket 16, L=6	Al.	
725.033	l=16.3 mm 	- Kutna spojnica 16,L=16.3 - Corner bracket 16,L=16.3	Al.	
725.034	l=42.4 mm 	- Kutna spojnica 16,L=42.4 - Corner bracket 16,L=42.4	Al.	
725.035	l=42.4 mm  M8x13	- Kutna spojnica 16,L=42.4 (V) - Corner bracket 16,L=42.4 (V)	Al.	
725.210	l=12.5 mm 	- Kutna spojnica 8,L=12.5 - Corner bracket 8,L=12.5	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.060	l=32,2mm 	- Kutna spojnica 34.6,L=32.2 - Corner bracket 34.6,L=32.2	Al.	
710.074	L=32.4 mm  M8x13 	- Kutna spojnica 34.6,L=32.4 (V) - Corner bracket 34.6,L=32.4 (V)	Al.	
710.051	l=8,2mm 	- Kutna spojnica 22,2,L=8.2 - Corner bracket 22,2,L=8.2	Al.	
710.452	l=7 mm 	- Kutna spojnica 16,L=7 - Corner bracket 16,L=7	Al.	
710.462	l=28.4mm 	- Kutna spojnica 16,L=28.4 - Corner bracket 16,L=28.4	Al.	
710.469	l=28.5mm  M8x13	- Kutna spojnica 16,L=28.5 (V) - Corner bracket 16,L=28.5 (V)	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.118	 l=42mm	- Kutna spojnica 12.5,L=42 - Corner bracket 12.5,L=42	Al.	
725.119	 l=42mm M8x13	- Kutna spojnica 12.5,L=42 (V) - Corner bracket 12.5,L=42 (V)	Al.	
725.120	 l=42mm M8x13	- Kutna spojnica 12.5,L=42 (V) - Corner bracket 12.5,L=42 (V)	Al.	
725.121	 l=8,5 mm	- Kutna spojnica 12.5, L=8.5 - Corner bracket 12.5, L=8.5	Al.	
725.122	 l=56.3 mm	- Kutna spojnica 12.5,L=56.3 - Corner bracket 12.5,L=56.3	Al.	
725.123	 l=56.3 mm M8x13	- Kutna spojnica 12.5,L=56.3 (V) - Corner bracket 12.5,L=56.3 (V)	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.437	l=3,5mm 	- Kutna spojnica 8,L=3.5 - Corner bracket 8,L=3.5	Al.	
710.442	l=7.3mm 	- Kutna spojnica 12.5,L=7.3 - Corner bracket 12.5,L=7.3	Al.	
710.507	l=7.9mm 	- Kutna spojnica 14.6,L=7.9 - Corner bracket 14.6,L=7.9	Al.	
710.436	l=17.3mm 	- Kutna spojnica 18.5,L=17.3 - Corner bracket 18.5,L=17.3	Al.	
710.130	L=36,4 mm 	- Kutna spojnica 46,L=36.4 - Corner bracket 46,L=36.4	Al.	
710.131	L=36,4 mm 	- Kutna spojnica 46,L=36.4 (V) - Corner bracket 46,L=36.4 (V)	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.140	L=6,3 mm 	- Kutna spojnica 34.6,L=6.3 - Corner bracket 34.6,L=6.3	Al.	
710.153	l=10 mm 	- Kutna spojnica 18.5,L=10 - Corner bracket 18.5,L=10	Al.	
710.447	l=11.7 mm  M8x10	- Kutna spojnica 14.6,L=11.7 (V) - Corner bracket 14.6,L=11.7 (V)	Al.	
710.448	l=11.7 mm 	- Kutna spojnica 14.6,L=11.7 - Corner bracket 14.6,L=11.7	Al.	
725.138	l=43,4 mm 	- Kutna spojnica 12.5,L=43.4 - Corner bracket 12.5,L=43.4	Al.	
725.139	l=43,4 mm  M8x13	- Kutna spojnica 12.5,L=43.4 (V) - Corner bracket 12.5,L=43.4 (V)	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.211	l=18 mm  M8x10	- Kutna spojnica 8,L=18 (V) - Za profil F-0796 - Corner bracket 8,L=18 (V) - For profile F-0796	Al.	
725.212	l=16 mm 	- Kutna spojnica 8,L=16 - Za profile FT-0174F - Corner bracket 8,L=16 - For profiles FT-0174F	Al.	
725.213	l=16 mm  M8x10	- Kutna spojnica 8,L=16 (V) - Za profile FT-0174F - Kutna spojnica 8,L=16 (V) - Za profiles FT-0174F	Al.	
725.217	l=39.5 mm 	- Kutna spojnica 8,L=39.5 - Za profil F-1127 - Corner bracket 8,L=39.5 - For profile F-1127	Al.	
725.705	l=8 mm 	- Kutna spojnica 24.6, L=8 - Za profile: FT-0290HF - Corner bracket 24.6, L=8 - For profiles: FT-0290HF	Al.	
725.708	l=29,3 mm  M8x10	- Kutna spojnica 7.5,L=29.3 (V) - Profil krila krovnog prozora F-1572 - Corner bracket 7.5,L=29.3 (V) - Profile of roof window sash F-1572	Al.	


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.711	l=26 mm M8x10 	- Kutna spojnica 10, L=26 (V) - Za profile: FT-0290F; FT-0290HF - Corner bracket 10, L=26 (V) - For profiles: FT-0290F; FT-0290HF	Al.	
725.712	l=26 mm 	- Kutna spojnica 10, L=26 - Za profile: FT-0290F; FT-0290HF - Corner bracket 10, L=26 - For profiles: FT-0290F; FT-0290HF	Al.	
710.523	l=11,6 mm 	- Kutna spojnica 29.4,L=11.6 (V) - Spojni profili za klizne sisteme: FT-0194F; FT-0196F; FT-1800F; FT-1801F - Corner bracket 29.4,L=11.6 (V) - Connection profile for sliding systems: FT-0194F; FT-0196F; FT-1800F; FT-1801F	Al.	
710.524	l=15,7 mm 	- Kutna spojnica 12.5,L=15,7 (V) - Spojni profili za klizne sisteme: FT-0194F; FT-0196F; FT-1800F; FT-1801F - Corner bracket 12.5,L=15,7 (V) - Connection profile for sliding systems: FT-0194F; FT-0196F; FT-1800F; FT-1801F	Al.	
710.592	l=17.3mm 	- Kutna spojnica 16,L=17.3 - Za profil FT-1403F - Corner bracket 16,L=17.3 - For profil FT-1403F	Al.	
710.593	l=17.3mm  M8x13	- Kutna spojnica 16,L=17.3 (V) - Za profil FT-1403F - Corner bracket 16,L=17.3 (V) - For profil FT-1403F	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
730.013		- Kutna spojnica 9.9, L=40.8 - Za profil FT-0720F - Corner bracket 9.9, L=40.8 - For profile FT-0720F	Al.	
710.478	l=69.3mm  vijci 431.266	- Kutna spojnica 12.5,L=69.3 (V) - Za profil FT-0722F - Corner bracket 12.5,L=69.3 (V) - For profile FT-0722F	Al.	
730.008		- Kutna spojnica (0409,1001) 14.5, L=28.5 - Za profil FT-0722F - Corner bracket (0409.1001) 14.5, L=28.5 - For profile FT-0722F	Al.	
710.504	l=10.8 mm  vijci 431.293	- Kutna spojnica 16,L=10.8 (V) - Za profil FT-0725F - Corner bracket 16,L=10.8 (V) - For profile FT-0725F	Al.	
710.445	l=17.5mm  vijci 431.266	- Kutna spojnica 12.5,L=17.5 (V) - Za profil FT-0725F - Corner bracket 12.5,L=17.5 (V) - For profile FT-0725F	Al.	
710.011	l=7.5 mm 	- Kutna spojnica 7.5,L=7.5 - Za profil FT-0725F - Corner bracket 7.5,L=7.5 - For profile FT-0725F	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
731.010		- Kutna spojnica za komoru 19.1x1.6 - Za profile: FT-0290HF - Corner bracket for chamber 19.1x1.6 - For profiles: FT-0290HF	Zamak #3	
730.011		- Kutna spojnica za komoru 41.2x12.3 - Za profile: FT-0187F; FT-0188F - Corner bracket for chamber 41.2x12.3 - For profiles: FT-0187F; FT-0188F	Al.	
730.001		- Kutna spojnica za komoru 4.8x2 - Za profile krila prozora - Corner bracket for chamber 4.8x2 - For sash window profile	Inox	
730.002		- Kutna spojnica za komoru 4.8x2 - Za profile rama prozora - Corner bracket for chamber 4.8x2 - For frame profiles	Inox	
725.301	l=13,8mm 	- Kutna spojnica 2,L=13.8 - Za profil FM 30/20 - Corner bracket 2,L=13.8 - For profile FM 30/20	Al.	
725.401	l=4,4mm 	- Kutna spojnica 7.5,L=4.4 - Za profil FT-0173F - Corner bracket 7.5,L=4.4 - For profile FT-0173F	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
724.002		- Kopča za fasadu 50 FS (kut 90°) - Glass clamp for facade 50 FS (angle 90°)	Al.	
724.003		- Kopča za fasadu 50 FS (kut 135°) - Glass clamp for facade 50 FS (angle 135°)	Al.	
724.004		- Kopča za fasadu 50 FS - Glass clamp for facade 50 FS	Al.	
724.005		- Kopča za fasadu 50 FS - Glass clamp for facade 50 FS	Al.	
724.017		- Kopča za fasadu 50 FS - za trostruko staklo - Glass clamp for facade 50 FS - triple pane glass	Al.	
724.018		- Kopča za fasadu 50 FS (trostruko staklo) - Glass clamp for facade 50 FS (triple pane glass)	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
724.001		- Drzač okomice i vodoravnice FMO 50/32 FMV 50/32 - Mullion and transom clip FMO 50/32 FMV 50/32	Al. Zamak	
724.023		- Kopča za strukturalnu fasadu -dvostrana - za trostruko staklo - Staklo 59 mm - Glass clamp for 50 FS - two-sided - triple glass - glazing 59 mm	Al.	
724.024		- Kopča za strukturalnu fasadu - jednostrana - za trostruko staklo - Staklo 59 mm - Glass clamp for 50 FS - one-sided - triple glass - glazing 59 mm	Al.	
724.025		- Nastavak za kopče 724.002 i 724.003 za 50 FS - za trostruko staklo - Extention for glass clamp 724.002 and 724.003 for 50 FS - for triple pane glass	Al.	
521.454		- Kopča za spoj drvene podkonstrukcije L=70 - Wooden substructure connection clamp L=70	Al.	
521.455		- Kopča za spoj drvene podkonstrukcije L=90 - Wooden substructure connection clamp L=90	Al.	





Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.456		- Kopča za spoj drvene podkonstrukcije L=130 - Wooden substructure connection clamp L=130	Al.	






Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
501.001		- Al. nosač okomice na C-vodilicu L=170 mm - Al. mullion support for C-guide rail, L=170 mm	Al.	Par Pair
501.002		- Al. nosač okomice na C-vodilicu L=80 mm - Al. mullion support for C-guide rail, L=80 mm	Al.	Par Pair
501.004		- Al. nosač okomice na beton, L=170 mm - Al. mullion anchor for concrete, L=170 mm	Al.	Par Pair
501.005		- Al. nosač okomice na beton, L=80 mm - Al. mullion support for concrete, L=80 mm	Al.	Par Pair
501.019		- Al. nosač okomice na beton, L=124 mm - Al. mullion support for concrete, L=124 mm	Al.	
501.032		- Al. nosač okomice na beton, L= 80 mm - Al. mullion support for concrete, L= 80 mm	Al.	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
501.020		- Gornji-donji nosač okomice FMO 50/200 - Upper-lower mullion support FMO 50/200	Al.	
501.021		- Gornji-donji nosač okomice FMO 50/160 - Upper-lower mullion support FMO 50/160	Al.	
501.022		- Gornji-donji nosač okomice FMO 50/140 - Upper-lower mullion support FMO 50/140	Al.	
501.023		- Gornji-donji nosač okomice FMO 50/120 - Upper-lower mullion support FMO 50/120	Al.	
501.024		- Gornji-donji nosač okomice FMO 50/90 - Upper-lower mullion support FMO 50/90	Al.	
501.044		- Gornji-donji nosač okomice FMO 50/270 - Upper-lower mullion support FMO 50/270	Al.	



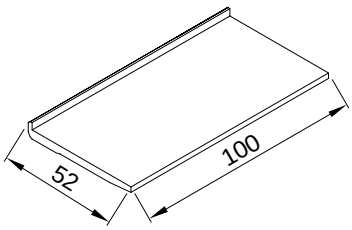
Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.005		- Držač stakla (27x100) - Glass support (27x100)	Al.	
521.067		- Držač stakla (34x100) - Glass support (34x100)	Al.	
521.014		- Držač stakla (38x100) - Glass support (38x100)	Al.	
521.066		- Držač stakla (43x100) - Glass support (43x100)	Al.	
521.127		- Držač stakla (48x100) - Glass support (48x100)	Al.	
521.122		- Držač stakla (52x100) - Glass support (52x100)	Al.	




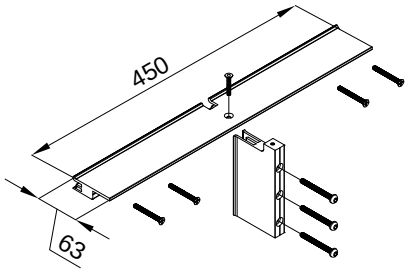

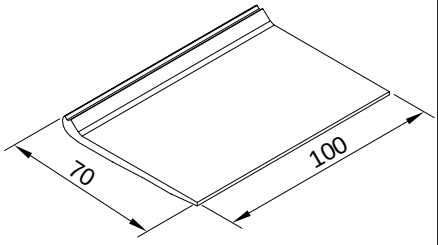
Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.064		- Držač stakla (54x100) - Glass support (54x100)	Al.	
521.234		- Držač za trostruko staklo u fasadi (63x100) - Triple pane glass support (63x100)	Al	
521.331		- Držač stakla (44x100) - Glass support (44x100)	Al.	
521.242		- Obostrani držač stakla s potporom u fasadi 50FK i 50FS (63x450) - set - Doublesided glass support with a vertical support (63x450) - set	Al.	
521.452		- Držač stakla (56.4x100) - Fasada spoj na drvo/čelik - Glass support (56.4x100) - Facade combination with wood/steel	Al.	
521.517		- Nosač stakla fasada 50 FK-S (70x100) - Glass support facade 50 FK-S	Al.	






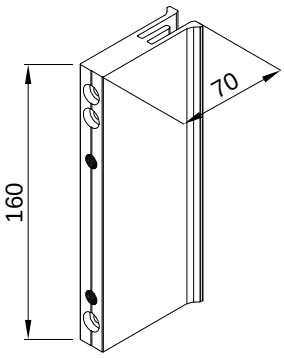
Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.235		- Držač za vanjska sjenila (50 mm x100 mm) - Bracket for exterior shading (50 mm x100 mm)	Al	
521.236		- Držač za vanjska sjenila (50 mm x160 mm) - Bracket for exterior shading (50 mm x160 mm)	Al	
521.237		- Držač za vanjska sjenila (70 mm x100 mm) - Bracket for exterior shading (70 mm x100 mm)	Al	
521.238		- Držač za vanjska sjenila (70 mm x160 mm) - Bracket for exterior shading (70 mm x160 mm)	Al	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.007		- Za profil FT-0157 - Držač vanjskog stakla-set - Stara oznaka: VDV-S - For profile FT-0157 - Exterior glass support-set - Former code: VDV-S	Al.	
521.013		- Za profil FT-0157 - Držač vanjskog stakla za strukturalnu izvedbu sa horiz. poklopnom lajsnom-set - For profile FT-0157 - Exterior fixed field glass support za structural facade with horiz. cover cap-set	Al.	
521.039		-Držač vanjskog fiksnog stakla - jednostrani (četiri po staklu)-set - Exterior fixed field glass clamp - one-sided (four per glass)-set	Al.	
521.040		- Držač vanjskog fiksnog stakla - dvostrani (četiri po staklu)-set - Exterior fixed field glass clamp - two-sided (four per glass)-set	Al.	
521.041		- Za profil FT-0162, FT-0170, FT-0164 - Držač vanjskog stakla (četiri po staklu)-set - For profile FT-0162, FT-0170, FT-0164 - Exterior glass support (four per glass)-set	Al.	

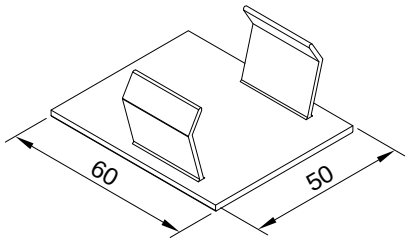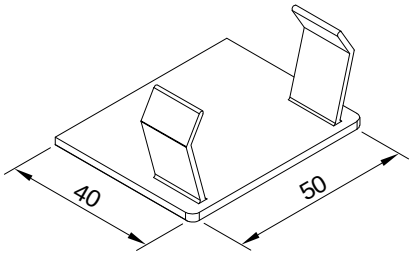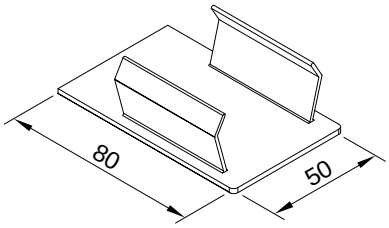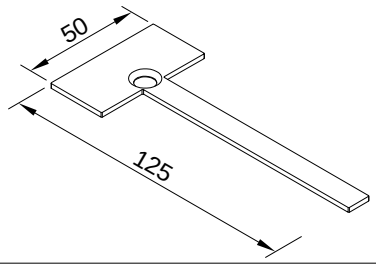


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.491		- Umetak poklopne lajsne FMO 50/61 - Cover cap for profile FMO 50/61	Al.	
521.493		- Umetak poklopne lajsne FMO 50/40 - Cover cap for profile FMO 50/40	Al.	
521.494		- Umetak poklopne lajsne FMO 50/80 - Cover cap for profile FMO 50/80	Al.	
521.496		- Umetak poklopne lajsne FM 50/125 - Cover cap for profile FM 50/125	Al.	
521.497		- Umetak poklopnih lajsni: FMV 50/14, FMO 50/15; FMO 50/25 - Cover cap for profiles: FMV 50/14, FMO 50/15; FMO 50/25	Al.	
521.498		- Umetak poklopne lajsne FMO 50/23 - Cover cap for profile FMO 50/23	Al.	

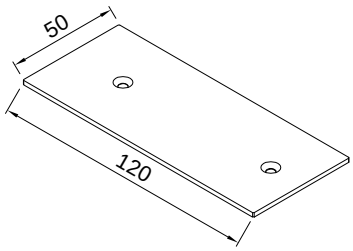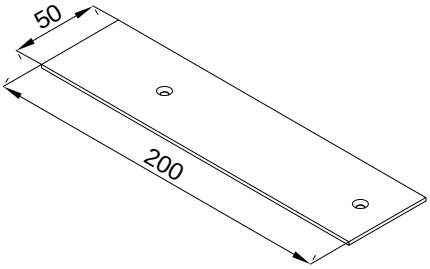Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.432		- Umetak poklopne lajsne FM 50/120 - Cover cap for profile FM 50/120	Al.	
521.485		- Umetak poklopne lajsne FMO 50/150 - Cover cap for profile FMO 50/150	Al.	
521.368		- Umetak poklopne lajsne FPL 50/200 - Cover cap for profile FPL 50/200	Al.	


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.101		- Al. podloška L=55 mm (Ø17) - Al. washer L=55 mm (Ø17)	Al.	
521.058		- Al. podloška L=40 mm (Ø13) - Al. washer L=40 mm (Ø13)	Al.	
521.165		- Al. podloška L=40 mm (Ø15) - Al. washer L=40 mm (Ø15)	Al.	
521.516		- Inox distancer (Ø14/11), L=78 mm - Stainless steel spacer (Ø14/11), L=78 mm	Inox	
521.506		- Inox distancer (Ø16/13), L=87 mm - Stainless steel spacer (Ø16/13), L=87 mm	Inox	
521.166		- Inox distancer (Ø14/11), L=50 mm - Stainless steel spacer (Ø14/11), L=50 mm	Inox	

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.015		- Inox distancer za čelični nosač (Ø16/13), L=50 mm - Stainless steel spacer for steel support (Ø16/13), L=50 mm	Inox	
521.016		- Inox distancer za čelični nosač (Ø16/13), L=62 mm - Stainless steel spacer for steel support (Ø16/13), L=62 mm	Inox	
521.010		- Inox distancer za čelični nosač za profil FOK -120/120, (Ø16/13), L=93 mm - Stainless steel spacer for steel support for profile FOK-120/120, (Ø16/13), L=93 mm	Inox	
521.265		- Inox distancer za čelični nosač (Ø14/11), L=64 mm - Stainless steel spacer for steel support (Ø14/11), L=64 mm	Inox	
391.148		- Aluminijska nosiva pločica francuskog balkona lijeva (50 mm x 54 mm x 8 mm) - French balcony left aluminium glass support (50 mm x 54 mm x 8 mm)	Al.	
391.149		- Aluminijska nosiva pločica francuskog balkona desna (50 mm x 54 mm x 8 mm) - French balcony right aluminium glass support (50 mm x 54 mm x 8 mm)	Al.	






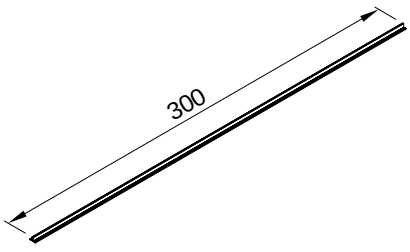
Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
385.006		- Spojnica okomice i vodoravnice - Stara oznaka: SP-50-KF - Mullion and transom connector - Former code: SP-50-KF	Zamak	
521.008		- Elastični držač opšava - Elastic sheet clamp	Al.	
521.457		- Obrađen profil za fasadu 50FK - Spoj na drvo/čelik L = 1000 mm - Processed profile for facade 50FK - Connection to wood/steel L=1000 mm	Al.	
521.458		- Obrađen profil za fasadu 50FK - Spoj na drvo/čelik L = 1500 mm - Processed profile for facade 50FK - Connection to wood/steel L=1500 mm	Al.	
521.459		- Obrađen profil za fasadu 50FK - Spoj na drvo/čelik L = 2000 mm - Processed profile for facade 50FK - Connection to wood/steel L=2000 mm	Al.	
521.461		- Obrađen profil za fasadu 50FK - Spoj na drvo/čelik L = 3000 mm - Processed profile for facade 50FK - Connection to wood/steel L=3000 mm	Al.	






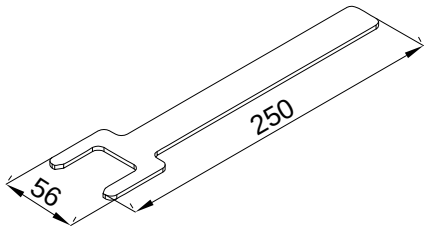
Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.397		- Spojnica okomice/vodoravnice - Fasada 50FK spoj na drvo/čelik - Transom/mullion connector - Facade 50FK wood/steel connection	Al.	
521.074		- Spojnica profila FMO 50/40 L=250 mm - Connection between two profiles FMO 50/40 L=250 mm	Al.	
230.029		- Ključ za 724.001 - Key for 724.001	Čelik Steel	





PVC elementi
PVC elements






Oznaka Code	Opis Description	Izgled View	Materijal Material	Oznaka proizvođača Manufacturer code
370.026	Podmetač za staklo 100 x 20 x 1 mm Glazing packer 100 x 20 x 1 mm		PVC	BO 5120001
370.027	Podmetač za staklo 100 x 30 x 1 mm Glazing packer 100 x 30 x 1 mm			BO 5120031
370.028	Podmetač za staklo 100 x 40 x 1 mm Glazing packer 100 x 40 x 1 mm			BO 5120051
370.029	Podmetač za staklo 100 x 50 x 1 mm Glazing packer 100 x 50 x 1 mm			BO 5120111
370.030	Podmetač za staklo 100 x 20 x 2 mm Glazing packer 100 x 20 x 2 mm			BO 5120002
370.031	Podmetač za staklo 100 x 30 x 2 mm Glazing packer 100 x 30 x 2 mm			BO 5120032
370.032	Podmetač za staklo 100 x 40 x 2 mm Glazing packer 100 x 40 x 2 mm			BO 5120052
370.033	Podmetač za staklo 100 x 50 x 2 mm Glazing packer 100 x 50 x 2 mm			BO 5120112
370.034	Podmetač za staklo 100 x 20 x 3 mm Glazing packer 100 x 20 x 3 mm			BO 5120003
370.035	Podmetač za staklo 100 x 24 x 3 mm Glazing packer 100 x 24 x 3 mm			BO 5120013
370.037	Podmetač za staklo 100 x 30 x 3 mm Glazing packer 100 x 30 x 3 mm			BO 5120033
370.038	Podmetač za staklo 100 x 40 x 3 mm Glazing packer 100 x 40 x 3 mm			BO 5120053
370.039	Podmetač za staklo 100 x 30 x 4 mm Glazing packer 100 x 30 x 4 mm			BO 5120034
370.040	Podmetač za staklo 100 x 50 x 4 mm Glazing packer 100 x 50 x 4 mm			BO 5120114
370.041	Podmetač za staklo 100 x 30 x 5 mm Glazing packer 100 x 30 x 5 mm			BO 5120035
370.043	Podmetač za staklo 100 x 34 x 5 mm Glazing packer 100 x 34 x 5 mm			BO 5120045
370.044	Podmetač za staklo 100 x 24 x 6 mm Glazing packer 100 x 24 x 6 mm			BO 5120016
370.045	Podmetač za staklo 100 x 30 x 6 mm Glazing packer 100 x 30 x 6 mm			BO 5120036

NAPOMENA: Navedeni podmetači stakla kompatibilni su sa staklo kitovima.
REMARK: Listed glazing packers are compatible with glass sealants.

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
374.005		- PVC profil 17 mm - PVC spacer 17 mm	PVC	
374.006		- PVC profil sa perom 23 mm - PVC spacer with a flap 23 mm	PVC	
374.007		- PVC profil 23 mm - PVC spacer 23 mm	PVC	
374.008		- PVC profil 5 mm - PVC spacer 5 mm	PVC	
374.009		- PVC profil 7 mm - PVC spacer 7 mm	PVC	
374.115		- PVC profil 17 mm - PVC spacer 17 mm	PVC	

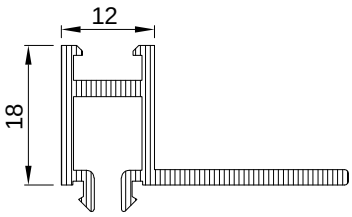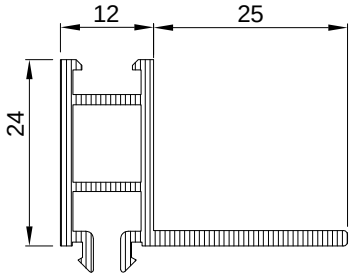
Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
370.067		- Distancer na okomici 32 mm - Polyamid spacer 32 mm	Poliamid	
374.010		- Parapetni fasadni umetak s perom 18 mm - Facade spandrel insert with a flap 18 mm	PVC	
374.011		- Parapetni fasadni umetak s perom 24 mm - Facade spandrel insert with a flap 24 mm	PVC	
374.012		- PVC distancer 19 mm - PVC spacer	PVC	
374.013		- PVC distancer 15 mm - PVC spacer	PVC	
374.071		- Parapetni fasadni umetak 18 mm - Facade spandrel insert 18 mm	PVC	

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
375.007		- Umetak za profil FMO 50/22 - Cover for profile FMO 50/22	PVC	
375.008		- Umetak za profil FMO 50/30 - Cover for profile FMO 50/30	PVC	
375.009		- Umetak za profil FMO 50/60 - Cover for profile FMO 50/60	PVC	
375.022		- Umetak za profil FMV 50/14-K - Cover for profile FMV 50/14-K	PVC	Par Pair

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
374.023		- Podmetač nosača 170x120x2 - Mullion support pad 170x120x2	PVC	
374.076		-Podmetač nosača 125x90x2,4 -Mullion support pad 125x90x2,4	PVC	
374.077		-Podmetač nosača 80x90x2,4 -Mullion support pad 80x90x2,4	PVC	
373.054		-Gornji čep okomice francuskog balkona - Upper cover cap of french balcony profile	PVC	
370.070.01 03		-Maska s klapnom za drenažni otvor -Oznaka proizvođača Master: A2145R9010-bijela, A2145-crna. -Boje 01-bijela, 03-crna - Drainage slot mask with a flap -Manufacture code Master: A2145R9010-white, A2415-black. -Color: 01-white, 03-black	PVC	

Mehanizmi
Mechanisms


Okov fasadnog ventusa - STUBLINA
Hung vent hardware - STUBLINA



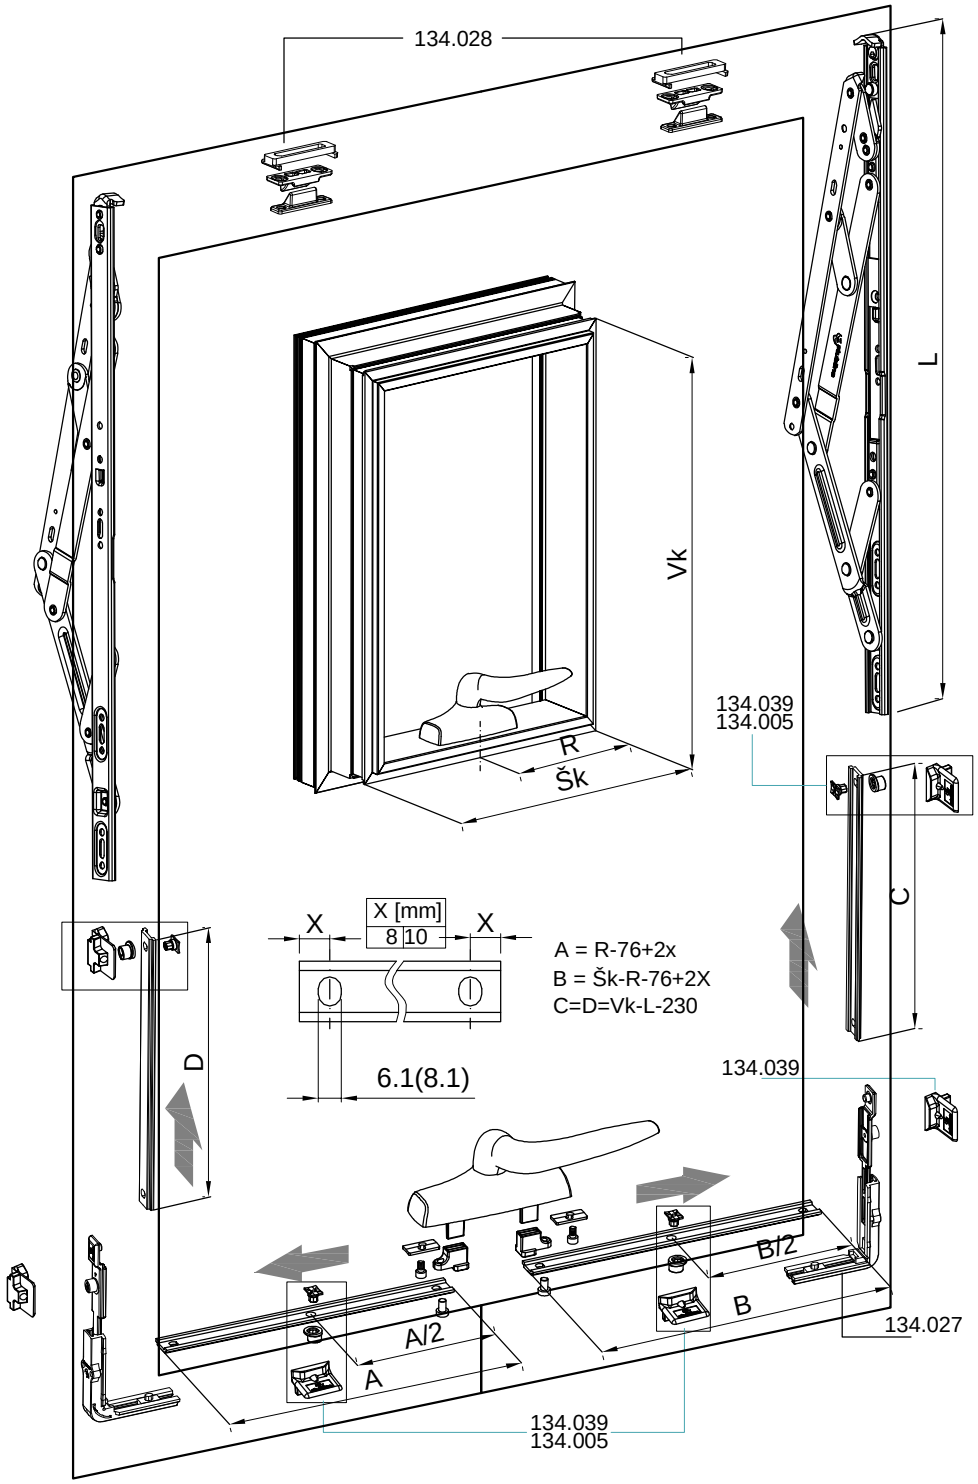



Izbor škare na osnovu visine krila (Vk)
Stays selection based on the sash height (Vk)

	134.019		134.020		134.021		134.022	
Vk [mm] min	600		1200		1600		1800	
Vk [mm] max	1200		1600		1800		2000	
[kg]max	180		180		180		180	
α	25°	30°	20°	25°	15°	20°	15°	20°


Točke ključanja
Locking points




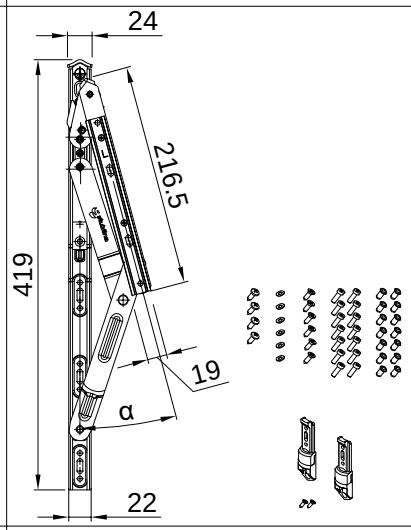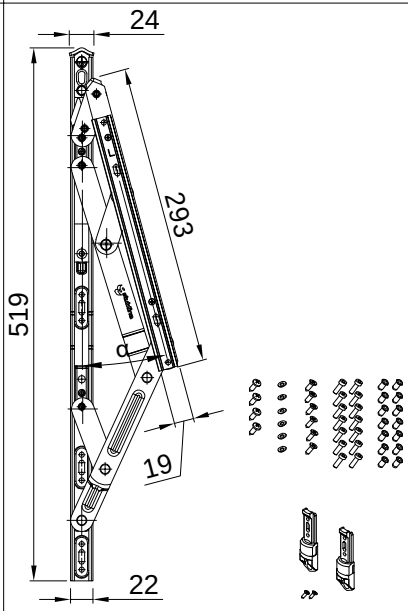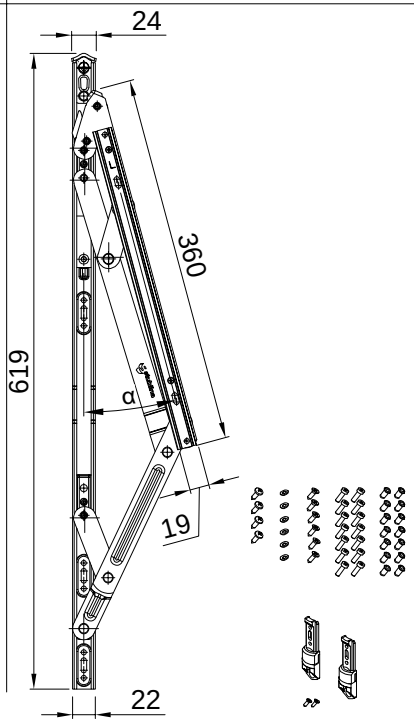Oznaka Code	Kod proizvođača Manucturer code	Škare fasadnog ventusa Hung vent friction stays	Opis Description	Materijal Material	Proizvođač Manufacturer
134.019	F4060.05.55 PT		visina krila 600-1200 mm sash height 600-1200 mm težina <130 kg weight <130 kg kut otvaranja - 25° ili 30° opening angle - 25° ili 30° set	Inox	Stublina
134.020	F4060.07.55 PT		visina krila 1200-1600 mm sash height 1200-1600 mm težina <180 kg weight <180 kg kut otvaranja - 20° ili 25° opening angle - 20° ili 25° set	Inox	Stublina
134.021	F4060.08.55 PT		visina krila 1600-1800 mm sash height 1600-1800 mm težina <180 kg weight <180 kg kut otvaranja - 15° ili 20° opening angle - 15° ili 20° set	Inox	Stublina






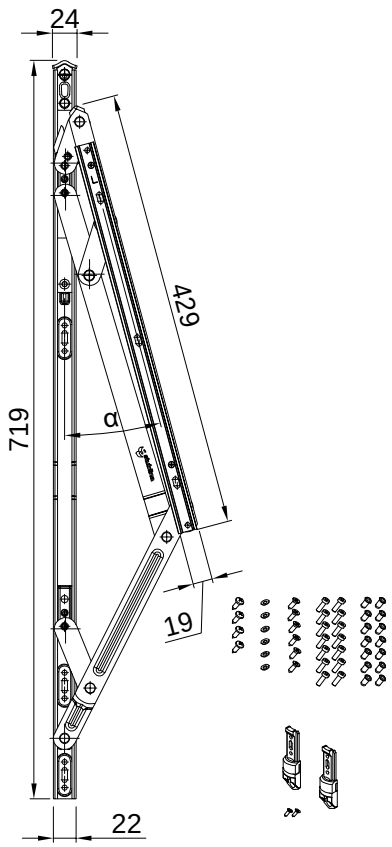
Oznaka Code	Kod proizvođača Manucturer code	Škare fasadnog ventusa Hung vent friction stays	Opis Description	Materijal Material	Proizvođač Manufacturer
134.022	F4060.09.55 PT		visina krila 1800-2000 mm Sash height 1800-2000 mm težina <180 kg weight <180 kg kut otvaranja - 15° ili 20° opening angle - 15° ili 20° set	Inox	Stublina







- IZBOR VELIČINE ŠKARE ZA FASADNE PROFILE
- FRICTION STAYS SIZE SELECTION FOR FACADE PROFILES













Izbor škare na osnovu visine krila (Vk) ***Stays selection based on the sash height (Vk)***								
	134.019		**134.020**		**134.021**		**134.022**	
Vk [mm] min	600		1200		1600		1800	
Vk [mm] max	1200		1600		1800		2000	
α	25°	30°	20°	25°	15°	20°	15°	20°

Oznaka Code	Izgled View	Opis Description	Materijal Material	Proizvođač Manufacturer
104.012.01 L 02 L 03 L		- Ručka za fasadne profile - desna - Proizvođačeva oznaka: 1107.00.310 L 1107.00.315 L 1107.00.313 L - Boje: 01- bijela; 02 - siva;03 - crna - Handle for profile handles - Producer code: 1107.00.310 L 1107.00.315 L 1107.00.313 L - Color: 01- white; 02 - gray;03 - black	AlSi Zamak	Stublina
104.012.01 D 02 D 03 D		- Ručka za fasadne profile - lijeva - Proizvođačeva oznaka: 1107.00.310 D 1107.00.315 D 1107.00.313 D (Stublina) - Boje: 01- bijela; 02 - siva;03 - crna - Handle for profile handles - Producer code: 1107.00.310 D 1107.00.315 D 1107.00.313 D (Stublina) - Color: 01- white; 02 - gray;03 - black	AlSi Zamak	Stublina
134.027		-Kutni prijenosnik ključanja -Proizvođačeva oznaka 4010.20 -Corner locking transmission -Manufacturer code:4010.20		Stublina
134.028		-Pasivno ključanje -Proizvođačeva oznaka 4060.45 Passiv locking -Manufacturer code:4060.45		Stublina
134.039		- Prihvatnik tuljca - Proizvođačeva oznaka 4060.10.51 - Striker - Manufacturer code: 4060.10.51		Stublina
134.005		- Dodatno ključanje - zapinjač - Stara oznaka 4010.27 - Additional locking pin - Manufacturer code: 4010.27		Stublina


Oznaka Code	Izgled View	Opis Description	Materijal Material	Proizvođač Manufacturer
143.051		Motor za otvaranje ventusa Proizvođačeva oznaka: 07885 Hung vent opening device Manufacturer code: 07885		Giesse
143.052		Držač lanca na krilu Proizvođačeva oznaka: 05909 Sash fixing bracket Manufacturer code: 05909		Giesse
143.053		Motor za zaključavanje Proizvođačeva oznaka: 07895 Locking device Manufacturer code: 07895		Giesse
143.054		Prihvatnik tuljca Proizvođačeva oznaka: 01213 Striker Manufacturer code: 01213		Giesse
143.055		Kutni prijenosnik Proizvođačeva oznaka: 04019K Corner transmission Manufacturer code: 04019K		Giesse
143.056		Dodatno ključanje - tuljac Proizvođačeva oznaka: 04030K - Eccentric pin for additional locking Manufacturer code: 04030		Giesse
143.057		Fiksni tuljac Proizvođačeva oznaka: 04049 Fixed pin Manufacturer code: 04049		Giesse

Oznaka Code	Izgled View	Opis Description	Materijal Material	Proizvođač Manufacturer
111.006.01 02 03		- Šarka za krovni prozor - Stara oznaka: AD-100/1 - Boje: 01- bijela; 02 - siva;03 - crna - Roof window hinges - Former code: AD-100/1 - Color: 01- white; 02 - gray;03 - black	Al.	

Oznaka Code	Kod proizvođača Manucturer code	Škare paralnog otvaranja Parallel stays	Opis Description	Materijal Material	Proizvođač Manufacturer
132.005 D	6-34810-00-R-8	PAS350 R 	Visina krila 700-1100 mm Sash height 700-1100 mm Težina krila < 200 kg Sash weight < 200 kg Max. otvaranje krila u odnosu na ram: Max. opening distance of the sash from the frame: - otvaranje ručkom -150 mm - manually opened -150 mm - otvaranje motorom- 180 mm - opened with a motor - 180 mm	Inox	G-U
132.005 L	6-34810-00-L-8	PAS350 L 	Visina krila 700-1100 mm Sash height 700-1100 mm Težina krila < 200 kg Sash weight < 200 kg Max. otvaranje krila u odnosu na ram: Max. opening distance of the sash from the frame: - otvaranje ručkom -150 mm - manually opened -150 mm - otvaranje motorom- 180 mm - opened with a motor - 180 mm	Inox	G-U
132.006 D	6-34811-00-R-8	PAS450 R 	Visina krila 480-720 mm Sash height 480-720 mm Težina krila < 100 kg Sash weight < 100 kg Max. otvaranje krila u odnosu na ram: Max. opening distance of the sash from the frame: - otvaranje ručkom -150 mm - manually opened -150 mm - otvaranje motorom- 250 mm - opened with a motor - 250 mm	Inox	G-U
132.006 L	6-34811-00-L-8	PAS450 L 	Visina krila 480-720 mm Sash height 480-720 mm Težina krila < 100 kg Sash weight < 100 kg Max. otvaranje krila u odnosu na ram: Max. opening distance of the sash from the frame: - otvaranje ručkom -150 mm - manually opened -150 mm - otvaranje motorom- 250 mm - opened with a motor - 250 mm	Inox	G-U

Oznaka Code	Kod proizvođača Manucturer code	Škare paralnog otvaranja Parallel stays	Opis Description	Materijal Material	Proizvođač Manufacturer
132.007 D	6-34812-00-R-8	PAS670 R 	Visina krila 700-1100 mm Sash height 700-1100 mm Težina krila < 200 kg Sash weight < 200 kg Max. otvaranje krila u odnosu na ram: Max. opening distance of the sash from the frame: - otvaranje ručkom -150 mm - manually opened -150 mm - otvaranje motorom- 180 mm - opened with a motor - 180 mm	Inox	G-U
132.007 L	6-34812-00-L-8	PAS670 L 	Visina krila 700-1100 mm Sash height 700-1100 mm Težina krila < 200 kg Sash weight < 200 kg Max. otvaranje krila u odnosu na ram: Max. opening distance of the sash from the frame: - otvaranje ručkom -150 mm - manually opened -150 mm - otvaranje motorom- 180 mm - opened with a motor - 180 mm	Inox	G-U
132.008 D	6-34813-00-R-8	PAS930 R 	Visina krila 960-2000 mm Sash height 960-2000 mm Težina krila < 200 kg Sash weight < 200 kg Max. otvaranje krila u odnosu na ram: Max. opening distance of the sash from the frame: - otvaranje ručkom -150 mm - manually opened -150 mm - otvaranje motorom- 250 mm - opened with a motor - 250 mm	Inox	G-U
132.008 L	6-34813-00-L-8	PAS930 L 	Visina krila 960-2000 mm Sash height 960-2000 mm Težina krila < 200 kg Sash weight < 200 kg Max. otvaranje krila u odnosu na ram: Max. opening distance of the sash from the frame: - otvaranje ručkom -150 mm - manually opened -150 mm - otvaranje motorom- 250 mm - opened with a motor - 250 mm	Inox	G-U

Dijagram nosivosti škara G-U
Load diagram of G-U parallel stays

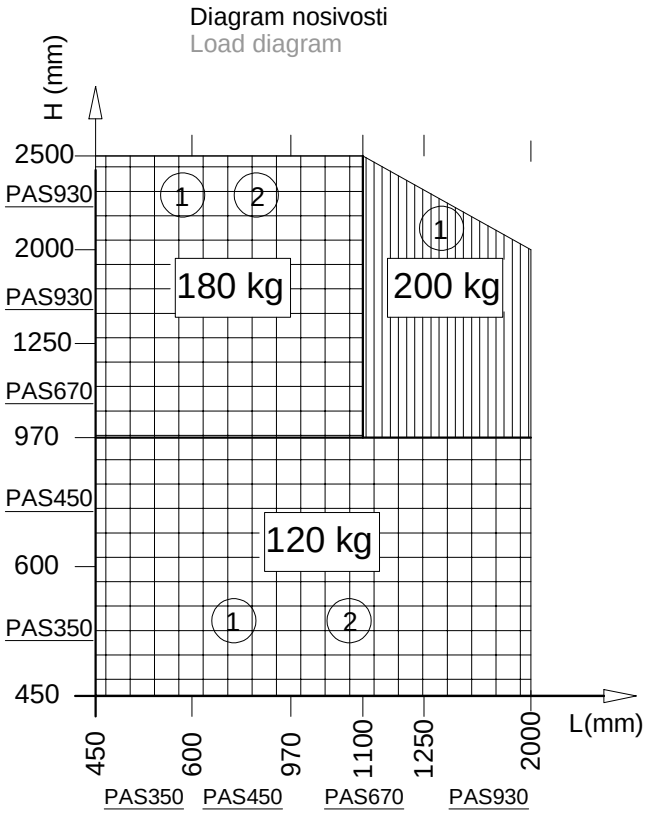


1 —— Otvaranje elektromotorom
1 —— Opened with a motor
2 —— Ručno otvaranje
2 —— Manually opened

IZBOR SHEMA ZA RUČNO PARALELNO OTVARANJE G-U
POSITIONING AND SELECTION OF PARALLEL STAYS G-U

2x HB2 graničnik staviti na 150 mm
jedan sa svake strane okvira
2x HB2 spacer to be placed 150 mm
from each side of the opening

2x HB2 graničnik staviti na 150 mm
jedan sa svake strane okvira
2x HB2 spacer to be placed 150 mm
from each side of the opening

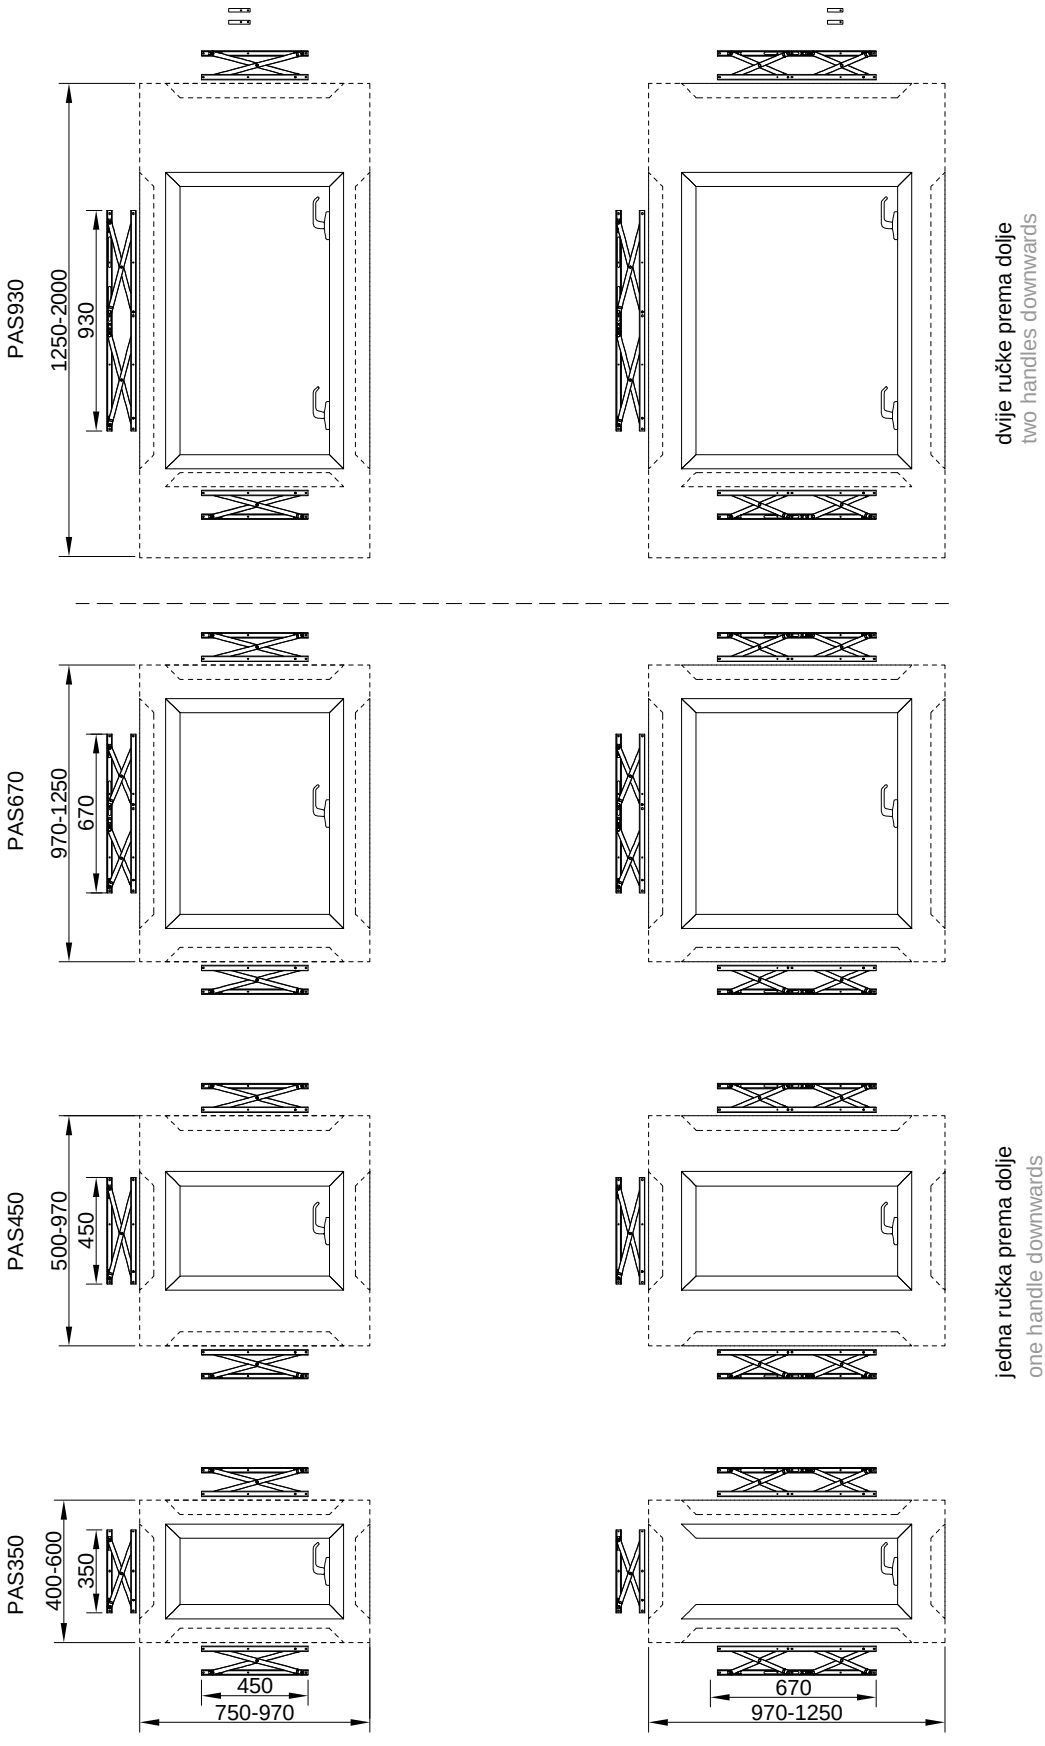


dvije ručke prema dolje
two handles downwards

jedna ručka prema dolje
one handle downwards


PAS450
max.težina 100 kg
PAS450
max.weight 100 kg

PAS450
max.težina 200 kg
PAS450
max.weight 200 kg





IZBOR SHEMA ZA RUČNO PARALELNO OTVARANJE-G-U
SELECTION AND POSITIONING OF G-U PARALLEL STAYS FOR PARALLEL





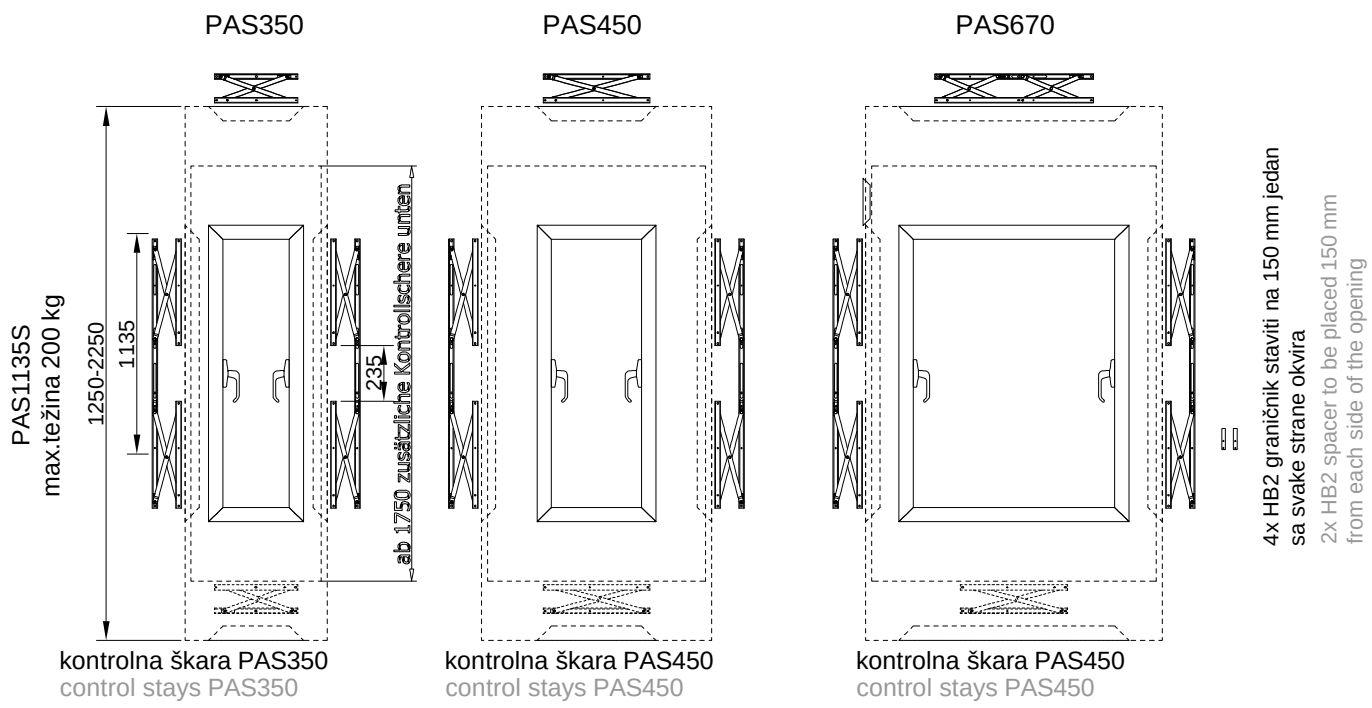




dvije ručke na bočnim stranama two handles on the sides

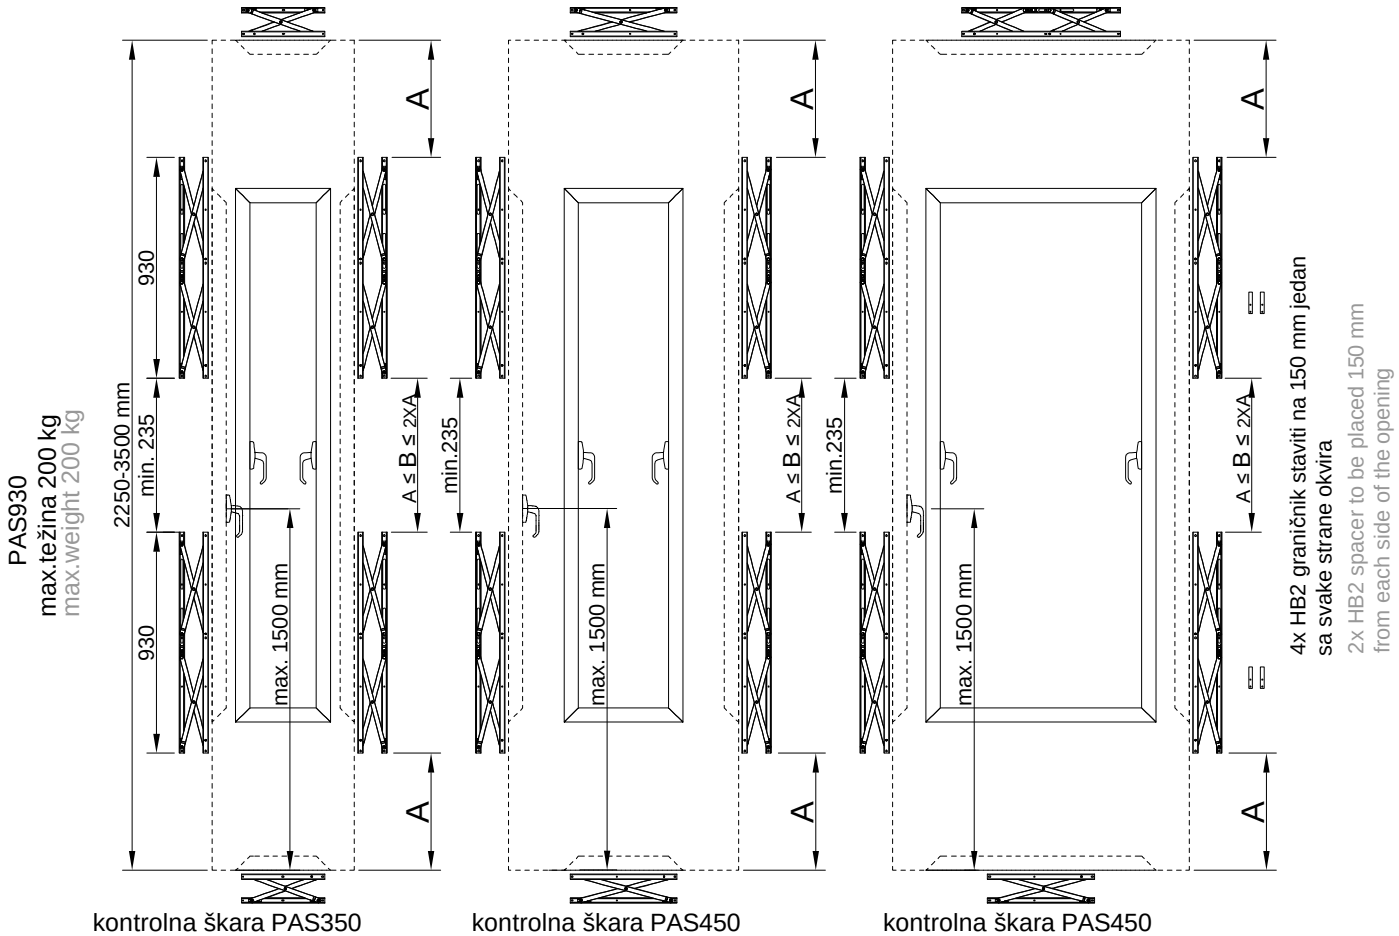








- zaključavanja ne smije prekoračiti visinu od 1500 mm - locking points must not exceed 1500 mmin in height




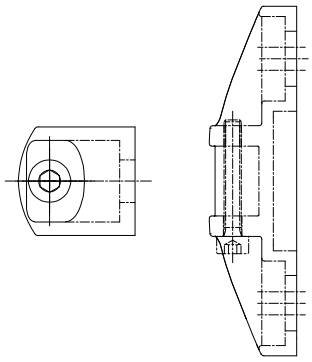


Oznaka Code	Kod proizvođača Manufacturer code	Okov motor Motor accessories	Opis Description	Materijal Material	Proizvođač Manufacturer
142.073	521620		Lančani motor za otvaranje i zatvaranje KS2 200 S12 24V R, hod 200 mm; (paralelno otvaranje) Chain motor for opening and closing KS2 200 S12 24V R; stroke length 200 mm; (parallel opening)	-	G-U
142.072	151440		F41 prihvatnik lanca motora KS2/KS4 Casement bracket F41	-	G-U
142.090	515910		Motor za zaključavanje FVUI 24V Locking motor FVUI 24V	-	G-U
142.076	524177		M-com komunikacijski modul M-com communication module	-	G-U

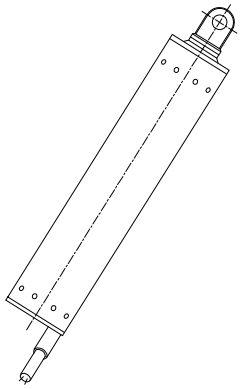

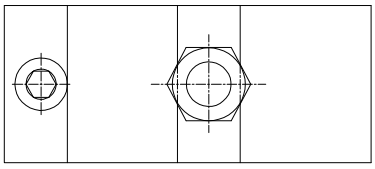

Oznaka Code	Kod proizvođača Manufacturer code	Okov motor Motor accessories	Opis Description	Materijal Material	Proizvođač Manufacturer
142.077 142.078 142.079 142.080 142.081	515210 515220 515230 515240 515250		Motor za krovnni prozor s navojnim vretenom 24V Threaded spindle motor for roof window 24V PLA8 100 S12 24V - hod 100 PLA8 200 S12 24V - hod 200 PLA8 300 S12 24V - hod 300 PLA8 400 S12 24V - hod 400 PLA8 500 S12 24V - hod 500	-	G-U
142.082	151000		Prihvatno vreteno na profilu F10.6 Profile bracket spindle F10.6	-	G-U
142.083	155800		Konzola K5 Console K5	Čelik Steel	G-U
142.084	515900		Spojni prsten B4 Coupling ring B4	Al	G-U
142.085	159900		L nosač K21K L bracket K21K	Čelik Steel	G-U







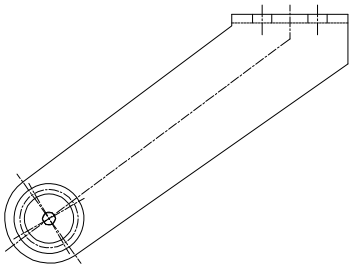
Oznaka Code	Kod proizvođača Manufacturer code	Okov motor Motor accessories	Opis Description	Materijal Material	Proizvođač Manufacturer
142.086 142.087 142.088	496231 496241 496251		Motor za krovnni prozor s navojnim vretenom 230V Threaded spindle motor for roof window 24V SP8-Z 300 S2 230V - hod 300 SP8-Z 400 S2 230V - hod 400 SP8-Z 500 S2 230V - hod 500	-	G-U
142.089	151000		Konzola K57.2 Console K57.2	Čelik Steel	G-U






Brtve
Gaskets








Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
358.012		- Brtva prema staklu /vanjska/ 3.5mm - Stara oznaka: 351.012 - Glass gasket /exterior/ 3.5mm - Former code: 351.012	EPDM	71
358.017		- Brtva prema staklu /unutarnja/ 13mm - Stara oznaka: 351.017 - Glass gasket /interior/ 13mm - Former code: 351.017	EPDM	71
358.016		- Brtva prema staklu /unutarnja/ 11mm - Stara oznaka: 351.016 - Glass gasket /interior/ 11mm - Former code: 351.016	EPDM	71
358.015		- Brtva prema staklu /unutarnja/ 9mm - Stara oznaka: 351.015 - Glass gasket /interior/ 9mm - Former code: 351.015	EPDM	71
358.014		- Brtva prema staklu /unutarnja/ 7mm - Stara oznaka: 351.014 - Glass gasket /interior/ 7mm - Former code: 351.014	EPDM	71
351.009		- Brtva prema staklu /unutarnja/ nosi 6mm - Glass gasket /interior/ 6mm	EPDM	71
358.013		- Brtva prema staklu /unutarnja/ 5mm - Stara oznaka: 351.013 - Glass gasket /interior/ 5mm - Former code: 351.013	EPDM	71






Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
358.011		- Brtva prema staklu /unutarnja/ 3mm - Stara oznaka: 351.011 - Glass gasket /interior/ 3mm - Former code: 351.011	EPDM	71
351.005		- Brtva prema staklu unutarnja, 10,2 mm - Glass gasket /interior/, 10,2 mm	EPDM	71
351.006		- Brtva prema staklu unutarnja, 4,2 mm - Glass gasket /interior/, 4,2 mm	EPDM	71
358.008		- Brtva prema staklu unutarnja, fasada pod kutom - Stara oznaka: 351.008 - Glass gasket/interior/, angled facade - Former code: 351.008	EPDM	71
358.007		- Brtva prema staklu vanjska, fasada pod kutom - Stara oznaka: 351.007 - Glass facade /exterior/, angled facade - Former code: 351.007	EPDM	71
358.019		- Brtva za fasadu 50FS - Stara oznaka: 351.019 - Structural glazing gasket 50FS - Former code: 351.019	Silicon	71
328.001		Brtva u profilu krila i rama Stara oznaka: 321.001 Sash gasket in sash and frame profile Former code: 321.001	EPDM	61

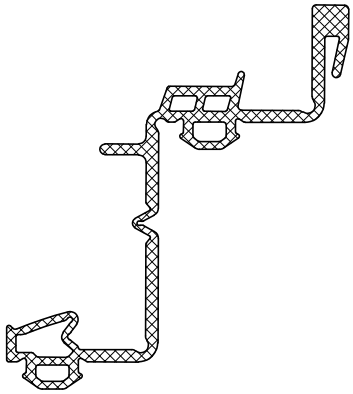
Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
351.018		- Brtva u ramu strukturalne fasade - Stara oznaka: 02984 (200341) - Frame gasket in structural facade - Former code: 02984 (200341)	EPDM	71
358.021		- Brtva u krilu strukturalne fasade - Stara oznaka: 351.021 - Sash gasket in structure facade - Former code: 351.021	EPDM	71
328.006		- Brtva u profilu krila i rama - Gasket in sash and frame profile	EPDM	60
354.012		- Umetak za brtvu 351.018 - Stara oznaka: OFN2762 (200411) - Insert for gasket 351.018 - Former code: OFN2762 (200411)	EPDM	71
318.001		- Brtva prema staklu-unutarnja (3 mm) - Stara oznaka: 311.001 - Gasket to the glass-interior (3 mm) - Former code: 311.001	EPDM	71
318.002		- Brtva prema staklu-unutranja (4 mm) - Stara oznaka: 311.002 - Gasket to the glass-interior (4 mm) - Former code: 311.002	EPDM	71

Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
358.020		- Brtva za krovni prozor - Stara oznaka: 354.019 - Roof opening gasket - Former code: 354.019	TPE	71
328.101		- Brtva u krilu /vanjska/ - Stara oznaka: 322.001 - Sash gasket /exterior/ - Former code: 322.001	EPDM	61
358.010		- Brtva za poklopnu lajsnu FM 50/12 - Cover cap gasket FM 50/12 - Stara oznaka 358.010 - Former code 358.010	EPDM	71
334.004		- Centralna brtva (Termo 85) - Central gasket (Termo 85)	TPE	71
328.007		-Brtva prema staklu, vanjska -Gasket to the glass, exterior	EPDM	
328.002		- Brtva prema staklu /vanjska/ - Stara oznaka: 321.002 - Glass gasket /exterior/ - Former code: 321.002	EPDM	61
328.003		- Brtva prema staklu /vanjska/ - Stara oznaka: 321.003 - Glass gasket /exterior/ - Former code: 321.003	EPDM	61









Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
354.011		- Brtva u profilu krila - Stara oznaka: 200 500 - Gasket in sash profile - Former code: 200 500	ELASTRON G SEBS	65
354.010		- Brtva u profilu krila - Stara oznaka: 200 501 - Gasket in sash profile - Former code: 200 501	ELASTRON G SEBS	65
354.009		- Brtva vrata i prozora u fasadi - Stara oznaka: 200 502 - Door and window gasket in facade - Former code: 200 502	ELASTRON G SEBS	65
351.001		- Brtva u profilu rama /unutarnja/ - Gasket in frame profile /interior/	EPDM	71
351.002		- Centralna brtva - Central gasket	EPDM	71
351.003		- Brtva u ramu fasadnog otvora /vanjska/ - Gasket in facade opening frame /exterior/	EPDM	71
318.014		-Brtva prema staklu-unutarnja -Gasket to the glass-interior -Stara oznaka 311.014 -Former code 311.014	EPDM	70±5 ShA







Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
318.015		-Brtva prema staklu, unutarnja -Gasket to the glass, interior	EPDM	70
318.016		-Brtva prema staklu-unutarnja -Gasket to the glass,-interior	EPDM	70
318.017		-Brtva prema staklu-unutarnja -Gasket to the glass-interior	EPDM	70
340.055		- Odstojna brtva - Spacer gasket	ELASTRON	
351.029		- Vanjska brtva za lajsnu polustrukturalne fasade - Exterior gasket for cover cap of semistructural glazing	EPDM	71
355.001		- Brtva na okomici prema vodoravnici 50 mm - Stara oznaka: 217 585 - Mullion-transom connection gasket 50 mm - Former code: 217 585	EPDM	35
354.015		- Brtva za odvod kondenzata 3 mm - Gasket of condesation drainage 3 mm	TPE	71


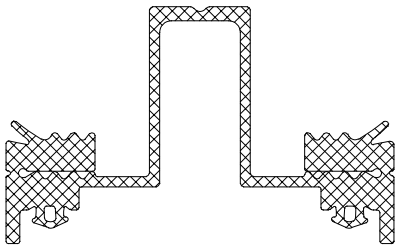
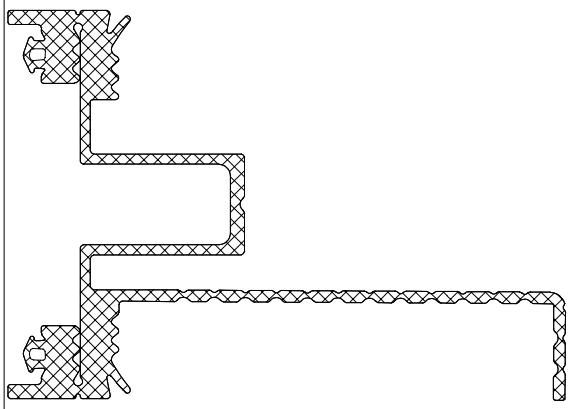

Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
354.014		- Brtva za odvod kondenzata 5 mm - Gasket of condesation drainage 5 mm	TPE	71
354.016		- Brtva za odvod kondenzata 7 mm - Gasket of condesation drainage 7 mm	TPE	71
350.007		- Fasadna brtva na okomici - Spoj fasade na drvo/čelik - Facade mullion gasket - Facade combination with wood/steel	EPDM	71
350.008		- Fasadna brtva na vodoravnici - Spoj fasade na drvo/čelik - Facade transom gasket - Facade combination with wood/steel	EPDM	71
338.050		-Centralna brtva -Central gasket	EPDM + spužvasti EPDM EPDM + foam EPDM	70 ShA 0.9 g/cm3


Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
338.001		-Centralna brtva -Central gasket	EPDM	60 ± 5
317.002		- Brtva u profilu krila - Gasket in sash profile	EPDM + Spužvasti EPDM EPDM + Foam EPDM	60 ShA + 0.90 kg/m^3


Dodaci
Accessories




Oznaka Code	Izgled-presjek View-cross section	Opis Descripton
430.001	 M 1:2	fischer FBN 6/5
430.013	 M 1:2	fischer FBN II 10/30
430.020	 M 1:2	fischer FBN II 12/30
430.170		Tipla pvc SX5 X25
430.200		HS 50/30 M16
431.117	 M 1:2	M12x110 DIN 933
431.231	 M 1:2	M12x80 DIN 931
431.234	 M 1:2	M12x100 DIN 931





Oznaka Code	Izgled-presjek View-cross section	Opis Descripton
431.235	 M 1:2	M12x110 DIN 931
431.236	 M 1:2	M12x120 DIN 931
431.213	 M 1:2	M10x70 DIN 931
431.218	 M 1:2	M10x100 DIN 931
431.301		M3x4 DIN 914
432.016		- Matica M12 - DIN 985 - Nut M12 - DIN 985
432.015		- Matica M10 - DIN 985 - Nut M10 - DIN 985
432.124		Podloška K12 DIN 9021 Washer K12 DIN 9021
432.120		Podloška K5 DIN 9021 Washer K5 DIN 9021







Oznaka Code	Izgled-presjek View-cross section	Opis Descripton
434.008		FN 4/8 Alu
434.014		FN 5/8 Niro
432.123		- Podloška K10 - DIN 9021 - Washer K10 - DIN 9021
432.115		- Podloška U12 - DIN 125 - Washer U12 - DIN 125
433.214		- Vijak za drvo M5x60 DIN 9048 - 104405096 Spax Halbrundkopf - Screw for wood M5x60 DIN 9048 - 104405096 Spax Halbrundkopf
433.215		- Vijak za drvo M5x40 DIN 9048 - Screw for wood M5x40 DIN 9048
431.329		M5x10 DIN 914







Oznaka Code	Opis Description	Izgled-presjek View-cross section	Materijal Material	Napomena Remark
433.002	3.5x9.5 DIN 7981		Inox A2	
433.004	3.5x16 DIN 7981			
433.006	3.5x22 DIN 7981			
433.015	3.9x9.5 DIN 7981			
433.016	3.9x13 DIN 7981			
433.017	3.9x16 DIN 7981			
433.019	3.9x22 DIN 7981			
433.040	4.8x9.5 DIN 7981			
433.041	4.8x13 DIN 7981			
433.042	4.8x16 DIN 7981			
433.043	4.8x19 DIN 7981			
433.044	4.8x22 DIN 7981			
433.045	4.8x25 DIN 7981			
433.046	4.8x32 DIN 7981			
433.047	4.8x38 DIN 7981			
433.048	4.8x45 DIN 7981			
433.049	4.8x50 DIN 7981			
433.178	4.8x55 DIN 7981			
433.050	4.8x60 DIN 7981			
433.051	4.8x70 DIN 7981			
433.052	4.8x80 DIN 7981			
433.053	4.8x90 DIN 7981			
433.054	4.8x100 DIN 7981			
433.077	6.3x25 DIN 7981			







Oznaka Code	Opis Description	Izgled-presjek View-cross section	Materijal Material	Napomena Remark
433.090	3.5x9.5 DIN 7982		Inox A2	
433.091	3.5x13 DIN 7982			
433.092	3.5x16 DIN 7982			
433.093	3.5x19 DIN 7982			
433.094	3.5x22 DIN 7982			
433.095	3.5x25 DIN 7982			
433.096	3.5x32 DIN 7982			
433.104	3.9x13 DIN 7982			
433.105	3.9x16 DIN 7982			
433.107	3.9x22 DIN 7982			
433.116	4.2x13 DIN 7982			
433.117	4.2x16 DIN 7982			
433.118	4.2x19 DIN 7982			
433.129	4.8x16 DIN 7982			
433.132	4.8x25 DIN 7982			
433.133	4.8x32 DIN 7982			
433.134	4.8x38 DIN 7982			
433.135	4.8x45 DIN 7982			
433.136	4.8x50 DIN 7982			
433.177	4.8x55 DIN 7982			
433.137	4.8x60 DIN 7982			
433.138	4.8x70 DIN 7982			
433.150	5.5x50 DIN 7982			
433.152	5.5x60 DIN 7982			



Oznaka Code	Opis Description	Izgled-presjek View-cross section	Materijal Material	Napomena Remark
433.164	6.3x25 DIN 7982		Inox A2	
433.200	6.3x25 DIN 7504-K		Čelik Zn	
433.206	AW-A4-5,5x45 mm		Inox	
433.217	AW-A4-5,5x40 mm			
433.207	AW-A4-5,5x65 mm			







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
365.028		- Gumeni umetak za prebacivanje kapljevina na spoju okomica-50 FK - Stara znaka: OS 501 - Mullion joint rubber insert for drainage transition-50 FK - Former code: OS 501	TPE	
363.021		- Umetak za izvod kapljevina-50 FK - Drainage spout	Tvrda guma	
347.004		- Četkasta brtva 7x5.5 - Stara oznaka: PB*HFC - Brush gasket 7x5.5 - Former code: PB*HFC		
366.018		- Kutnik centralne brtve 351.002 - Corner for central gasket 351.002	EPDM	
363.099		- Fasadni umetak za prebacivanje kapljevine - Facade insert for transferring liquids	EPDM	





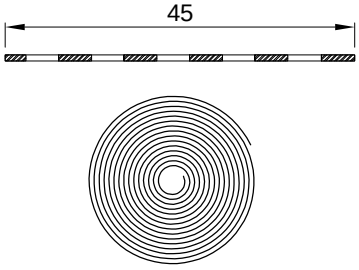
Oznaka Code	Opis Description	Izgled-presjek View-cross section	Materijal Material	Napomena Remark
340.013		- Izolacijska ispuna s ljepljivom trakom (43x12) - Facade insulation with a sticky band (43x12)	XPE	
340.035		- Izolacijski ispuna Ø24 mm /Nomatec/ - Oznaka proizvođača: 3000166 - Isolation profile Ø24 mm /Nomatec/ - Manufacturer code: 3000166		
340.017		- Izolacijska uspuna (22x26)za fasadu 50 FK - Facade insulation (22x26) for 50 FK	XPE	
340.015		- Izolacijska ispuna (22x21) za fasadu 50 FK - Facade insulation (22x21) for 50 FK	XPE	
348.002		- Izolacijska ispuna s ljepljivom trakom (37x8) - Facade insulation with a sticky band (37x8)	PPE	
421.001		- Butilna traka 45 mm x 0,8mm (rola 10m) - Butyl tape 45 mm x 0,8mm (roled 10m)	-	

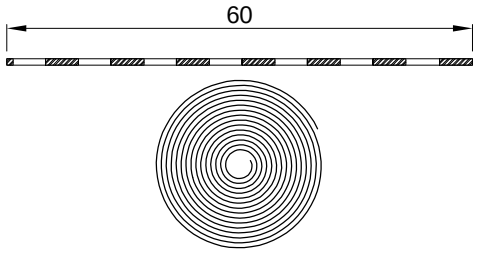
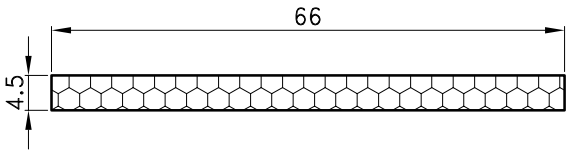



Oznaka Code	Opis Description	Izgled-presjek View-cross section	Materijal Material	Napomena Remark
421.006		- Butilna traka 60mm x 0,8mm (rola 10m) - Butyl tape 60mm x 0,8mm (roled 10m)	-	
340.419	 M 1:2	- Termoblok za komoru:14,8x114 Za profil: FT-0194F - Termoblock for chamber:14,8x114 For profile: FT-0194F	XPS	
340.420		- Termoblok za komoru:5x67 Za profil: FT-0194F - Termoblock for chamber:5x67 For profile: FT-0194F	XPS	
340.421	 M 1:2	- Termoblok za komoru:14,8x120 Za profil: FT-0196F - Termoblock for chamber:14,8x120 For profile: FT-0196F	XPS	
340.511	 M 1:2	- Termoblok za komoru:14,8x90 Za profile: FT-1800F i FT-1801F - Termoblock for chamber:14,8x90 For profiles: FT-1800F & FT-1801F	XPS	
421.007		- EPDM folija 30 mm x 0,75 mm (rola 25 m) - EPDM foil 30 mm x 075 mm (roled 25 m)	EPDM	

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
366.005		- Gumeni odstojnik za vodoravnicu FMV 50/88 - Stara znaka: DG 502/88 - Dilatation rubber for transom FMV 50/88 - Former code: DG 502/88	TPE	
365.033		- Gumeni odstojnik za vodoravnicu FMV 50/118 - Stara oznaka DG 502/118 - Dilatation rubber for transom FMV 50/118 - Former code: DG 502/118	TPE	
366.006		- Gumeni odstojnik za vodoravnicu FMV 50/158 - Stara oznaka DG 502/158 - Dilatation rubber for transom FMV 50/158 - Former code: DG 502/158	TPE	
366.007		- Gumeni odstojnik za vodoravnicu FMV 50/198 - Stara oznaka DG 502/198 - Dilatation rubber for transom FMV 50/198 - Former code: DG 502/198	TPE	
366.008		- Gumeni odstojnik za pom.vodoravnicu FVS 50/158 - Stara oznaka DG 502/158-A - Dilatation rubber for auxiliary transom FVS 50/158 - Former code: DG 502/158-A	TPE	
366.009		- Gumeni odstojnik za pom.vodoravnicu FVS 50/118 - Stara oznaka DG 502/118-A - Dilatation rubber for auxiliary transom FVS 50/118 - Former code: DG 502/118-A	TPE	

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
366.010		- Gumeni odstojnik za pom.vodoravnicu FVS 50/88 - Stara oznaka: DG 502/88-A - Dilatation rubber for auxiliary transom FVS 50/88 - Former code: DG 502/88-A	TPE	
366.011		- Gumeni odstojnik za vodoravnicu FMV 50/138 - Dilatation rubber for transom FMV 50/138	TPE	

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
361.003		- Ravni gumeni odstojnik za vodoravnicu FMV 50/88 - Stara znaka: DG 503/88 - Flat dilatation rubber for transom FMV 50/88 - Former code: DG 503/88	TPE	
361.004		- Ravni gumeni odstojnik za vodoravnicu FMV 50/118 - Stara znaka: DG 503/118 - Flat dilatation rubber for transom FMV 50/118 - Former code: DG 503/118	TPE	
361.005		- Ravni gumeni odstojnik za vodoravnicu FMV 50/158 - Stara znaka: DG 503/158 - Flat dilatation rubber for transom FMV 50/158 - Former code: DG 503/158	TPE	
361.006		- Ravni gumeni odstojnik za vodoravnicu FMV 50/198 - Stara znaka: DG 503/198 - Flat dilatation rubber for transom FMV 50/198 - Former code: DG 503/198	TPE	
361.007		- Ravni gumeni odstojnik za pom.vodoravnicu FVS 50/158 - Stara oznaka: DG 503/158-P - Flat dilatation rubber for auxiliary transom FVS 50/158 - Former code: DG 503/158-P	TPE	
361.032		- Ravni gumeni odstojnik za vodoravnicu FMV 50/268 - Flat dilatation rubber for transom FMV 50/268		


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
361.008		-Ravni gumeni odstojnik za pom.vodoravnicu FVS 50/118 -Stara oznaka: DG 503/118-P -Flat dilatation rubber for auxiliary transom FVS 50/118 -Former code: DG 503/118-P	TPE	
361.009		-Ravni gumeni odstojnik za pom.vodoravnicu FVS 50/88 -Stara oznaka: DG 503/88-A -Flat dilatation rubber for auxiliary transom FVS 50/88 -Former code: DG 503/88-A	TPE	
361.011		-Ravni gumeni odstojnik za vodoravnicu FMV 50/138 -Flat dilatation rubber for transom FMV 50/138	TPE	
361.012		-Ravni gumeni odstojnik za pomoćnu vodoravnicu FVS 50/138 -Flat dilatation rubber for auxiliary transom FVS 50/138	TPE	
361.013		-Ravni gumeni odstojnik za pomoćnu okomicu FPO 50/136 -Flat dilatation rubber for auxiliary transom FPO 50/136	TPE	
361.010		-Gumeni odstojnik za vodoravnicu FMV 50/32 -Stara oznaka: DG 503/32 -Flat dilatation rubber for transom FMV 50/32 -Former code: DG 503/32	TPE	

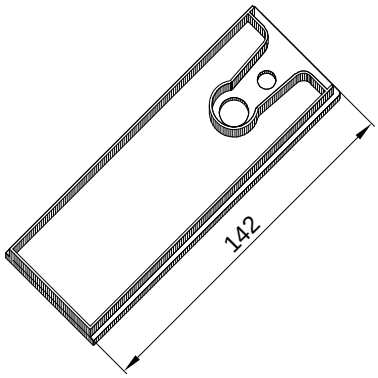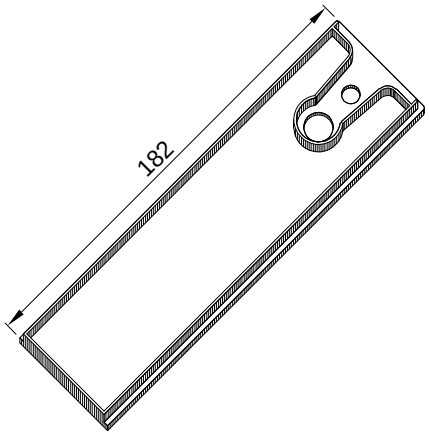Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
361.047		-Ravni gumeni odstojnik za vodoravnicu FMV 50/228 -Flat dilatation rubber for transom FMV 50/228	TPE	
365.029		- Gumeni odstojnik za vodoravnicu FMV 50/88 - Stara znaka: DG 501/88 - Dilatation rubber for transom FMV 50/88 - Former code: DG 501/88	TPE	
365.030		- Gumeni odstojnik za vodoravnicu FMV 50/118 - Stara znaka: DG 501/118 - Dilatation rubber for transom FMV 50/118 - Former code: DG 501/118	TPE	
365.031		- Gumeni odstojnik za vodoravnicu FMV 50/158 - Stara znaka: DG 501/158 - Dilatation rubber for transom FMV 50/158 - Former code: DG 501/158	TPE	
365.032		- Gumeni odstojnik za vodoravnicu FMV 50/198 - Stara znaka: DG 501/198 - Dilatation rubber for transom FMV 50/198 - Former code: DG 501/198	TPE	

Obrada i montaža
Processing and montage


Fasada na 2 oslonca
Facade with 2 supports

- Spoj direktno na beton
- Connection directly on concrete

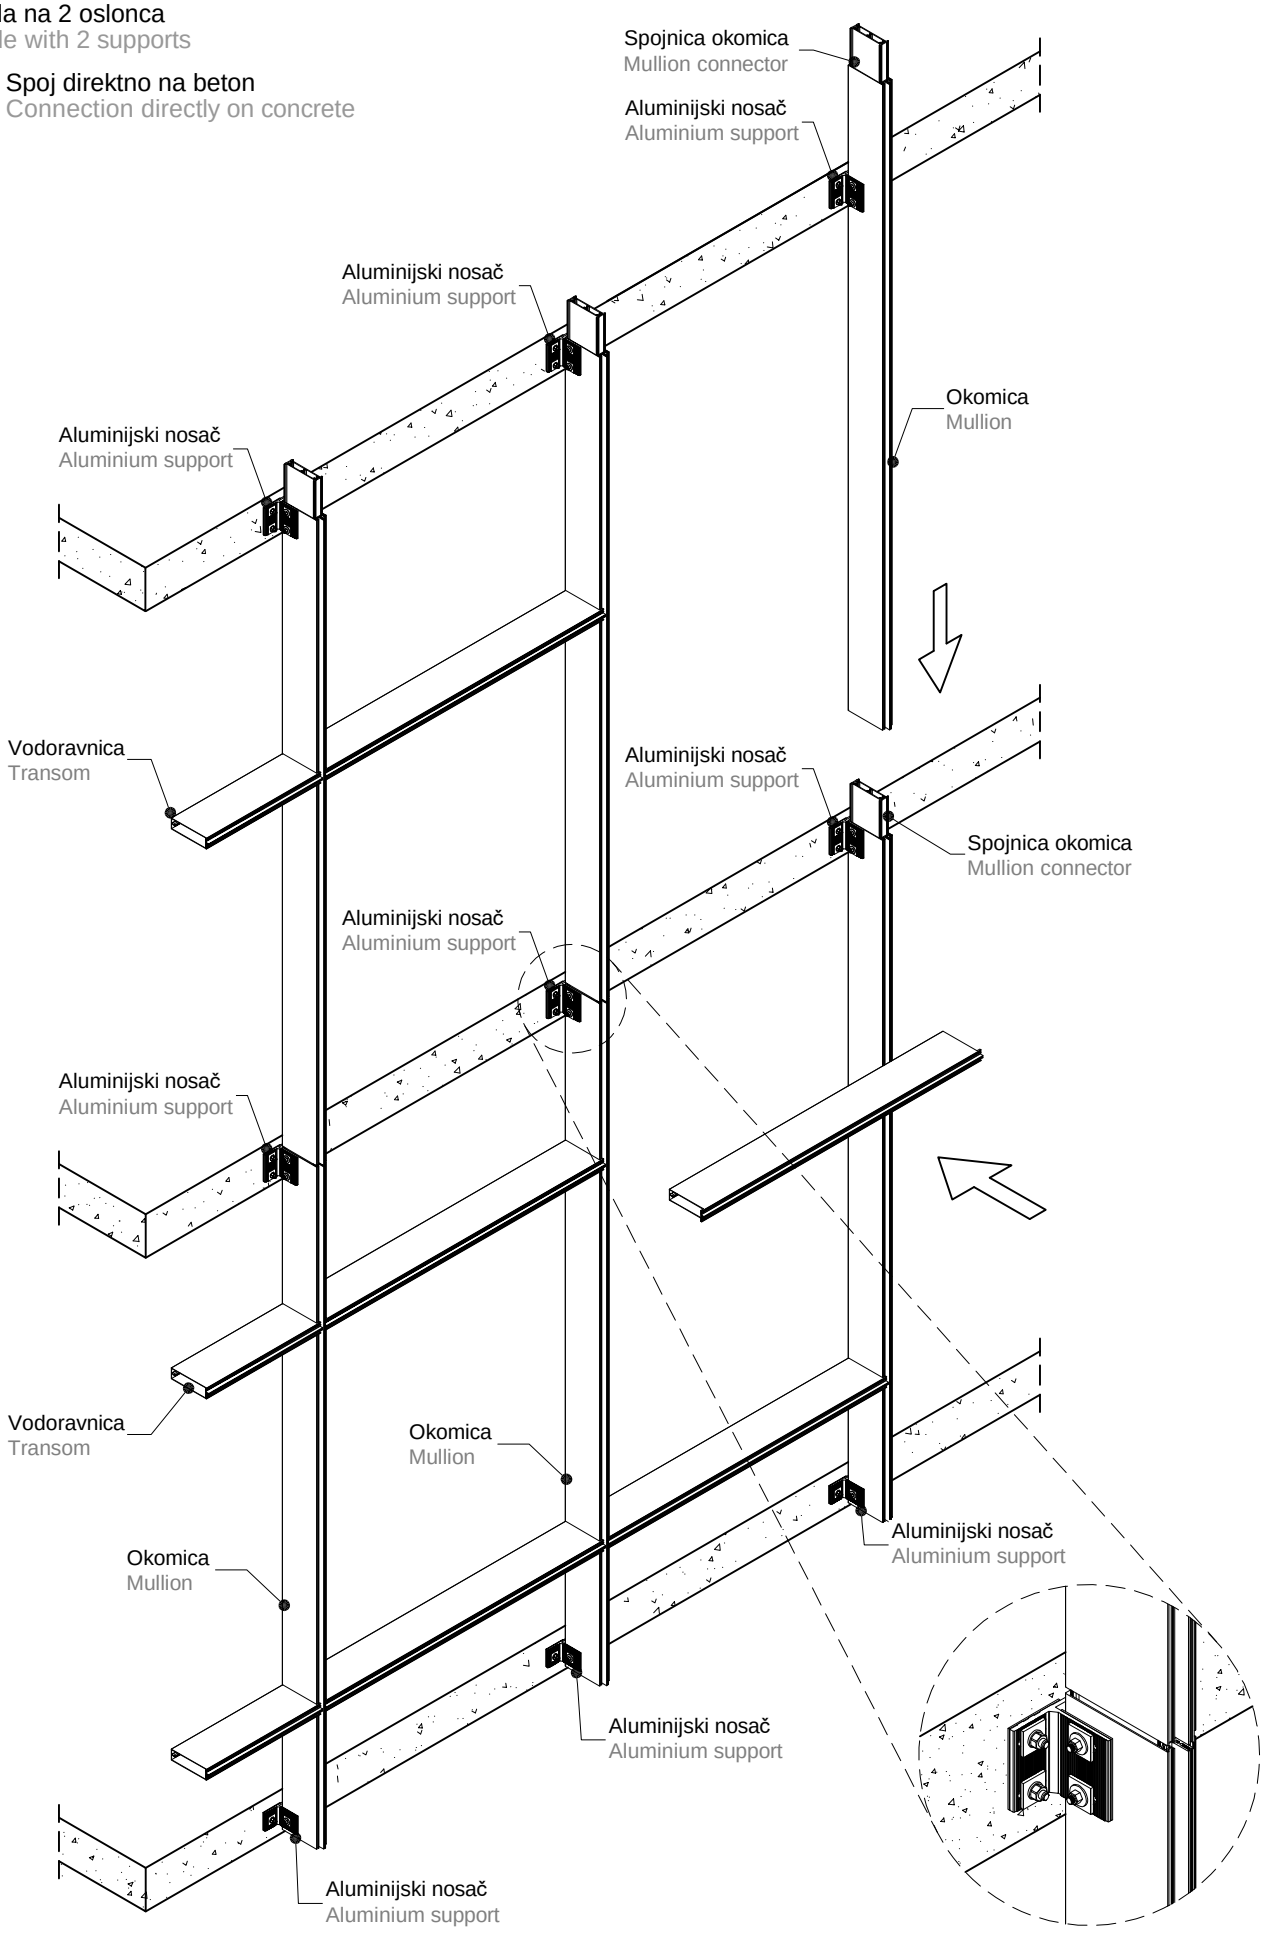


Fasada na 2 oslonca
Facade with 2 supports

- Spoj pomoću C - vodilice
- Connection with C - guide rail

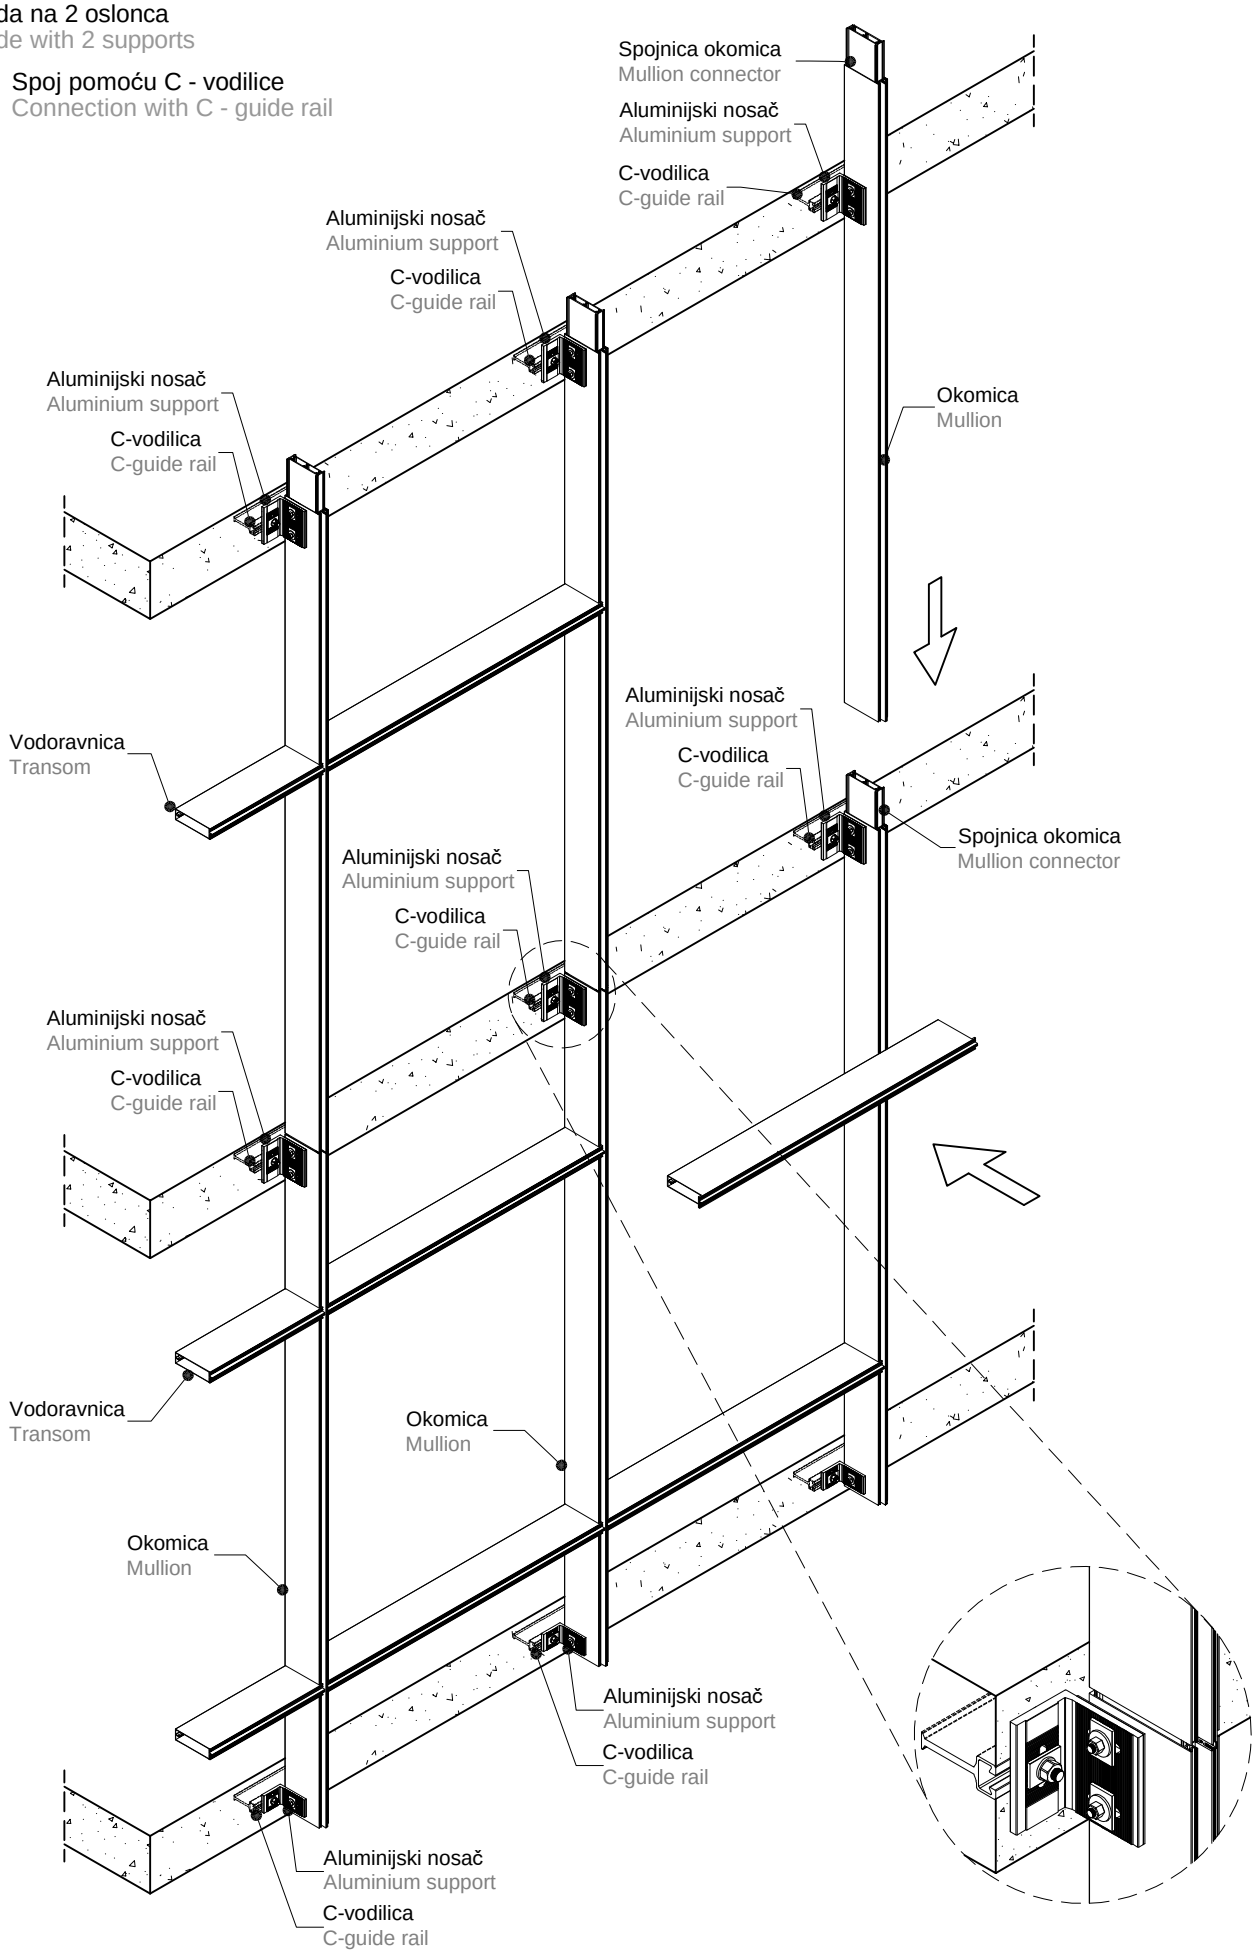

Fasada na 3 oslonca
Facade with 3 supports

- Spoj direktno na beton
- Connection directly on concrete

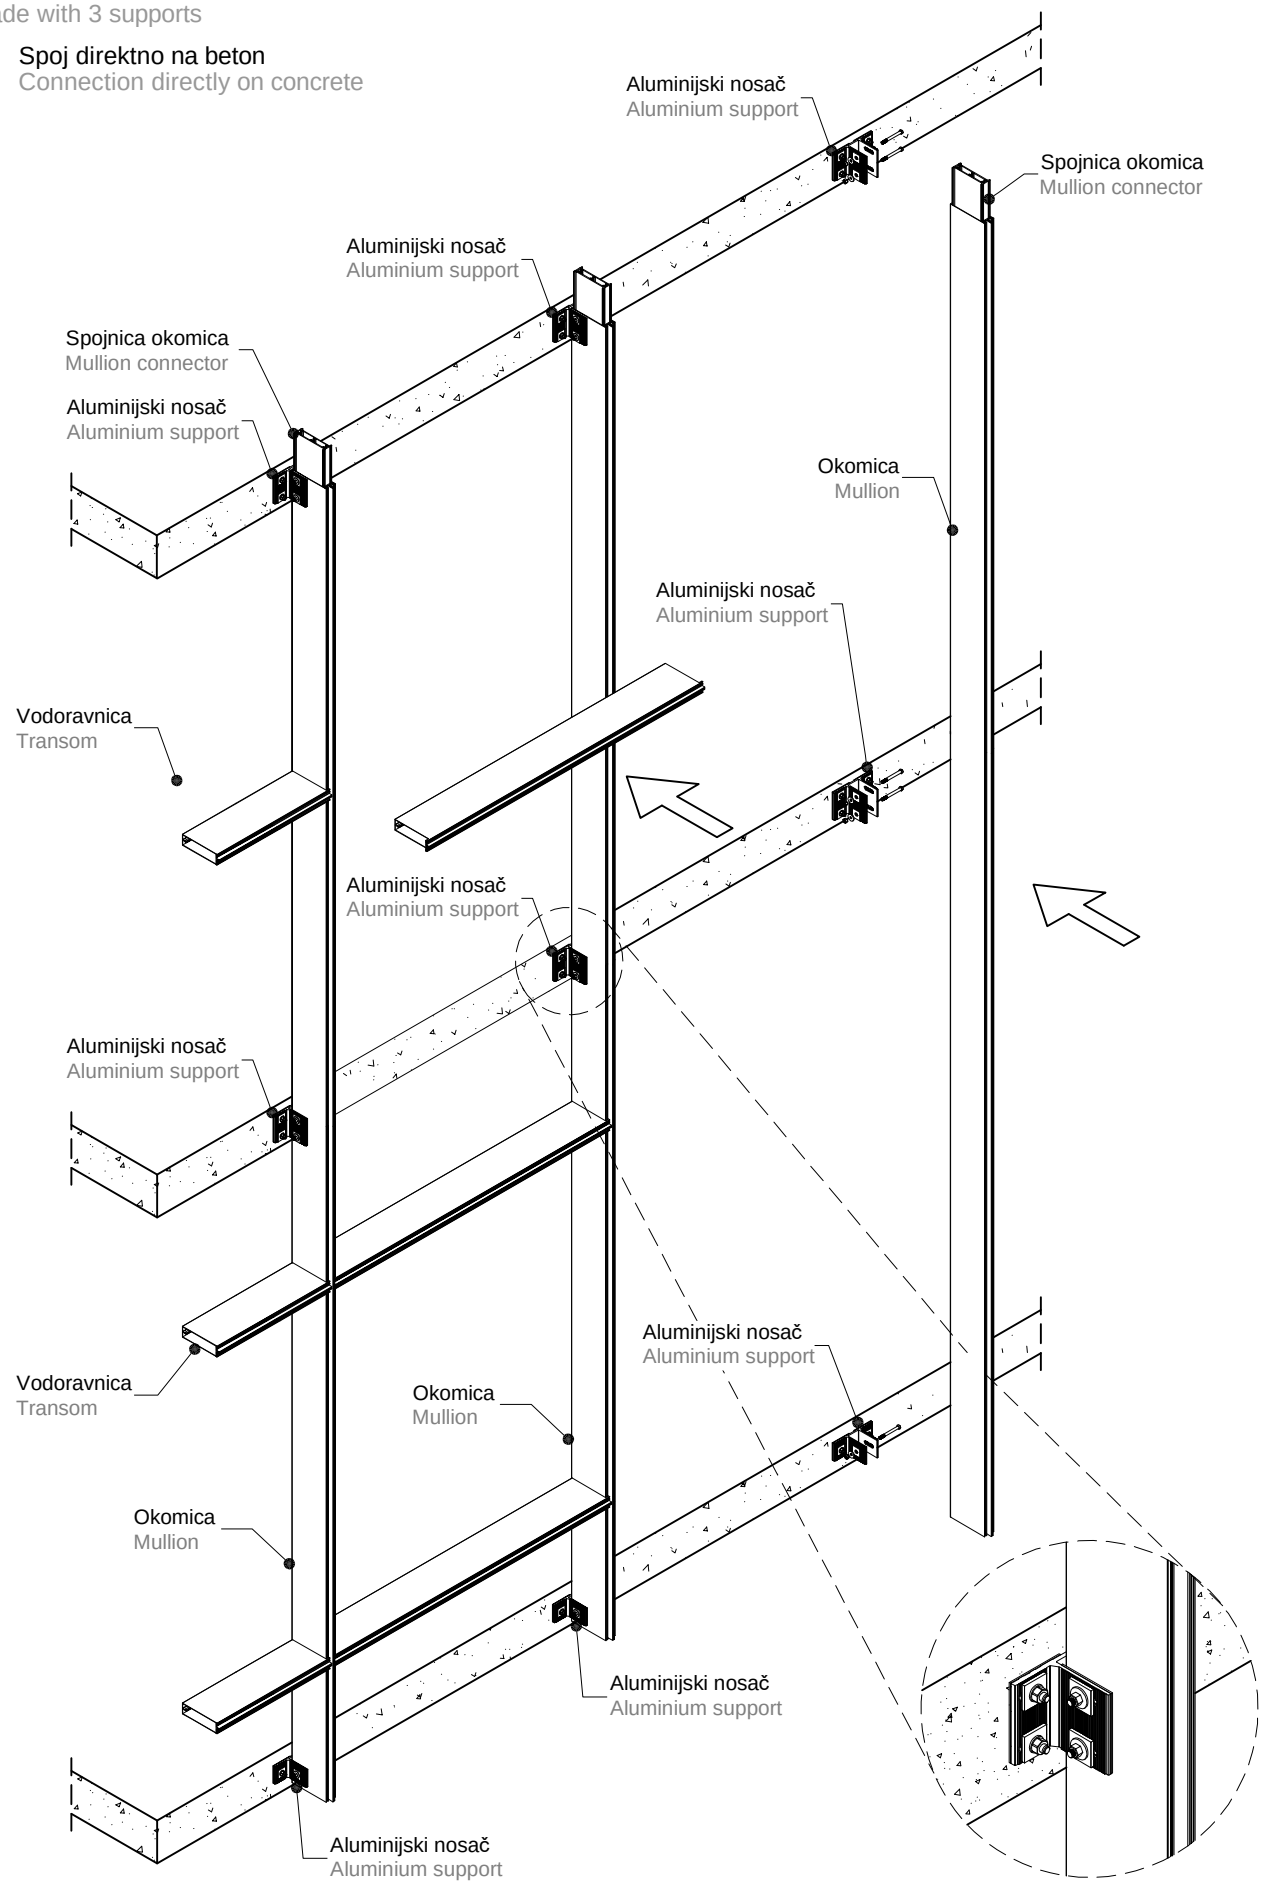

- Galvanska korozija između različitih materijala


- Električno tj. galvanski izolirati metalne dijelove
Na mjestima gdje god je to moguće, različite metalne dijelove koji se moraju povezati treba mehanički i galvanski odvajati kao što je prikazano na detalju. To se može izvesti različitim izolacijskim materijalima ili tekućim brtvilima, što ovisi o mjestu montaže i kvaliteti zahtijevanog spoja. Cilj je jedino razdvajanje različitih metala kako se ne bi dodirivali.


U slučaju da umjesto aluminijskog nosača okomice koristimo čelični potrebno je razdvojiti čelik od aluminija izolatorskim materijalom.

- Galvanic corrosion between two different materials

- Metal components to be electrically ie. galvanically isolated
On places where plausible, different metal parts that need to connect should be mechanically and galvanically separated, as shown on detail. That can be done with different isolation materials or liquid sealants, which depends on montage place and required quality of wanted joint. The goal is solely that different metals do not touch.

In case of using steel anchors instead of aluminum ones, it is necessary to separate steel from aluminum with isolation material.

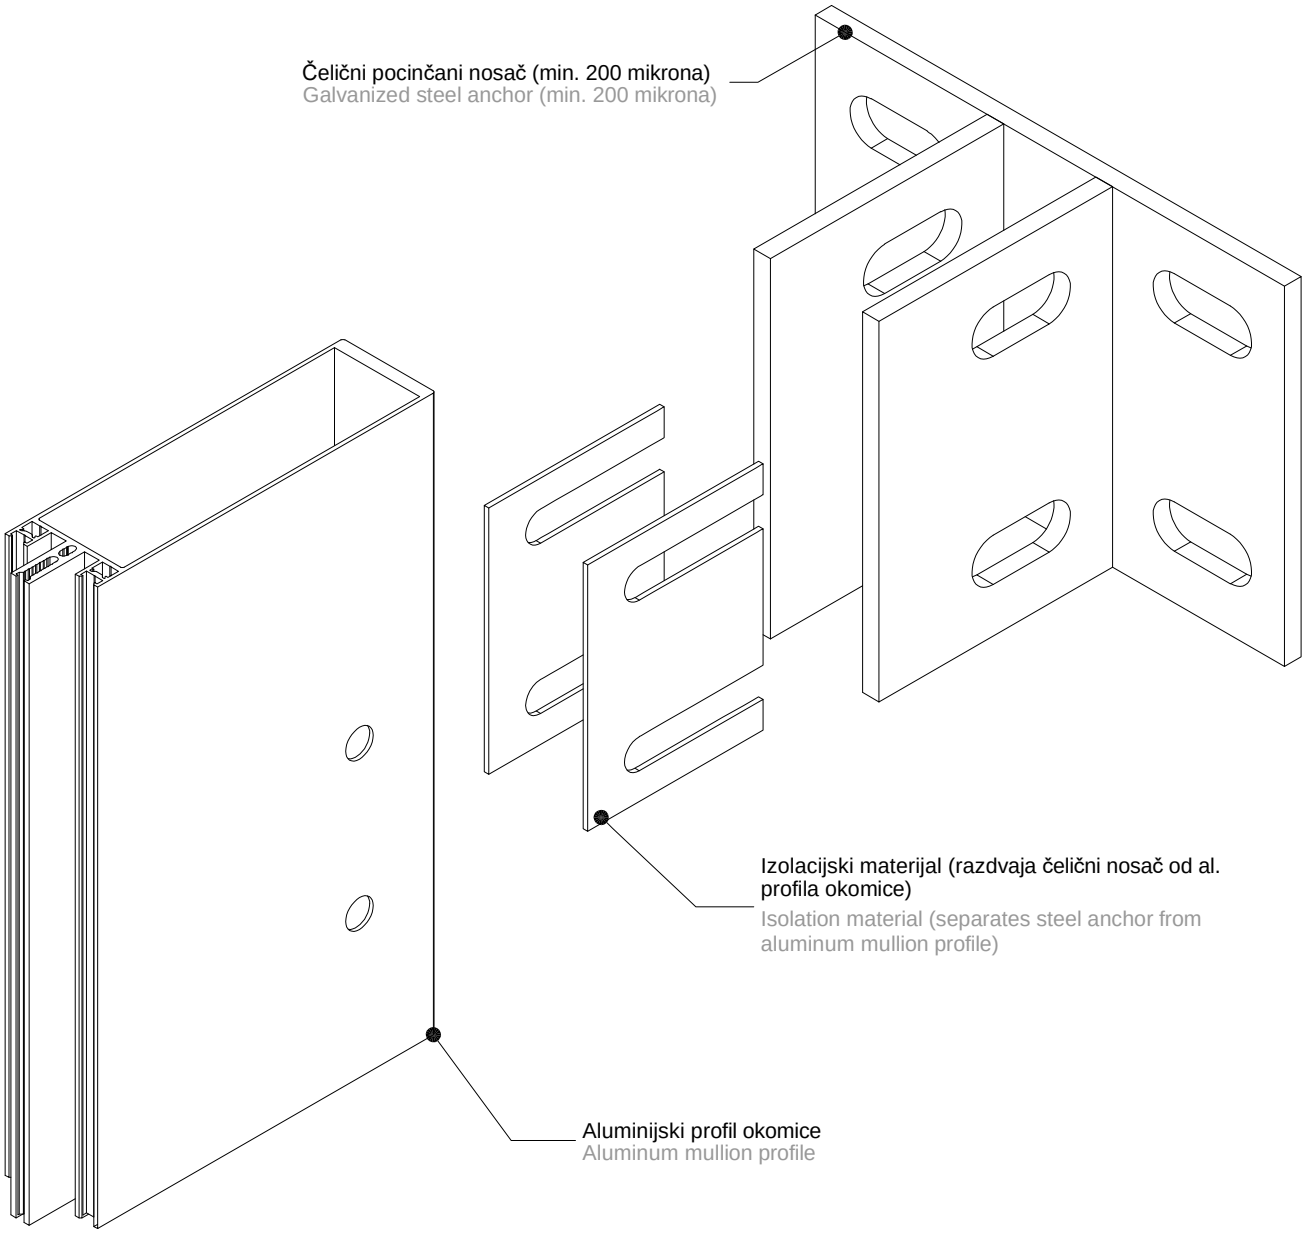

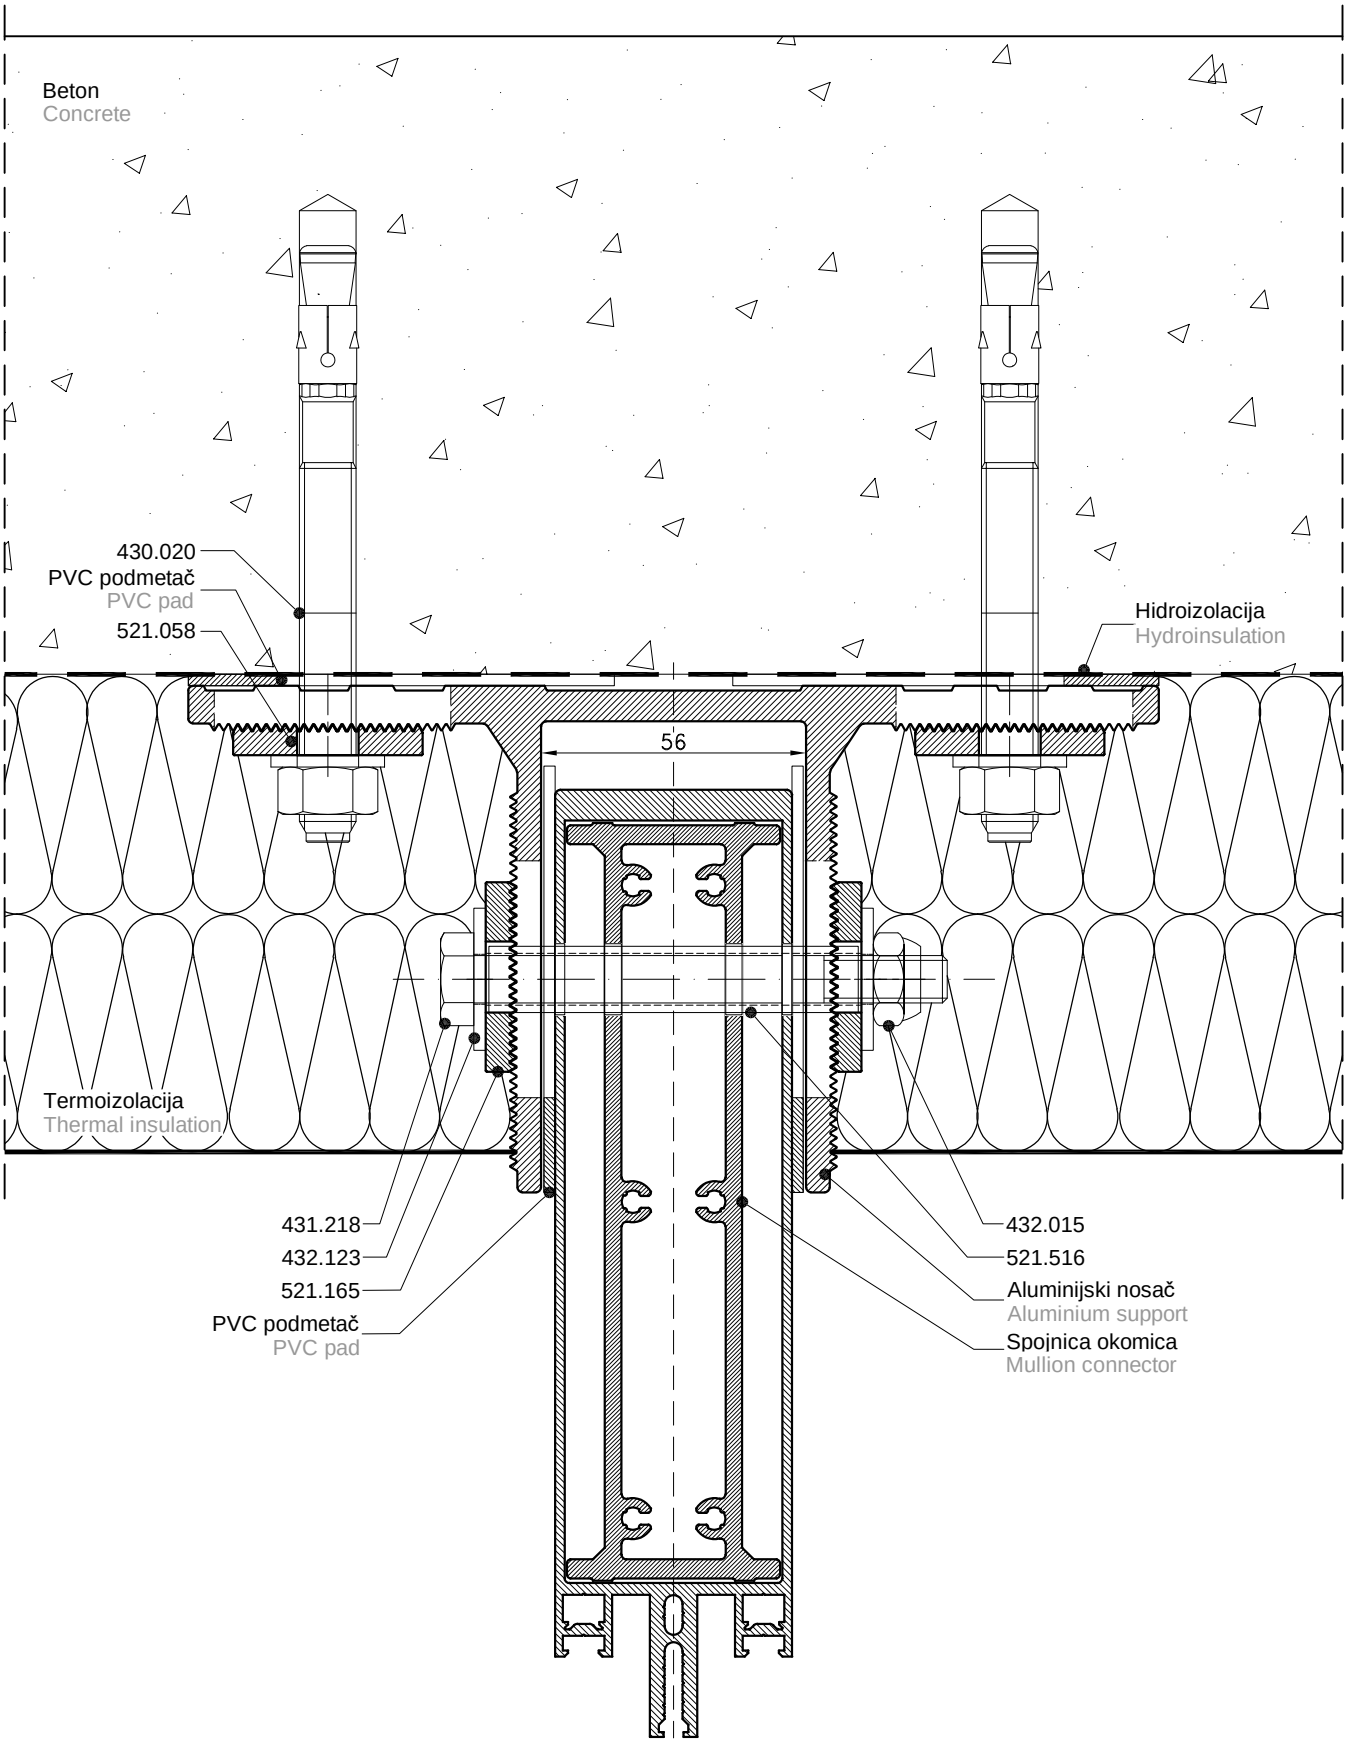

Beton
Concrete
430.020
PVC podmetač
PVC pad
521.058
Hidroizolacija
Hydroinsulation
56
Termoizolacija
Thermal insulation
431.218
432.123
521.165
PVC podmetač
PVC pad
432.015
521.516
Aluminijski nosač
Aluminium support
Spojnica okomica
Mullion connector

Fasada na 2 oslonca
Facade with 2 supports

H1-visina okomice 1 H1-mullion height 1
H2-visina okomice 2 H2-mullion height 2
H3-visina okomice 3 H3-mullion height 3
H4-visina okomice 4 H4-mullion height 4

Ⓐ Fiksni oslonac Fixed support

Na okomici se buše rupe (npr. Ø15 za inox distancer Ø14/11) za fiksni oslonac
Holes are drilled on mullion (e.g. Ø15 for steel spacer Ø14/11) for fixed support

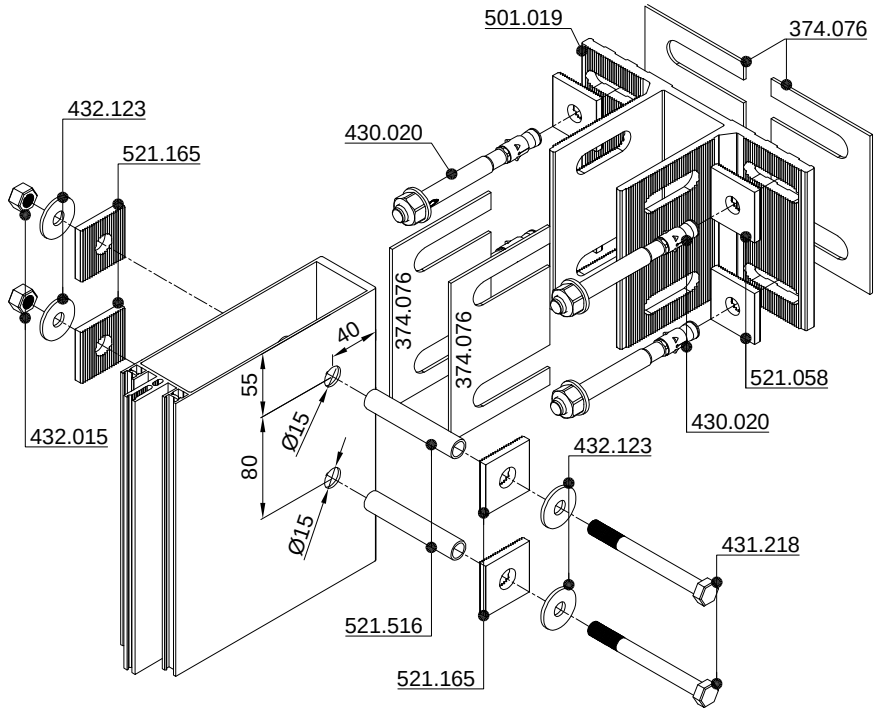


374.076 - PVC podmetač (374.077)
374.076 - PVC pad (374.077)
501.019 - Aluminijski nosač (501.032)
501.019 - Aluminum carrier (501.032)
521.058 - Aluminijska podloška
521.058 - Aluminum washer
431.218 - Vijak M10 (DIN 931)
431.218 - Screw M10 (DIN 931)
430.020 - Tipl vijak za beton
430.020 - Anchor for concrete


521.165 - Aluminijska podloška
521.165 - Aluminium washer
521.516 - Inox distancer
521.516 - Stainless steel spacer
432.123 - Podloška (DIN 9021)
432.123 - Washer (DIN 9021)
432.015 - Matica M10 (DIN 985)
432.015 - Nut M10 (DIN 985)

Ⓒ Pokretni oslonac Moveable support

Na okomici se buši žlijeb (npr.40x15 mm) za pokretni oslonac
A groove is drilled on the mullion (e.g. 40x15 mm) for moveable support

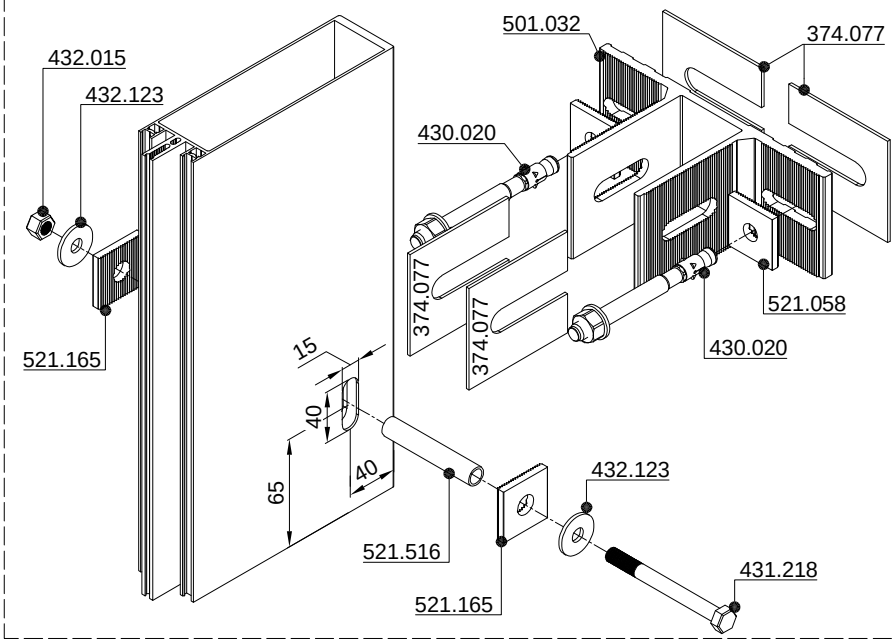

Vijčanu vezu učvrstiti upotrebom moment ključa i moment silom od 4 Nm.
Tighten the screw connection using a torque wrench and a torque force of 4 Nm.

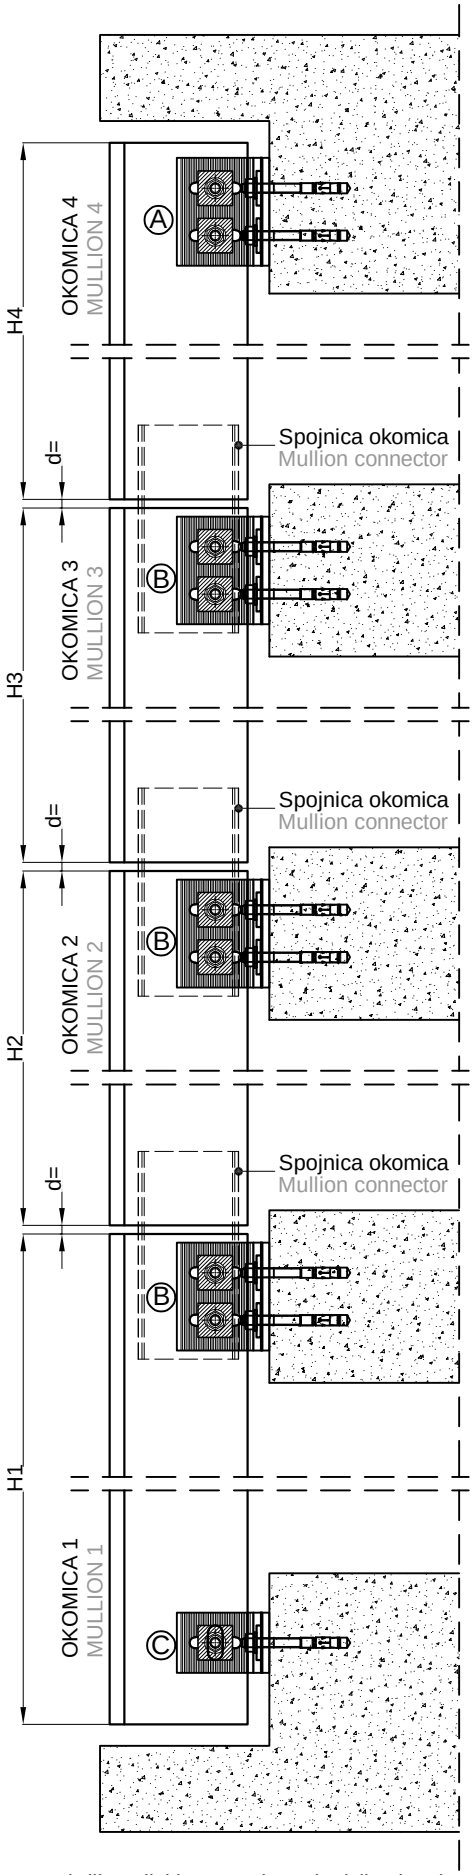


d-dilatacijski prostor između dvije okomice
d-dilatation space between two mullions

Fasada na 2 oslonca
Facade with 2 supports

H1-visina okomice 1 H1-mullion height 1
H2-visina okomice 2 H2-mullion height 2
H3-visina okomice 3 H3-mullion height 3
H4-visina okomice 4 H4-mullion height 4

Ⓑ Fiksni i pokretni oslonac Fixed and moveable support


Za kombinaciju fiksnog i pokretnog oslonca, između okomica ubacuje se spojnica okomica koja služi kao pokretni oslonac gornje okomice
For a combination of fixed and movable support, a connector is inserted between the mullions, which serves as a movable support for the upper mullion

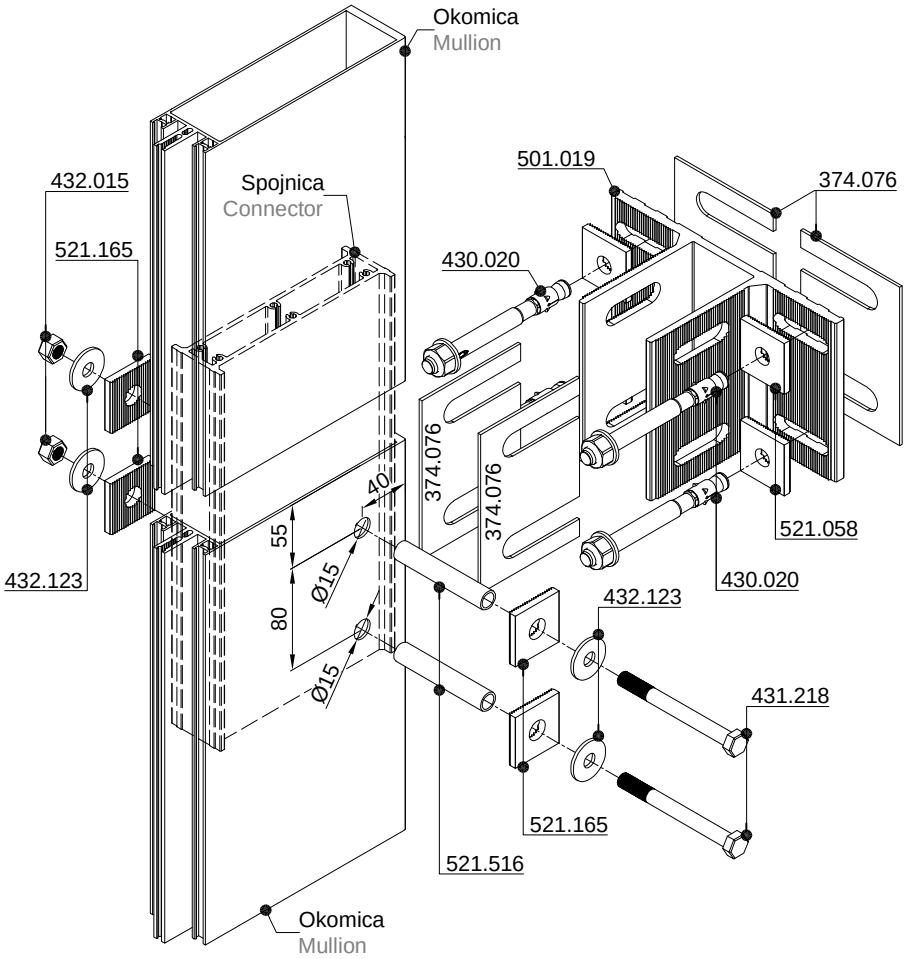

374.076 - PVC podmetač
374.076 - PVC pad
501.019 - Aluminijski nosač
501.019 - Aluminum carrier
521.058 - Aluminijska podloška
521.058 - Aluminum washer
431.218 - Vijak M10 (DIN 931)
431.218 - Screw M10 (DIN 931)
430.020 - Tipl vijak za beton
430.020 - Anchor for concrete

521.165 - Aluminijska podloška
521.165 - Aluminium washer
521.516 - Inox distancer
521.516 - Stainless steel spacer
432.123 - Podloška (DIN 9021)
432.123 - Washer (DIN 9021)
432.015 - Matica M10 (DIN 985)
432.015 - Nut M10 (DIN 985)

Okomica Mullion	**Spojnica okomica** Mullion connector	**Dužina spojnica** Connector lenght
FMO 50/200	SB-072	400 mm
FMO 50/160	SB-071	
FMO 50/140	SB-070	
FMO 50/120	SB-069	
FMO 50/90	SB-067/M	

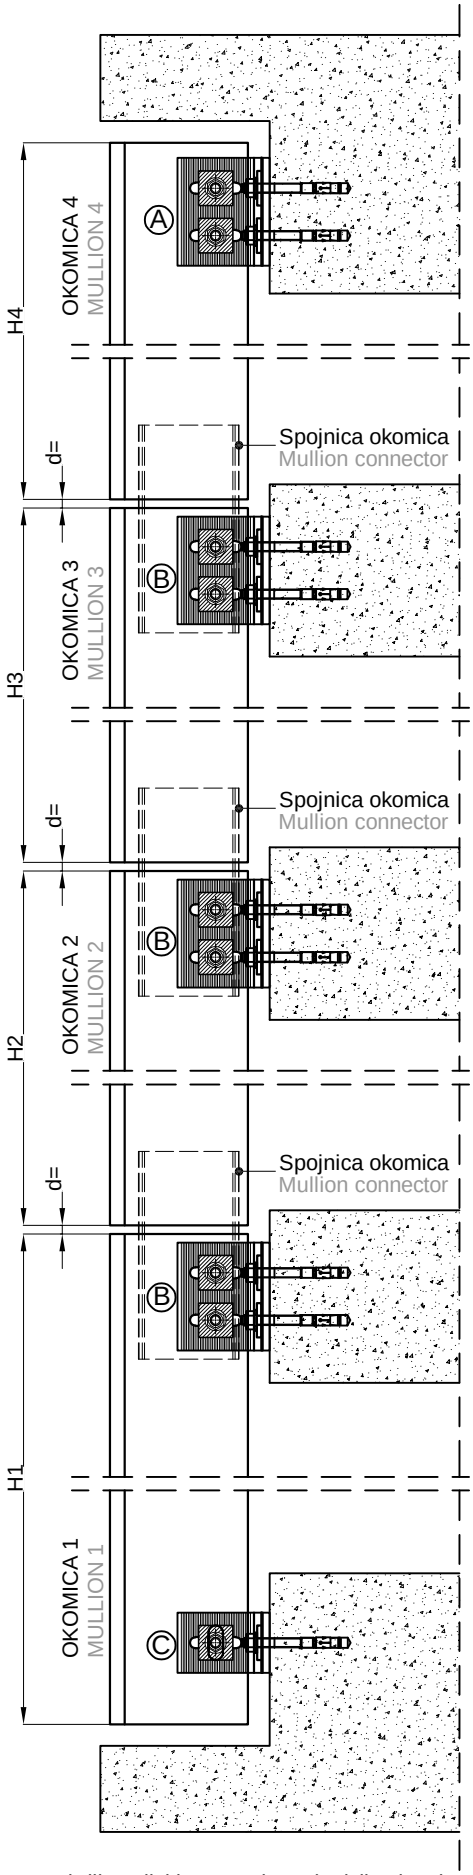

Vijčanu vezu učvrstiti upotrebom moment ključa i moment silom od 4 Nm.
Tighten the screw connection using a torque wrench and a torque force of 4 Nm.


d-dilatacijski prostor između dvije okomice
d-dilatation space between two mullions


Fasada na 3 oslonca
Facade with 3 supports

H1-visina okomice 1 H1-mullion height 1
H2-visina okomice 2 H2-mullion height 2

Ⓓ Pokretni i pokretni oslonac Moveable and moveable support

U slučaju spoja pokretnog i pokretnog oslonca, spojnica okomica spojena je žlijebovima za donju okomicu i služi pokretni oslonac gornje okomice
For a combination of moveable and moveable support, a connector is connected with grooves to the lower mullion and serves as a movable support for the upper mullion

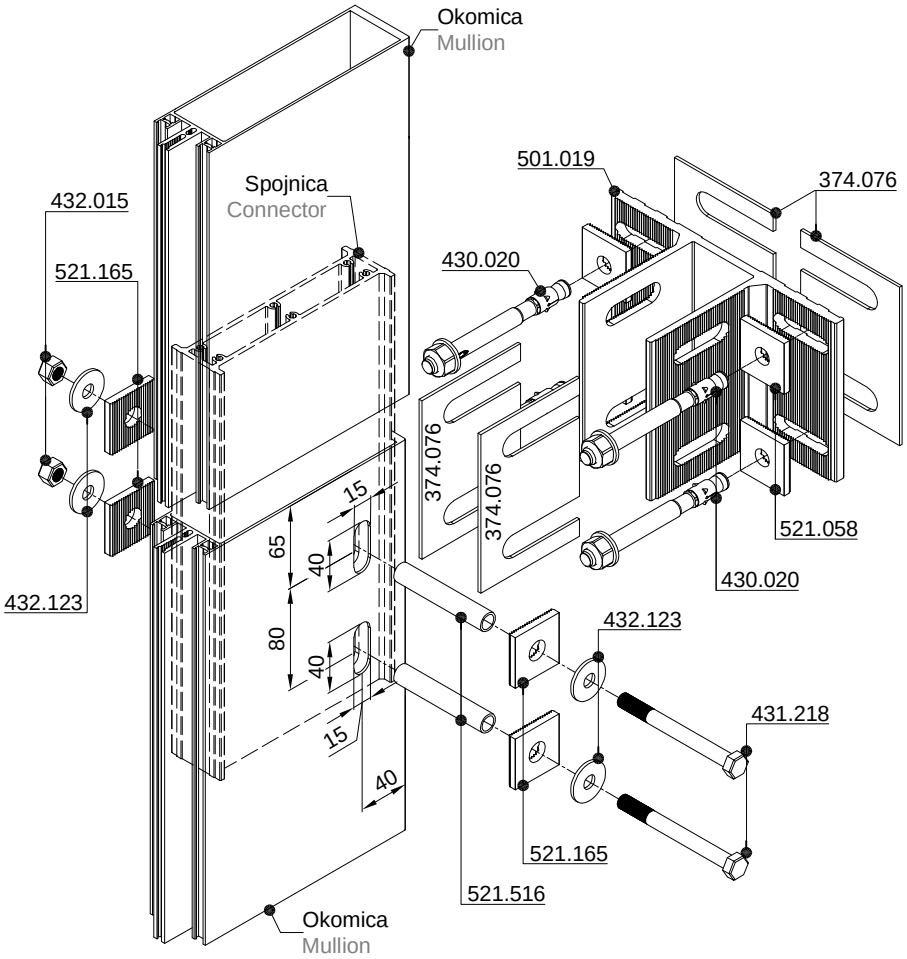

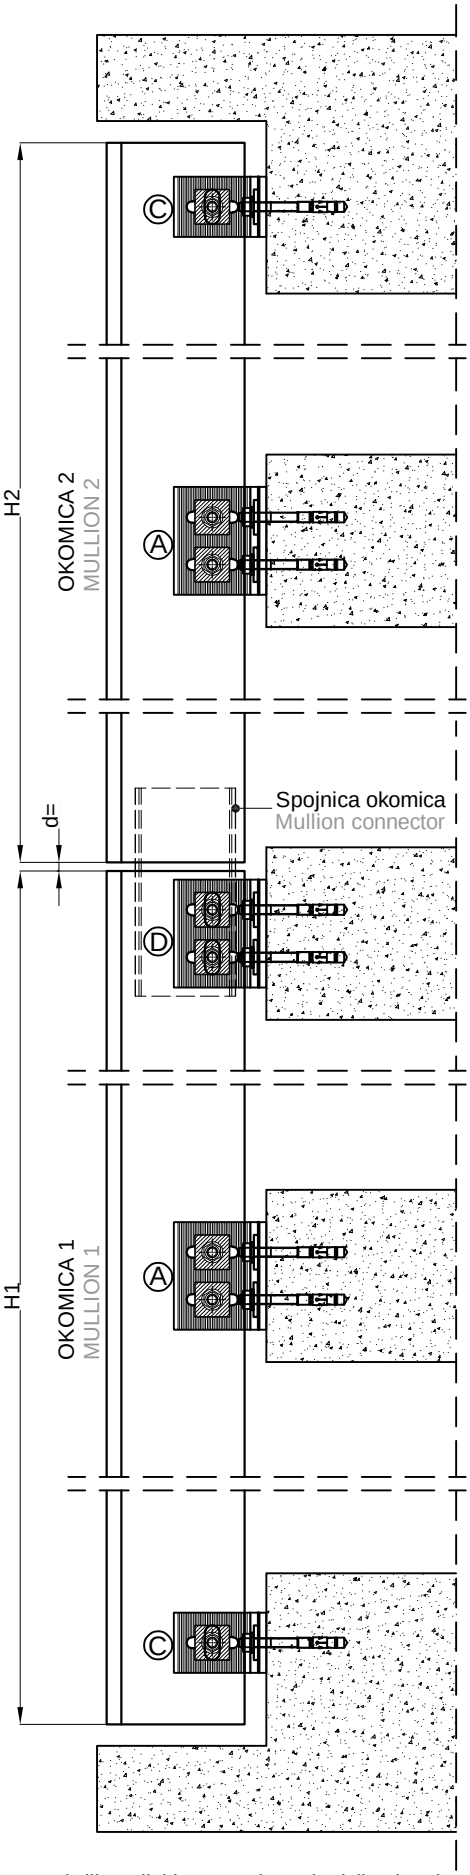


d-dilatacijski prostor između dvije okomice
d-dilatation space between two mullions

374.076 - PVC podmetač
374.076 - PVC pad
501.019 - Aluminijski nosač
501.019 - Aluminum carrier
521.058 - Aluminijska podloška
521.058 - Aluminum washer
431.218 - Vijak M10 (DIN 931)
431.218 - Screw M10 (DIN 931)
430.020 - Tipl vijak za beton
430.020 - Anchor for concrete

521.165 - Aluminijska podloška
521.165 - Aluminium washer
521.516 - Inox distancer
521.516 - Stainless steel spacer
432.123 - Podloška (DIN 9021)
432.123 - Washer (DIN 9021)
432.015 - Matica M10 (DIN 985)
432.015 - Nut M10 (DIN 985)

Okomica Mullion	**Spojnica okomica** Mullion connector	**Dužina spojnica** Connector lenght
FMO 50/200	SB-072	400 mm
FMO 50/160	SB-071	
FMO 50/140	SB-070	
FMO 50/120	SB-069	
FMO 50/90	SB-067/M	

Vijčanu vezu učvrstiti upotrebom moment ključa i moment silom od 4 Nm.
Tighten the screw connection using a torque wrench and a torque force of 4 Nm.

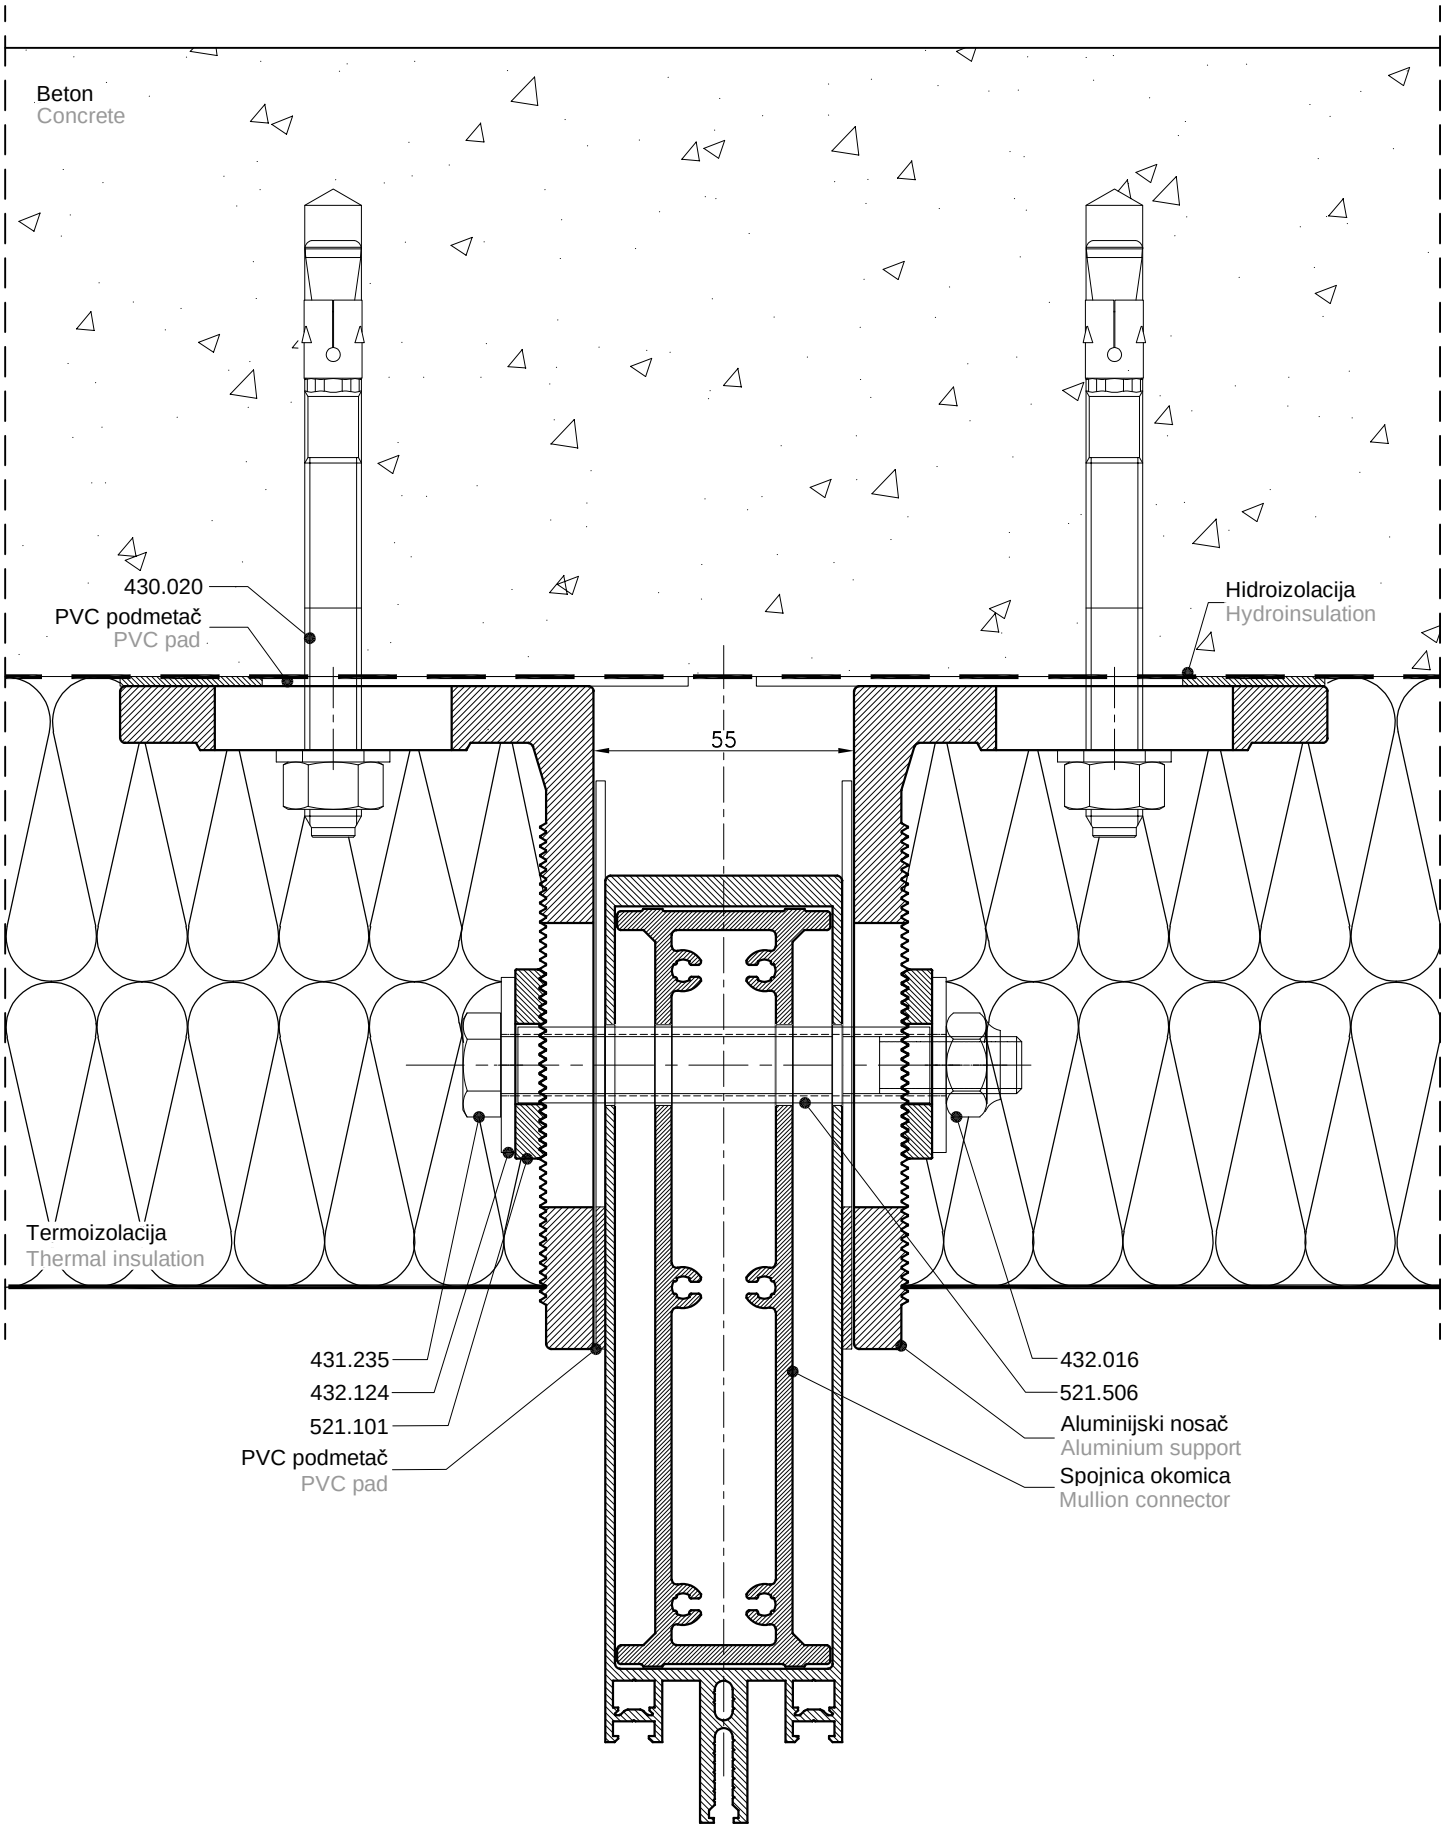

Beton
Concrete
430.020
PVC podmetač
PVC pad
Hidroizolacija
Hydroinsulation
55
Termoizolacija
Thermal insulation
431.235
432.124
521.101
PVC podmetač
PVC pad
432.016
521.506
Aluminijski nosač
Aluminium support
Spojnica okomica
Mullion connector

Fasada na 2 oslonca
Facade with 2 supports

H1-visina okomice 1 H1-mullion height 1
H2-visina okomice 2 H2-mullion height 2
H3-visina okomice 3 H3-mullion height 3
H4-visina okomice 4 H4-mullion height 4

Ⓐ Fiksni oslonac Fixed support


Na okomici se buše rupe (npr. Ø17 za inox distancer Ø16/13) za fiksni oslonac
Holes are drilled on mullion (e.g. Ø17 for steel spacer Ø16/13) for fixed support

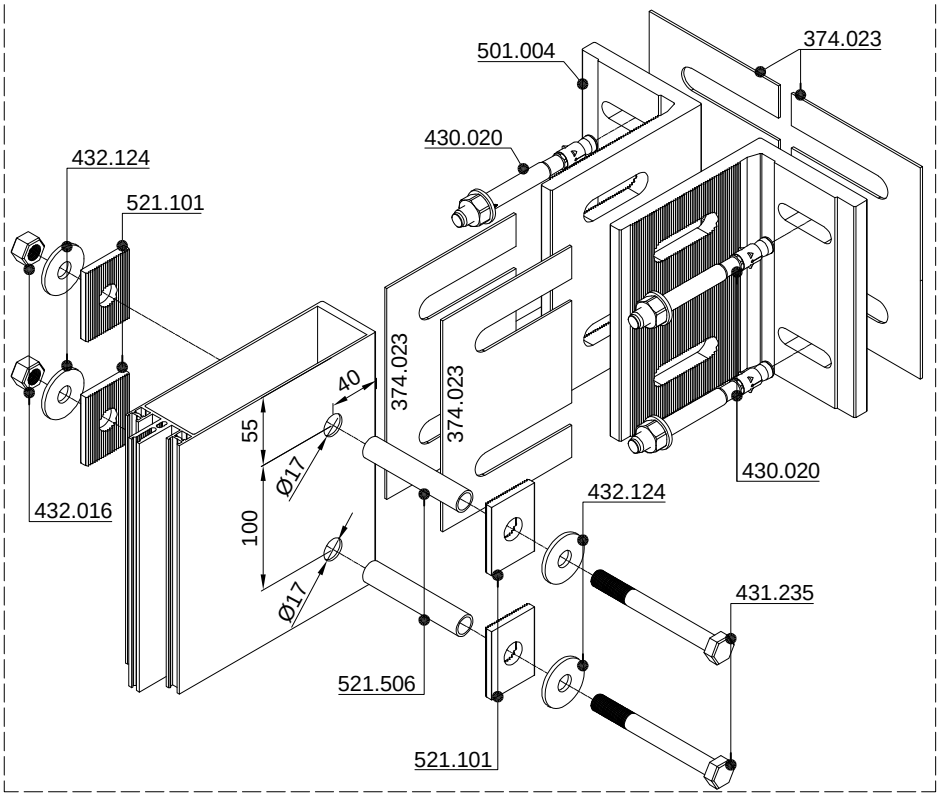


374.023	-	PVC podmetač (374.077) PVC pad (374.077)	521.506	-	Inox distancer Stainless steel spacer
501.004	-	Aluminijski nosač (501.005) Aluminum carrier (501.005)	432.124	-	Podloška (DIN 9021) Washer (DIN 9021)
521.101	-	Aluminijska podloška Aluminum washer	431.235	-	Vijak M12 (DIN 931) Screw M12 (DIN 931)
430.020	-	Tipl vijak za beton Anchor for concrete	432.016	-	Matica M12 (DIN 985) Nut M12 (DIN 985)

Ⓒ Pokretni oslonac

Na okomici se buši žlijeb (npr.40x17 mm) za pokretni oslonac
A groove is drilled on the mullion (e.g. 40x17 mm) for moveable support

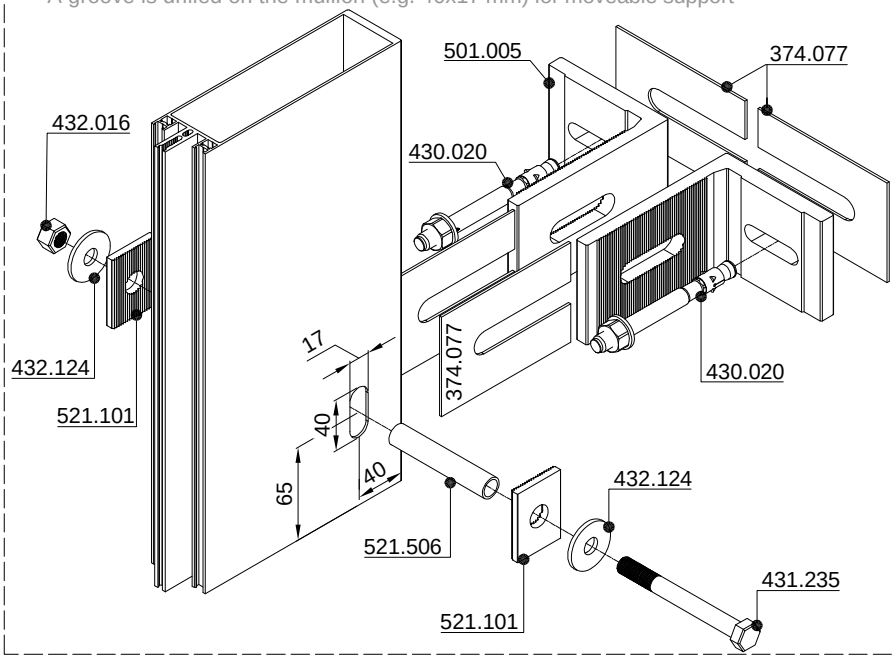

Vijčanu vezu učvrstiti upotrebom moment ključa i moment silom od 4 Nm.
Tighten the screw connection using a torque wrench and a torque force of 4 Nm.

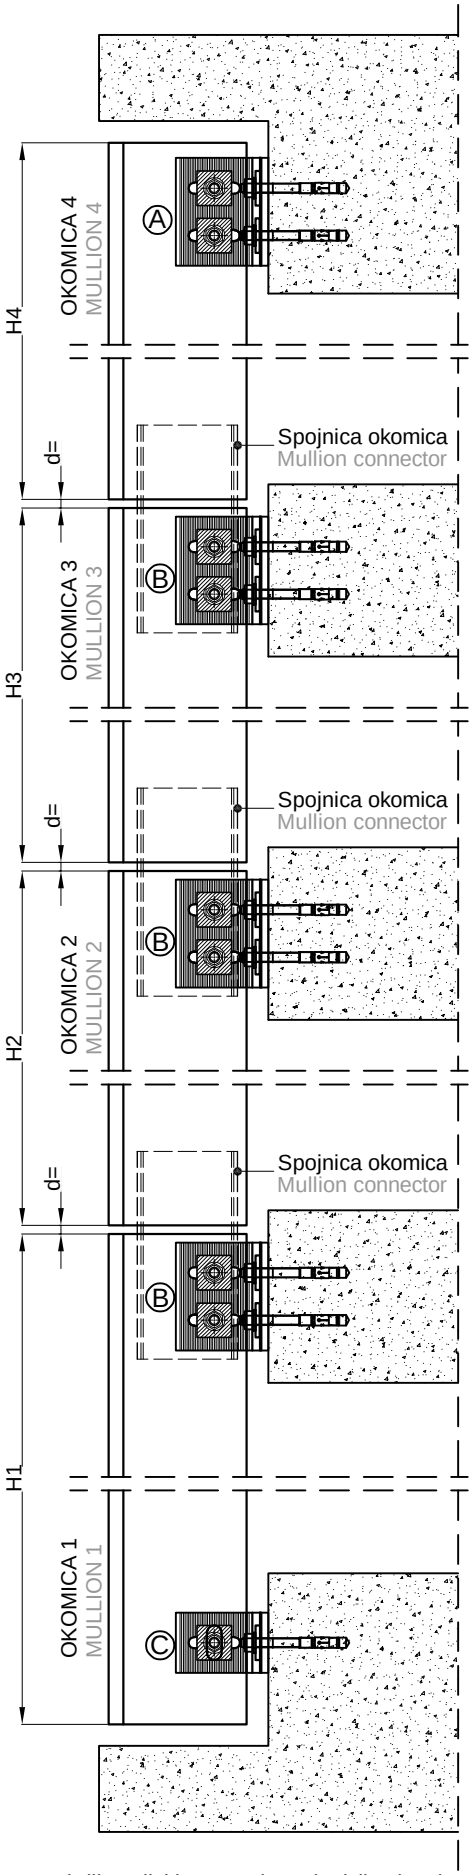


d-dilatacijski prostor između dvije okomice
d-dilatation space between two mullions


Fasada na 2 oslonca
Facade with 2 supports

H1-visina okomice 1 H1-mullion height 1 H3-visina okomice 3 H3-mullion height 3
H2-visina okomice 2 H2-mullion height 2 H4-visina okomice 4 H4-mullion height 4

Ⓑ Fiksni i pokretni oslonac Fixed and moveable support

Za kombinaciju fiksnog i pokretnog oslonca, između okomica ubacuje se spojnica okomica koja služi kao pokretni oslonac gornje okomice
For a combination of fixed and movable support, a connector is inserted between the mullions, which serves as a movable support for the upper mullion

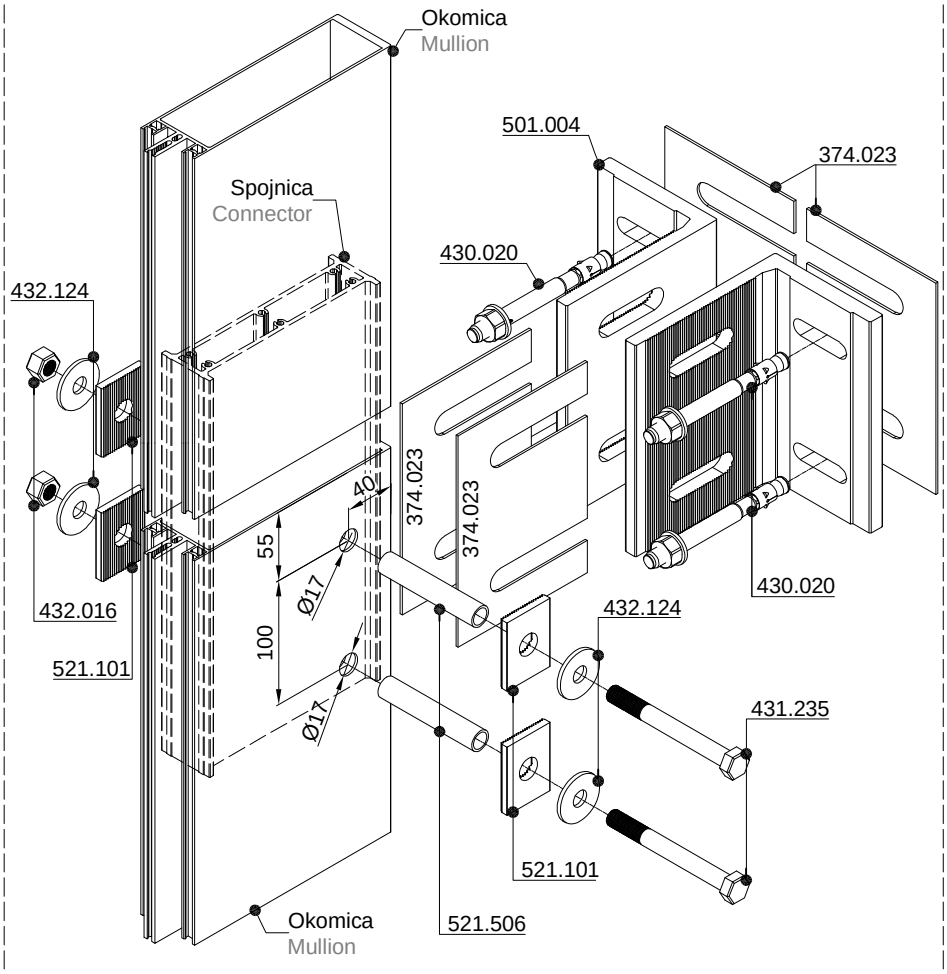

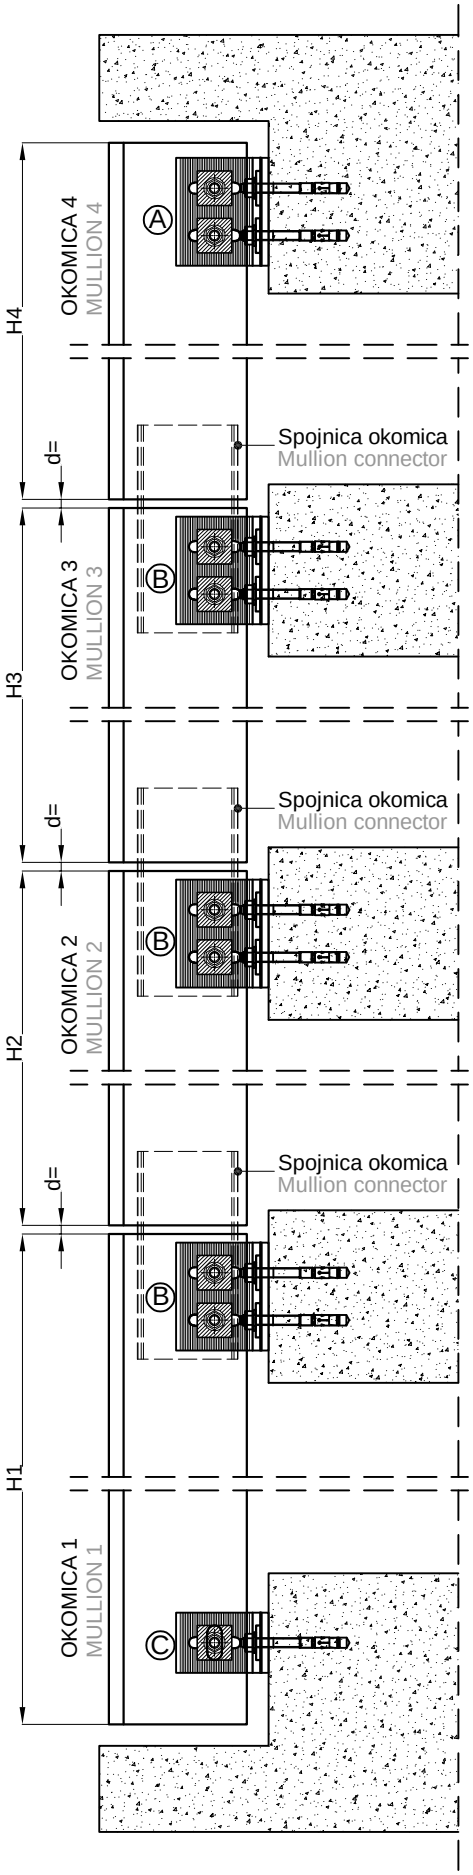

374.023 - PVC podmetač
374.023 - PVC pad
501.004 - Aluminijski nosač
501.004 - Aluminum carrier
521.101 - Aluminijska podloška
521.101 - Aluminum washer
430.020 - Tipl vijak za beton
430.020 - Anchor for concrete

521.506 - Inox distancer
521.506 - Stainless steel spacer
432.124 - Podloška (DIN 9021)
432.124 - Washer (DIN 9021)
431.235 - Vijak M12 (DIN 931)
431.235 - Screw M12 (DIN 931)
432.016 - Matica M12 (DIN 985)
432.016 - Nut M12 (DIN 985)

Okomica Mullion	**Spojnica okomica** Mullion connector	**Dužina spojnica** Connector lenght
FMO 50/200	SB-072	400 mm
FMO 50/160	SB-071	
FMO 50/140	SB-070	
FMO 50/120	SB-069	
FMO 50/90	SB-067/M	

Vijčanu vezu učvrstiti upotrebom moment ključa i moment silom od 4 Nm.
Tighten the screw connection using a torque wrench and a torque force of 4 Nm.


d-dilatacijski prostor između dvije okomice
d-dilatation space between two mullions


Fasada na 3 oslonca
Facade with 3 supports

H1-visina okomice 1 H1-mullion height 1
H2-visina okomice 2 H2-mullion height 2

Ⓓ Pokretni i pokretni oslonac Moveable and moveable support

U slučaju spoja pokretnog i pokretnog oslonca, spojnica okomica spojena je žlijebovima za donju okomicu i služi pokretni oslonac gornje okomice
For a combination of moveable and moveable support, a connector is connected with grooves to the lower mullion and serves as a movable support for the upper mullion

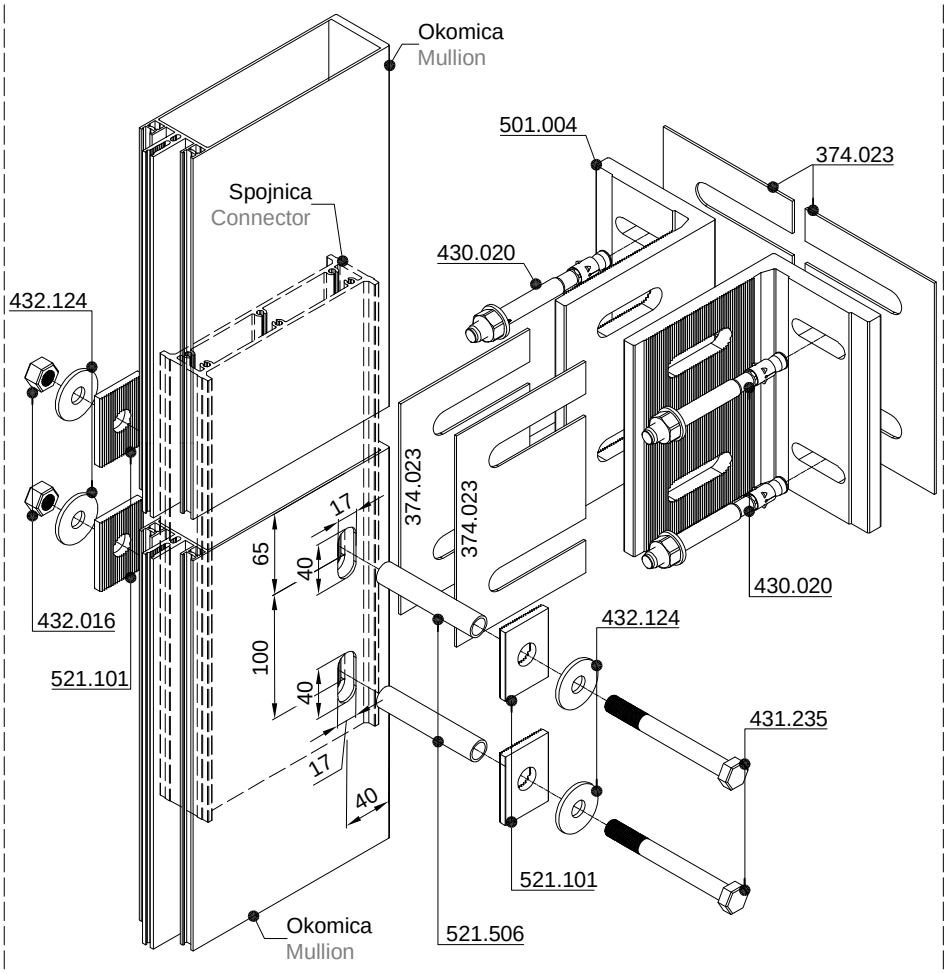

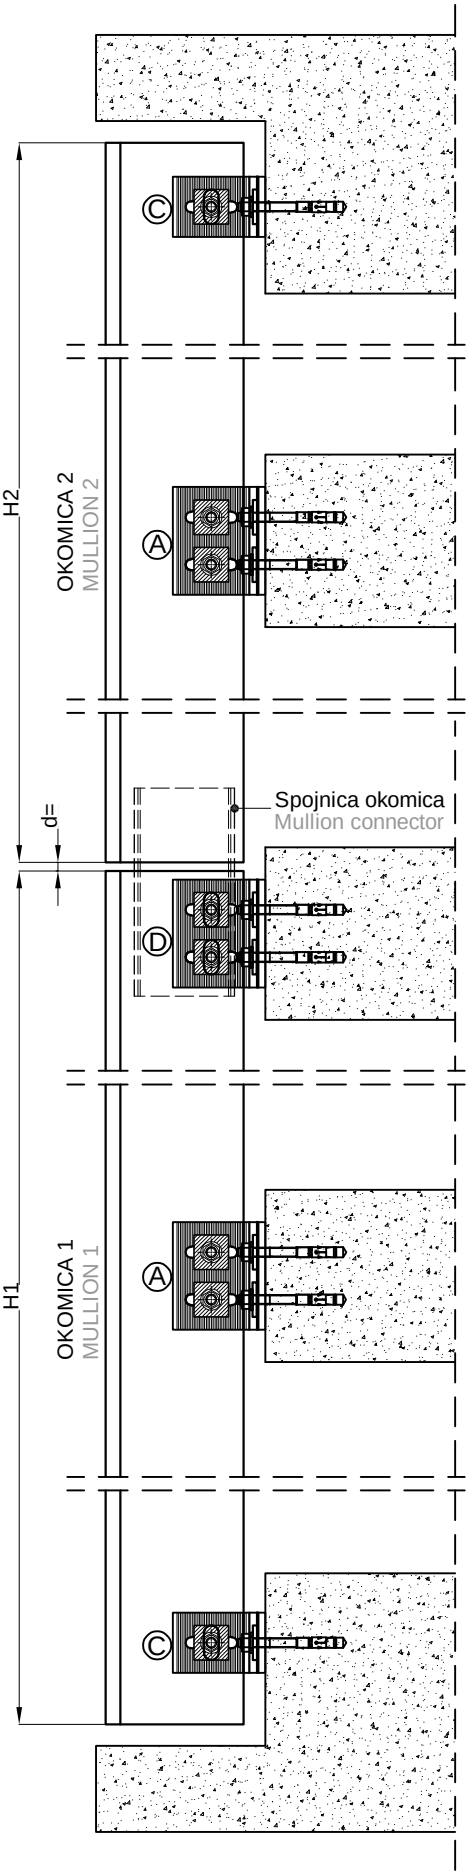



374.023	-	PVC podmetač	521.506	-	Inox distancer
374.023	-	PVC pad	521.506	-	Stainless steel spacer
501.004	-	Aluminijski nosač	432.124	-	Podloška (DIN 9021)
501.004	-	Aluminum carrier	432.124	-	Washer (DIN 9021)
521.101	-	Aluminijska podloška	431.235	-	Vijak M12 (DIN 931)
521.101	-	Aluminum washer	431.235	-	Screw M12 (DIN 931)
430.020	-	Tipl vijak za beton	432.016	-	Matica M12 (DIN 985)
430.020	-	Anchor for concrete	432.016	-	Nut M12 (DIN 985)

Okomica Mullion	**Spojnica okomica** Mullion connector	**Dužina spojnica** Connector lenght
FMO 50/200	SB-072	400 mm
FMO 50/160	SB-071	
FMO 50/140	SB-070	
FMO 50/120	SB-069	
FMO 50/90	SB-067/M	

Vijčanu vezu učvrstiti upotrebom moment ključa i moment silom od 4 Nm.
Tighten the screw connection using a torque wrench and a torque force of 4 Nm.

d-dilatacijski prostor između dvije okomice
d-dilatation space between two mullions

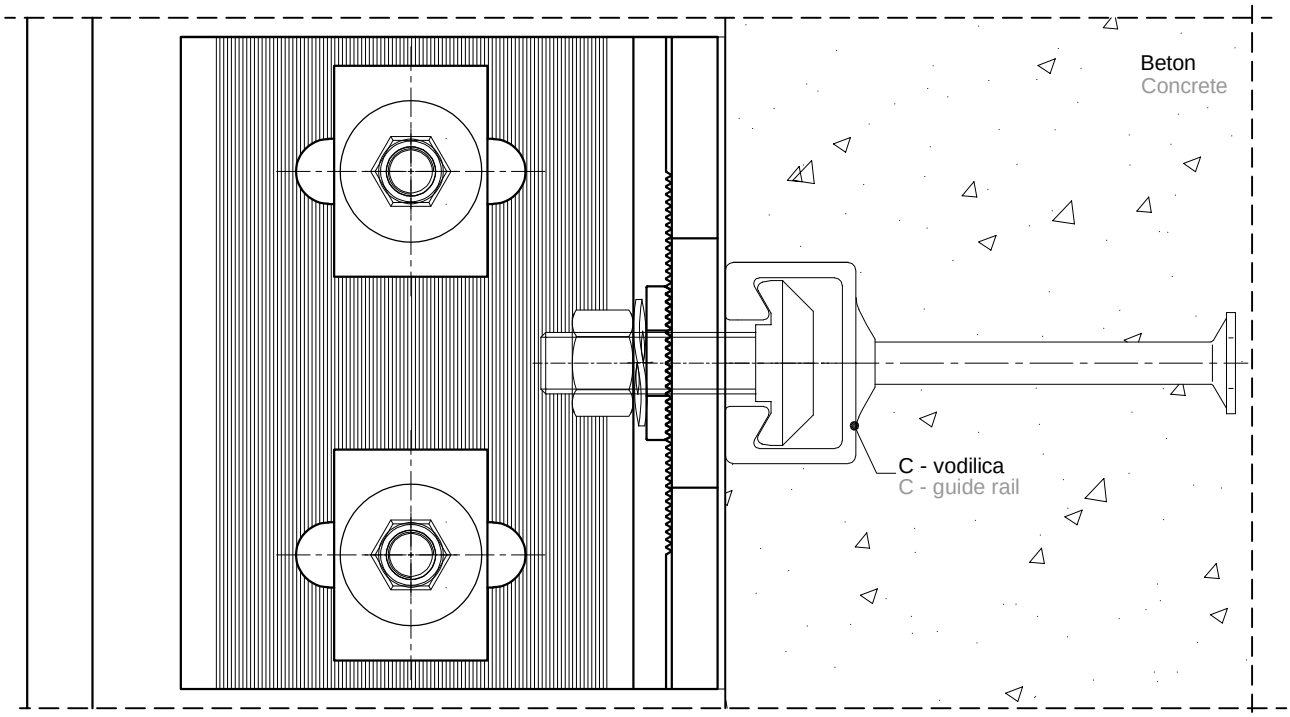
Beton
Concrete
C - vodilica
C - guide rail

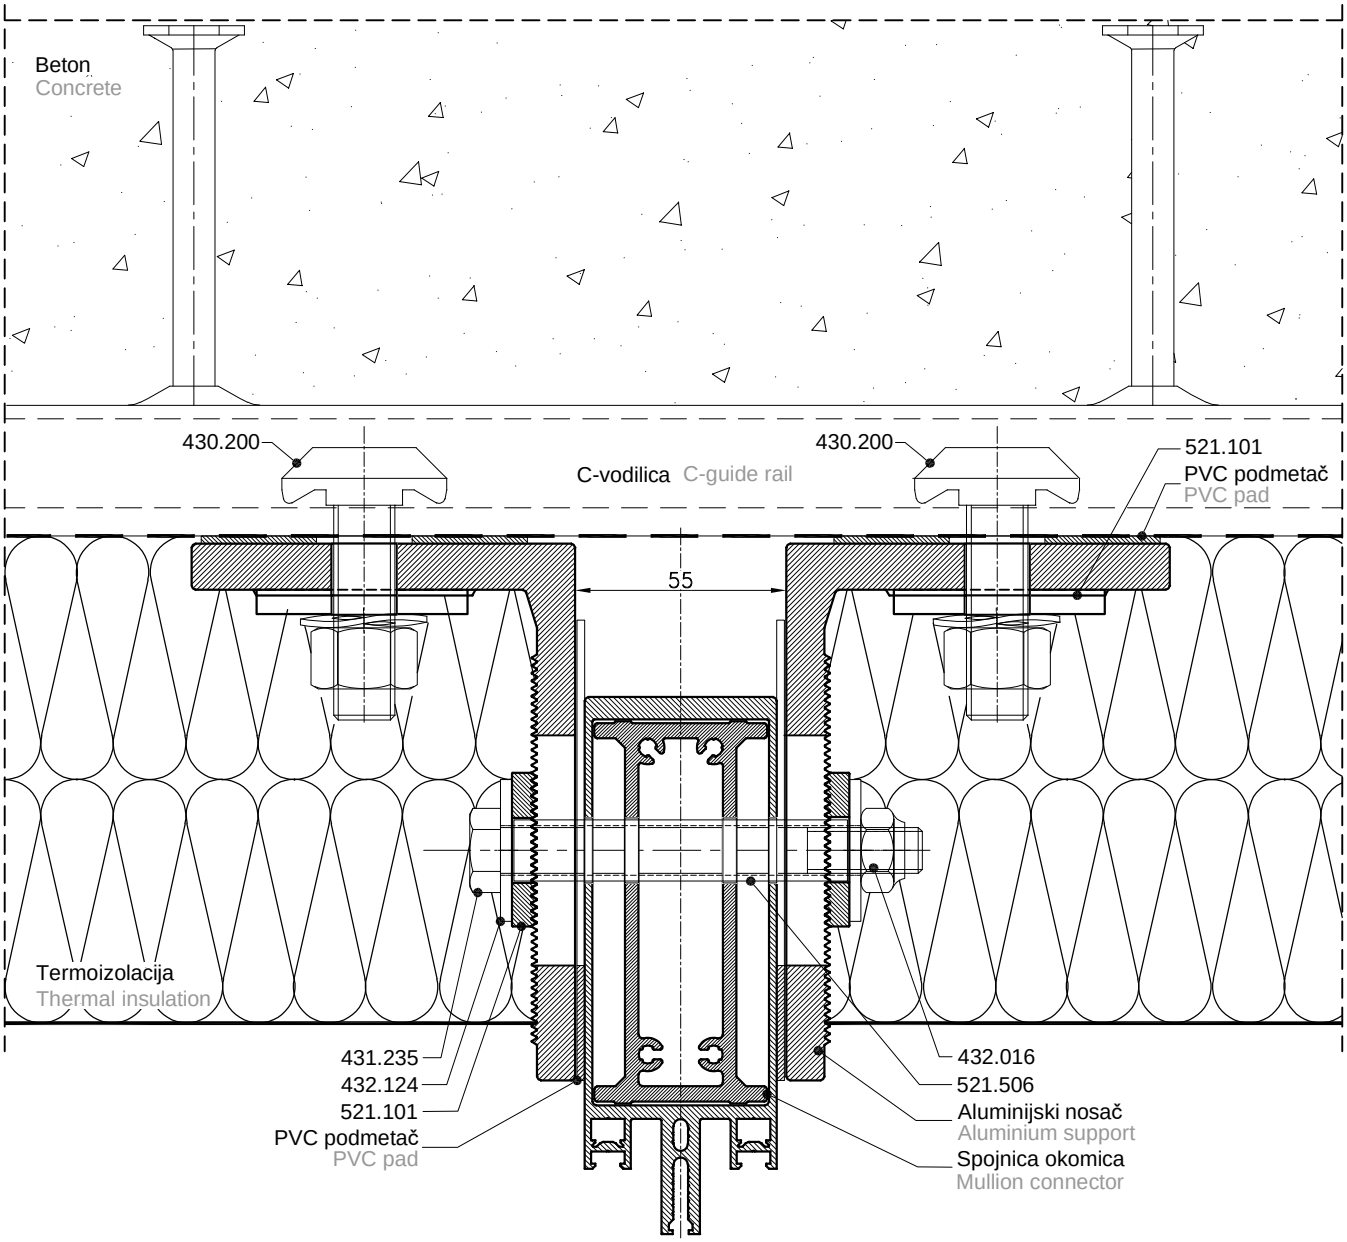

Beton
Concrete
430.200
430.200
C-vodilica C-guide rail
521.101
PVC podmetač
PVC pad
55
Termoizolacija
Thermal insulation
431.235
432.124
521.101
PVC podmetač
PVC pad
432.016
521.506
Aluminijski nosač
Aluminium support
Spojnica okomica
Mullion connector

Fasada na 2 oslonca
Facade with 2 supports

H1-visina okomice 1 H1-mullion height 1
H2-visina okomice 2 H2-mullion height 2
H3-visina okomice 3 H3-mullion height 3
H4-visina okomice 4 H4-mullion height 4

Ⓐ Fiksni oslonac Fixed support


Na okomici se buše rupe (npr. Ø17 za inox distancer Ø16/13) za fiksni oslonac
Holes are drilled on mullion (e.g. Ø17 for steel spacer Ø16/13) for fixed support

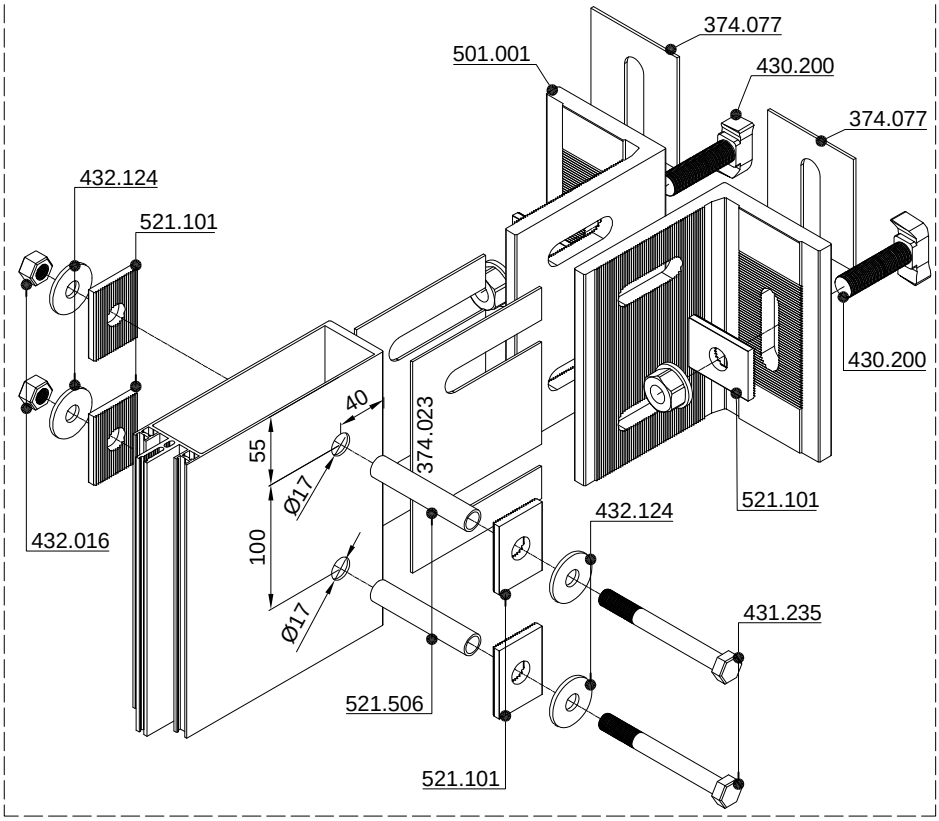


374.023	-	PVC podmetač (374.077)	521.506	-	Inox distancer
374.023	-	PVC pad (374.077)	521.506	-	Stainless steel spacer
501.001	-	Aluminijski nosač (501.002)	432.124	-	Podloška (DIN 9021)
501.001	-	Aluminum carrier (501.002)	432.124	-	Washer (DIN 9021)
521.101	-	Aluminijska podloška	431.235	-	Vijak M12 (DIN 931)
521.101	-	Aluminum washer	431.235	-	Screw M12 (DIN 931)
430.200	-	T vijak za C vodilicu	432.016	-	Matica M12 (DIN 985)
430.200	-	T bolt for C guiderail	432.016	-	Nut M12 (DIN 985)

Ⓒ Pokretni oslonac

Na okomici se buši žlijeb (npr.40x17 mm) za pokretni oslonac
A groove is drilled on the mullion (e.g. 40x17 mm) for moveable support

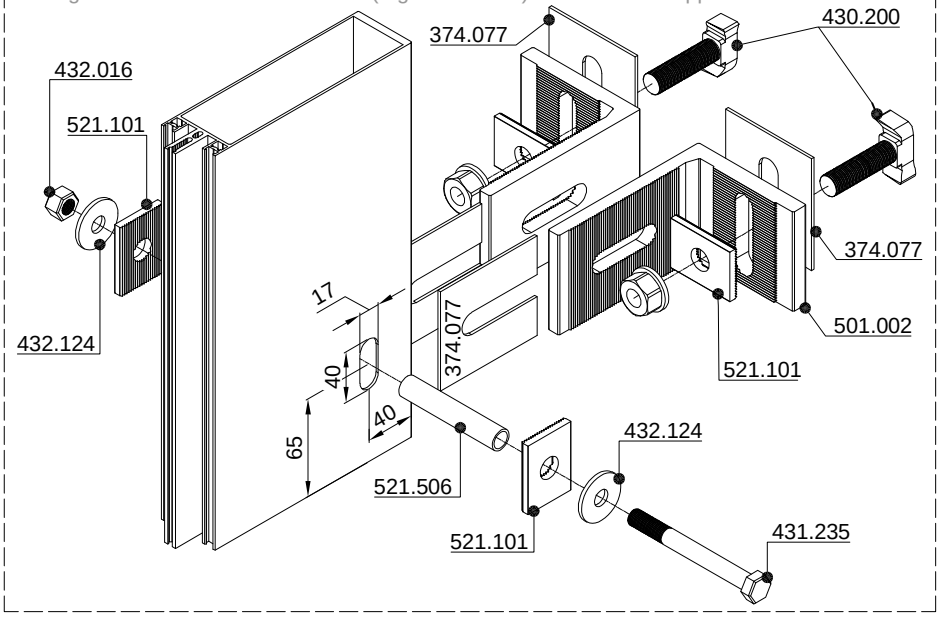

Vijčanu vezu učvrstiti upotrebom moment ključa i moment silom od 4 Nm.
Tighten the screw connection using a torque wrench and a torque force of 4 Nm.

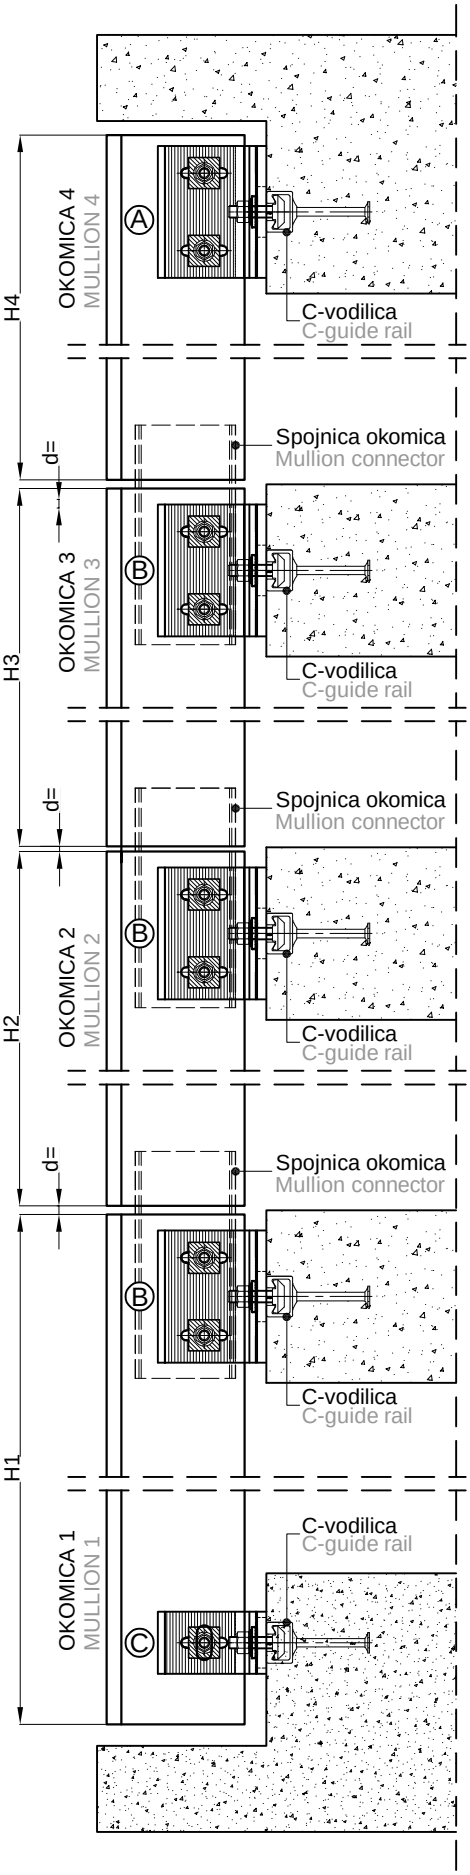


d-dilatacijski prostor između dvije okomice
d-dilatation space between two mullions

Fasada na 2 oslonca
Facade with 2 supports

H1-visina okomice 1 H1-mullion height 1 H3-visina okomice 3 H3-mullion height 3
H2-visina okomice 2 H2-mullion height 2 H4-visina okomice 4 H4-mullion height 4


Ⓑ Fiksni i pokretni oslonac Fixed and moveable support

Za kombinaciju fiksnog i pokretnog oslonca, između okomica ubacuje se spojnica okomica koja služi kao pokretni oslonac gornje okomice
For a combination of fixed and movable support, a connector is inserted between the mullions, which serves as a movable support for the upper mullion

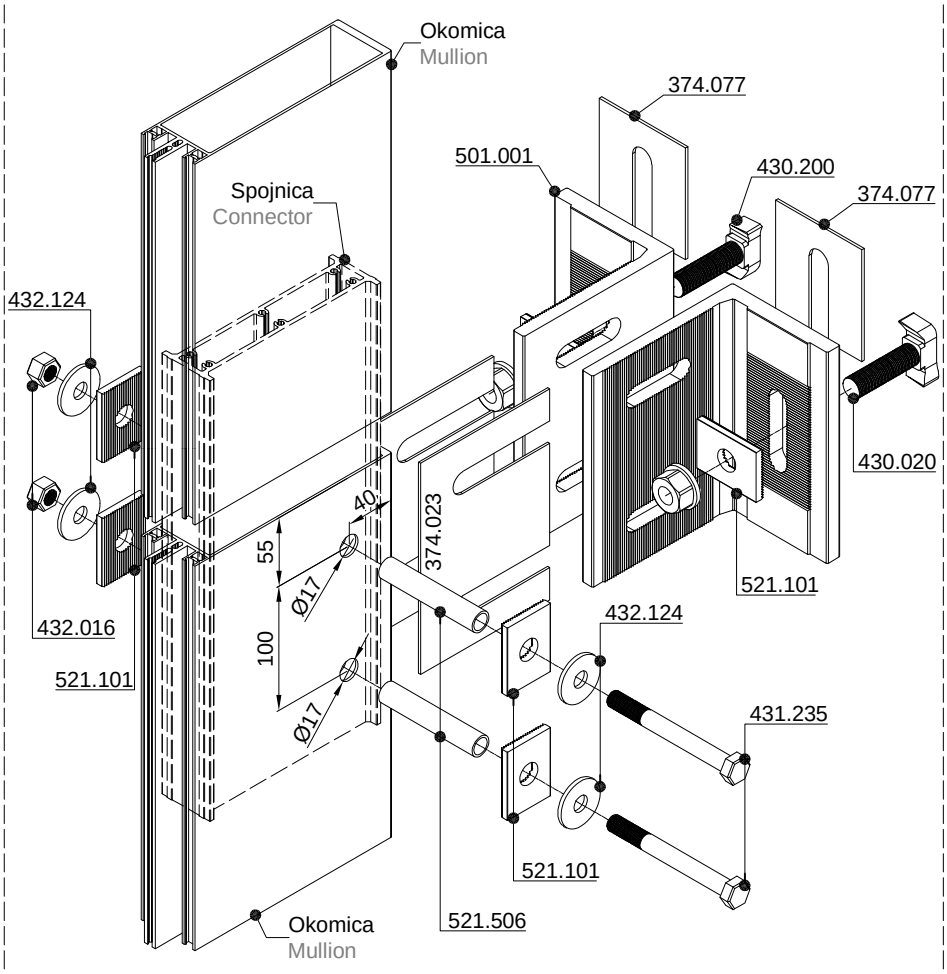

374.023 - PVC podmetač (374.077)
374.023 - PVC pad (374.077)
501.001 - Aluminijski nosač
501.001 - Aluminum carrier
521.101 - Aluminijska podloška
521.101 - Aluminum washer
430.200 - T vijak za C vodilicu
430.200 - T bolt for C guiderail
521.506 - Inox distancer
521.506 - Stainless steel spacer
432.124 - Podloška (DIN 9021)
432.124 - Washer (DIN 9021)
431.235 - Vijak M12 (DIN 931)
431.235 - Screw M12 (DIN 931)
432.016 - Matica M12 (DIN 985)
432.016 - Nut M12 (DIN 985)

Okomica Mullion	Spojnica okomica Mullion connector	Dužina spojnica Connector lenght
FMO 50/200	SB-072	400 mm
FMO 50/160	SB-071	
FMO 50/140	SB-070	
FMO 50/120	SB-069	
FMO 50/90	SB-067/M	

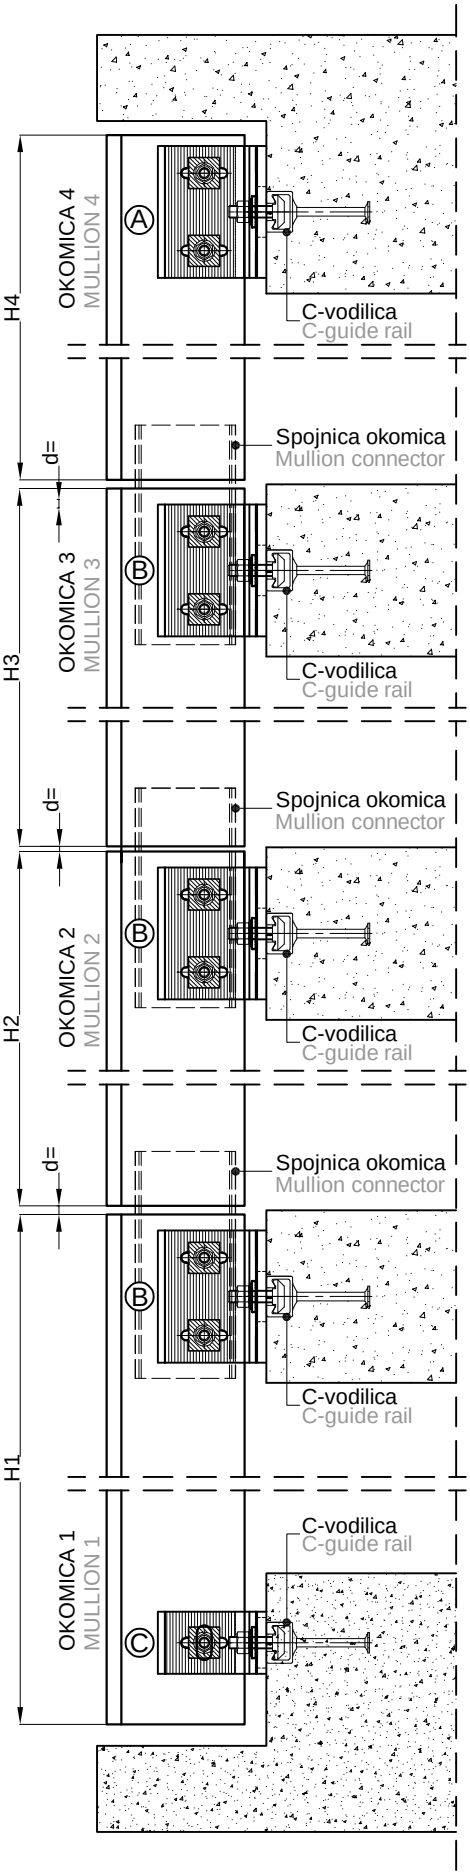

Vijčanu vezu učvrstiti upotrebom moment ključa i moment silom od 4 Nm.
Tighten the screw connection using a torque wrench and a torque force of 4 Nm.


d-dilatacijski prostor između dvije okomice
d-dilatation space between two mullions

Fasada na 3 oslonca
Facade with 3 supports

H1-visina okomice 1 H1-mullion height 1
H2-visina okomice 2 H2-mullion height 2


Ⓓ Pokretni i pokretni oslonac Moveable and moveable support

U slučaju spoja pokretnog i pokretnog oslonca, spojnica okomica spojena je žlijebovima za donju okomicu i služi pokretni oslonac gornje okomice
For a combination of moveable and moveable support, a connector is connected with grooves to the lower mullion and serves as a movable support for the upper mullion

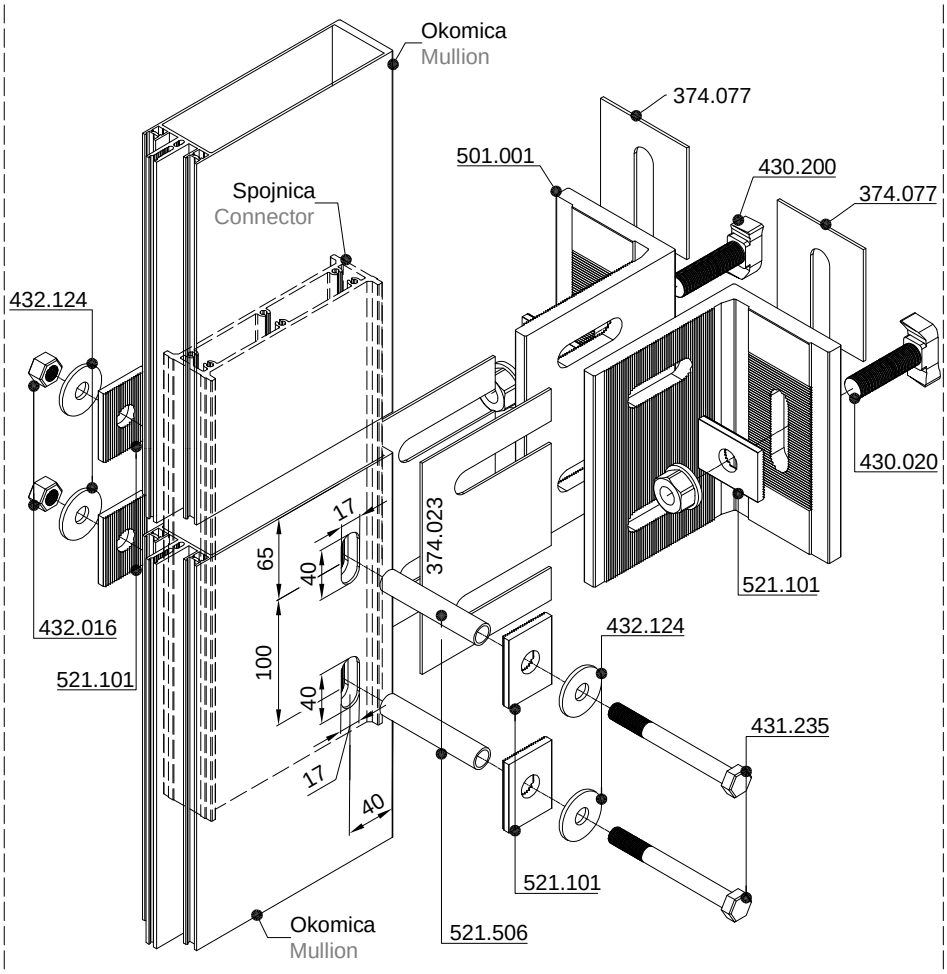


374.023 - PVC podmetač (374.077)
374.023 - PVC pad (374.077)
501.001 - Aluminijski nosač
501.001 - Aluminum carrier
521.101 - Aluminijska podloška
521.101 - Aluminum washer
430.200 - T vijak za C vodilicu
430.200 - T bolt for C guiderail
521.506 - Inox distancer
521.506 - Stainless steel spacer
432.124 - Podloška (DIN 9021)
432.124 - Washer (DIN 9021)
431.235 - Vijak M12 (DIN 931)
431.235 - Screw M12 (DIN 931)
432.016 - Matica M12 (DIN 985)
432.016 - Nut M12 (DIN 985)

Okomica Mullion	Spojnica okomica Mullion connector	Dužina spojnica Connector lenght
FMO 50/200	SB-072	400 mm
FMO 50/160	SB-071	
FMO 50/140	SB-070	
FMO 50/120	SB-069	
FMO 50/90	SB-067/M	

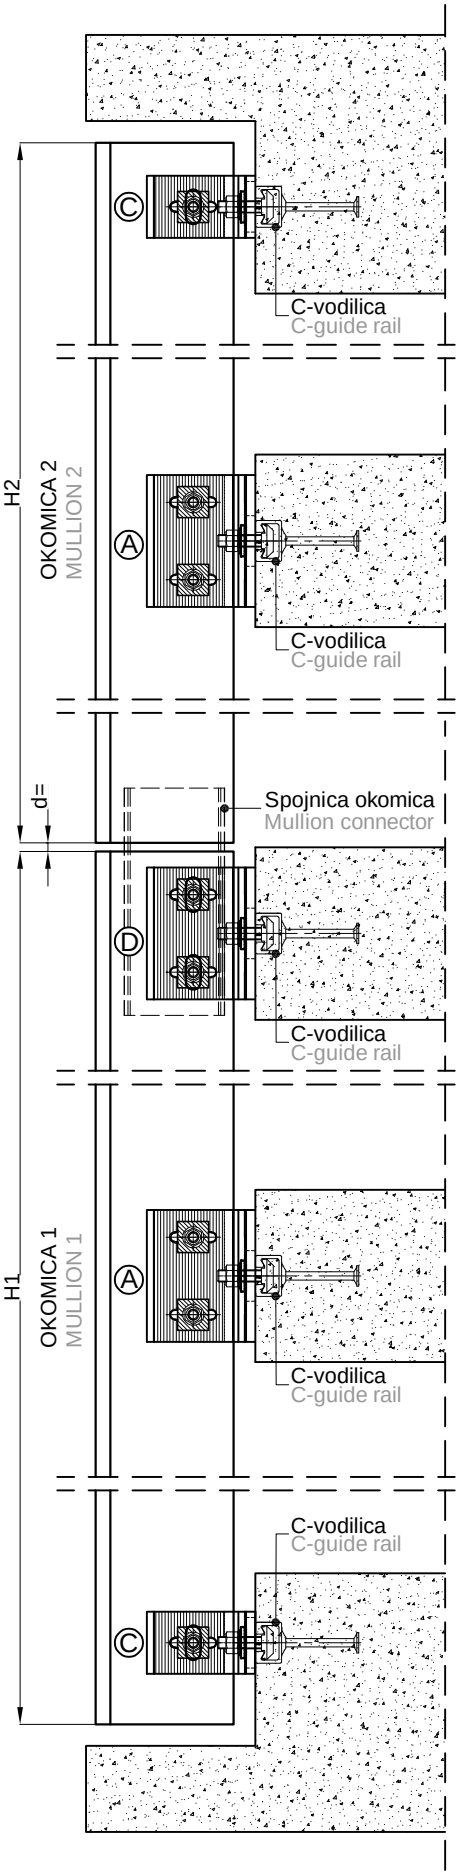

Vijčanu vezu učvrstiti upotrebom moment ključa i moment silom od 4 Nm.
Tighten the screw connection using a torque wrench and a torque force of 4 Nm.


d-dilatacijski prostor između dvije okomice
d-dilatation space between two mullions

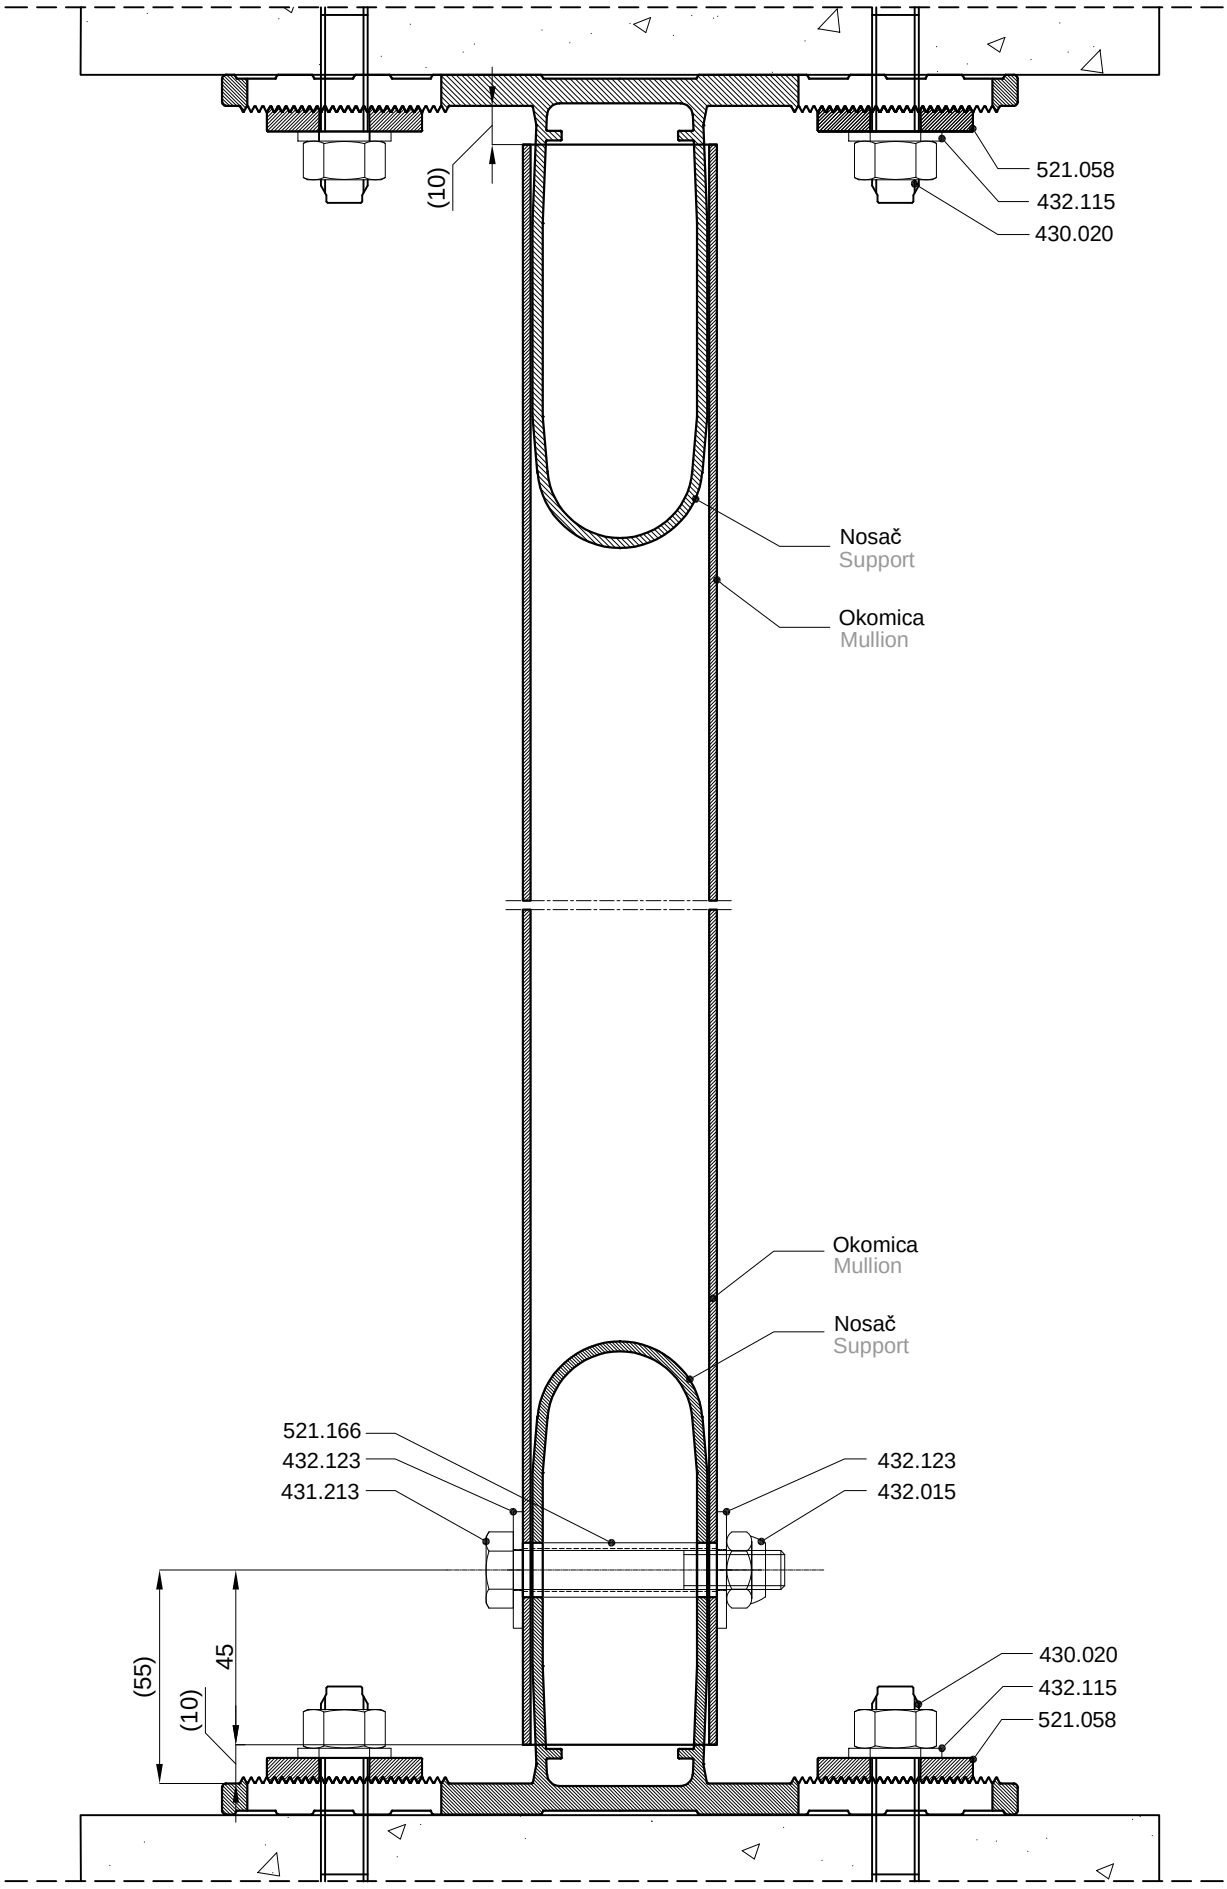
(10)
521.058
432.115
430.020
Nosač
Support
Okomica
Mullion
Okomica
Mullion
Nosač
Support
521.166
432.123
431.213
432.123
432.015
(55)
45
(10)
430.020
432.115
521.058

Fasada na 2 oslonca
Facade with 2 supports

Ⓔ Pokretni oslonac Moveable support


Dužina nosača definirana je za svaki pojedini model s obzirom na dužinu okomice
The length of the support is defined by each particular model regarding to the mullion length

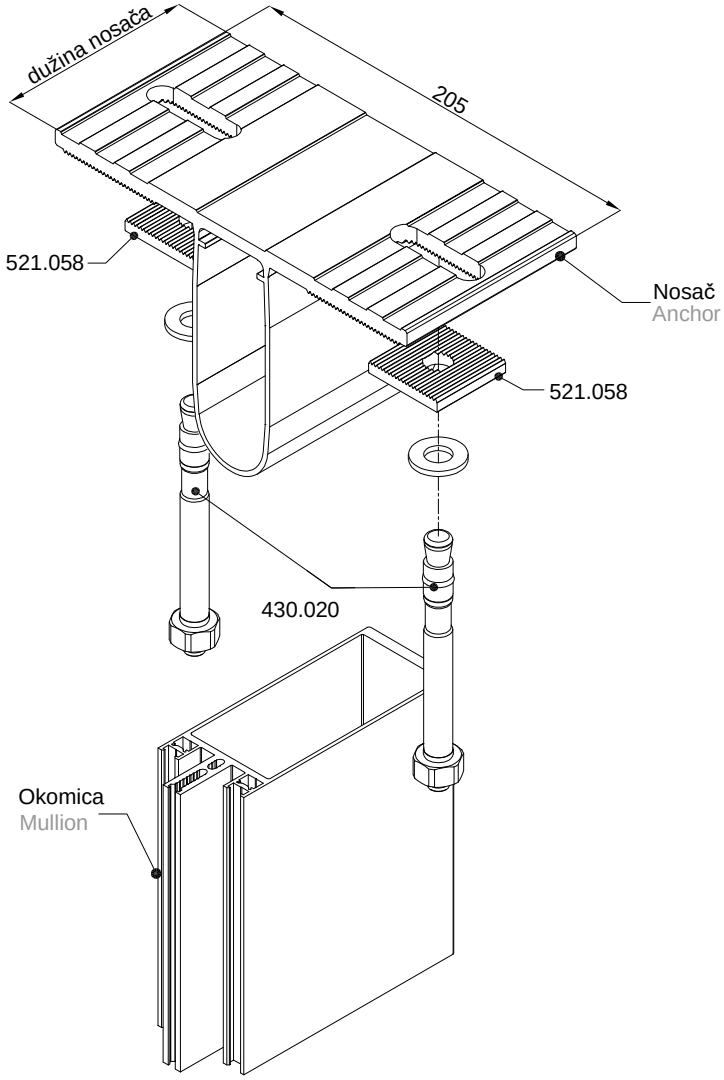

430.020 - Tipl vijak za beton
430.020 - Anchor for concrete

521.058 - Aluminijska podloška
521.058 - Aluminum washer


Okomica Mullion	Nosač Anchor	Dužina nosača Anchor lenght
FMO 50/270	501.044	205 mm
FMO 50/200	501.020	159 mm
FMO 50/160	501.021	115.5 mm
FMO 50/140	501.022	98.7 mm
FMO 50/120	501.023	79.5 mm
FMO 50/90	501.024	50 mm

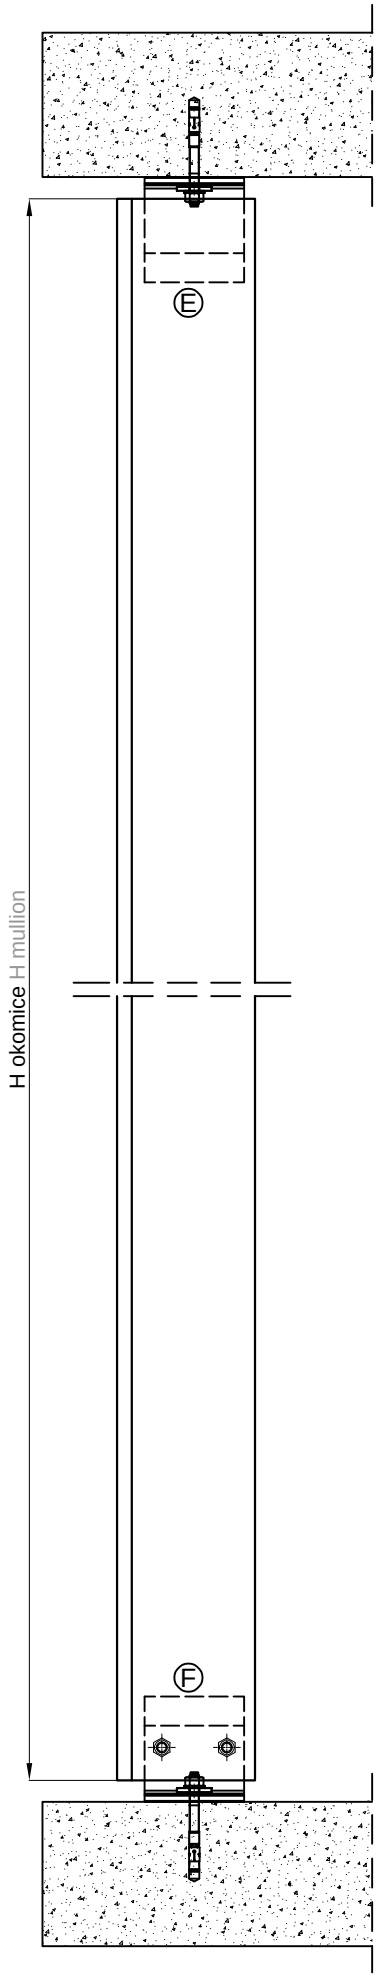


Fasada na 2 oslonca
Facade with 2 supports

Ⓕ Fiksni oslonac Fixed support

Dužina nosača definirana je za svaki pojedini model s obzirom na dužinu okomice
The length of the support is defined by each particular model regarding to the mullion length

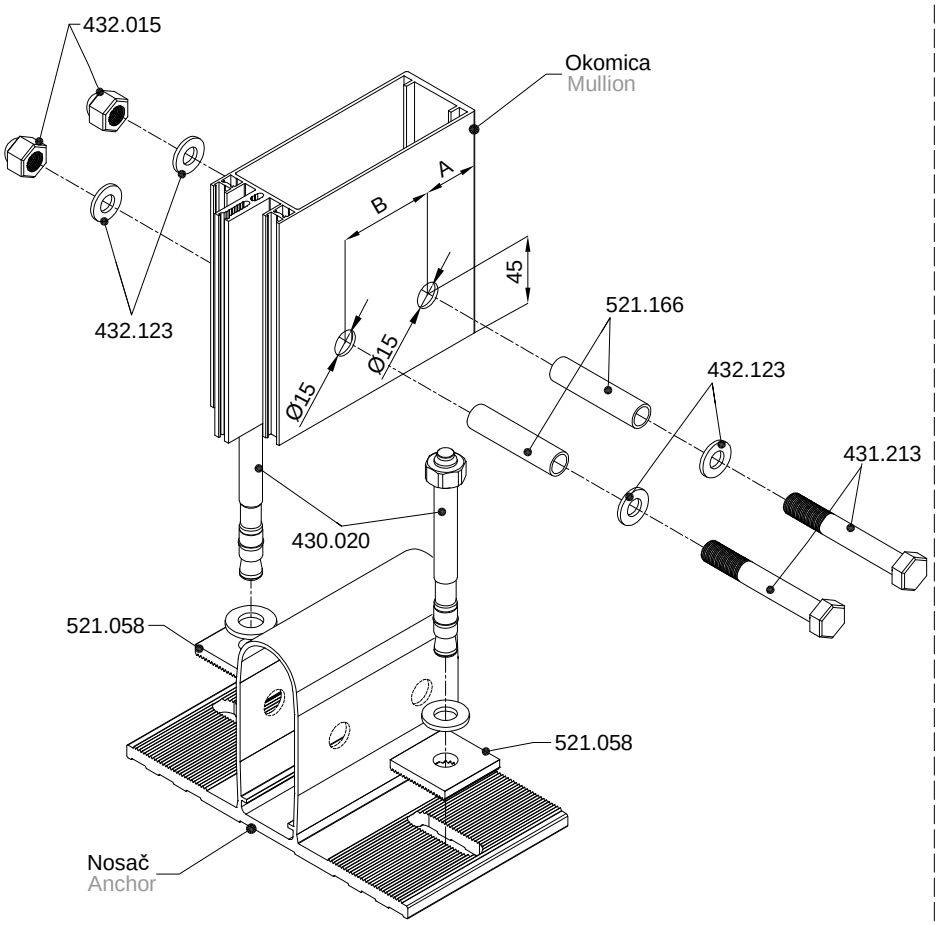

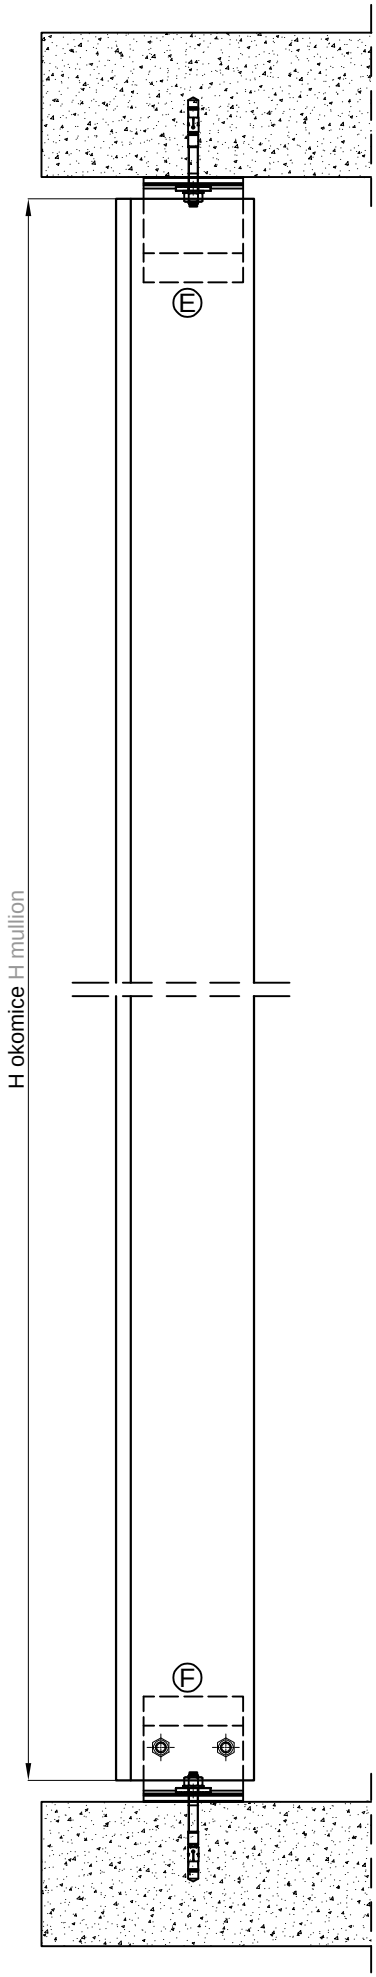


430.020 - Tipl vijak za beton
430.020 - Anchor for concrete
521.058 - Aluminijska podloška
521.058 - Aluminum washer
521.166 - Inox distancer
521.166 - Stainless steel spacer
432.123 - Podloška (DIN 9021)
432.123 - Washer (DIN 9021)
431.213 - Vijak M10 (DIN 931)
431.213 - Screw M10 (DIN 931)
432.015 - Matica M10 (DIN 985)
432.015 - Nut M10 (DIN 985)


Okomica Mullion	**Nosač** Anchor	**Dužina nosača** Anchor lenght	**Dimenzija A** Dimension A	**Dimenzija B** Dimension B
FMO 50/270	501.044	205 mm	115 mm	66.5 mm
FMO 50/200	501.020	159 mm	47 mm	84 mm
FMO 50/160	501.021	115.5 mm	36 mm	65 mm
FMO 50/140	501.022	98.7 mm	56 mm	-
FMO 50/120	501.023	79.5 mm	47 mm	-
FMO 50/90	501.024	50 mm	32 mm	-


Rupe na okomici se buše u radionici, dok se rupe na nosaču buše na gradilištu.
Holes on the mullion are drilled in the workshop, while the holes on the support are drilled on the site.


Postoji mogućnost vješanja fasade tako da oslonac E bude fiksan, a F pokretan.
It is possible to make a hanging facade, so that E support is fixed and F is moveable.

NAPOMENA: Standardizirani primjer
NOTICE: Standardised example
SLUČAJ: Pokretni donji oslonac
CASE: Moveable lower supprt

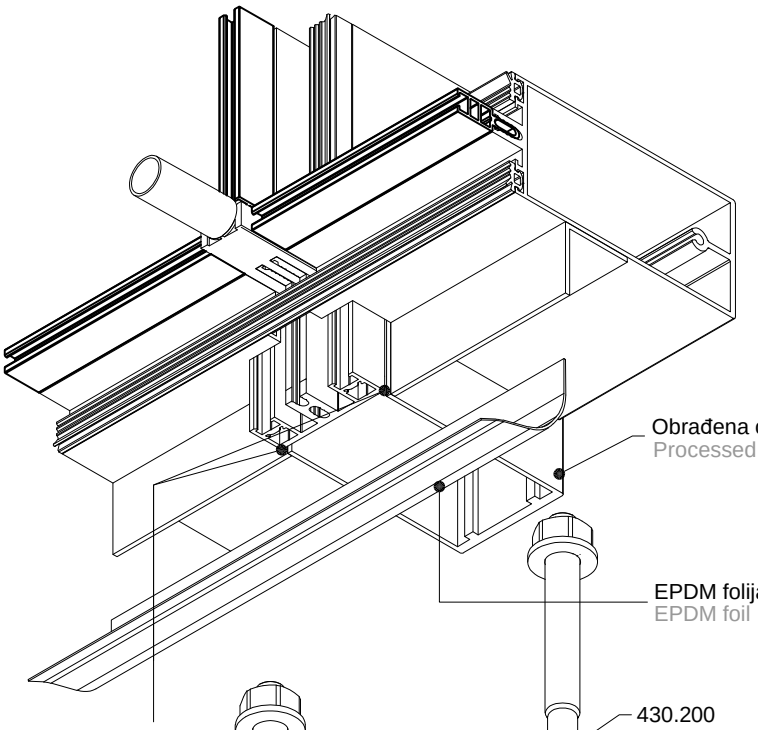

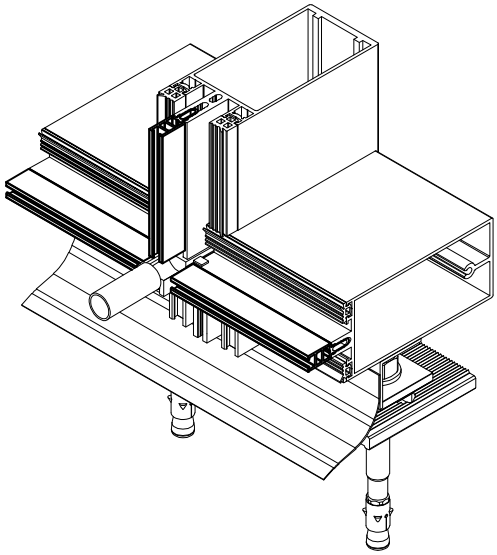

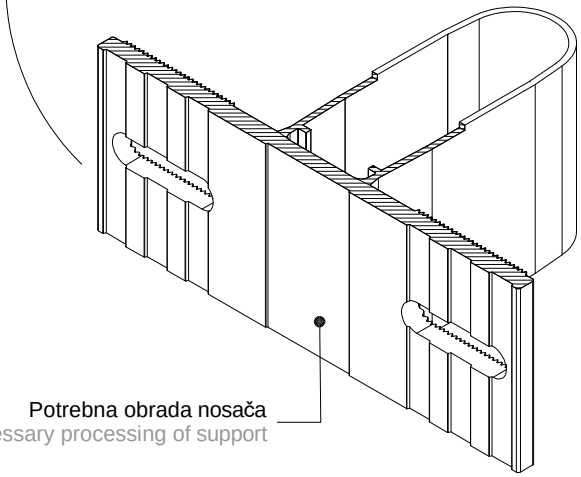


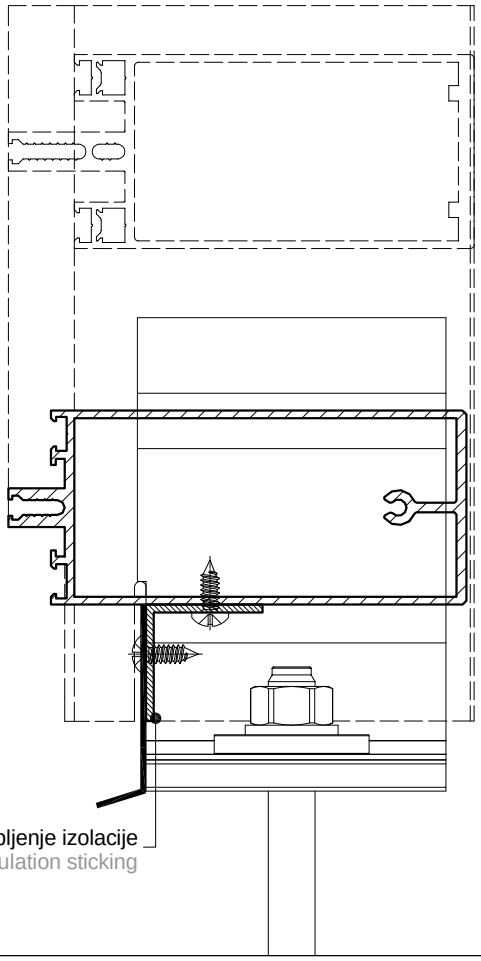



NAPOMENA: Prikazani detalj je samo standardizirani primjer. Opisani spoj mora biti prilagođen situaciji na objektu, mora odgovarati fizičkim zahtjevima objekta i odgovornost je izvođača.

NOTICE : The demonstrated detail is only a standardised example. The described connection has to be adapted to the possibilities existing on site and has to be checked to the building physics requirements and is in responsibility of fabricator.

SLUČAJ: Pokretni donji oslonac **CASE: Moveable lower supprt**

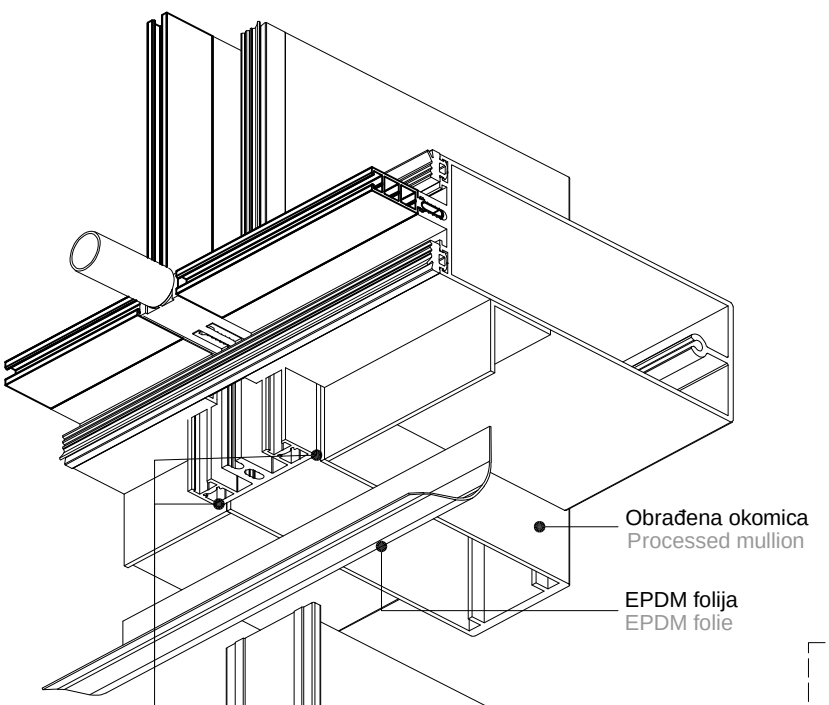

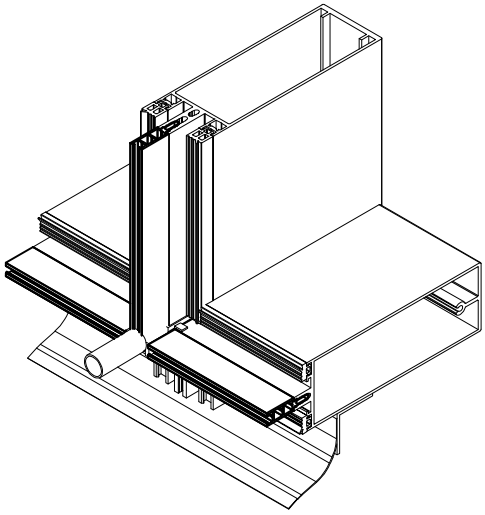


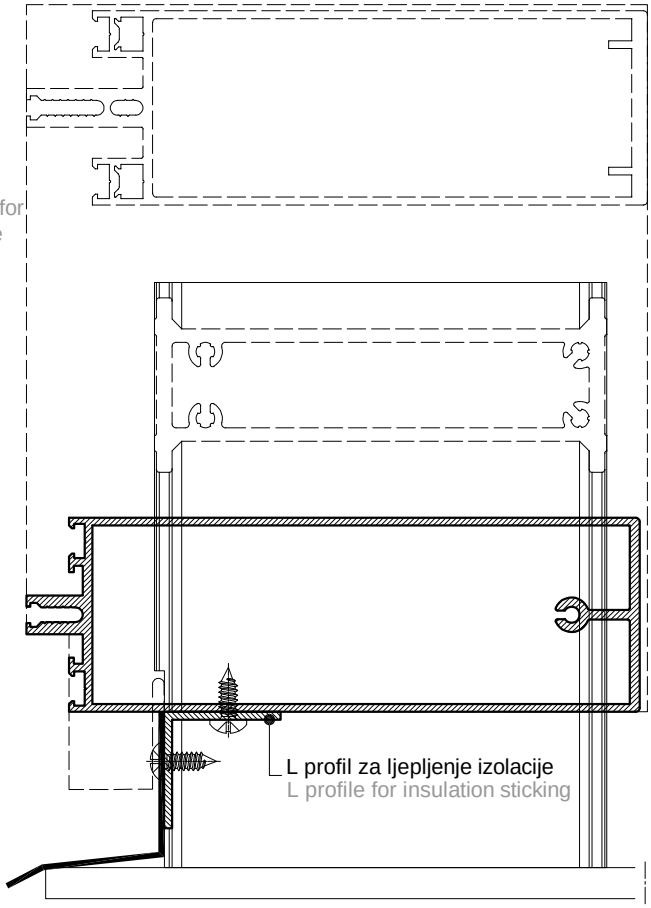


*Ploču je potrebno zavariti na profil umetka
*The plate needs to be welded to the insert profile

Obrada ploče prema profilima umetka
Plate processing according to the insert profiles


SB-072

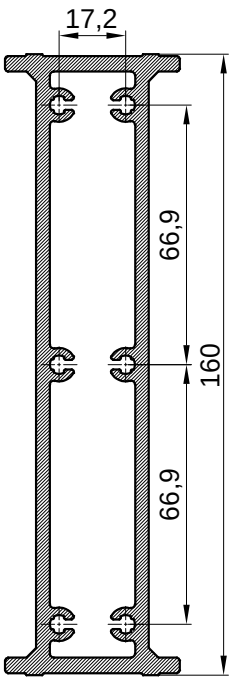


SB-071

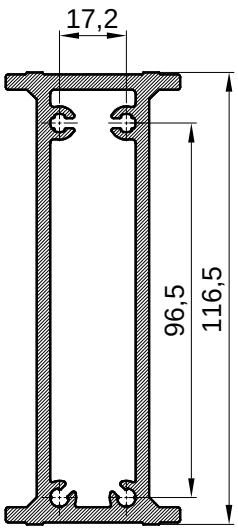


SB-070

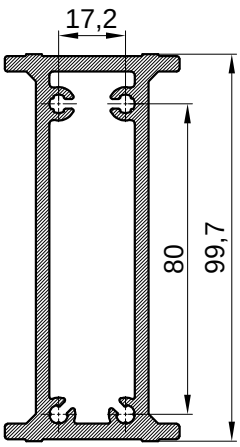

SB-069

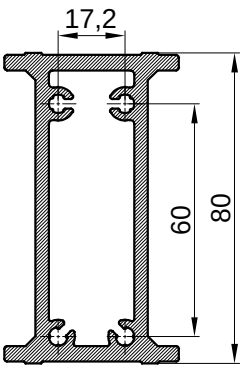



SB-067/M



Okomica Mullion	**Profil umetka (H**[mm]**)** Insert profile (H[mm])	**Razmak između vijaka** [mm] Screw distance [mm]
FMO 50/270	SB-072 (160)	66,9 (x2)
FMO 50/200	SB-072 (160)	66,9 (x2)
FMO 50/160	SB-071 (116,5)	96,5
FMO 50/140	SB-070 (99,7)	80
FMO 50/120	SB-069 (80)	60
FMO 50/90	SB-067/M (50)	30

M 2:1

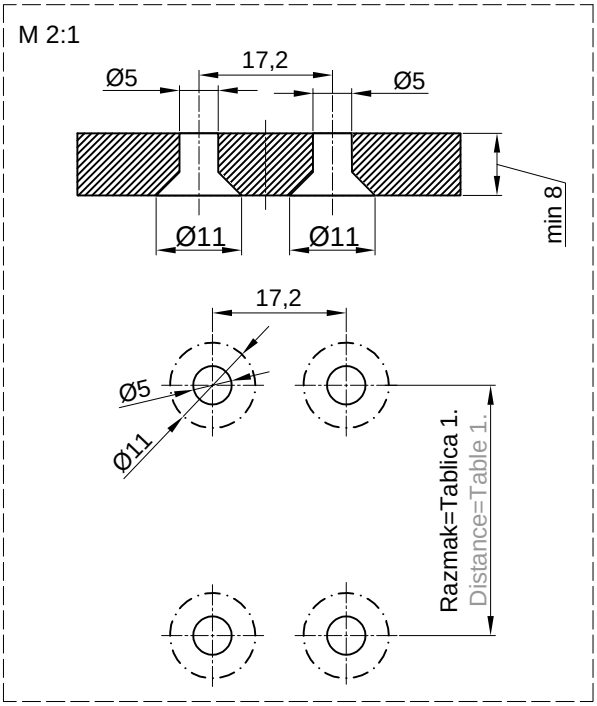

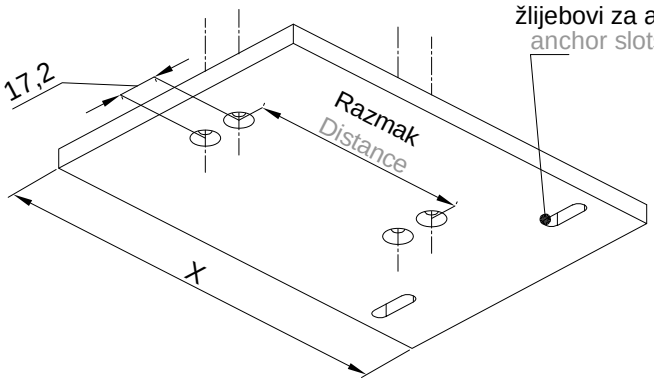


žlijebovi za ankere
anchor slots


*obrada ploče prema zahtjevima na objektu je odgovornost proizvođača
*plate processing according to the building requirements, manufacturer's responsibility


Profil ploče:
Plate profile:


F-0226 (2.59 kg/m) ili drugi or other




Primjer obrade okomice i umetka profila
Example of mullion and insert profile processing

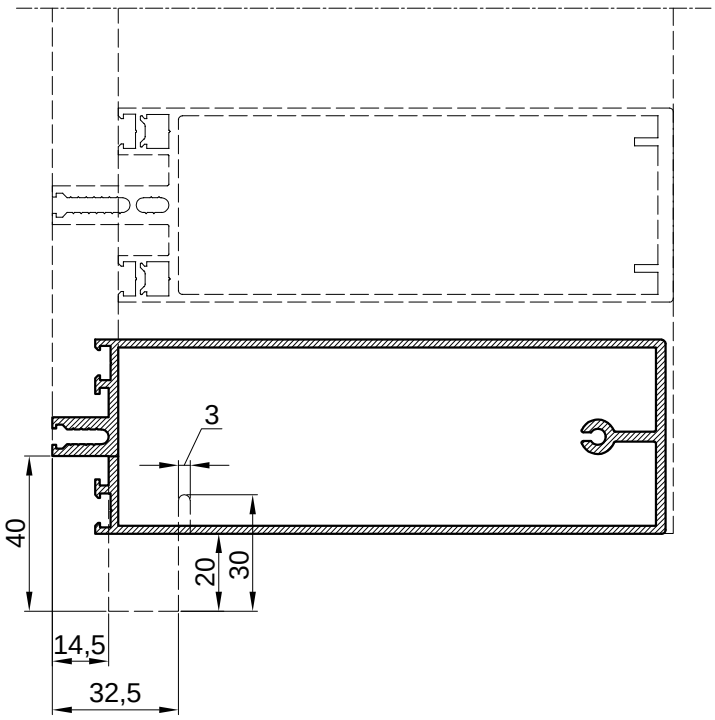

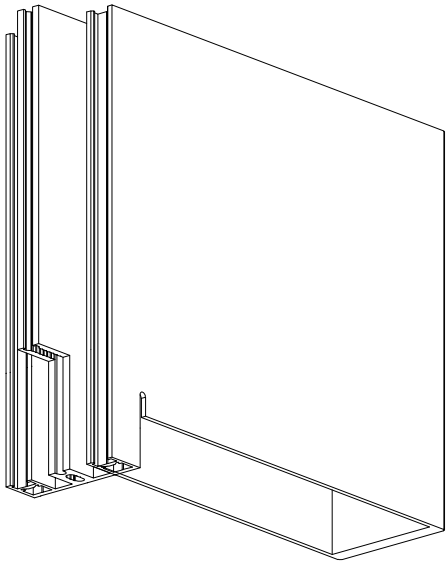


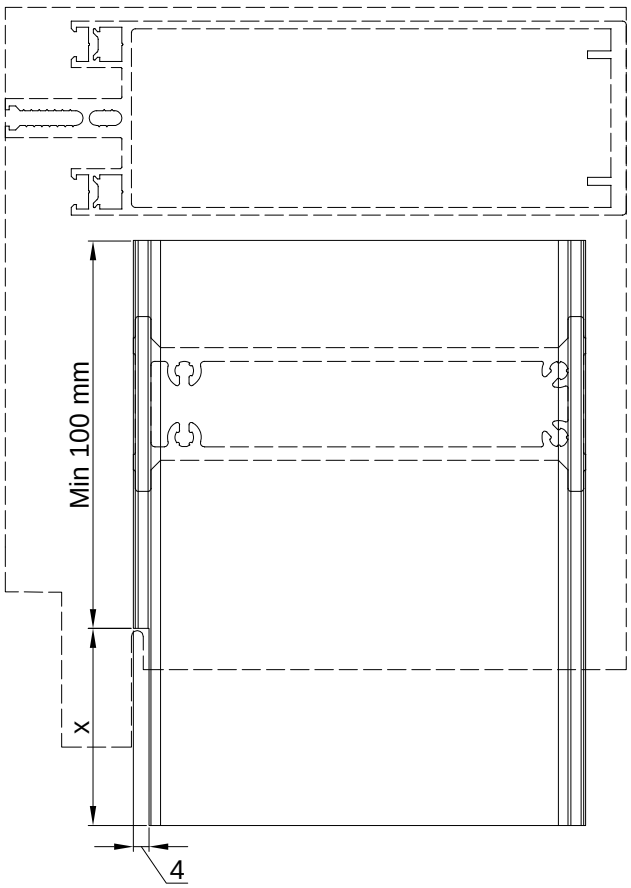


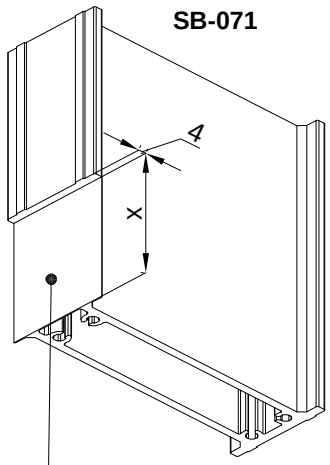



Potrebna obrada profila umetka
Necessary processing of insert profile


Primjer izgleda donjeg pomičnog nosača
Example of lower moveable support

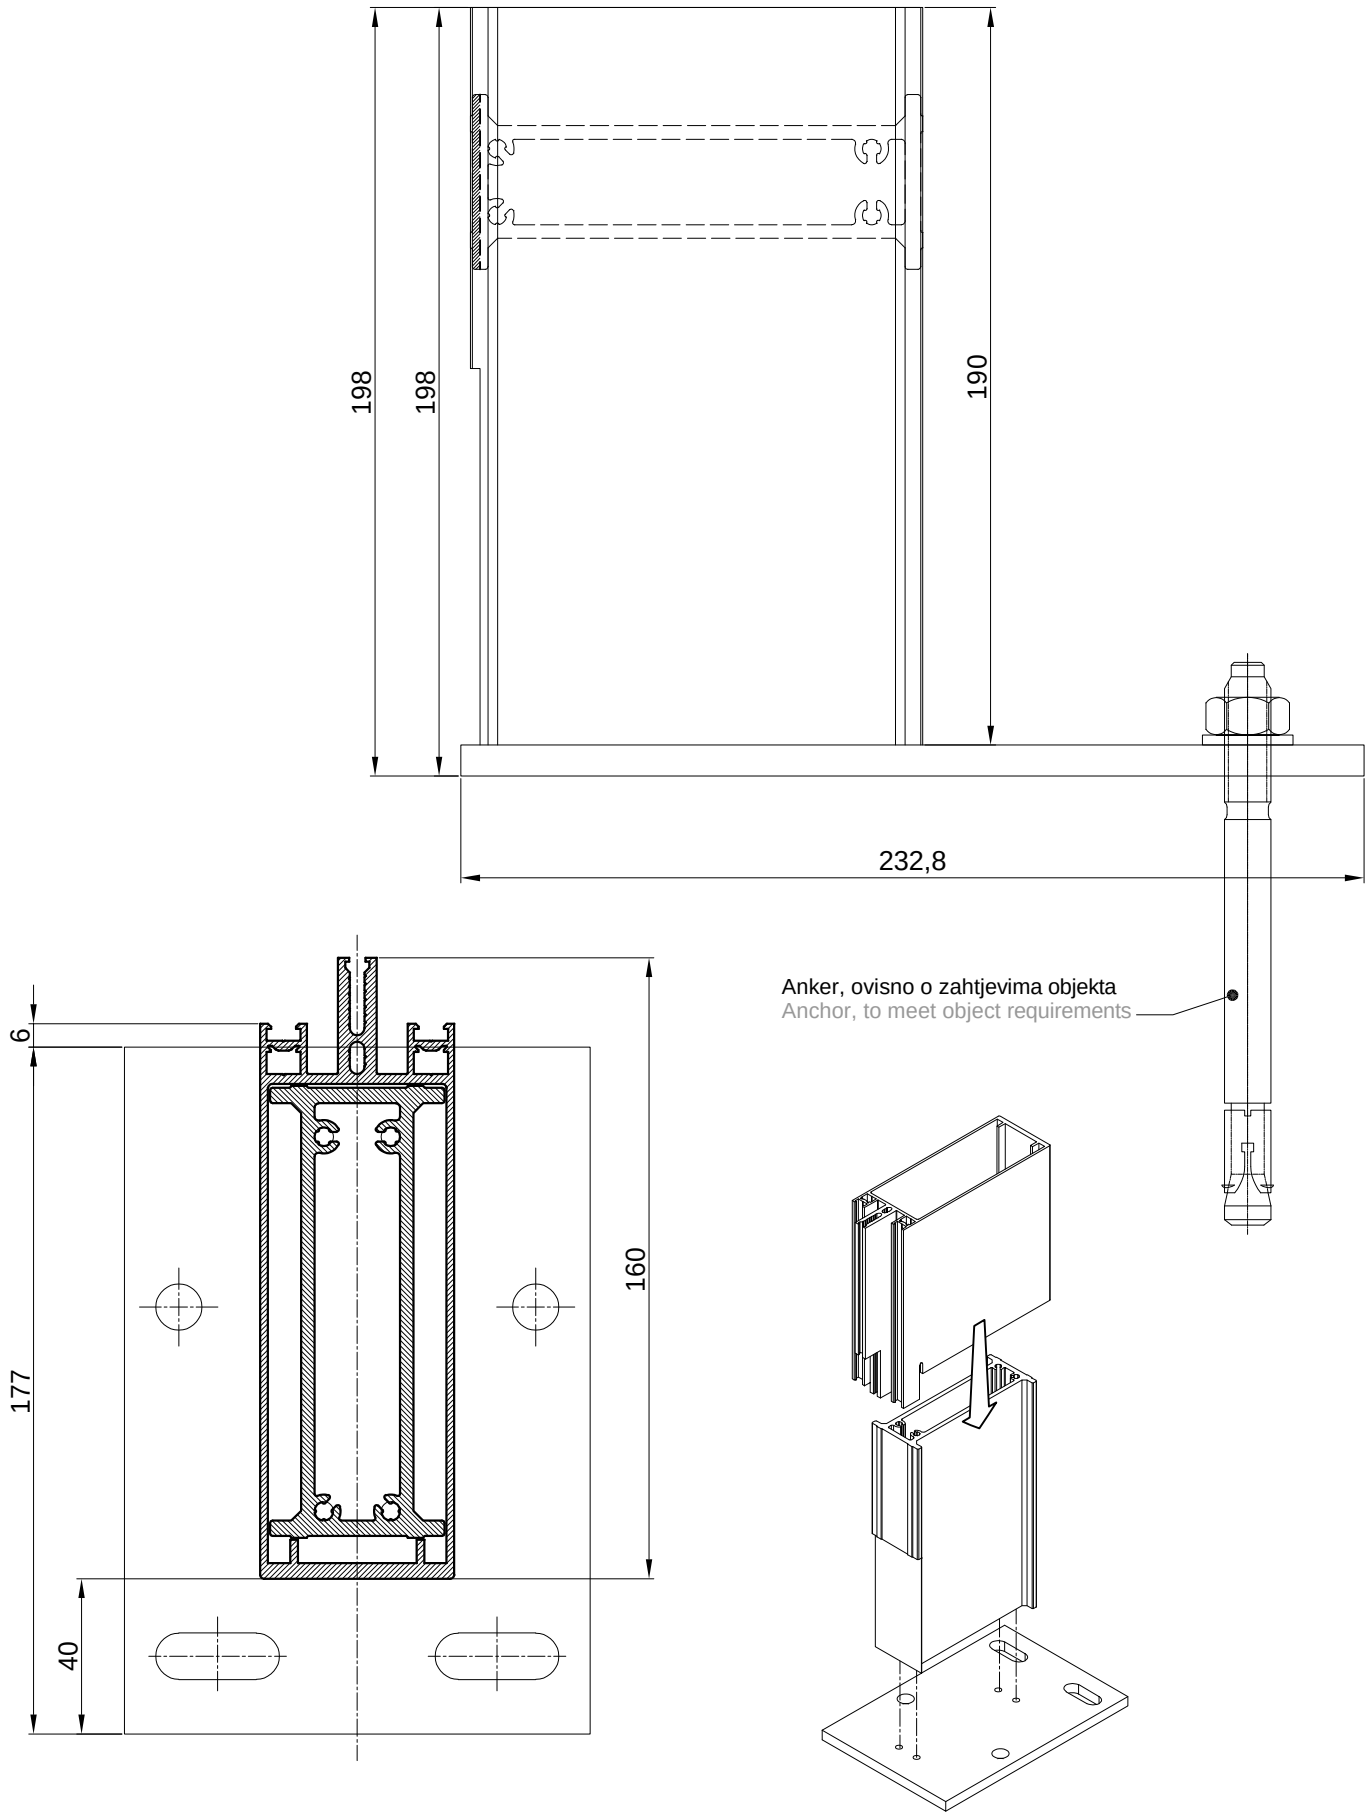


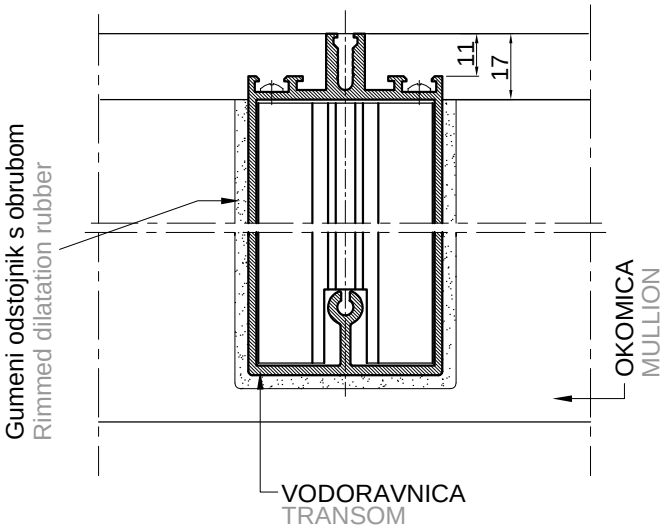
11
17
Gumeni odstojnik s obrubom
Rimmed dilatation rubber
OKOMICA
MULLION
VODORAVNICA
TRANSOM

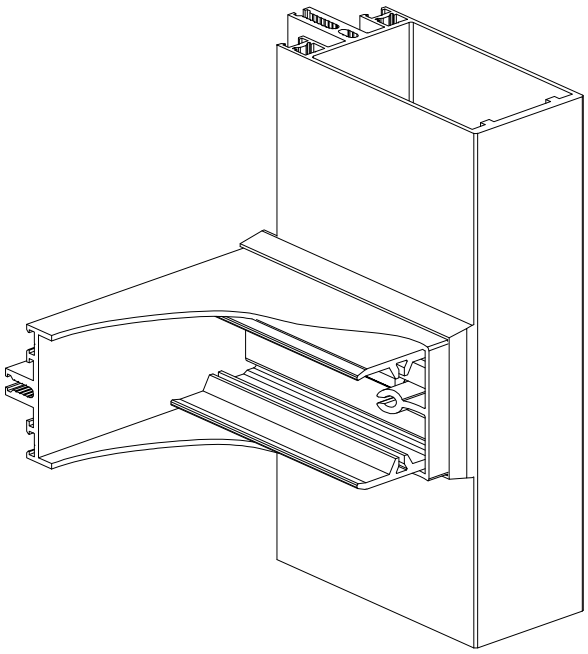


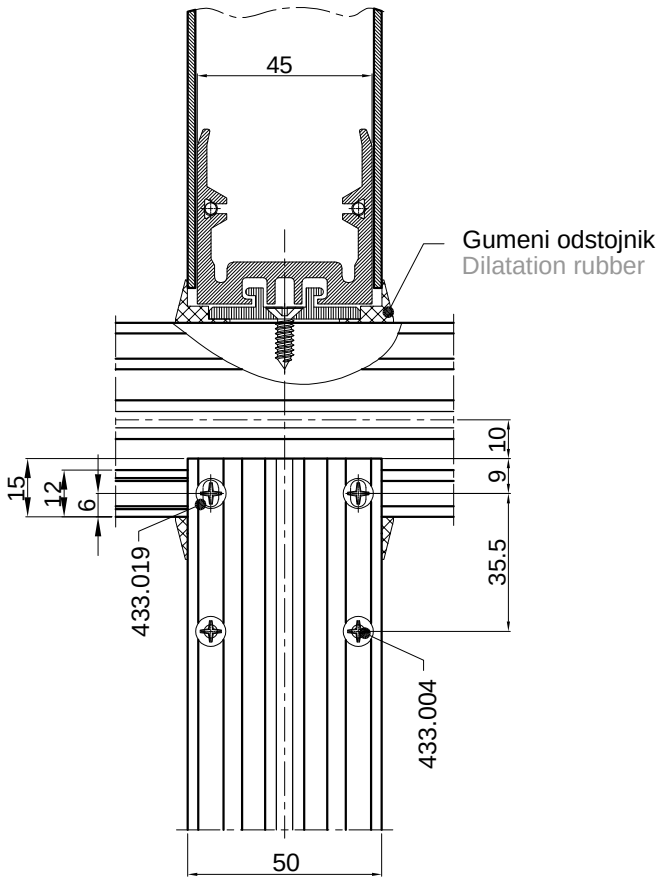

45
Gumeni odstojnik
Dilatation rubber
15
12
6
10
9
35.5
433.019
433.004
50

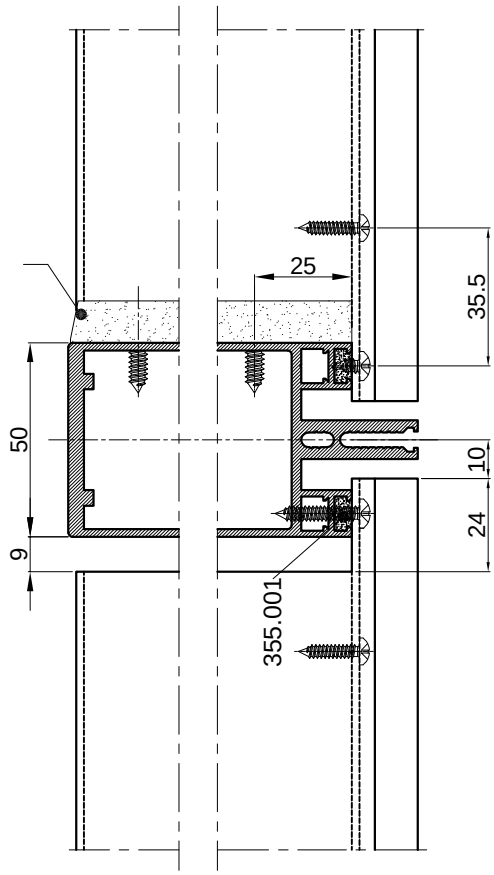

25
35.5
50
10
24
9
355.001

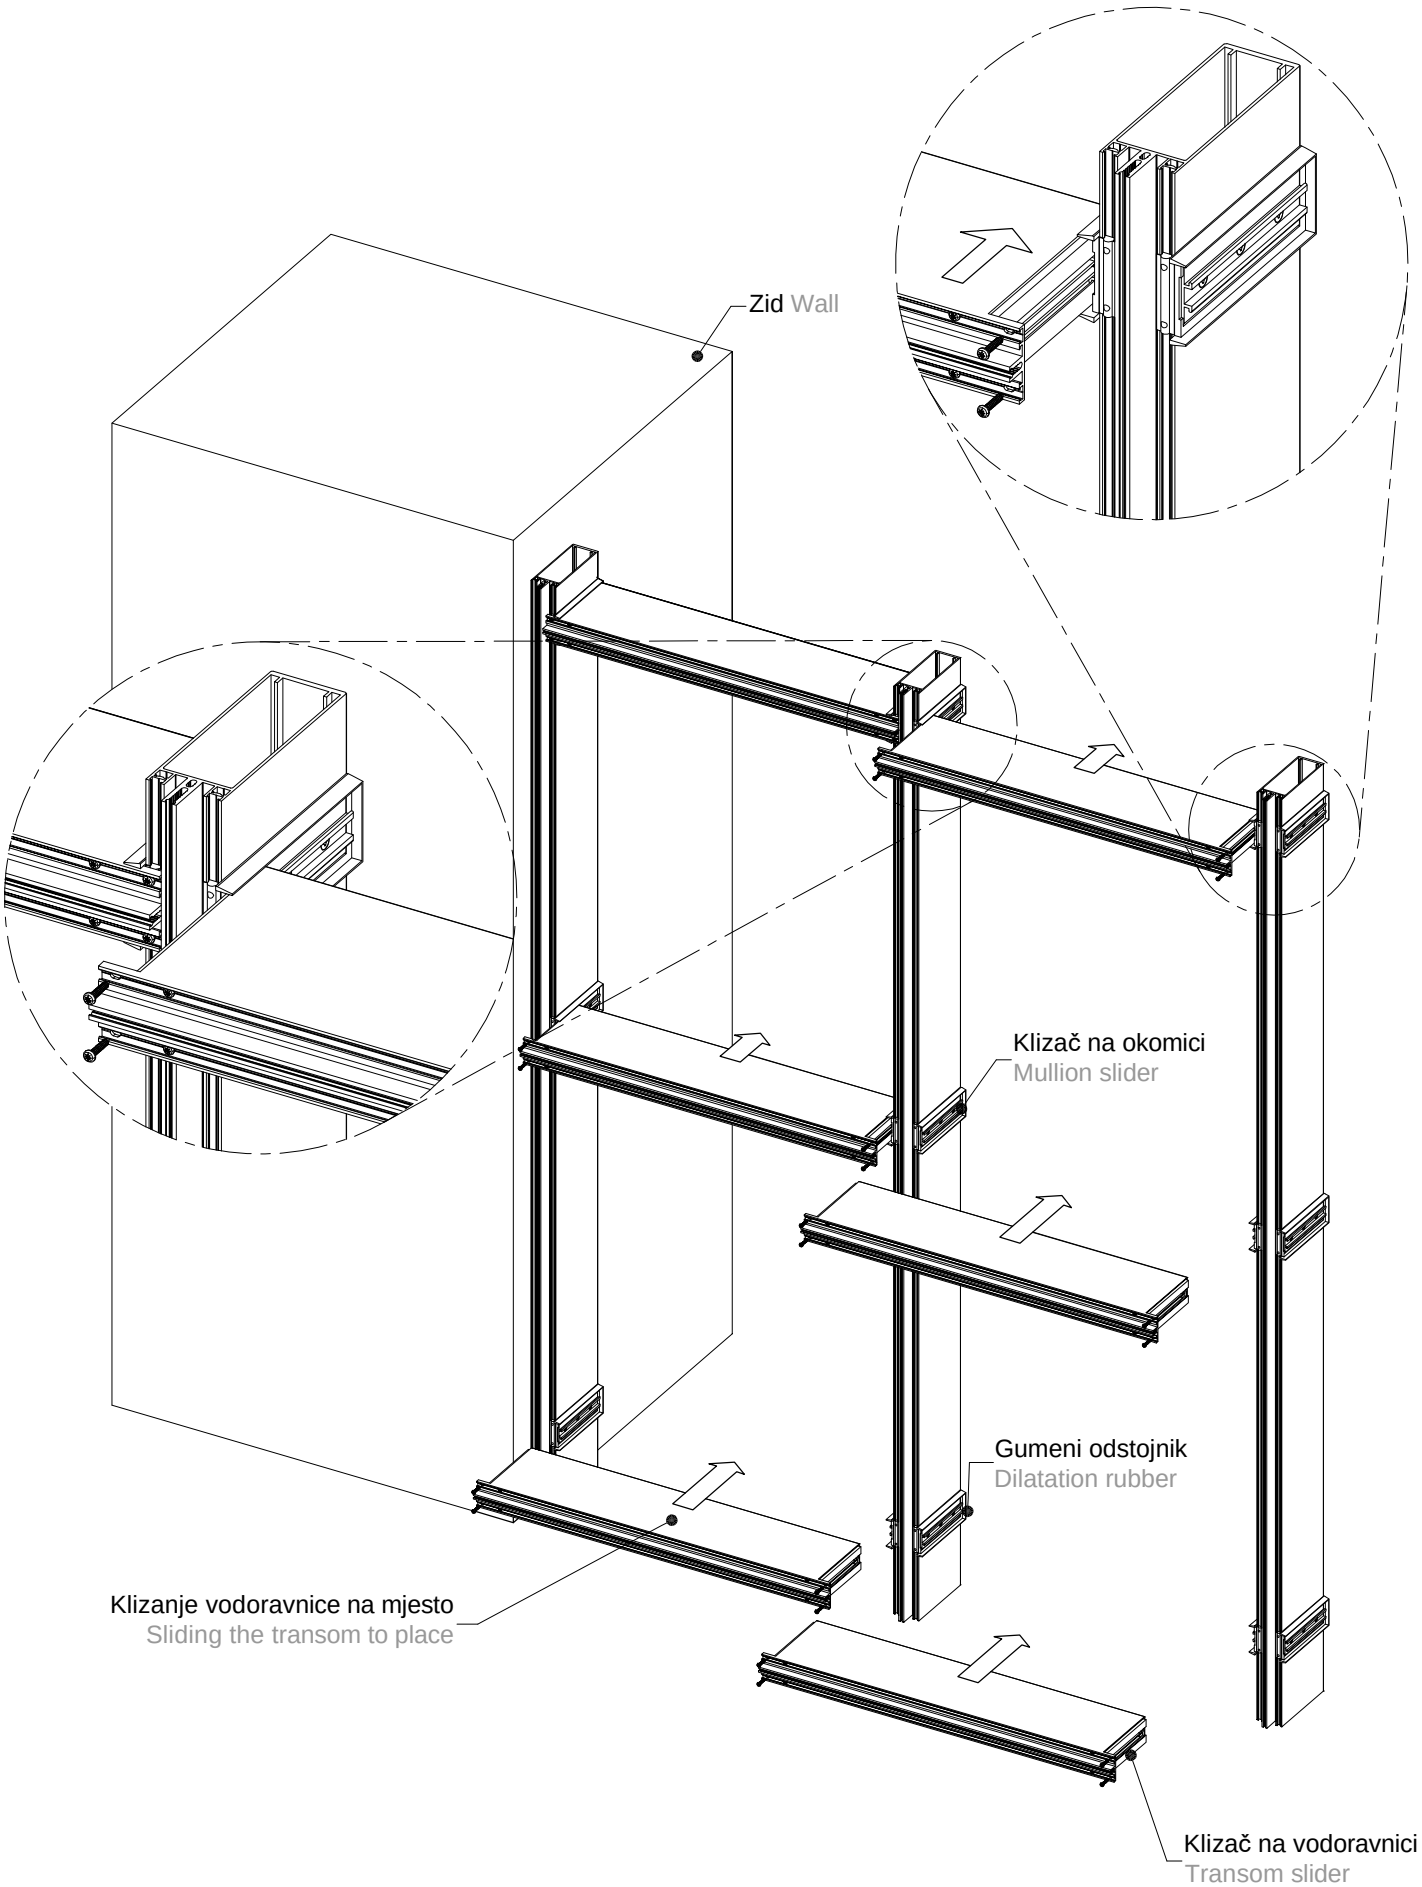

Zid Wall
Klizač na okomici
Mullion slider
Gumeni odstojnik
Dilatation rubber
Klizanje vodoravnice na mjesto
Sliding the transom to place
Klizač na vodoravnici
Transom slider

- Spoj na okomice: FMO 50/120-S, FMO 50/160-S i FMO 50/200-S
- Connection on mullions: FMO 50/120-S, FMO 50/160-S and FMO 50/200-S

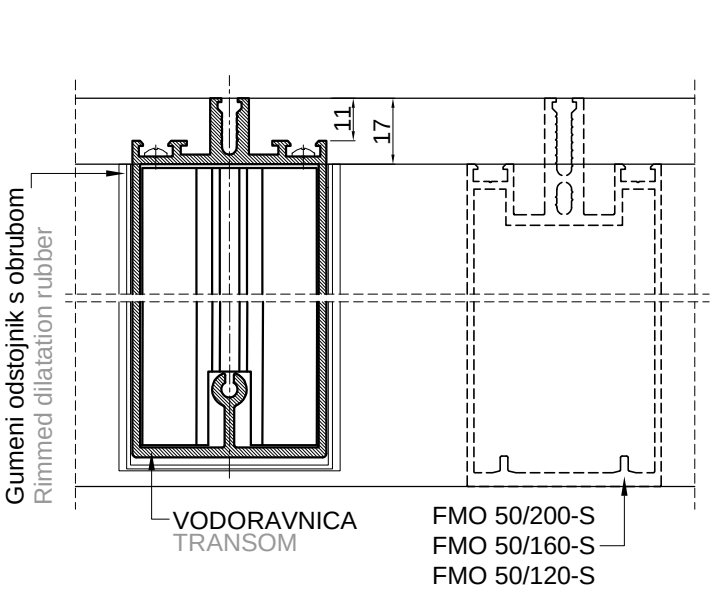


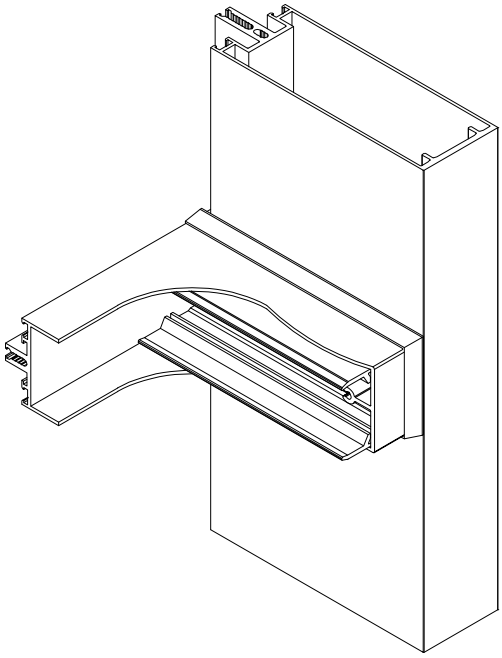


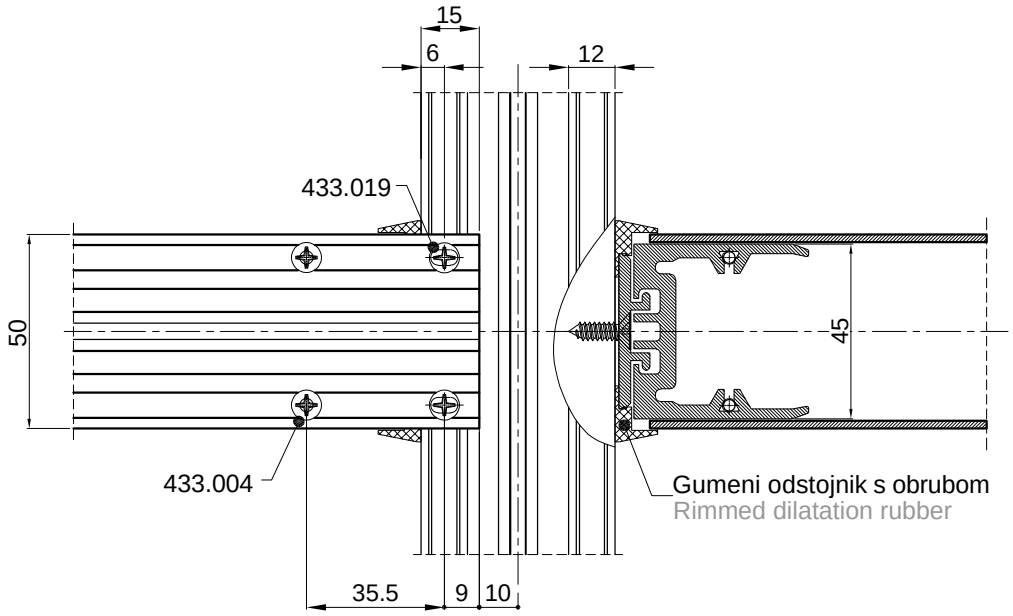


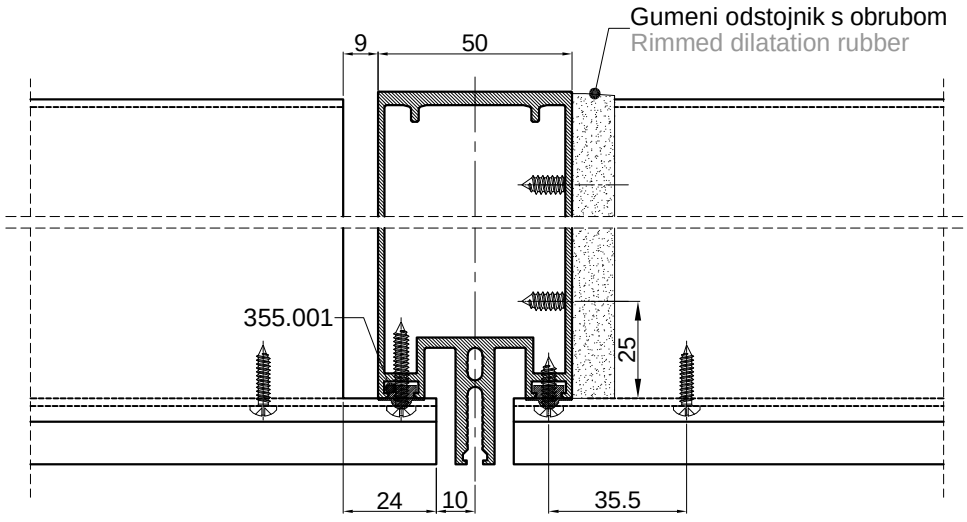



- Spoj na okomice: FMO 50/120-S, FMO 50/160-S i FMO 50/200-S
- Connection on mullions: FMO 50/120-S, FMO 50/160-S and FMO 50/200-S

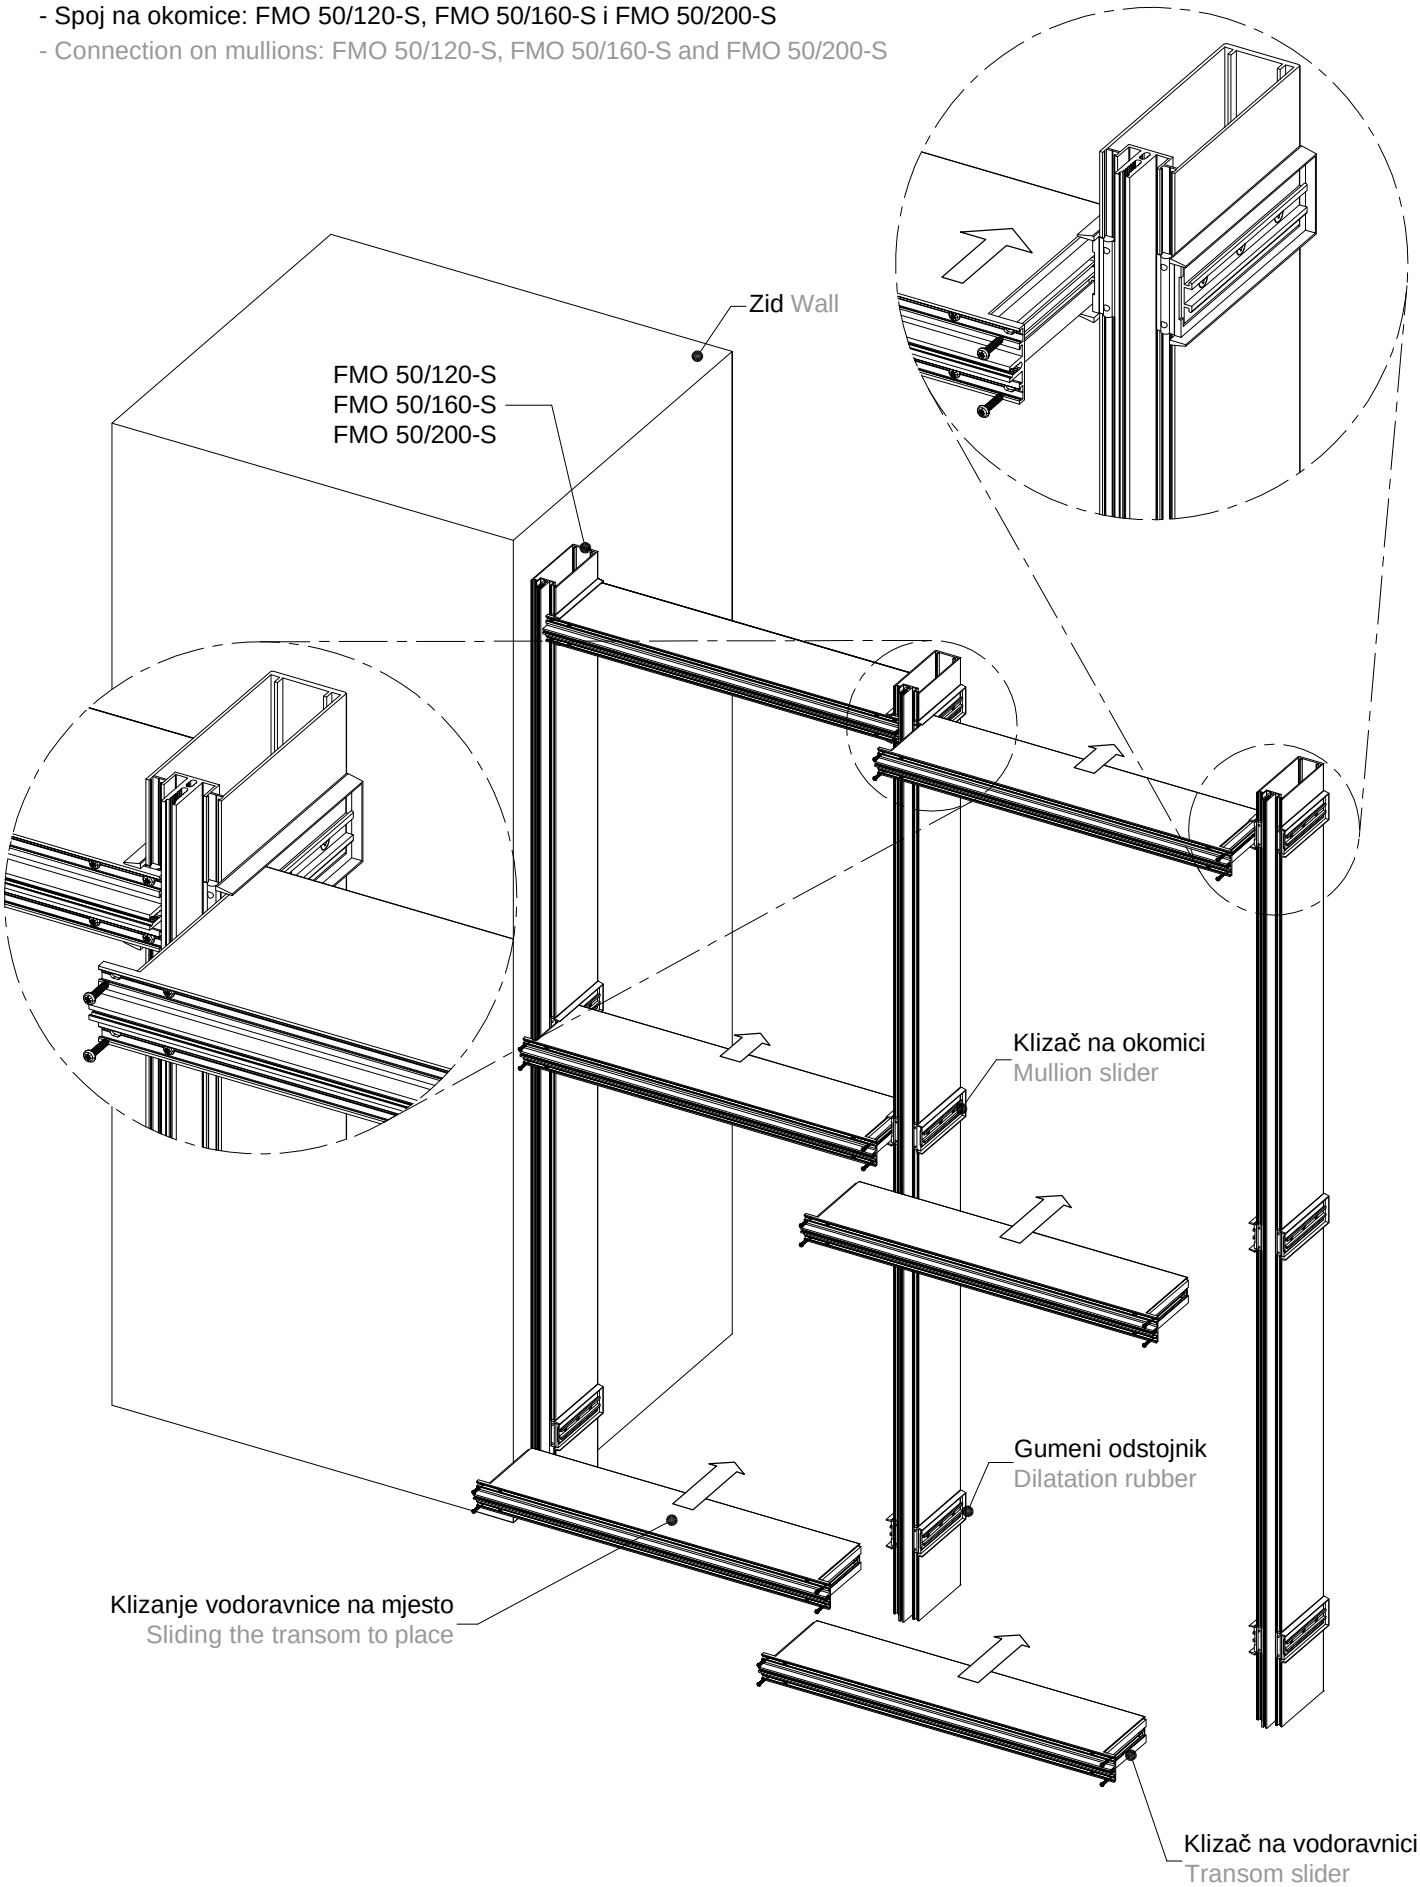


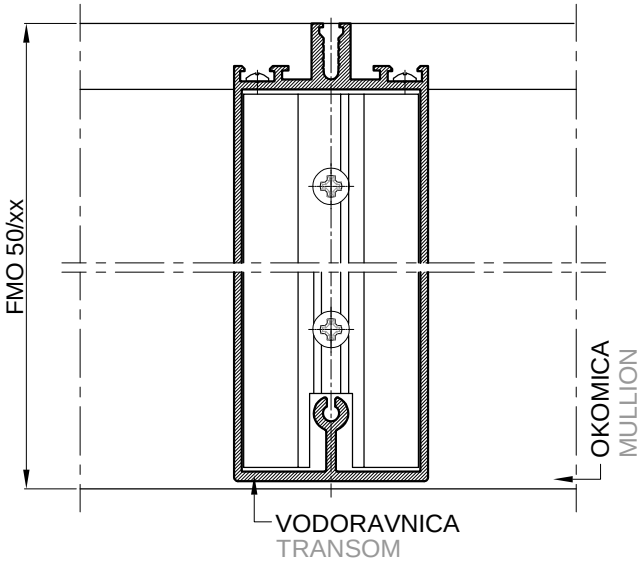

FMO 50/xx
OKOMICA
MULLION
VODORAVNICA
TRANSOM

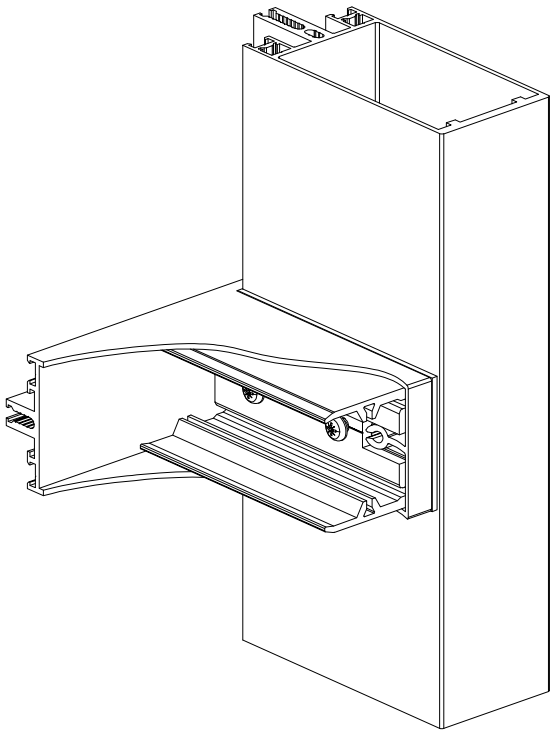


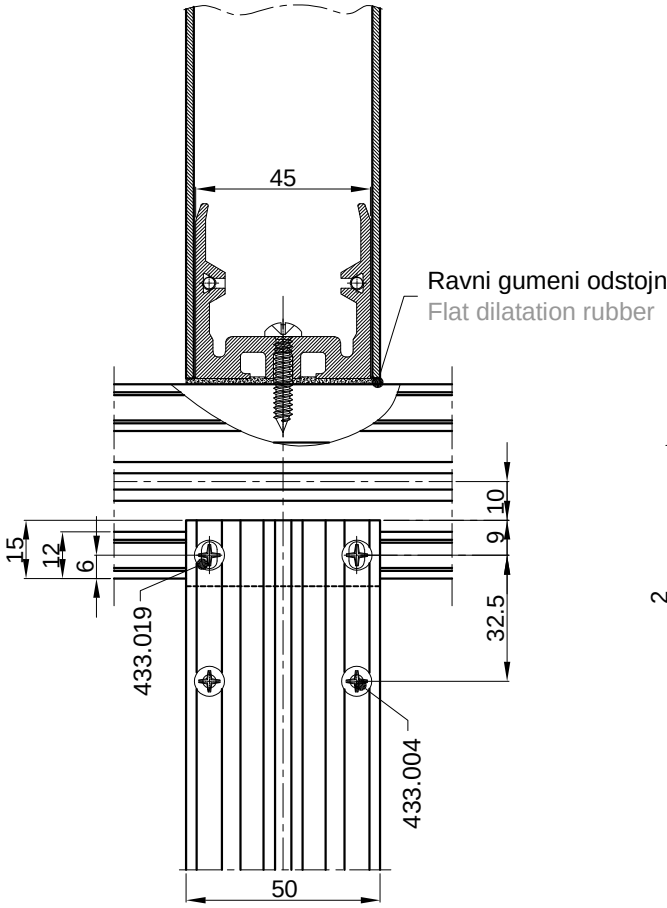

45
Ravni gumeni odstojnik
Flat dilatation rubber
15
12
6
10
9
32.5
433.019
433.004
50

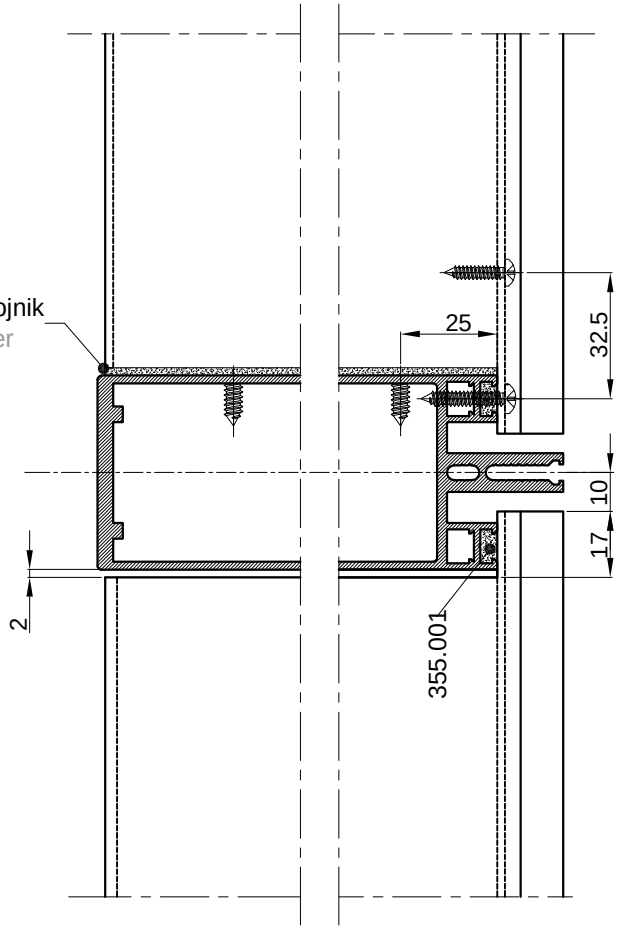

25
32.5
10
17
2
355.001

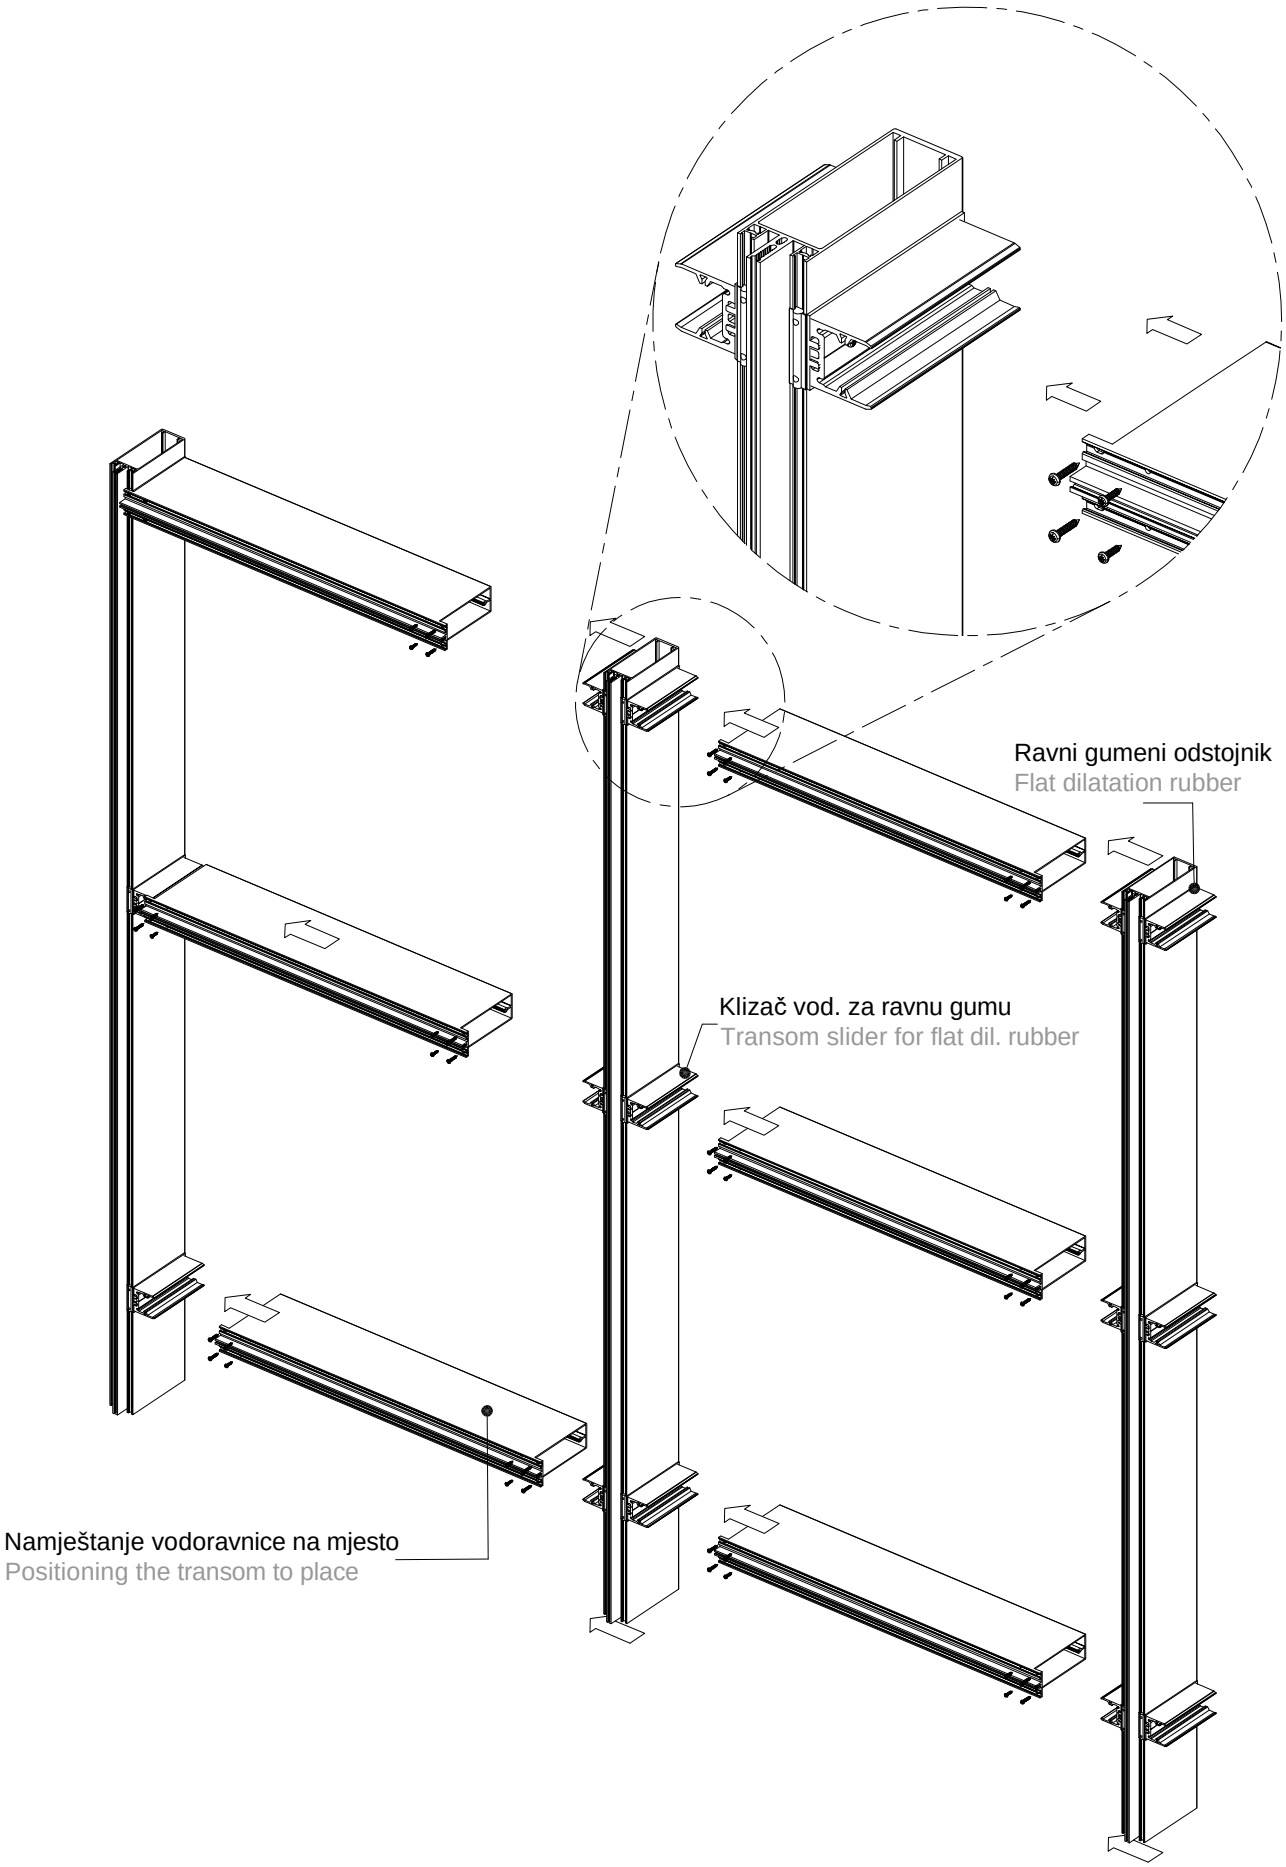
Ravni gumeni odstojnik
Flat dilatation rubber
Klizač vod. za ravnu gumu
Transom slider for flat dil. rubber
Namještanje vodoravnice na mjesto
Positioning the transom to place

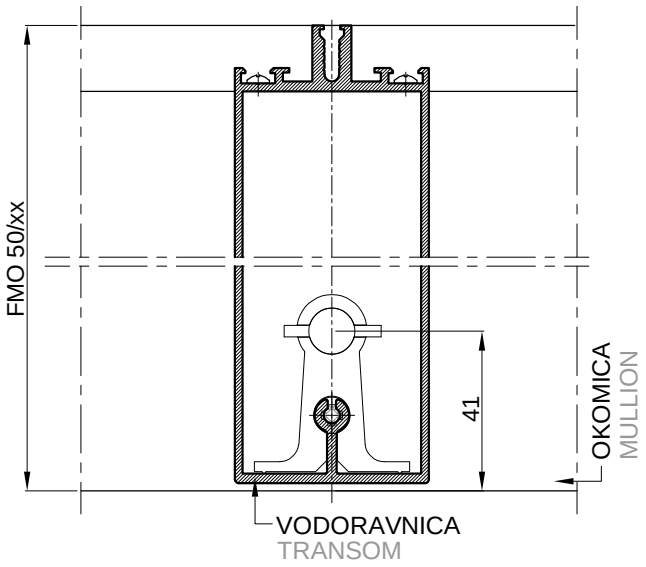

FMO 50/xx
41
OKOMICA
MULLION
VODORAVNICA
TRANSOM

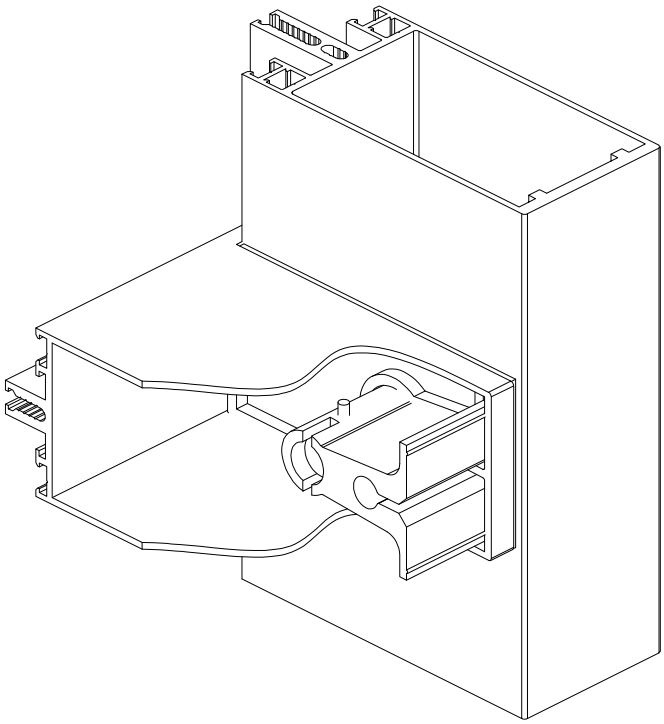

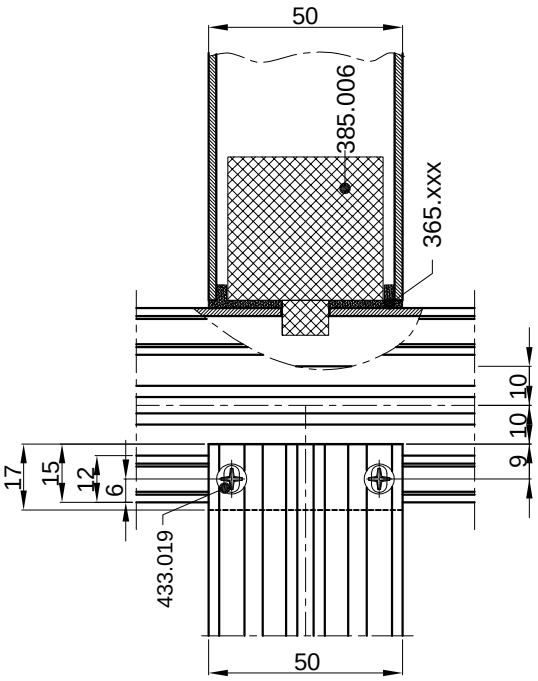

50
385.006
365.xxx
10
10
9
17
15
12
6
433.019
50

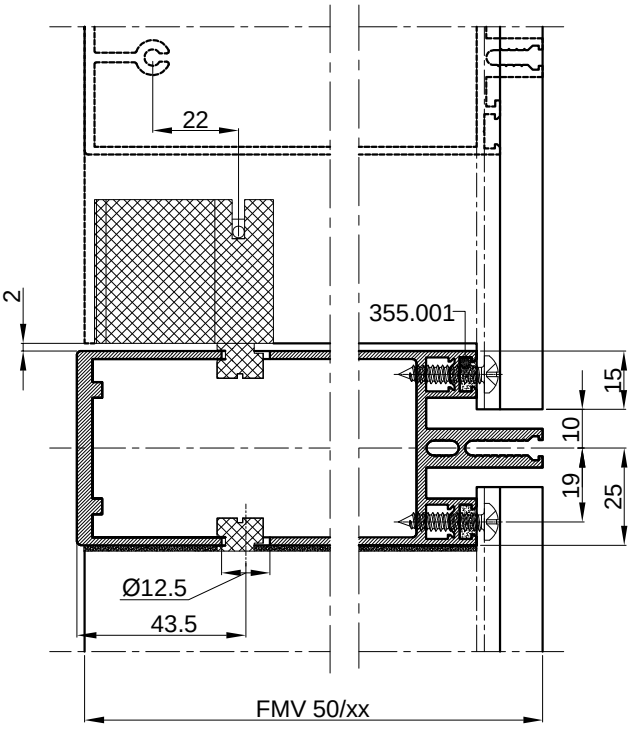

22
2
355.001
15
10
19
25
Ø12.5
43.5
FMV 50/xx

Montaža kopče 385.006 na profil vodoravnice
Montage of connector 385.006 on transom profile

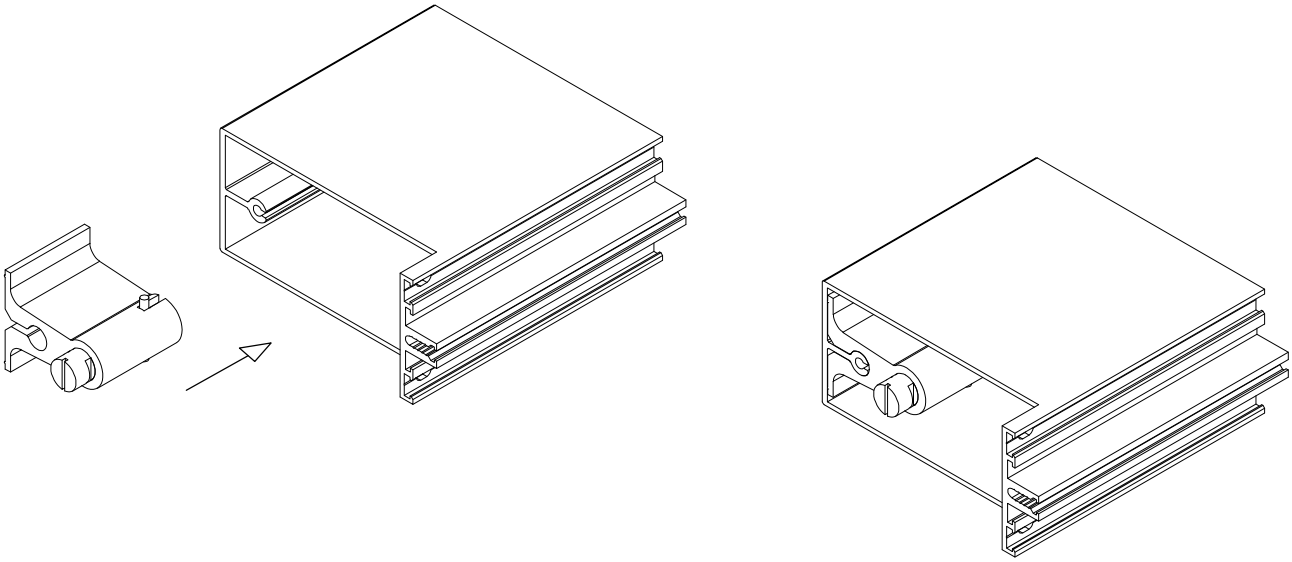

Dvojaka mogućnost spajanja kopče 385.006
Dual connectivity function of connector 385.006

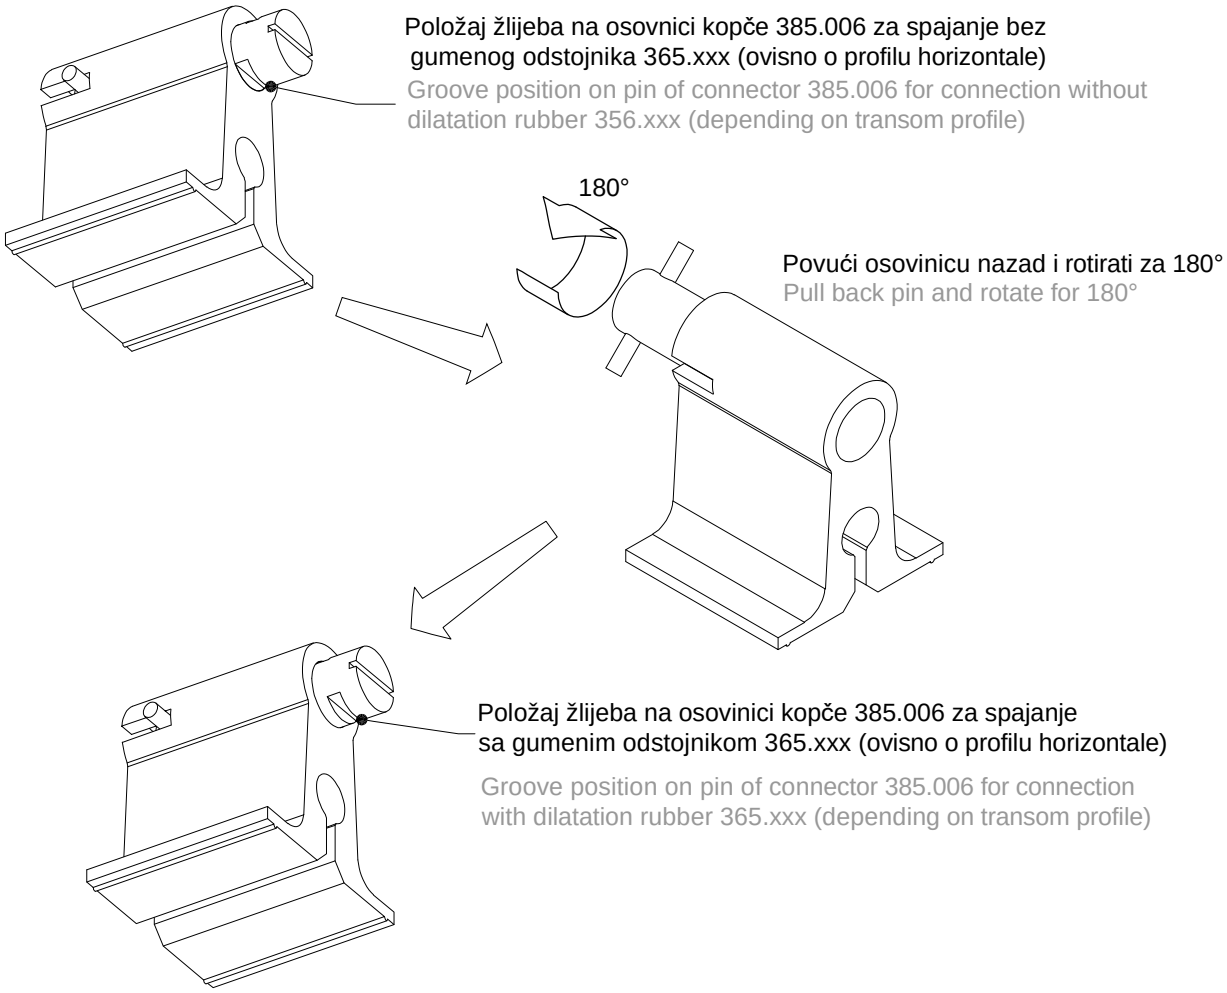


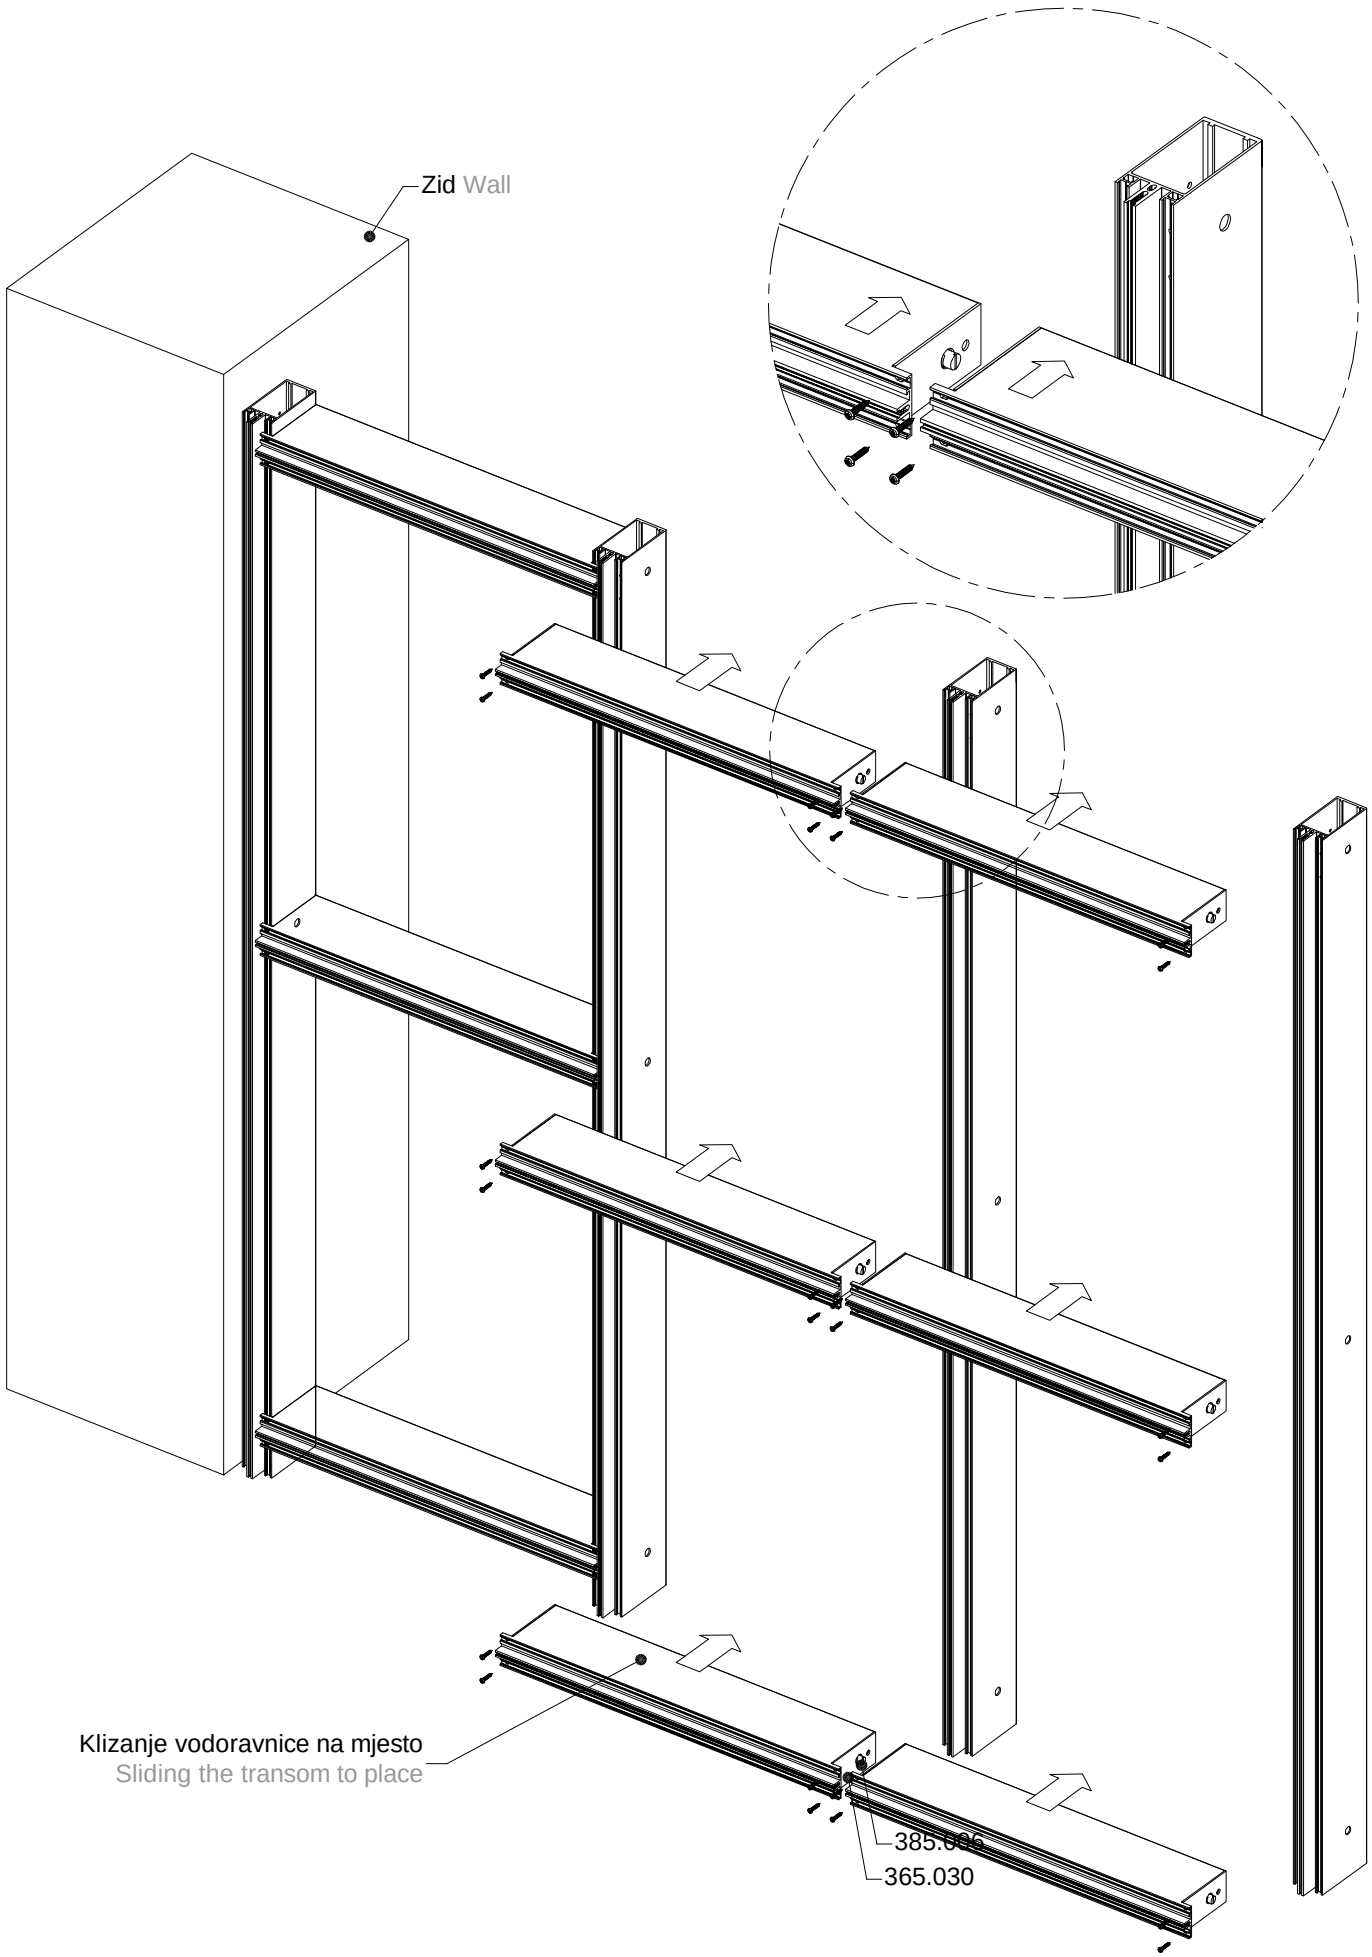

Zid Wall
Klizanje vodoravnice na mjesto
Sliding the transom to place
385.006
365.030


Spoj vodoravnice sa dvodijelnom okomicom
Transom joint with two-part mullion

Dvodijelne okomice: Two-part mullions:

FOP 25/200 --- FO 25/200
FOP 25/160 --- FO 25/160
FOP 25/120 --- FO 25/120
FOP 25/90 --- FO 25/90

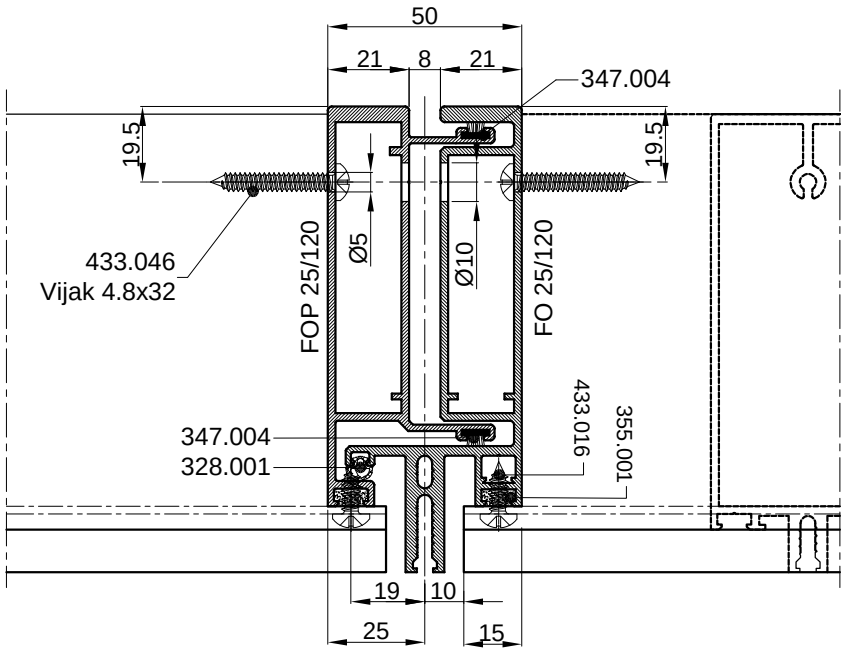


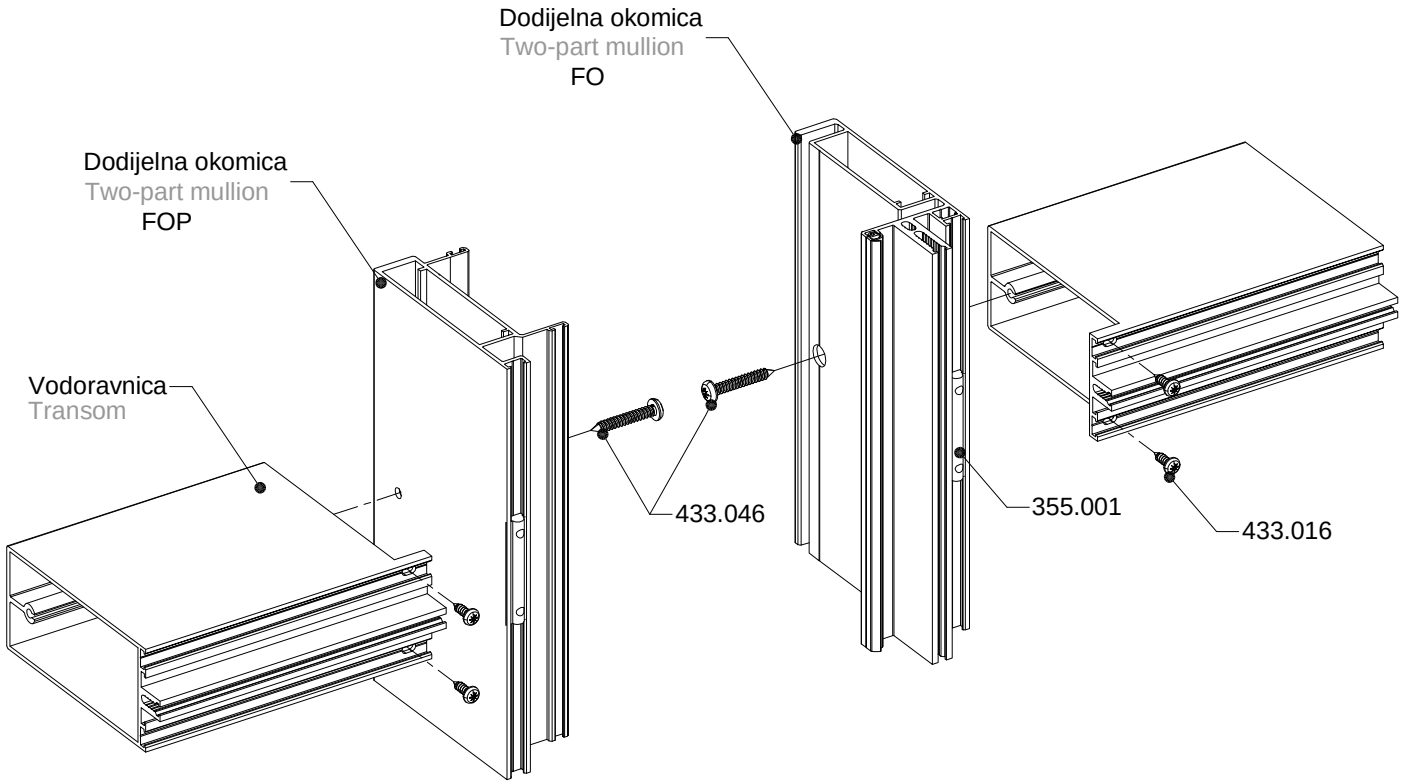

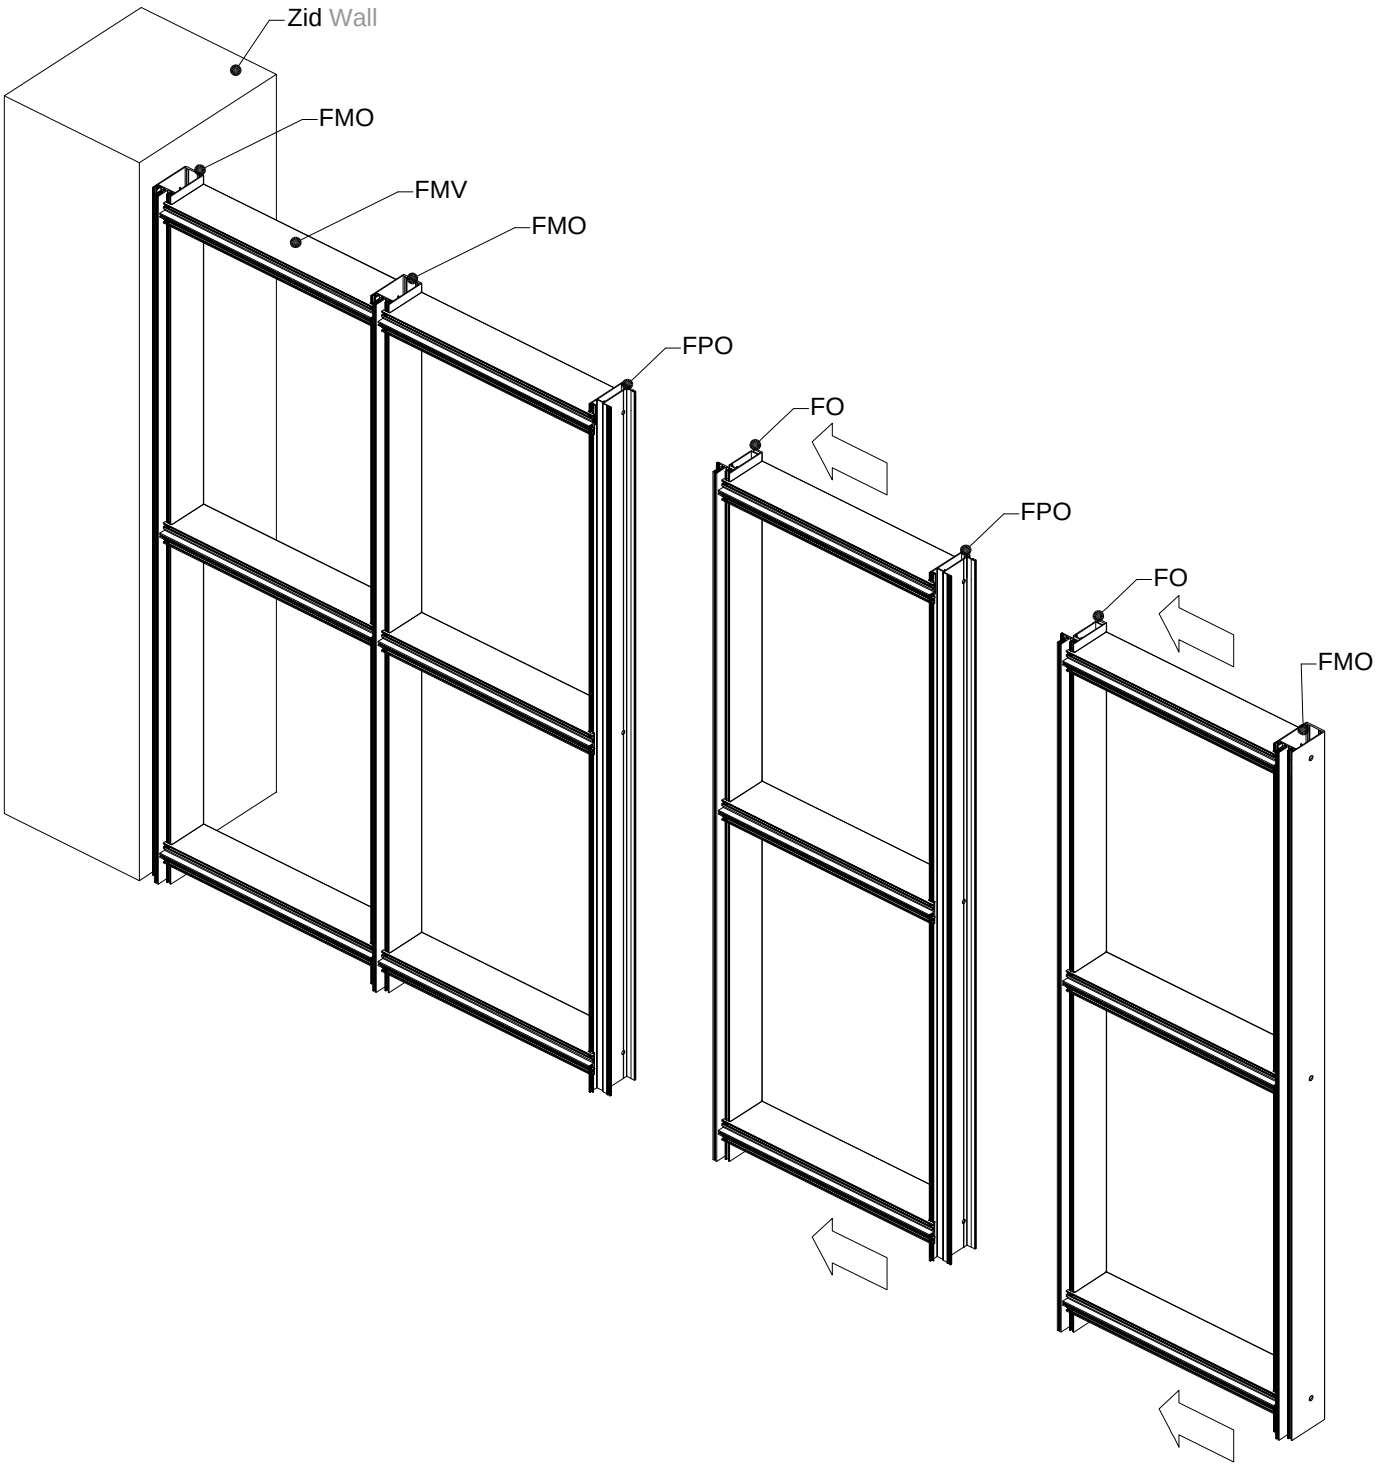

Zid Wall
FMO
FMV
FMO
FPO
FO
FPO
FO
FMO

α°	A (mm)	B (mm)	C (mm)
85	33.8	33.9	33.8
80	37.6	34.25	30.9
75	38.4	34.9	31.5
70	42.8	35.9	28.9
65	45.6	38.45	31.25
60	49.9	39.0	28
55	52.85	41.2	29.5
50	60.0	44.1	28.1
45	64.3	43.6	26.3


Mjere bušenja rupa za spojnicu pod kutom
Drilling holes measures for angular connection

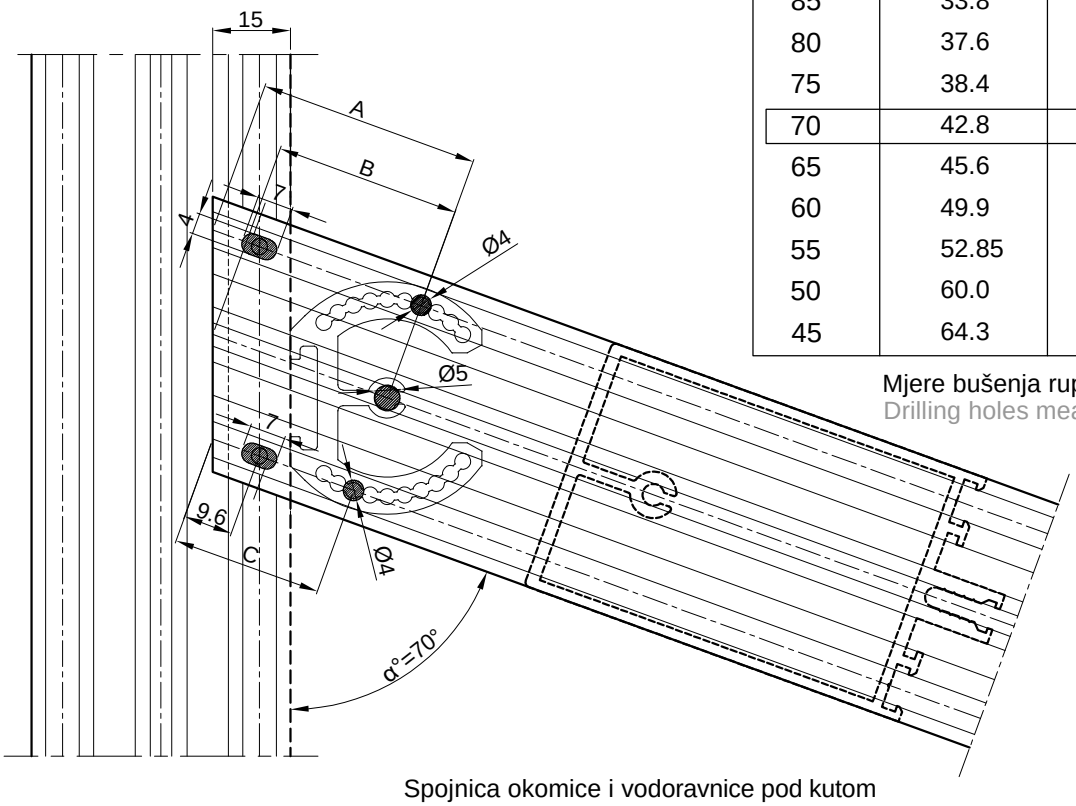

Spojnica okomice i vodoravnice pod kutom
Angled mullion-transom connection

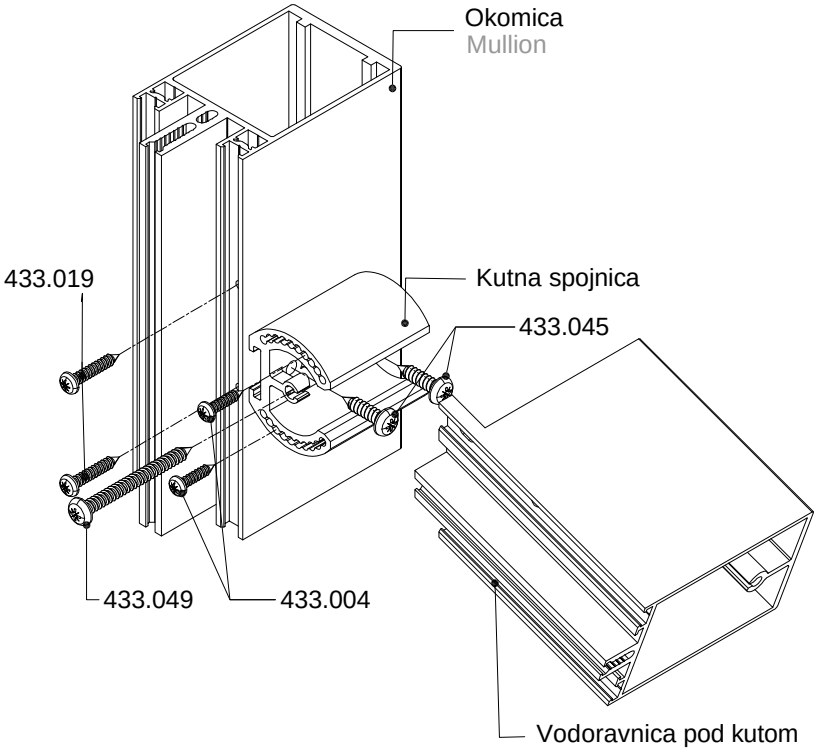


Vodoravnica Transom	Oznaka kutne spojnice Angle connector code	L (mm)
FMV 50/268	722.211	223.5
FMV 50/198	722.206	153
FMV 50/158	722.205	114
FMV 50/138	722.207	94
FMV 50/118	722.204	74
FMV 50/88	722.203	45
FPO 50/136	722.210	92
FVS 50/158	722.208	108
FPV 50/138	722.209	88
FVS 50/118	722.202	70
FVS 50/88	722.201	40




Kutna spojnica
Angle connector

- Položaj rupa na okomicama za spoj pod kutom
- Hole positioning on mullions for anglular connection

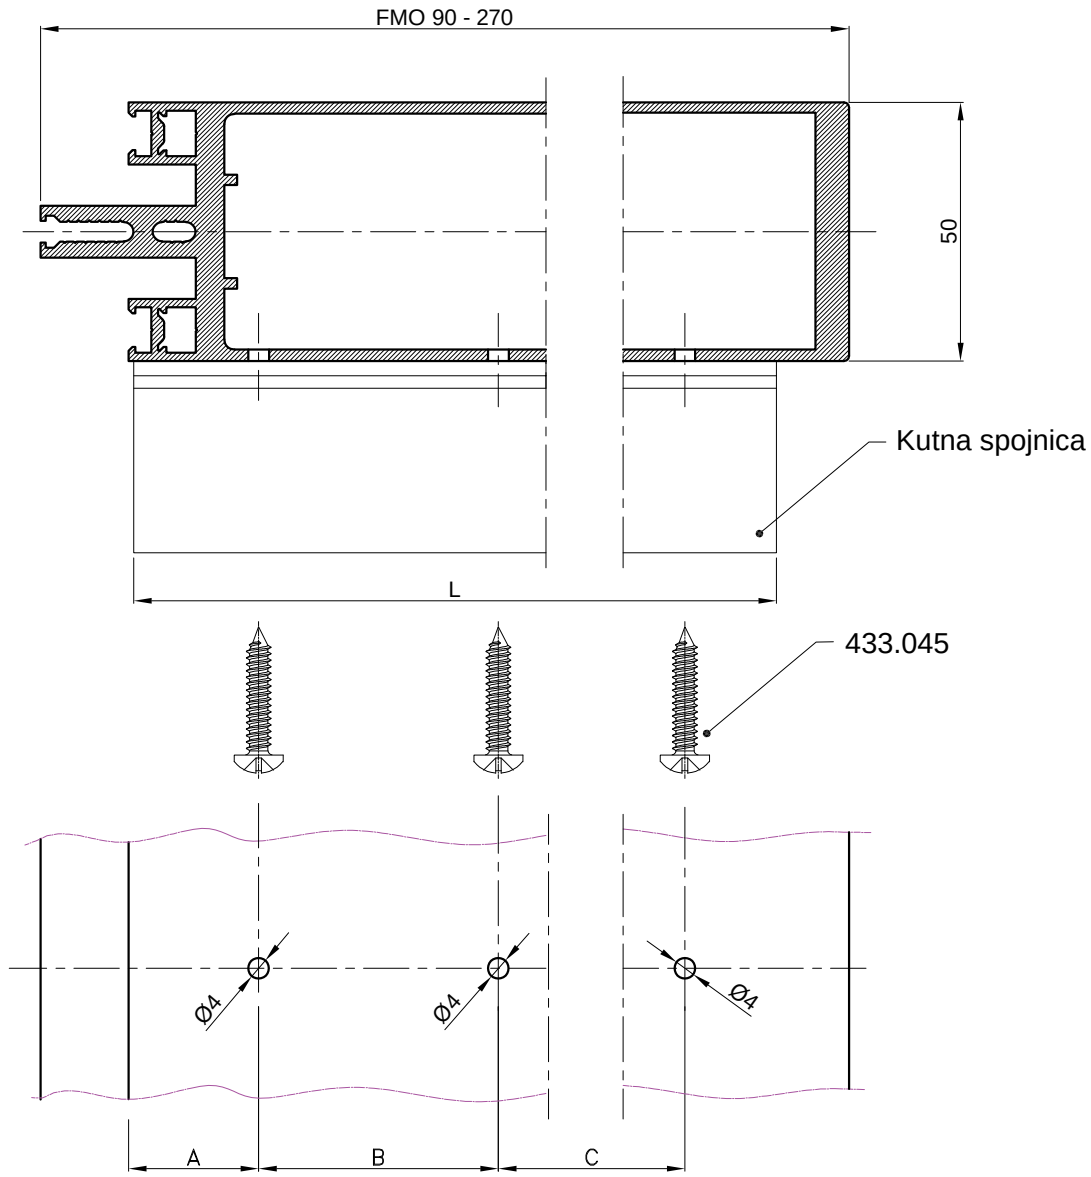


Oznaka Code	L (mm)	A (mm)	B (mm)	C (mm)
722.211	223.5	25	87.75	87.75
722.206	153	25	43	43
722.205	114	25	40	40
722.207	94	25	30	30
722.204	74	25	40	
722.203	45	11	25	
722.210	92	25	43	
722.208	108	25	43	
722.209	88	25	43	
722.202	70	25	30	
722.201	40	13.4	20.1	

Spojnica okomica
SB-066/M
Mullion connection
SB-066/M





Primjer pilanja spojnice okomica
Example of sawing of the mullion connection

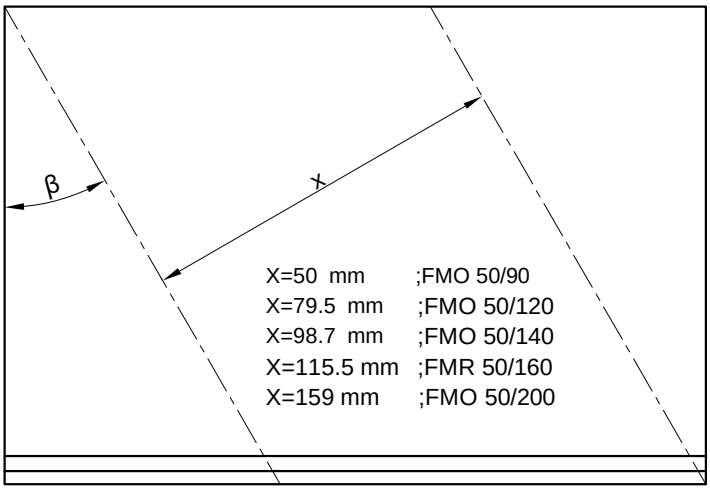



β°=90°-(90°+α°)/2

Nagib profila okomice Mullion angle	α°	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85
Kut pilanja Sawing angle	β°	45	42.5	40	37.5	35	32.5	30	27.5	25	22.5	20	17.5	15	12.5	10	7.5	5	2.5

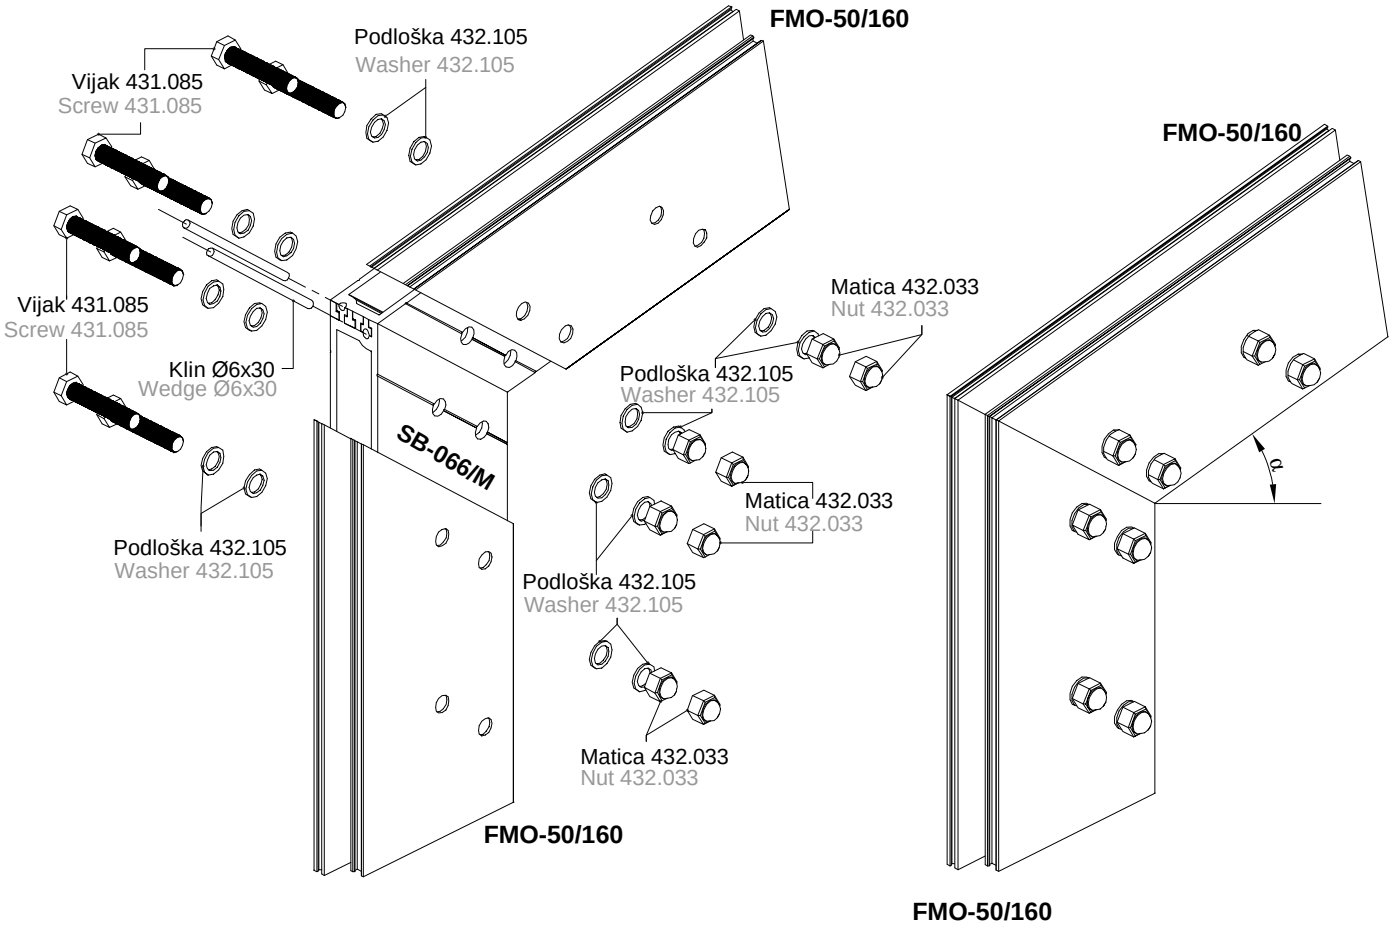

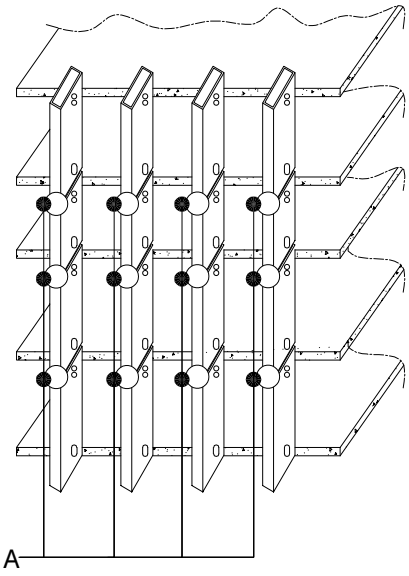


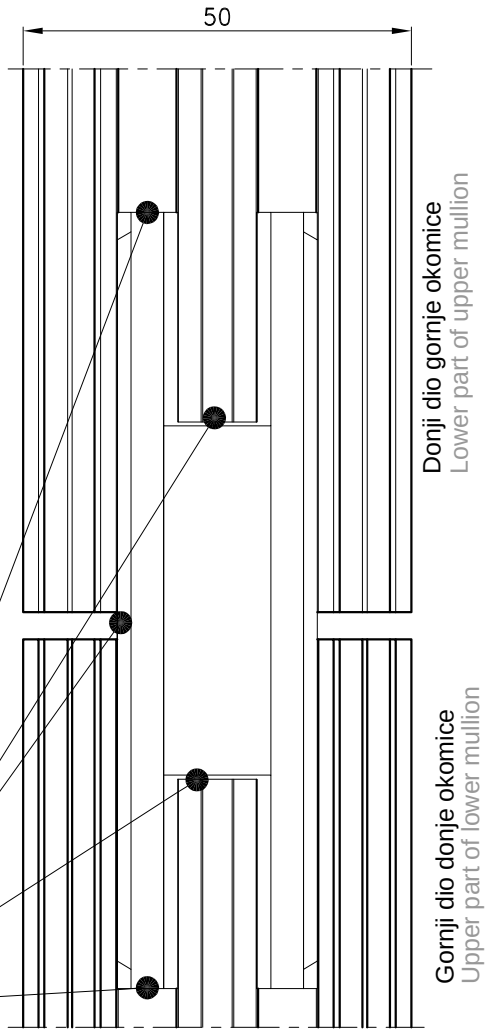


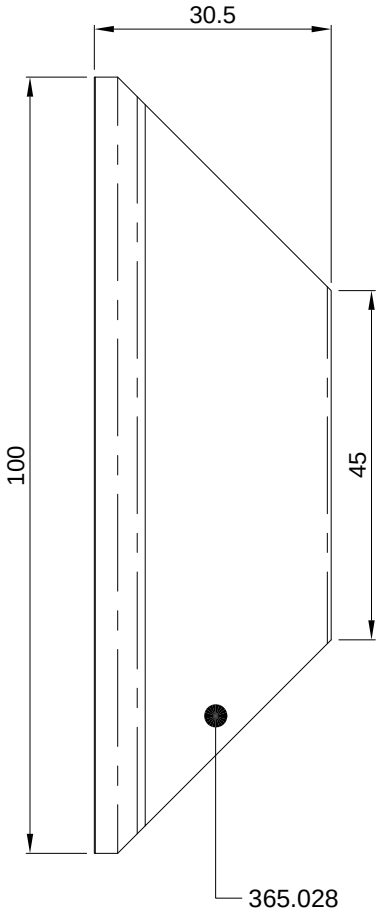


prijelaz i prostor između gume i aluminija ispuniti tiokolom (silikon za spajanje gume i aluminija)


transition and space between rubber and aluminium must be filled with Thiokol (sealant for rubber and aluminiumn connections)

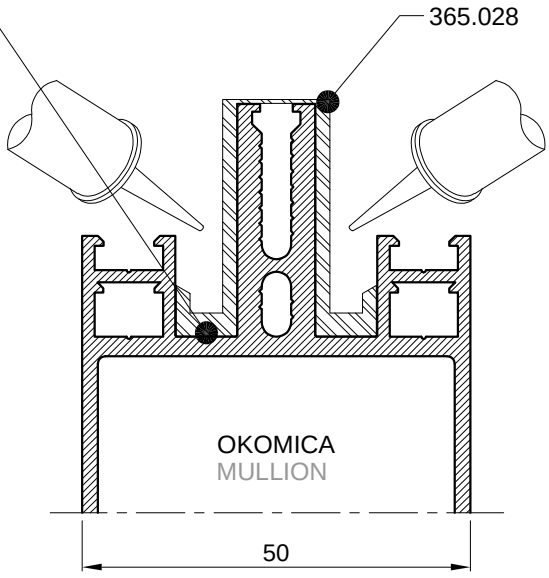


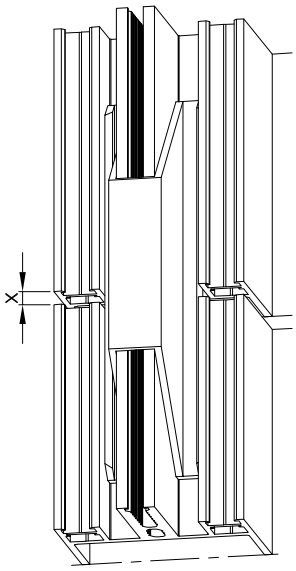



X - ovisi od dužini okomica (min 10 mm)
X - depends on the lenght of the mullions (min 10 mm)

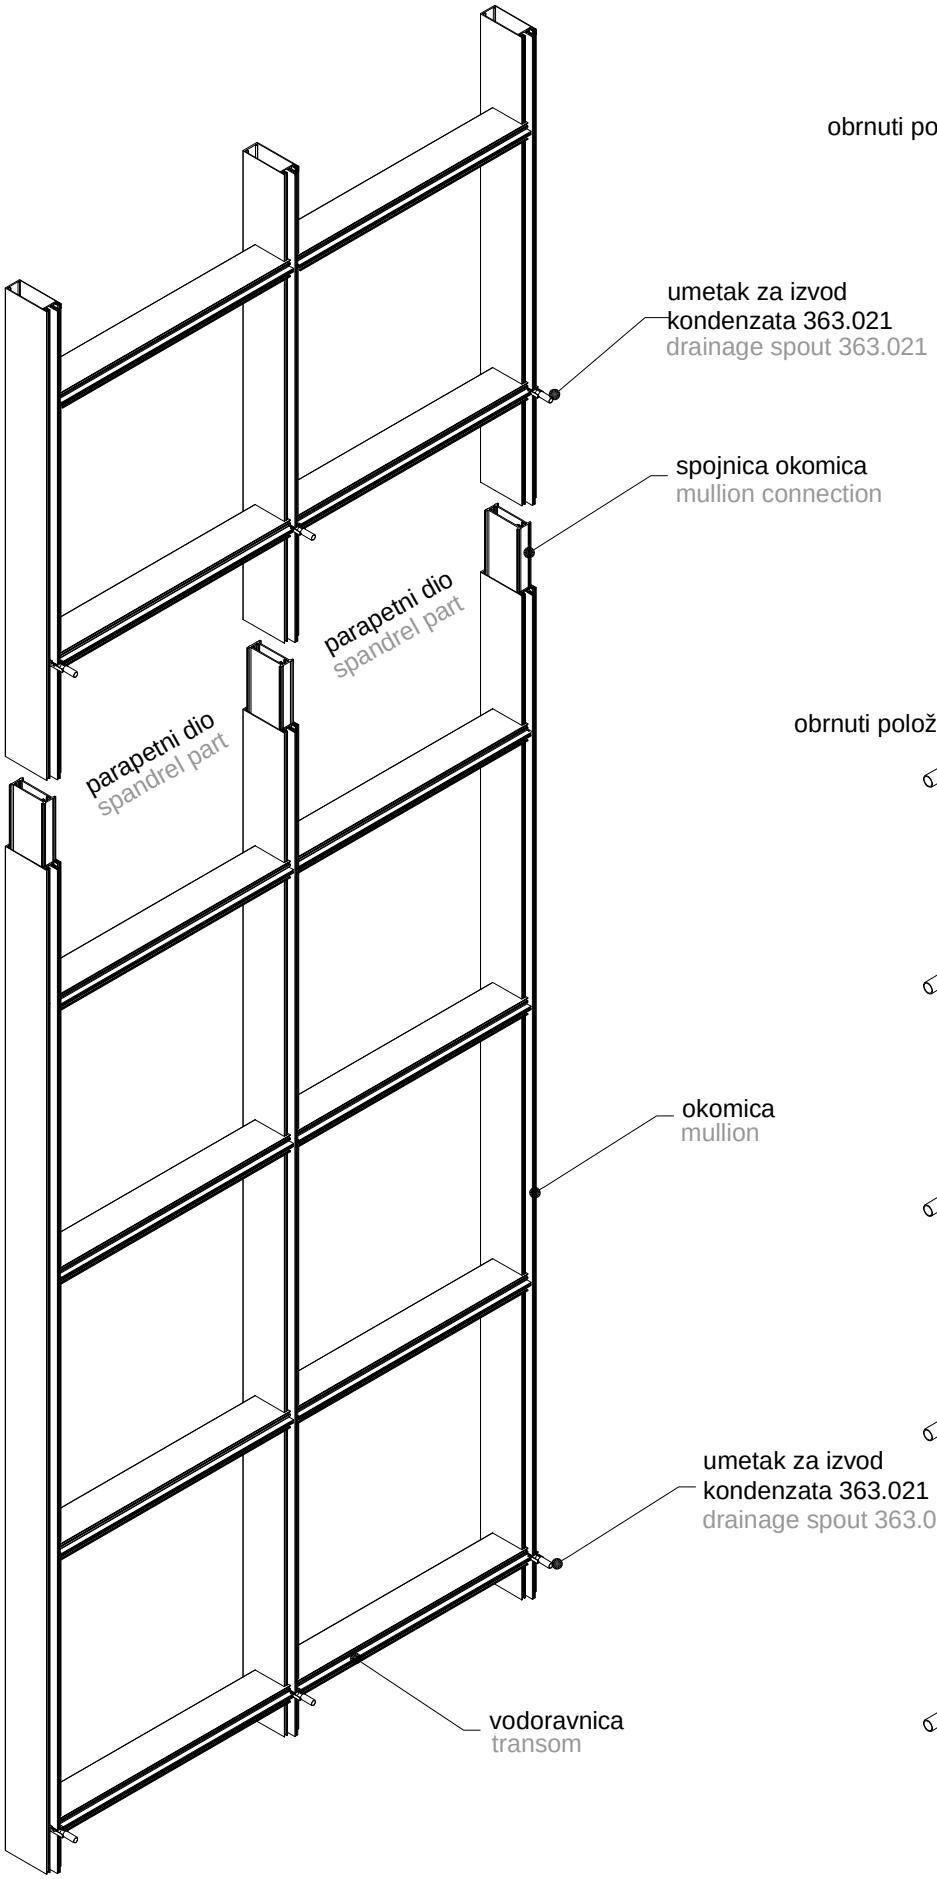

umetak za izvod kondenzata 363.021
drainage spout 363.021
spojnica okomica
mullion connection
parapetni dio
spandrel part
parapetni dio
spandrel part
okomica
mullion
umetak za izvod kondenzata 363.021
drainage spout 363.021
vodoravnica
transom

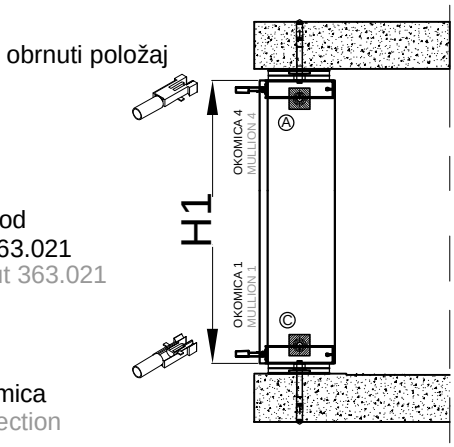
obrnuti položaj
H1
OKOMICA 4
MULLION 4
OKOMICA 1
MULLION 1
Ⓐ
Ⓒ

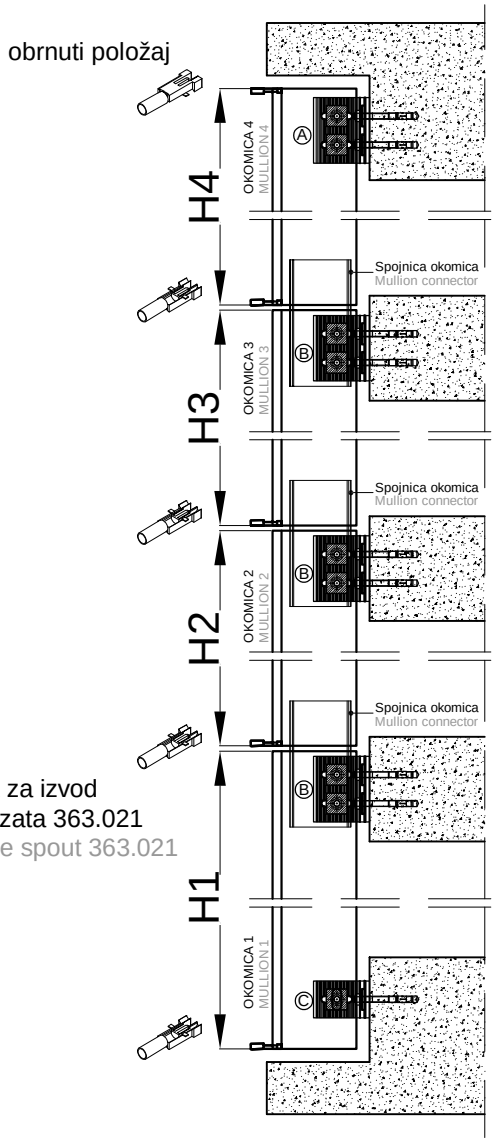

obrnuti položaj
H4
H3
H2
H1
OKOMICA 4
MULLION 4
OKOMICA 3
MULLION 3
OKOMICA 2
MULLION 2
OKOMICA 1
MULLION 1
Spojnica okomica
Mullion connector
Spojnica okomica
Mullion connector
Spojnica okomica
Mullion connector
Ⓐ
Ⓑ
Ⓑ
Ⓑ
Ⓒ

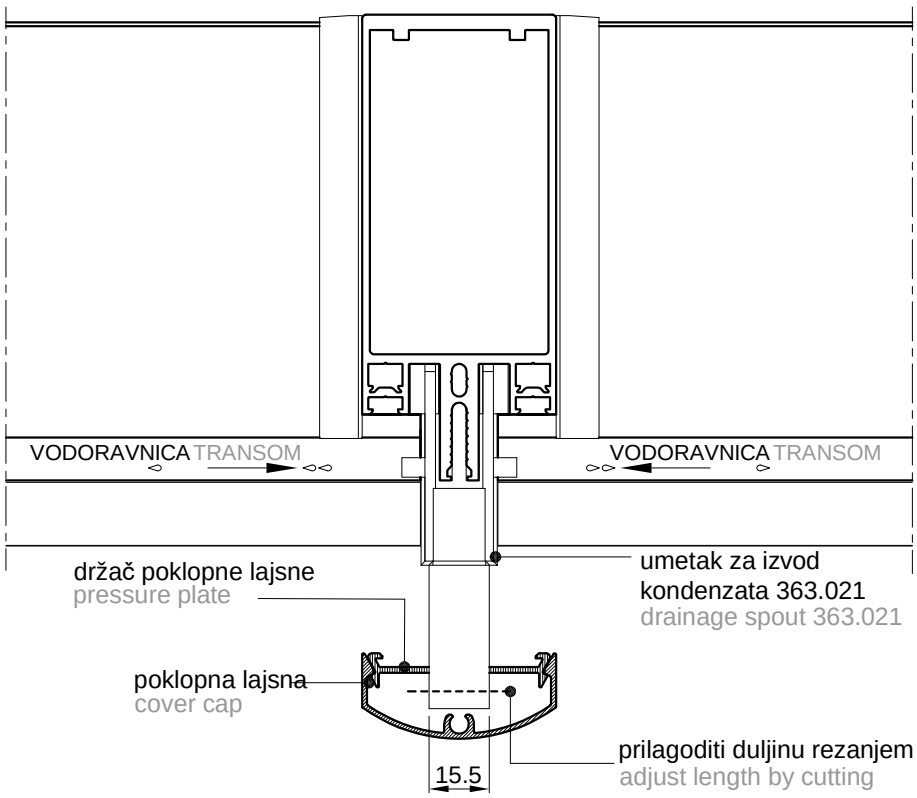


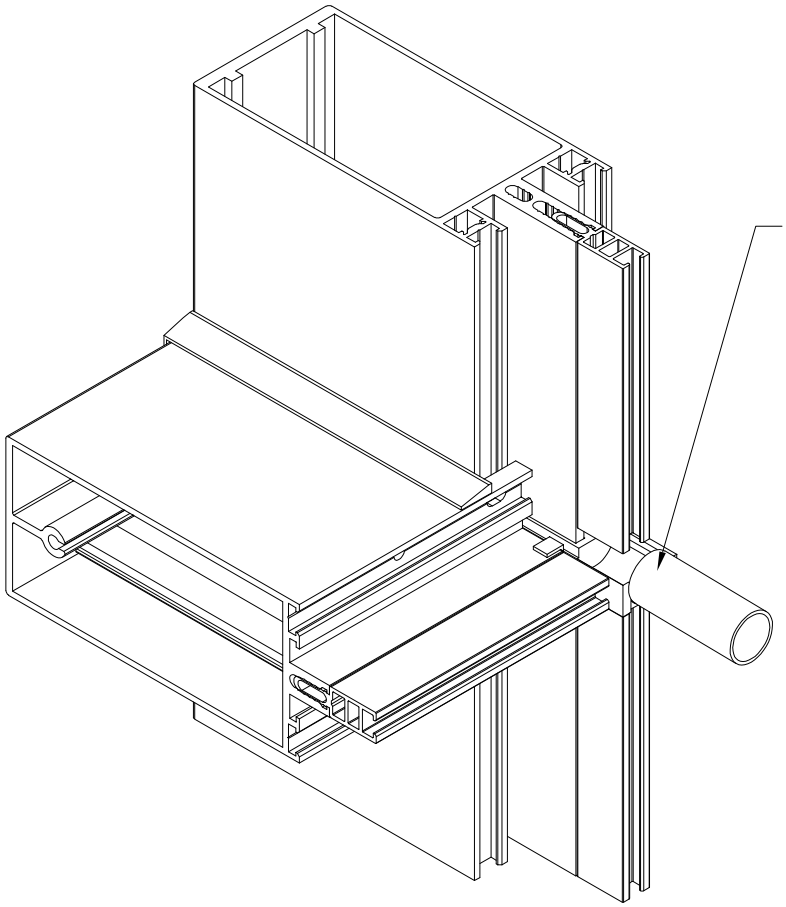


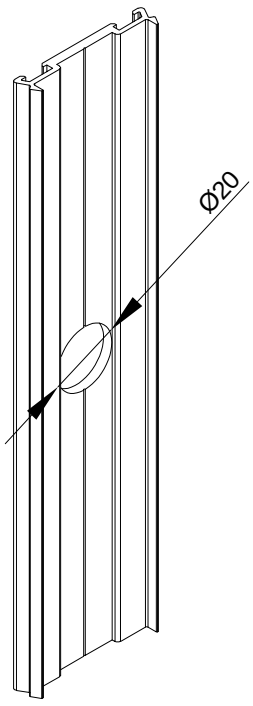

Obrada držača poklopne lajsne
Pressure plate processing

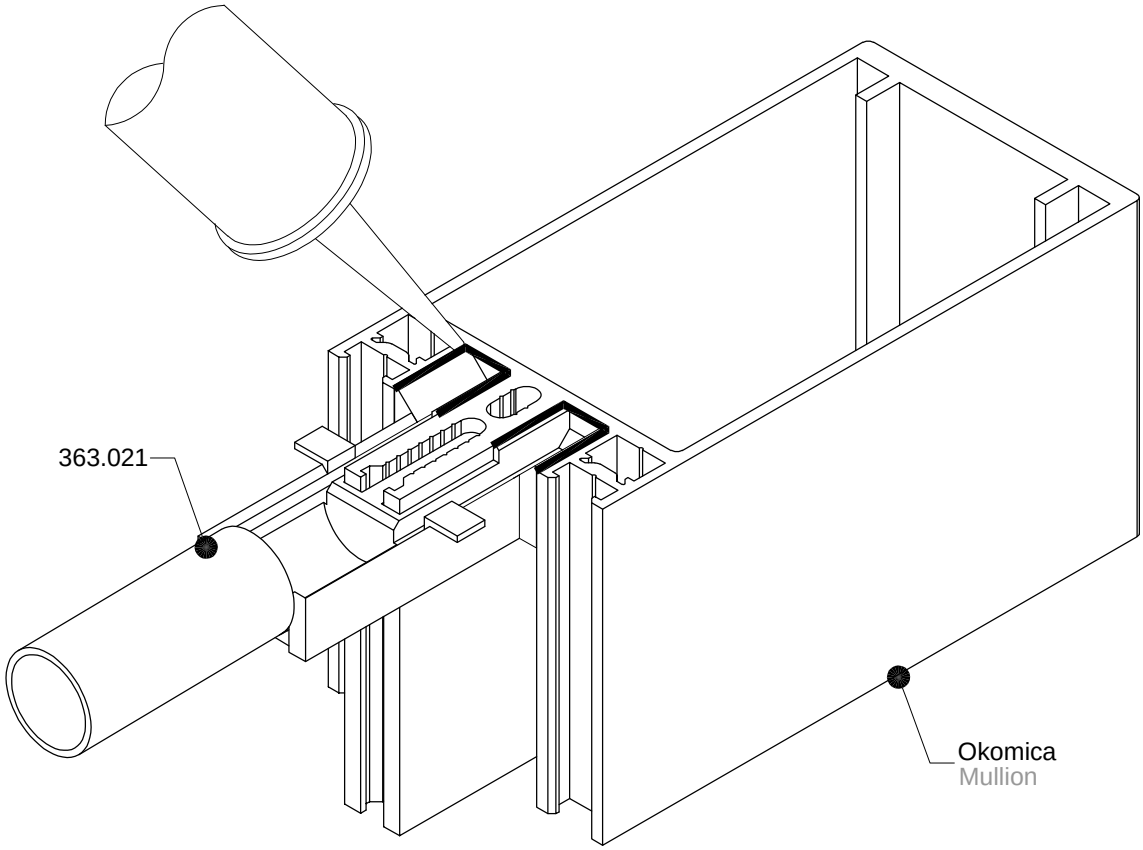

363.021
Okomica
Mullion

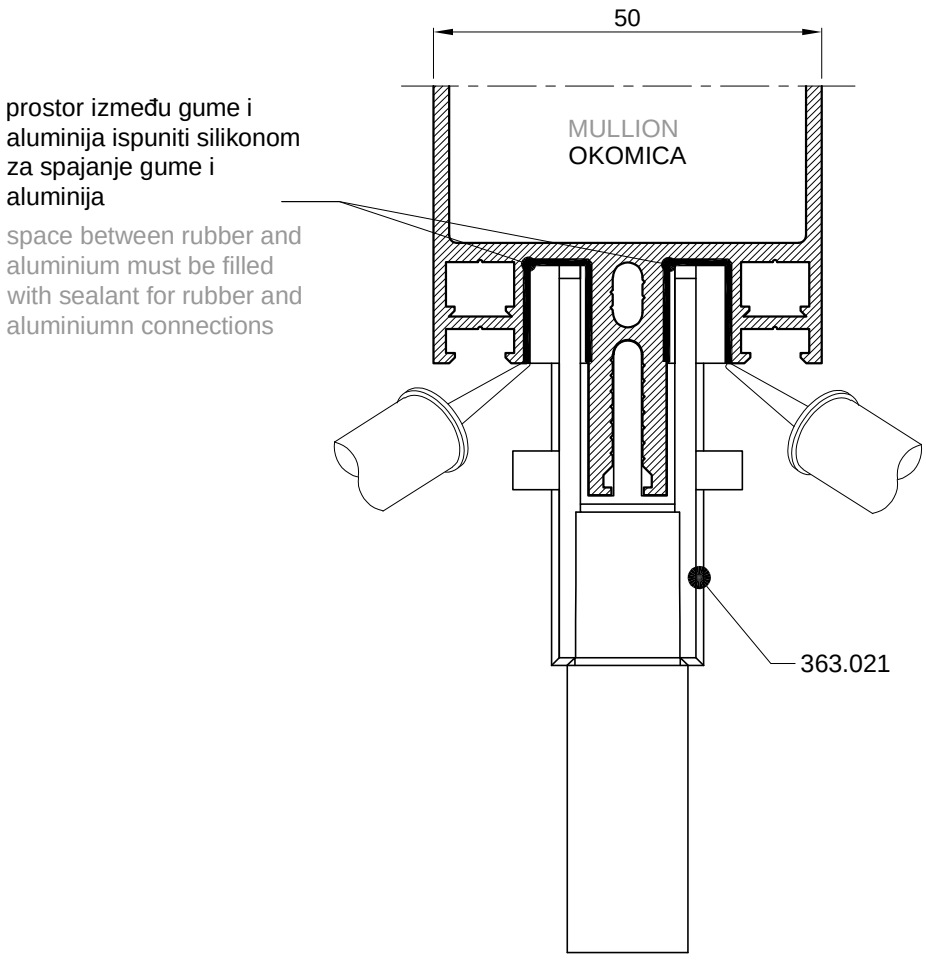
50
prostor između gume i aluminija ispuniti silikonom za spajanje gume i aluminija
space between rubber and aluminium must be filled with sealant for rubber and aluminiumn connections
MULLION
OKOMICA
363.021

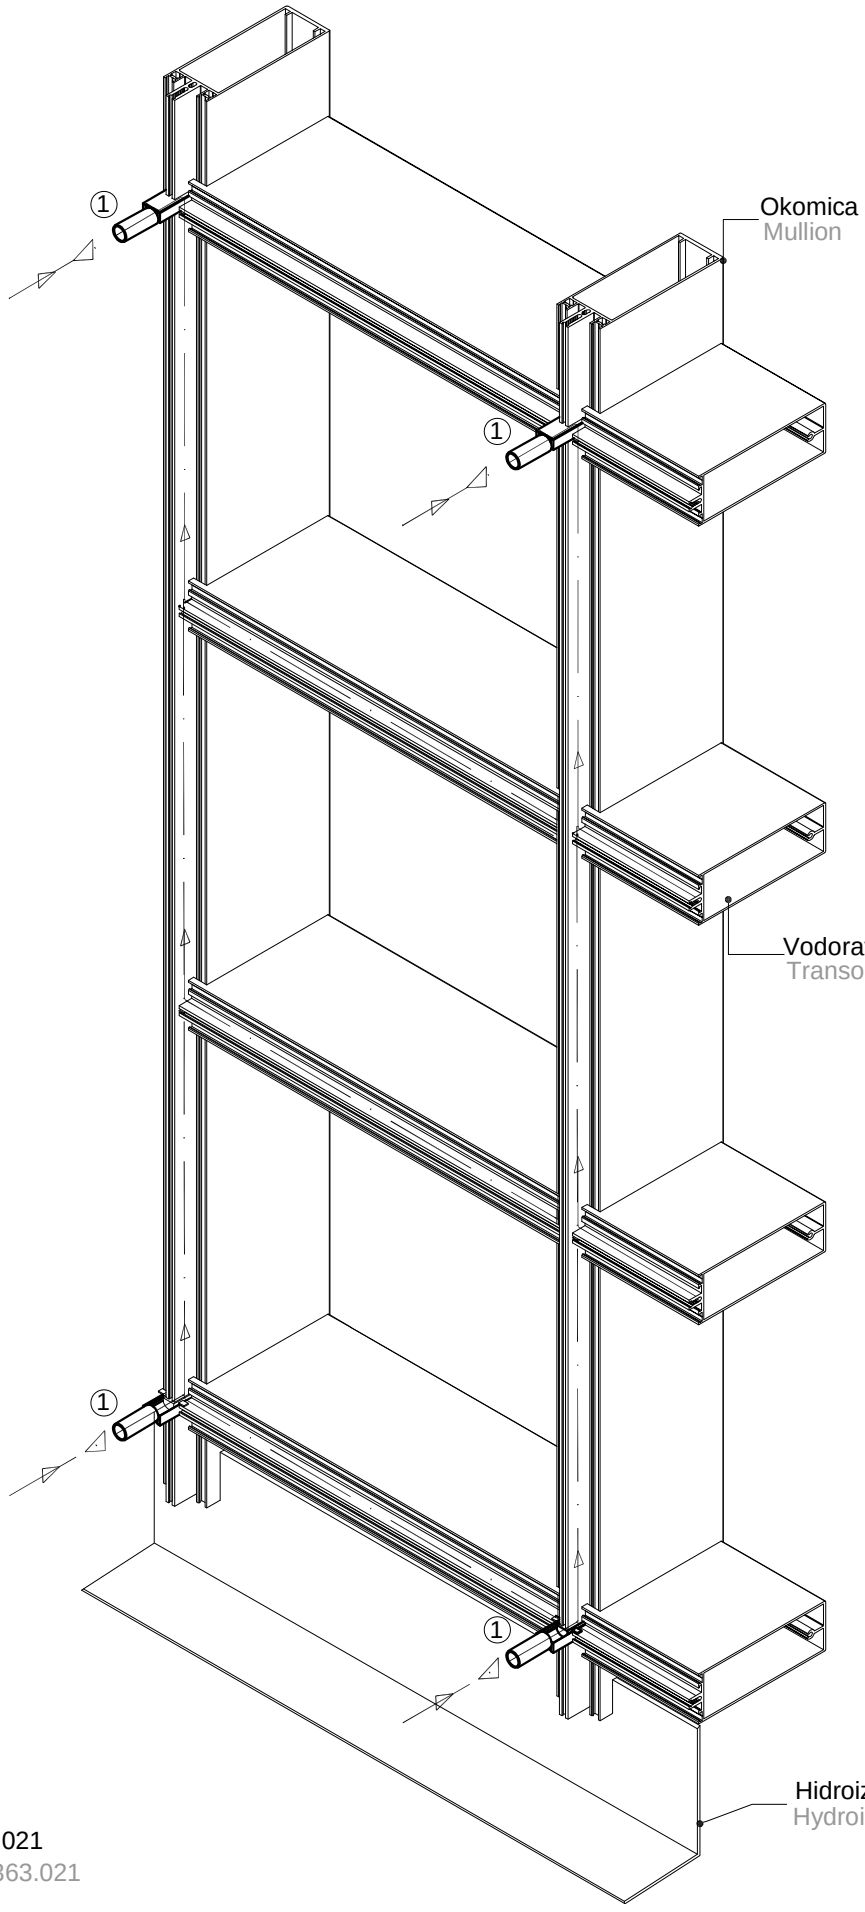


① Umetak za izvod kondenzata 363.021
Drainage spout 363.021

Strujanje zraka
Air circulation

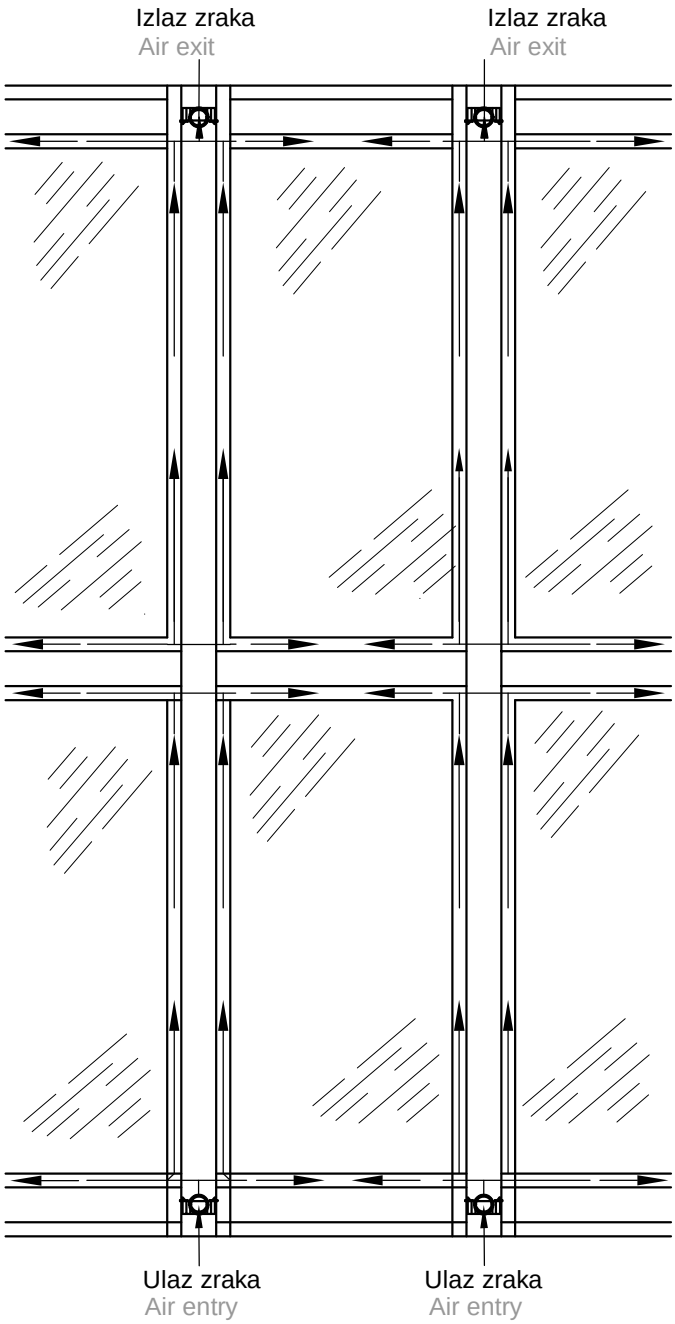


Odvod kapljevina
Drainage

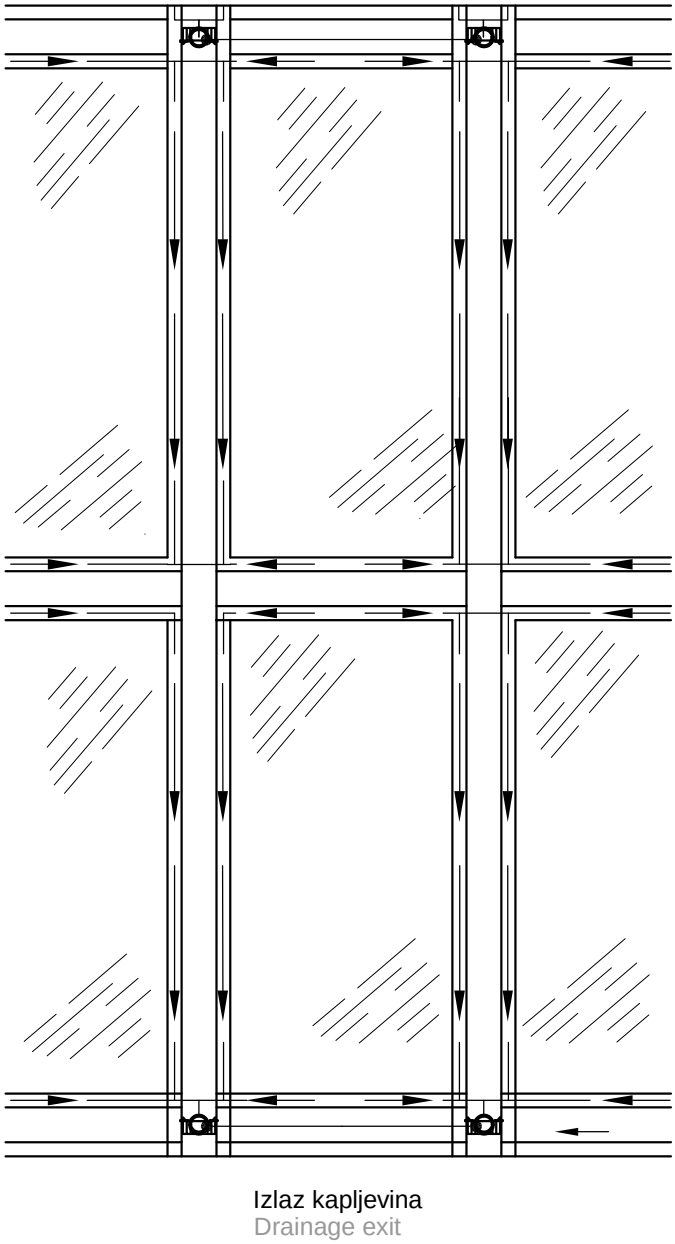


- Sistem fasade FEAL 50FK konstruiran je tako da su žlijebovi u okomici i vodoravnici u različitim ravninama. Zrak ulazi kroz donji odvod kapljevina, te struji kroz okomice i vodoravnice od parapeta prema atici čemu ostvaruje potrebno ventiliranje fasade i suši moguće kapljevine nastale kondeziranjem, nakon čega izlazi kroz gornji odvod kapljevina.
- Facade system FEAL 50FK is constructed in a way that the grooves on mullion and transom profiles are in different planes. Air enters through lower drainage and circulates through mullions and transom from spandrel towards attic performing needed facade ventilation and dries possible liquids from condensation, afterwards air leaves through upper drainage.


Ventiliranje parapetnog dijela fasade
Ventilation of curtain wall spandrel

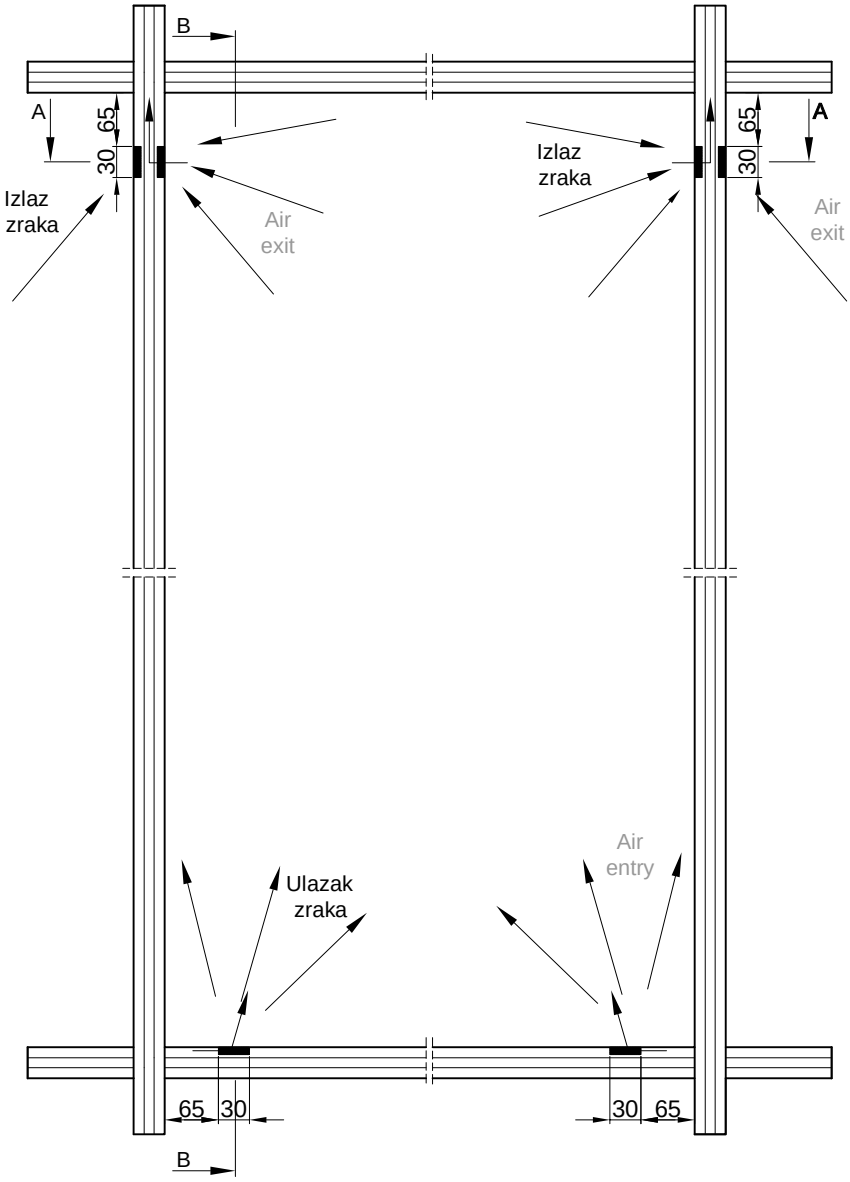


Presjek B-B
Cross section B-B

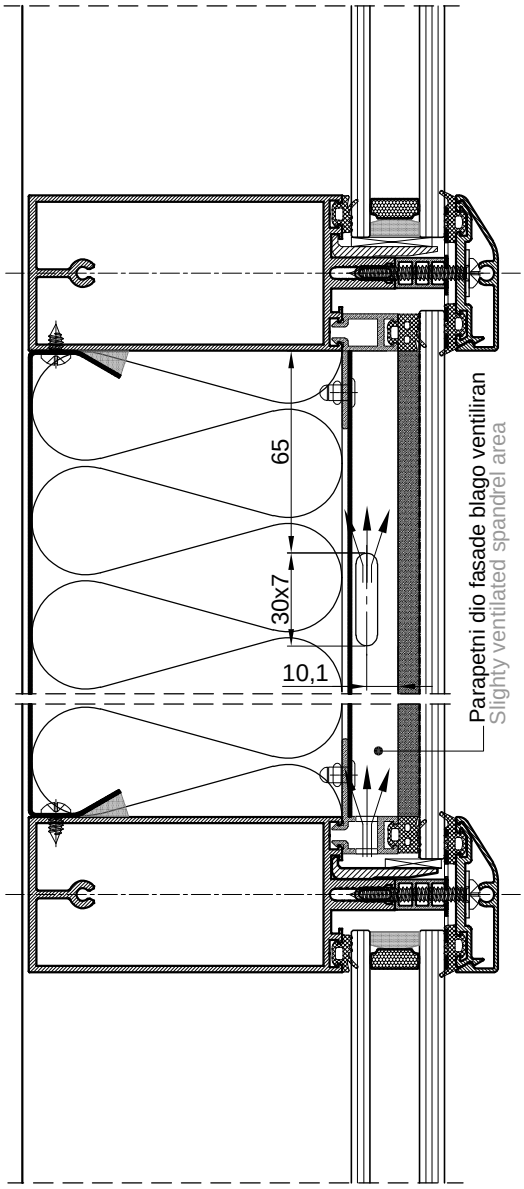


Presjek A-A
Cross section A-A

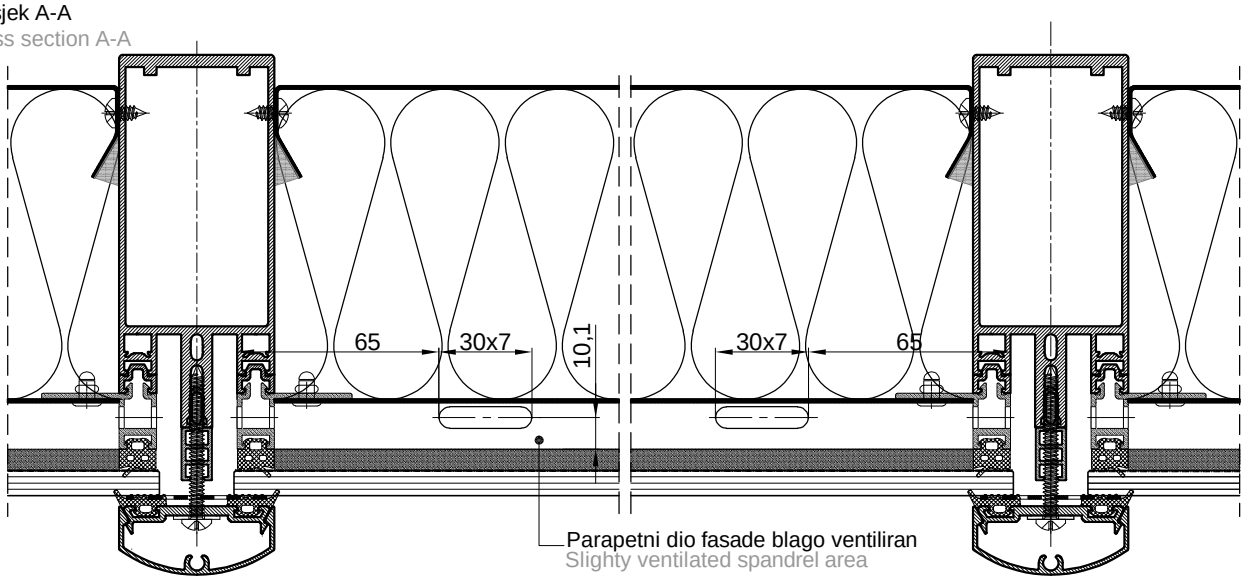


Ventiliranje parapetnog dijela fasade
Ventilation of curtain wall spandrel

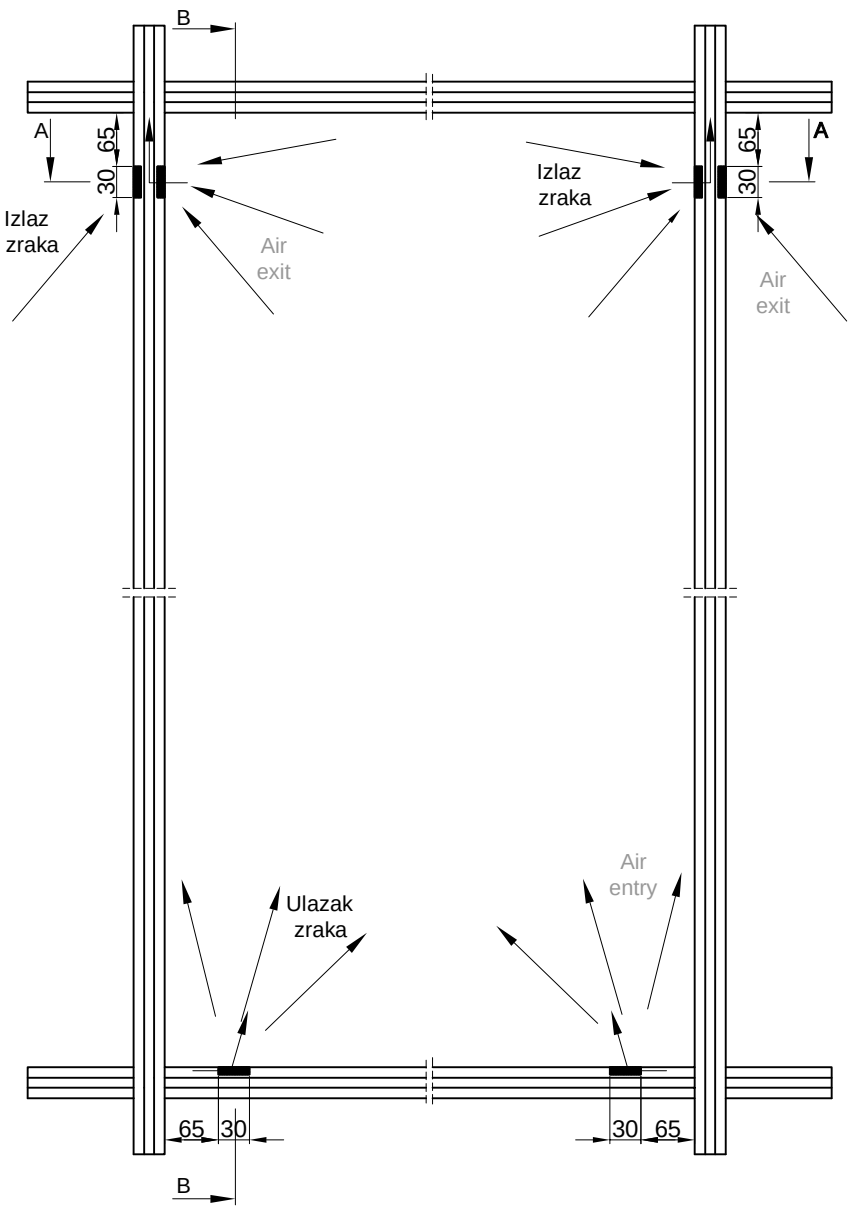



Presjek B-B
Cross section B-B

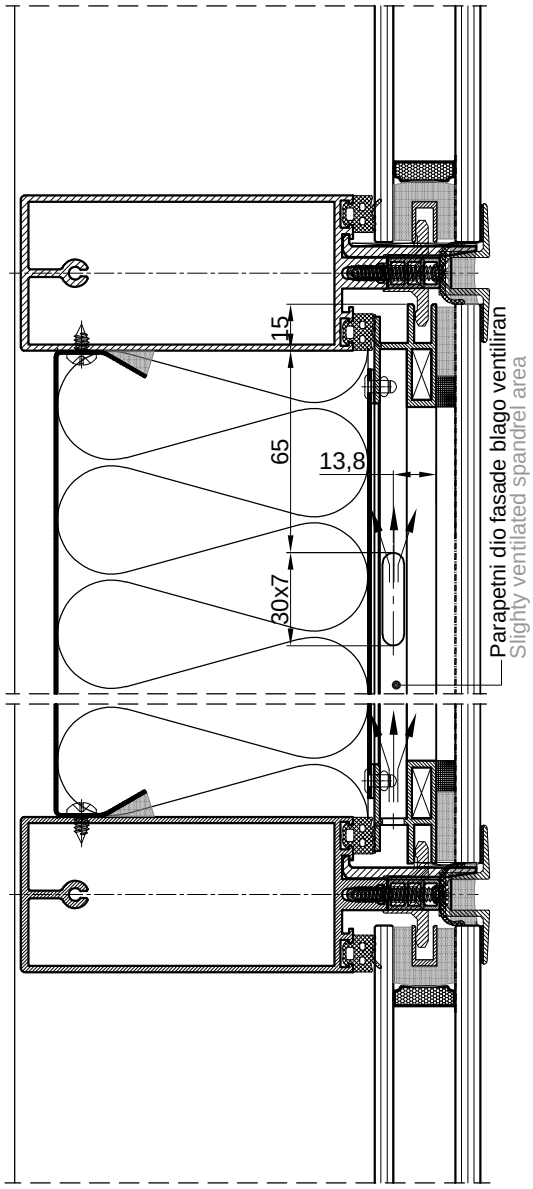




Presjek A-A
Crosssection A-A

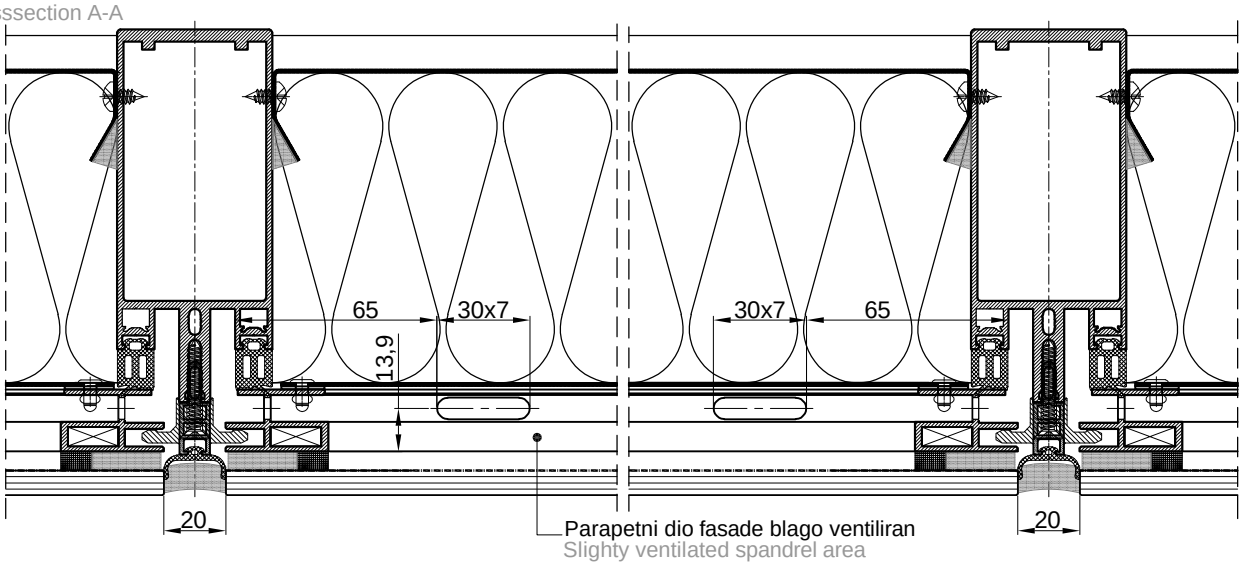

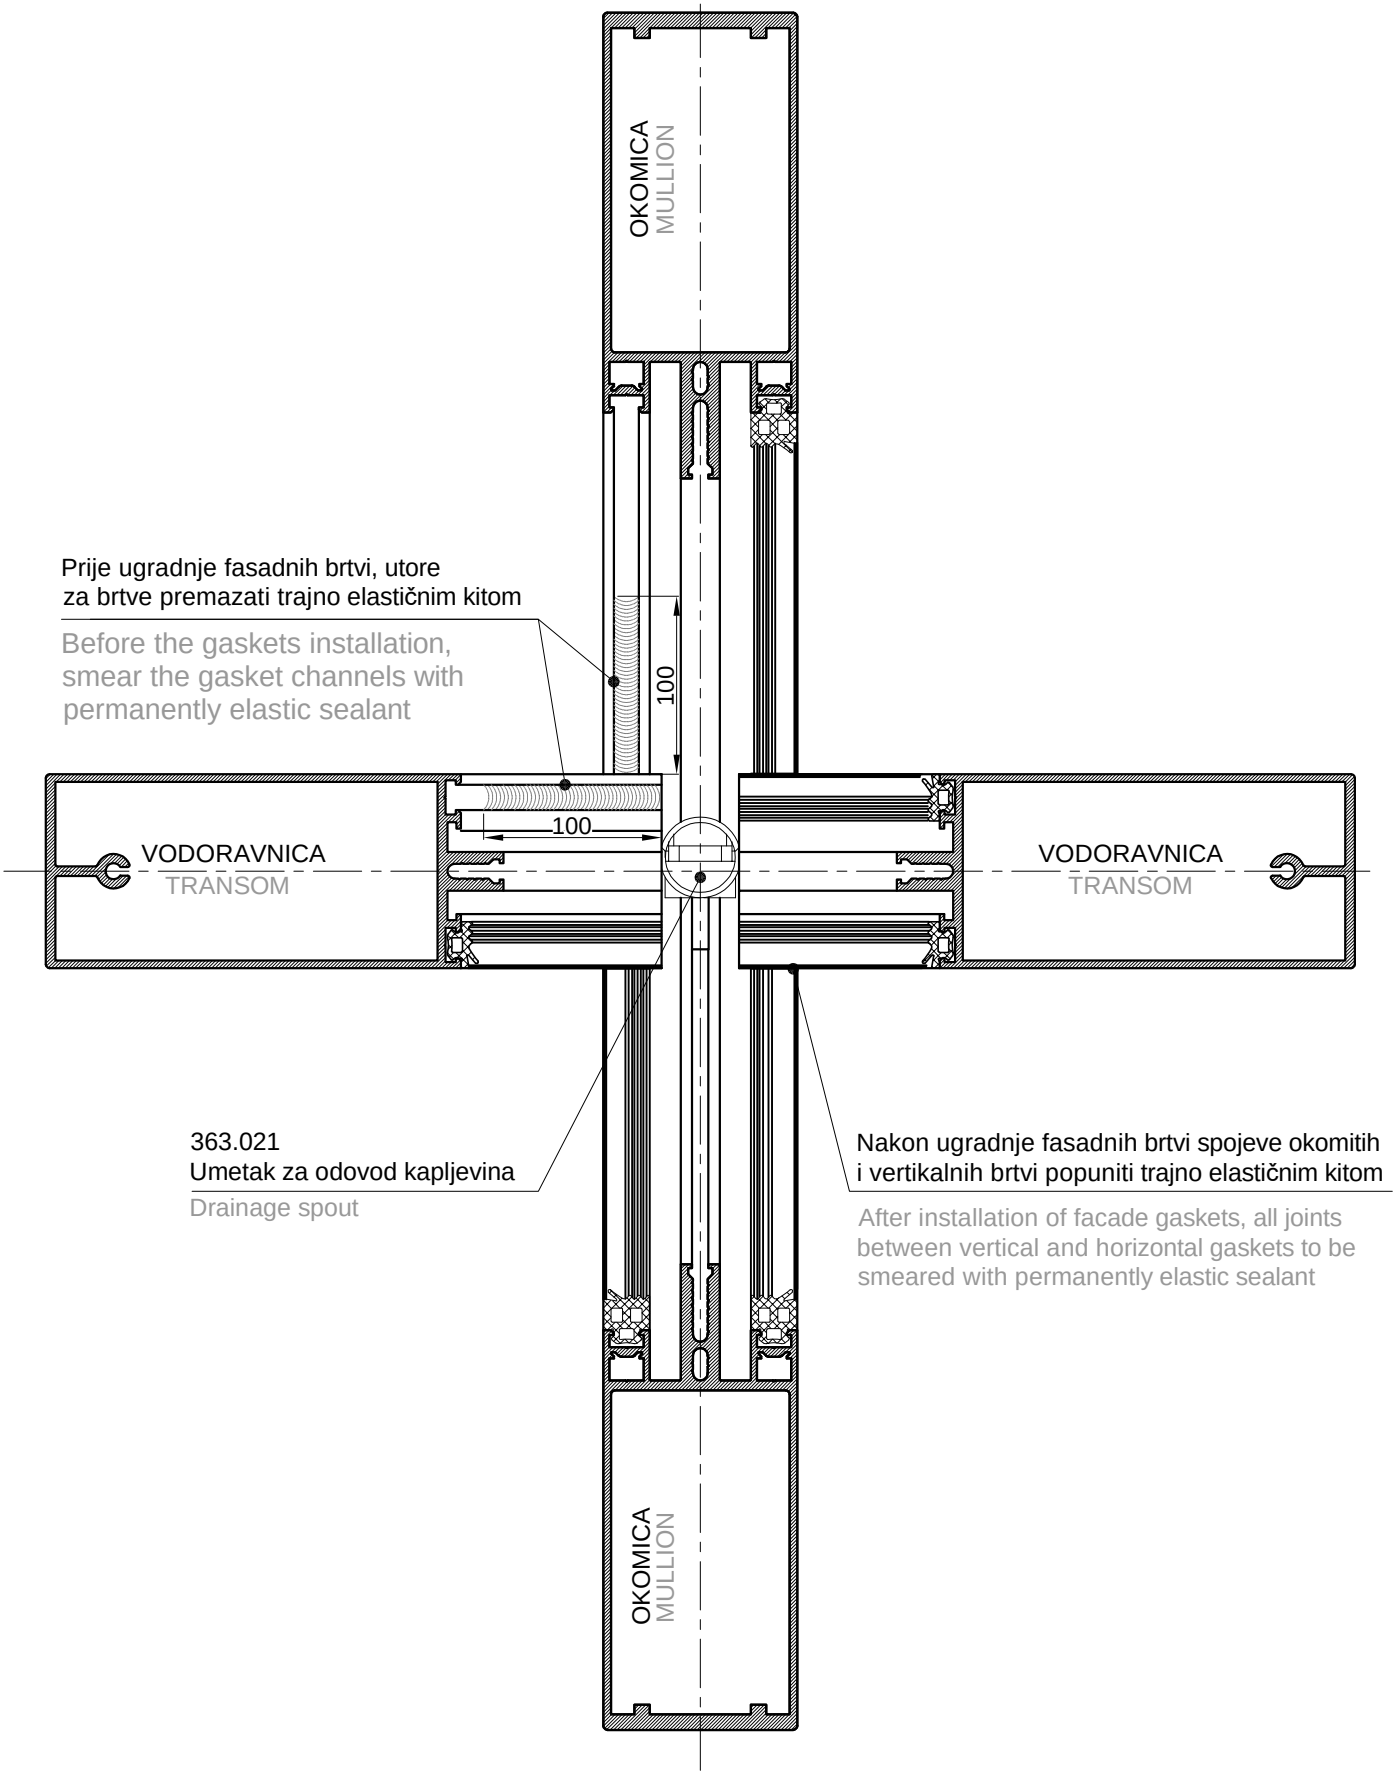
OKOMICA
MULLION
Prije ugradnje fasadnih brtvi, utore
za brtve premazati trajno elastičnim kitom
Before the gaskets installation,
smear the gasket channels with
permanently elastic sealant
100
100
VODORAVNICA
TRANSOM
VODORAVNICA
TRANSOM
363.021
Umetak za odovod kapljevina
Drainage spout
Nakon ugradnje fasadnih brtvi spojeve okomitih
i vertikalnih brtvi popuniti trajno elastičnim kitom
After installation of facade gaskets, all joints
between vertical and horizontal gaskets to be
smeared with permanently elastic sealant
OKOMICA
MULLION



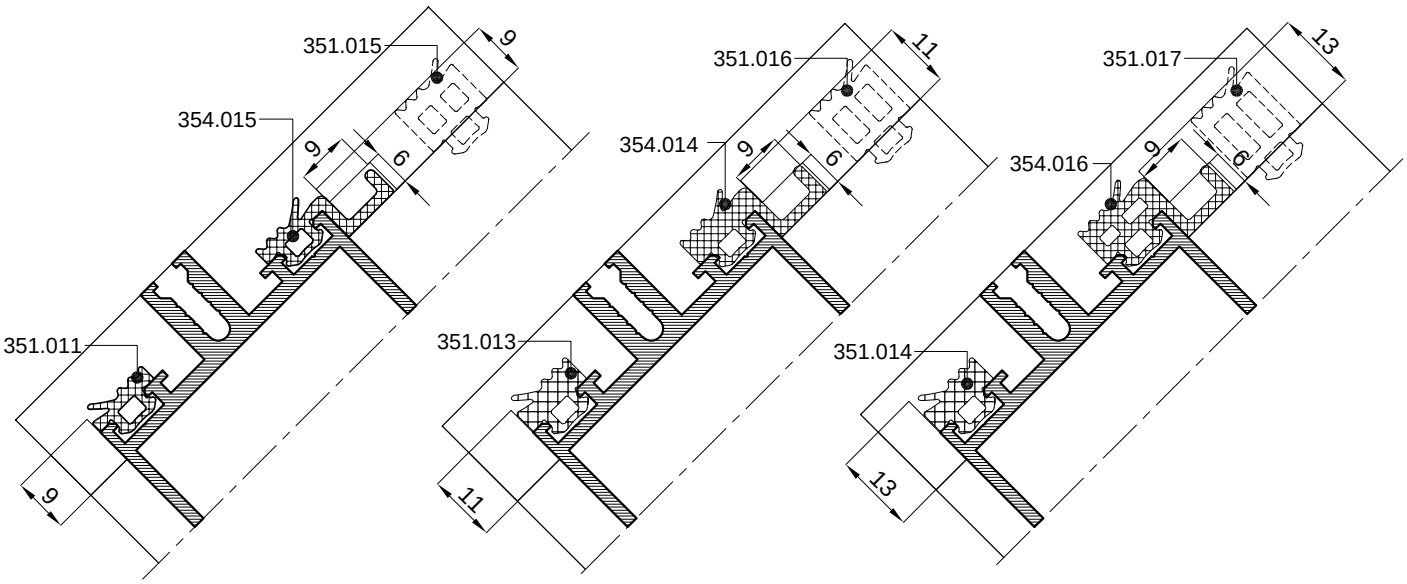


Brtve za odvod kondezata
Gaskets for condesation drainage


354.015	354.014	354.016
		


Brtvljenje Sealing			
Dimenzija brtve na okomici/vodoravnici Gasket dimension on mullion/transom	Brtva na okomici Gasket on mullion	Brtva na vodoravnici Gasket on transom	Brtva na vodoravnici za odvod kondezata Gasket on transom for condesation drainage
9 mm / 3 mm	351.015	351.011	354.015
11 mm / 5 mm	351.016	351.013	354.014
13 mm / 7 mm	351.017	351.014	354.016

Obrada za brtve na okomici
Processing for gaskets on mullion


351.017	351.016	351.015
		


Ljepilo za gume na spojne površine
tipa:GU PLAST CA12
Gue for rubber on connection surfaces
type:GU PLAST CA12








Silikon ispod brtve
cca 50 mm
tipa:Teroson MS 939
Sylicone under gasket
cca 50 mm
type:Teroson MS 939

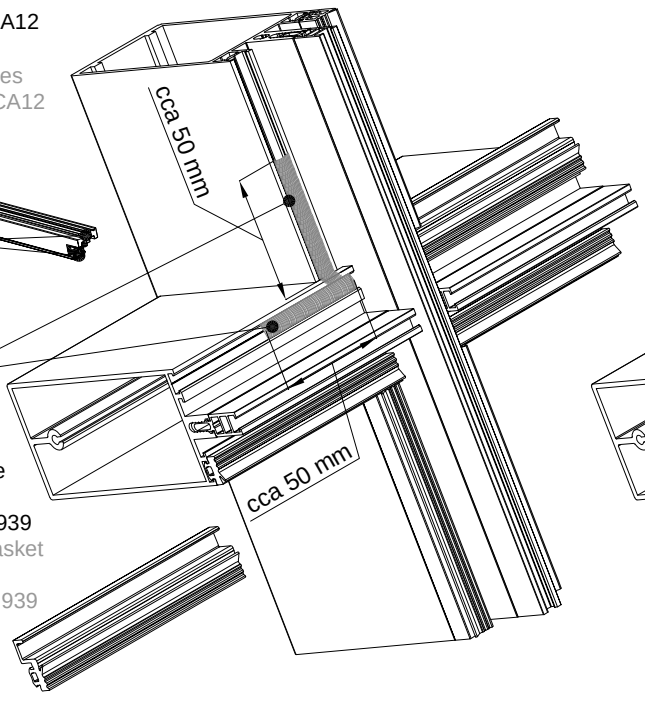


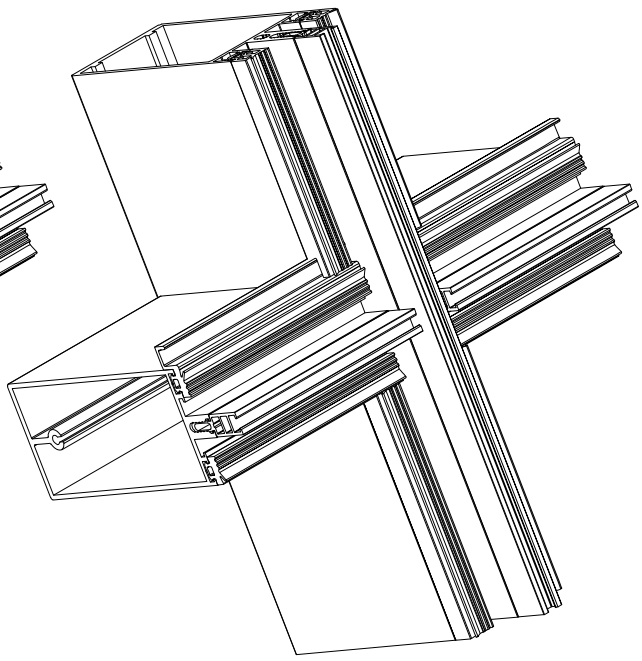


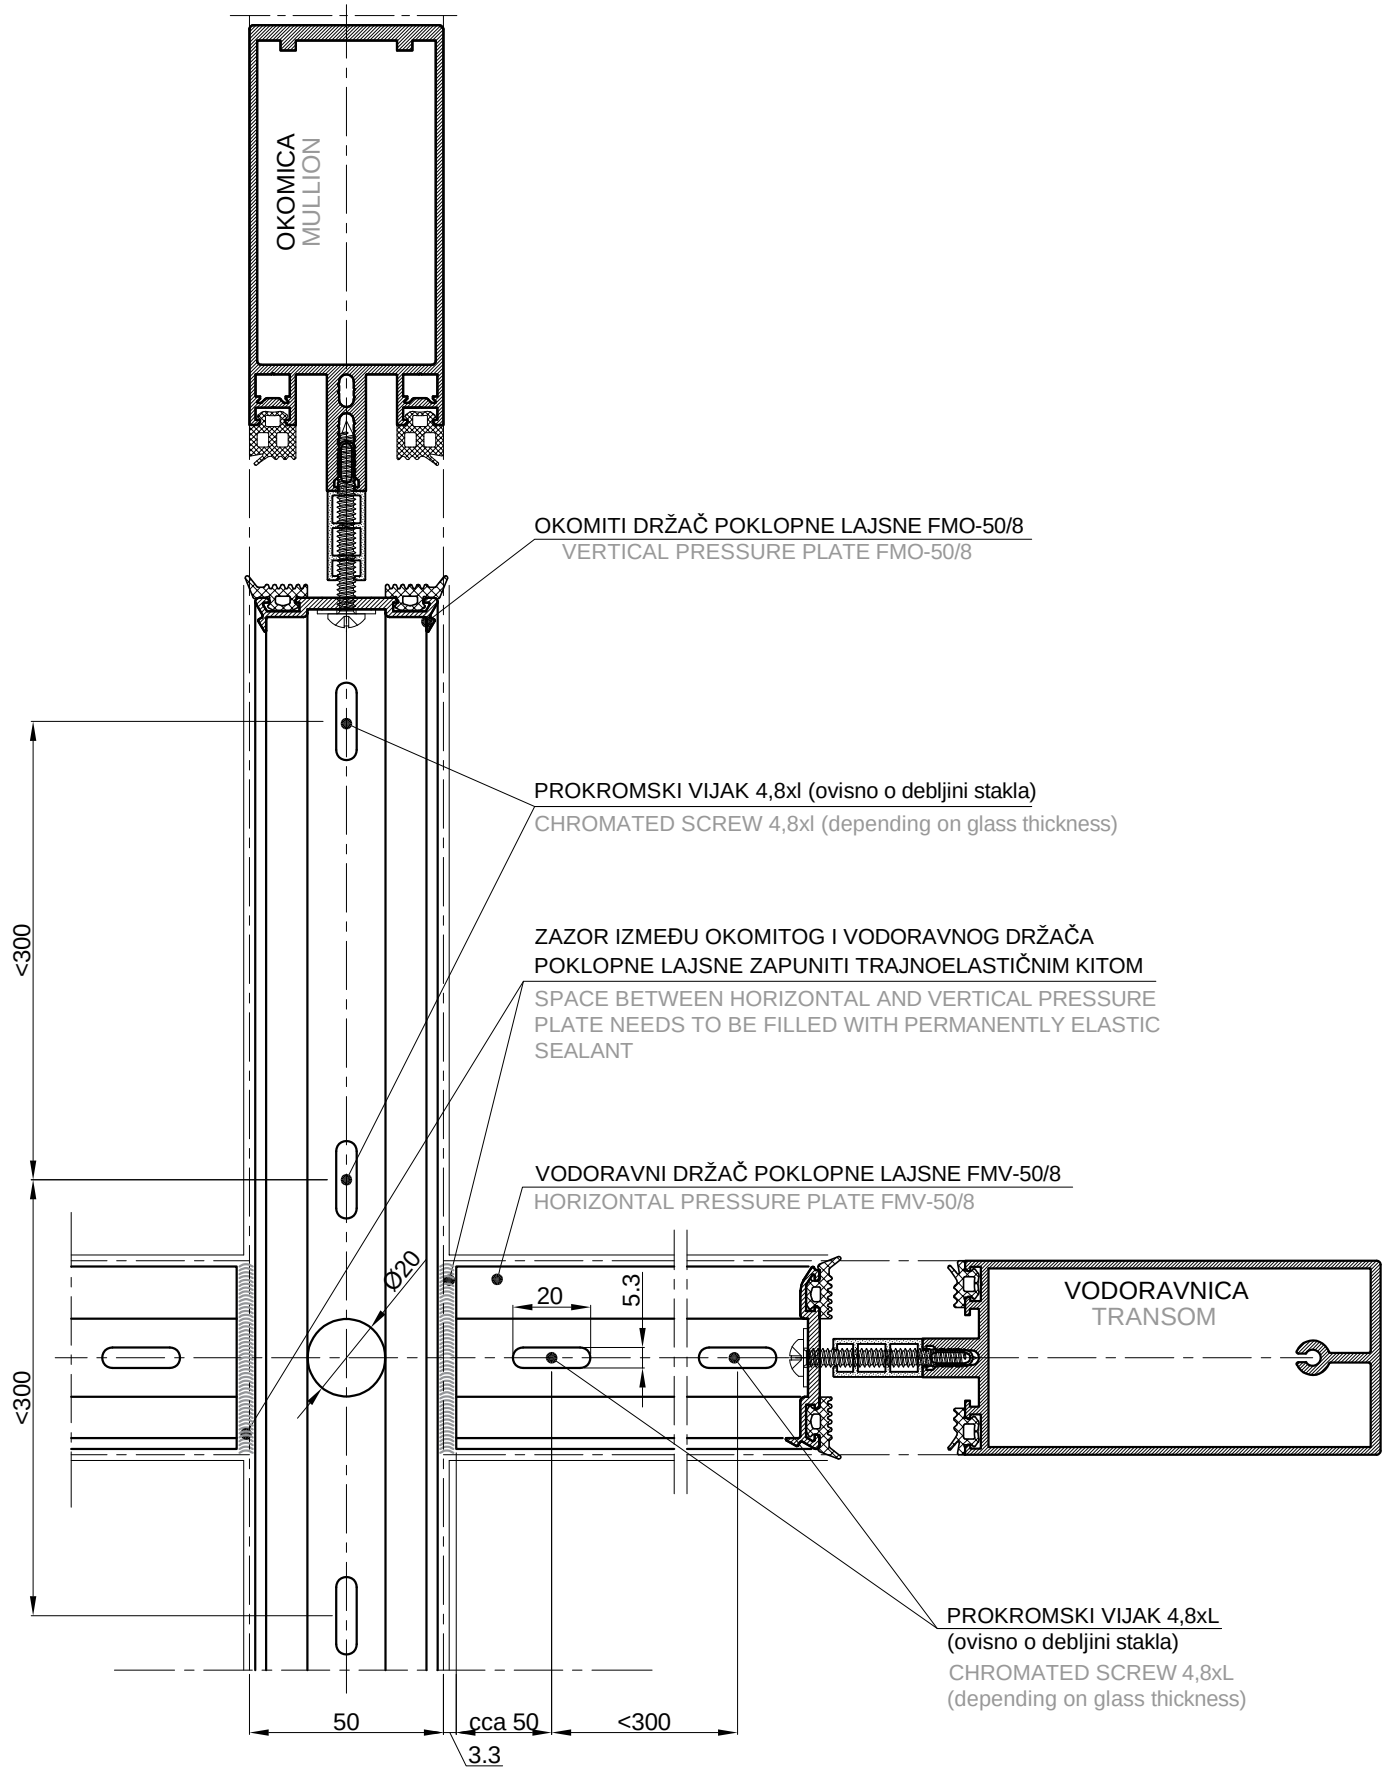
OKOMICA
MULLION
OKOMITI DRŽAČ POKLOPNE LAJSNE FMO-50/8
VERTICAL PRESSURE PLATE FMO-50/8
PROKROMSKI VIJAK 4,8xl (ovisno o debljini stakla)
CHROMATED SCREW 4,8xl (depending on glass thickness)
ZAZOR IZMEĐU OKOMITOG I VODORAVNOG DRŽAČA POKLOPNE LAJSNE ZAPUNITI TRAJNOELASTIČNIM KITOM
SPACE BETWEEN HORIZONTAL AND VERTICAL PRESSURE PLATE NEEDS TO BE FILLED WITH PERMANENTLY ELASTIC SEALANT
VODORAVNI DRŽAČ POKLOPNE LAJSNE FMV-50/8
HORIZONTAL PRESSURE PLATE FMV-50/8
<300
<300
Ø20
20
5.3
VODORAVNICA
TRANSOM
PROKROMSKI VIJAK 4,8xL
(ovisno o debljini stakla)
CHROMATED SCREW 4,8xL
(depending on glass thickness)
50
cca 50
<300
3.3

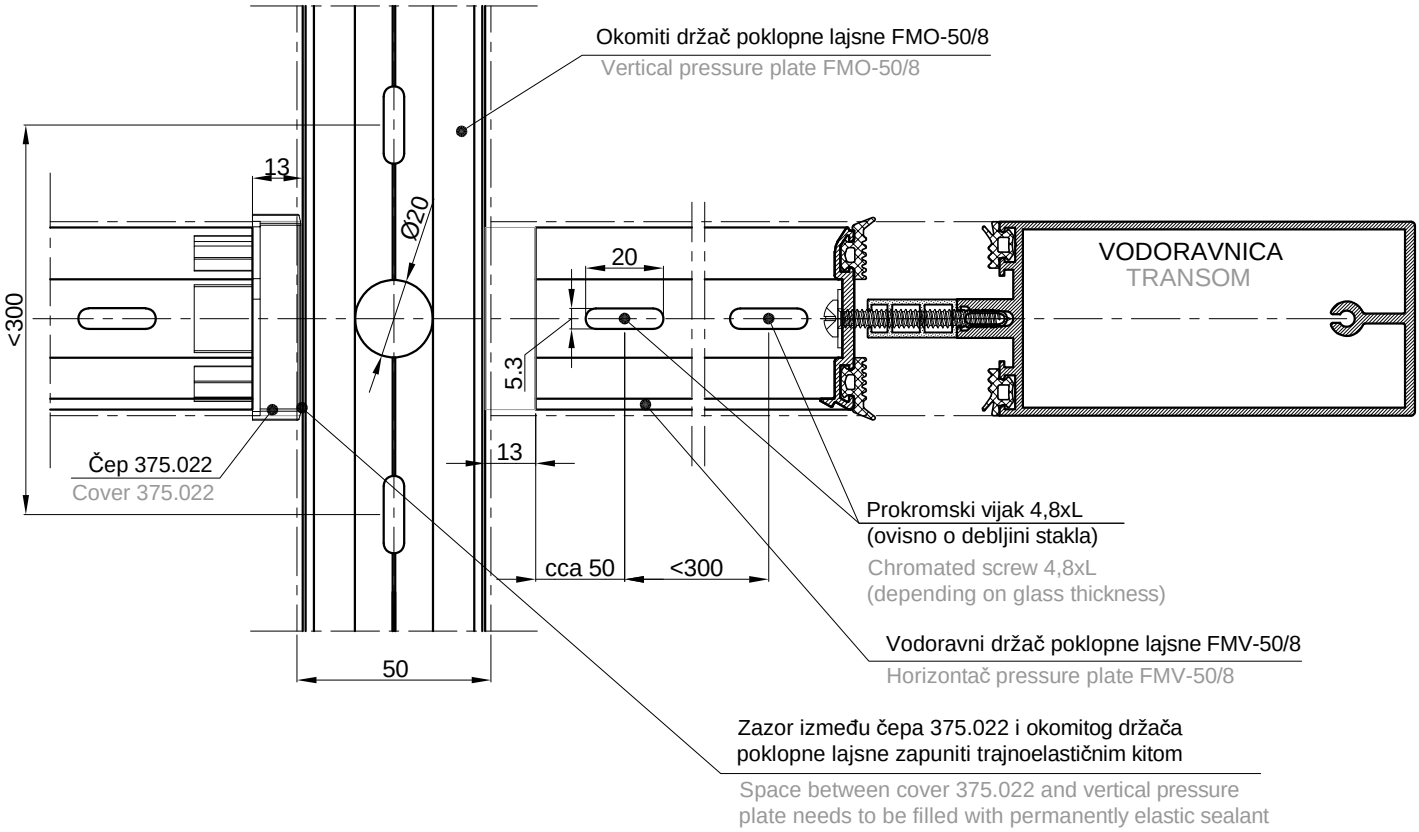
Okomiti držač poklopne lajsne FMO-50/8
Vertical pressure plate FMO-50/8
13
Ø20
20
VODORAVNICA
TRANSOM
<300
5.3
13
Čep 375.022
Cover 375.022
Prokromski vijak 4,8xL
(ovisno o debljini stakla)
Chromated screw 4,8xL
(depending on glass thickness)
cca 50
<300
Vodoravni držač poklopne lajsne FMV-50/8
Horizontač pressure plate FMV-50/8
50
Zazor između čepa 375.022 i okomitog držača
poklopne lajsne zapuniti trajnoelastičnim kitom
Space between cover 375.022 and vertical pressure
plate needs to be filled with permanently elastic sealant

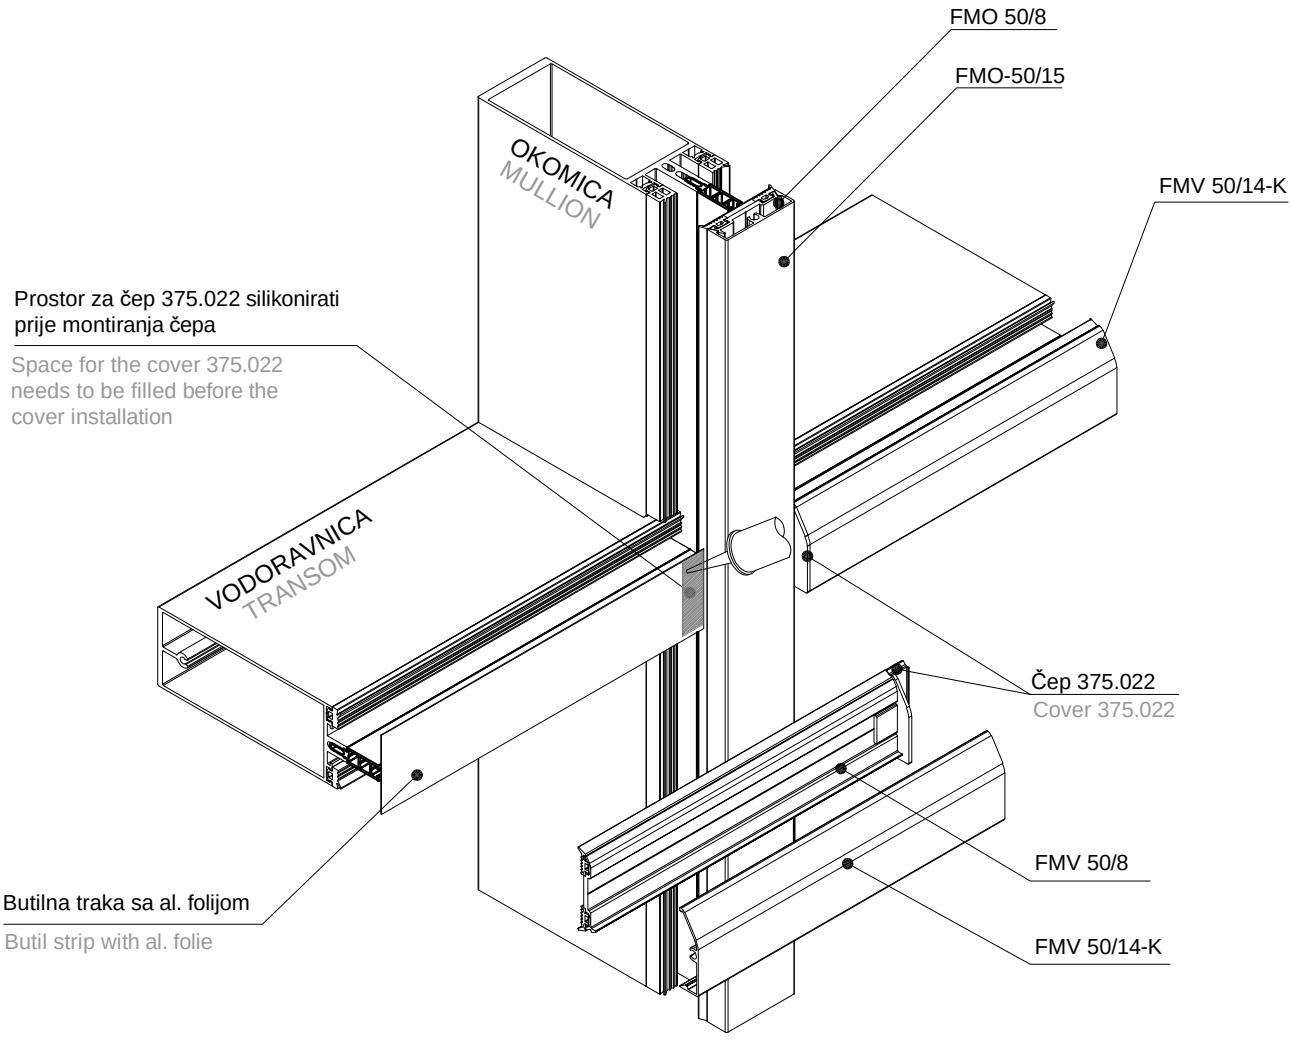
FMO 50/8
FMO-50/15
FMV 50/14-K
OKOMICA
MULLION
Prostor za čep 375.022 silikonirati
prije montiranja čepa
Space for the cover 375.022
needs to be filled before the
cover installation
VODORAVNICA
TRANSOM
Čep 375.022
Cover 375.022
FMV 50/8
FMV 50/14-K
Butilna traka sa al. folijom
Butil strip with al. folie

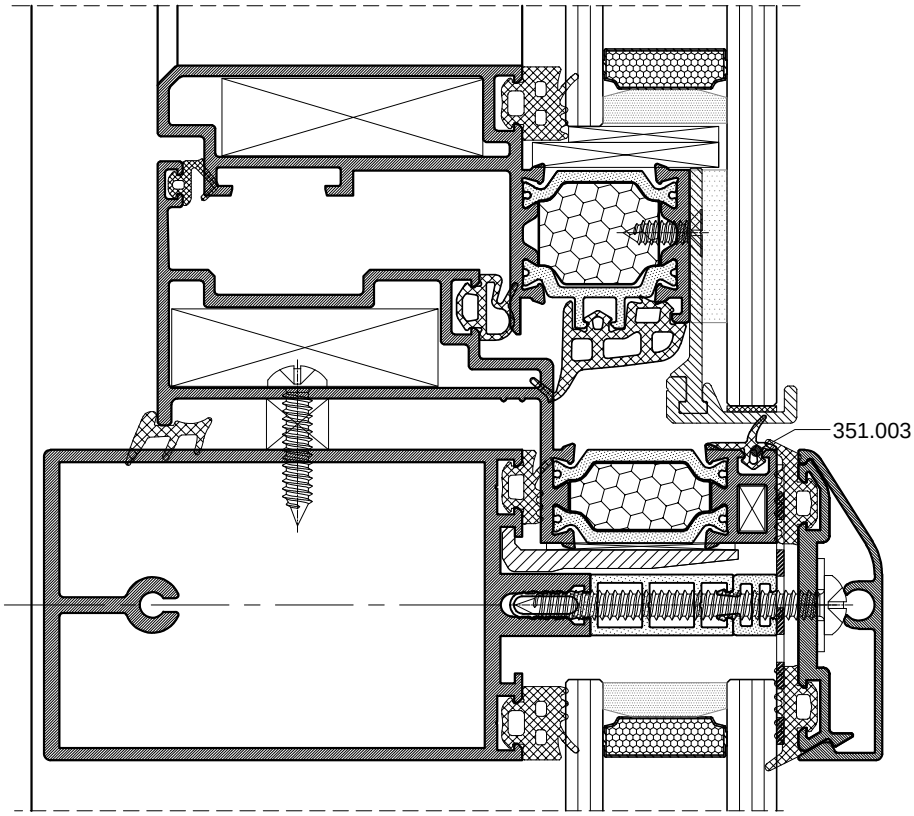


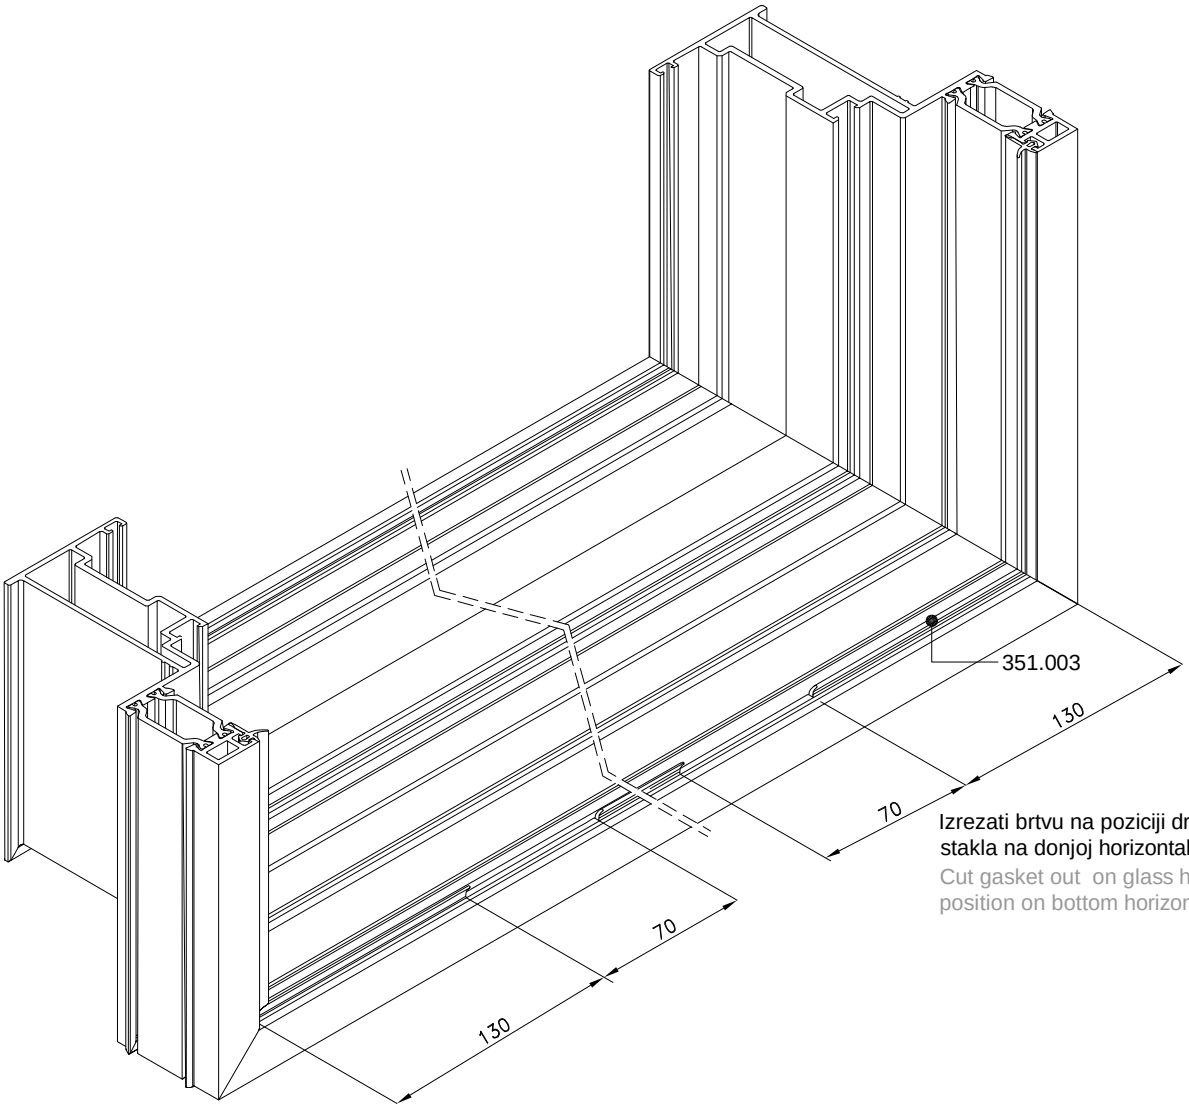


Izrezati brtvu na poziciji držača stakla na donjoj horizontali


Cut gasket out on glass holder position on bottom horizontal

PVC umetak za parapetni dio fasade
PVC insert for curtain wall spandrel

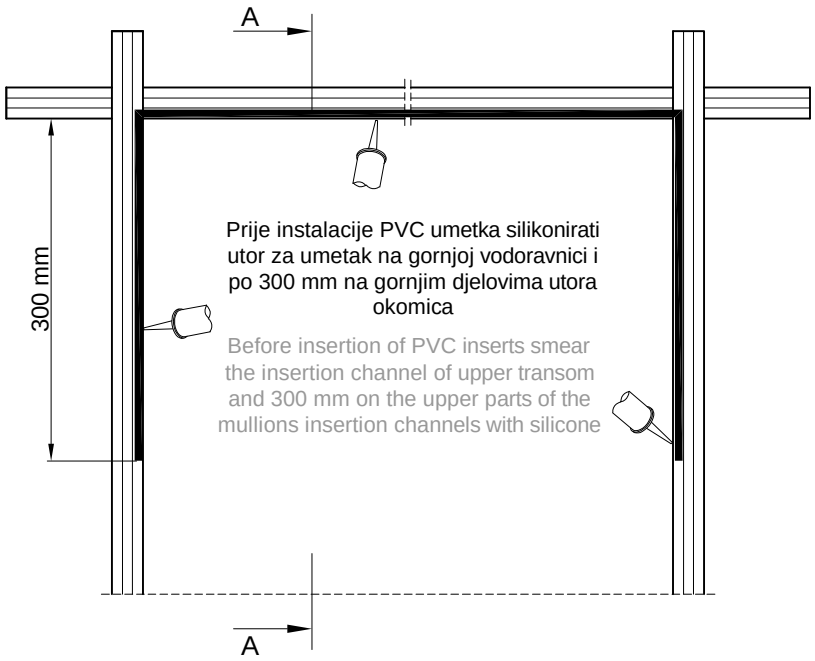

Presjek A-A
Cross section A-A

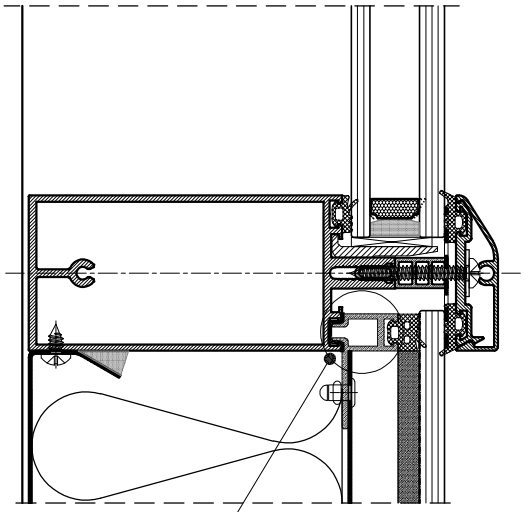





Silikonirani spoj aluminija i PVC umetka 374.010 ili 374.011 na parapetnom djelu fasade
Siliconized joint of inserts 374.010 or 374.011 and aluminum on the curtain wall spandrel

Spajanje PVC umetaka
Connection of PVC inserts

PVC umetke spajati pod kutom od 45°
Connect PVC inserts under the edge of 45°

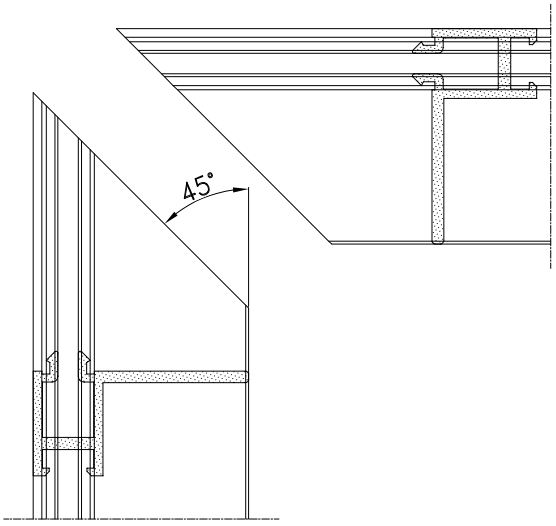

Rubne djelove spoja zalijepiti (npr. DOWSIL 796)
Edge joints smear with modifier (e.g. DOWSIL 796)

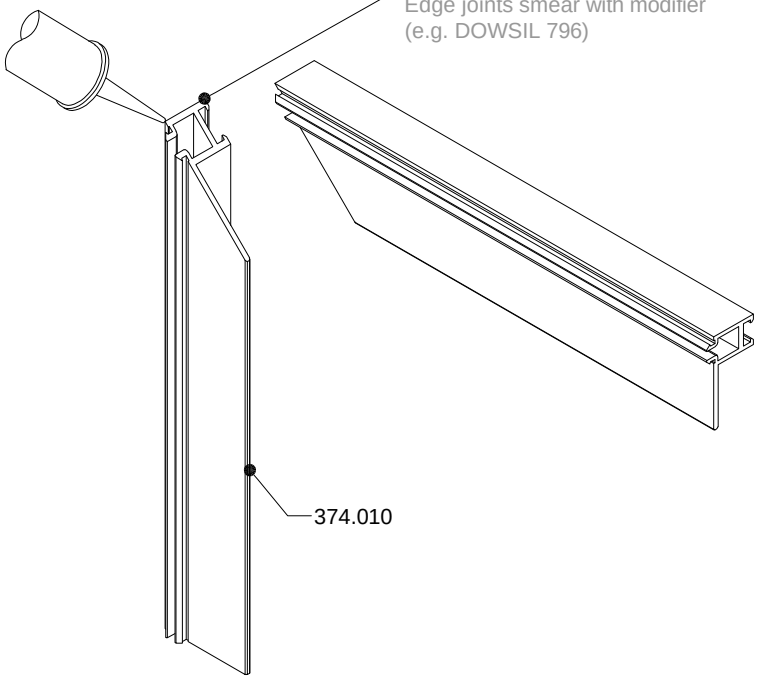


M 2:1

Montaža FM umetaka
FM inserts installation



Presjek A-A
Cross section A-A

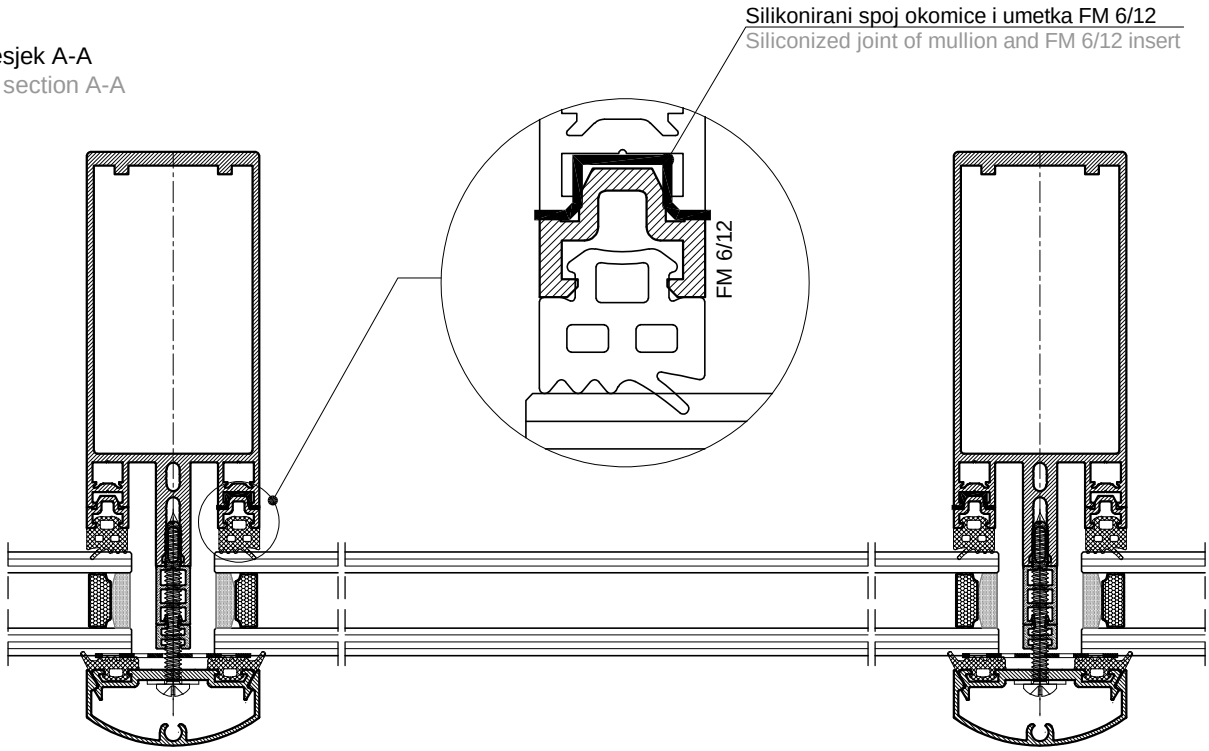



Navedeni FM umeci podrazumjevaju sljedeće profile: FM 30/12, FM 24/12, FM 18/12, FM 12/12 i FM 6/12.
Mentioned FM inserts refer to the following profiles: FM 30/12, FM 24/12, FM 18/12, FM 12/12 i FM 6/12.


Umetke spajati pod kutom od 90°.
Connect inserts under the angle of 90°.


POKLOPNA LAJSNA COVER CAP	KOD ČEPA COVER CODE	TIP SPOJA CONNECTION TYPE
FMV 50/14	521.497	Vijčano Screw
FMV 50/14-K	375.022	Utiskivanje Insert
FMO 50/15	521.497	Vijčano Screw
FMO 50/22	375.007	Utiskivanje Insert
FM 50/23	521.498	Vijčano Screw
FMO 50/25	521.497	Vijčano Screw
FMO 50/30	375.008	Utiskivanje Insert
FMO 50/40	521.493	Utiskivanje Insert
FMO 50/60	375.009	Utiskivanje Insert
FMO 50/61	521.491	Utiskivanje Insert
FMO 50/80	521.494	Utiskivanje Insert
FM 50/120	521.432	Vijčano Screw
FM 50/125	521.496*	Vijčano* Screw*
FMO 50/150	521.485*	Vijčano* Screw*
FPL 50/200	521.368	Vijčano Screw


* Pri ugradnji čepova 521.496 i 521.485 potrebno je silikonirati rubove poklopnih lajsni (npr. Teroson MS 660)
* It's necessary to silicone cover caps edges when connecting covers 521.496 and 521.485 (e.g. Teroson MS 660)

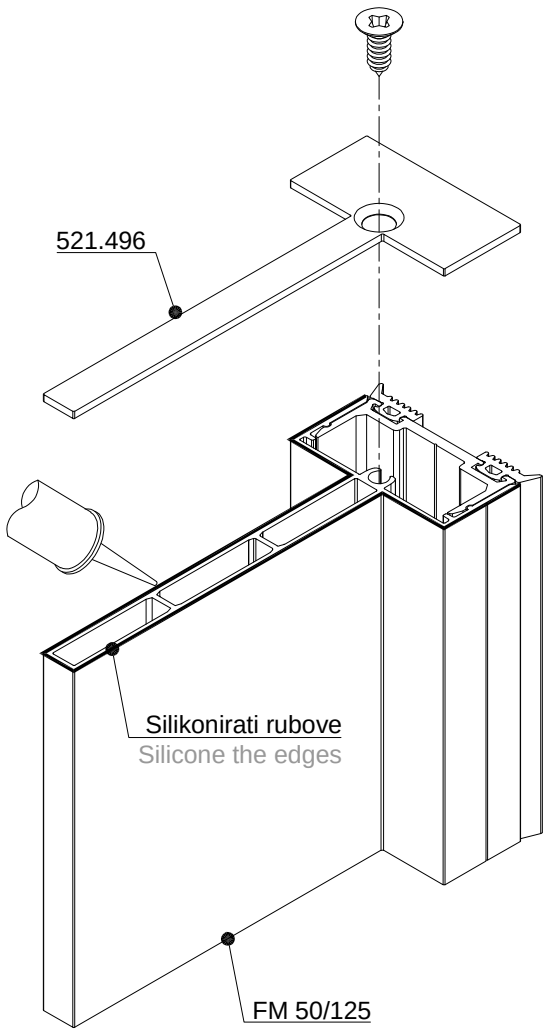

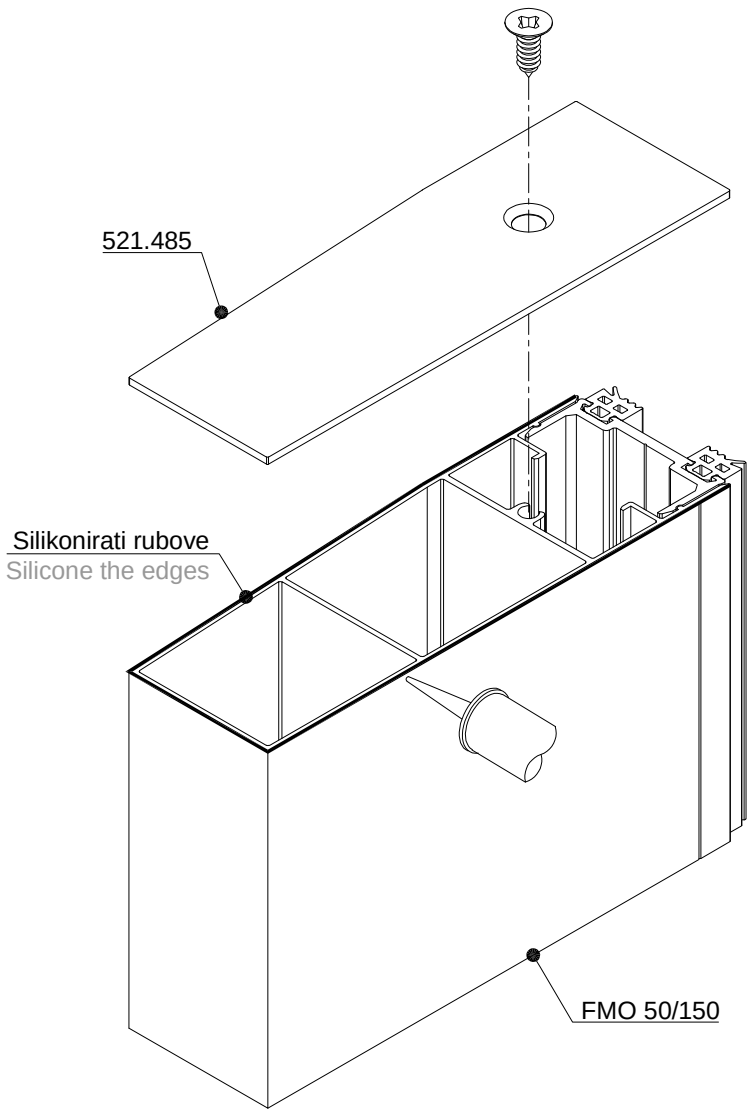




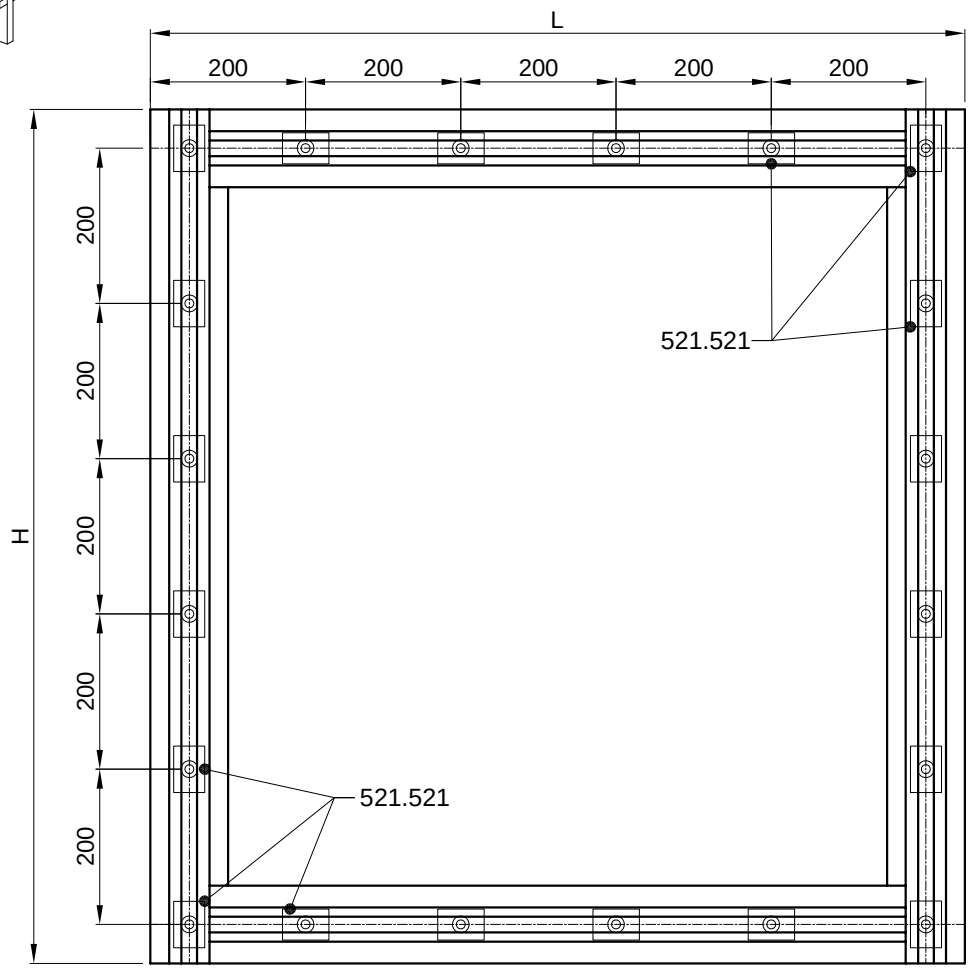

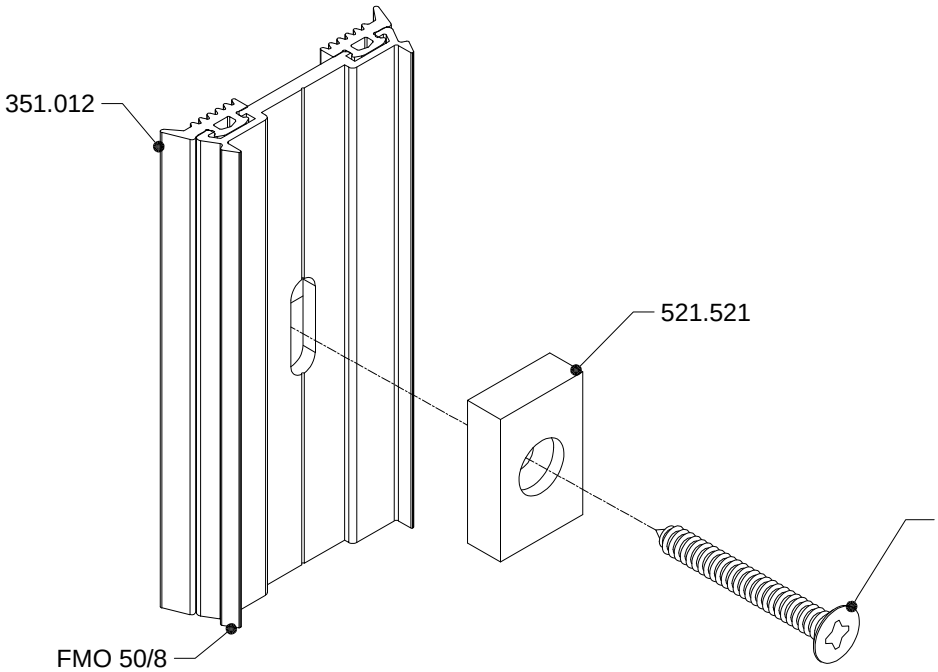



5.5x90 DIN 7982
Kako bi se spriječilo odvijanje potrebno je deformirati glavu vijka
In order to prevent unscrewing, it is necessary to misshape the head of the screw

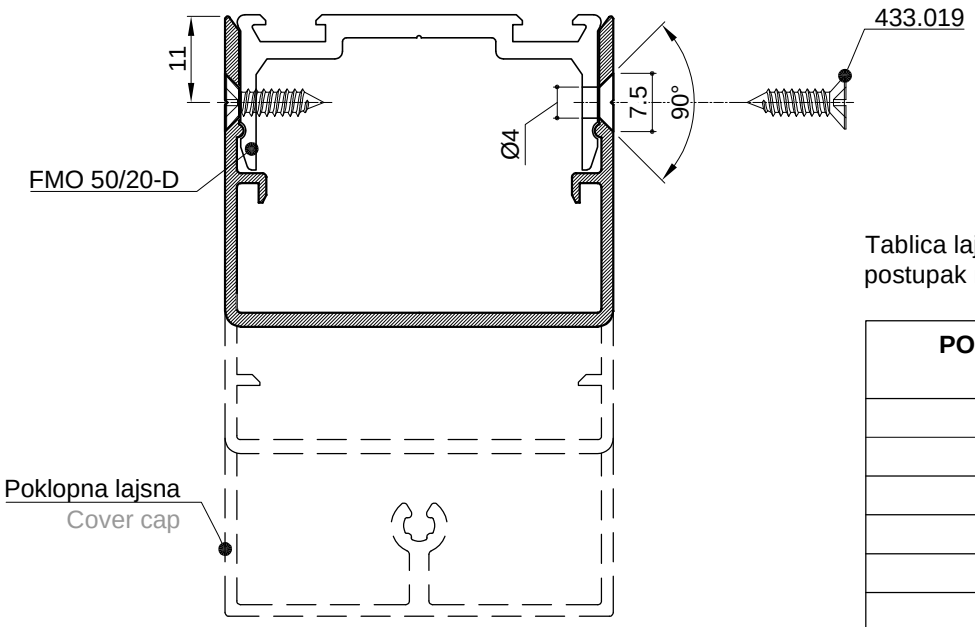



Tablica lajsni za koje se koristi ovaj postupak montaže.

POKLOPNA LAJSNA COVER CAP
FMO 50/40
FMO 50/61
FM 50/80
FMO 50/120
FMO 50/125
FMO 50/150
FPL 50/200

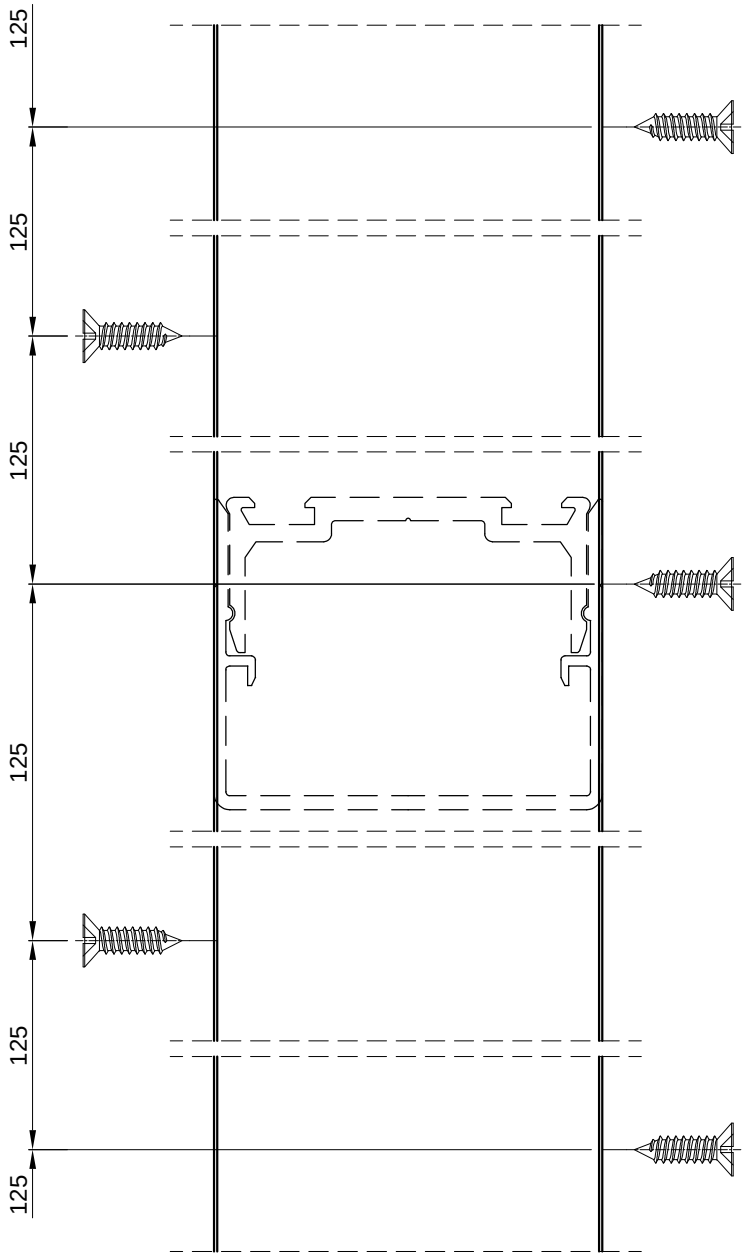

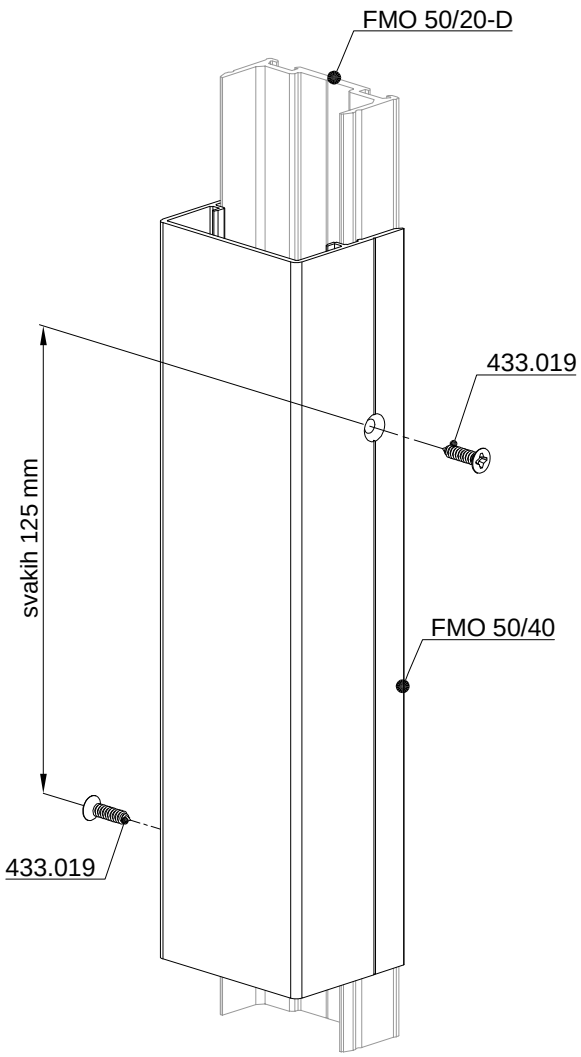


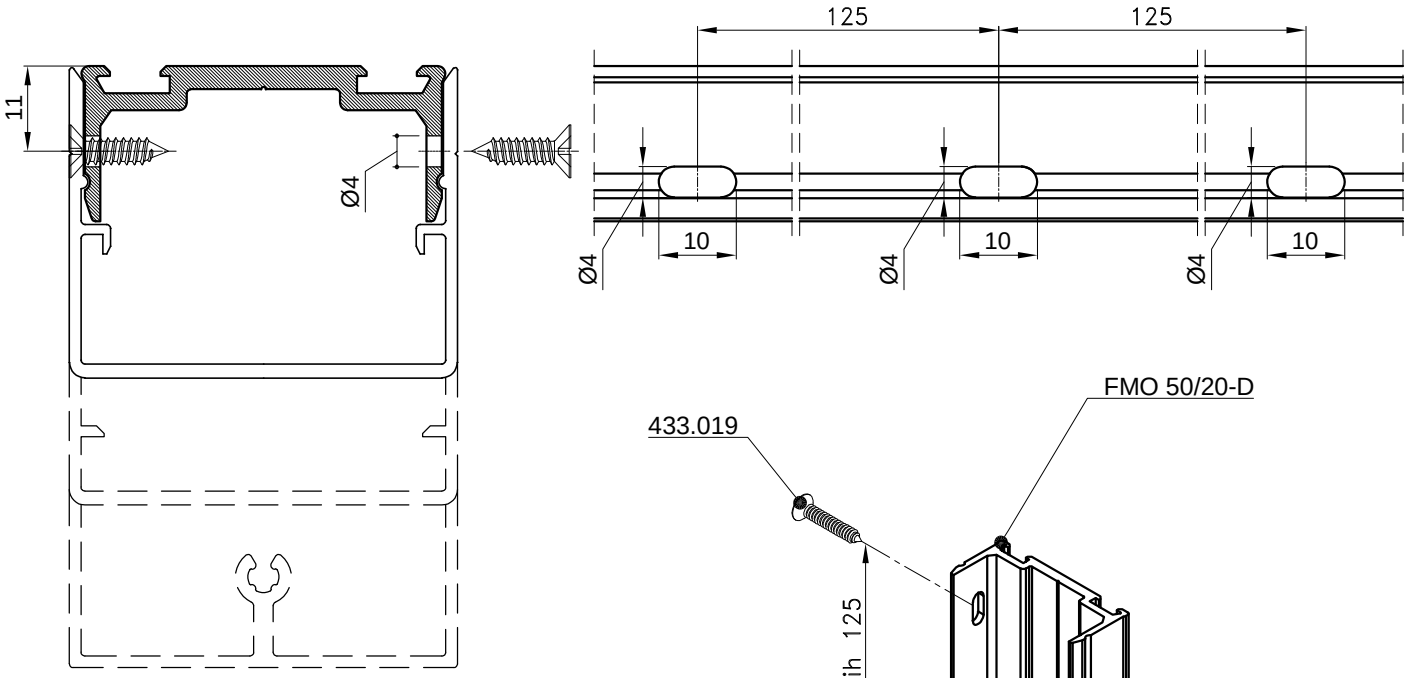


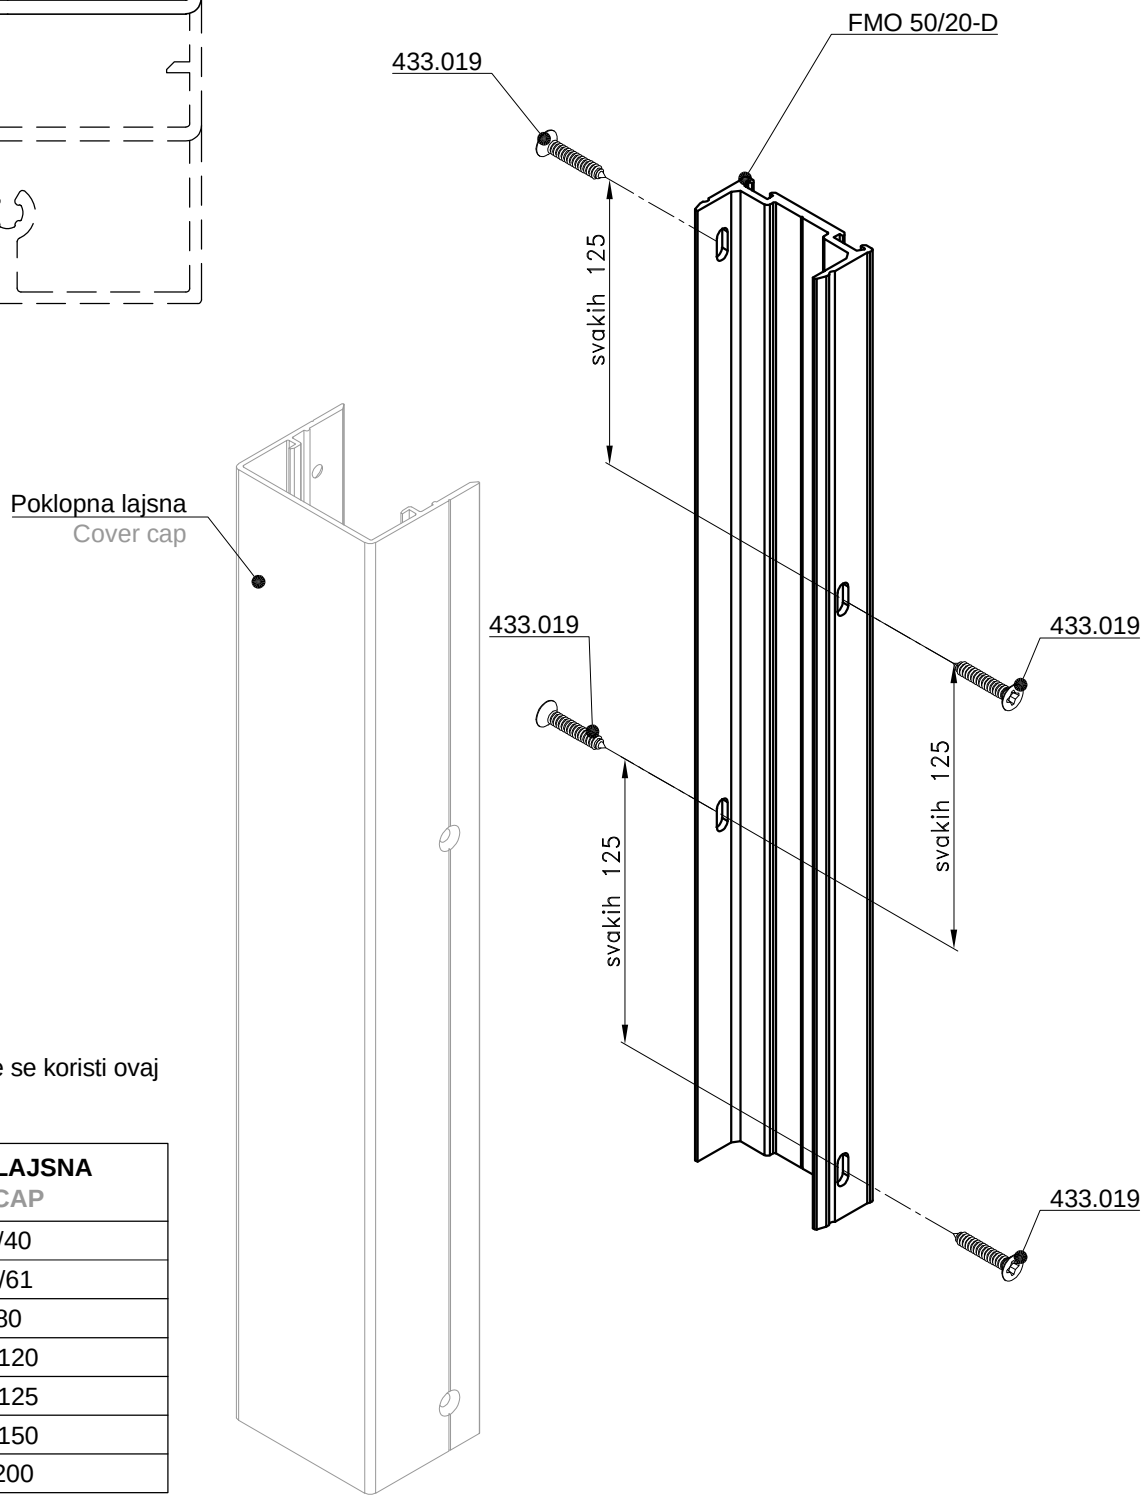


Tablica lajsni za koje se koristi ovaj postupak montaže.

POKLOPNA LAJSNA COVER CAP
FMO 50/40
FMO 50/61
FM 50/80
FMO 50/120
FMO 50/125
FMO 50/150
FPL 50/200

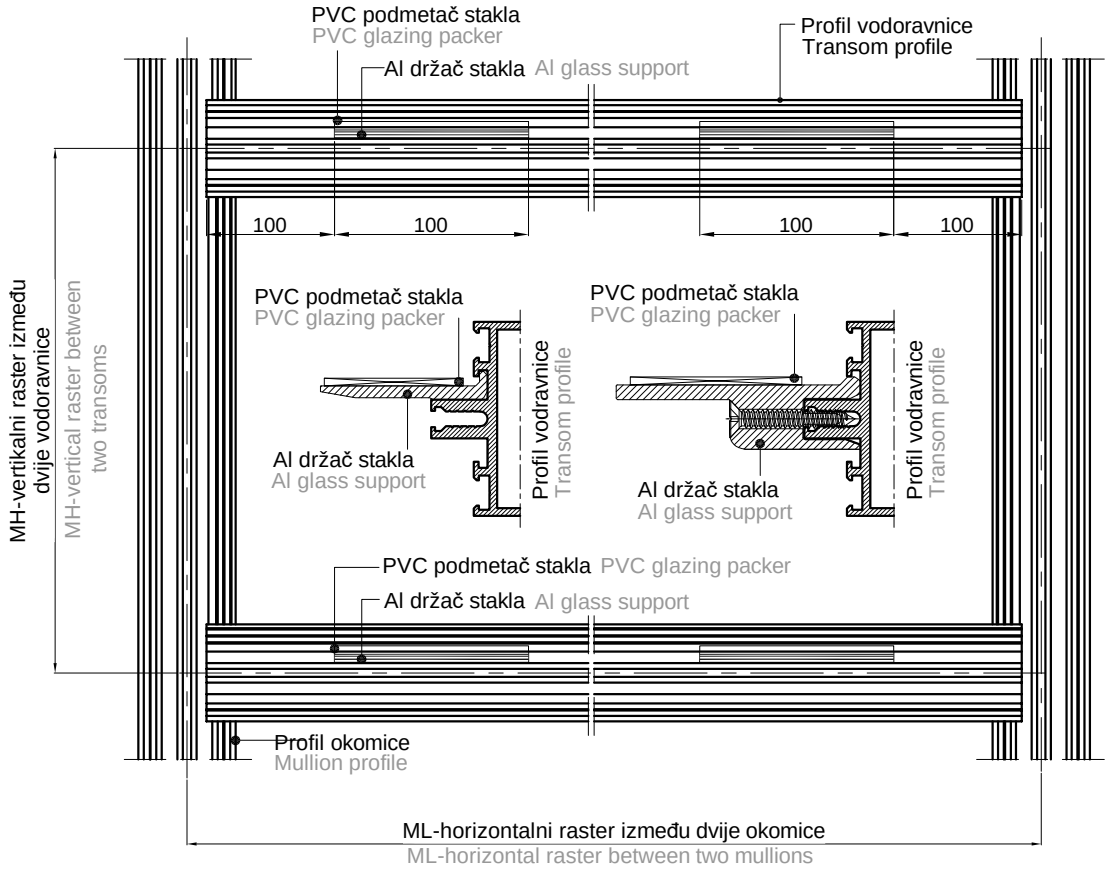


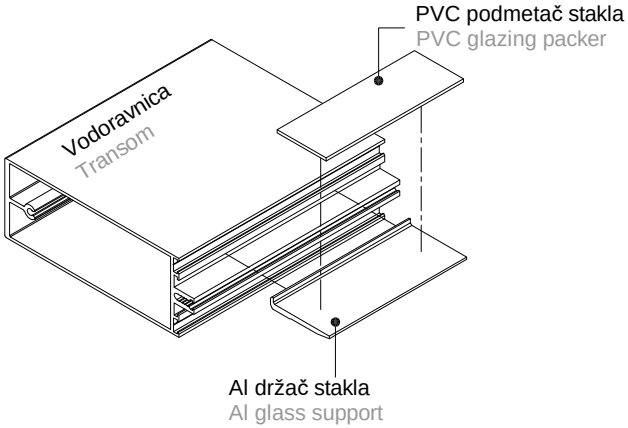

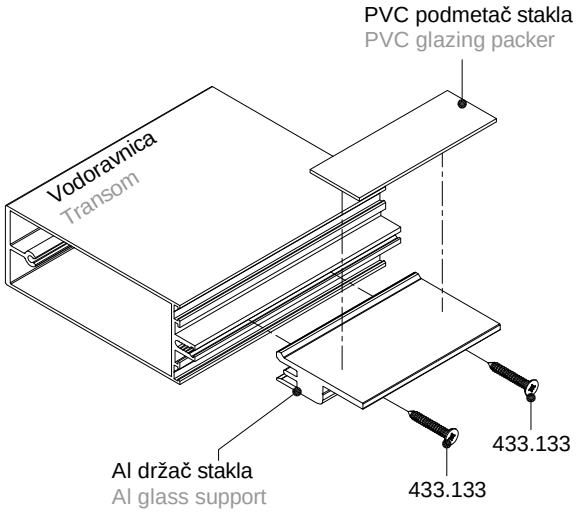


Nosivosti držača stakla (po paru):
Load capacity of glass support (per pair):


Kod Code	Dimen. Dimen.	Nosiv. Load
521.005	27/7	250kg
521.067	34/7	248kg
521.122	52/7	192kg
521.066	43/7	165 kg
521.127	48/7	162kg
521.014	38/7	150kg
521.064	54/7	305 kg
521.234	63/7	400 kg
521.331	44/7	450 kg
521.242	63/7	700 kg

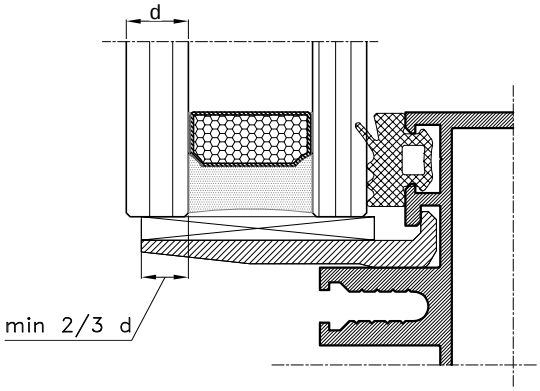


-Dvostrani nosač stakla za veća opterećenja s potpornjom na okomici
-Doublesided glass support for greater loads with a supprot on mullion


Najveće dopušteno opterećenje	700 kg
Najveći dopušten raspon (ML)	2 m
Maximum allowed load	700 kg
Maximum allowed span (ML)	2 m

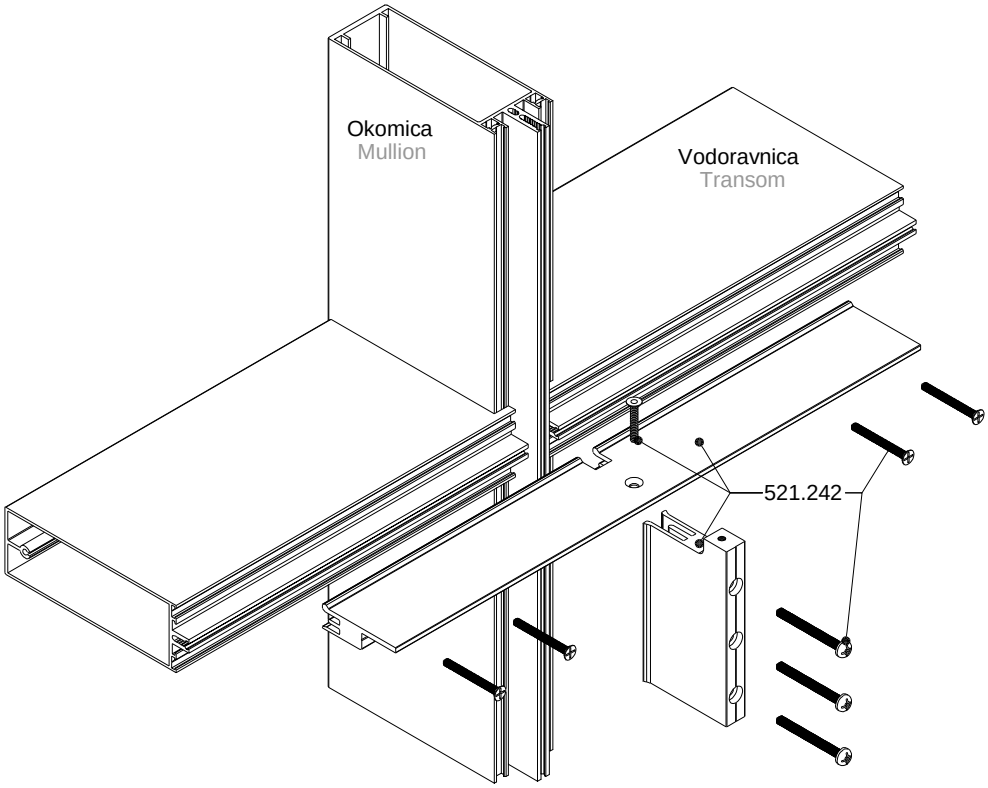

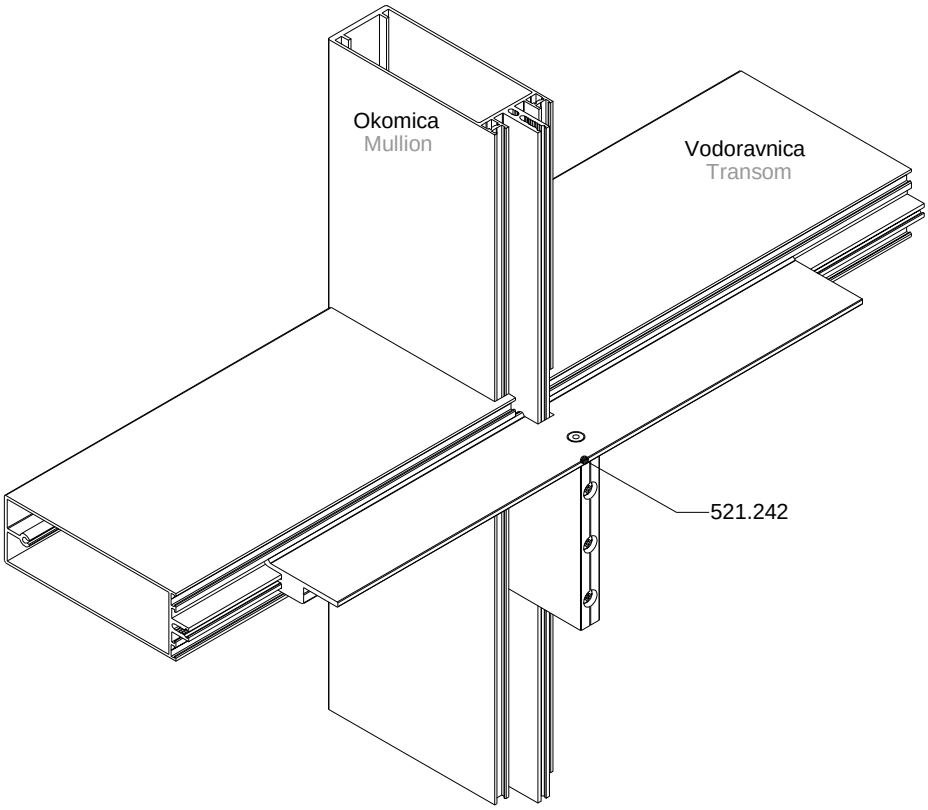


- Montaža francuskog balkona
- French balcony installation

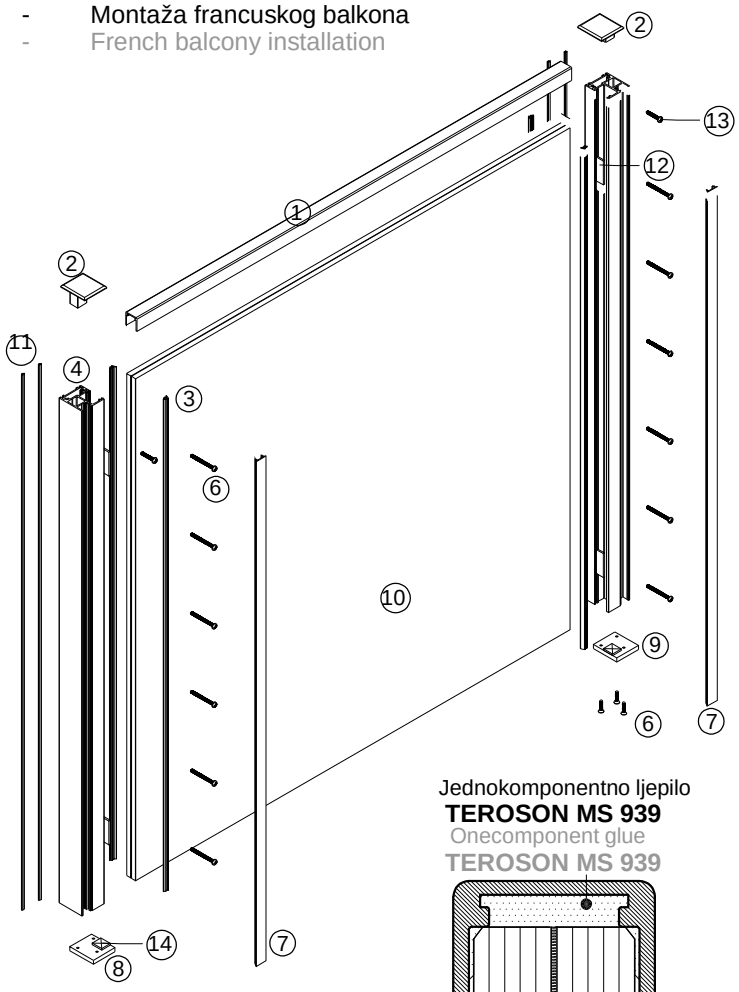


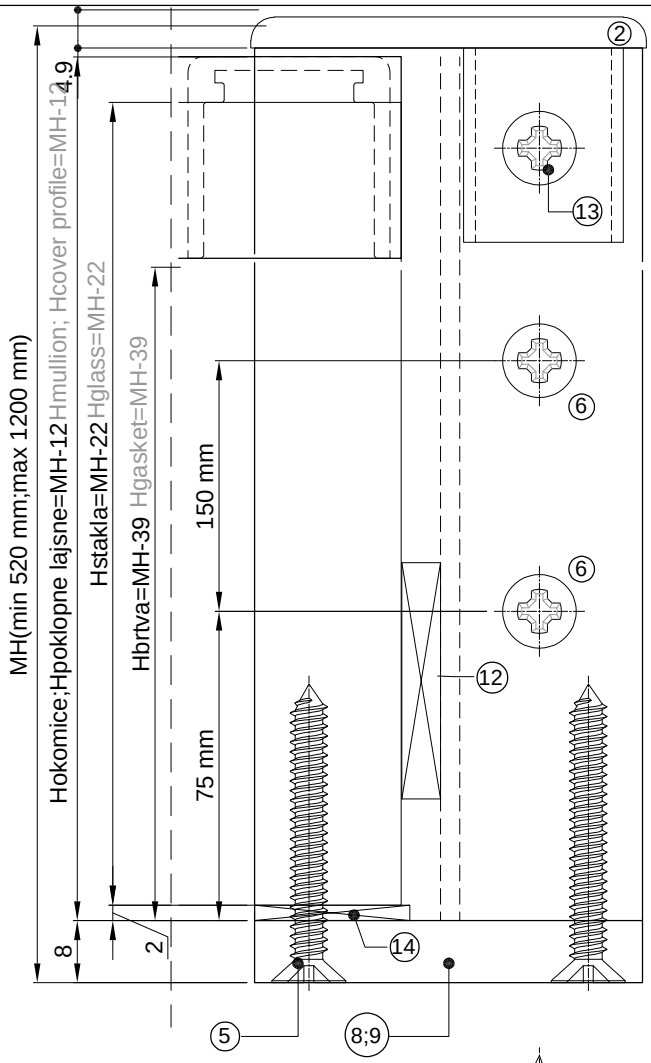

Jednokomponentno ljepilo
TEROSON MS 939
Onecomponent glue
TEROSON MS 939



F-1437
Rukohvat
Handrail

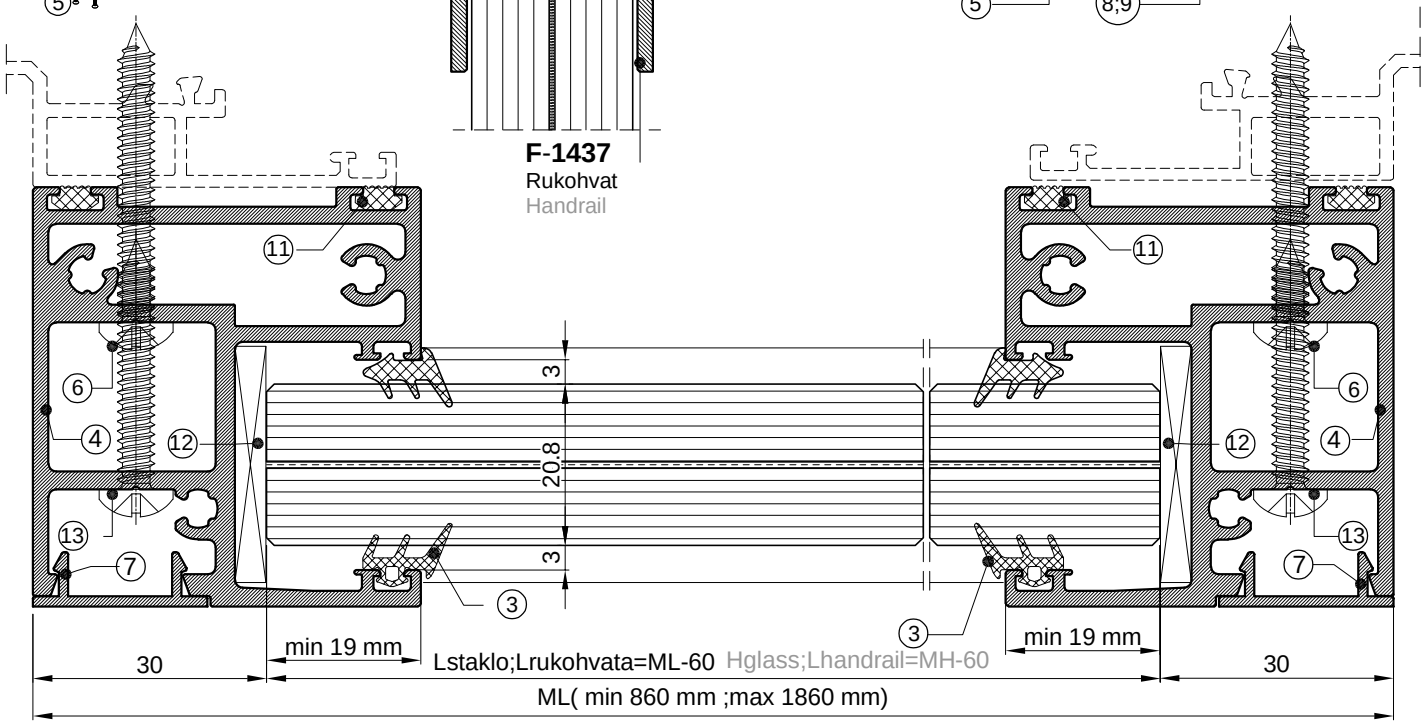



1 - profil rukohvata F-1437
1 - handrail profile F-1437
2 - PVC čep 373.054
2 - PVC cover cap 373.054
3 - brtva 321.002
3 - gasket 311.002
4 - profil okomice F-1569
4 - french balcony profile F-1569

5 - 433.134 (6 komada)
5 - 433.134 (6 pieces)
6 - 433.04x
6 - 433.04x
7 - poklopna lajsna F-0826
7 - cover profile F-0826
8 - nosiva pločica lijeva 391.148
8 - glass support left 391.148


9 - nosiva pločica desna 391.149
9 - glass support right 391.149
10 - staklo 10.10.2 Kaljeno lamistal
10 - glass 10.10.2 toughened laminated
11 - brtva 340.055
11 - gasket 340.055
12 - PVC distancer 100x30x5 mm
12 - PVC packer 100x30x5 mm

13 - 433.046 (za PVC čep)
13 - 433.046 (for PVC cover cap)
14 - PVC distancer 20x20x2*
14 - PVC packer 20x20x2*

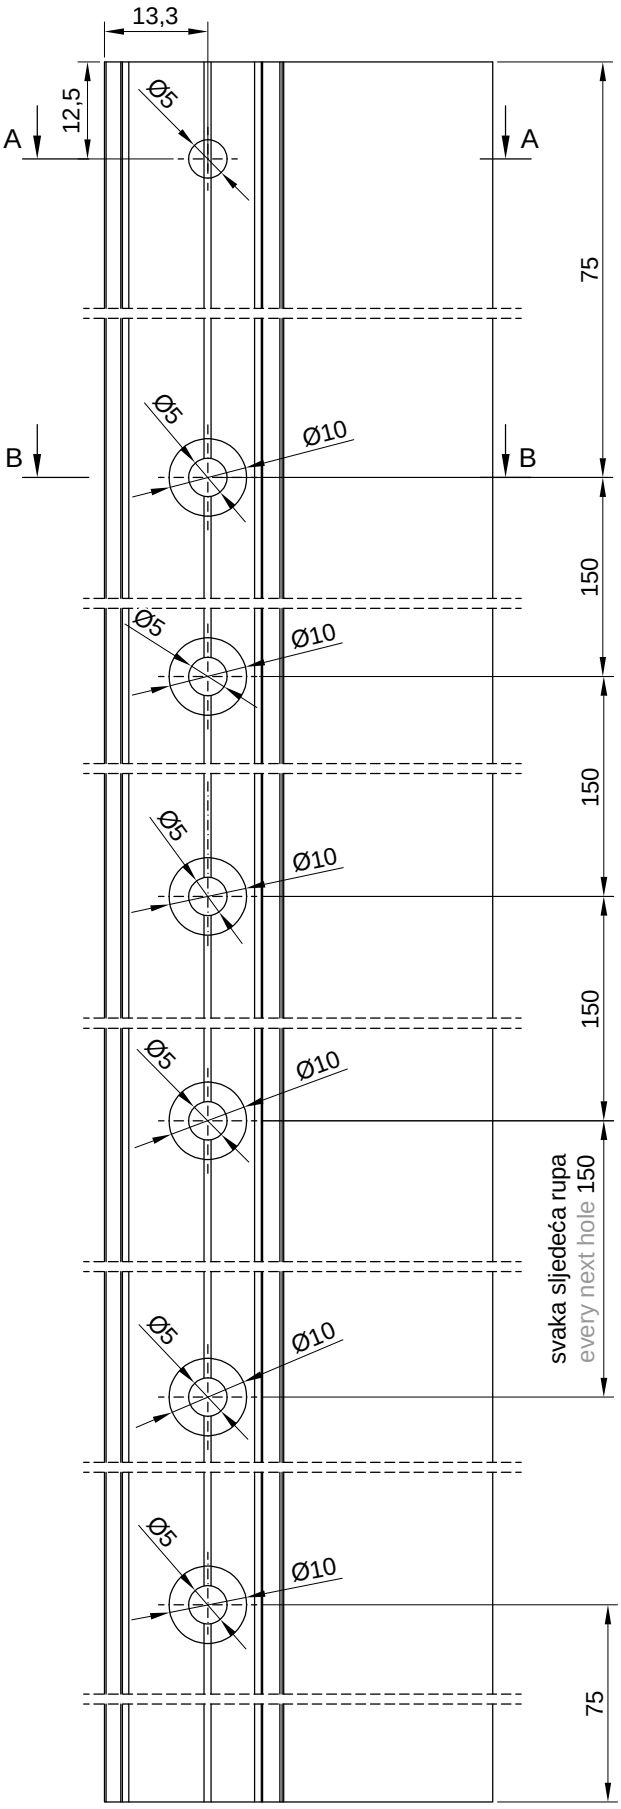

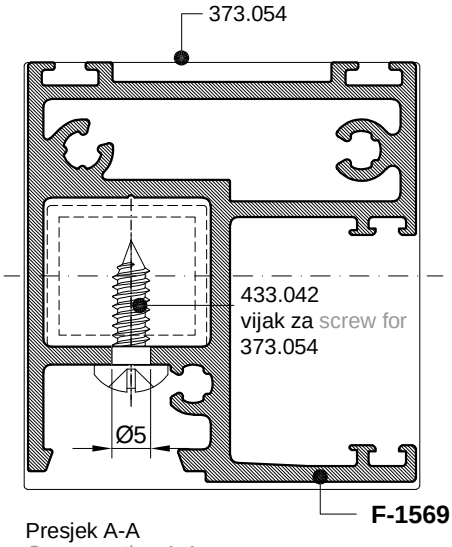



Presjek A-A
Cross section A-A

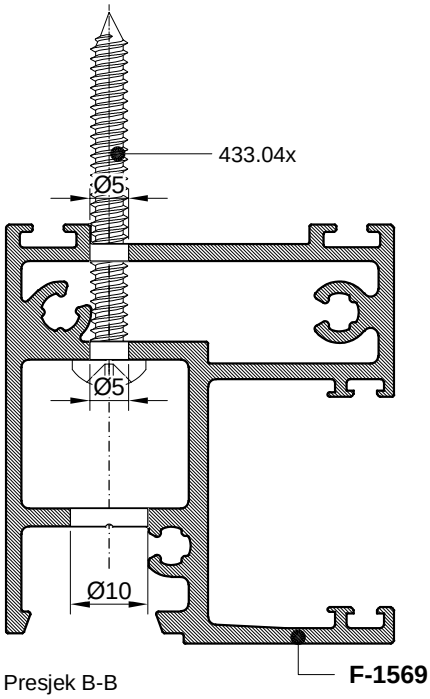



Presjek B-B
Cross section B-B


*Raspored rupa Ø4 na ramu po visini odgovara rasporedu na profilu F-1569 te se može koristiti kao šablon
*Hole Ø4 positions by height on the frame correspond to the positions on profile F-1569 and can be used as hole template

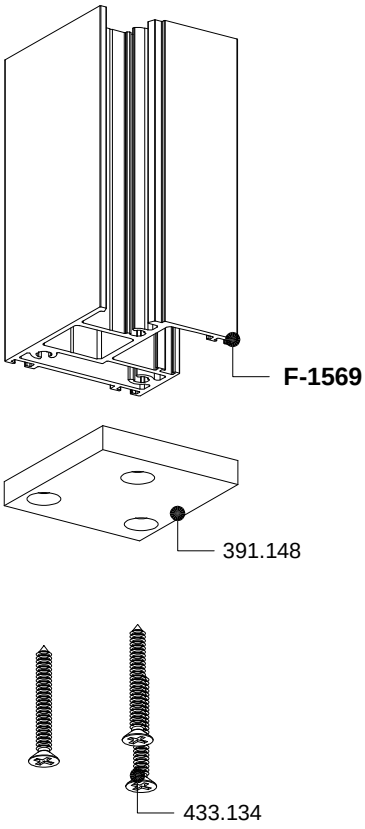

F-1569
391.148
433.134

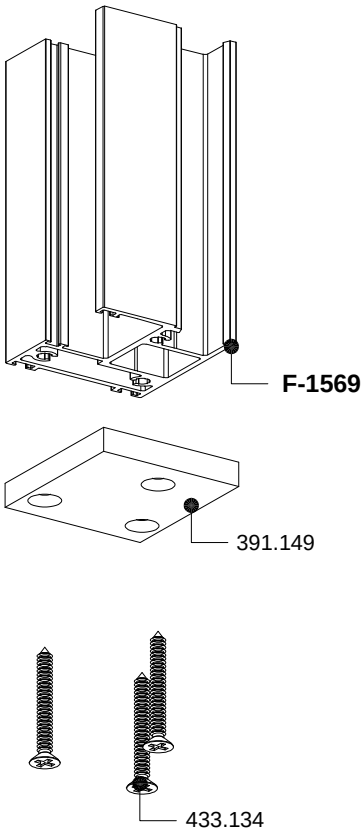

F-1569
391.149
433.134

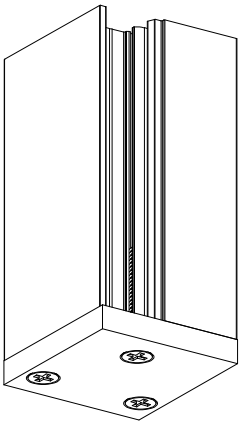

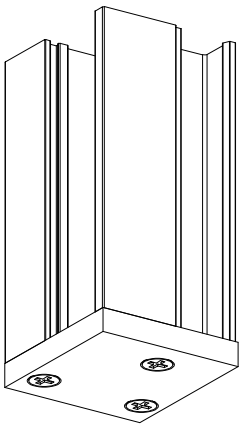

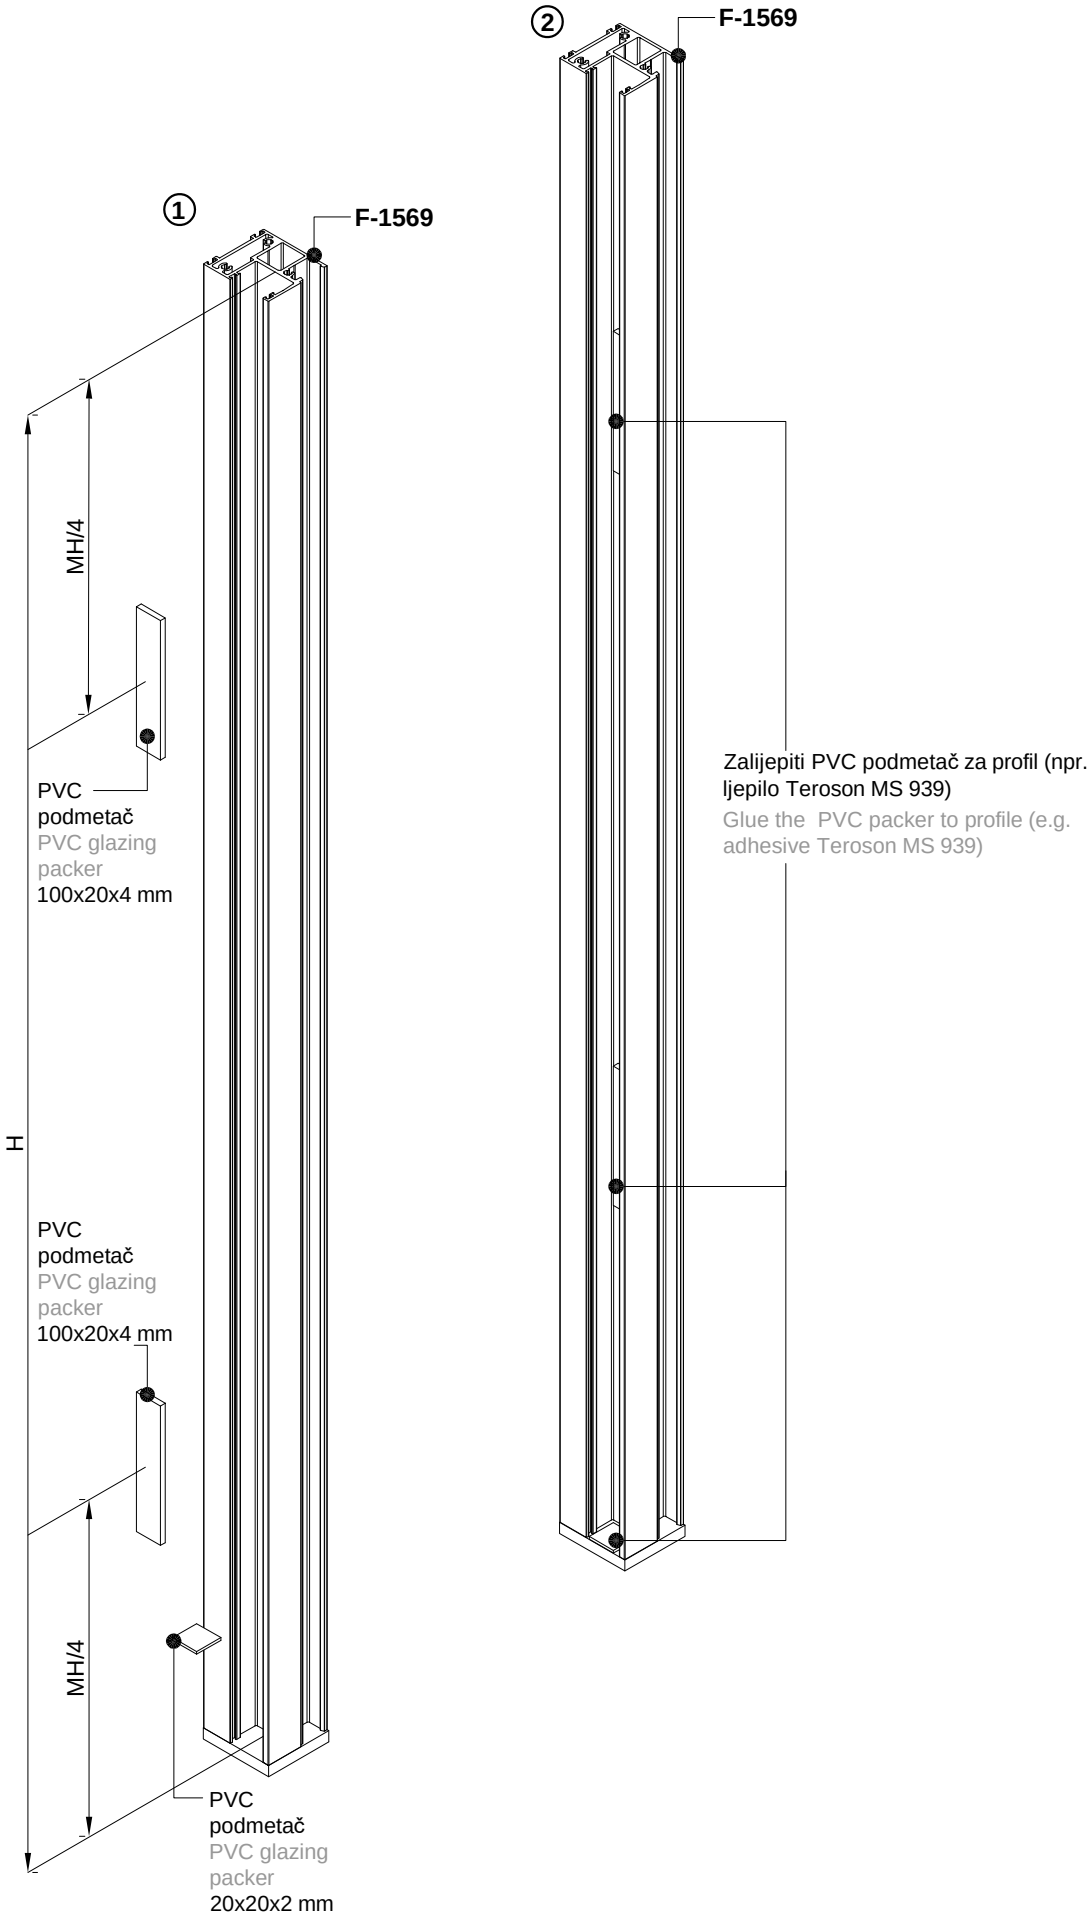
①
F-1569
MH/4
PVC
podmetač
PVC glazing
packer
100x20x4 mm
H
PVC
podmetač
PVC glazing
packer
100x20x4 mm
MH/4
PVC
podmetač
PVC glazing
packer
20x20x2 mm
②
F-1569
Zalijepiti PVC podmetač za profil (npr. ljepilo Teroson MS 939)
Glue the PVC packer to profile (e.g. adhesive Teroson MS 939)

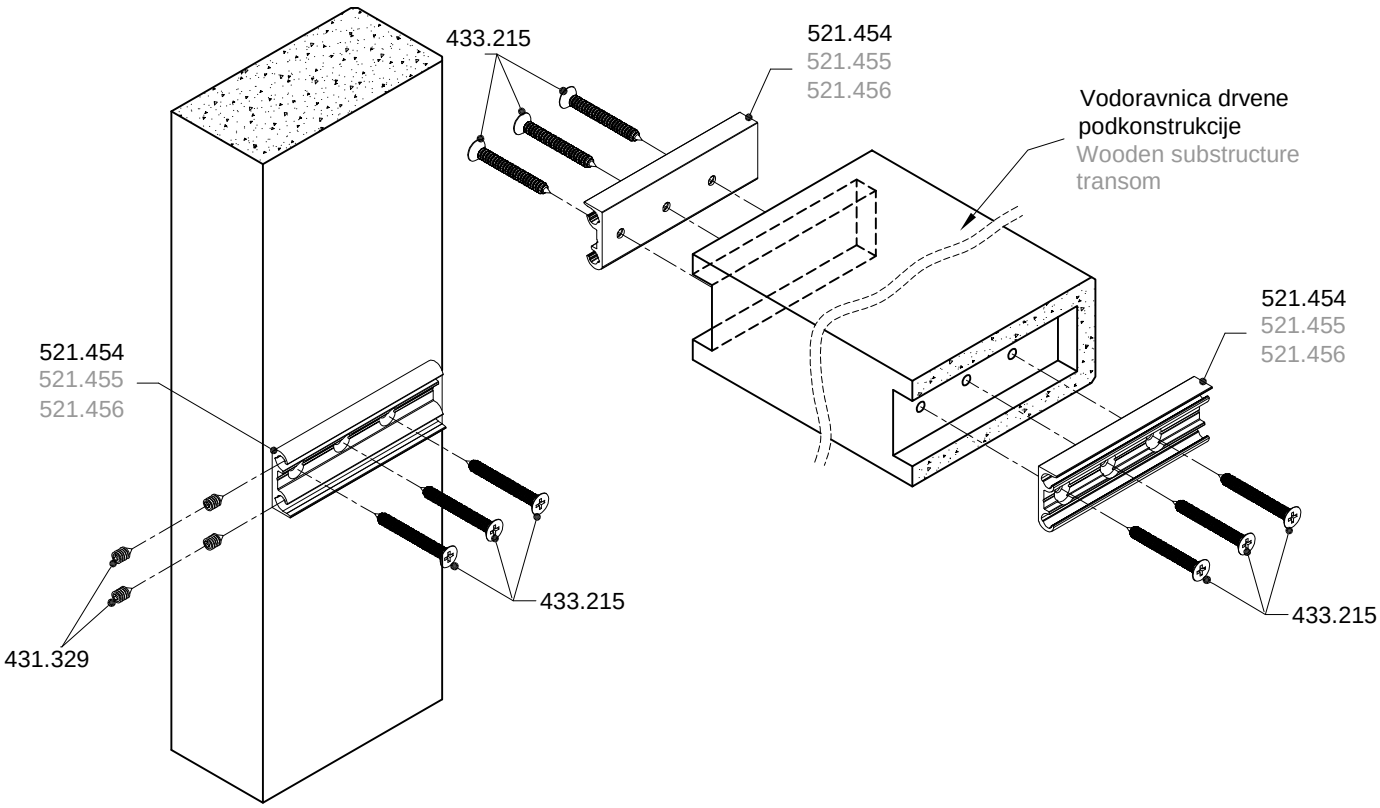


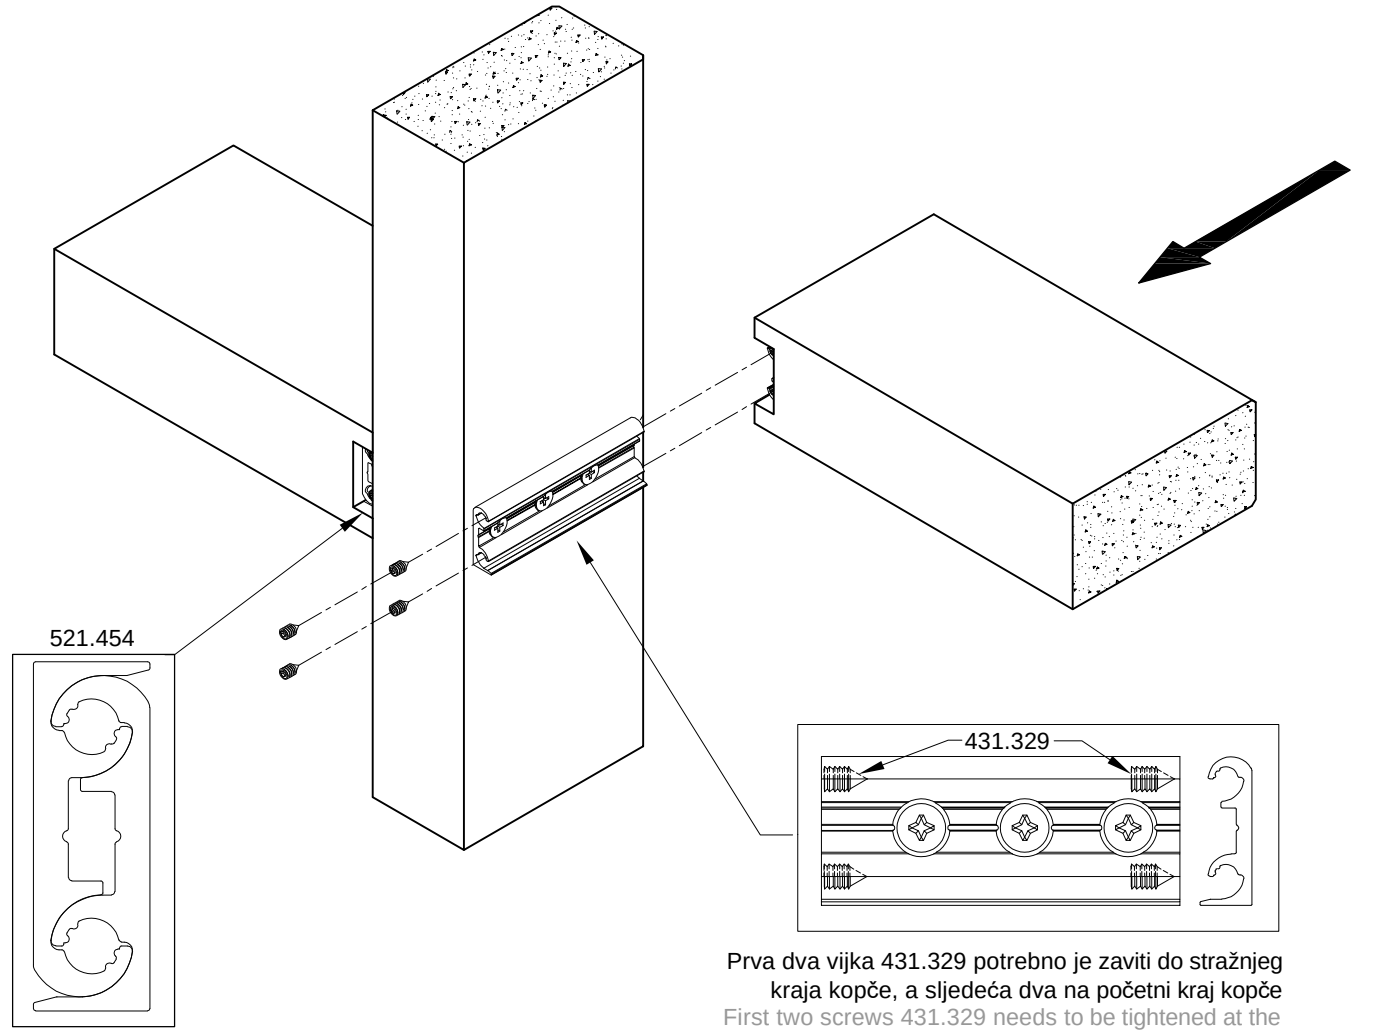



Prva dva vijka 431.329 potrebno je zaviti do stražnjeg kraja kopče, a sljedeća dva na početni kraj kopče
First two screws 431.329 needs to be tightened at the end of the clamp length and the other two at the beginning

- Obrada drvene okomice za spoj s drvenim vodoravnicama
- Wooden mullion processing for connection with wooden transoms


PRESJEK A-A
CROSS SECTION A-A

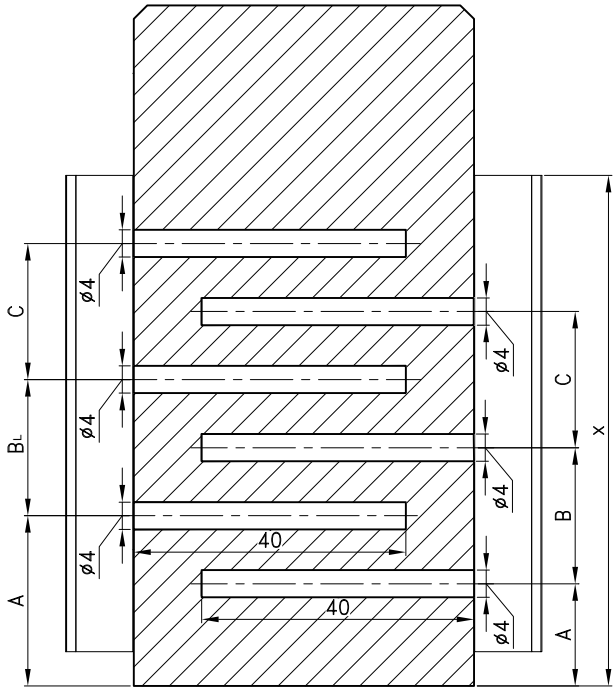

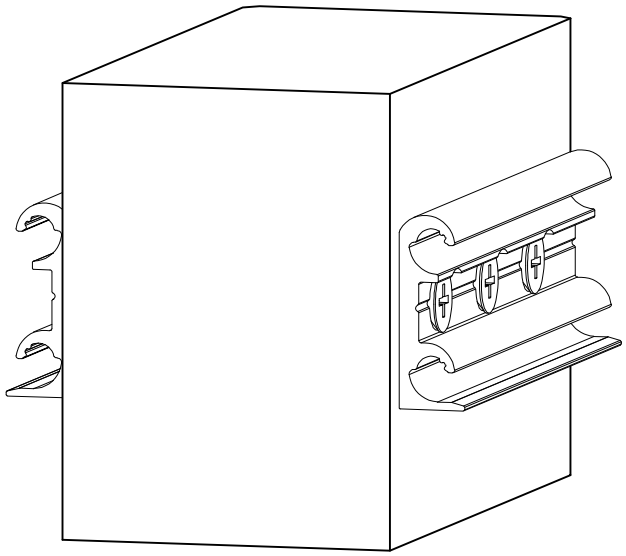

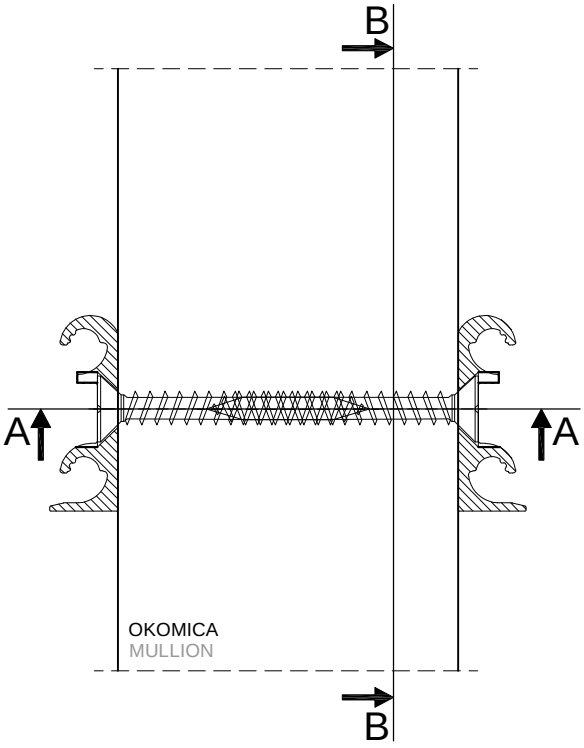


PRESJEK B-B
CROSS SECTION A-A

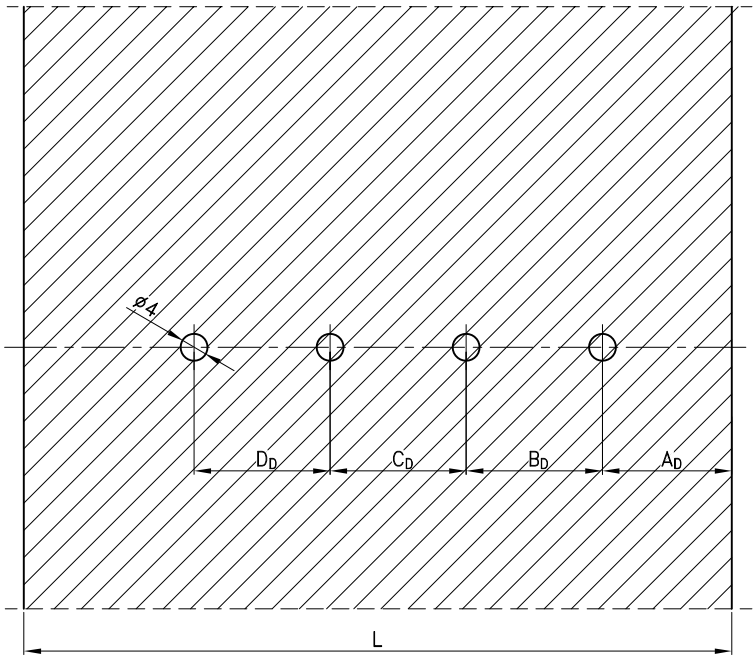


Oznaka Code	L (mm)	x (mm)	A_L(mm)	B_L(mm)	C_L(mm)	D_L(mm)	A_D(mm)	B_D(mm)	C_D(mm)	D_D(mm)
521.454	100	75	25	20	20	-	15	20	20	-
521.455	120	95	25	30	30	-	15	30	30	-
521.456	160	135	25	35	35	35	15	35	35	35


- Obrada drvene vodoravnice za spoj s drvenom okomicom
- Wooden transom processing for connection with wooden mullion

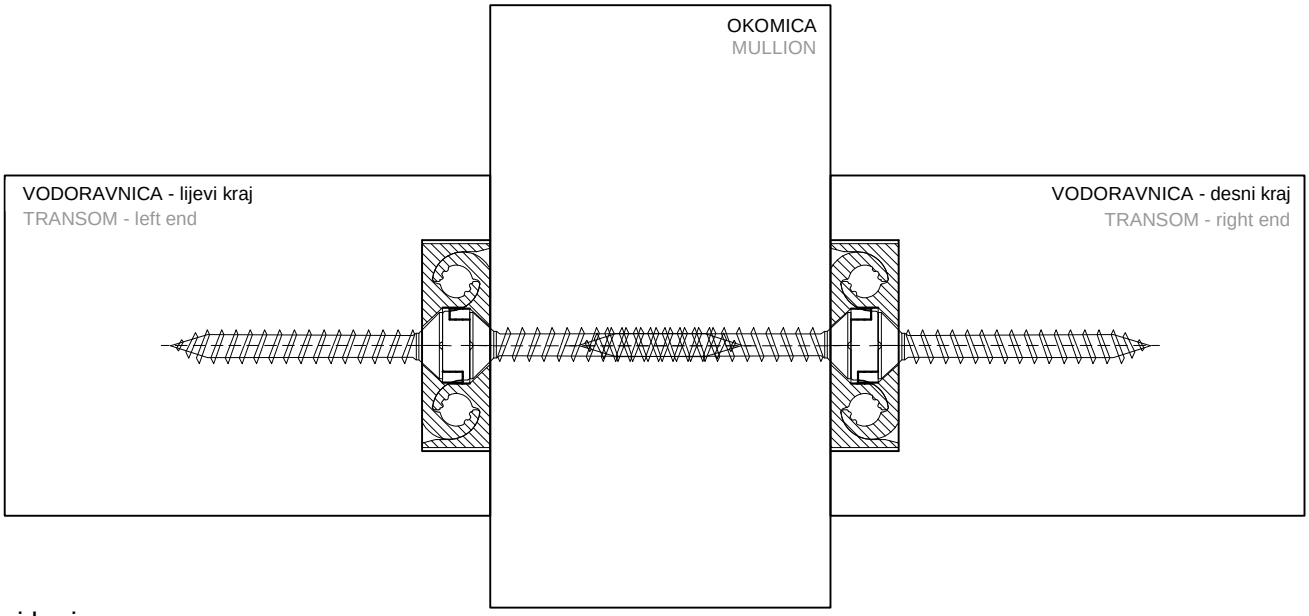

Lijevi kraj
Left end

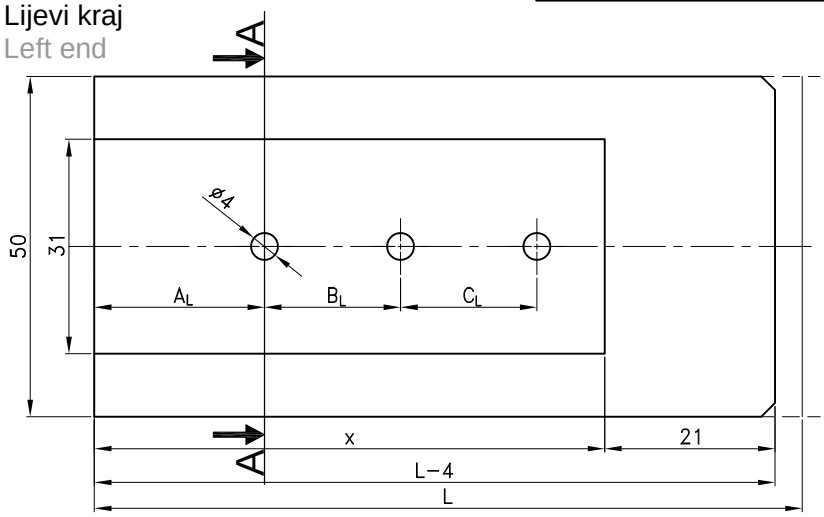


PRESJEK A-A
CROSS SECTION A-A

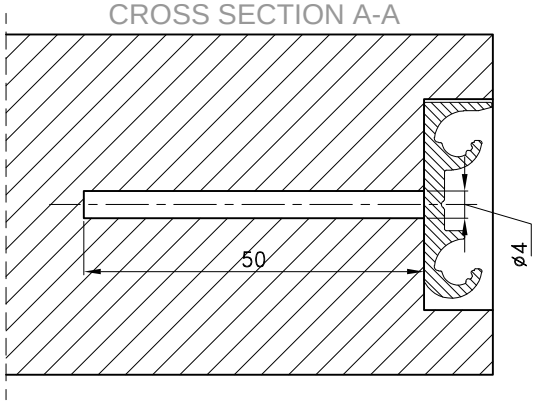


Desni kraj
Right end

PRESJEK B-B
CROSS SECTION A-A

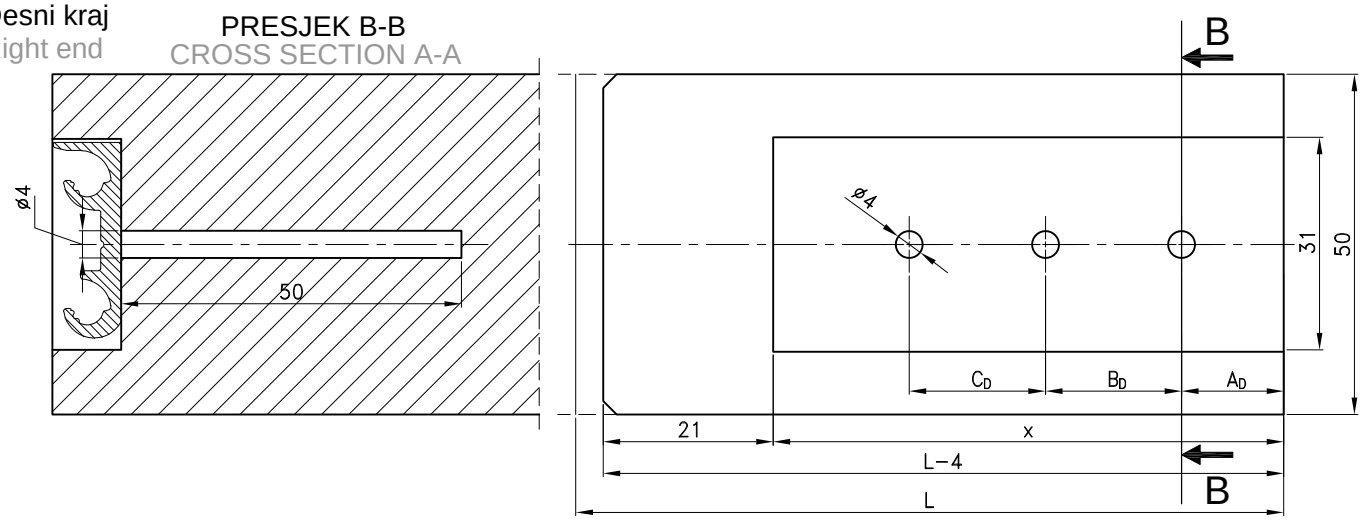



Oznaka Code	L (mm)	x (mm)	A_L(mm)	B_L(mm)	C_L(mm)	D_L(mm)	A_D(mm)	B_D(mm)	C_D(mm)	D_D(mm)
521.454	100	75	25	20	20	-	15	20	20	-
521.455	120	95	25	30	30	-	15	30	30	-
521.456	160	135	25	35	35	35	15	35	35	35


- Obrada aluminijskog profila F-1814 za spoj s drvenom podkonstrukcijom
- Aluminum profile F-1814 processing for connection with wooden substructure

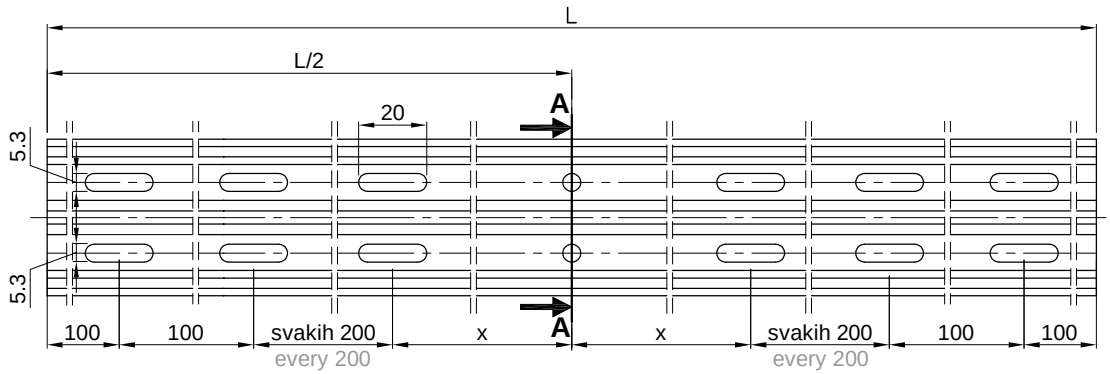

PRESJEK A-A
CROSS SECTION A-A




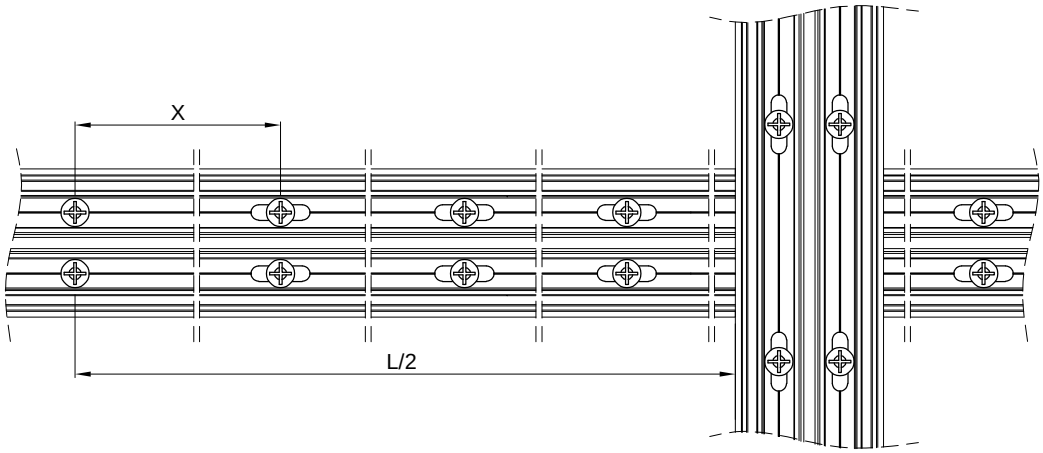

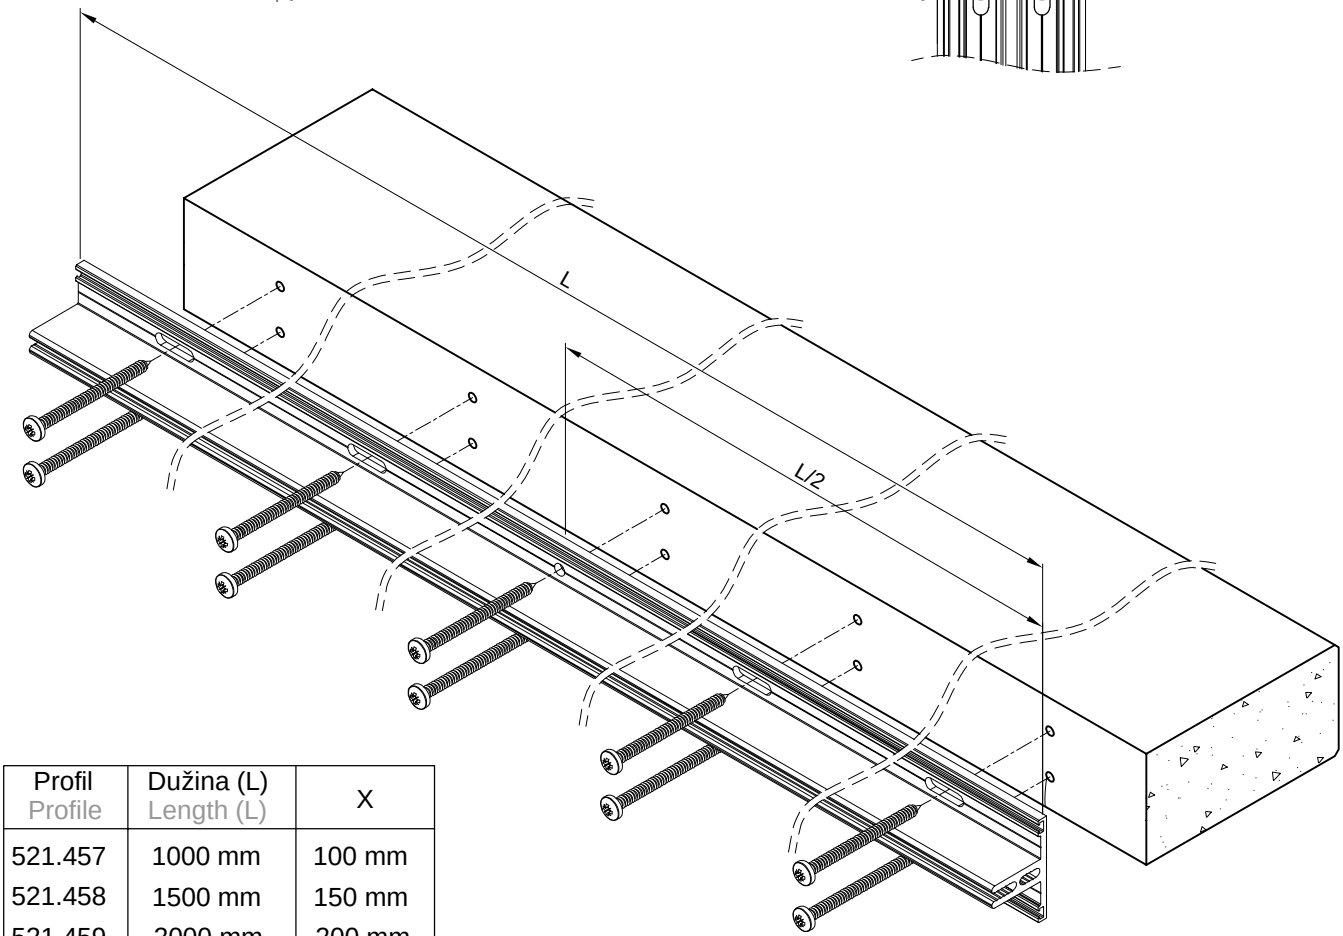


Profil Profile	Dužina (L) Length (L)	X
521.457	1000 mm	100 mm
521.458	1500 mm	150 mm
521.459	2000 mm	200 mm
521.461	3000 mm	100 mm

- Umetanje spojnice 521.397
- Inserting connector 521.397

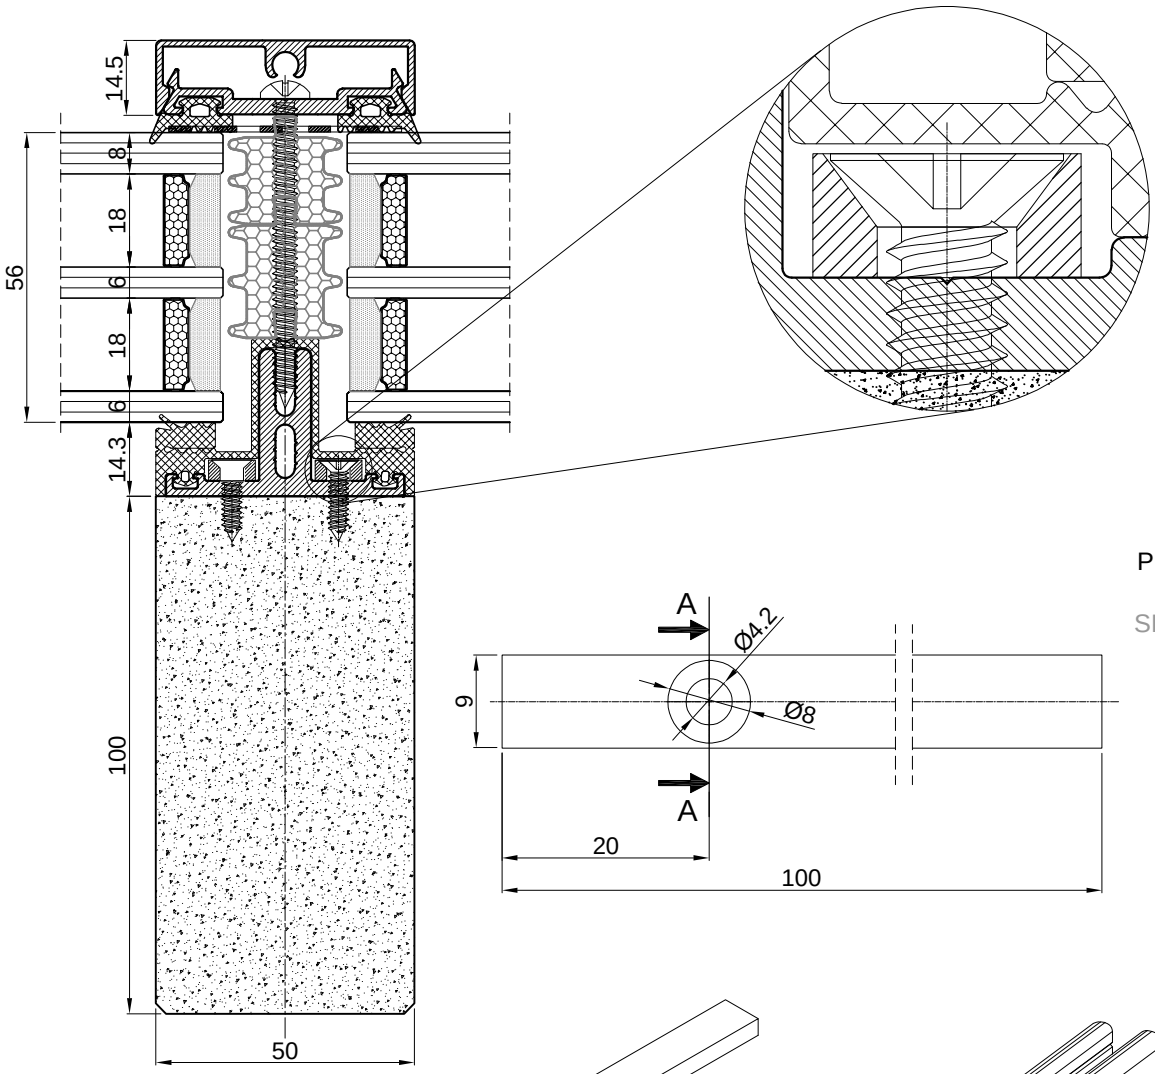


PRESJEK A-A
CROSS SECTION A-A

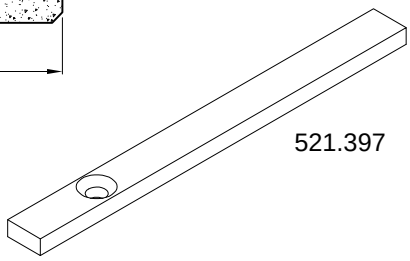

Spojnicu 521.397 potrebno je staviti na prekidu između dvije kontinuirane okomice/vodoravnice.
The slider connector 521.397 must be installed in between two continious mullions/transoms.


- Obrada držača stakla 521.452
- Glass holder processing 521.452

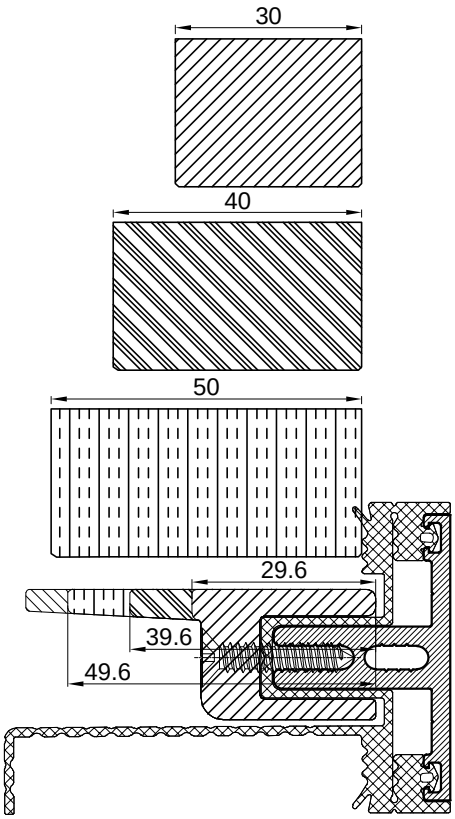


Primjeri dimenzija nosača stakla:
Dimension examples of glass support:


Dimenzije stakla Glass dimensions	Min. dim. nosača Min. support dim.
L	D_{min} = 2,3 + L - (d/3)
56 (max dim.)	56,4
50 (vanjsko 8mm)	49,6
40 (vanjsko 8mm)	39,6
30 (vanjsko 8mm)	29,6

Nosač stakla smije biti kraći od širine stakla za maximalno 1/3 ukupne dimenzije vanjskog stakla (d).
The glass holder can be shorter of glass by a maximum of 1/3 of the total dimension of the outer glass thickness (d).

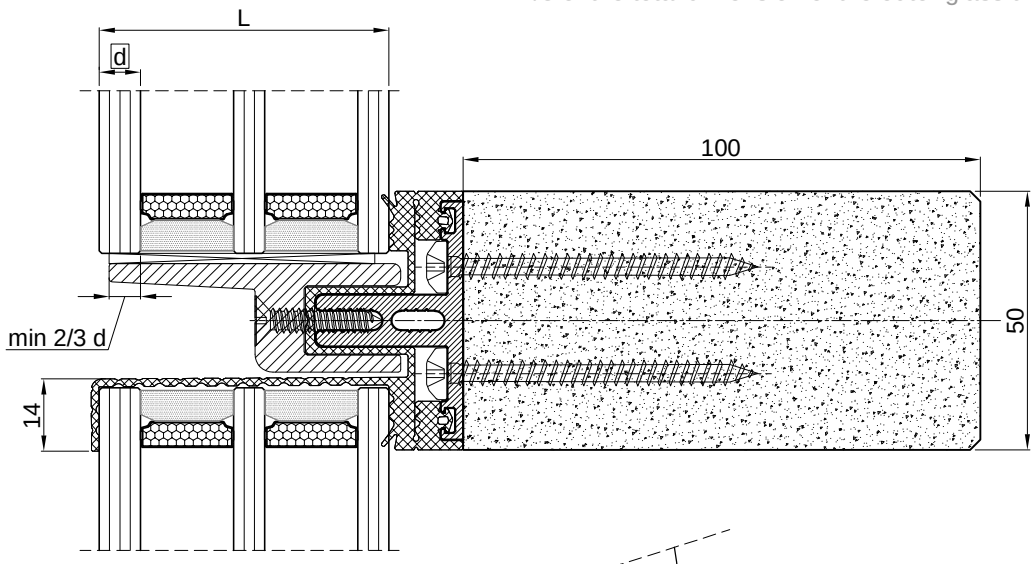


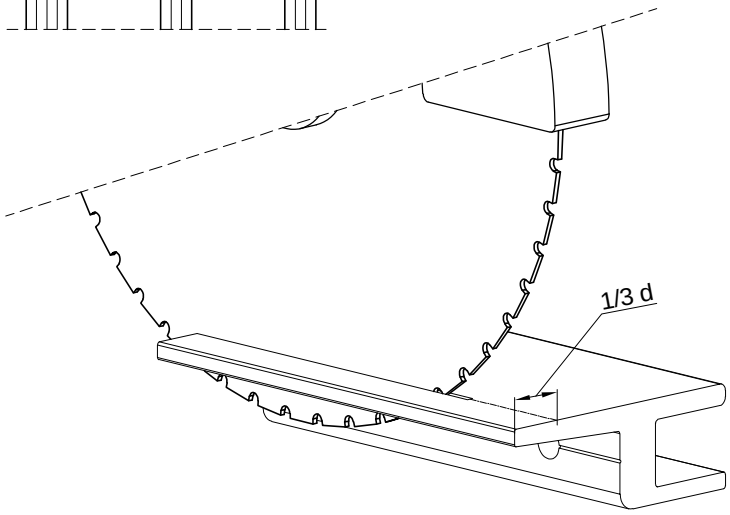


- Pozicija držača stakla 521.452
- Glass holder position 521.452

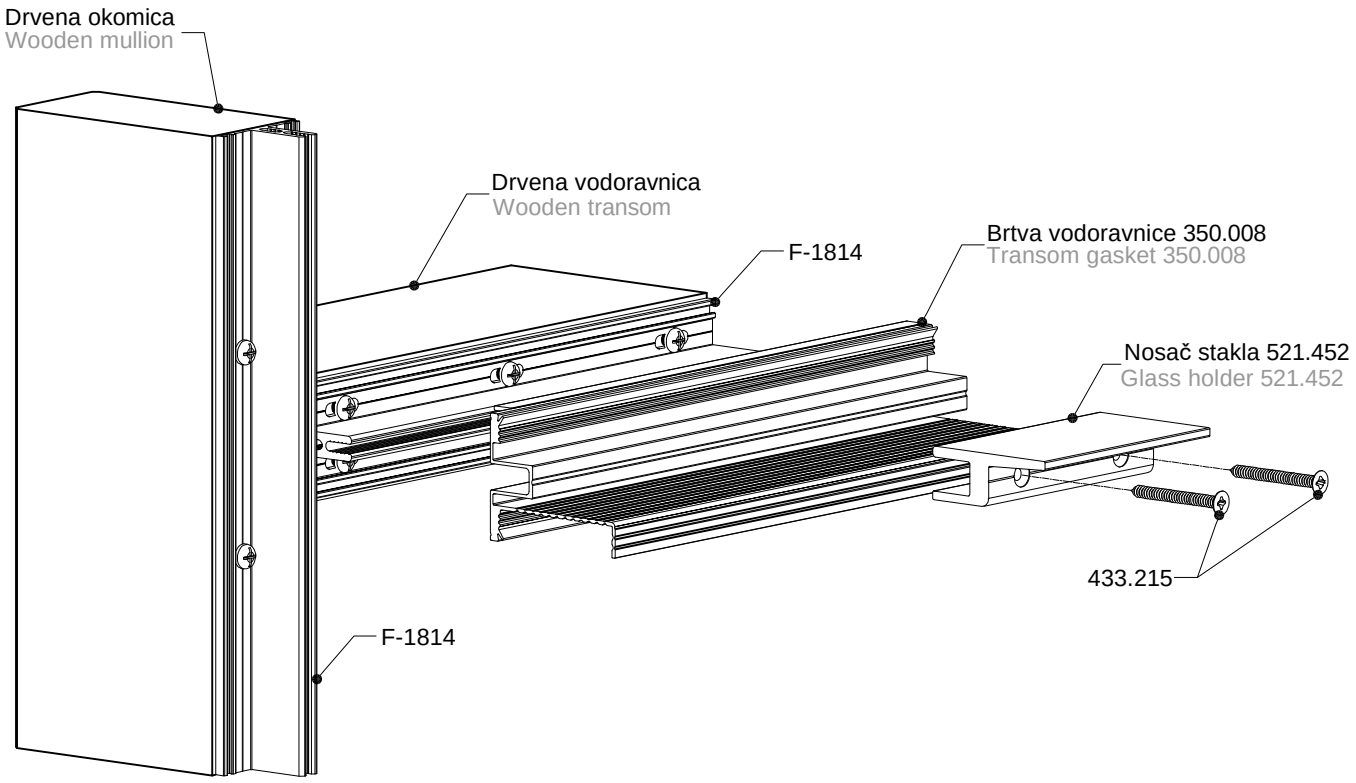


Nosač stakla potrebno je pozicionirati 100 mm od ruba vodoravnice
The glass holder must be positioned 100 mm from the transom edge

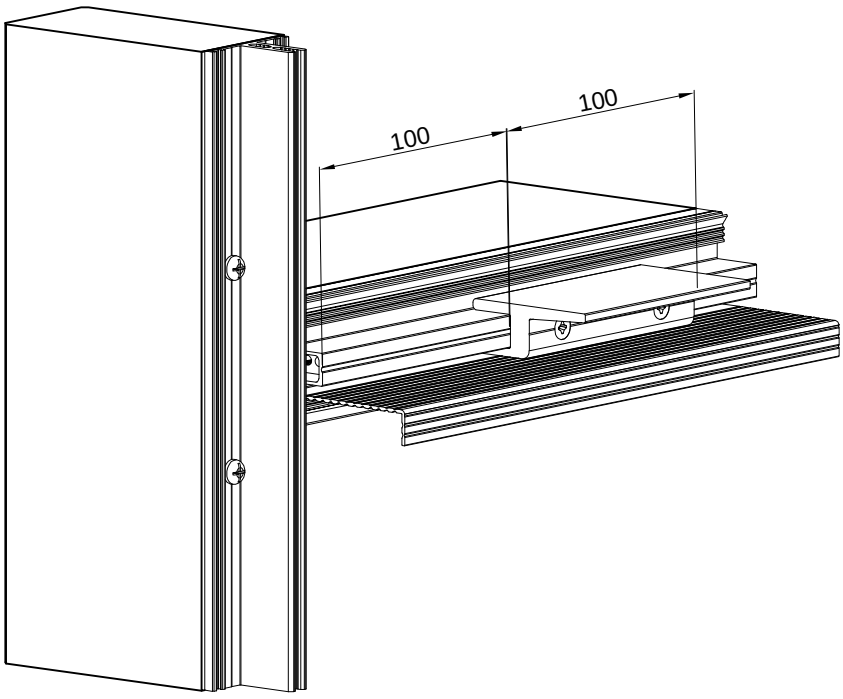


- Obrada brtvi okomice i vodoravnice - spoj okomice i vodoravnice
- Processing for gaskets of mullions and transoms - transom and mullion joint

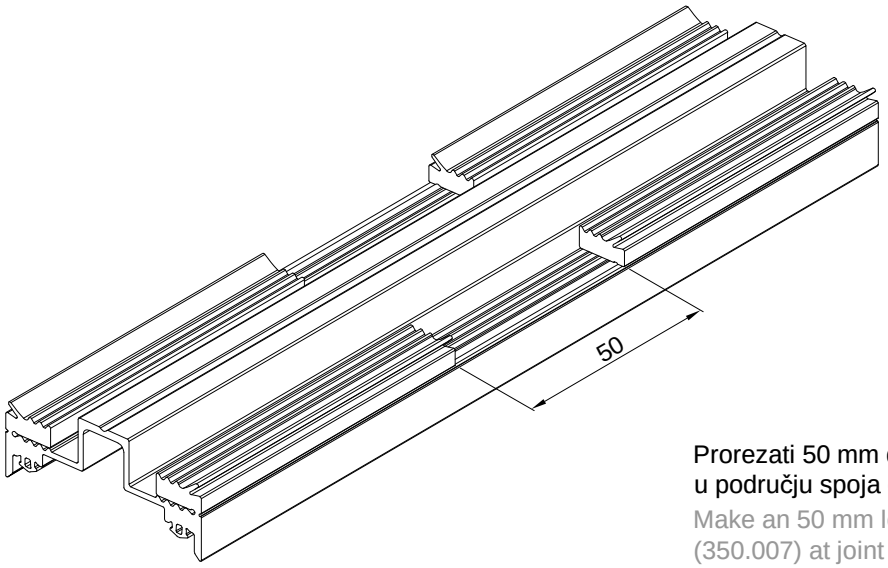



Prorezati 50 mm dužine brtvu (350.007)
u području spoja okomice i vodoravnice


Make an 50 mm long cut on the gasket edges
(350.007) at joint point of mullion and transom

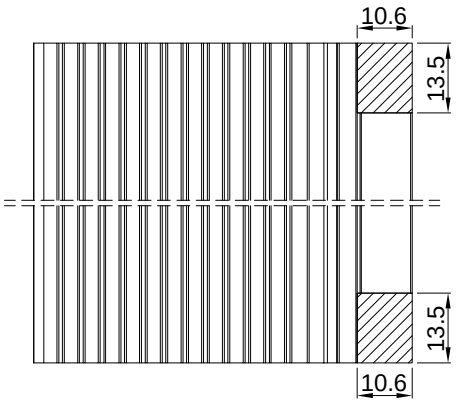


Izrezati brtvu (350.008) u području spoja
okomice i vodoravnice (13.5x11.3x10.6)

Cut the gasket (350.008) edges at joint point
of mullion and transom (13.5x11.3x10.6)


- Rezanje brtve na vodoravnici u ovisnosti o debljini stakla
- Cuting of an gaskets on transom depending on glass thickness

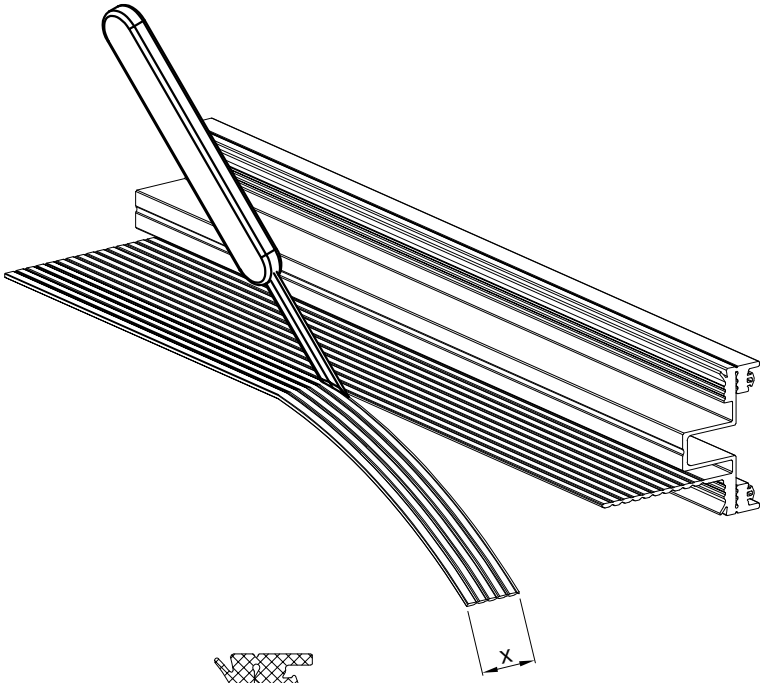


1.)

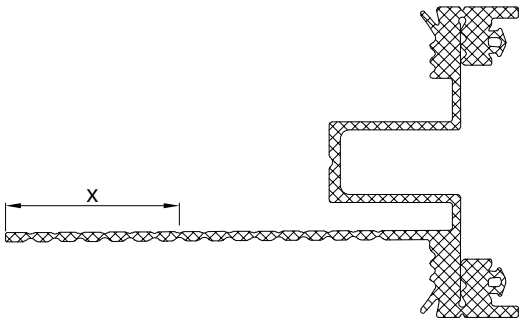

2.)

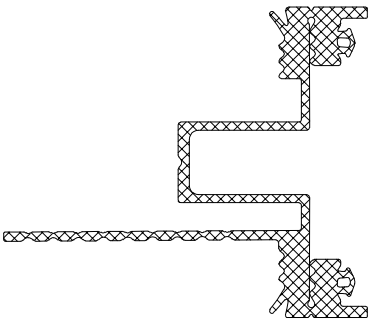


3.)

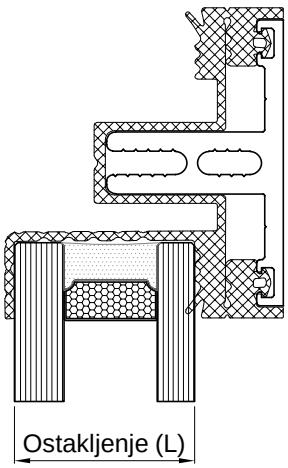


Debljina stakla (L) Glass thickness (L)	Dimenzija rezanja (x) Cutting dimension (x)
52-56	4
48-52	8
44-48	12
40-44	16
36-40	20
32-36	24
28-32	28
26-28	32
L_{max} = 56 mm L_{min} = 26 mm	

- Spajanje brtvi okomice i vodoravnice
- Mullion and transom gasket joint

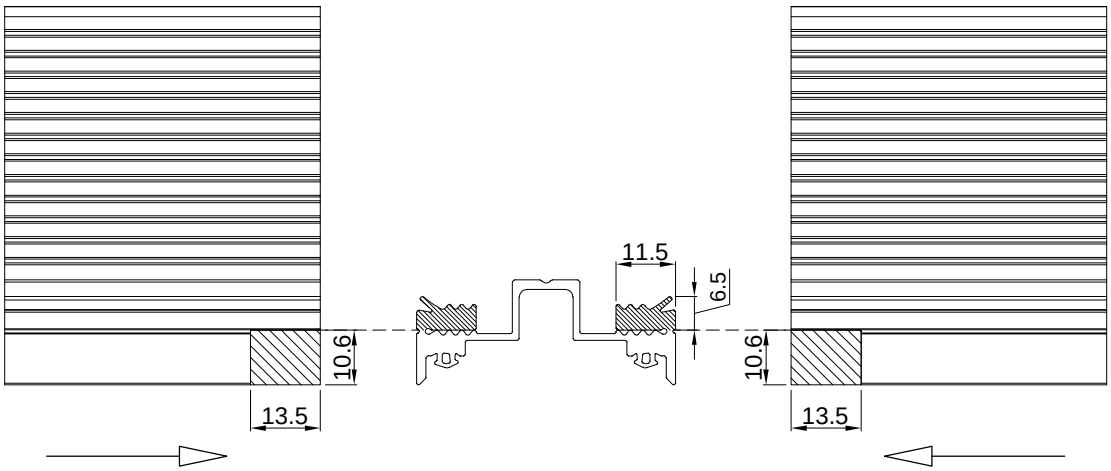


1.) Nanošenje ljepila na brtvu vodoravnice
(tipa DOWSIL 300 Adhesive)
Applying structural sealant
(e.g. DOWSIL 300 Adhesive)

2.) Zapuniti strukturalni silikon
na mjesto spoja brtvi
(tipa DOWSIL 993)
Applying structural sealant
(e.g. DOWSIL 993)

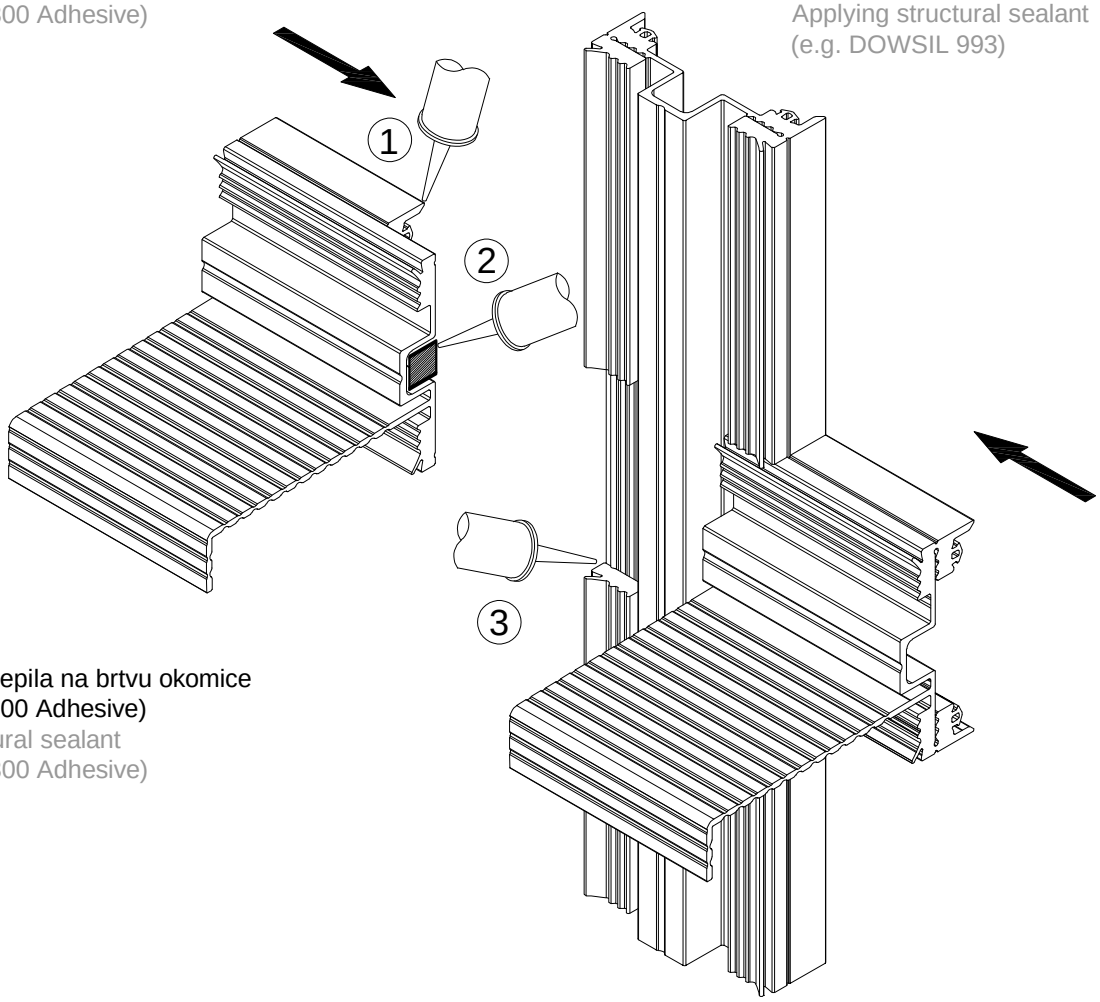


3.) Nanošenje ljepila na brtvu okomice
(tipa DOWSIL 300 Adhesive)
Applying structural sealant
(e.g. DOWSIL 300 Adhesive)

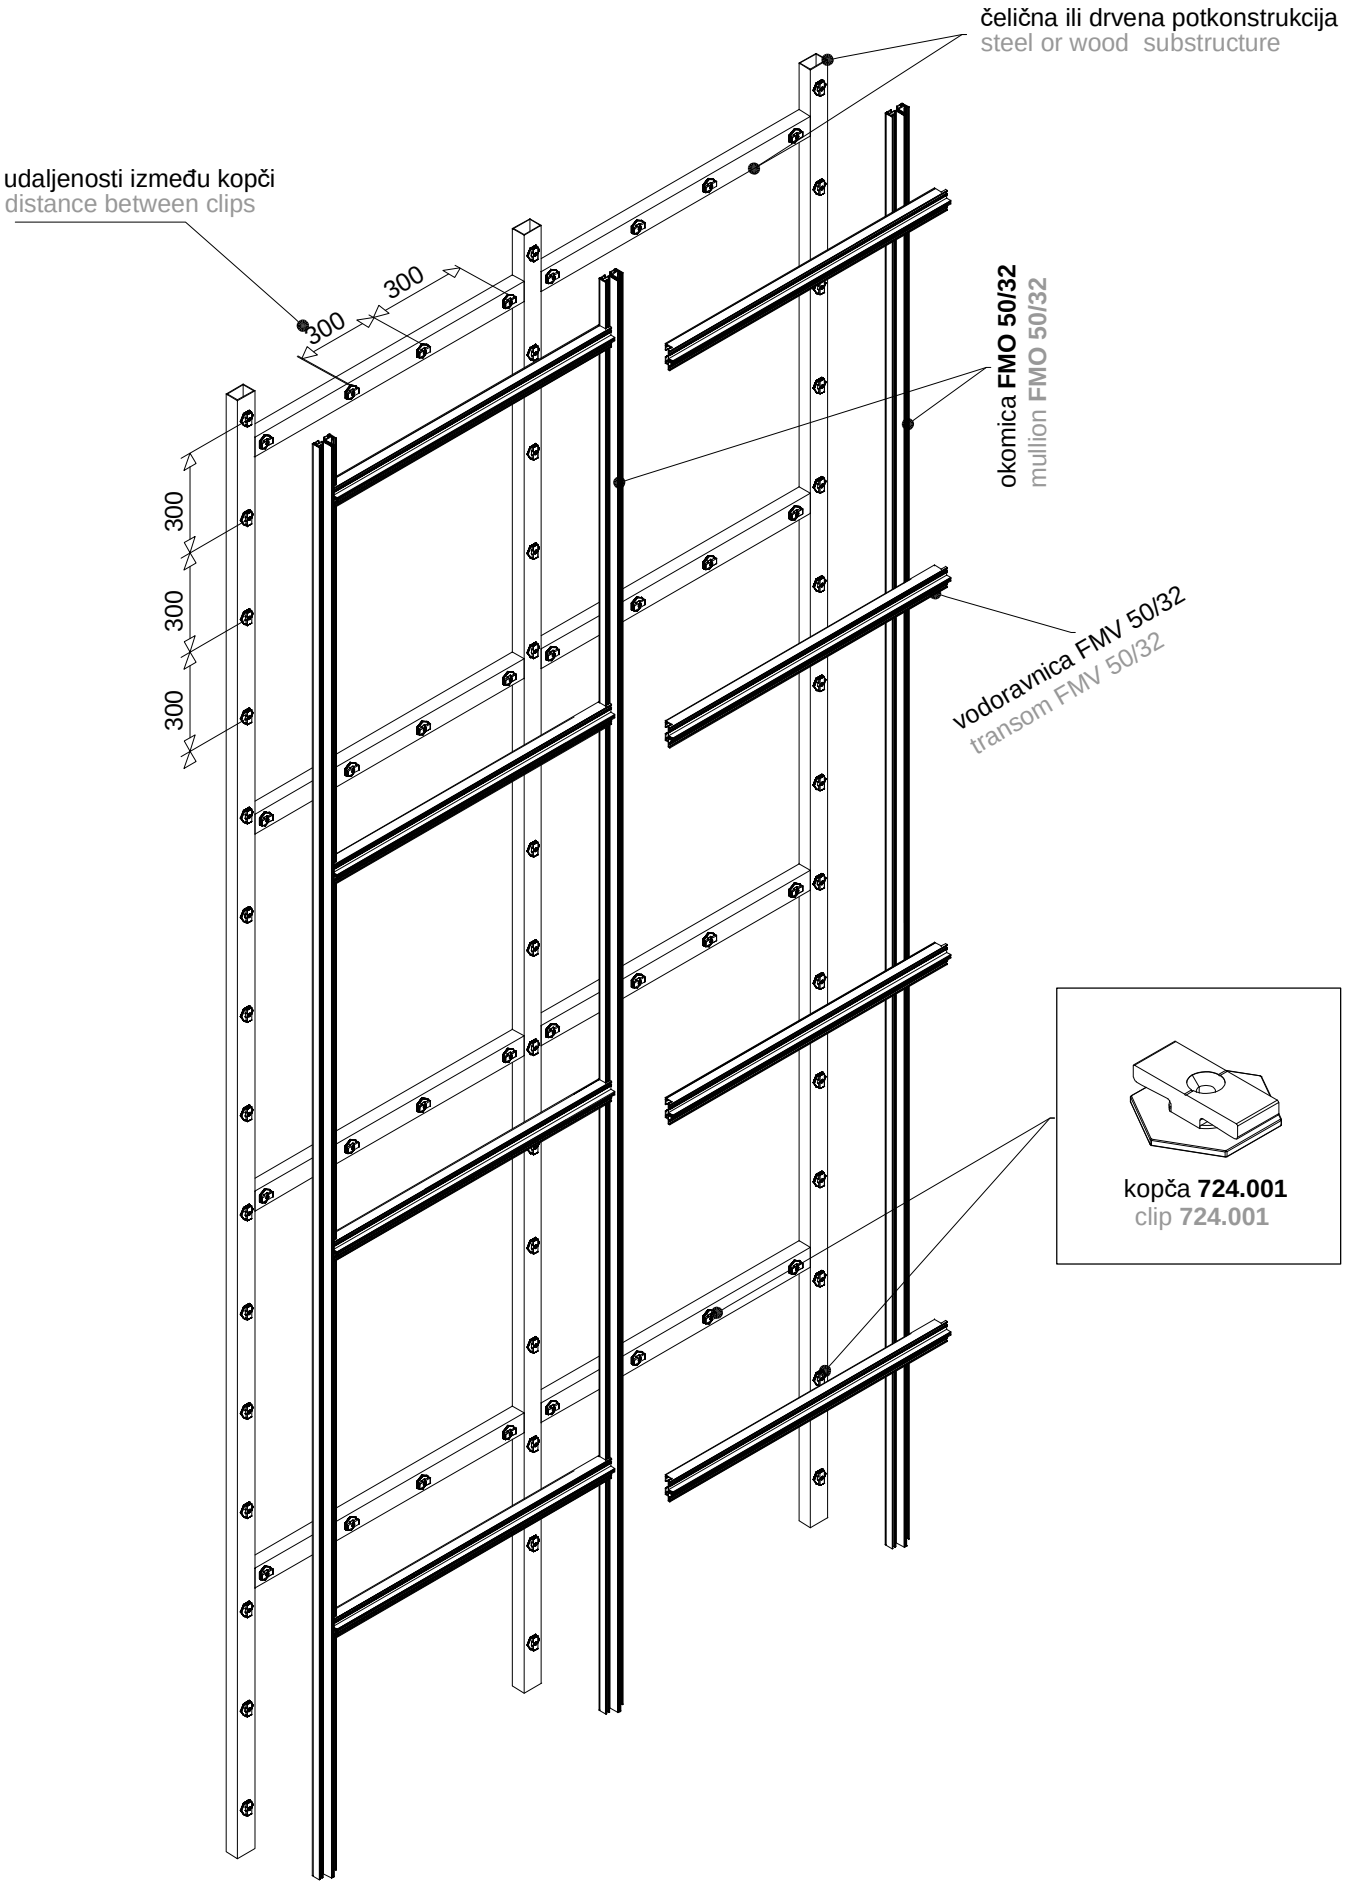
čelična ili drvena potkonstrukcija
steel or wood substructure
udaljenosti između kopči
distance between clips
300
300
300
300
300
okomica FMO 50/32
mullion FMO 50/32
vodoravnica FMV 50/32
transom FMV 50/32
kopča 724.001
clip 724.001

① Raspoređivanje i pričvršćivanje kopči **724.001** na čeličnu ili drvenu potkonstrukciju u otvoreni položaj

Arrangement and fastening clips **724.001** on steel or wood substructure into open position

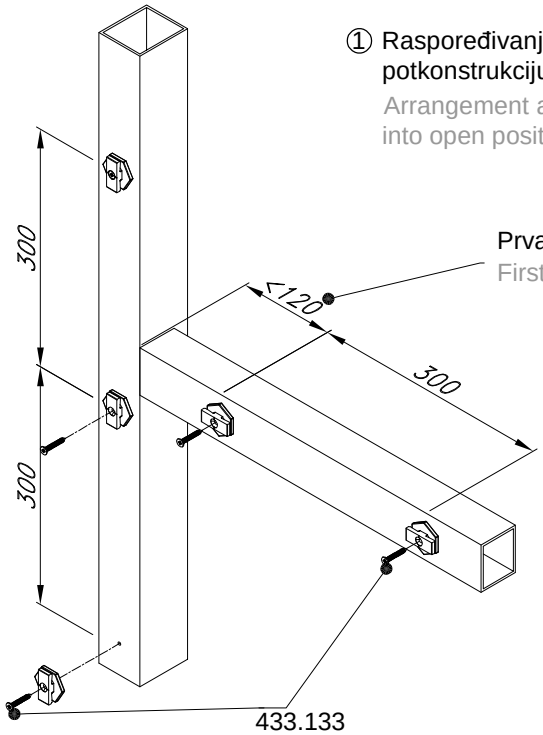


Prva kopča do okomice, maksimalno 120 mm

First clip to the mullion, max 120 mm


② Nanošenje vertikalnice FMO 50/32 i vodoravnice FMV 50/32

Placing of mullion FMO 50/32 and transom FMV 50/32

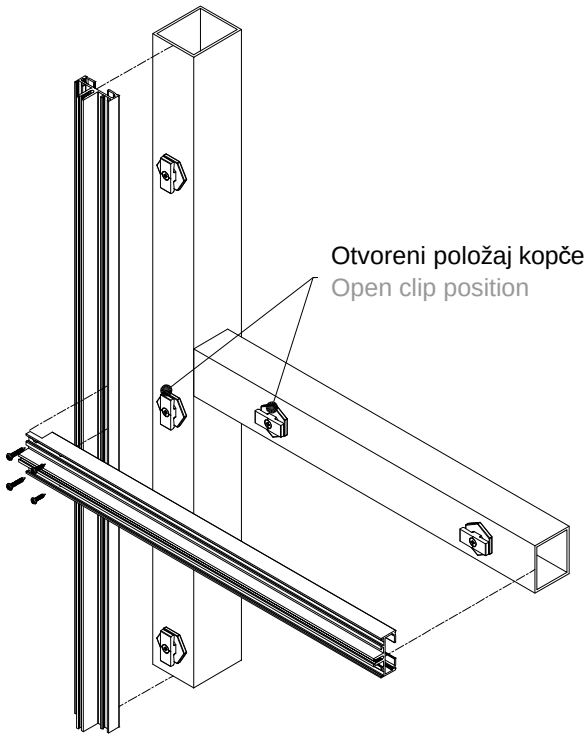


Otvoreni položaj kopče

Open clip position

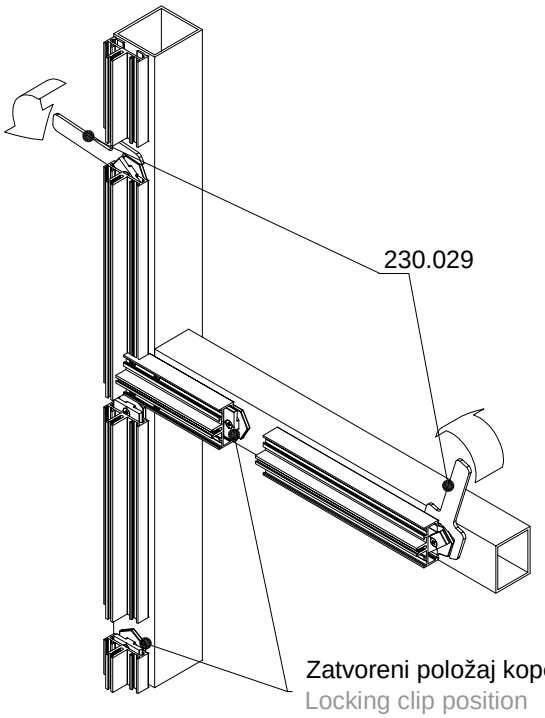

③ Rotiranje kopči alatom u zatvoreni položaj


Rotating clips with tool into locking position





Zatvoreni položaj kopče

Locking clip position

- Obrada okomice **FMO 50/200** za vodoravnicu **FMV 50/198 ili manju** (gumeni odstojnik sa obrubom)
- Processing of mullion FMO 50/200 for transom FMV 50/198 or smaller (rimmed dilatation rubber)

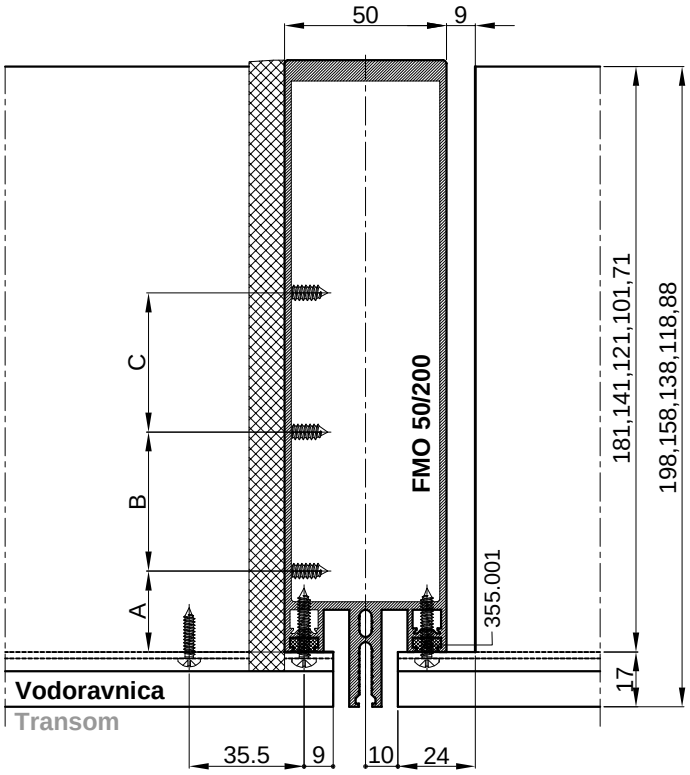


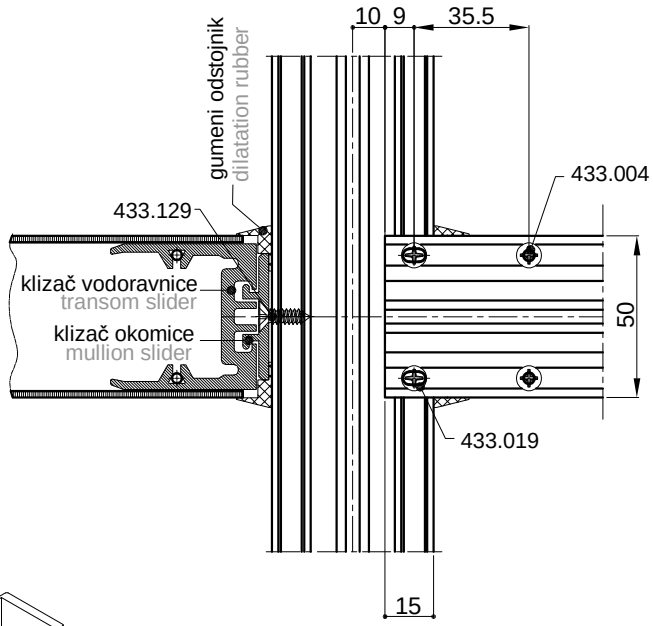


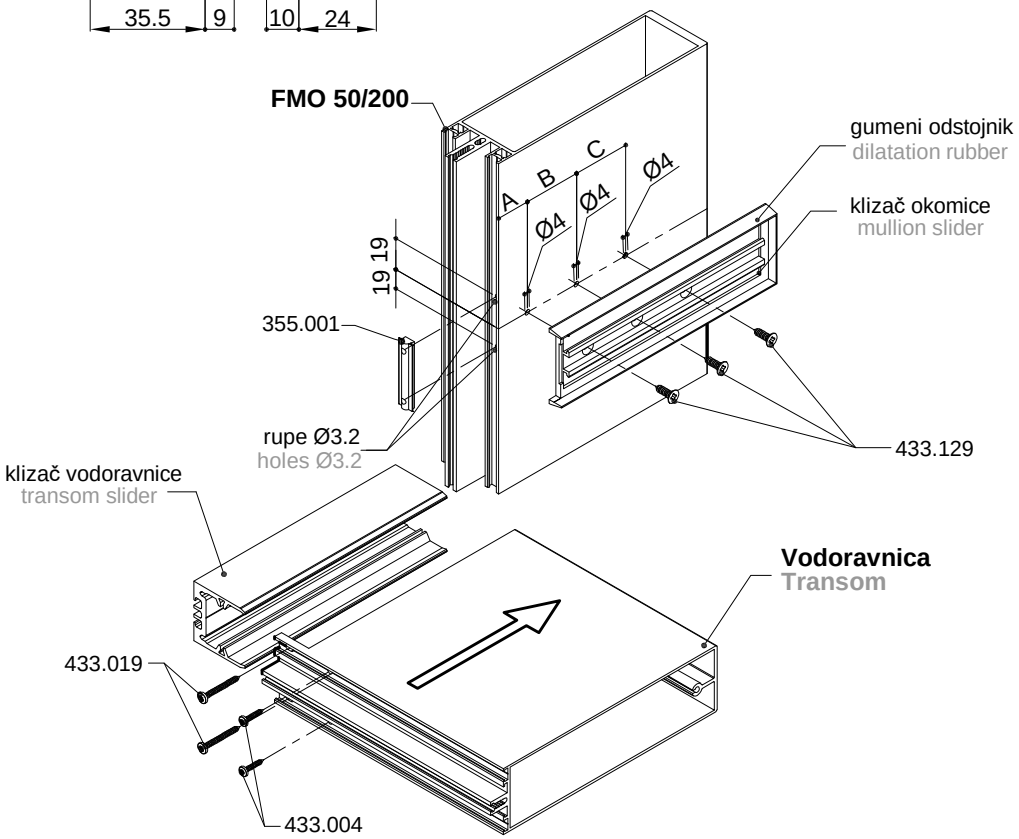


Vodoravnica Transom	Klizač okomice Mullion slider	Klizač vodoravnice Transom slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Gumeni odstojnik Dilatation rubber
FMV 50/198	720.204	721.204	25 mm	43 mm	43 mm	366.007
FMV 50/158	720.203	721.203	25 mm	43 mm	43 mm	366.006
FMV 50/138	720.208	721.217	25 mm	40 mm	40 mm	366.011
FMV 50/118	720.202	721.202	25 mm	44 mm	-	365.033
FMV 50/88	720.201	721.201	25 mm	30 mm	-	366.005

- Obrada okomice **FMO 50/200-S** za vodoravnicu **FMV 50/198 ili manju** (gumeni odstojnik sa obrubom)
- Processing of mullion FMO 50/200-S for transom FMV 50/198 or smaller (rimmed dilatation rubber)

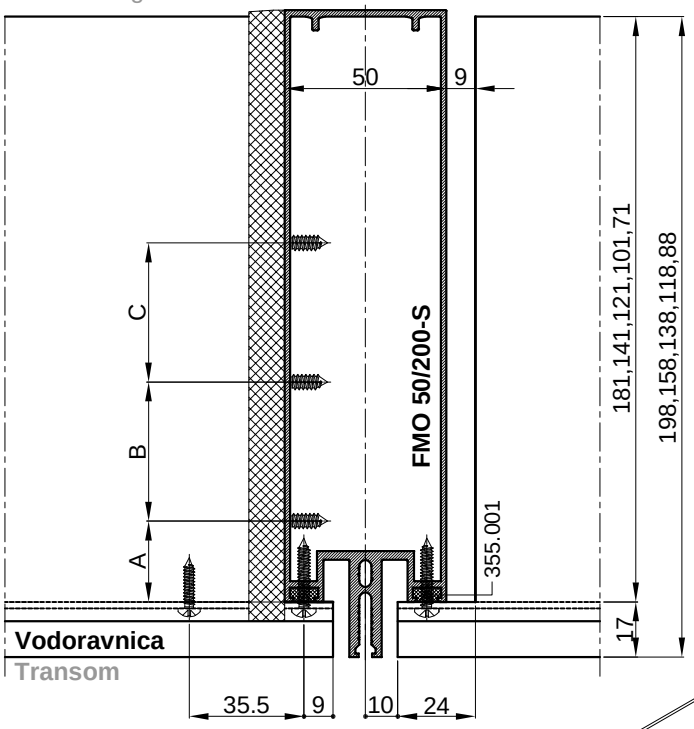


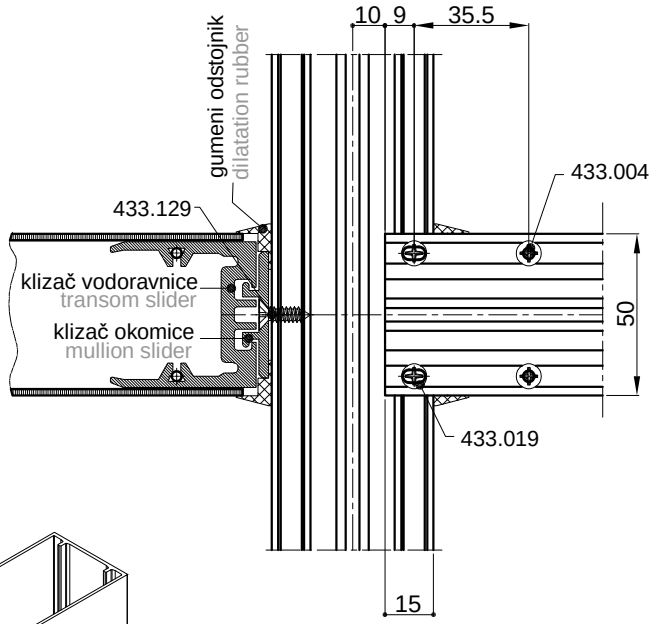


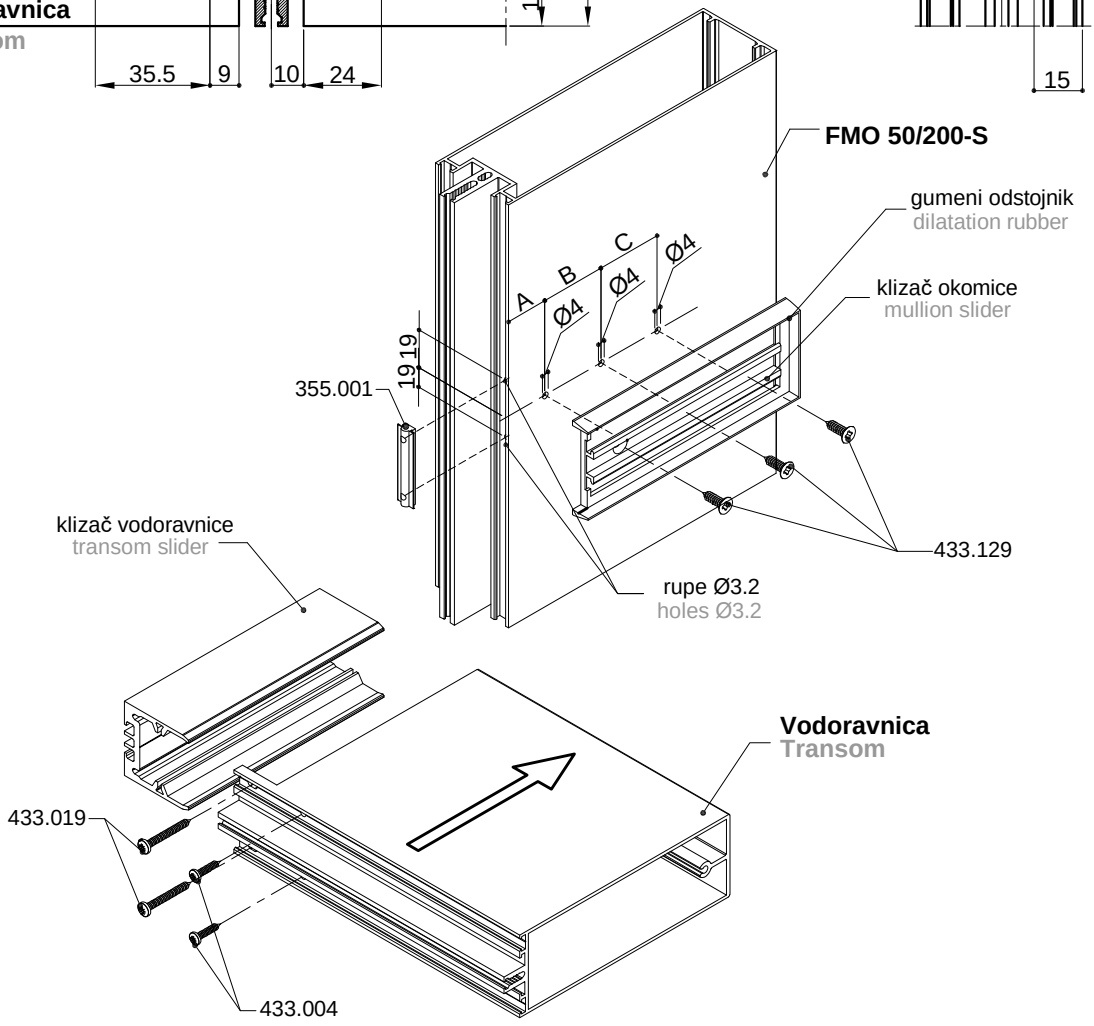



Vodoravnica Transom	Klizač okomice Mullion slider	Klizač vodoravnice Transom slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Gumeni odstojnik Dilatation rubber
FMV 50/158	720.203	721.203	25 mm	43 mm	43 mm	366.006
FMV 50/138	720.208	721.217	25 mm	40 mm	40 mm	366.011
FMV 50/118	720.202	721.202	25 mm	44 mm	-	365.033
FMV 50/88	720.201	721.201	25 mm	30 mm	-	366.005

- Obrada okomice **FMO 50/160** za vodoravnicu **FMV 50/158 ili manju** (gumeni odstojnik sa obrubom)
- Processing of mullion FMO 50/160 for transom FMV 50/158 or smaller (rimmed dilatation rubber)

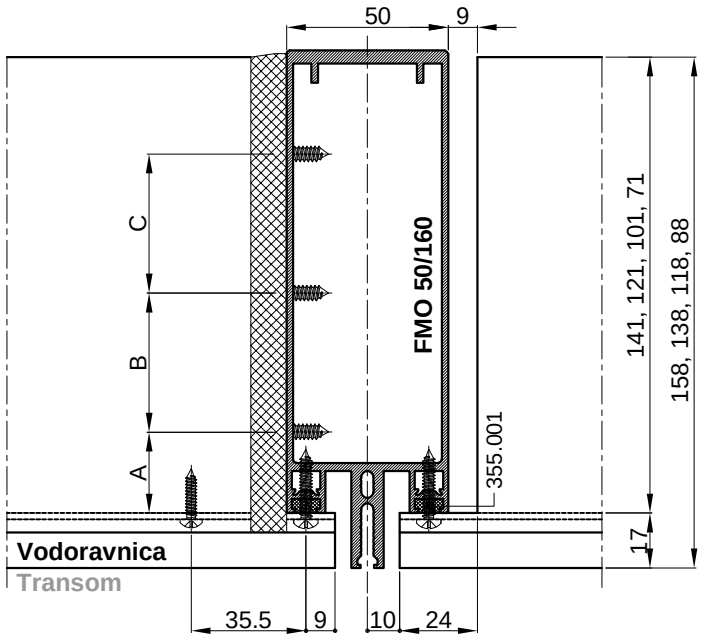

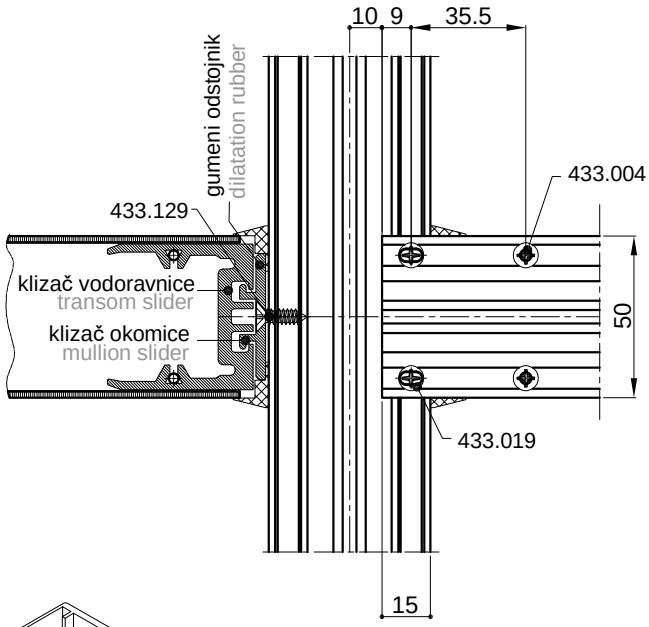


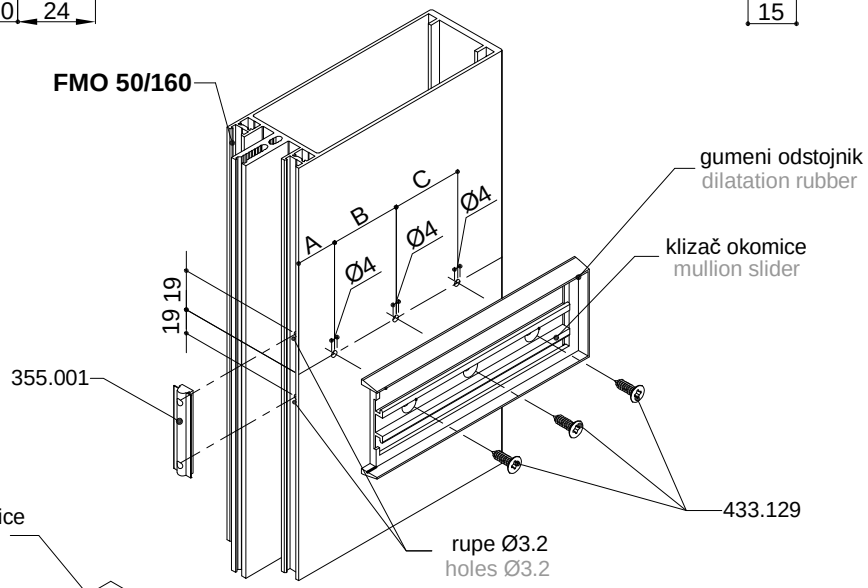


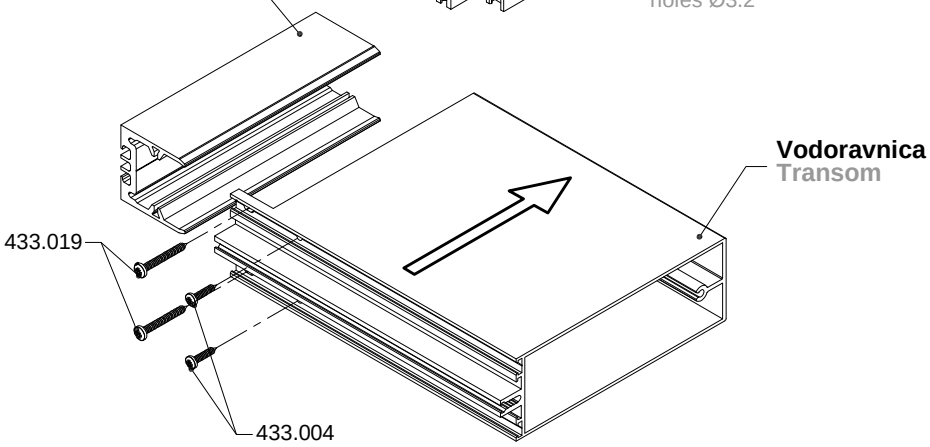



Vodoravnica Transom	Klizač okomice Mullion slider	Klizač vodoravnice Transom slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Gumeni odstojnik Dilatation rubber
FMV 50/158	720.203	721.203	25 mm	43 mm	43 mm	366.006
FMV 50/138	720.208	721.217	25 mm	40 mm	40 mm	366.011
FMV 50/118	720.202	721.202	25 mm	44 mm	-	365.033
FMV 50/88	720.201	721.201	25 mm	30 mm	-	366.005

- Obrada okomice **FMO 50/160-S** za vodoravnicu **FMV 50/158 ili manju** (gumeni odstojnik sa obrubom)
- Processing of mullion FMO 50/160-S for transom FMV 50/158 or smaller (rimmed dilatation rubber)

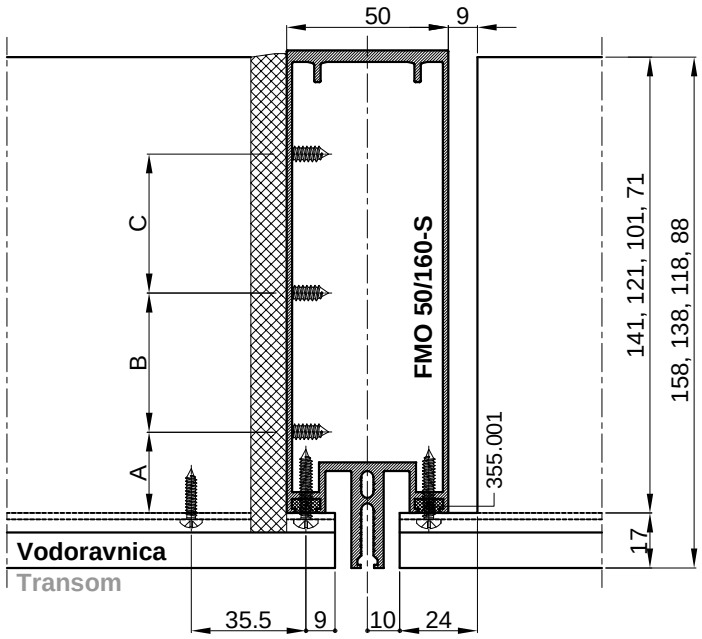

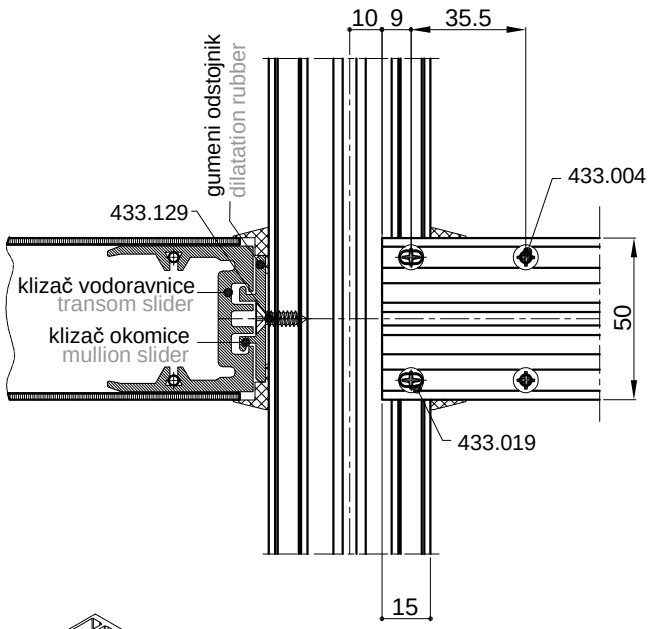


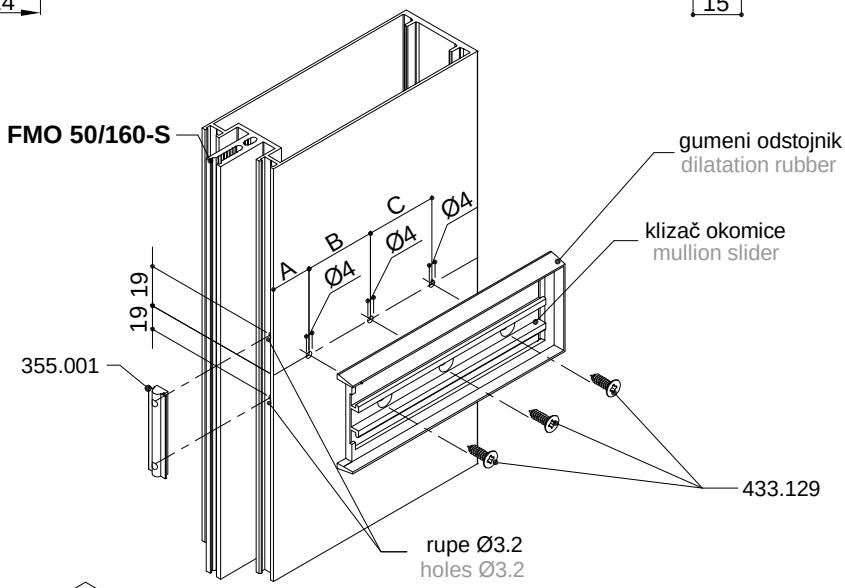


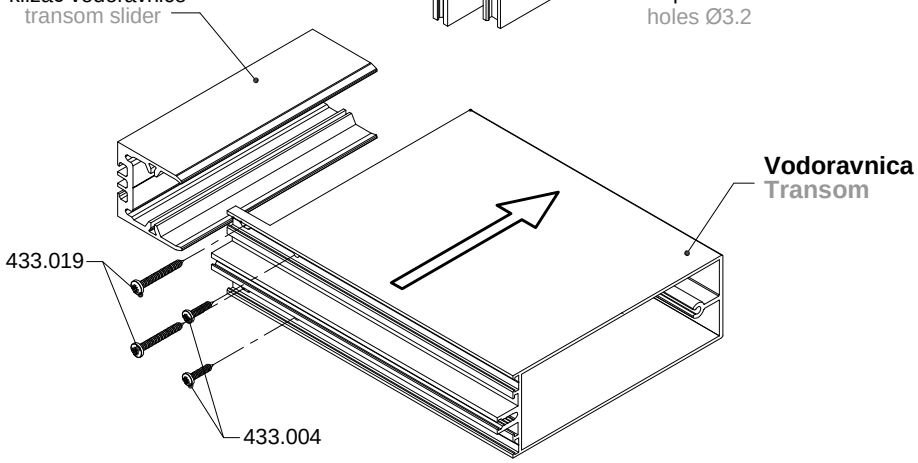


Vodoravnica Transom	Klizač okomice Mullion slider	Klizač vodoravnice Transom slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Gumeni odstojnik Dilatation rubber
FMV 50/158	720.203	721.203	25 mm	43 mm	43 mm	366.006
FMV 50/138	720.208	721.217	25 mm	40 mm	40 mm	366.011
FMV 50/118	720.202	721.202	25 mm	44 mm	-	365.033
FMV 50/88	720.201	721.201	25 mm	30 mm	-	366.005

- Obrada okomice **FMO 50/140** za vodoravnicu **FMV 50/138 ili manju** (gumeni odstojnik sa obrubom)
- Processing of mullion FMO 50/140 for transom FMV 50/138 or smaller (rimmed dilatation rubber)

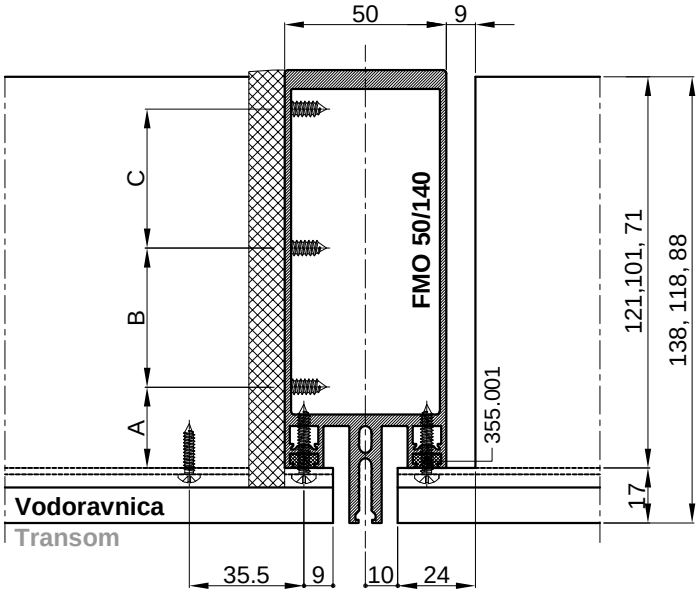


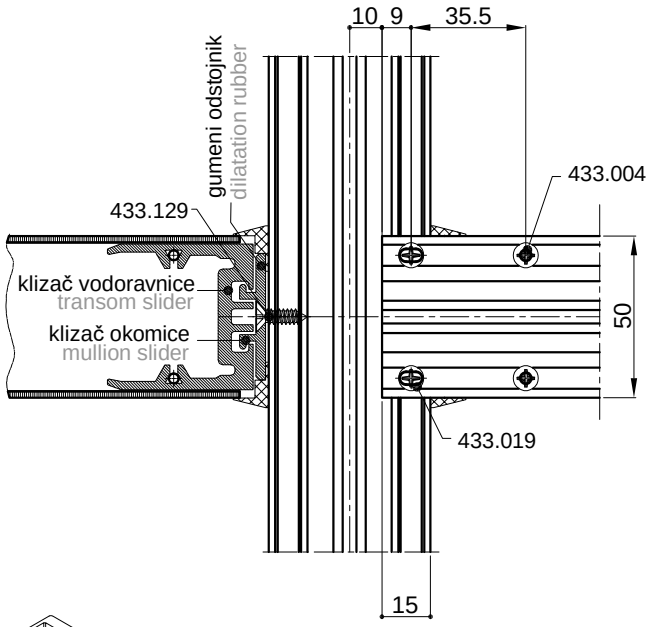


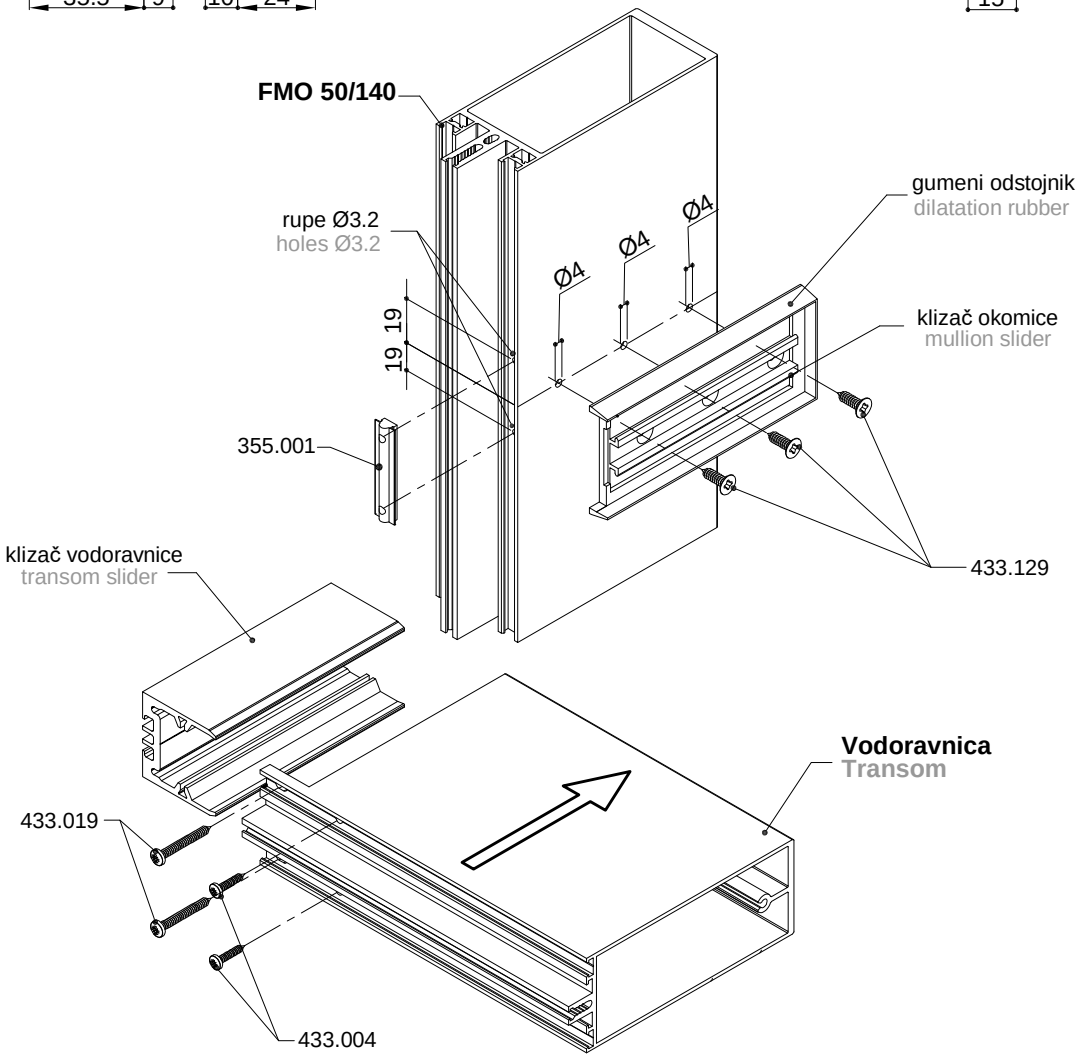


Vodoravnica Transom	Klizač okomice Mullion slider	Klizač vodoravnice Transom slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Gumeni odstojnik Dilatation rubber
FMV 50/138	720.208	721.217	25 mm	40 mm	40 mm	366.011
FMV 50/118	720.202	721.202	25 mm	44 mm	-	365.033
FMV 50/88	720.201	721.201	25 mm	30 mm	-	366.005

- Obrada okomice **FMO 50/120** za vodoravnicu **FMV 50/118 ili manju** (gumeni odstojnik sa obrubom)
- Processing of mullion FMO 50/120 for transom FMV 50/118 or smaller (rimmed dilatation rubber)

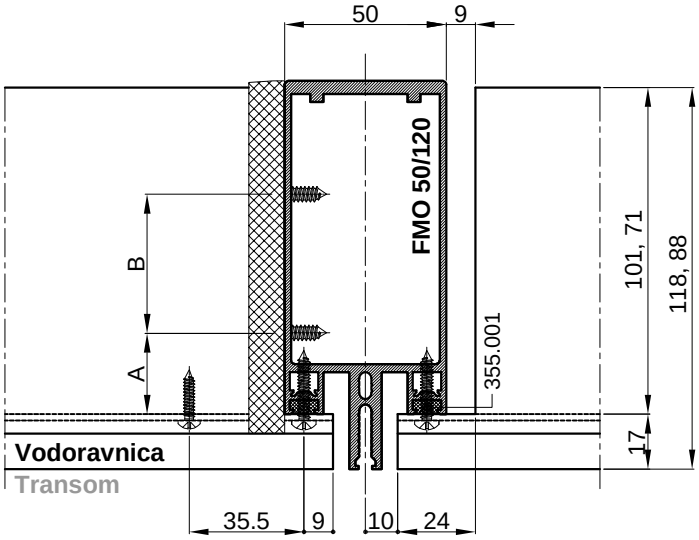


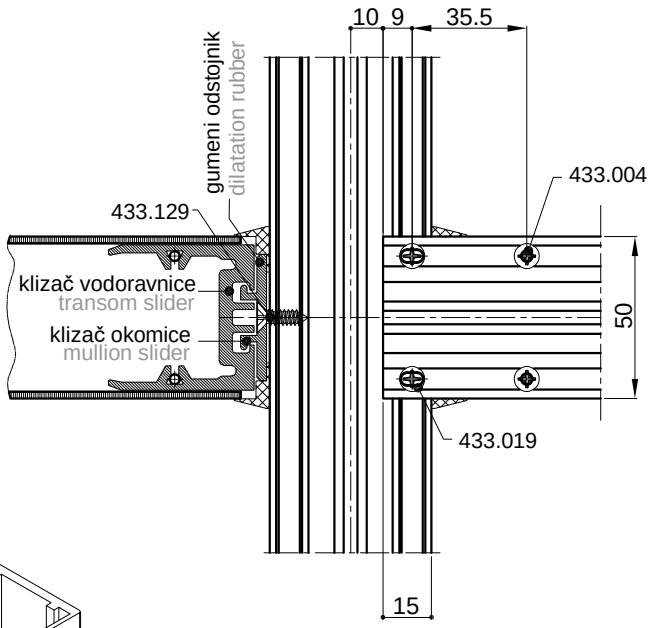


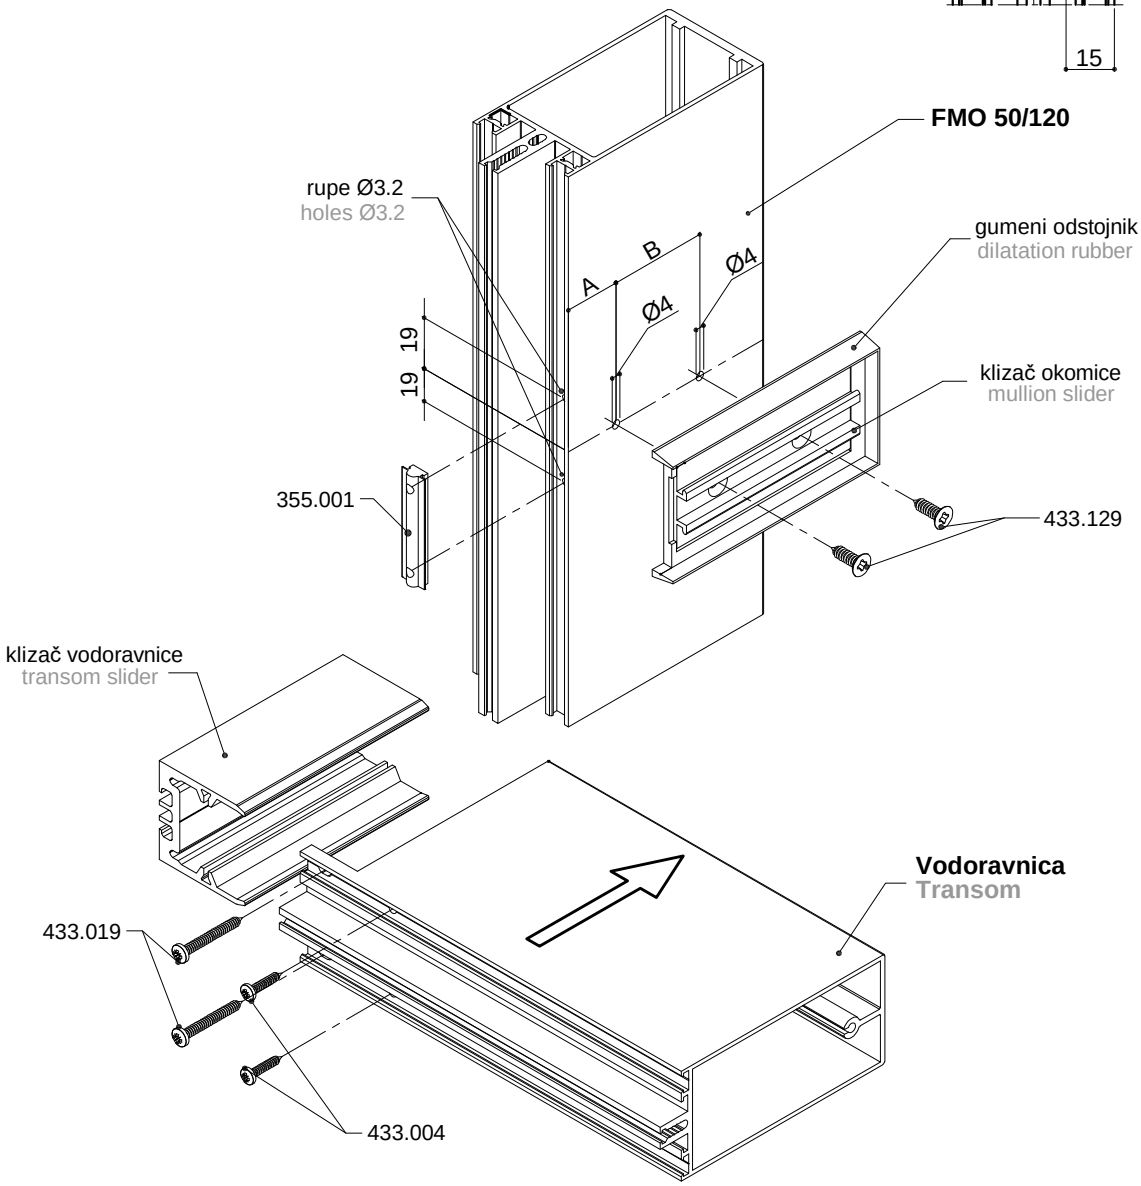


Vodoravnica Transom	Klizač okomice Mullion slider	Klizač vodoravnice Transom slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Gumeni odstojnik Dilatation rubber
FMV 50/118	720.202	721.202	25 mm	44 mm	-	365.033
FMV 50/88	720.201	721.201	25 mm	30 mm	-	366.005

- Obrada okomice **FMO 50/120-S** za vodoravnicu **FMV 50/118 ili manju** (gumeni odstojnik sa obrubom)
- Processing of mullion FMO 50/120-S for transom FMV 50/118 or smaller (rimmed dilatation rubber)

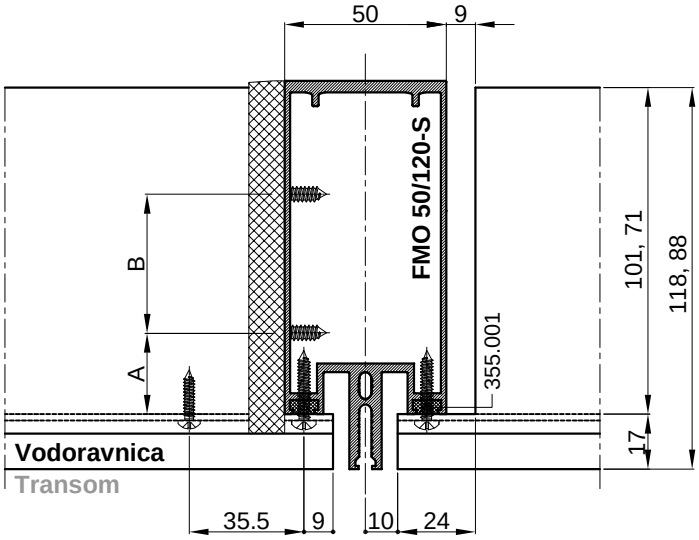


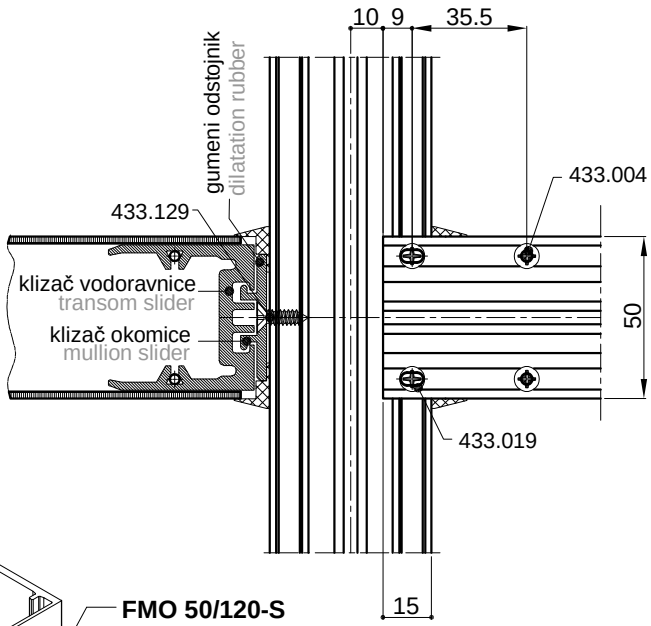


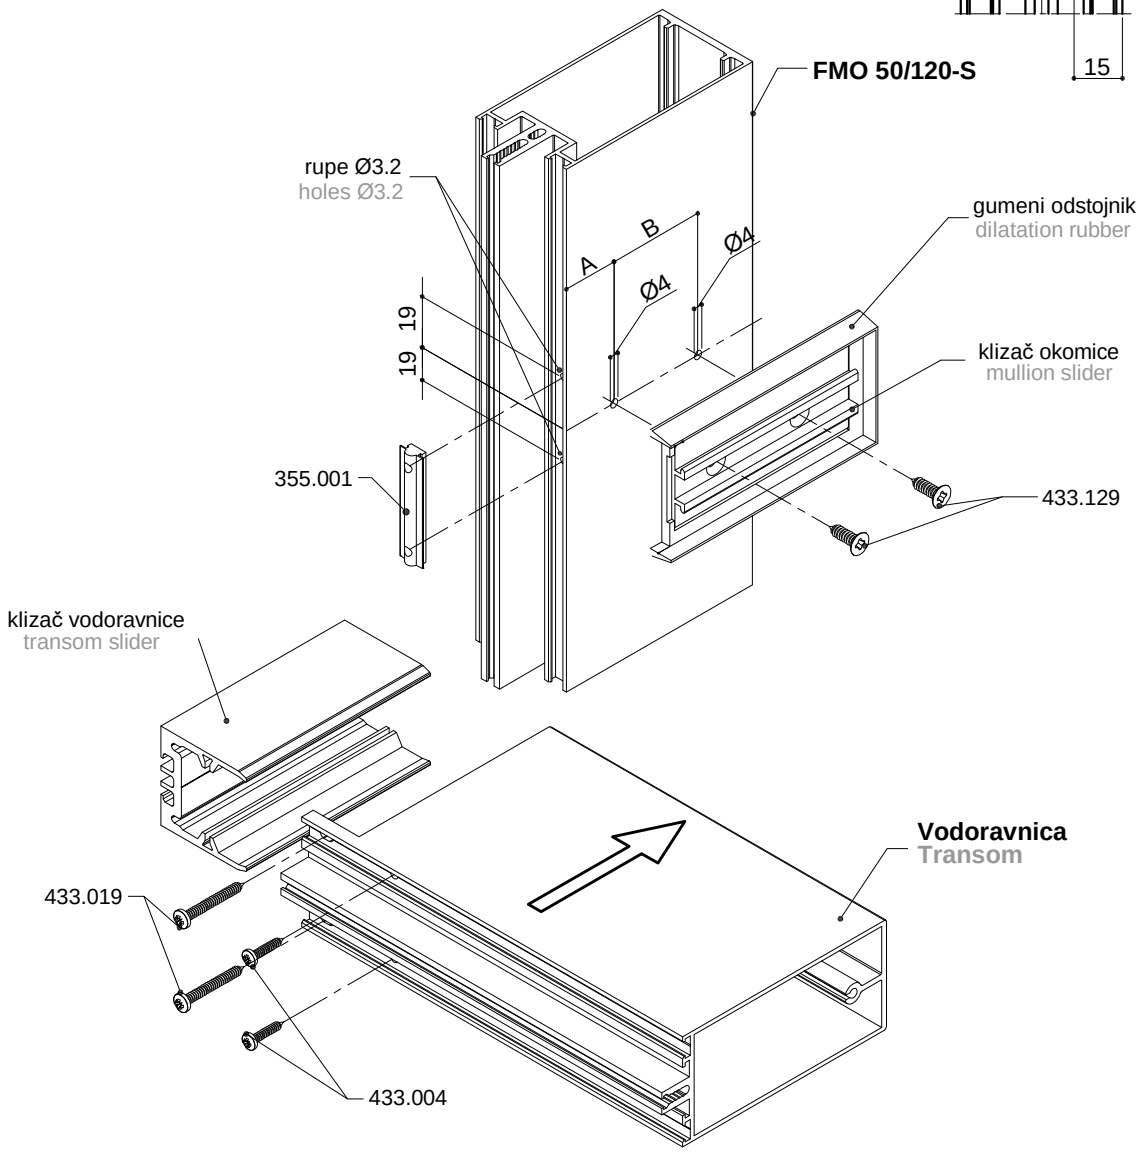


Vodoravnica Transom	Klizač okomice Mullion slider	Klizač vodoravnice Transom slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Gumeni odstojnik Dilatation rubber
FMV 50/118	720.202	721.202	25 mm	44 mm	-	365.033
FMV 50/88	720.201	721.201	25 mm	30 mm	-	366.005


- Obrada okomice **FMO 50/90** za vodoravnicu **FMV 50/88** (gumeni odstojnik sa obrubom)
- Processing of mullion FMO 50/90 for transom FMV 50/88 (rimmed dilatation rubber)

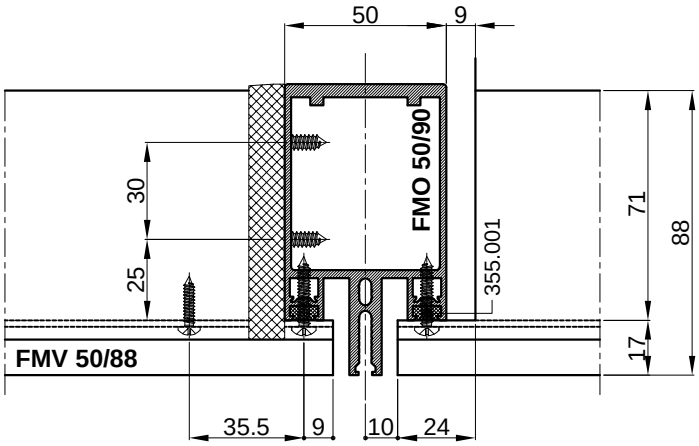


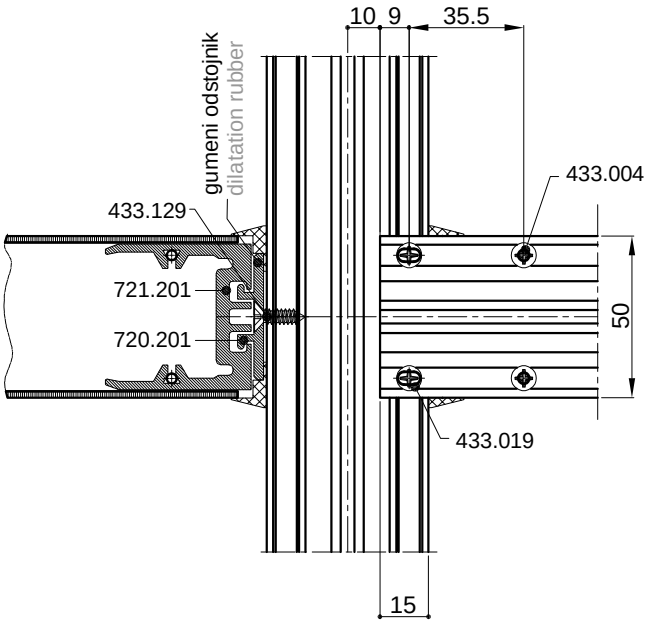


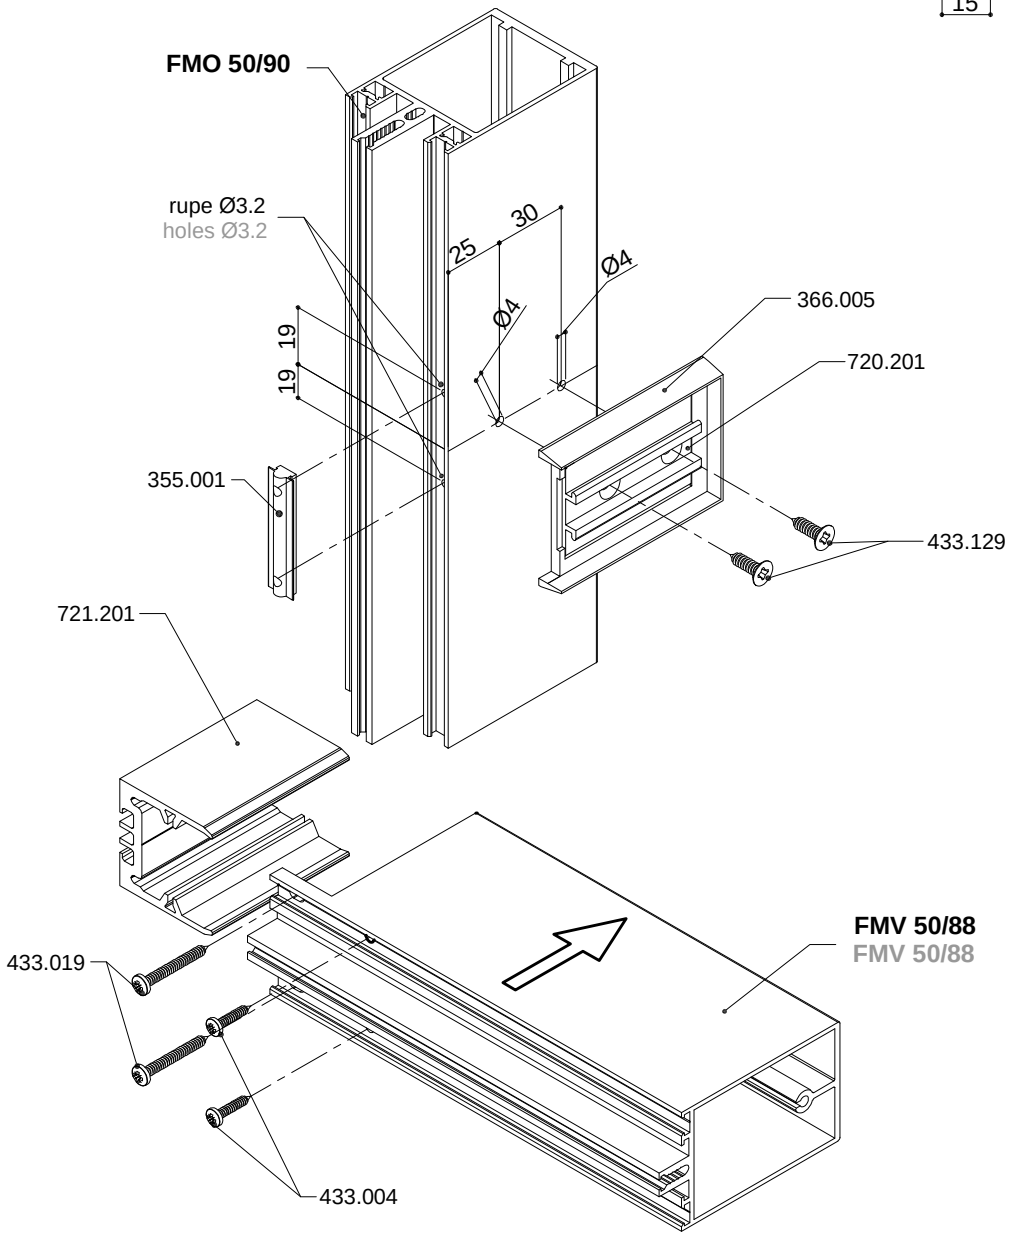

- Obrada okomice **FMO 50/270** za vodoravnicu **FMV 50/268 ili manju** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/270 for transom FMV 50/268 or smaller (flat dilatation rubber)

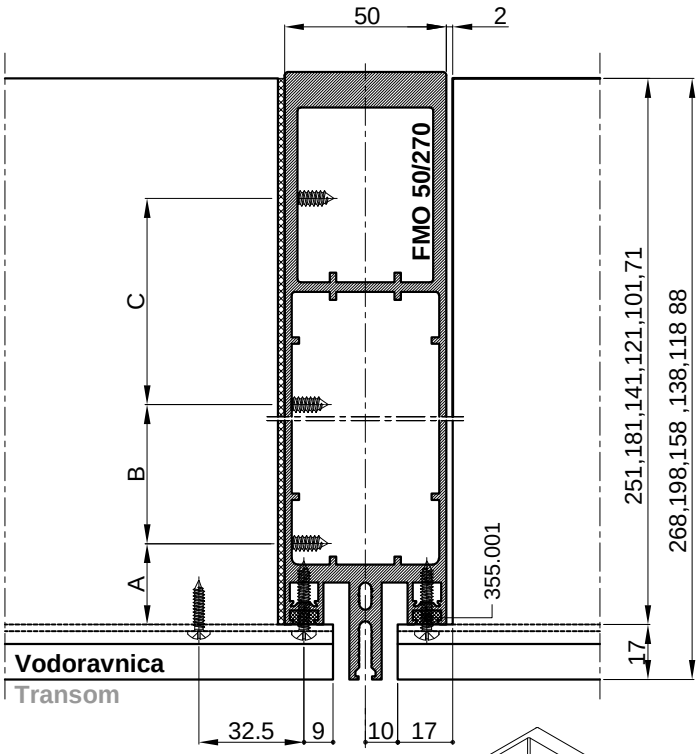


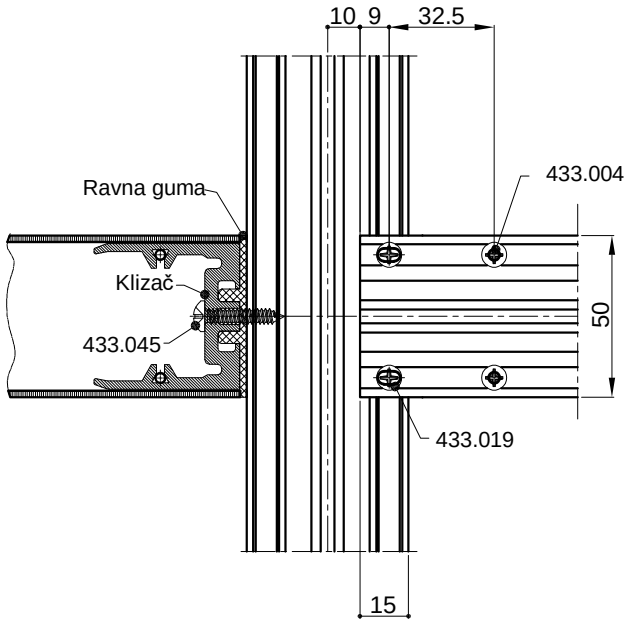

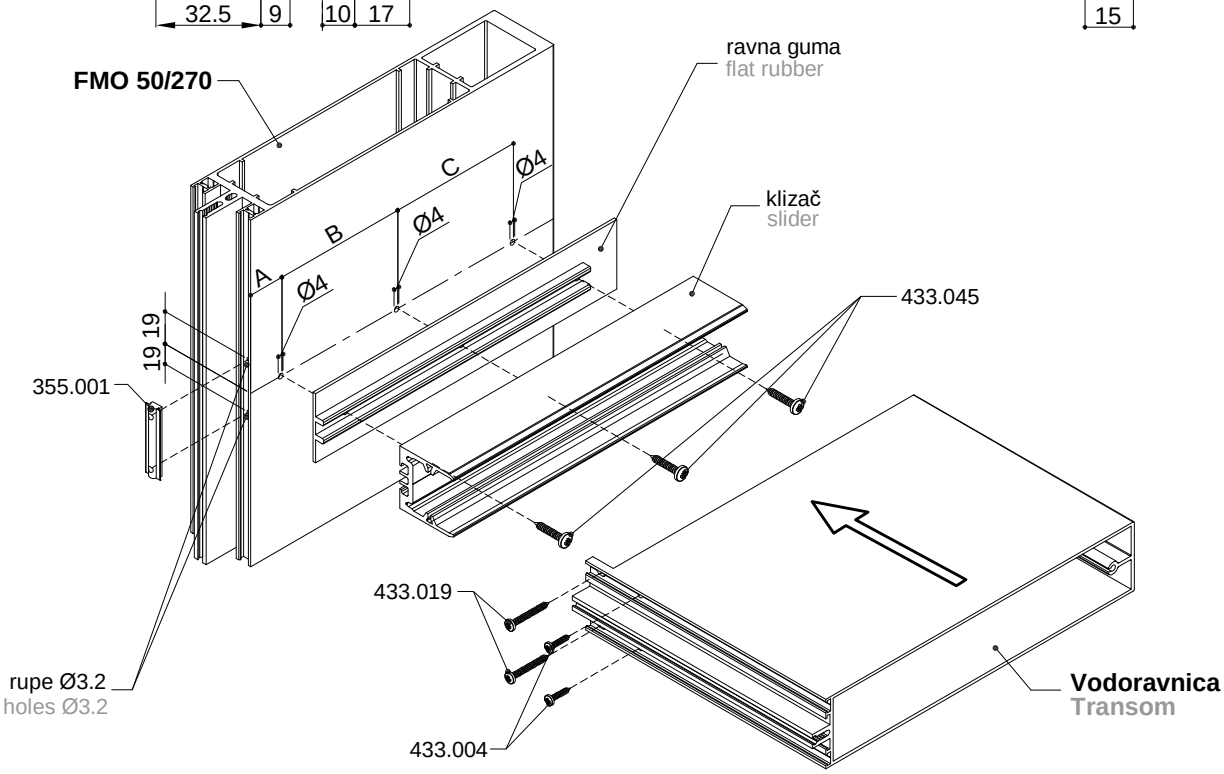


Vodoravnica Transom	Klizač Slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Ravna guma Flat rubber
FMV 50/268	721.223	25 mm	96,5 mm	96,5 mm	361.032
FMV 50/228	721.233	25 mm	77 mm	57 mm	361.047
FMV 50/198	721.211	25 mm	63 mm	63 mm	361.006
FMV 50/158	721.210	25 mm	43 mm	43 mm	361.005
FMV 50/138	721.214	25 mm	43 mm	-	361.011
FMV 50/118	721.209	25 mm	43 mm	-	361.004
FMV 50/88	721.208	20 mm	20 mm	-	361.003


- Obrada okomice **FMO 50/230** za vodoravnicu **FMV 50/228 (ravni gumeni odstojnik)**
- Processing of mullion FMO 50/230 for transom FMV 50/228 (flat dilatation rubber)

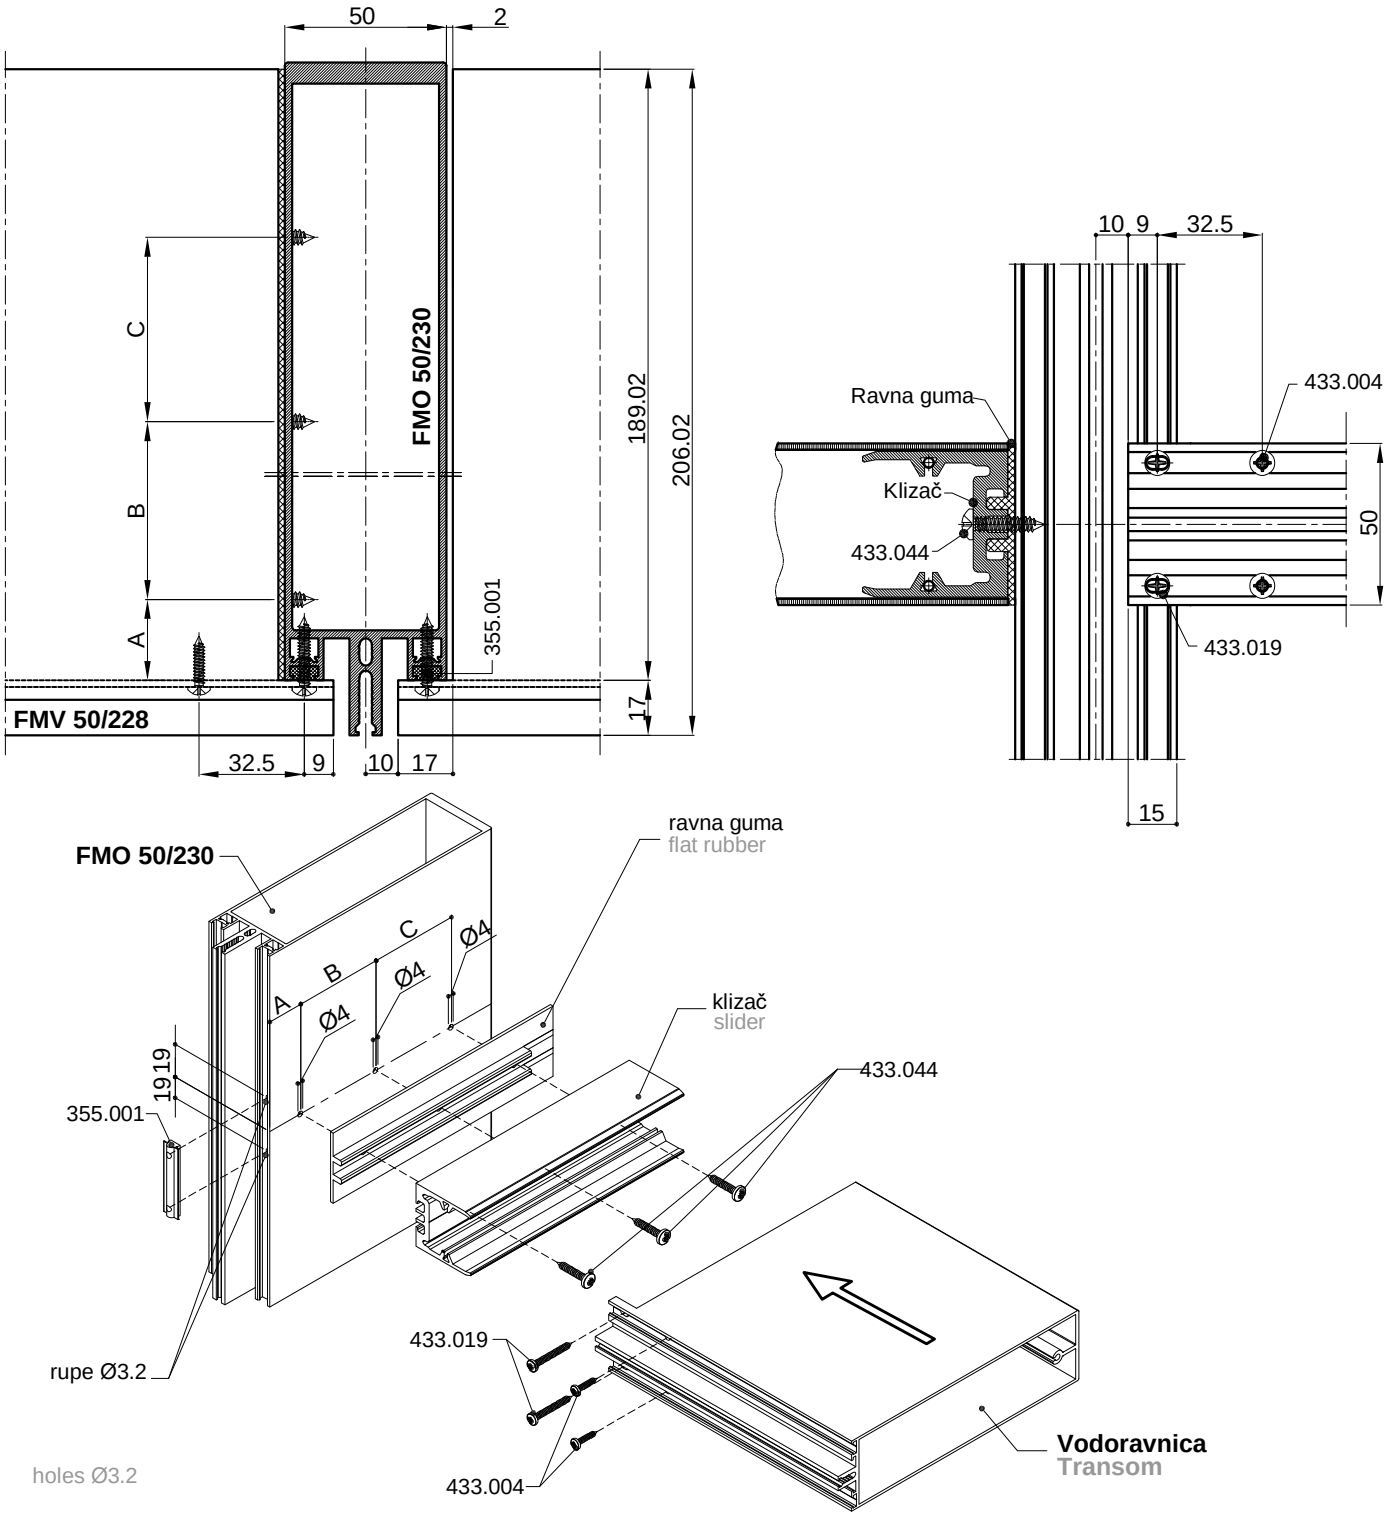


Vodoravnica Transom	**Klizač** Slider	**Dimenzija A** Dimension A	**Dimenzija B** Dimension B	**Dimenzija C** Dimension C	**Ravna guma** Flat rubber
FMV 50/228	721.233	25 mm	77 mm	57 mm	361.047
FMV 50/198	721.211	25 mm	63 mm	63 mm	361.006
FMV 50/158	721.210	25 mm	43 mm	43 mm	361.005
FMV 50/138	721.214	25 mm	43 mm	-	361.011
FMV 50/118	721.209	25 mm	43 mm	-	361.004
FMV 50/88	721.208	20 mm	20 mm	-	361.003

- Obrada okomice **FMO 50/200** za vodoravnicu **FMV 50/198 ili manju** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/200 for transom FMV 50/198 or smaller (flat dilatation rubber)

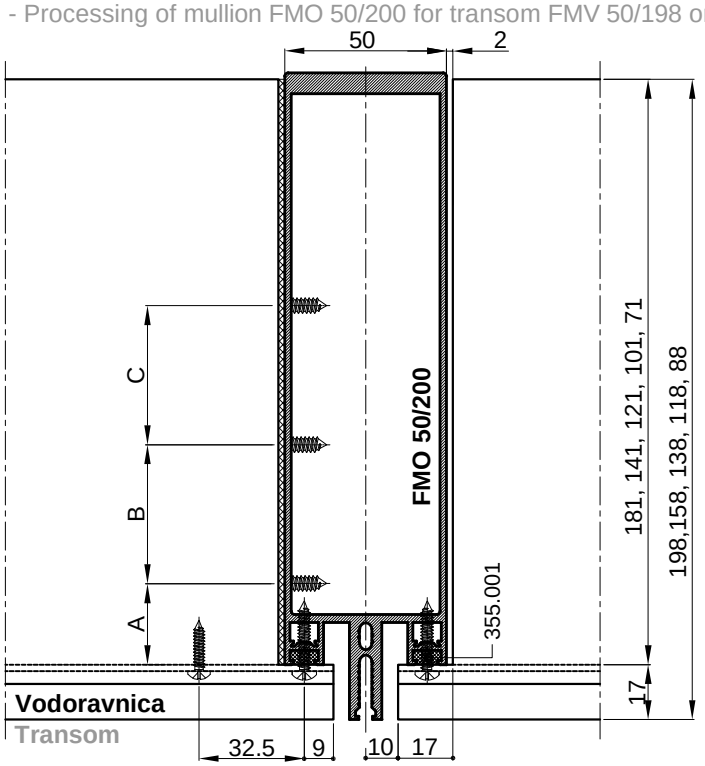


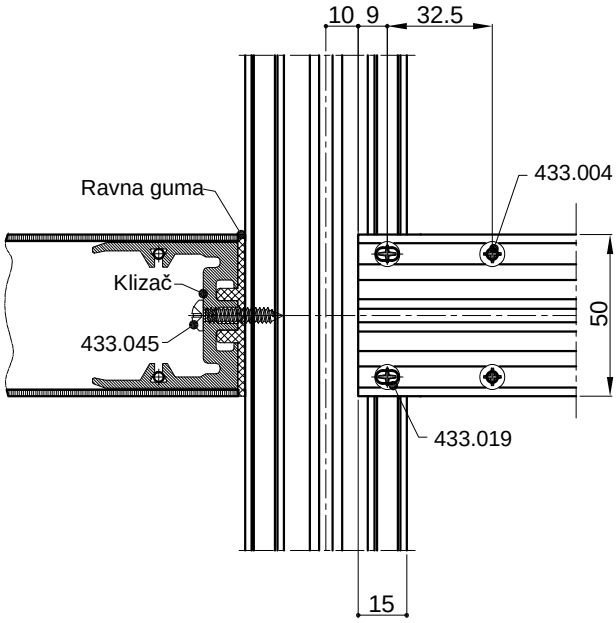


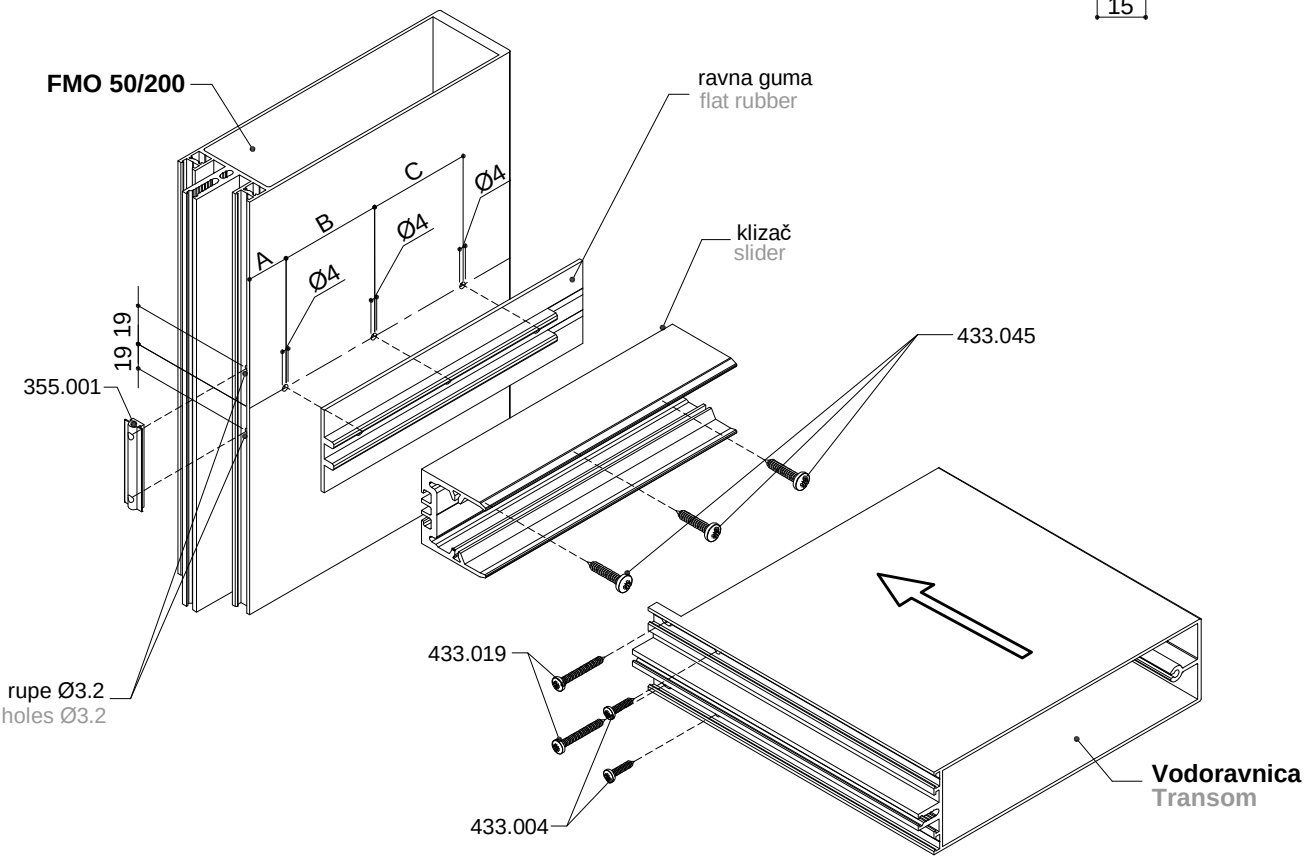

Vodoravnica Transom	Klizač Slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Ravna guma Flat rubber
FMV 50/198	721.211	25 mm	63 mm	63 mm	361.006
FMV 50/158	721.210	25 mm	43 mm	43 mm	361.005
FMV 50/138	721.214	25 mm	43 mm	-	361.011
FMV 50/118	721.209	25 mm	43 mm	-	361.004
FMV 50/88	721.208	20 mm	20 mm	-	361.003


- Obrada okomice **FMO 50/200-S** za vodoravnicu **FMV 50/198** ili manju (ravni gumeni odstojnik)
- Processing of mullion FMO 50/200-S for transom FMV 50/198 or smaller (flat dilatation rubber)

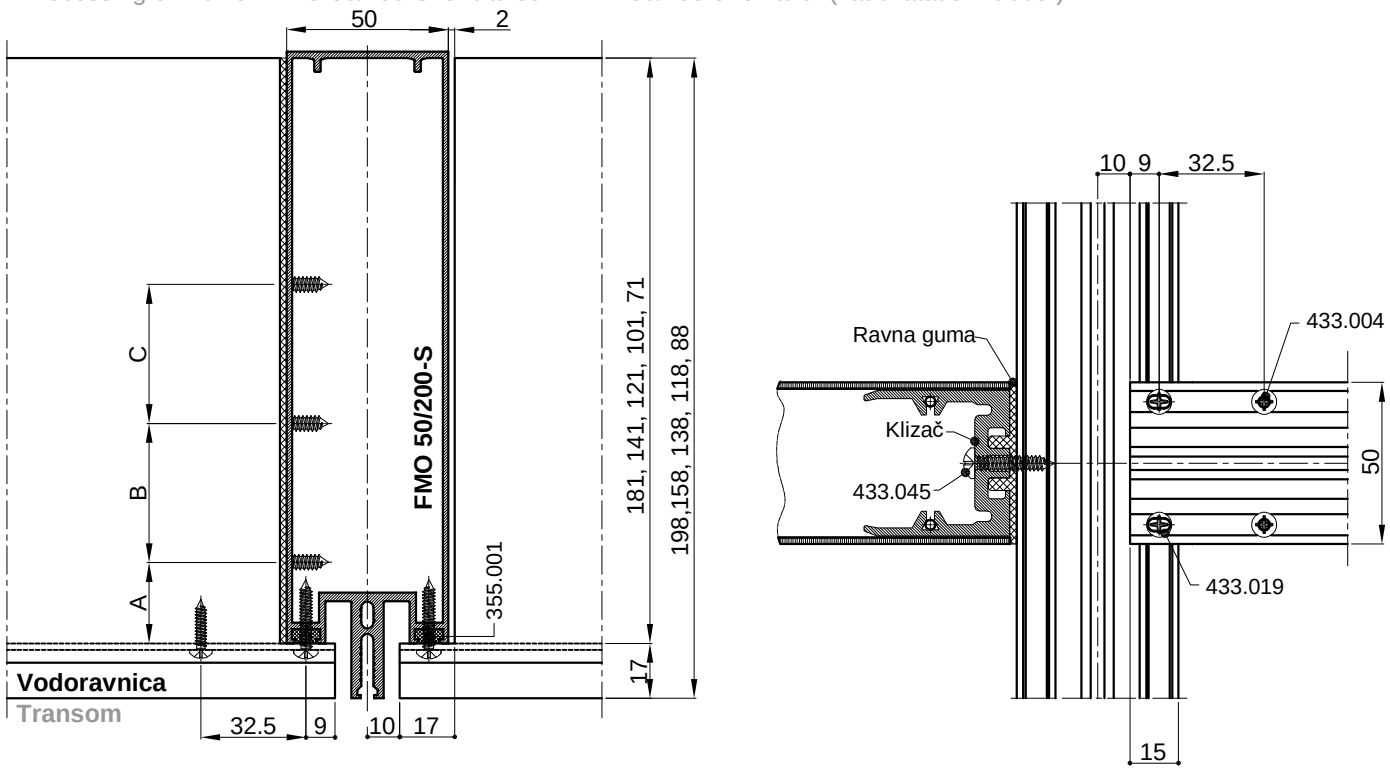


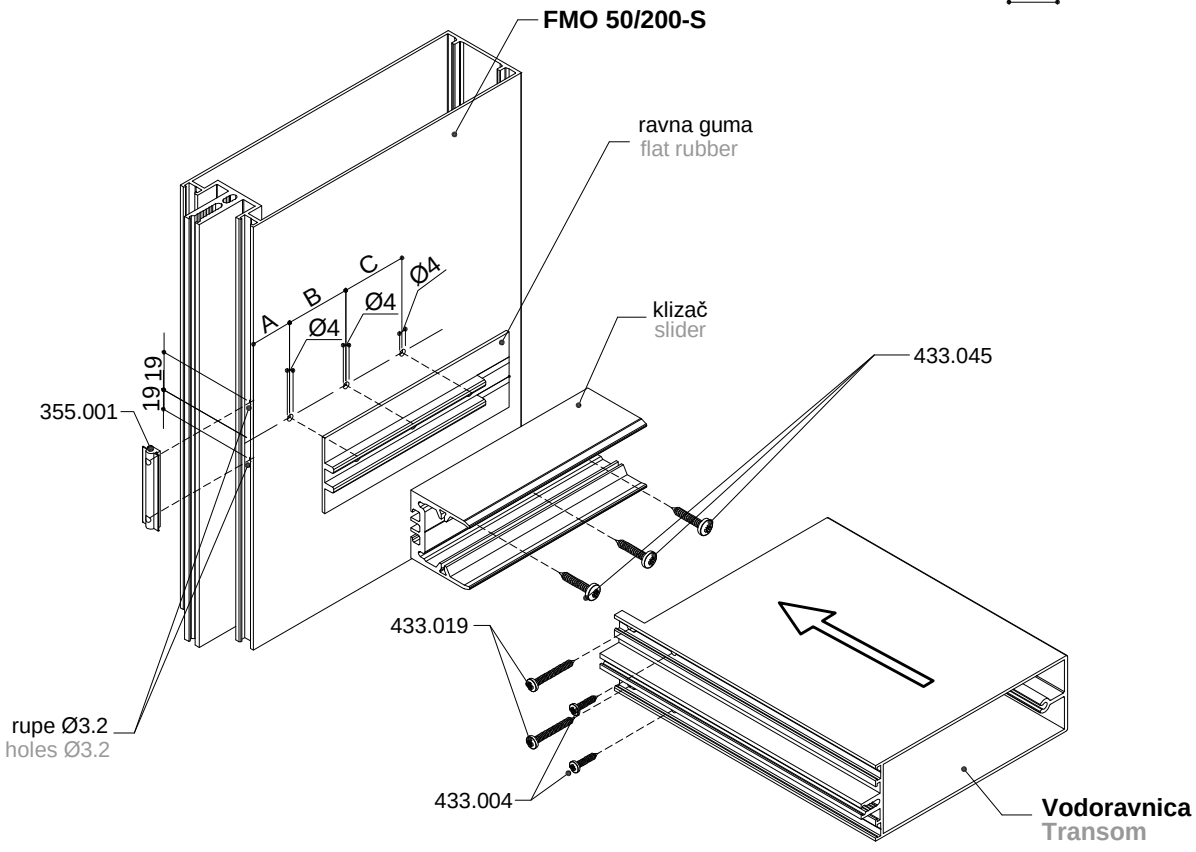


Vodoravnica Transom	Klizač Slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Ravna guma Flat rubber
FMV 50/198	721.211	25 mm	63 mm	63 mm	361.006
FMV 50/158	721.210	25 mm	43 mm	43 mm	361.005
FMV 50/138	721.214	25 mm	43 mm	-	361.011
FMV 50/118	721.209	25 mm	43 mm	-	361.004
FMV 50/88	721.208	20 mm	20 mm	-	361.003


- Obrada okomice **FMO 50/200-S** za spoj s **FMO 50/200-S** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/200-S for connection with FMO 50/200-S (flat dilatation rubber)

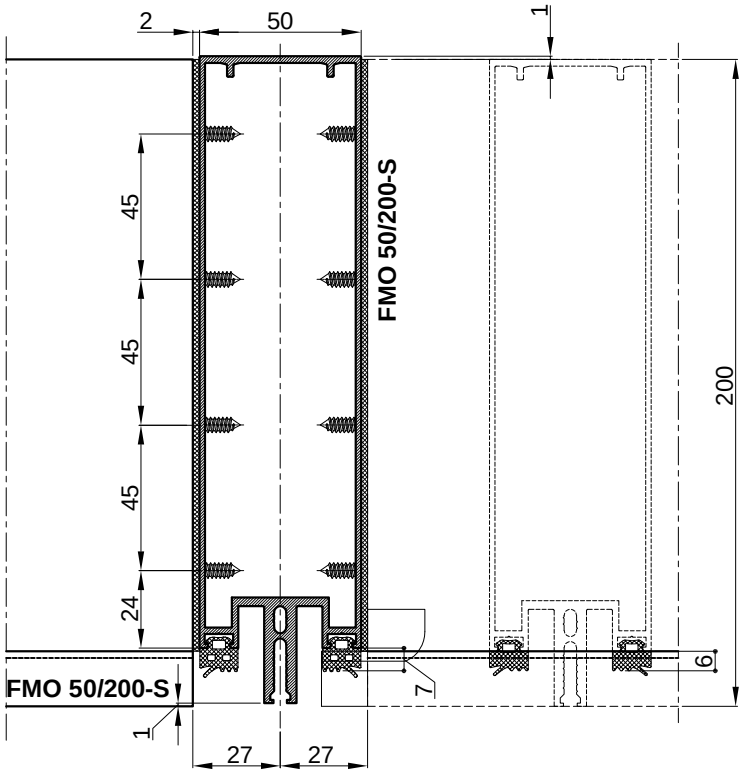


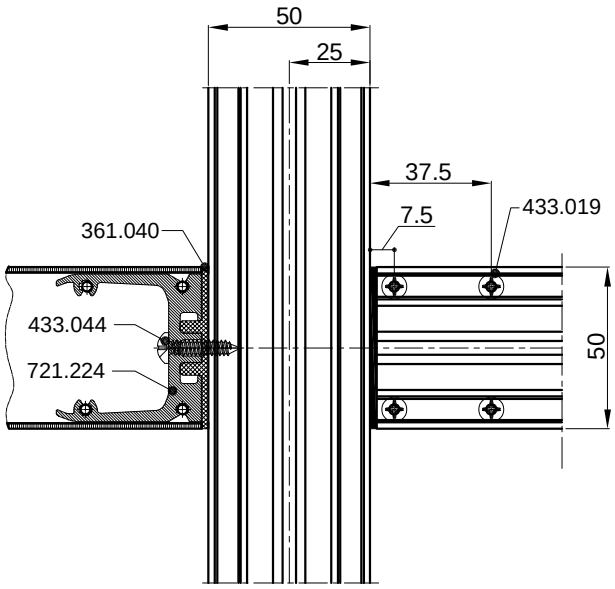


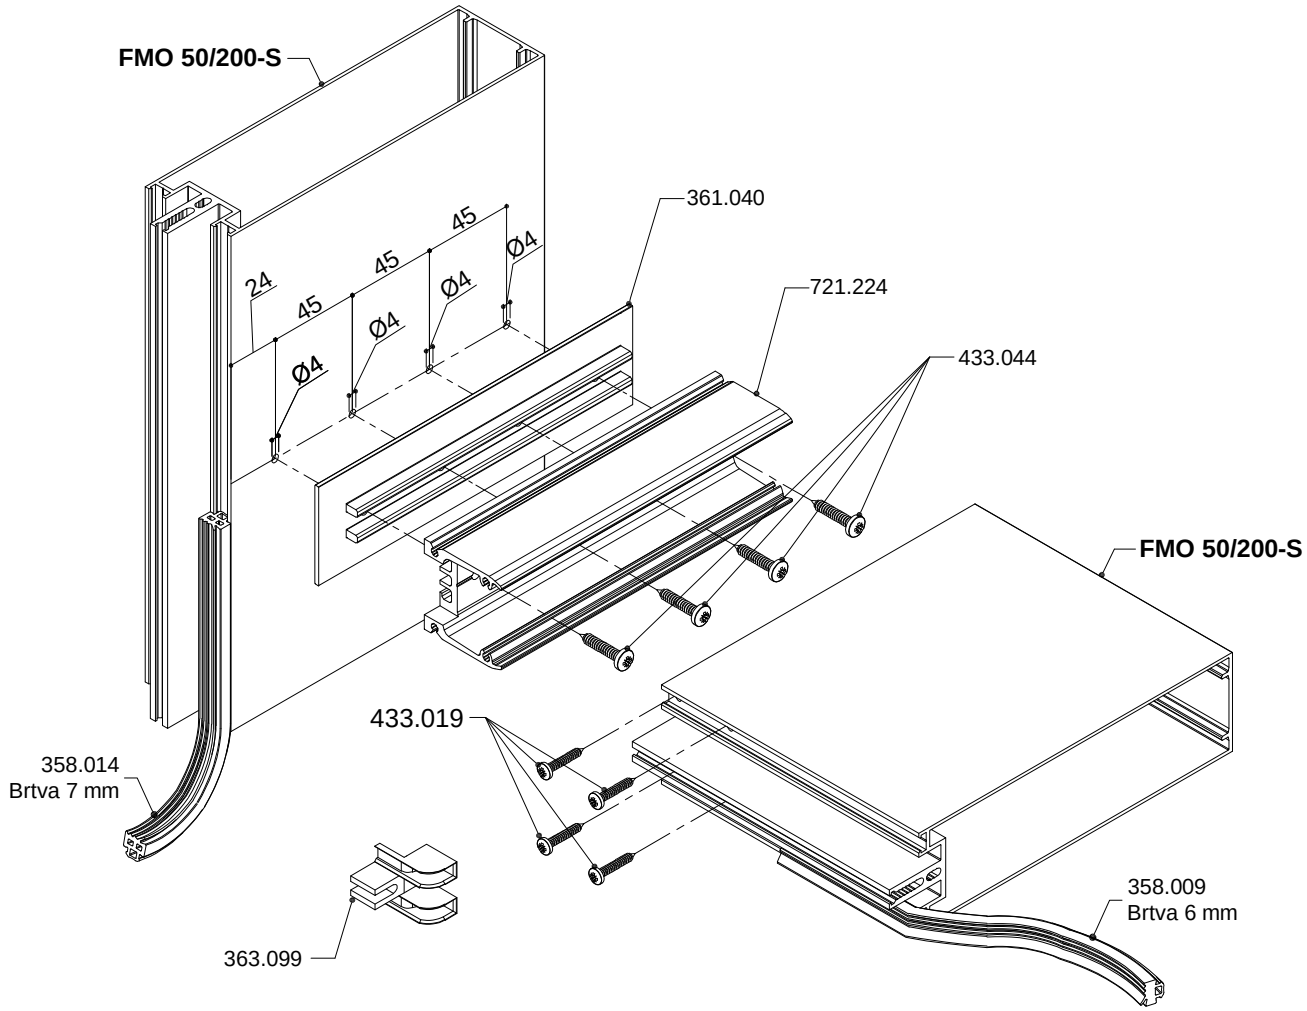

- Obrada okomice **FMO 50/200-S** za spoj s **FMO 50/160-S ili manju** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/200-S for connection with FMO 50/160-S or smaller (flat dilatation rubber)

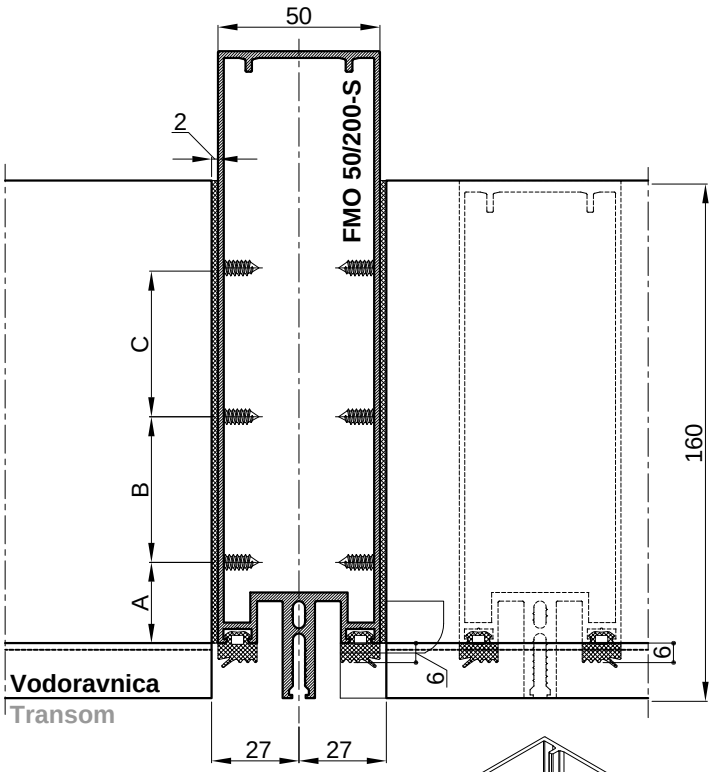


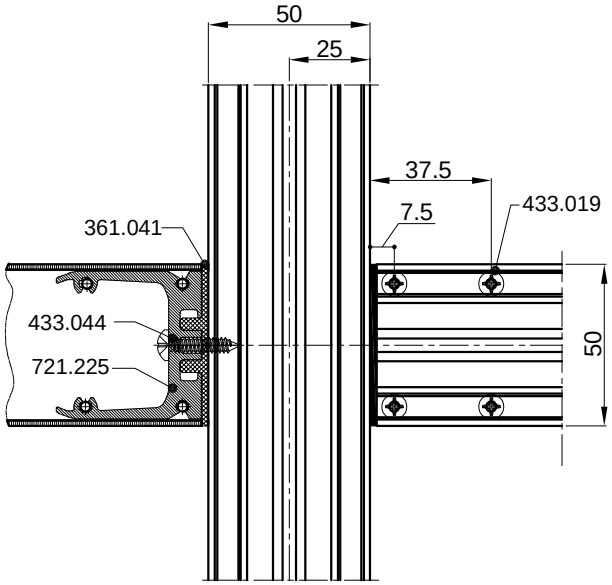


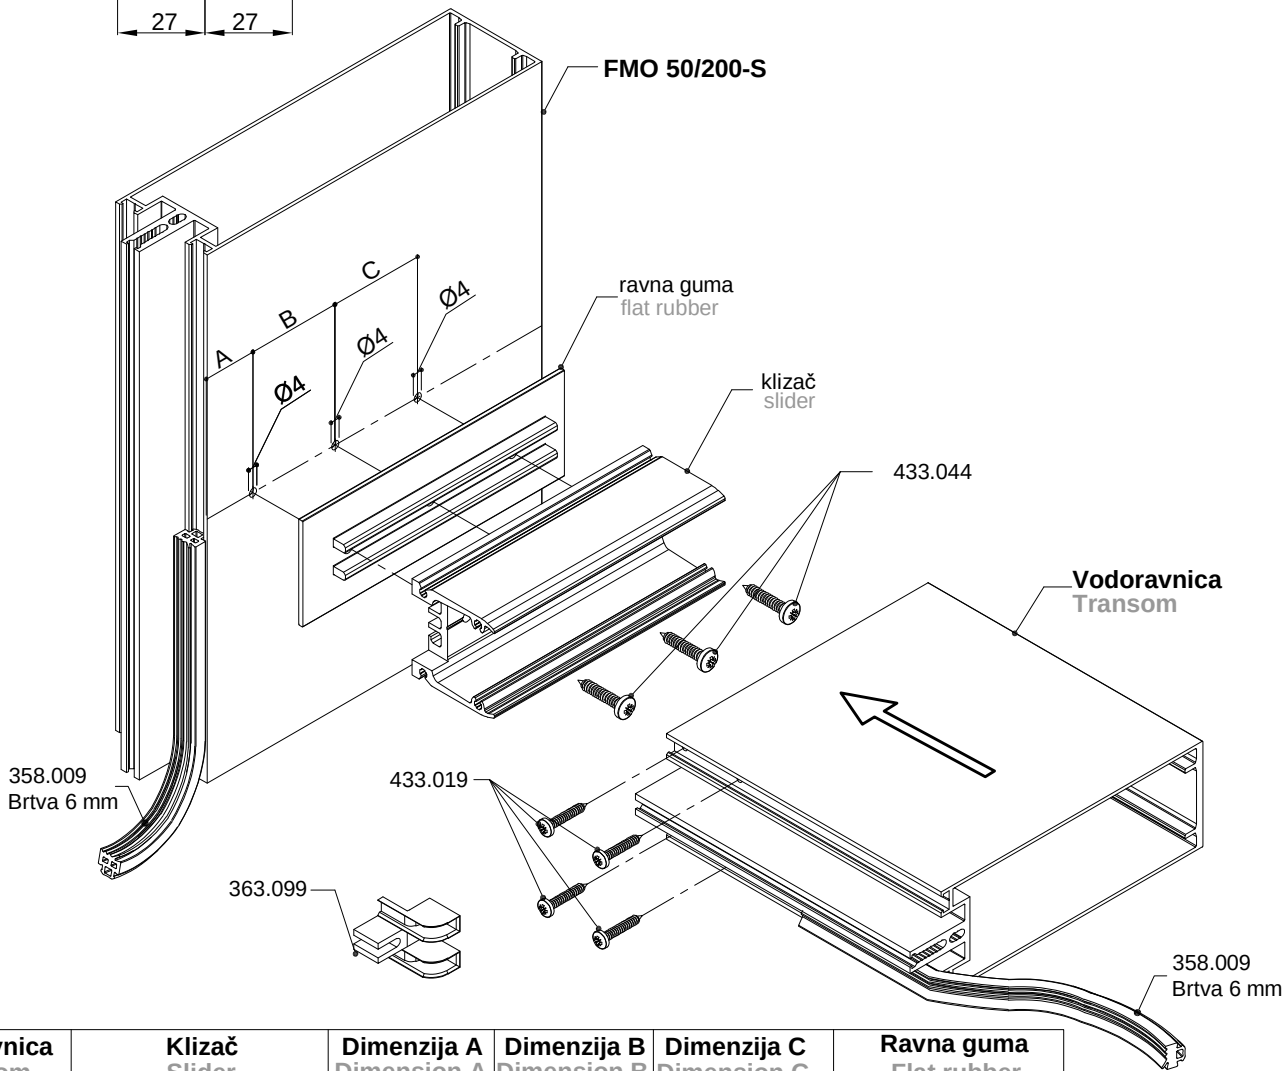

Vodoravnica Transom	Klizač Slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Ravna guma Flat rubber
FMO 50/160-S	721.225	25 mm	45 mm	45 mm	361.041
FMO 50/120-S	721.226	25 mm	45 mm	-	361.042


- Obrada okomice **FMO 50/160** za vodoravnicu **FMV 50/158 ili manju** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/160 for transom FMV 50/158 or smaller (flat dilatation rubber)

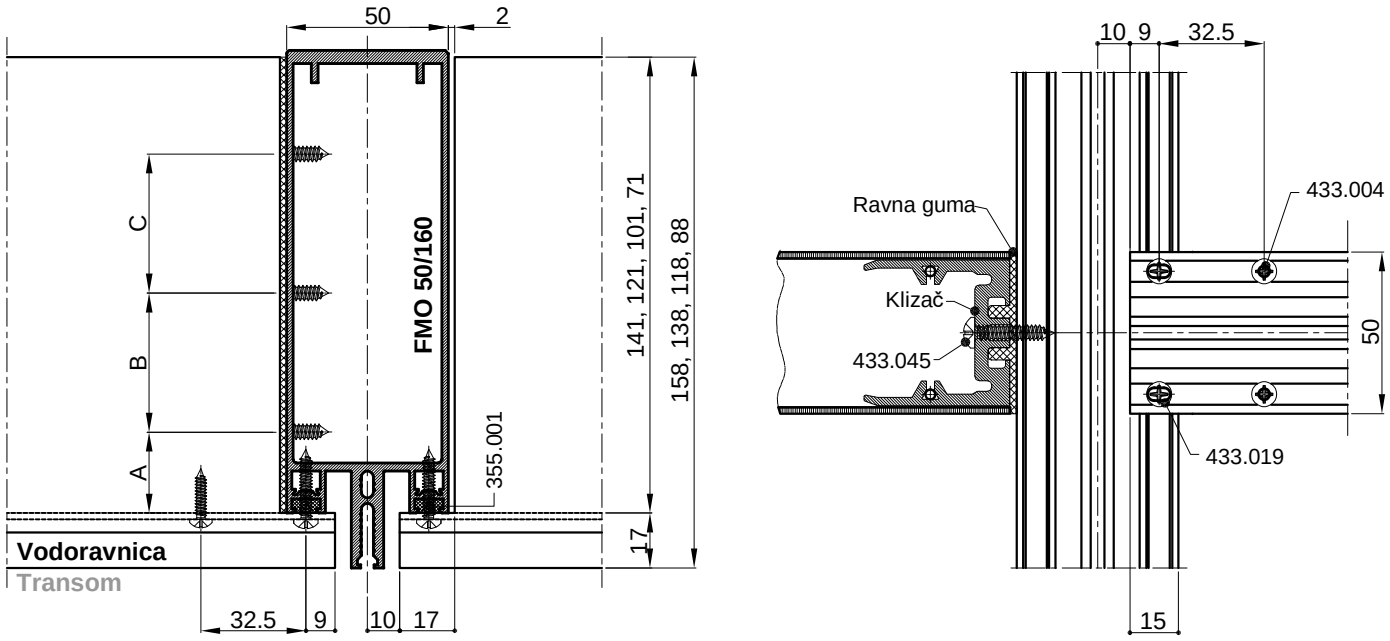


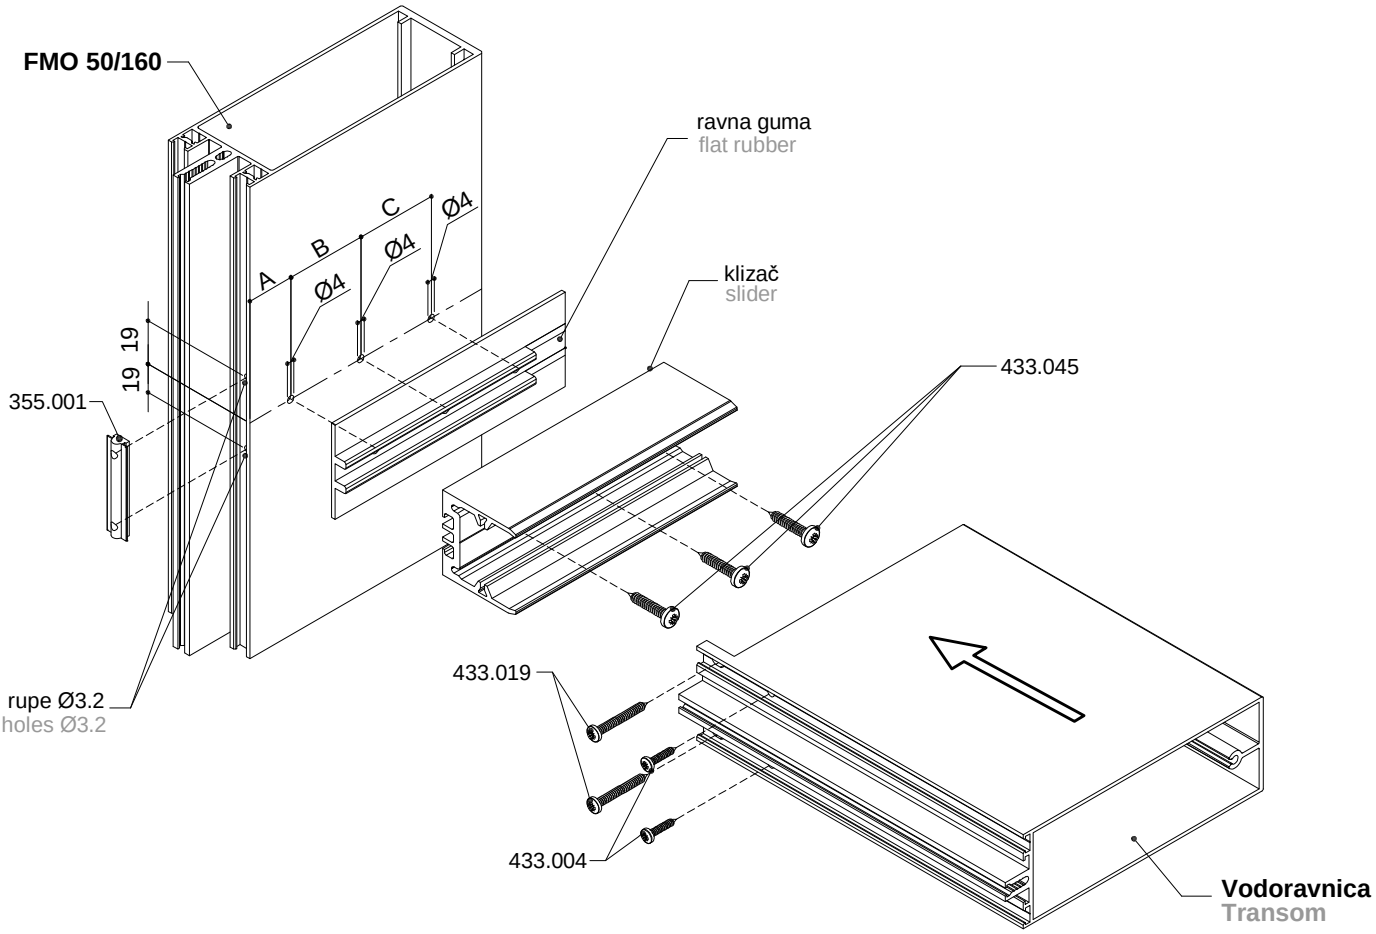


Vodoravnica Transom	Klizač Slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Ravna guma Flat rubber
FMV 50/158	721.210	25 mm	43 mm	43 mm	361.005
FMV 50/138	721.214	25 mm	43 mm	-	361.011
FMV 50/118	721.209	25 mm	43 mm	-	361.004
FMV 50/88	721.208	20 mm	20 mm	-	361.003

- Obrada okomice **FMO 50/160-S** za vodoravnicu **FMV 50/158 ili manju** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/160-S for transom FMV 50/158 or smaller (flat dilatation rubber)

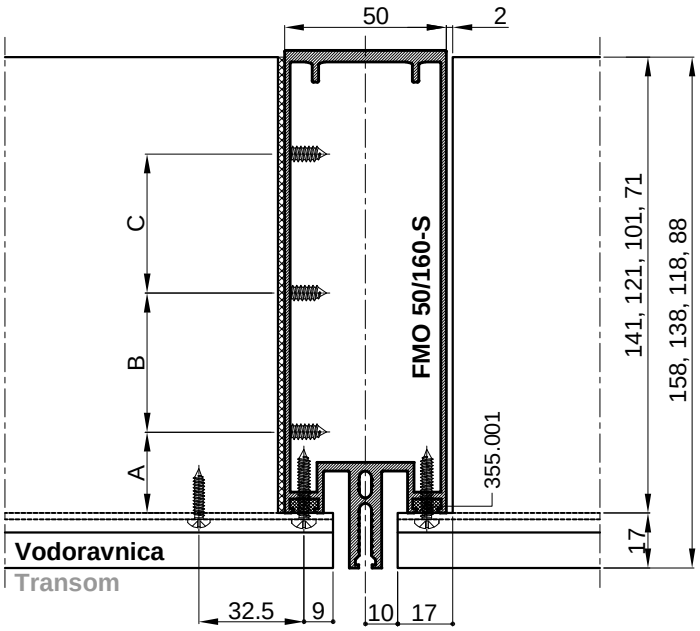


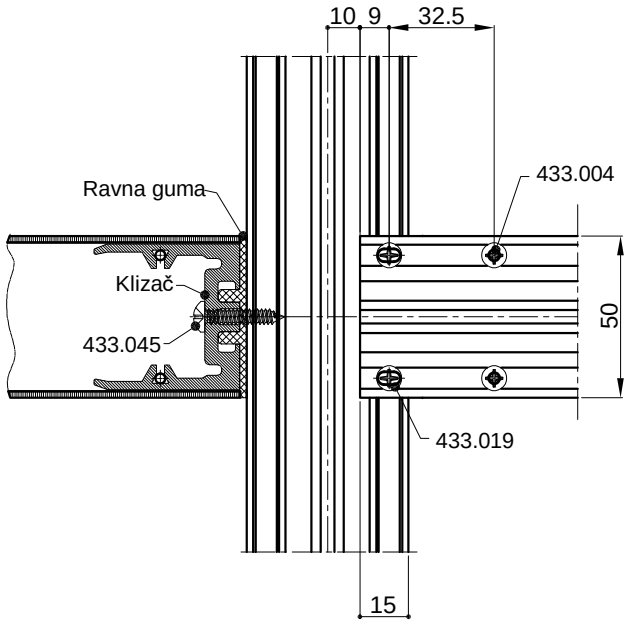


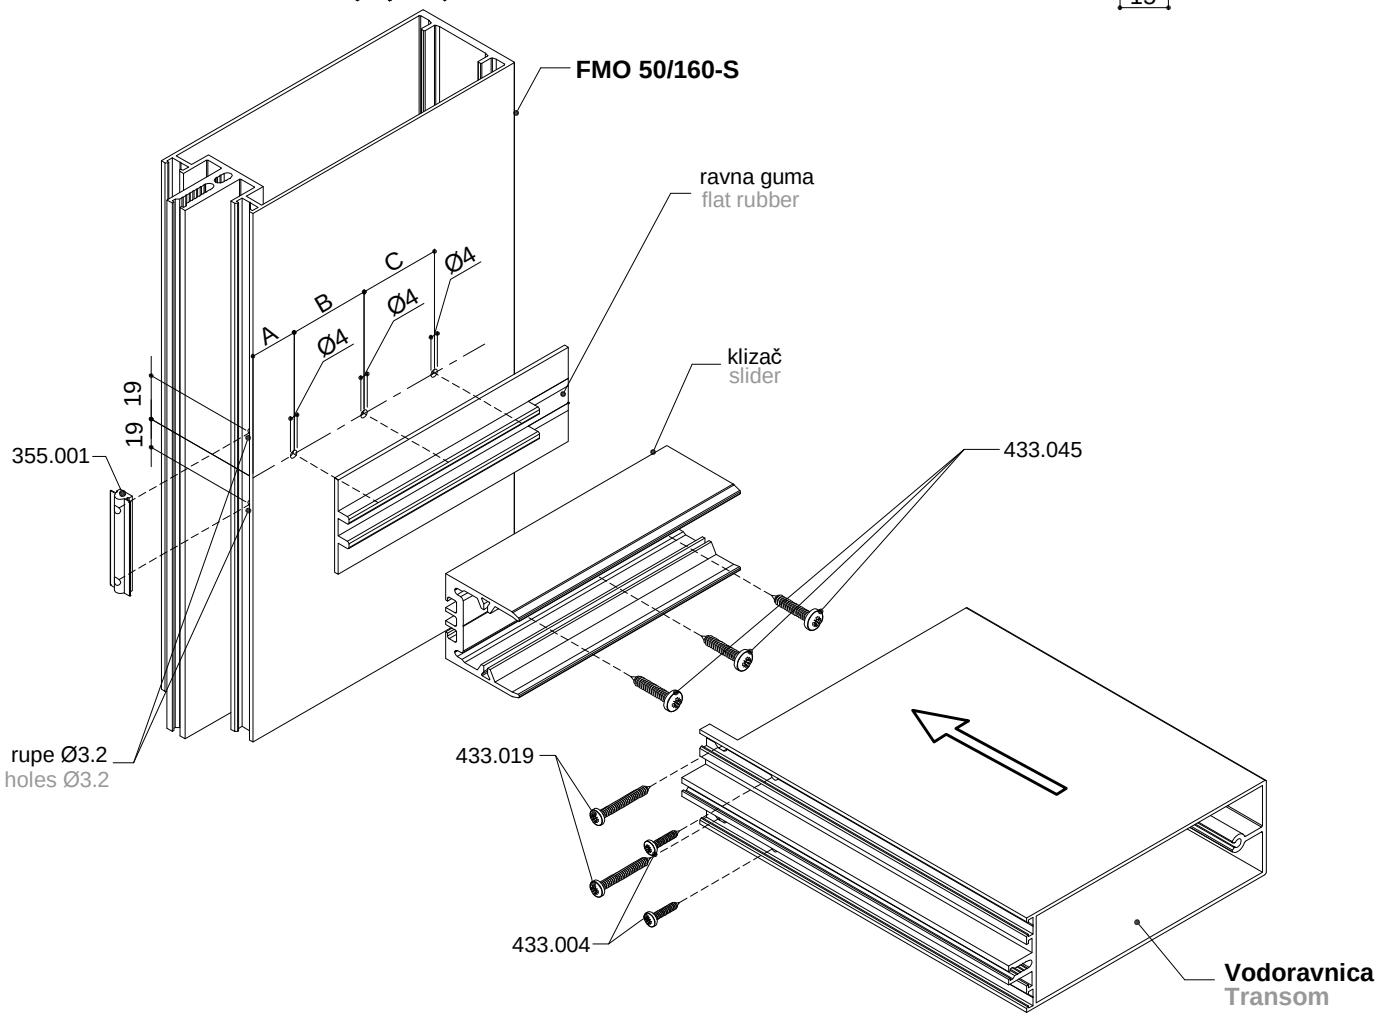


Vodoravnica Transom	Klizač Slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Ravna guma Flat rubber
FMV 50/158	721.210	25 mm	43 mm	43 mm	361.005
FMV 50/138	721.214	25 mm	43 mm	-	361.011
FMV 50/118	721.209	25 mm	43 mm	-	361.004
FMV 50/88	721.208	20 mm	20 mm	-	361.003


- Obrada okomice **FMO 50/160-S** za spoj s **FMO 50/160-S** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/160-S for connection with FMO 50/160-S (flat dilatation rubber)

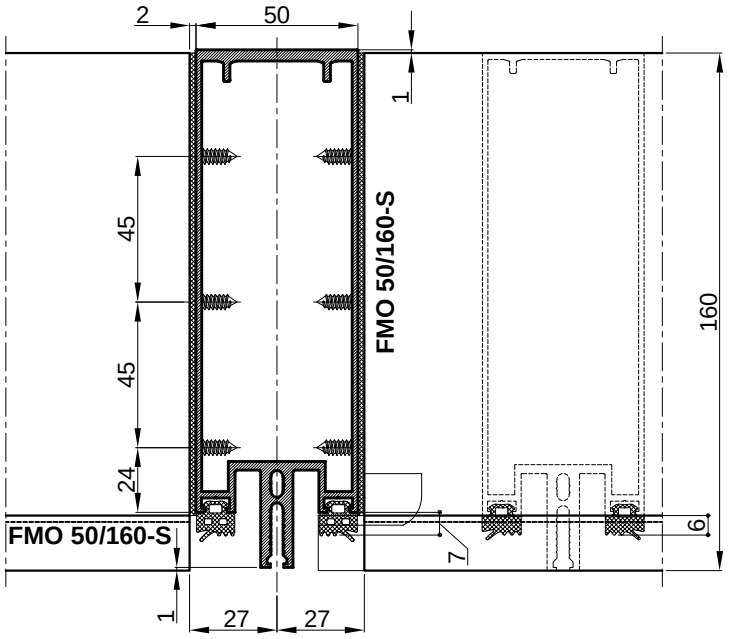


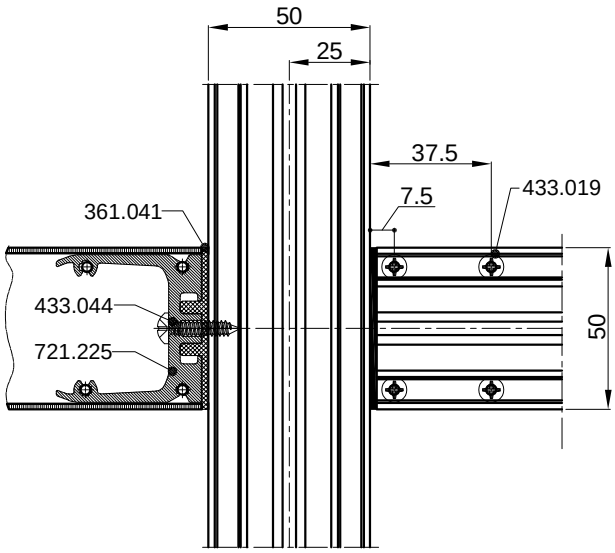


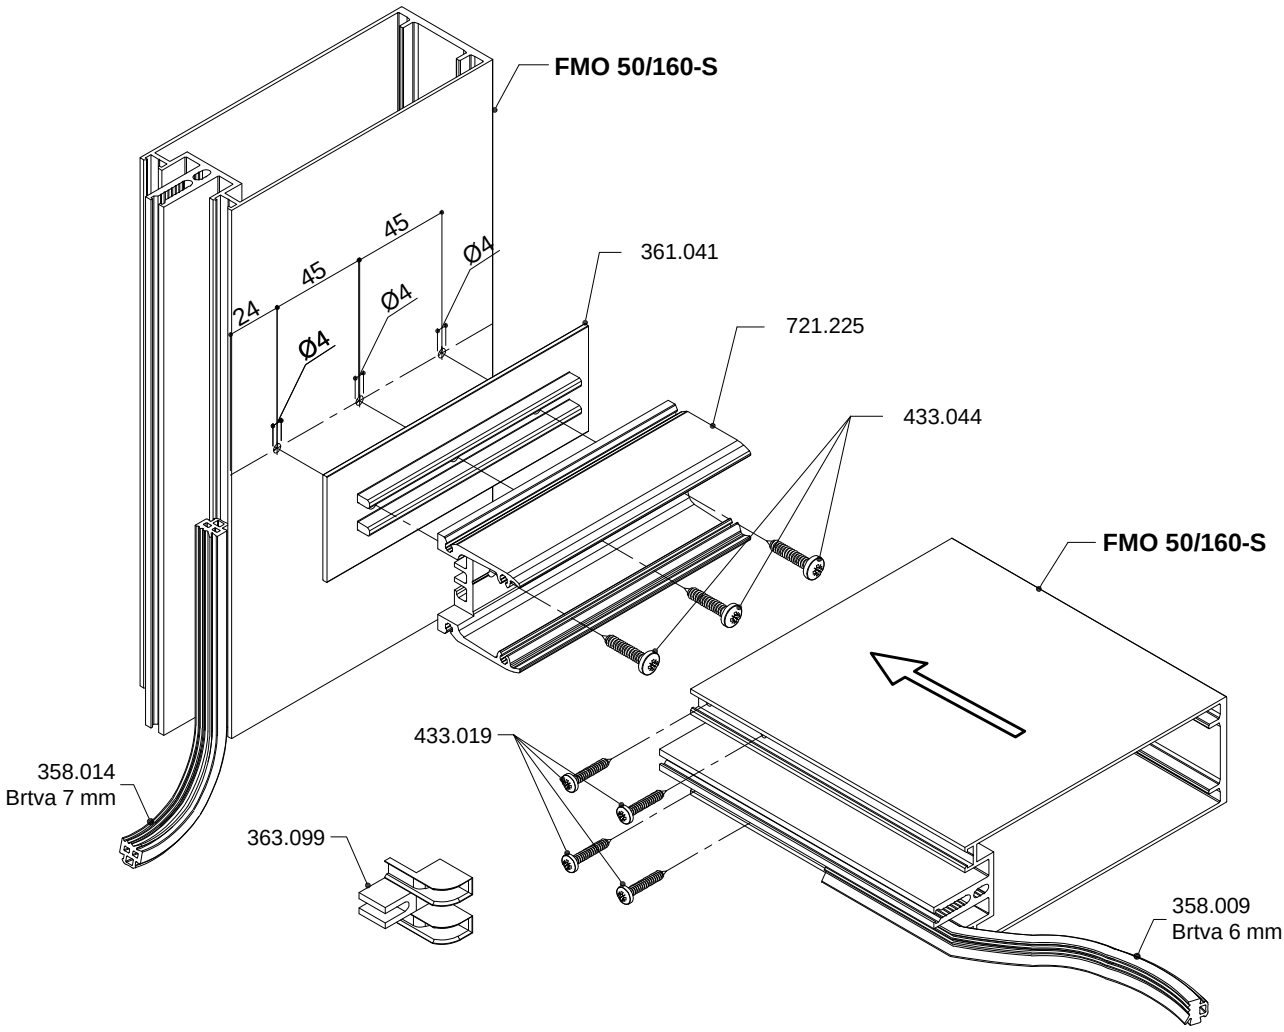


- Obrada okomice **FMO 50/160-S** za spoj s **FMO 50/120-S** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/160-S for connection with FMO 50/120-S (flat dilatation rubber)

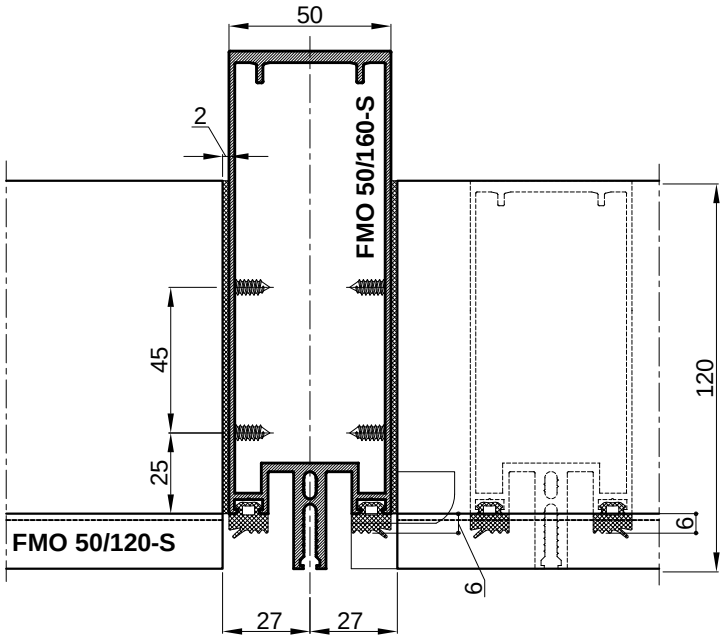


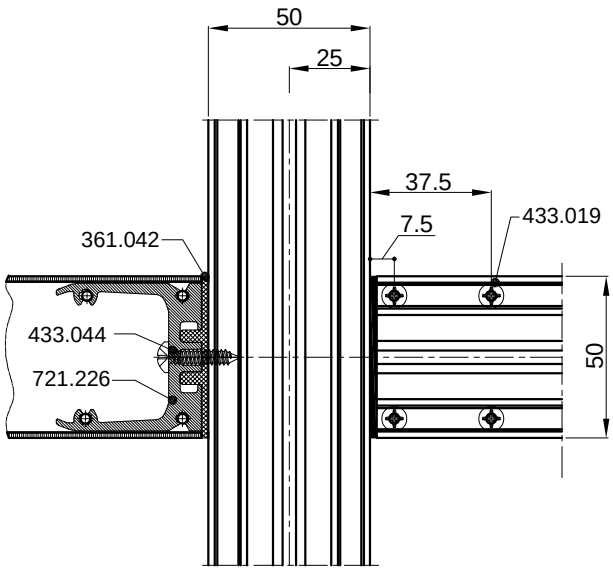


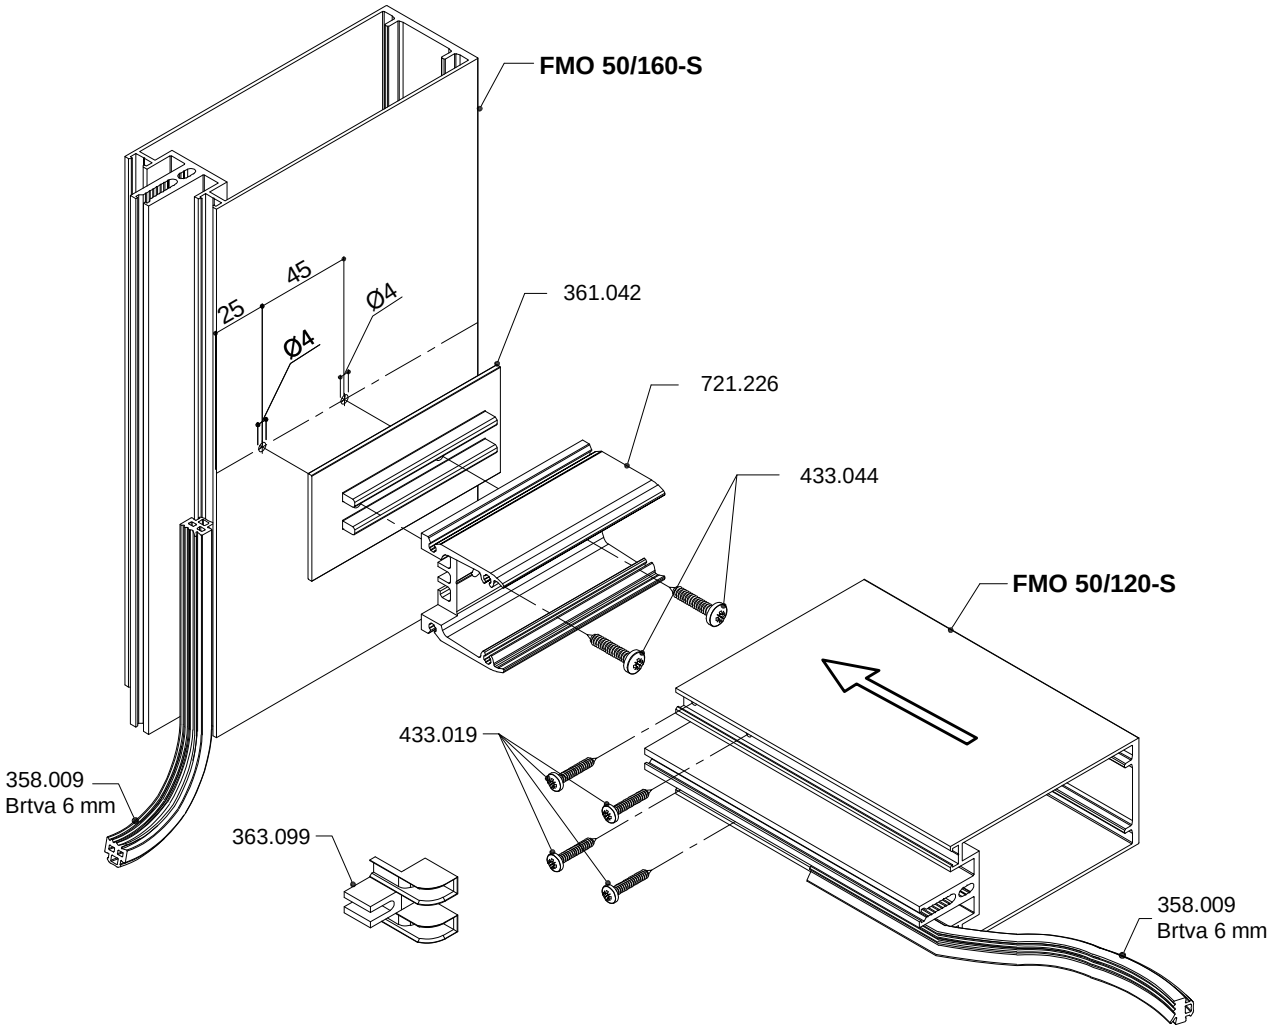

- Obrada okomice **FMO 50/140** za vodoravnicu **FMV 50/138 ili manju** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/140 for transom FMV 50/138 or smaller (flat dilatation rubber)

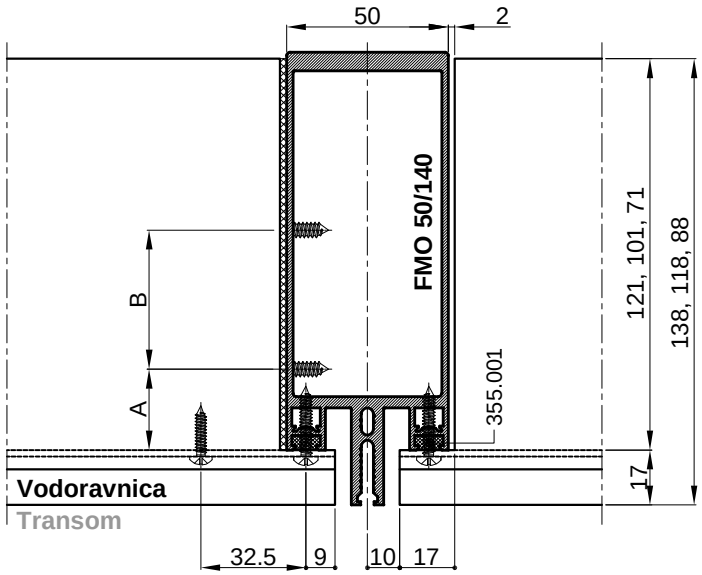


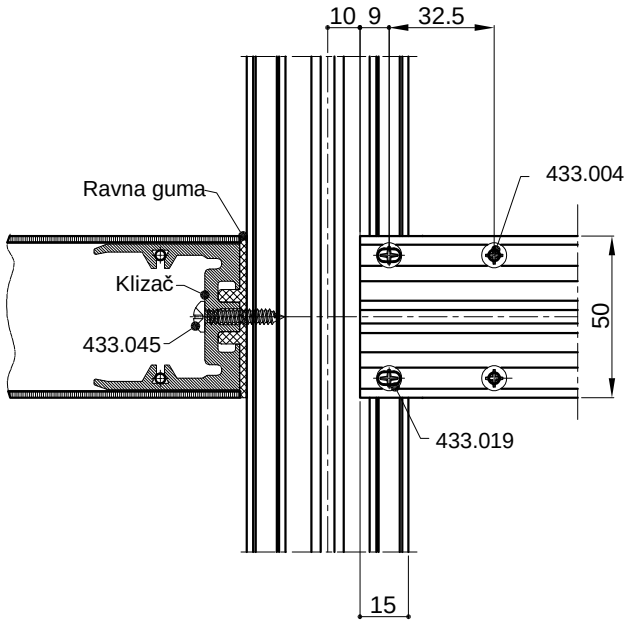


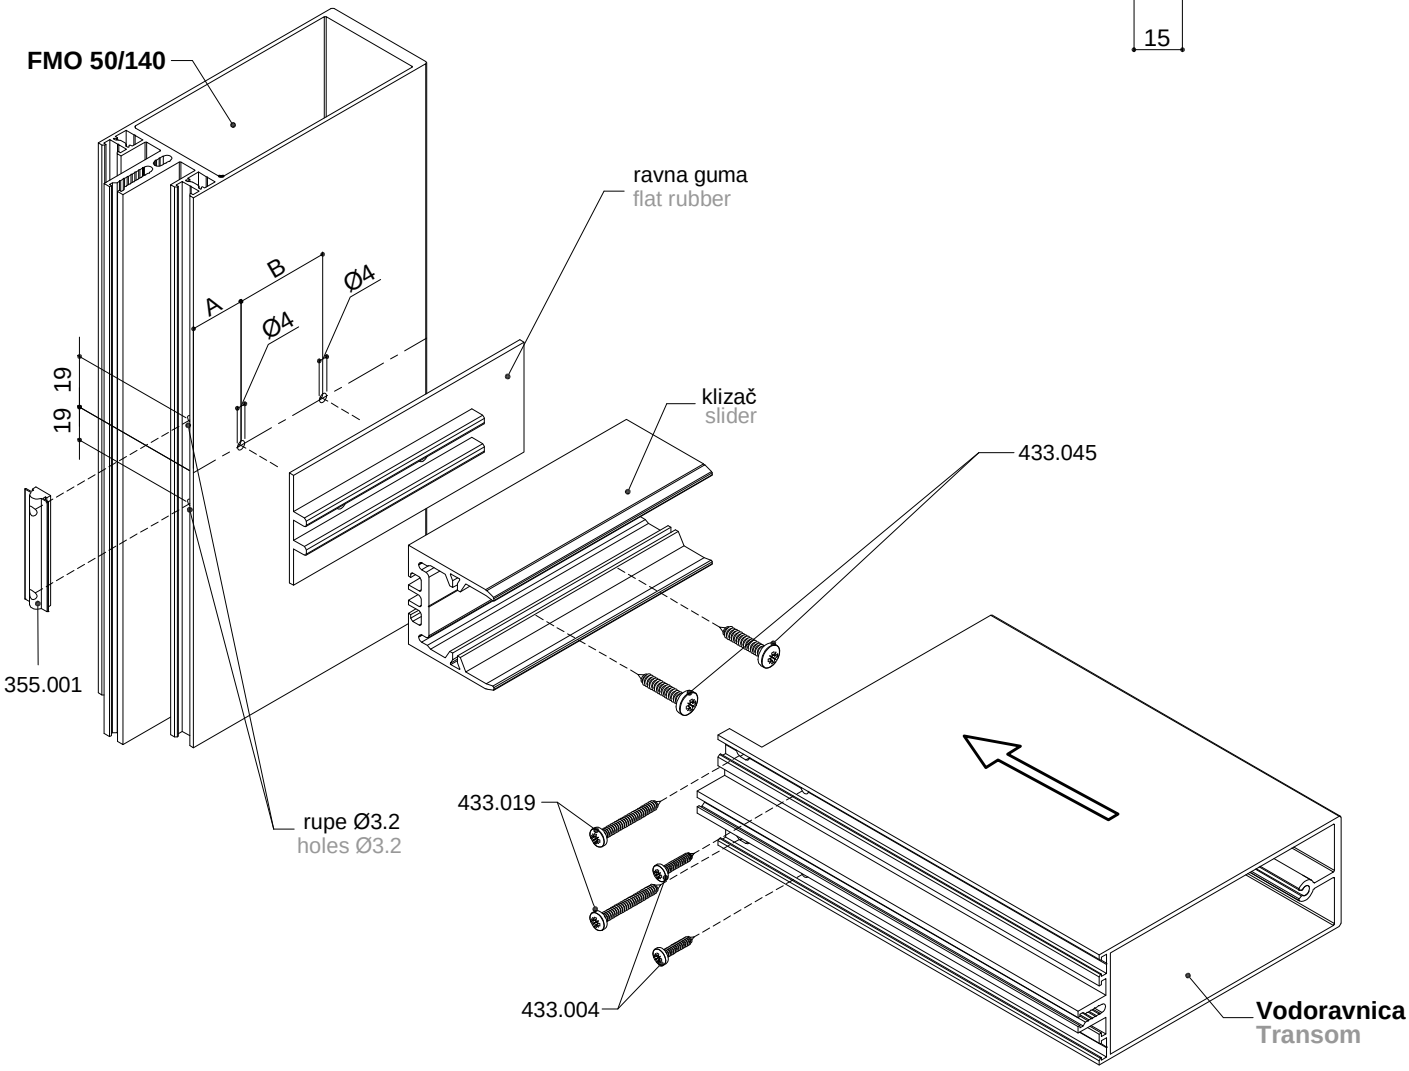


Vodoravnica Transom	Klizač Slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Ravna guma Flat rubber
FMV 50/138	721.214	25 mm	43 mm	-	361.011
FMV 50/118	721.209	25 mm	43 mm	-	361.004
FMV 50/88	721.208	20 mm	20 mm	-	361.003

- Obrada okomice **FMO 50/120** za vodoravnicu **FMV 50/118 ili manju** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/120 for transom FMV 50/118 or smaller (flat dilatation rubber)

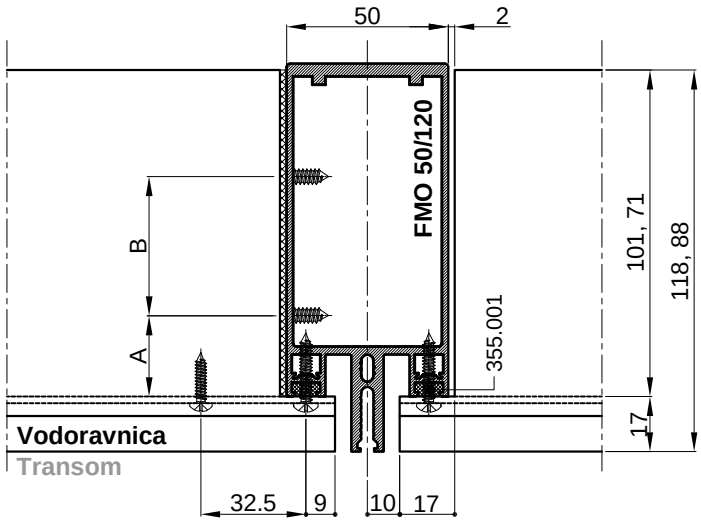


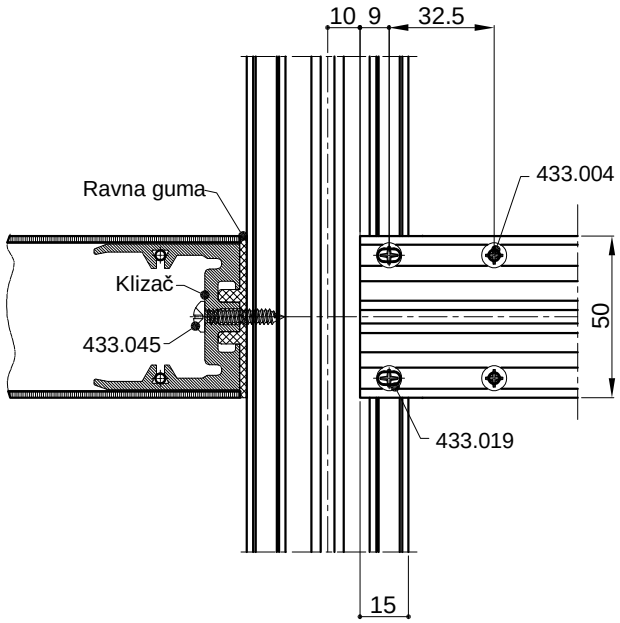


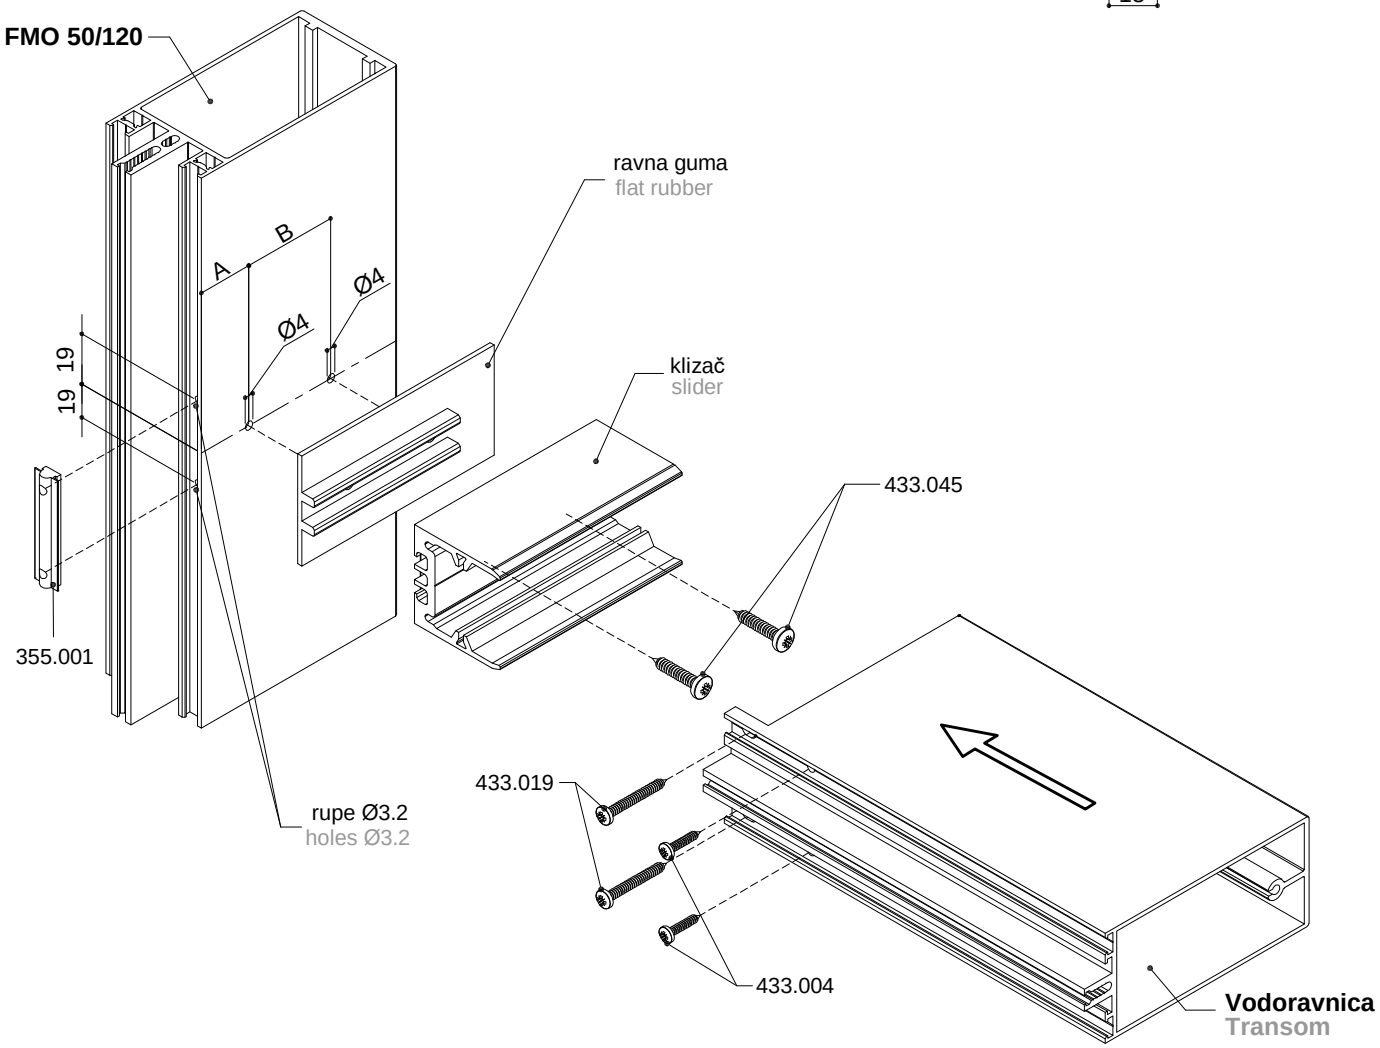


Vodoravnica Transom	Klizač Slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Ravna guma Flat rubber
FMV 50/118	721.209	25 mm	43 mm	-	361.004
FMV 50/88	721.208	20 mm	20 mm	-	361.003

- Obrada okomice **FMO 50/120-S** za vodoravnicu **FMV 50/118 ili manju** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/120-S for transom FMV 50/118 or smaller (flat dilatation rubber)

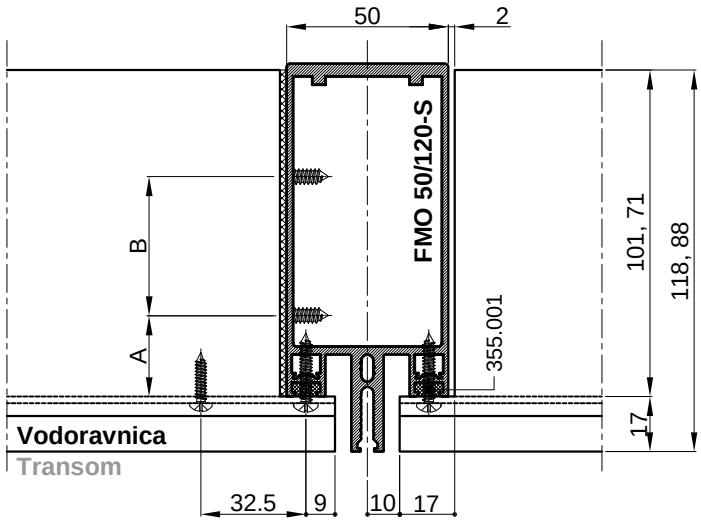


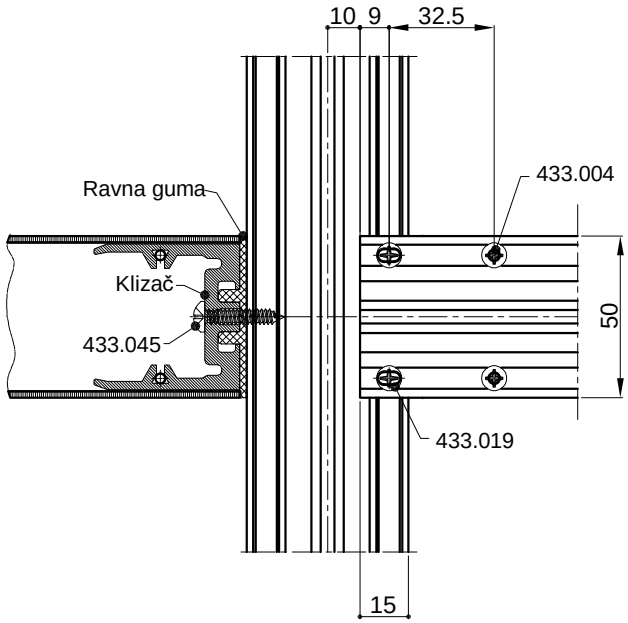


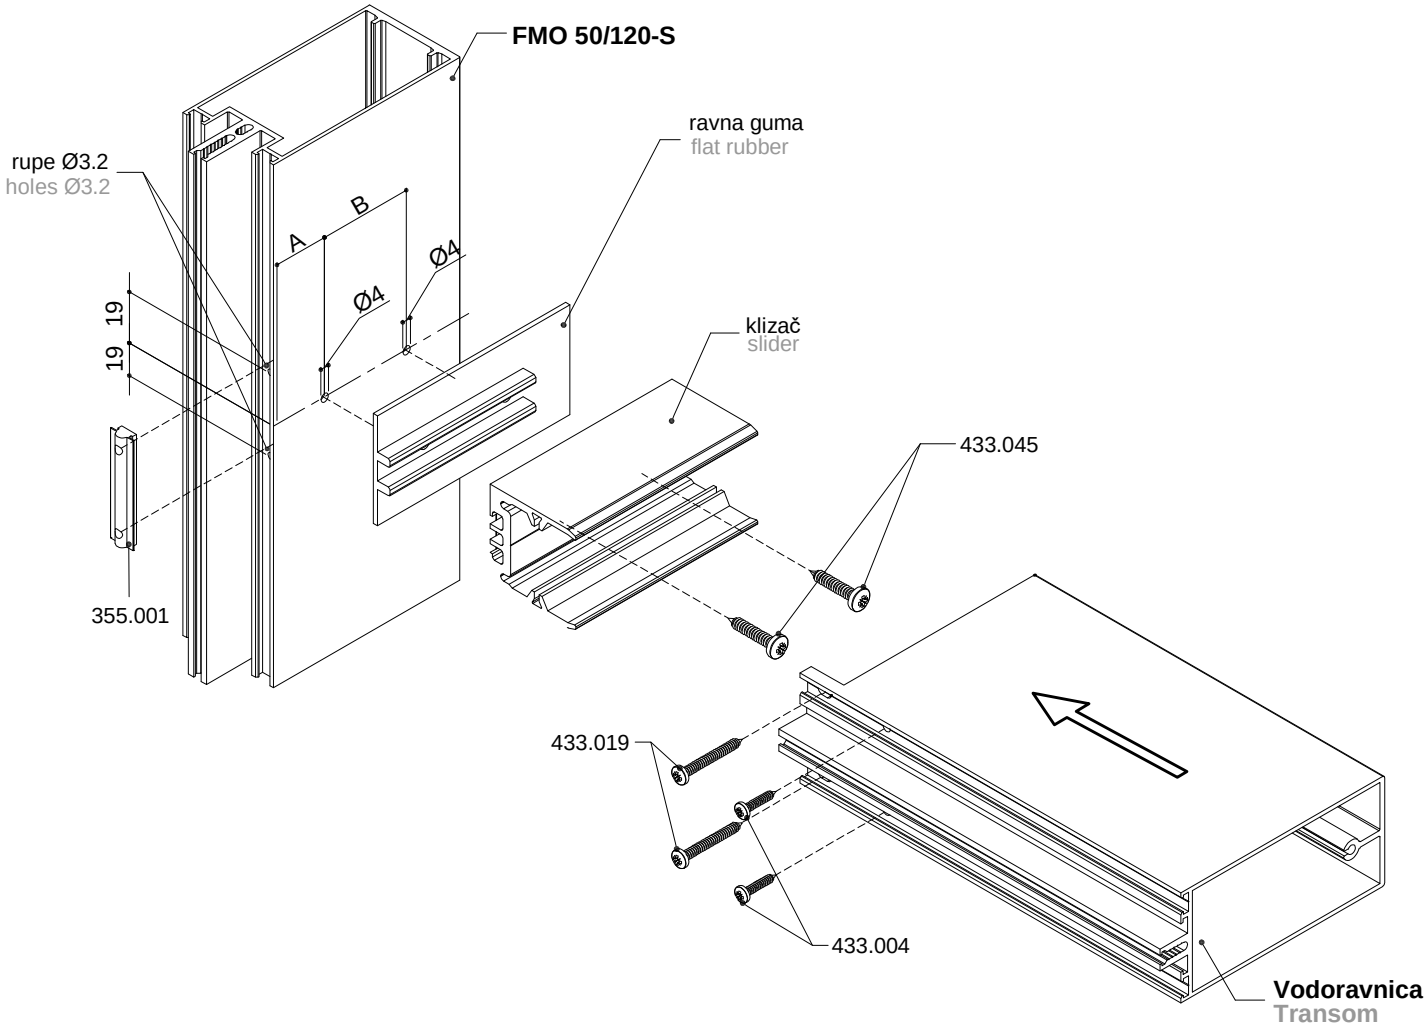


Vodoravnica Transom	Klizač Slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C	Ravna guma Flat rubber
FMV 50/118	721.209	25 mm	43 mm	-	361.004
FMV 50/88	721.208	20 mm	20 mm	-	361.003


- Obrada okomice **FMO 50/120-S** za spoj s **FMO 50/120-S** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/120-S for connection with FMO 50/120-S (flat dilatation rubber)

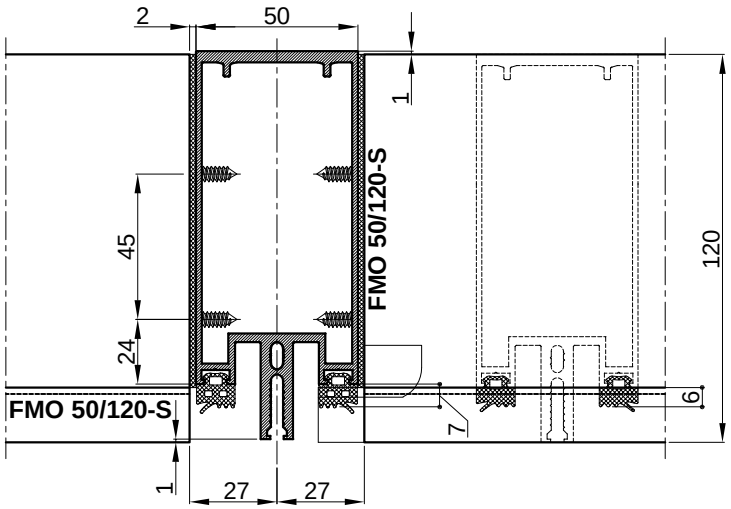


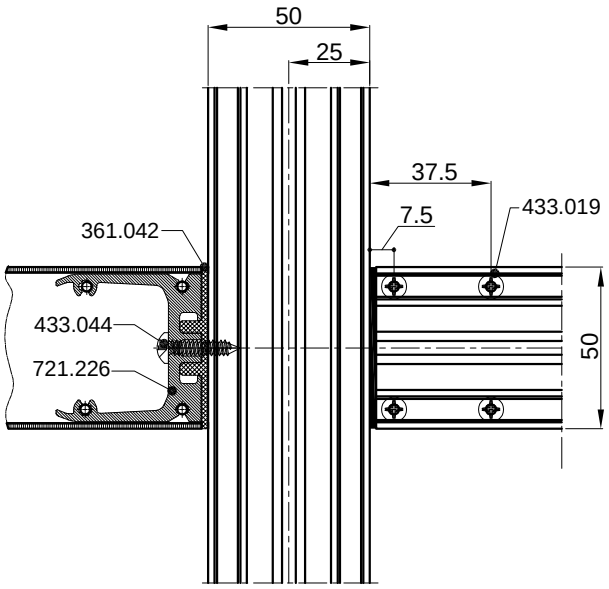


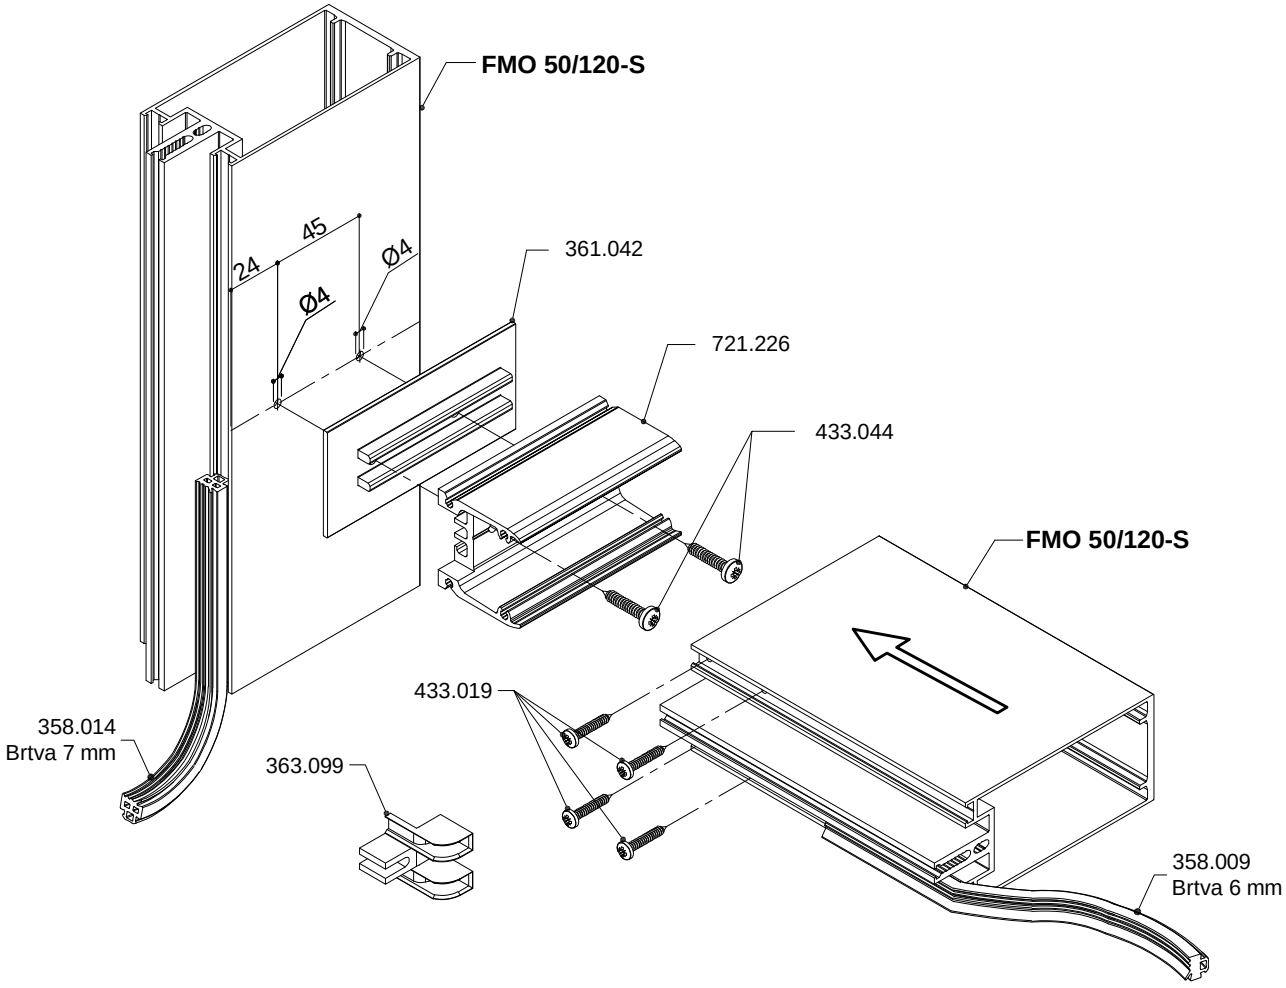


- Obrada okomice **FMO 50/90** za vodoravnicu **FMV 50/88** (ravni gumeni odstojnik)
- Processing of mullion FMO 50/90 for transom FMV 50/88 (flat dilatation rubber)

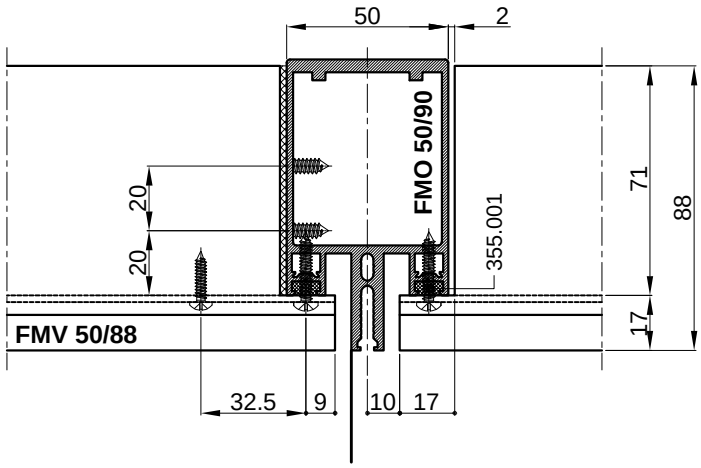


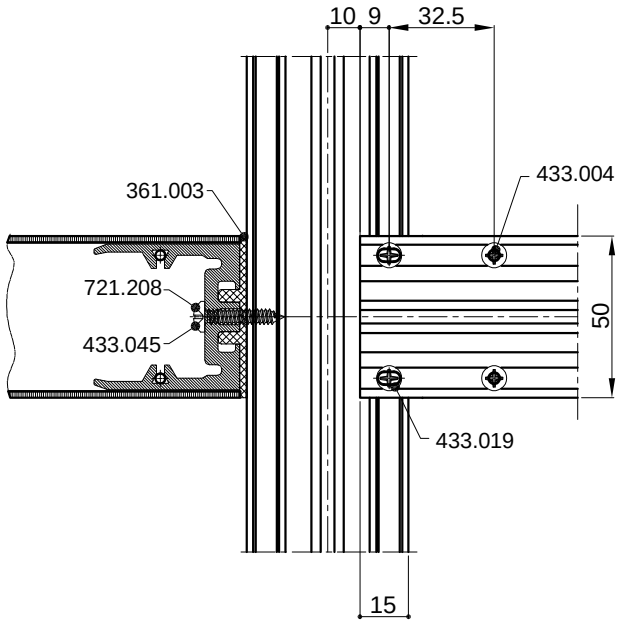


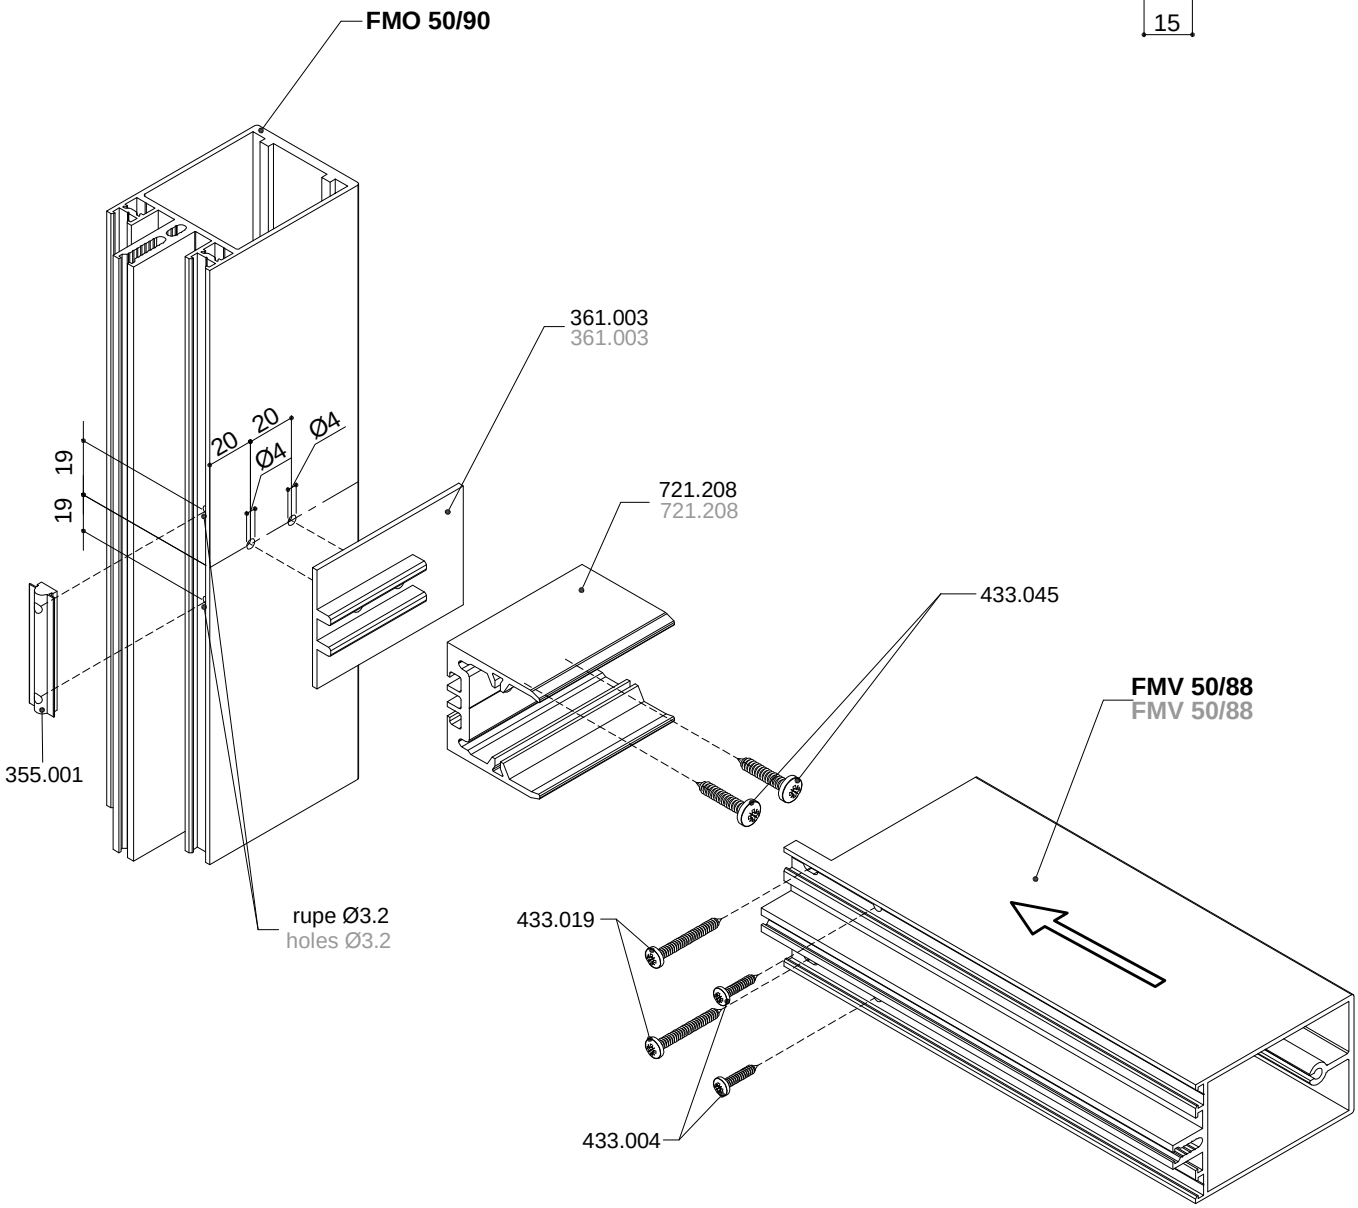


- Obrada okomice **FMO 50/200-S** za spoj s **FMO 50/200-S** (bez gumenog odstojnika)
- Processing of mullion FMO 50/200-S for connection with FMO 50/200-S (without dilatation rubber)

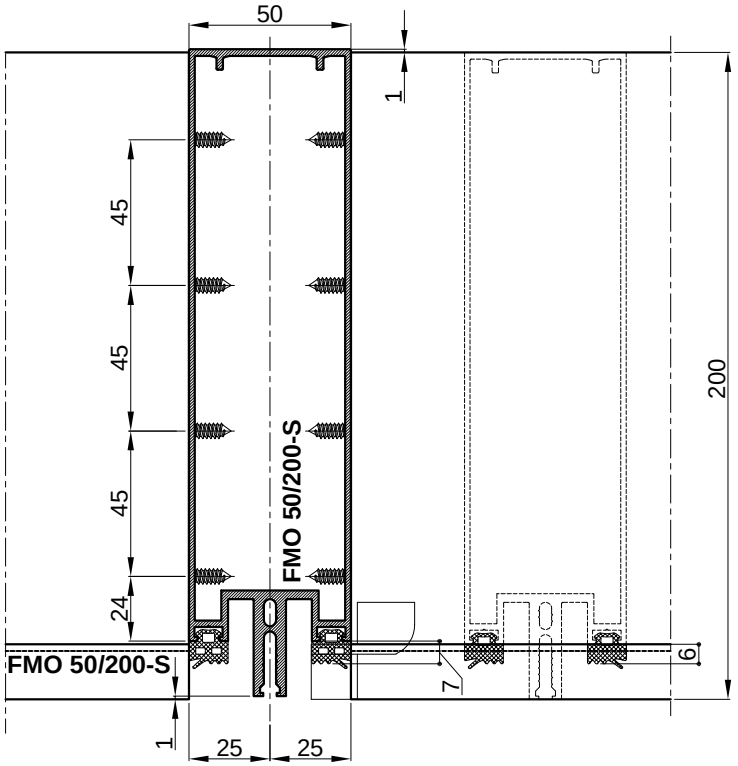


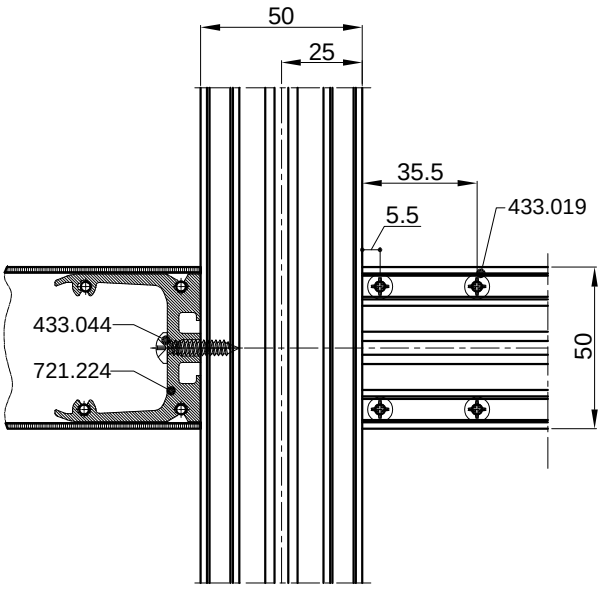


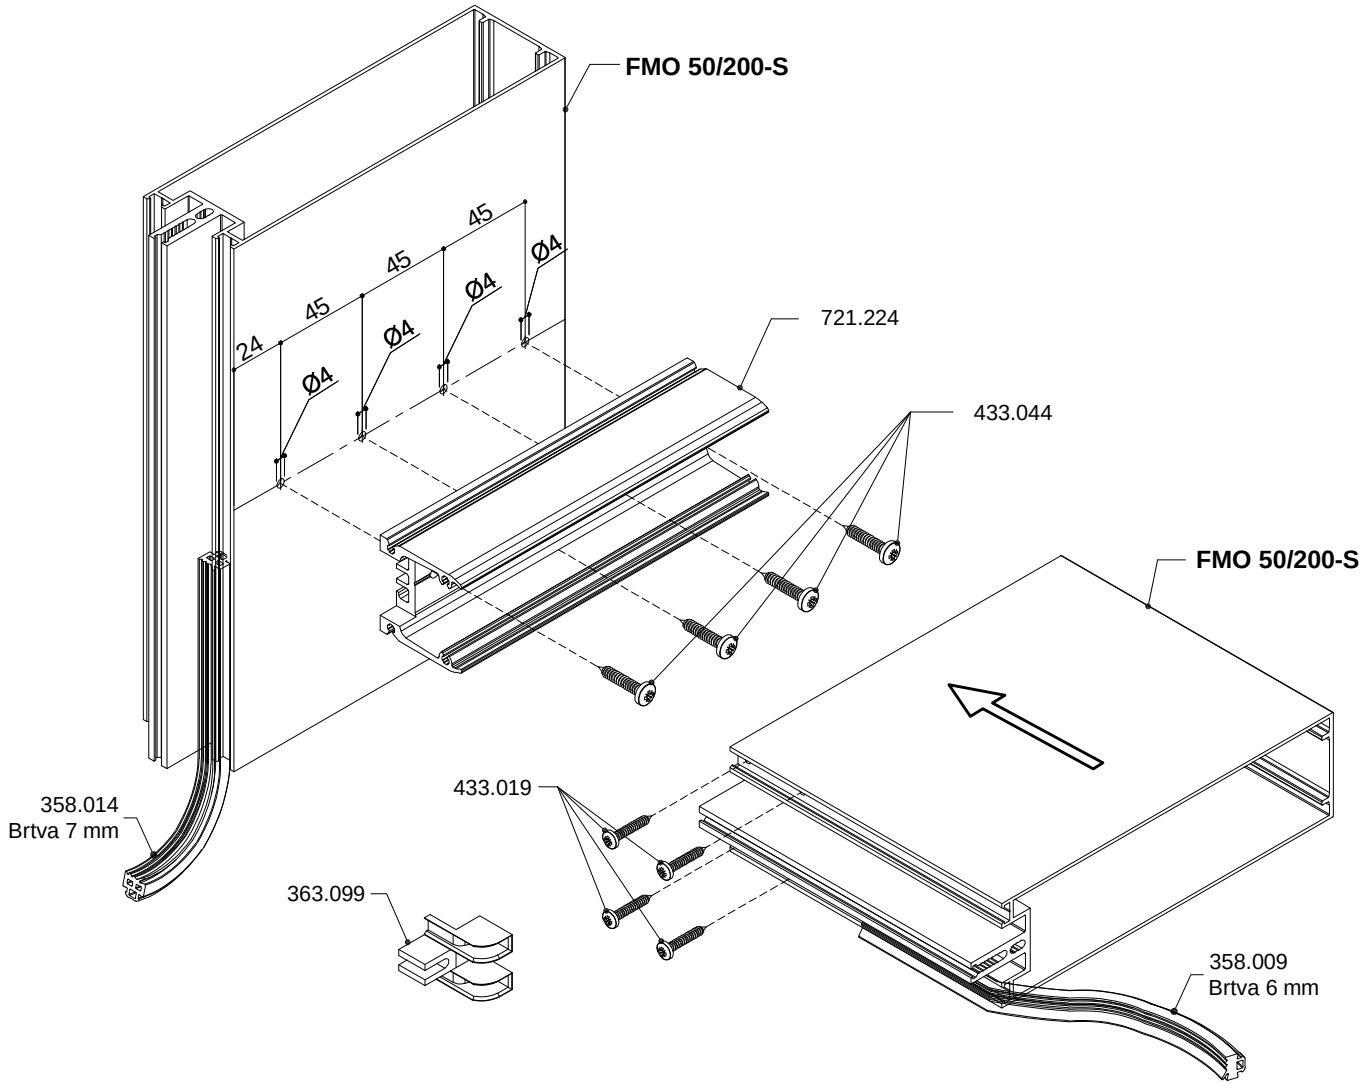

- Obrada okomice **FMO 50/200-S** za spoj s **FMO 50/160-S ili manju** (bez gumenog odstojnika)
- Processing of mullion FMO 50/200-S for connection with FMO 50/160-S or smaller (without dilatation rubber)

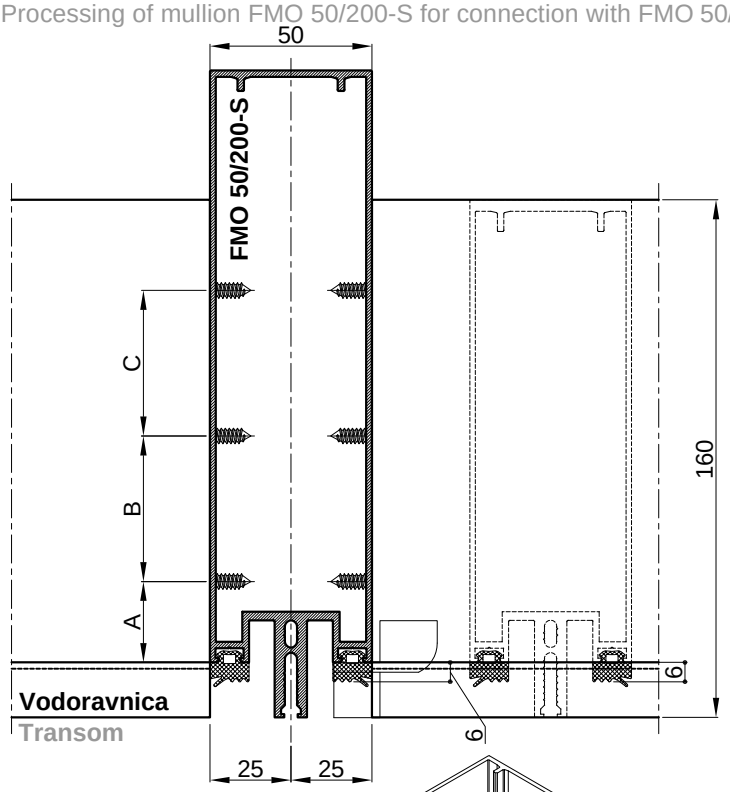


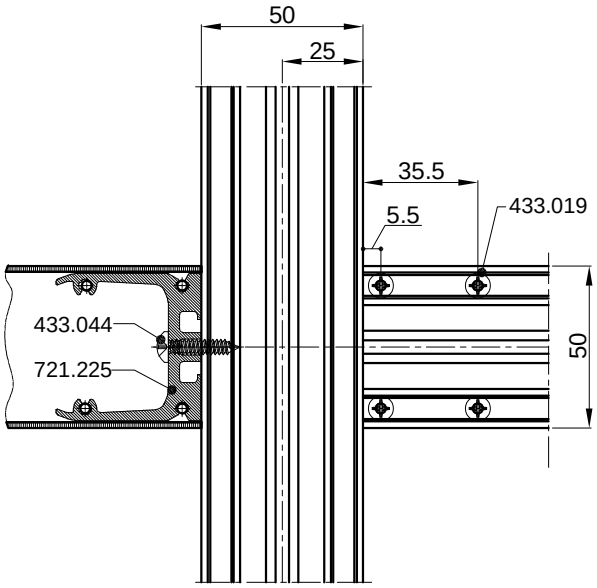


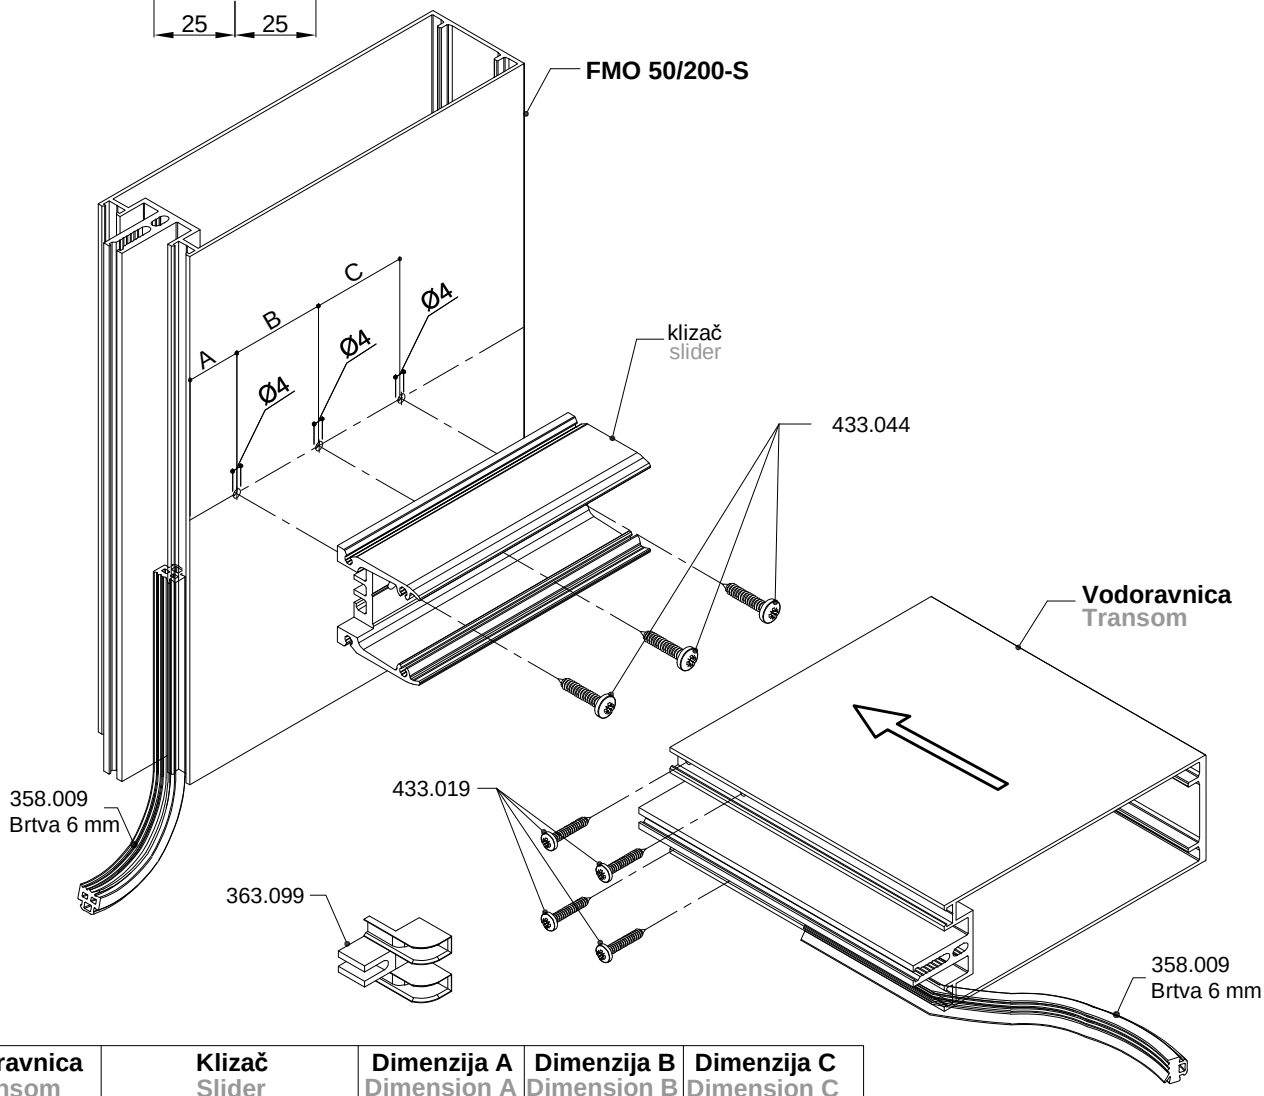


Vodoravnica Transom	Klizač Slider	Dimenzija A Dimension A	Dimenzija B Dimension B	Dimenzija C Dimension C
FMO 50/160-S	721.225	25 mm	45 mm	45 mm
FMO 50/120-S	721.226	25 mm	45 mm	-


- Obrada okomice **FMO 50/160-S** za spoj s **FMO 50/160-S** (bez gumenog odstojnika)
- Processing of mullion FMO 50/160-S for connection with FMO 50/160-S (without dilatation rubber)

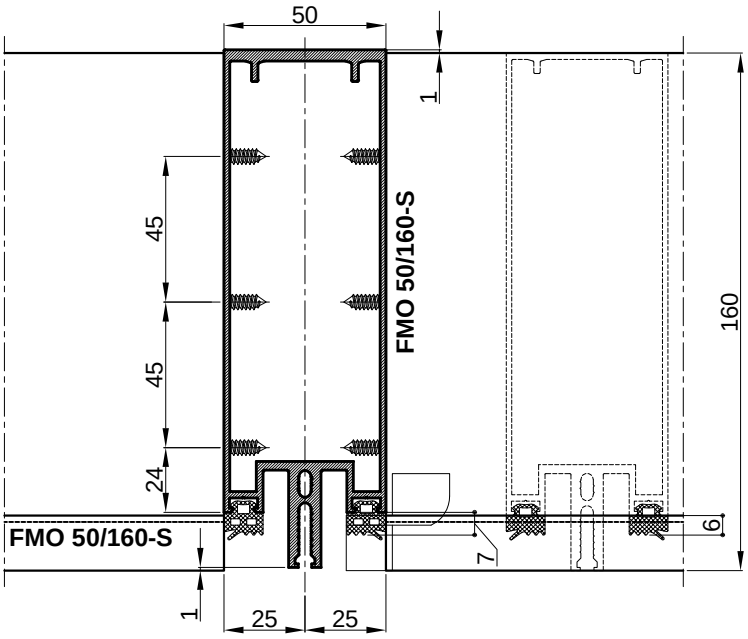


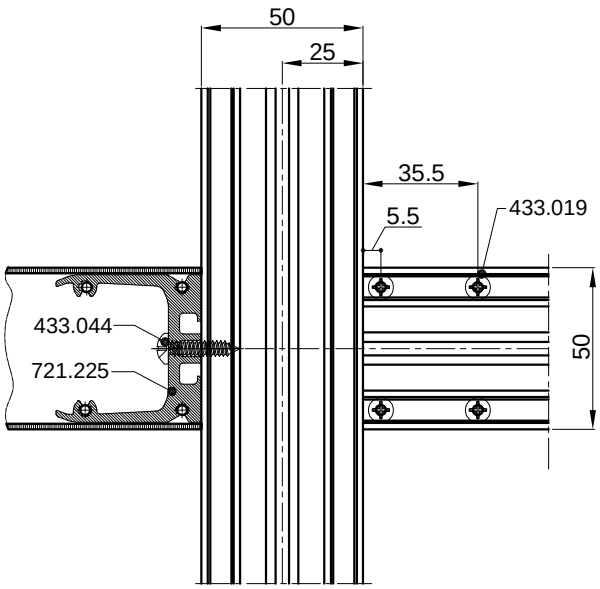

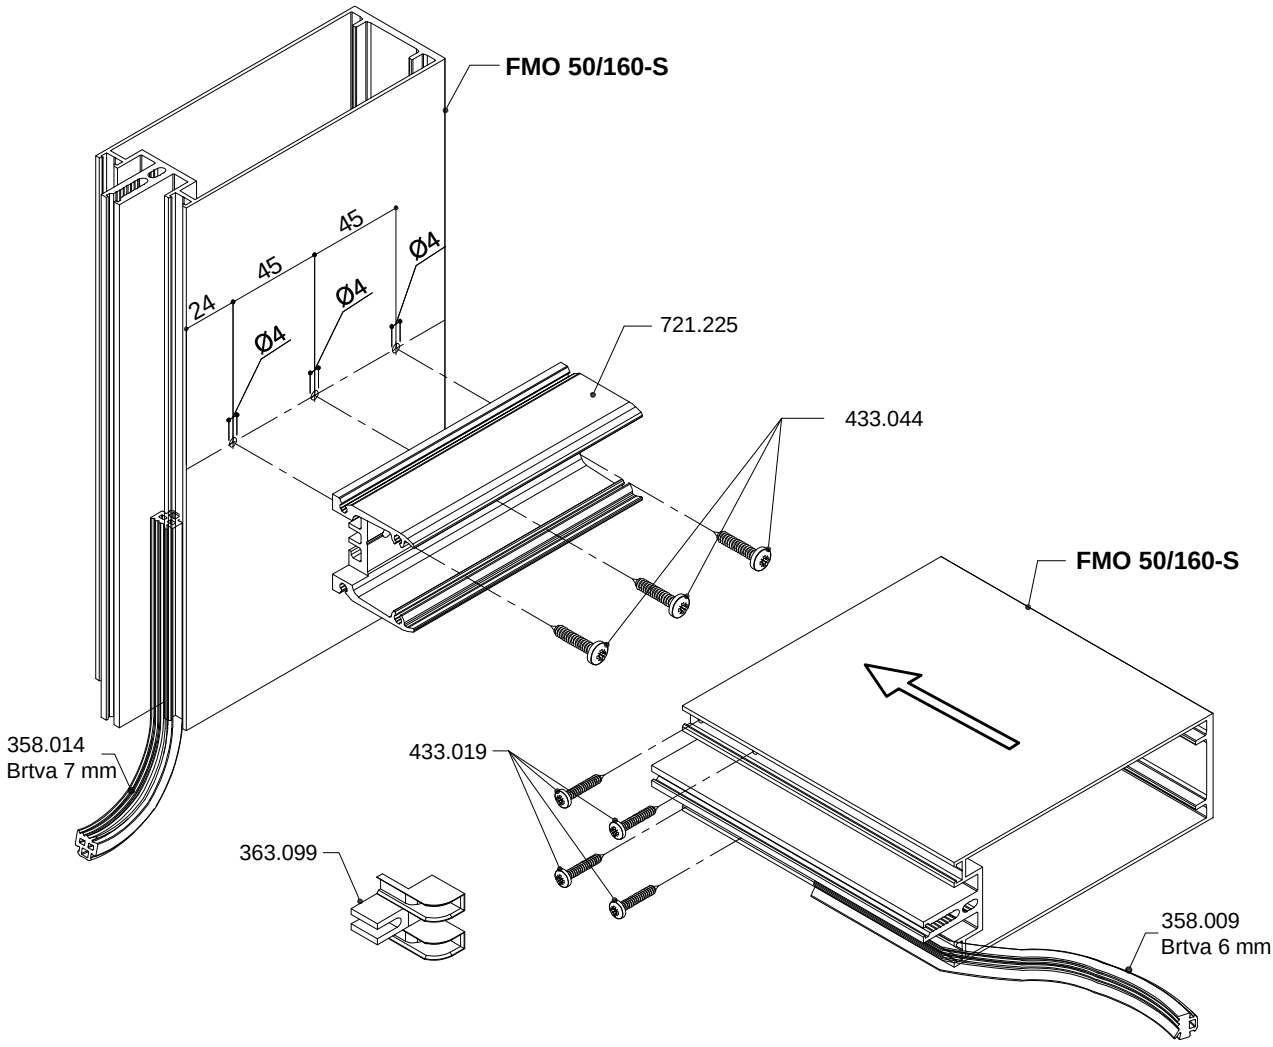



- Obrada okomice **FMO 50/160-S** za spoj s **FMO 50/120-S** (bez gumenog odstojnika)
- Processing of mullion FMO 50/160-S for connection with FMO 50/120-S (without dilatation rubber)

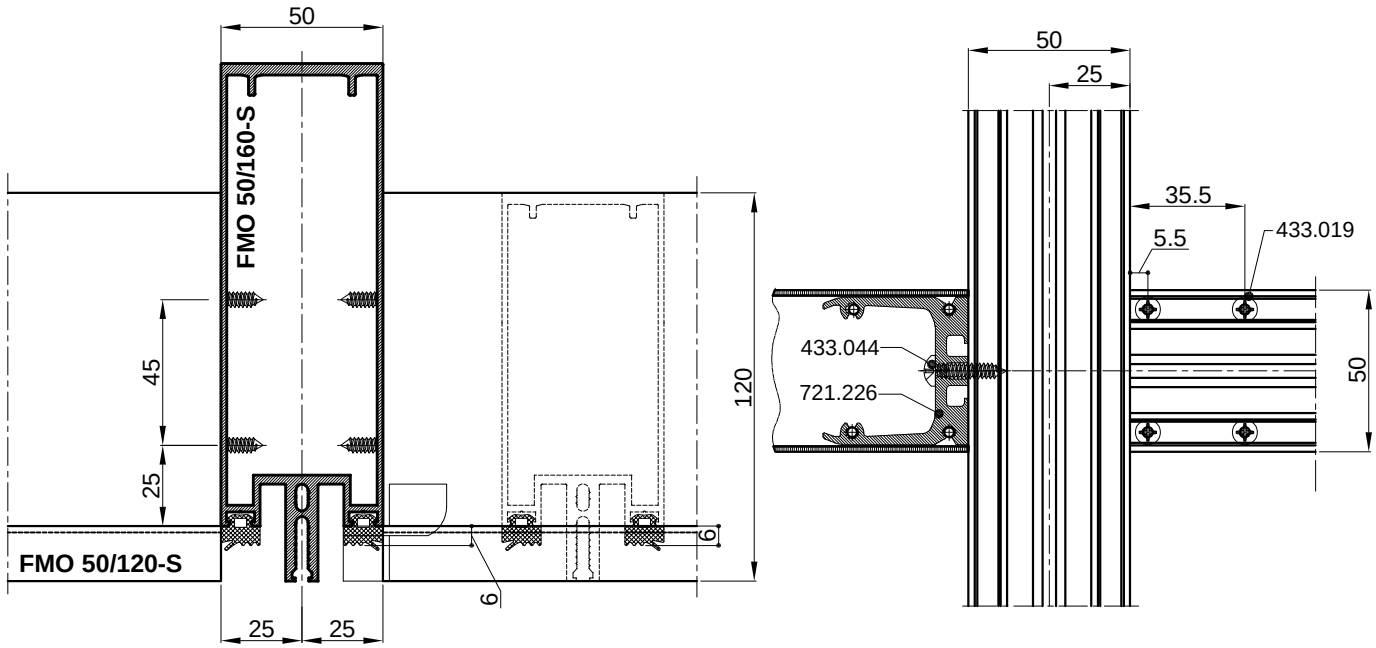

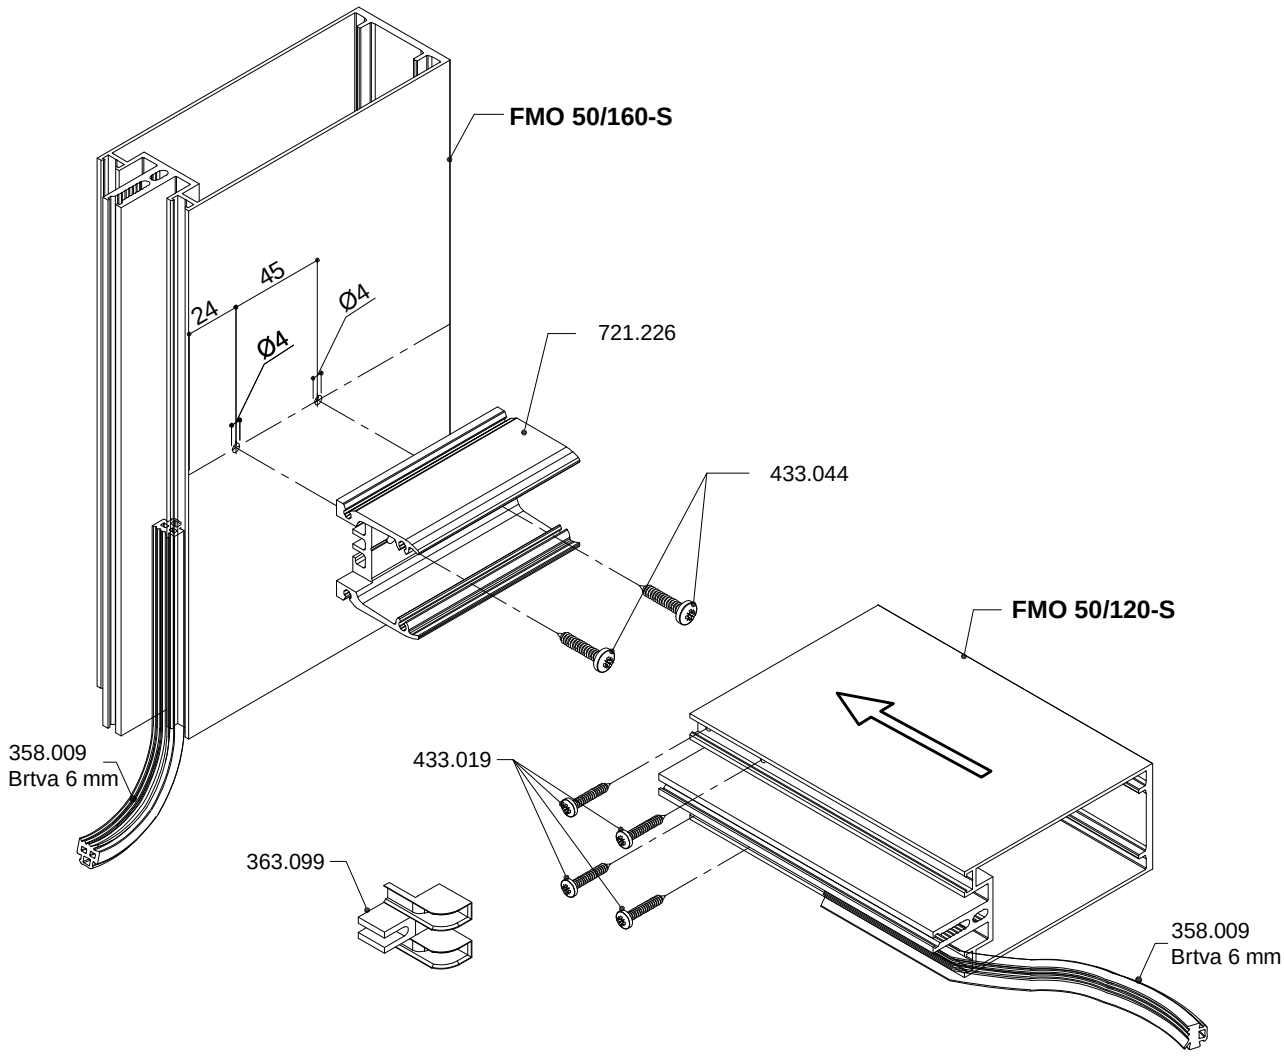



- Obrada okomice **FMO 50/120-S** za spoj s **FMO 50/120-S** (bez gumenog odstojnika)
- Processing of mullion FMO 50/120-S for connection with FMO 50/120-S (without dilatation rubber)

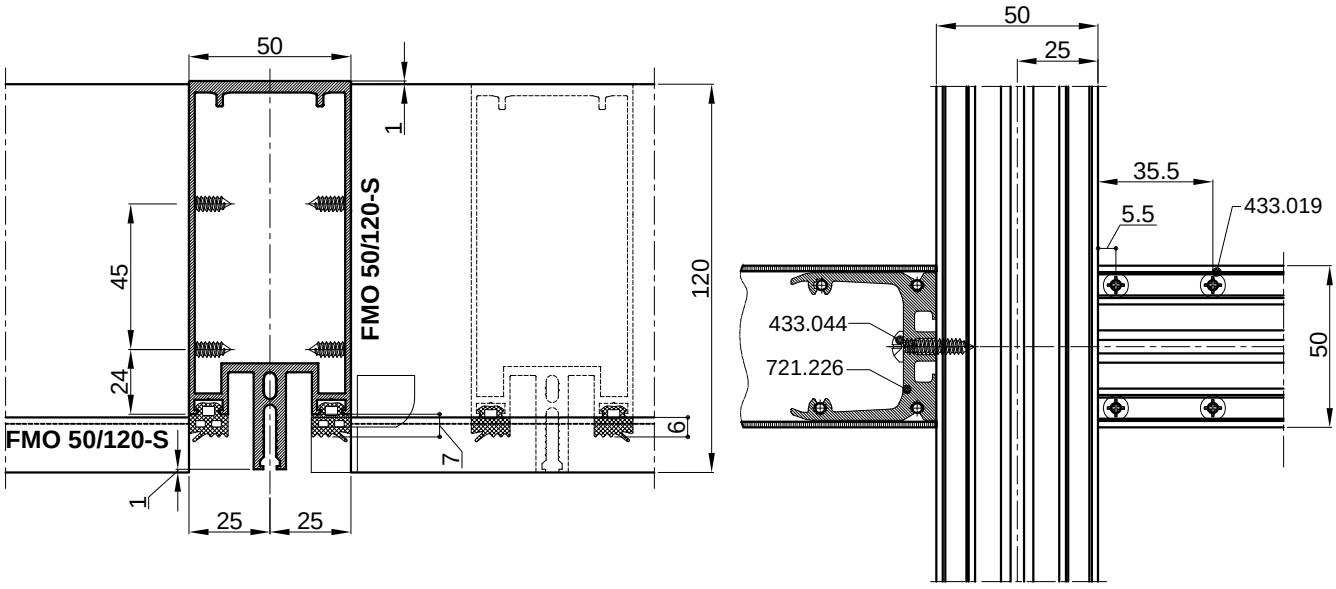


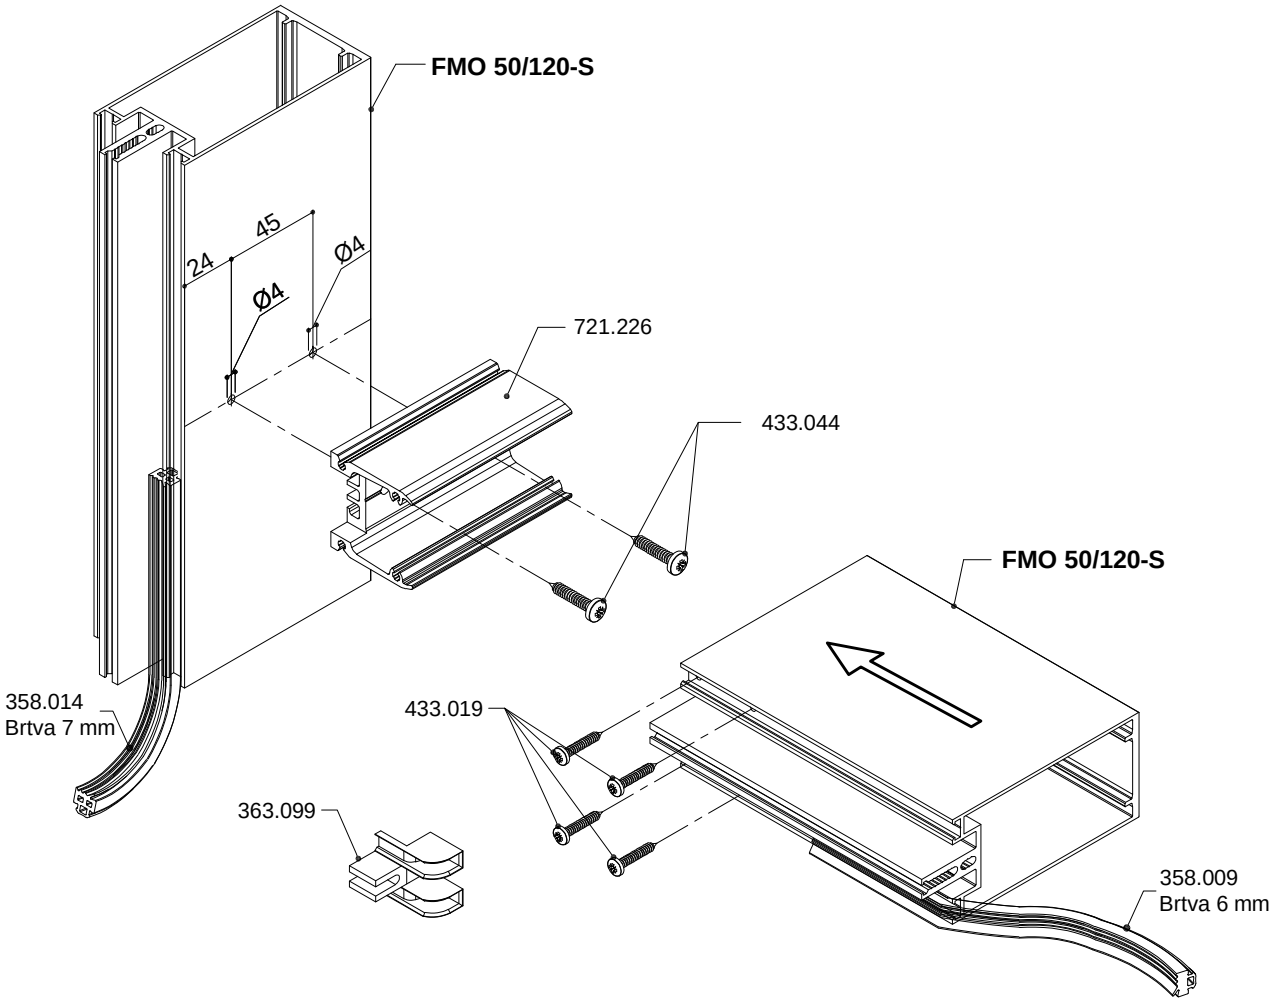

- Obrada okomice **FMO 50/270** za vodoravnicu **FMV 50/268 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/270 for transom FMV 50/268 or smaller (connector 385.006-without dilatation rubber)

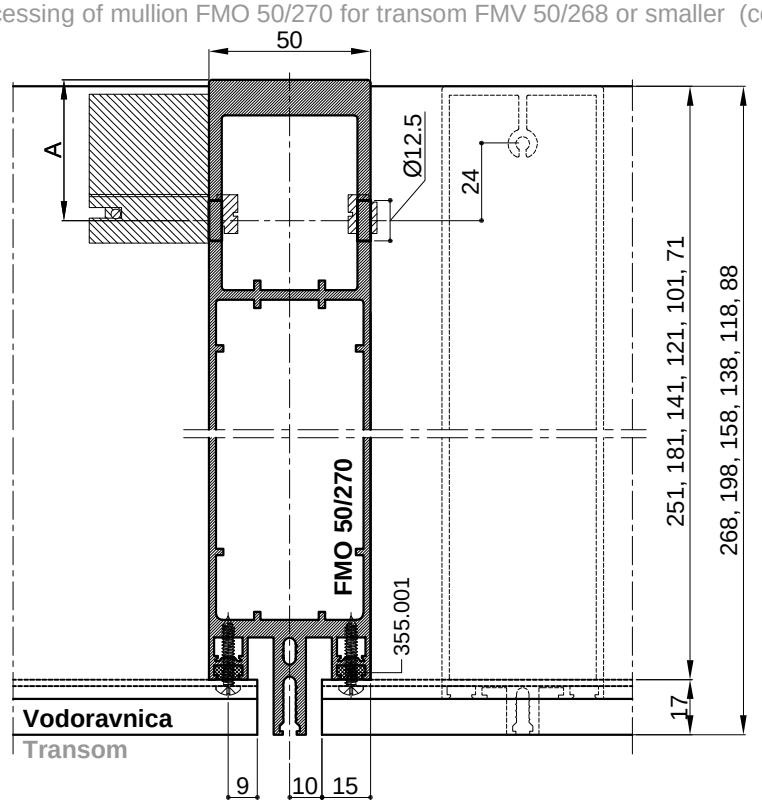


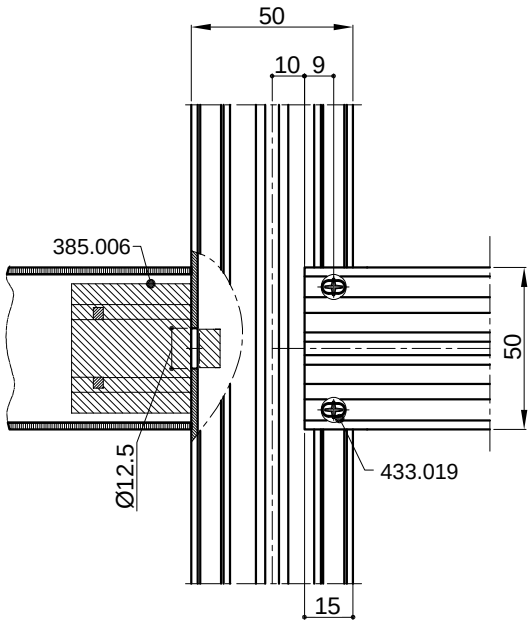


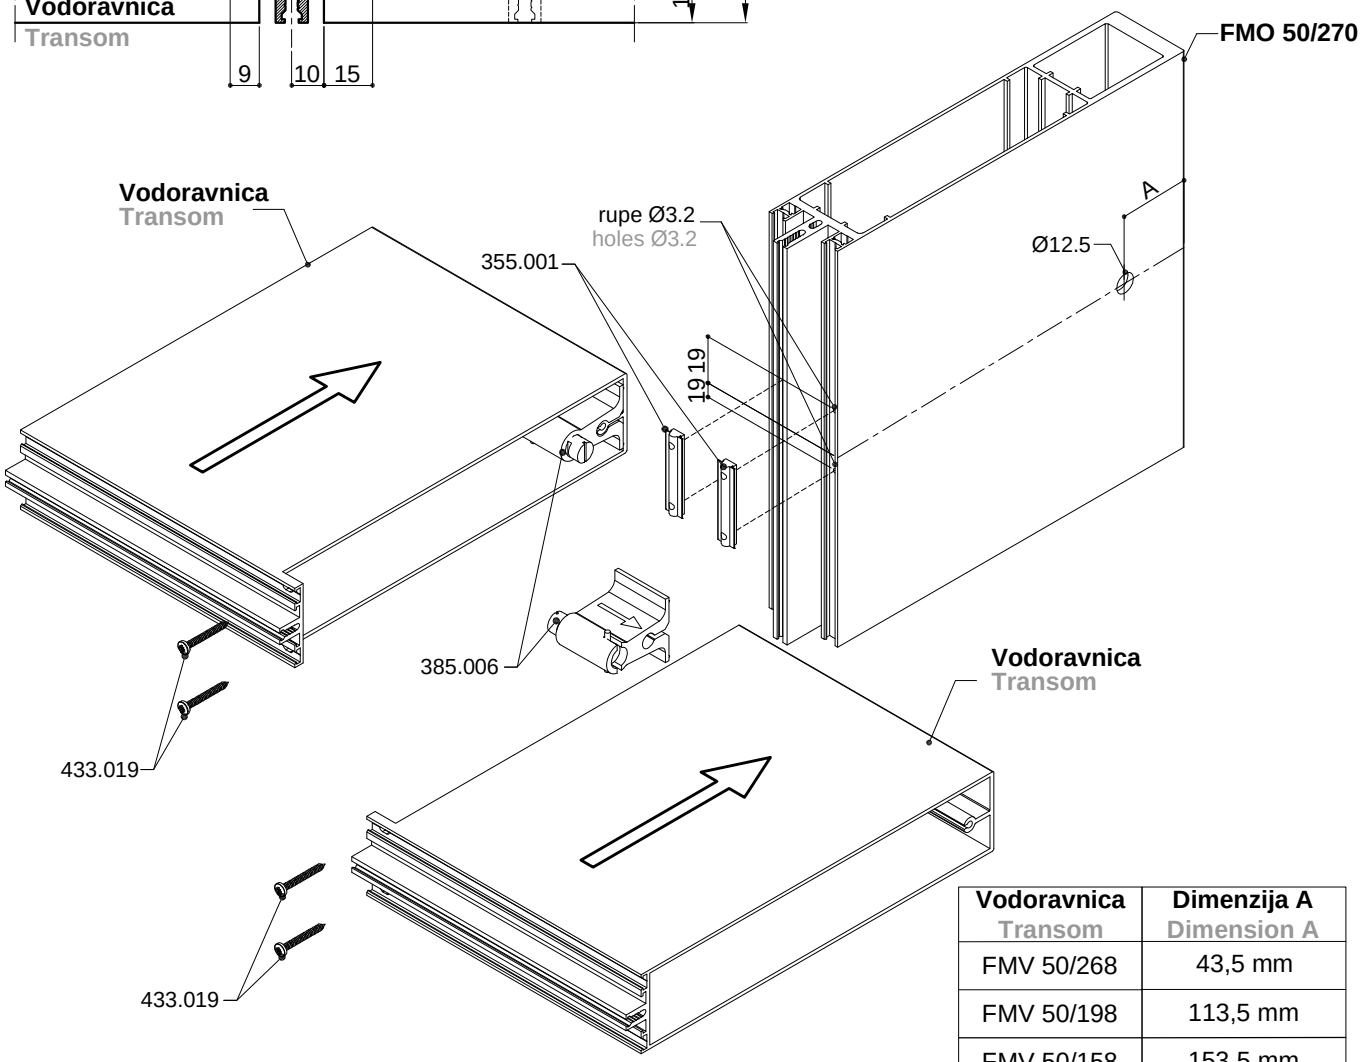


Vodoravnica Transom	Dimenzija A Dimension A
FMV 50/268	43,5 mm
FMV 50/198	113,5 mm
FMV 50/158	153,5 mm
FMV 50/138	174,5 mm
FMV 50/118	193,5 mm
FMV 50/88	223,5 mm

- Obrada okomice **FMO 50/200** za vodoravnicu **FMV 50/198 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/200 for transom FMV 50/198 or smaller (connector 385.006-without dilatation rubber)

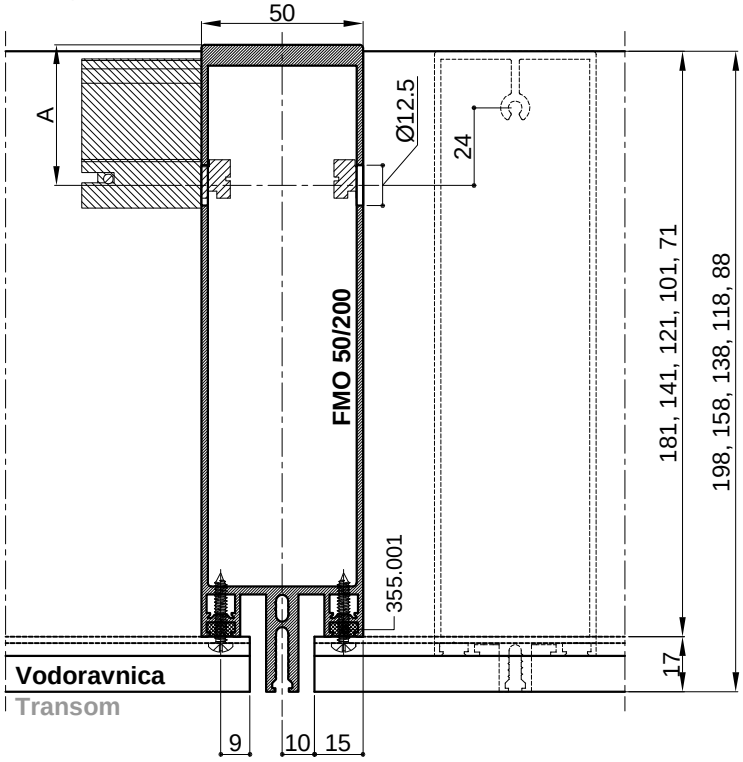


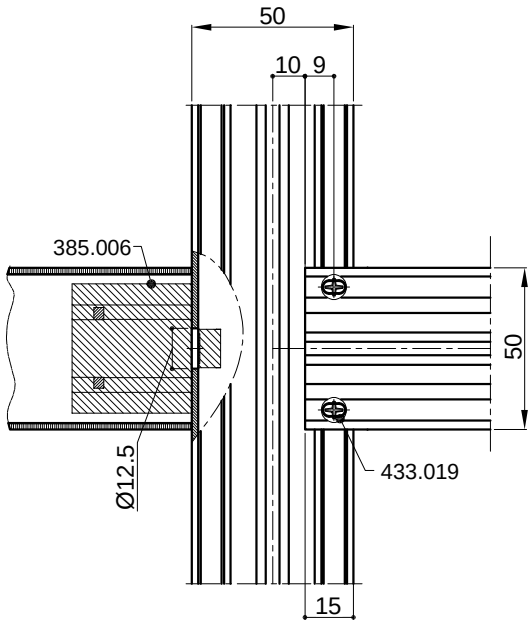


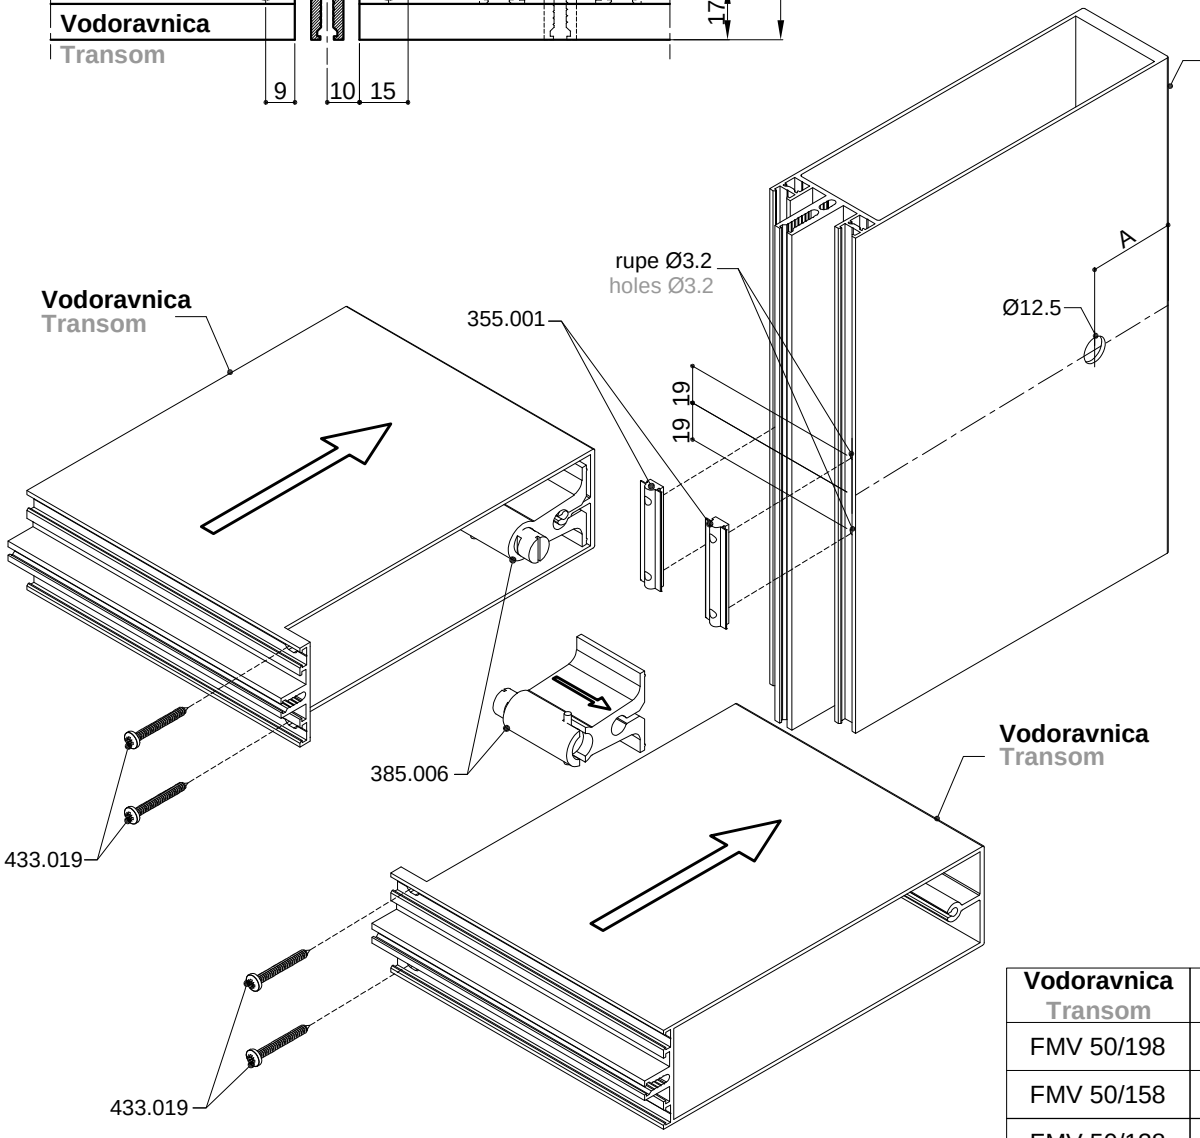


Vodoravnica Transom	Dimenzija A Dimension A
FMV 50/198	43,5 mm
FMV 50/158	83,5 mm
FMV 50/138	104,5 mm
FMV 50/118	123,5 mm
FMV 50/88	153,5 mm

- Obrada okomice **FMO 50/200-S** za vodoravnicu **FMV 50/198 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/200-S for transom FMV 50/198 or smaller (connector 385.006-without dilatation rubber)

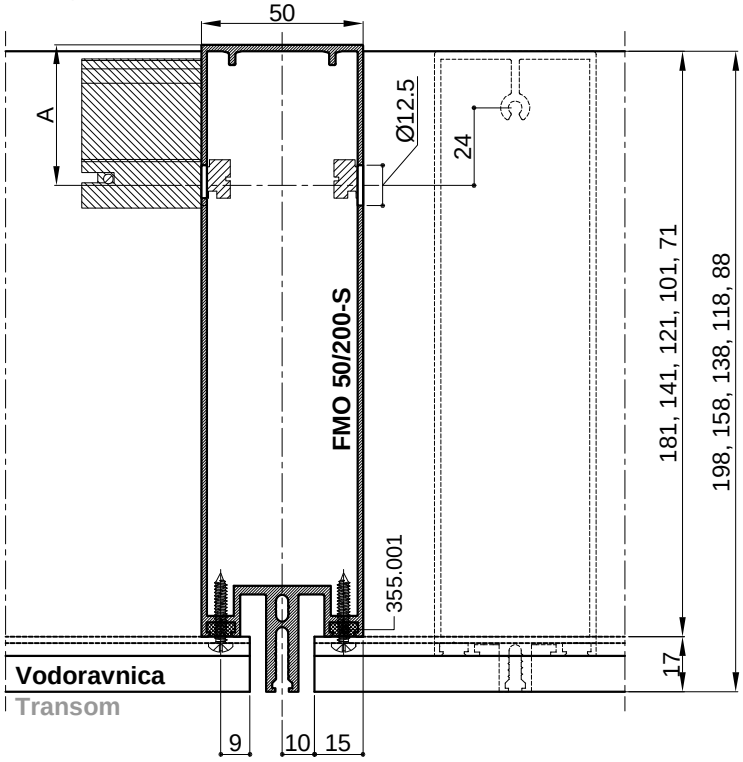


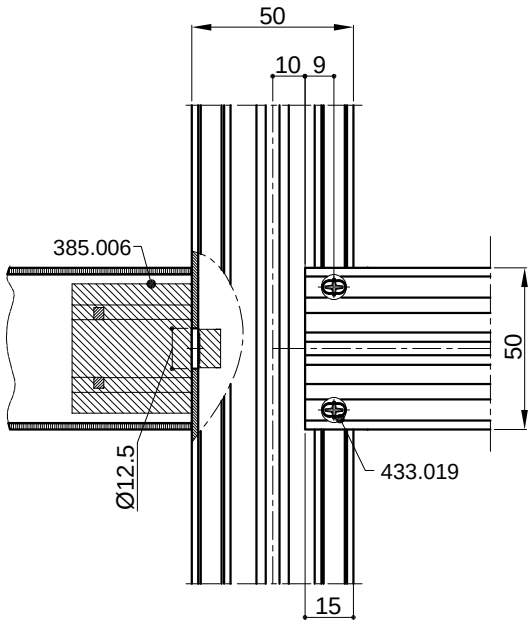


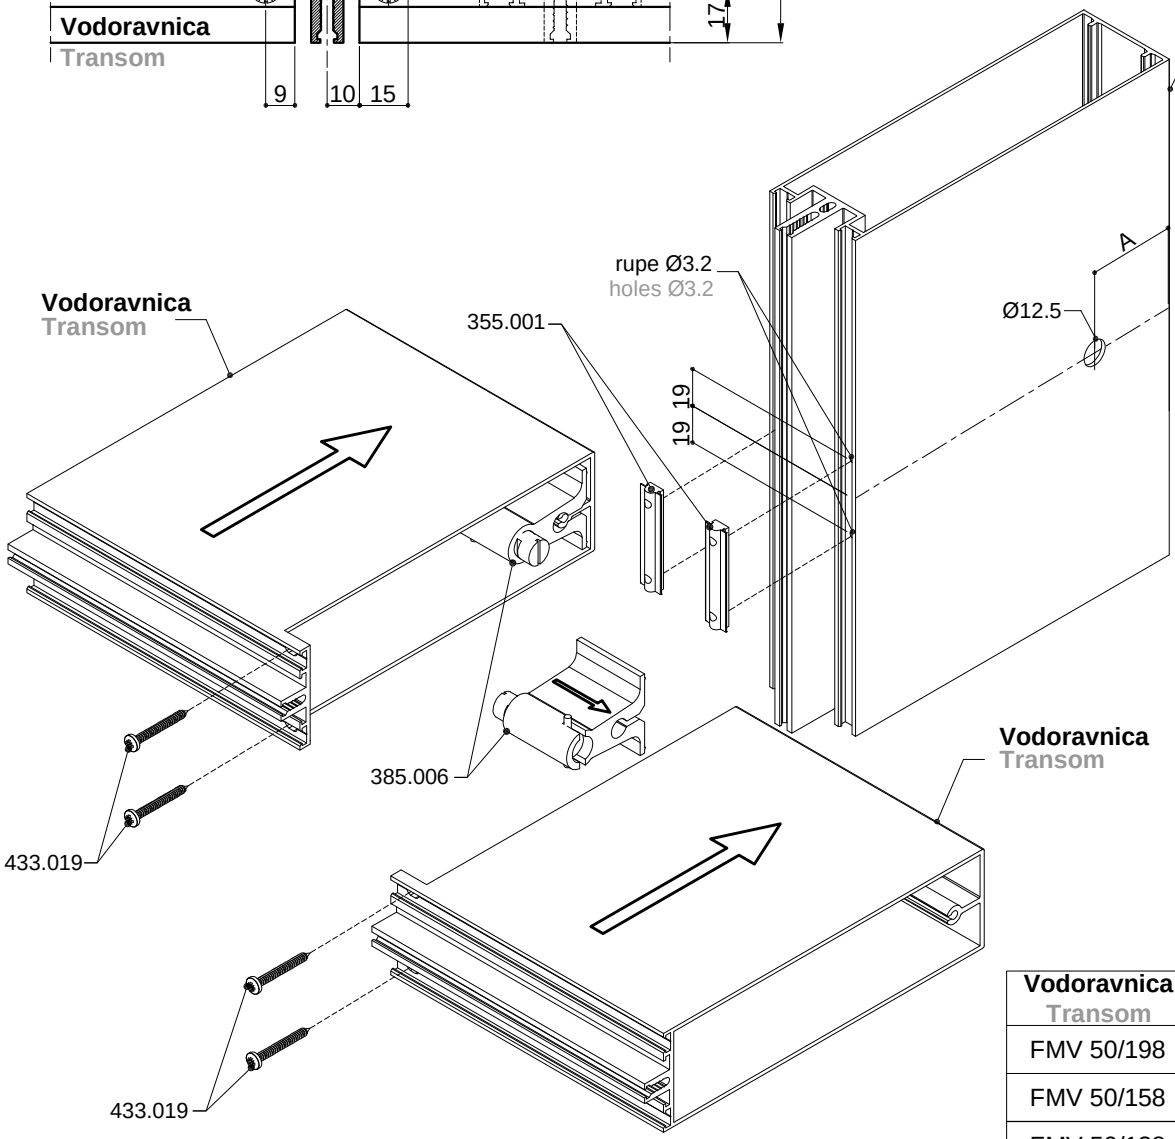


Vodoravnica Transom	**Dimenzija A** Dimension A
FMV 50/198	43,5 mm
FMV 50/158	83,5 mm
FMV 50/138	104,5 mm
FMV 50/118	123,5 mm
FMV 50/88	153,5 mm

- Obrada okomice **FMO 50/160** za vodoravnicu **FMV 50/158 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/160 for transom FMV 50/158 or smaller (connector 385.006-without dilatation rubber)

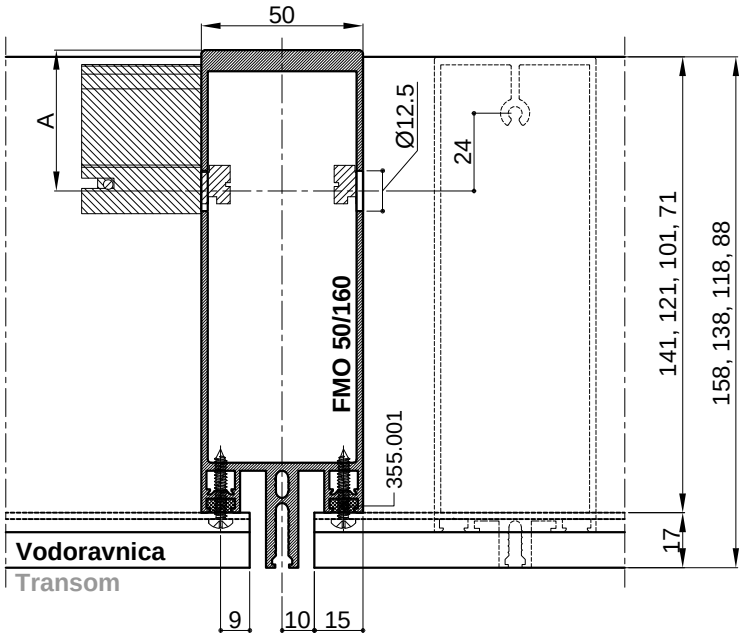


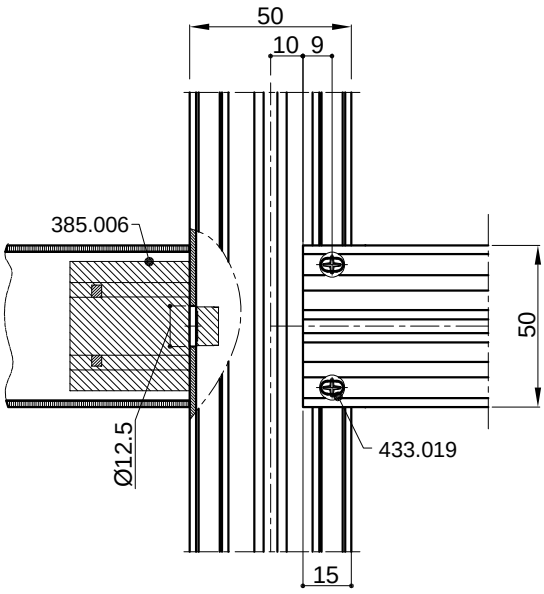


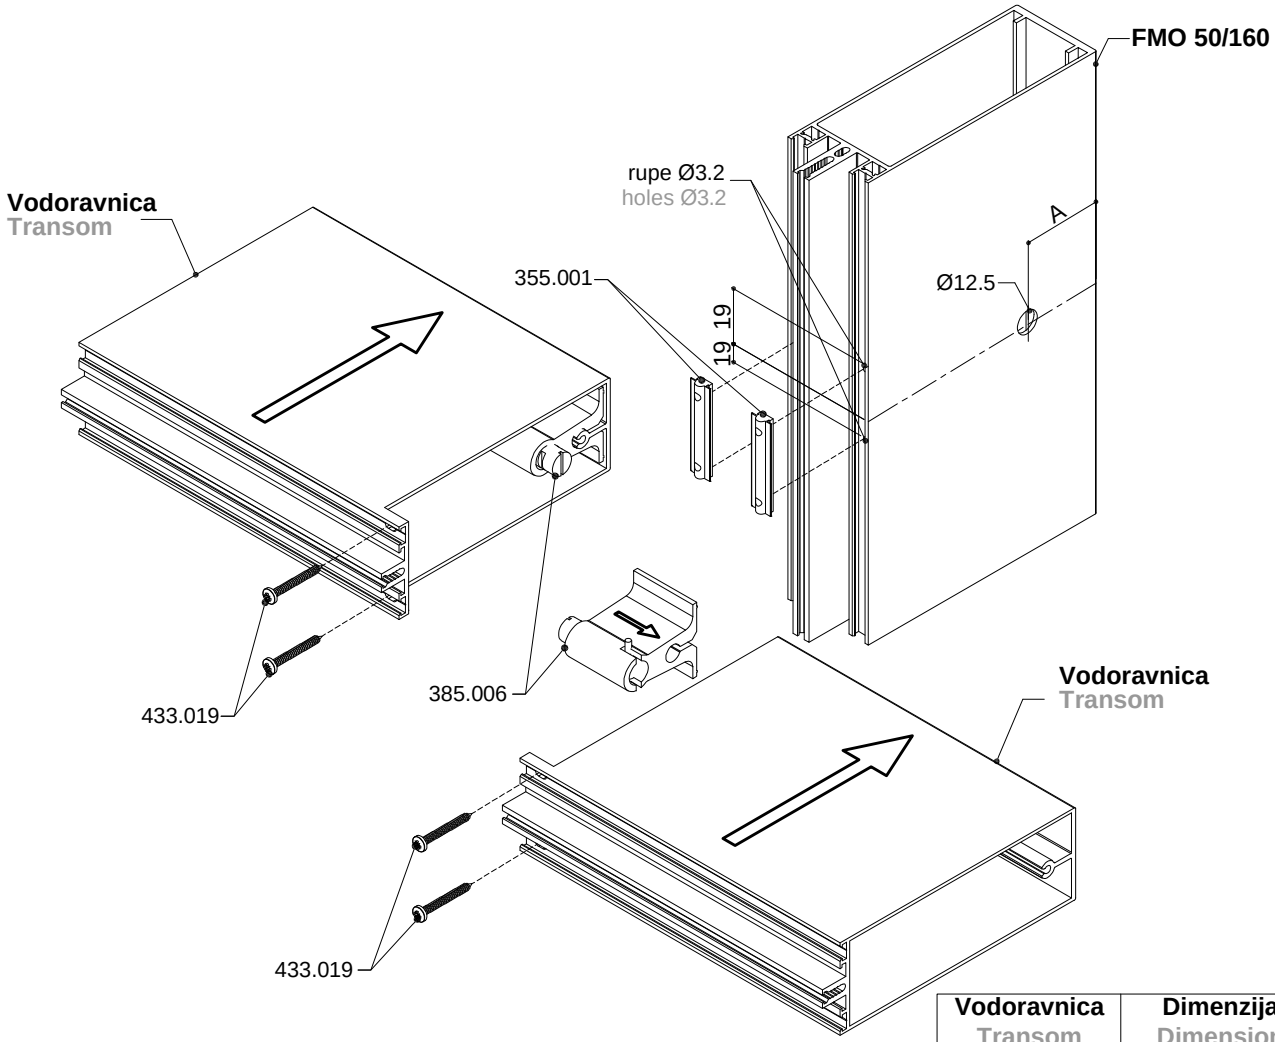


Vodoravnica Transom	Dimenzija A Dimension A
FMV 50/158	43,5 mm
FMV 50/138	64,5 mm
FMV 50/118	83,5 mm
FMV 50/88	113,5 mm

- Obrada okomice **FMO 50/160-S** za vodoravnicu **FMV 50/158 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/160-S for transom FMV 50/158 or smaller (connector 385.006-without dilatation rubber)

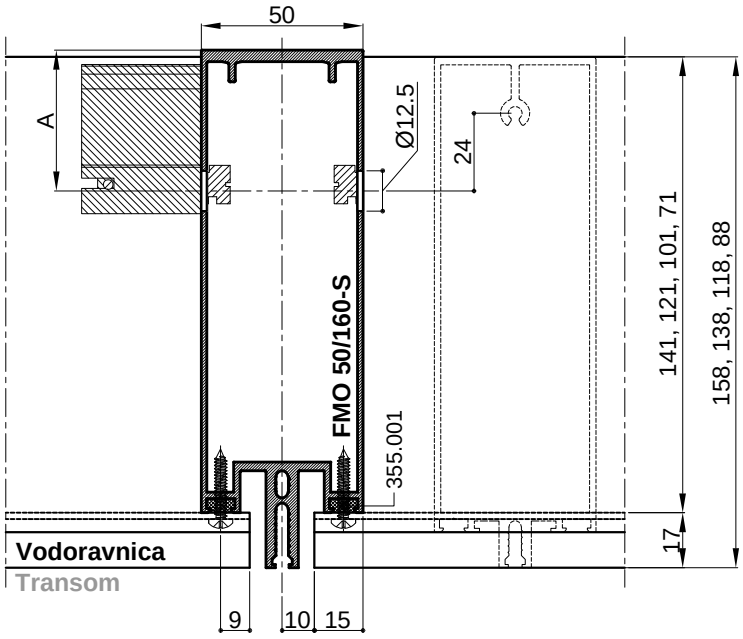


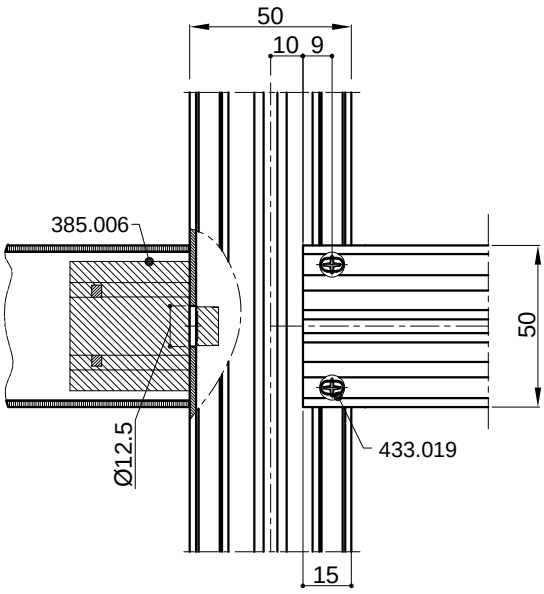


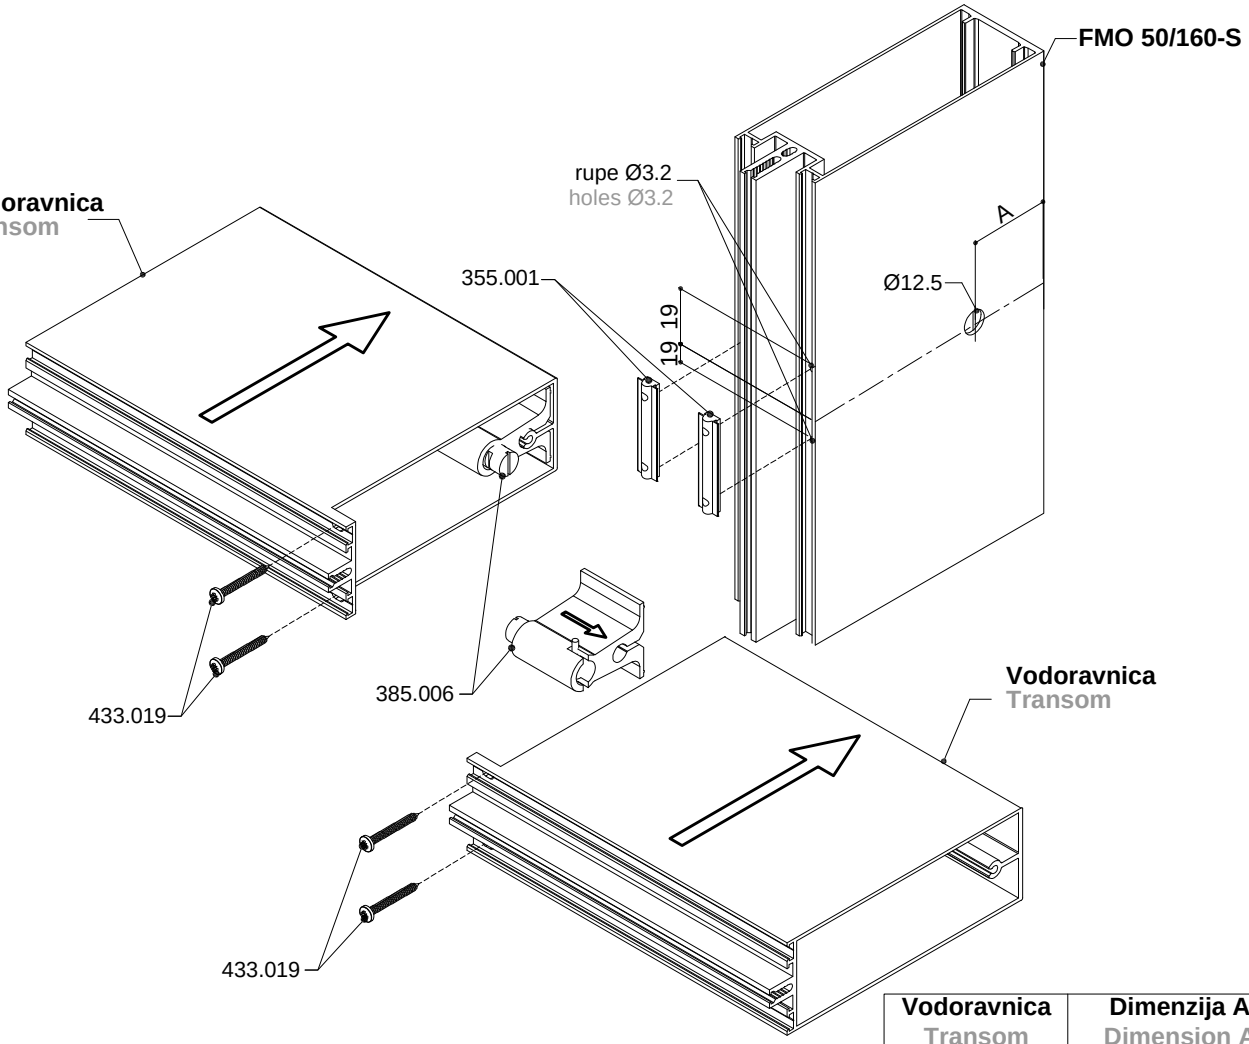


Vodoravnica Transom	Dimenzija A Dimension A
FMV 50/158	43,5 mm
FMV 50/138	64,5 mm
FMV 50/118	83,5 mm
FMV 50/88	113,5 mm

- Obrada okomice **FMO 50/140** za vodoravnicu **FMV 50/138 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/140 for transom FMV 50/138 or smaller (connector 385.006-without dilatation rubber)

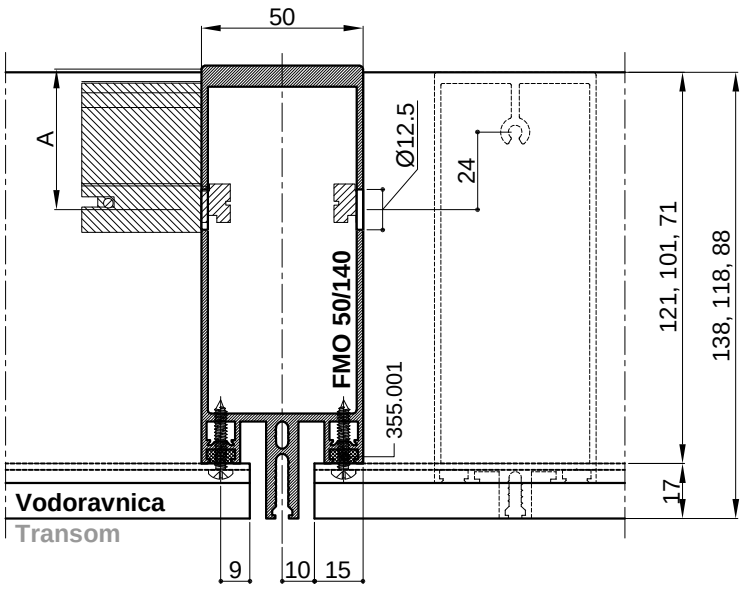


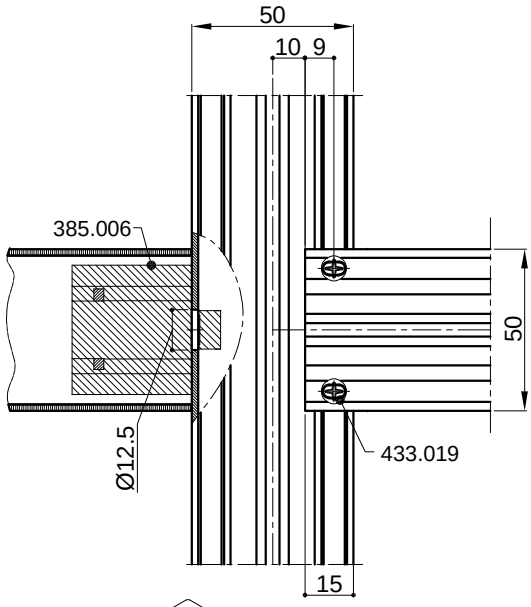


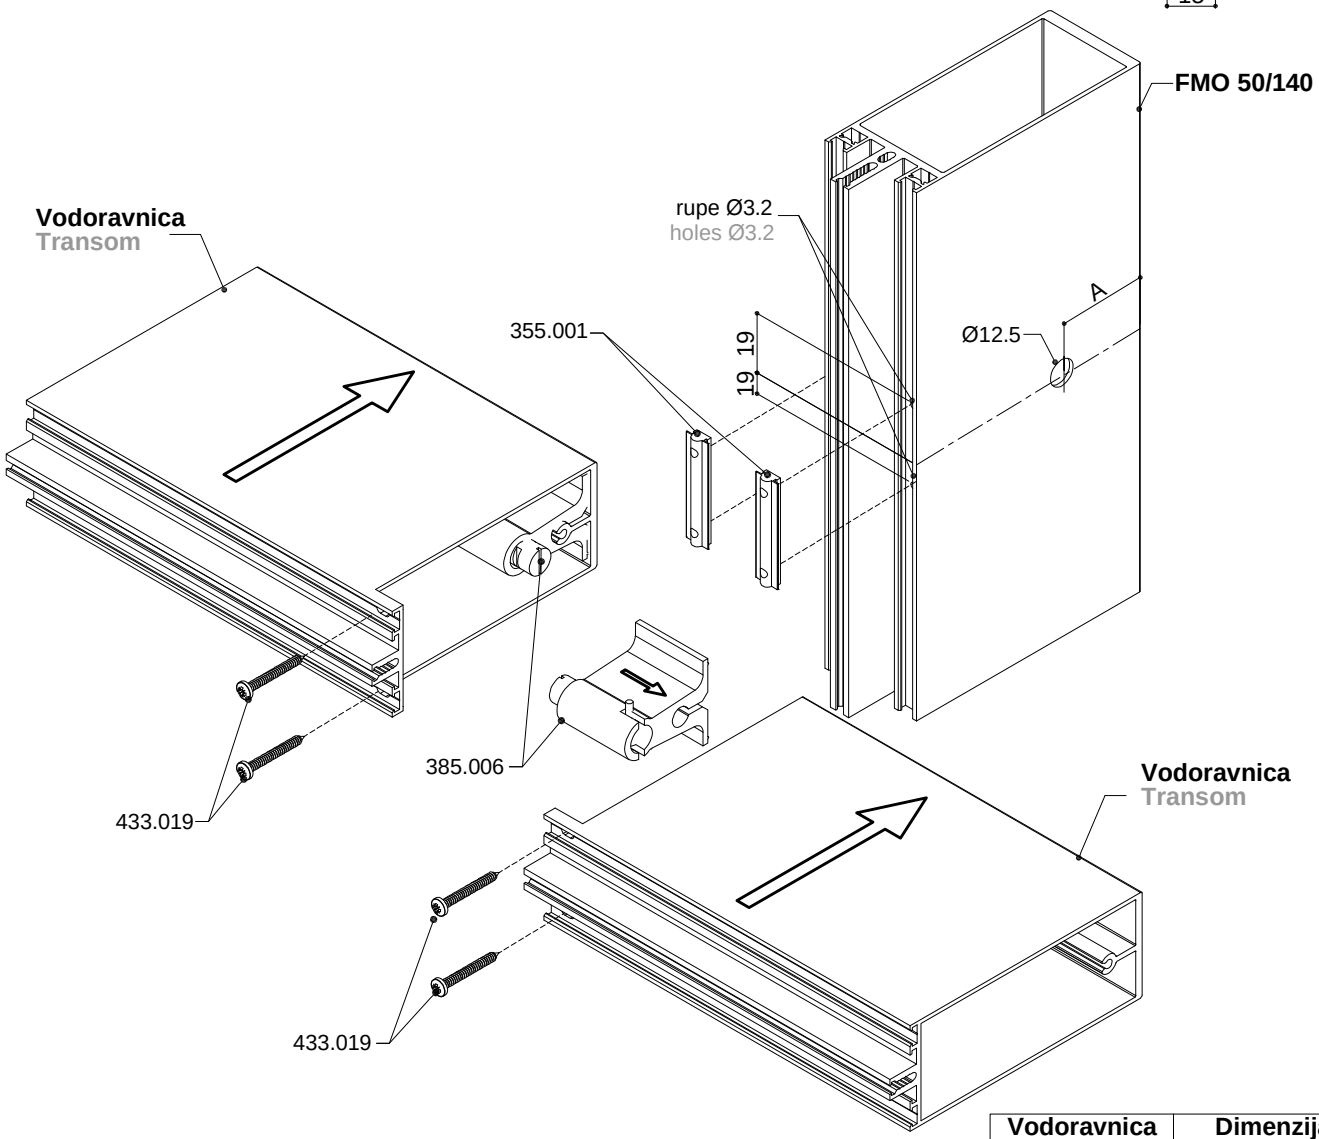


Vodoravnica Transom	Dimenzija A Dimension A
FMV 50/138	44,5 mm
FMV 50/118	63,5 mm
FMV 50/88	93,5 mm

- Obrada okomice **FMO 50/120** za vodoravnicu **FMV 50/118 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/120 for transom FMV 50/118 or smaller (connector 385.006-without dilatation rubber)

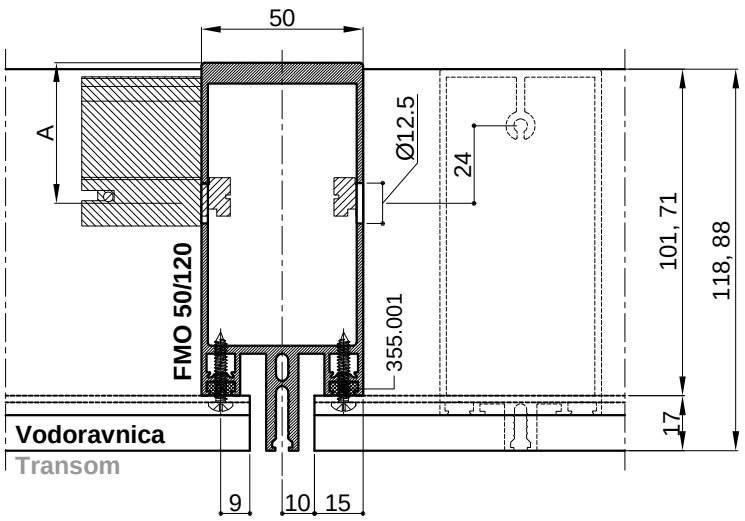


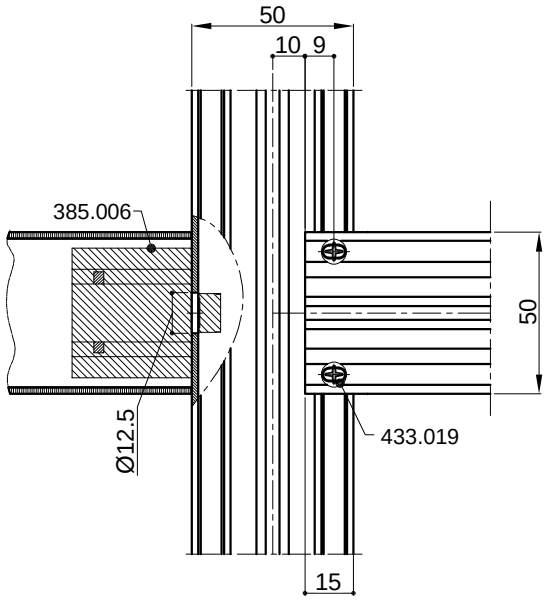


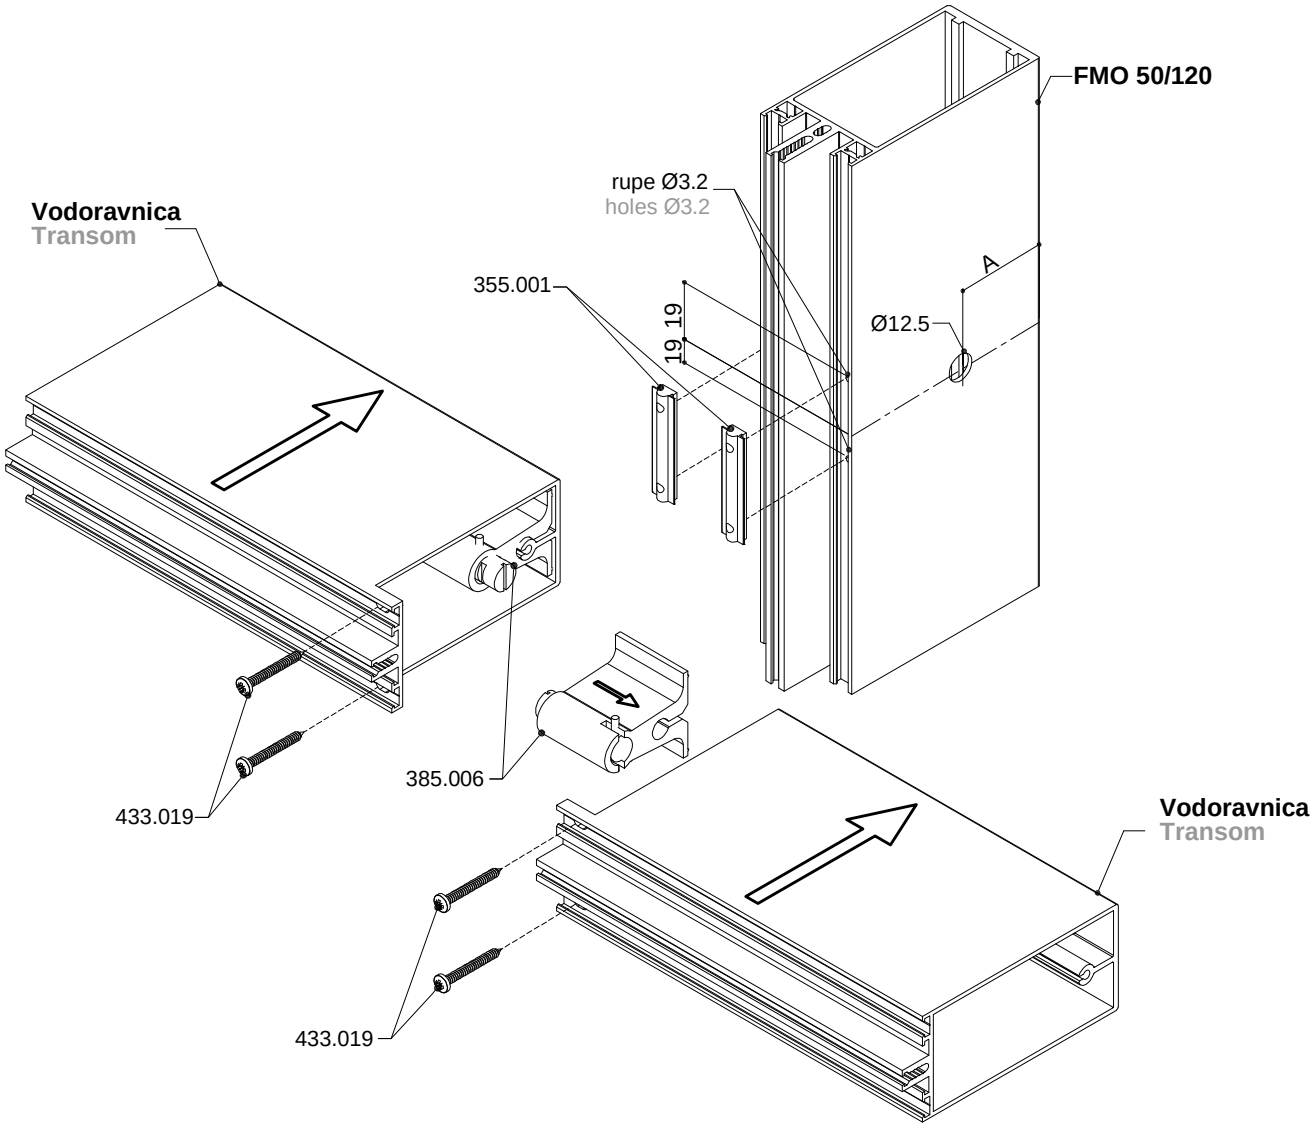


Vodoravnica Transom	Dimenzija A Dimension A
FMV 50/118	43,5 mm
FMV 50/88	73,5 mm

- Obrada okomice **FMO 50/120-S** za vodoravnicu **FMV 50/118 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/120-S for transom FMV 50/118 or smaller (connector 385.006-without dilatation rubber)

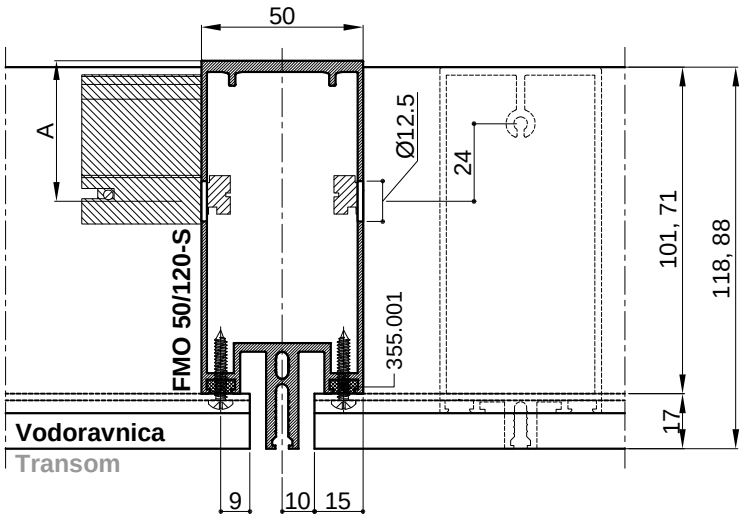


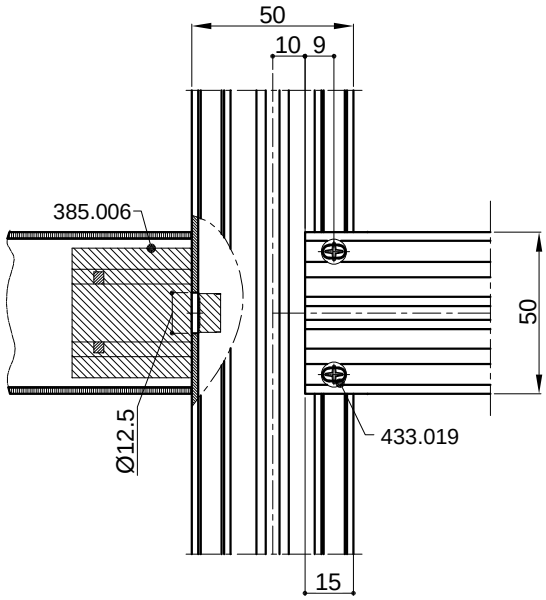


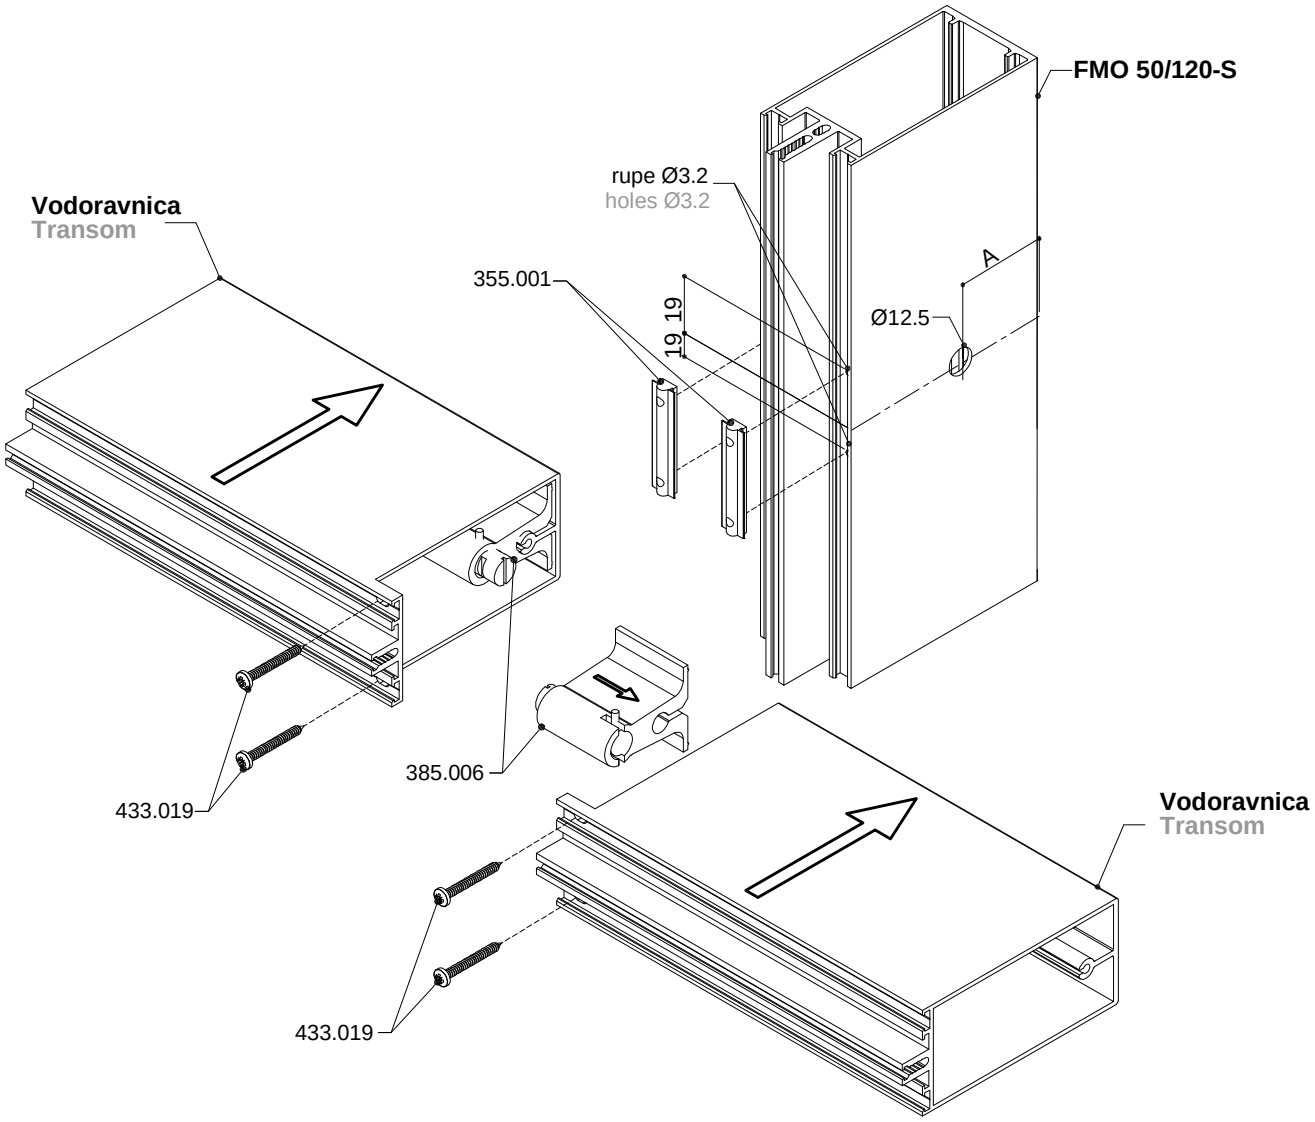


Vodoravnica Transom	**Dimenzija A** Dimension A
FMV 50/118	43,5 mm
FMV 50/88	73,5 mm


- Obrada okomice **FMO 50/90** za vodoravnicu **FMV 50/88** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/90 for transom FMV 50/88 (connector 385.006-without dilatation rubber)

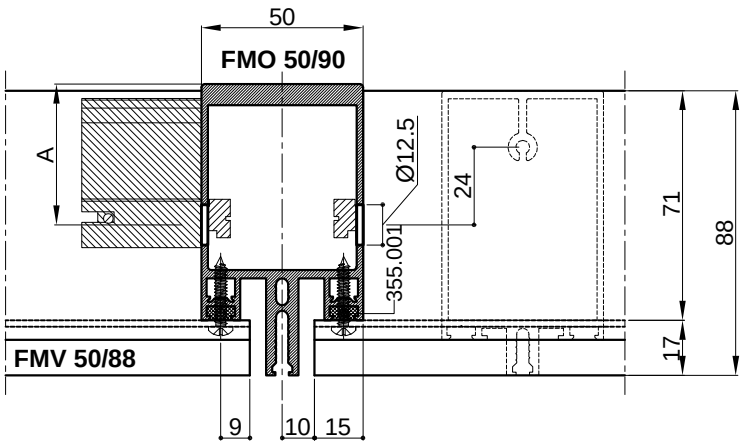


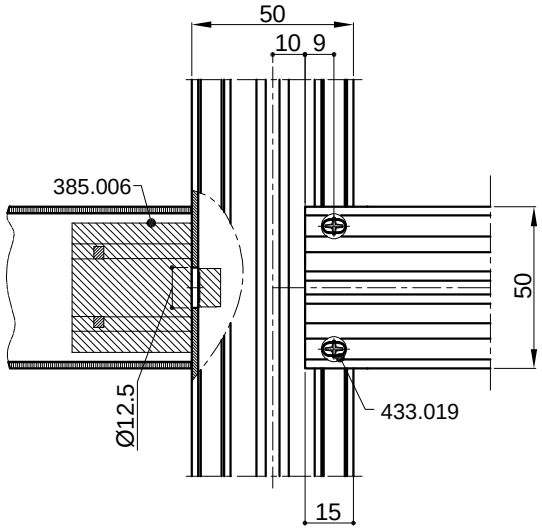

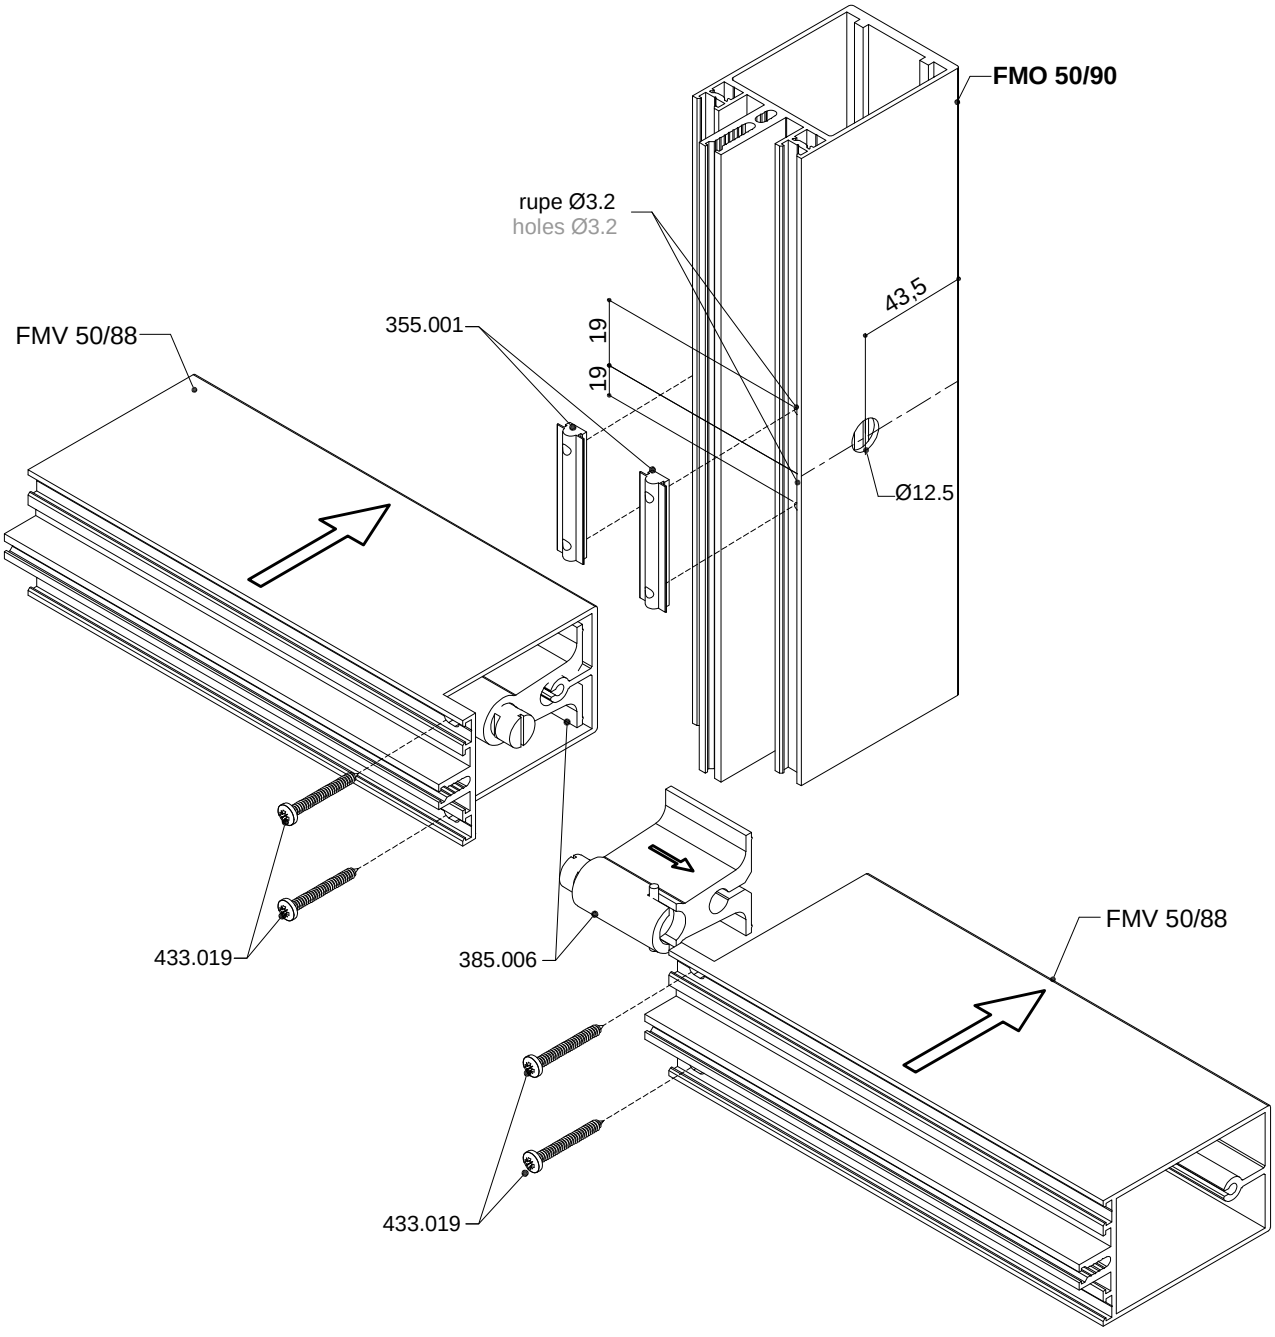


- Obrada okomice **FMO 50/200** za vodoravnicu **FMV 50/198 ili manju** (kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FMO 50/200 for transom FMV 50/198 or smaller (connector 385.006- with dilatation rubber 365.032)

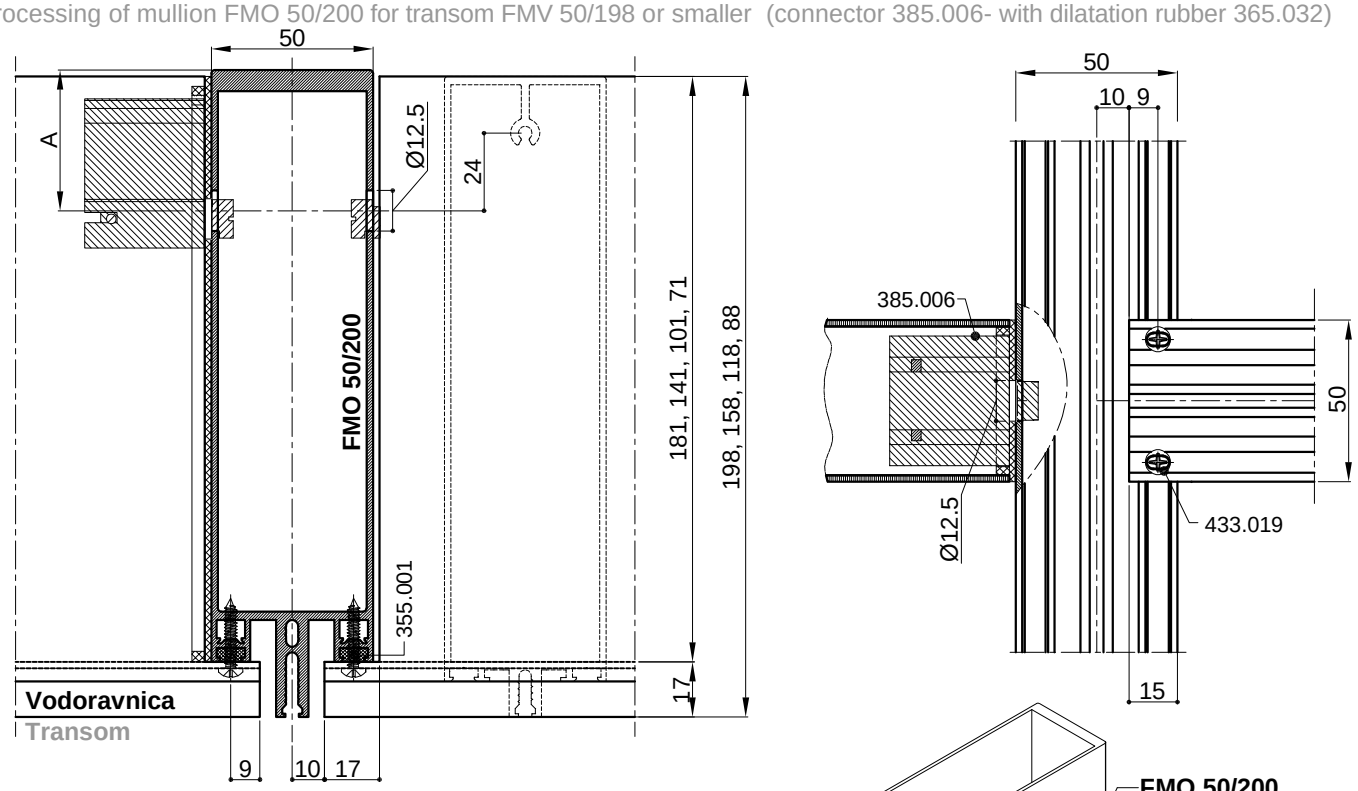


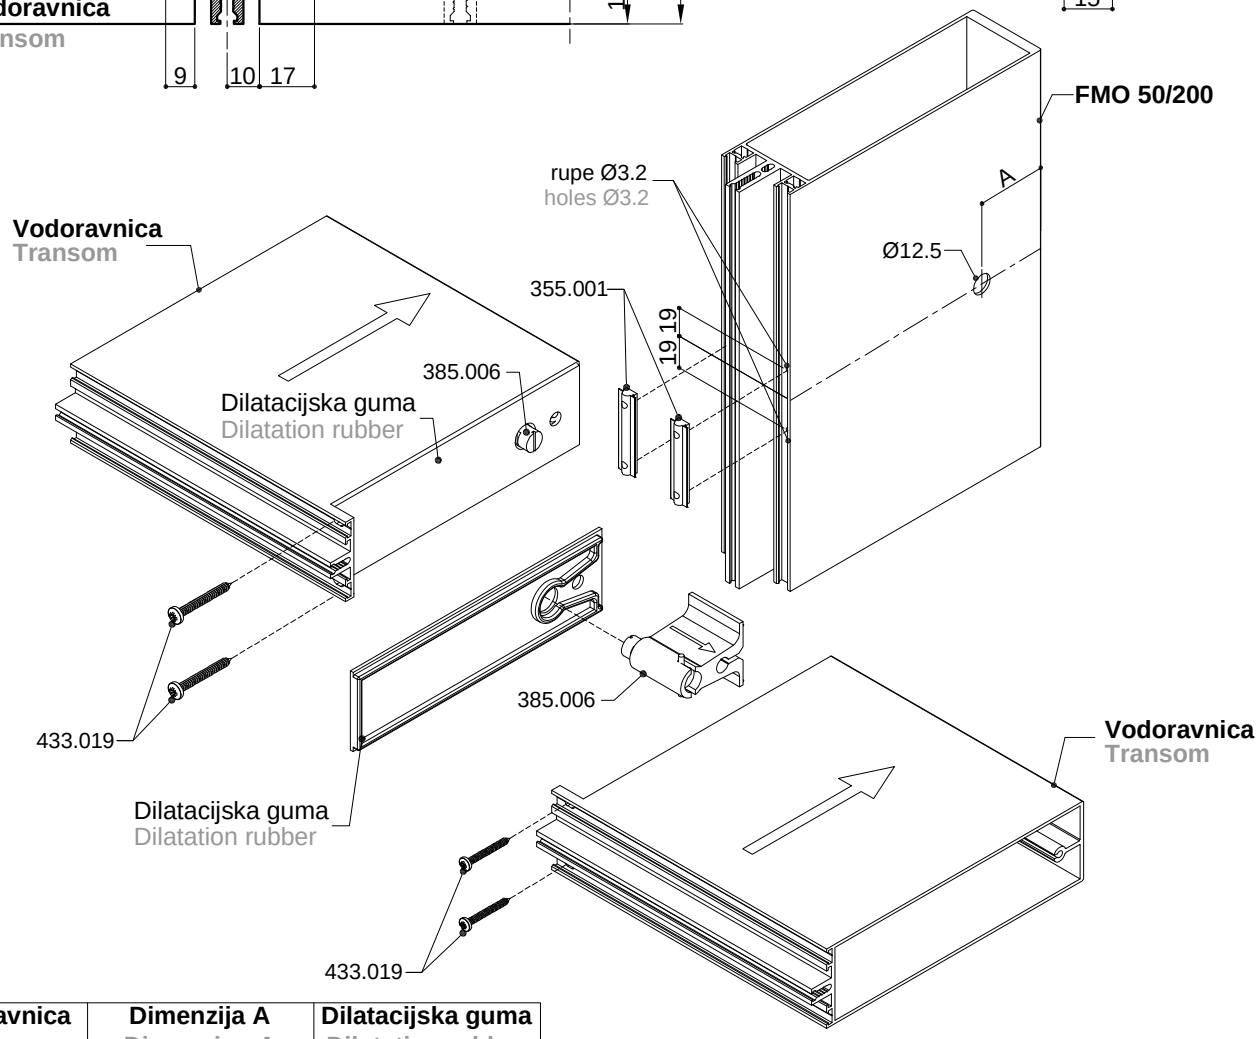

Vodoravnica Transom	**Dimenzija A** Dimension A	**Dilatacijska guma** Dilatation rubber
FMV 50/198	43,5 mm	365.032
FMV 50/158	83,5 mm	365.031
FMV 50/118	123,5 mm	365.030
FMV 50/88	153,5 mm	365.029


- Obrada okomice **FMO 50/200-S** za vodoravnicu **FMV 50/198 ili manju** (kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FMO 50/200-S for transom FMV 50/198 or smaller (connector 385.006- with dilatation rubber 365.032)

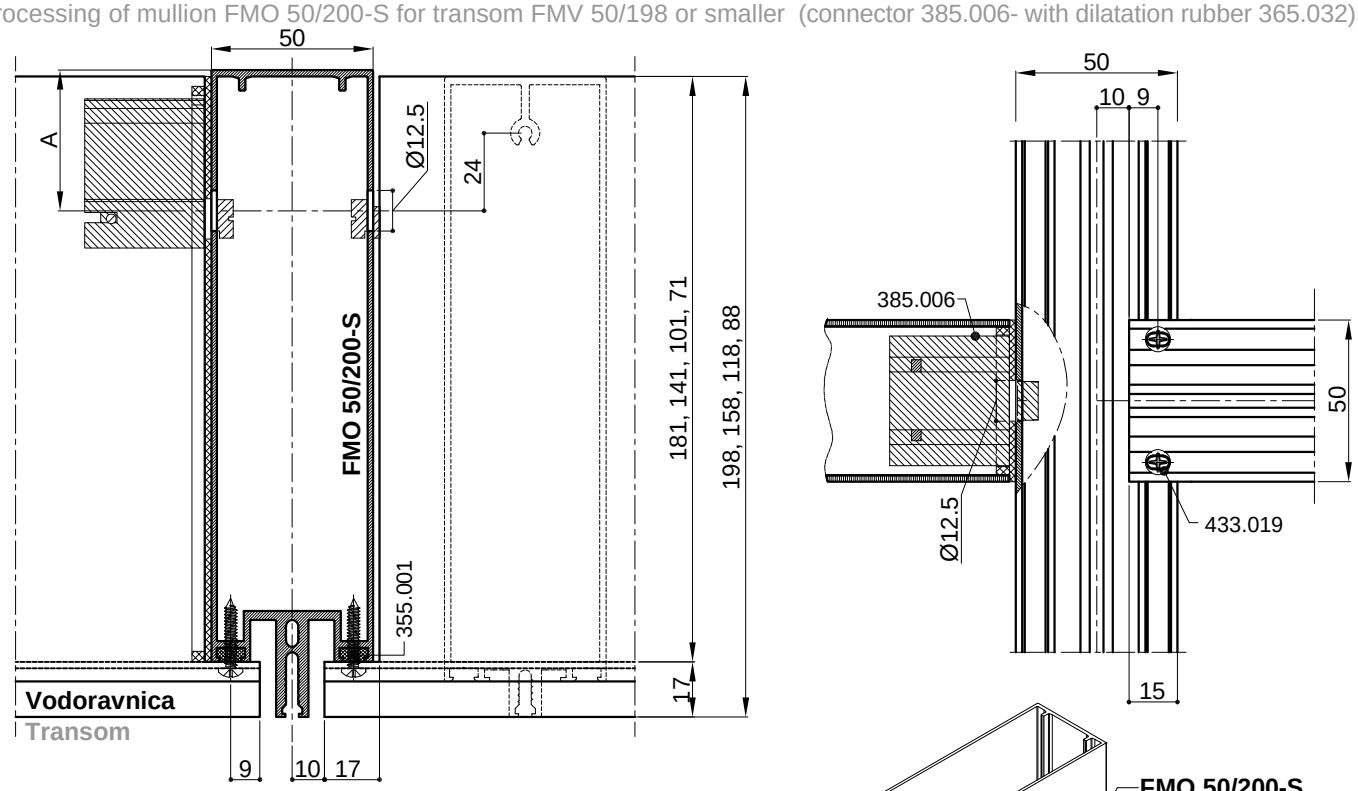


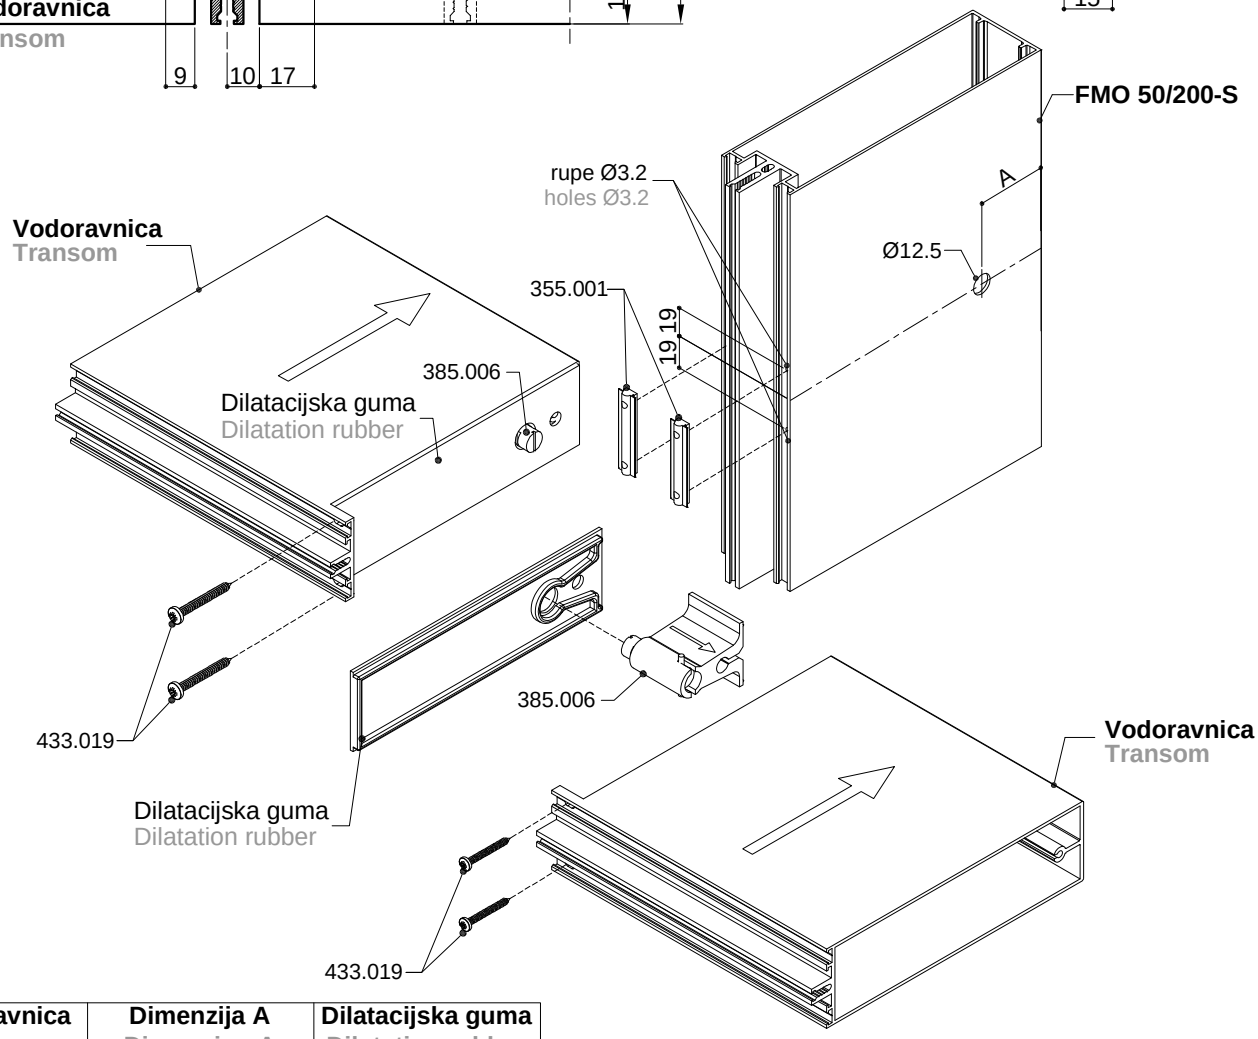


Vodoravnica Transom	**Dimenzija A** Dimension A	**Dilatacijska guma** Dilatation rubber
FMV 50/198	43,5 mm	365.032
FMV 50/158	83,5 mm	365.031
FMV 50/118	123,5 mm	365.030
FMV 50/88	153,5 mm	365.029

- Obrada okomice **FMO 50/160** za vodoravnicu **FMV 50/158 ili manju** (kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FMO 50/160 for transom FMV 50/158 or smaller (connector 385.006- with dilatation rubber 365.032)

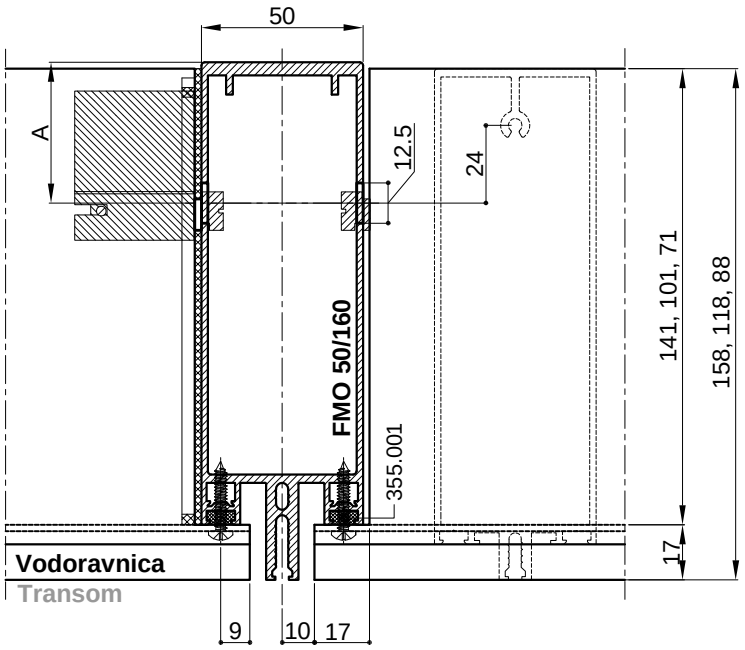


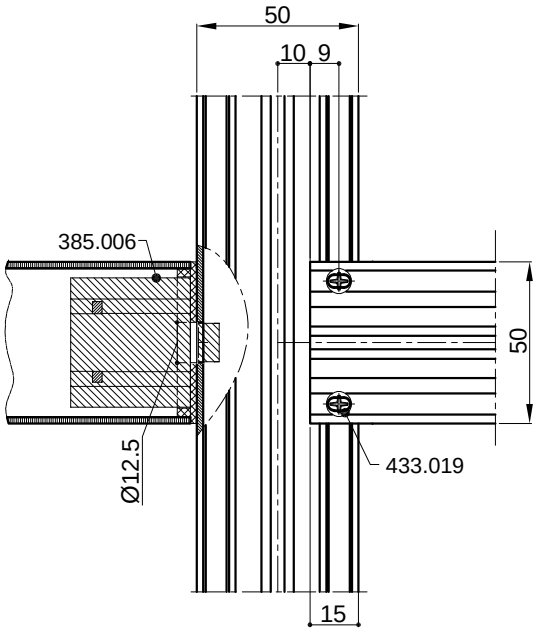


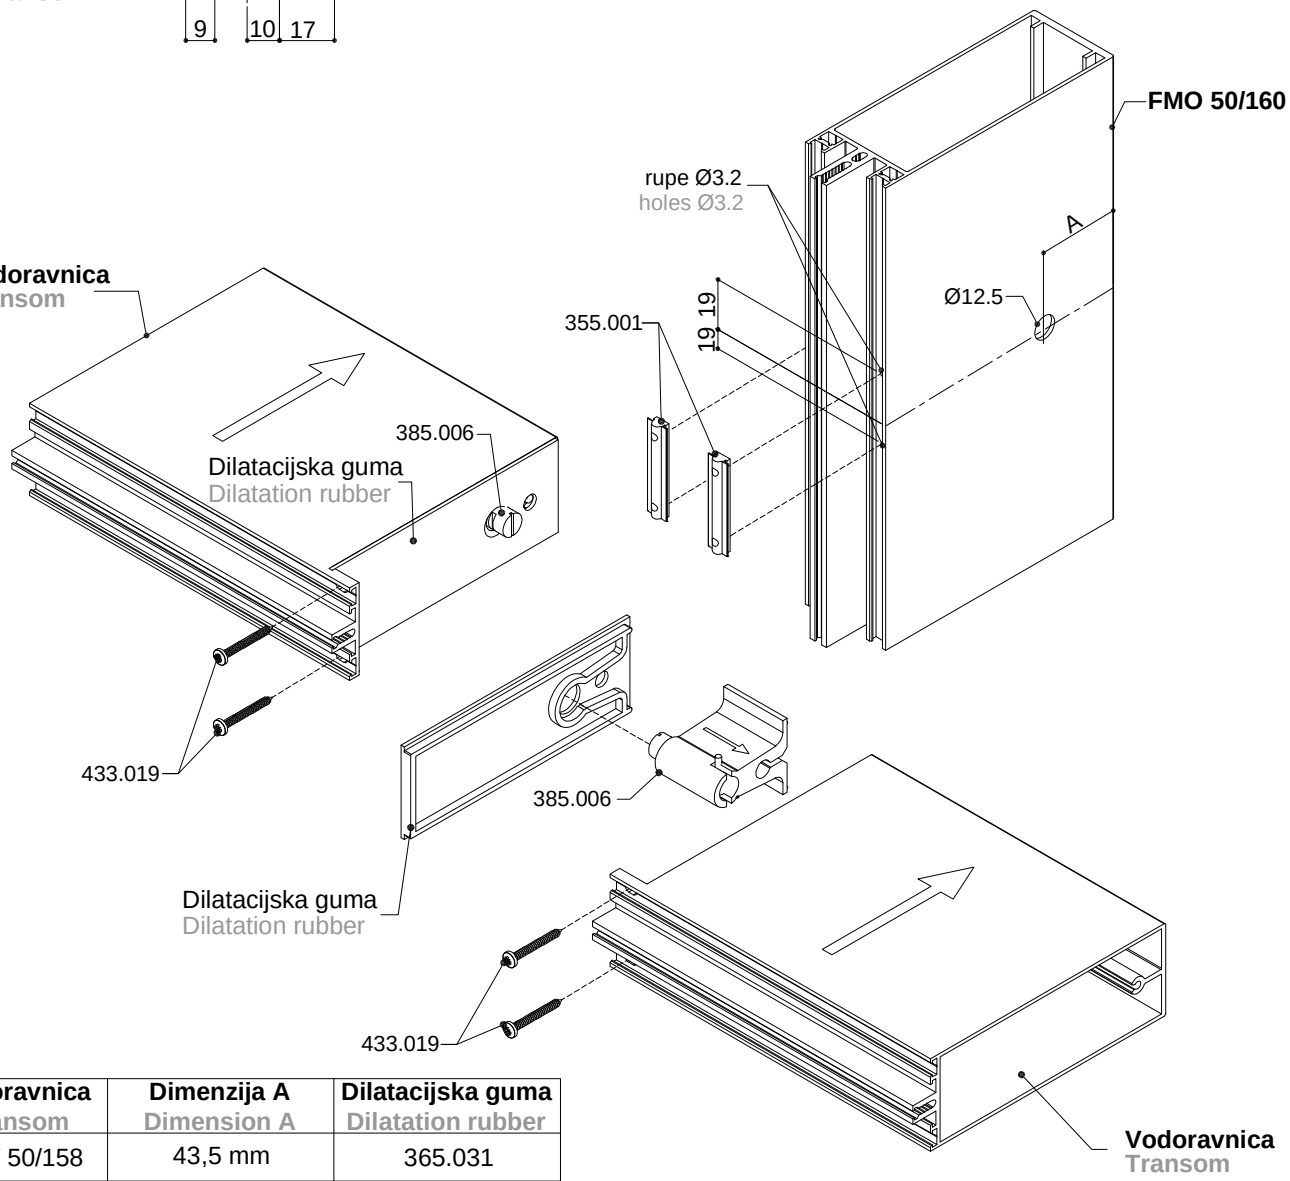

Vodoravnica Transom	Dimenzija A Dimension A	Dilatacijska guma Dilatation rubber
FMV 50/158	43,5 mm	365.031
FMV 50/118	83,5 mm	365.030
FMV 50/88	113,5 mm	365.029


- Obrada okomice **FMO 50/160-S** za vodoravnicu **FMV 50/158 ili manju** (kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FMO 50/160-S for transom FMV 50/158 or smaller (connector 385.006- with dilatation rubber 365.032)

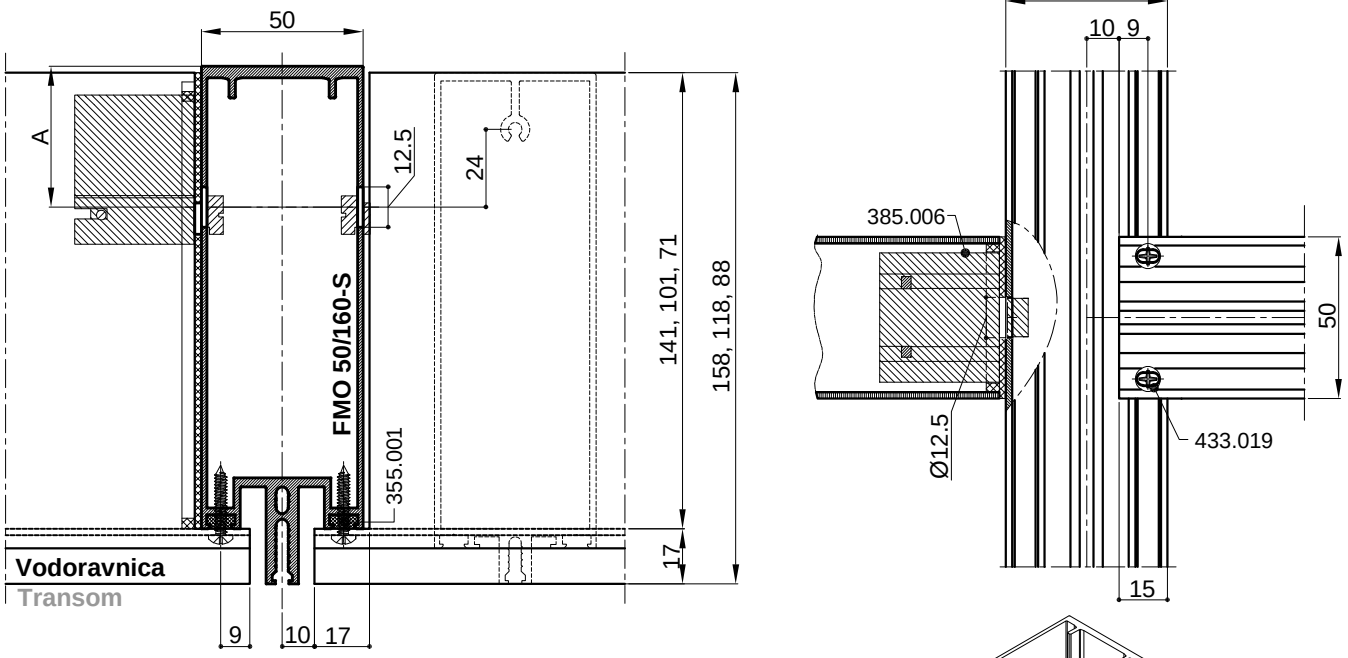


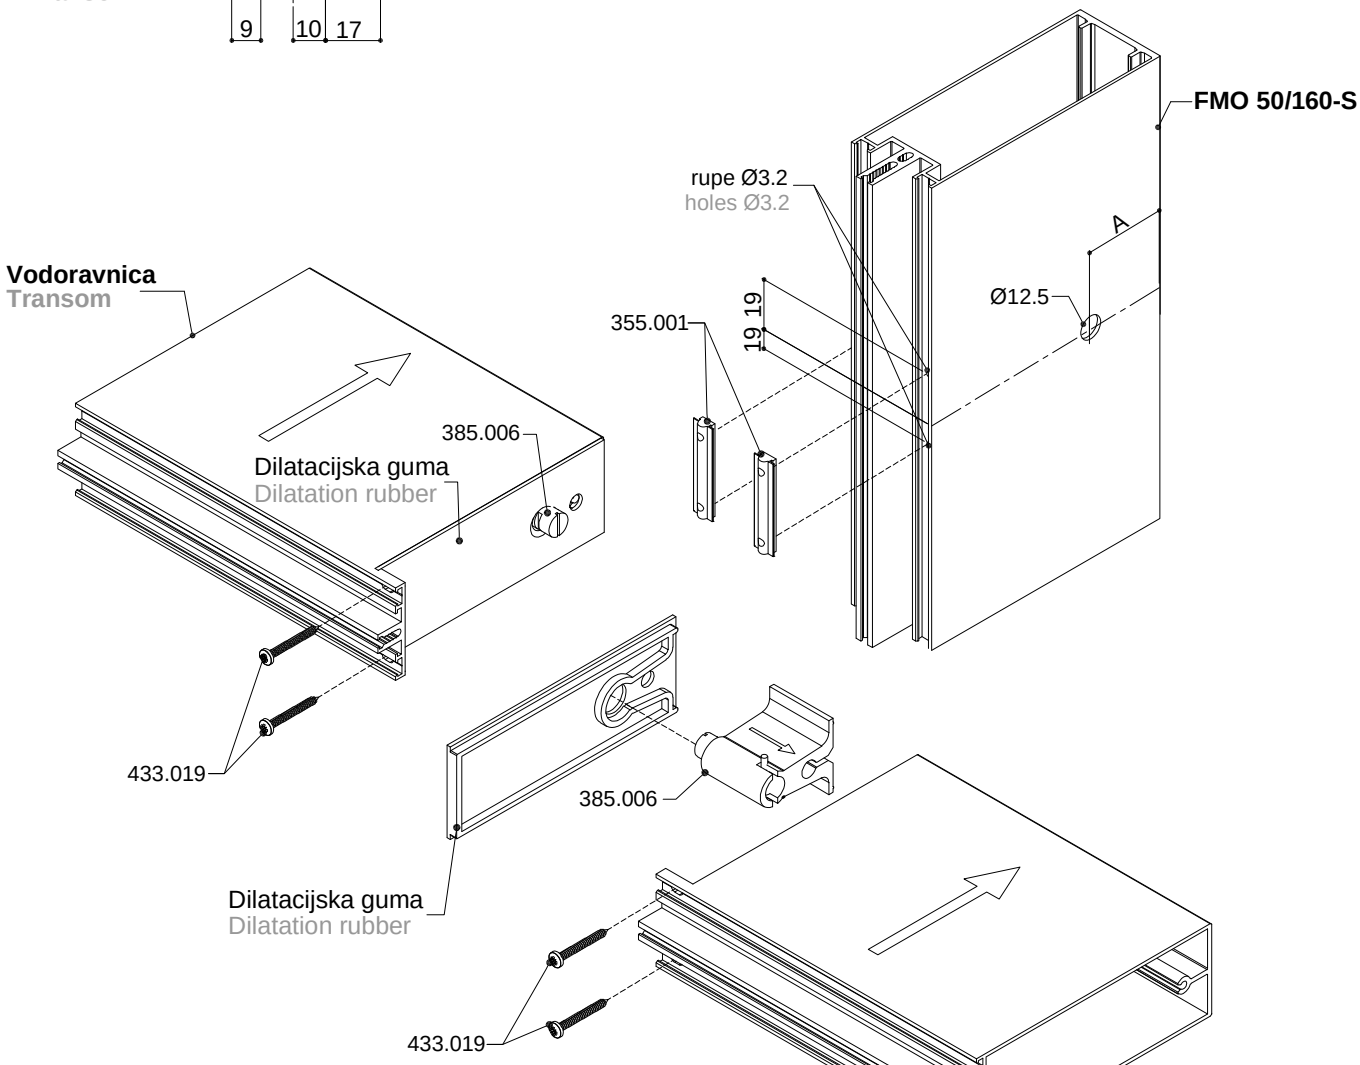


Vodoravnica Transom	**Dimenzija A** Dimension A	**Dilatacijska guma** Dilatation rubber
FMV 50/158	43,5 mm	365.031
FMV 50/118	83,5 mm	365.030
FMV 50/88	113,5 mm	365.029

- Obrada okomice **FMO 50/120** za vodoravnicu **FMV 50/118 ili manju** (kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FMO 50/120 for transom FMV 50/118 or smaller (connector 385.006- with dilatation rubber 365.032)

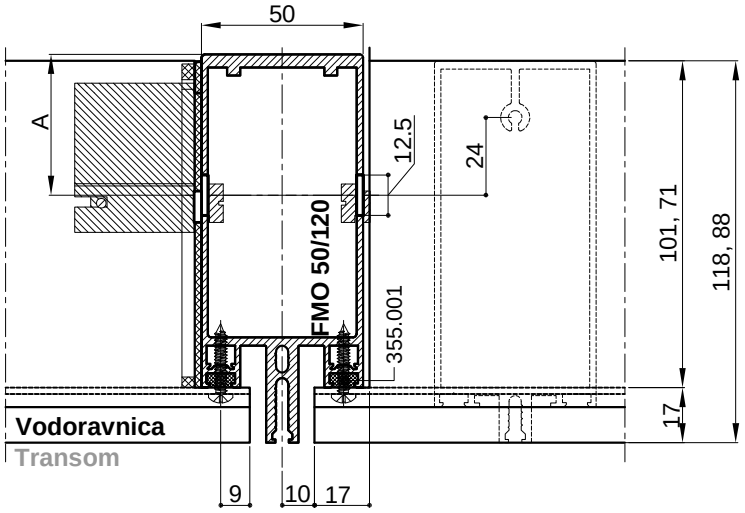


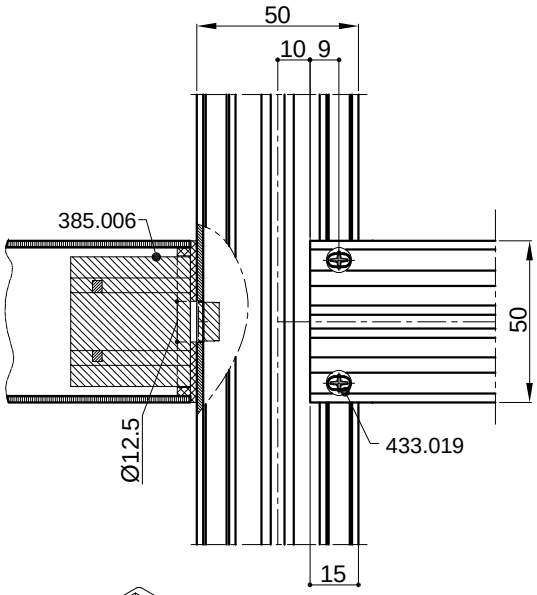


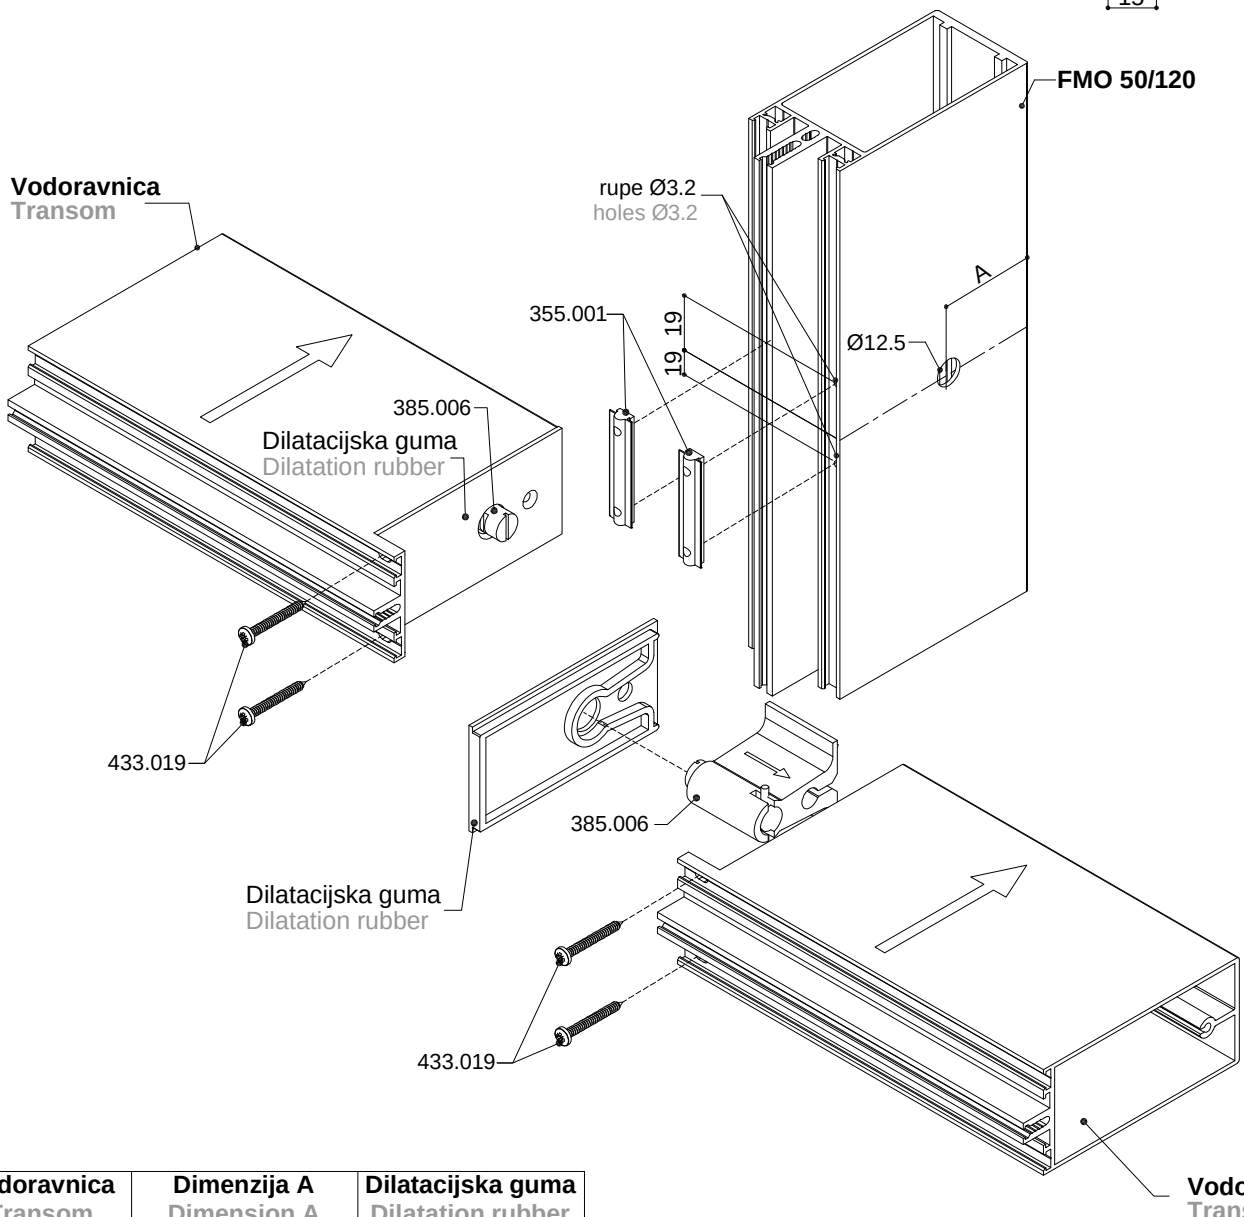


Vodoravnica Transom	Dimenzija A Dimension A	Dilatacijska guma Dilatation rubber
FMV 50/118	43,5 mm	365.030
FMV 50/88	73,5 mm	365.029

- Obrada okomice **FMO 50/120-S** za vodoravnicu **FMV 50/118 ili manju** (kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FMO 50/120-S for transom FMV 50/118 or smaller (connector 385.006- with dilatation rubber 365.032)

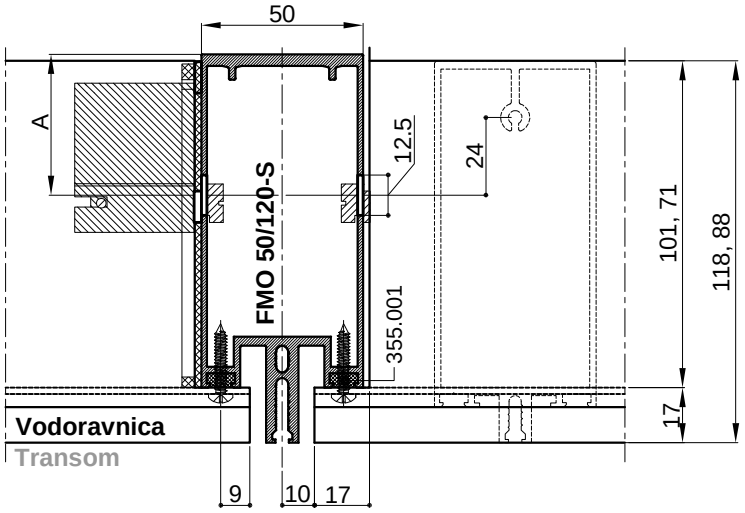


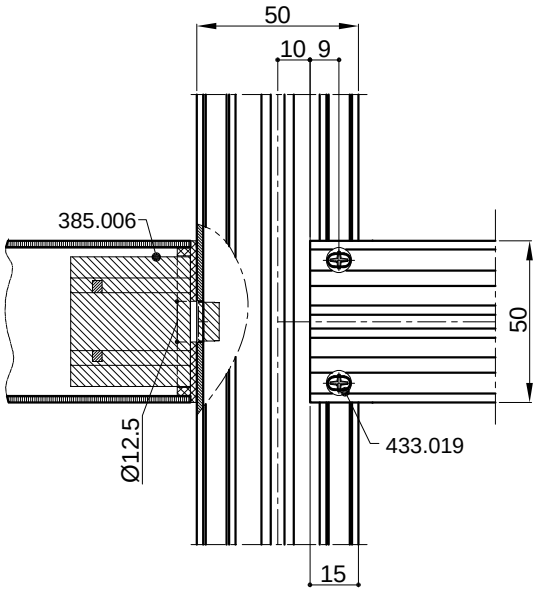


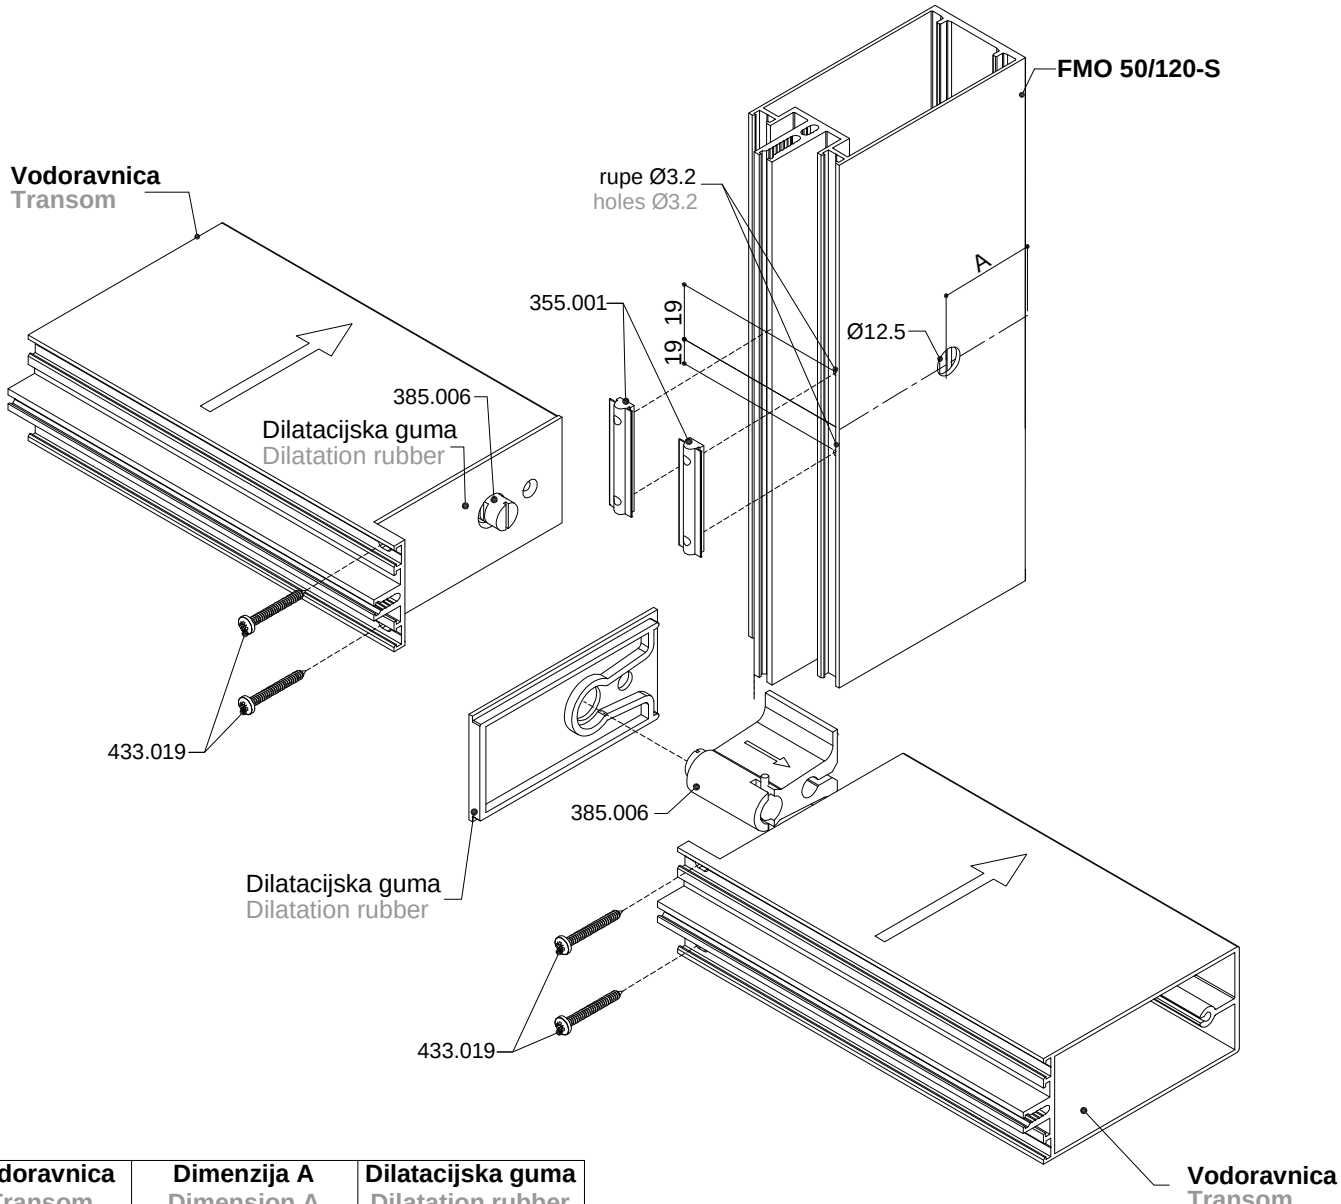


Vodoravnica Transom	Dimenzija A Dimension A	Dilatacijska guma Dilatation rubber
FMV 50/118	43,5 mm	365.030
FMV 50/88	73,5 mm	365.029


- Obrada okomice **FMO 50/90** za vodoravnicu **FMV 50/88** (kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FMO 50/90 for transom FMV 50/88 (connector 385.006- with dilatation rubber 365.032)

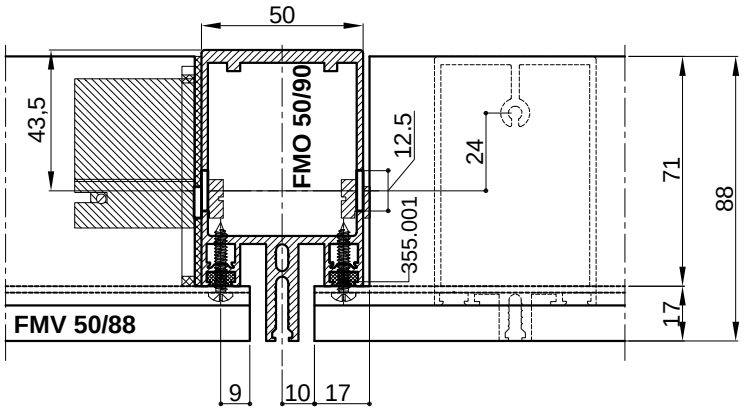

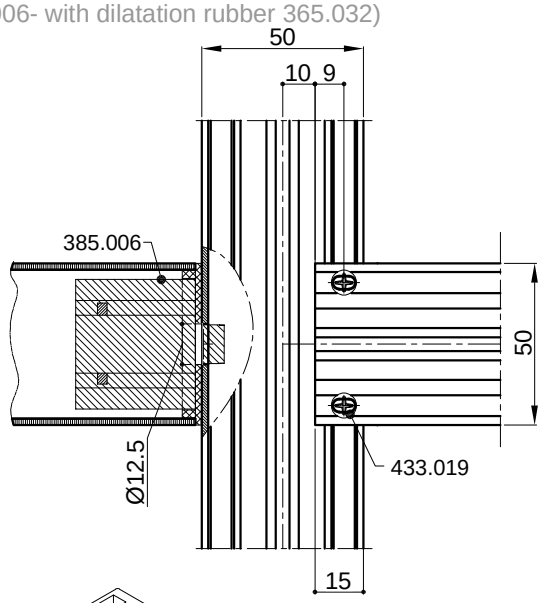

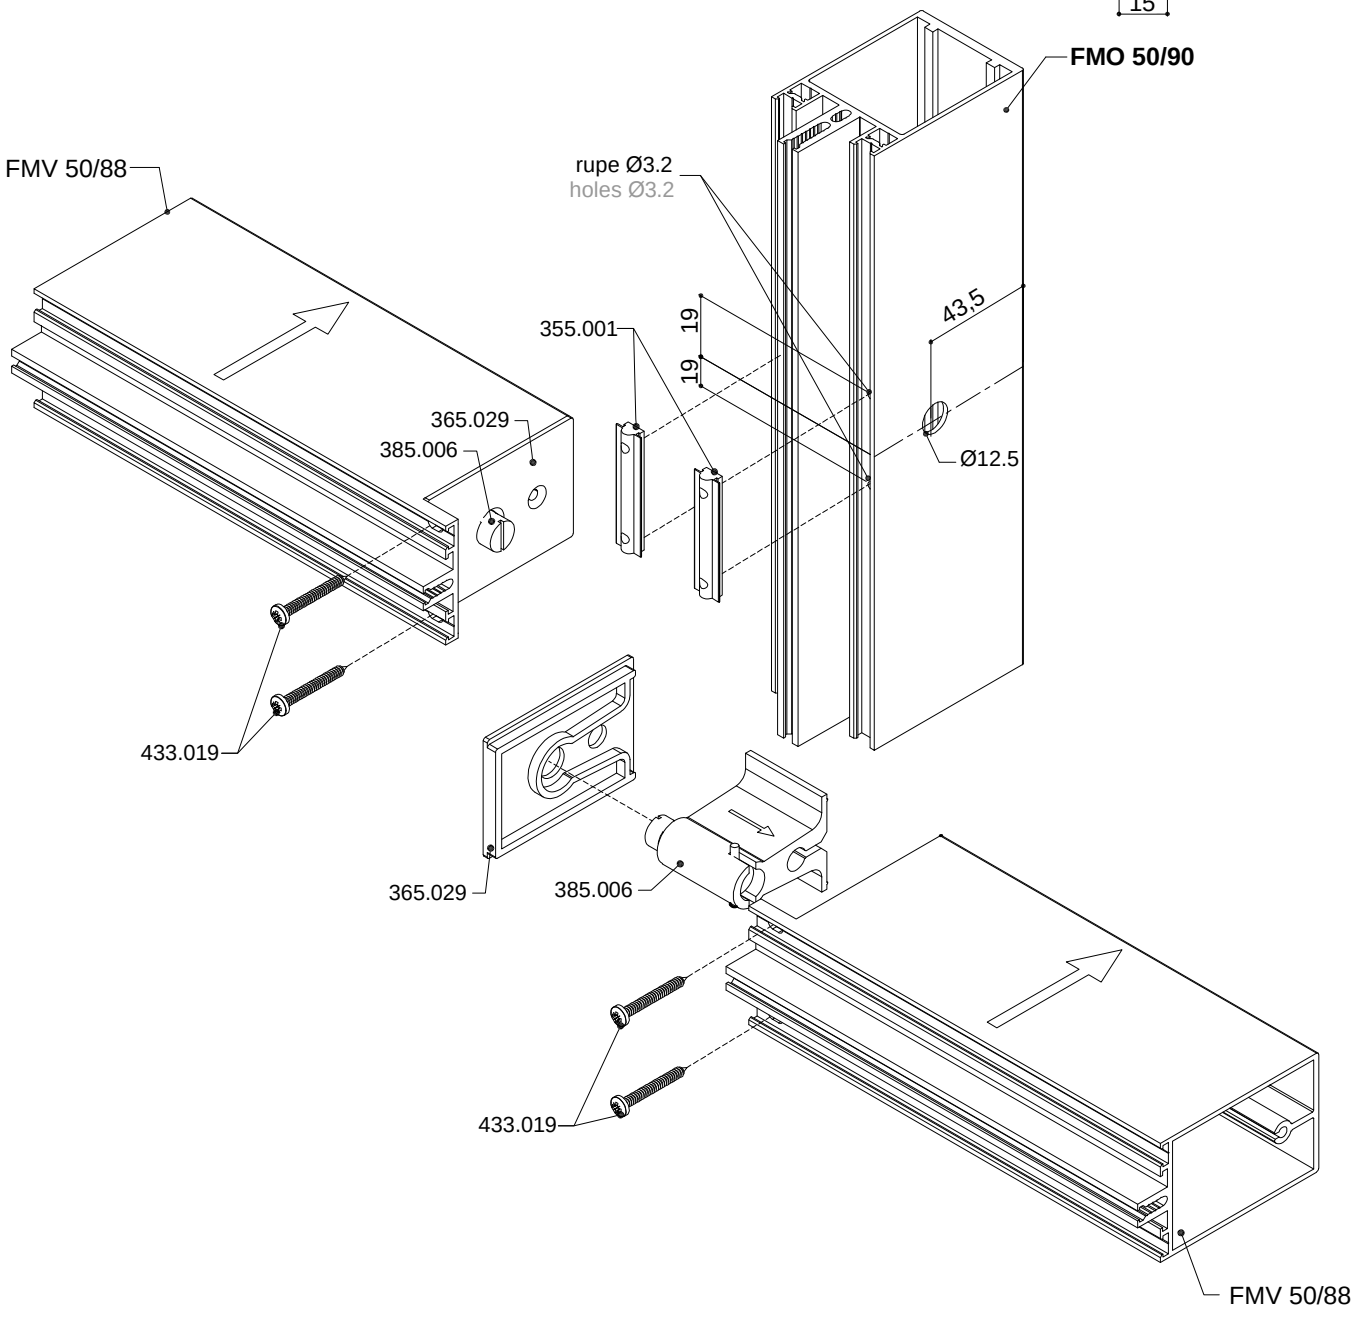



- Obrada poluokomica **FOP 25/200** i **FO 25/200** za vodoravnicu **FMV 50/198** (vijak 433.046; bez dilatacijske brtve)
- Processing of dilatation mullion FOP 25/200 and FO 25/200 for transom FMV 50/198 (screw 433.046; without dilatation rubber)

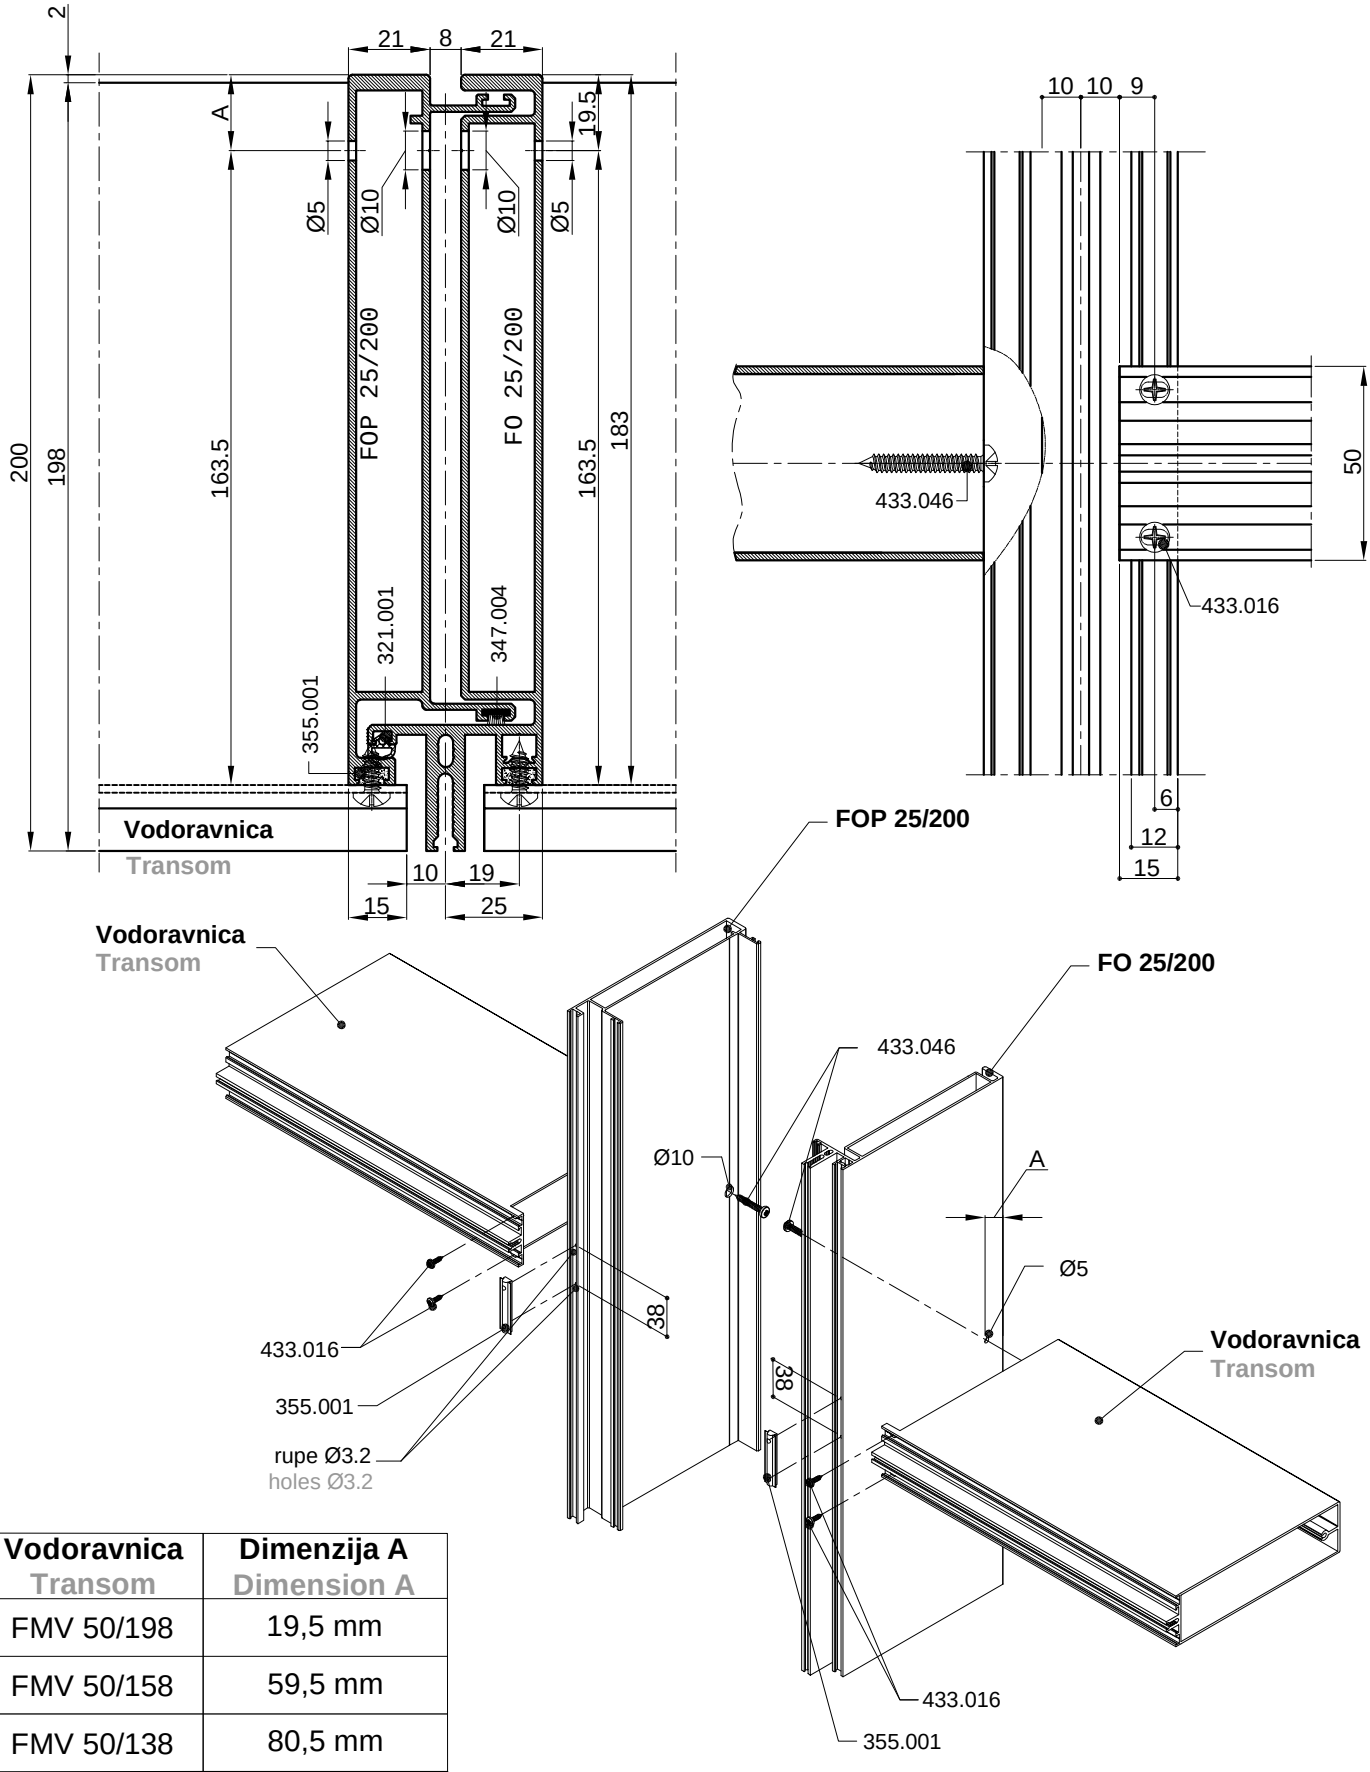

Vodoravnica Transom	**Dimenzija A** Dimension A
FMV 50/198	19,5 mm
FMV 50/158	59,5 mm
FMV 50/138	80,5 mm
FMV 50/118	99,5 mm
FMV 50/88	129,5 mm


- Obrada poluokomica **FOP 25/160** i **FO 25/160** za vodoravnicu **FMV 50/158** (vijak 433.046; bez dilatacijske brtve)
- Processing of dilatation mullion FOP 25/160 and FO 25/160 for transom FMV 50/158 (screw 433.046; without dilatation rubber)

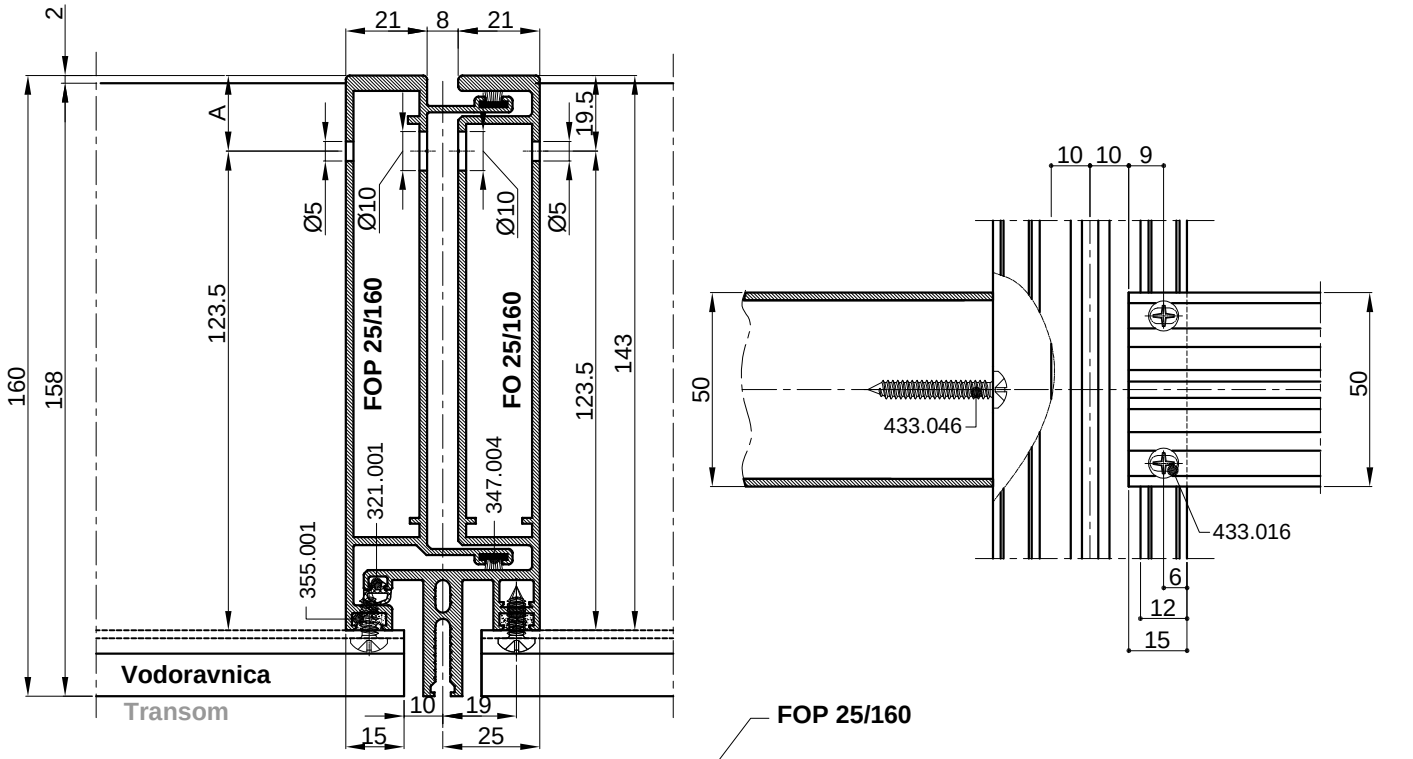


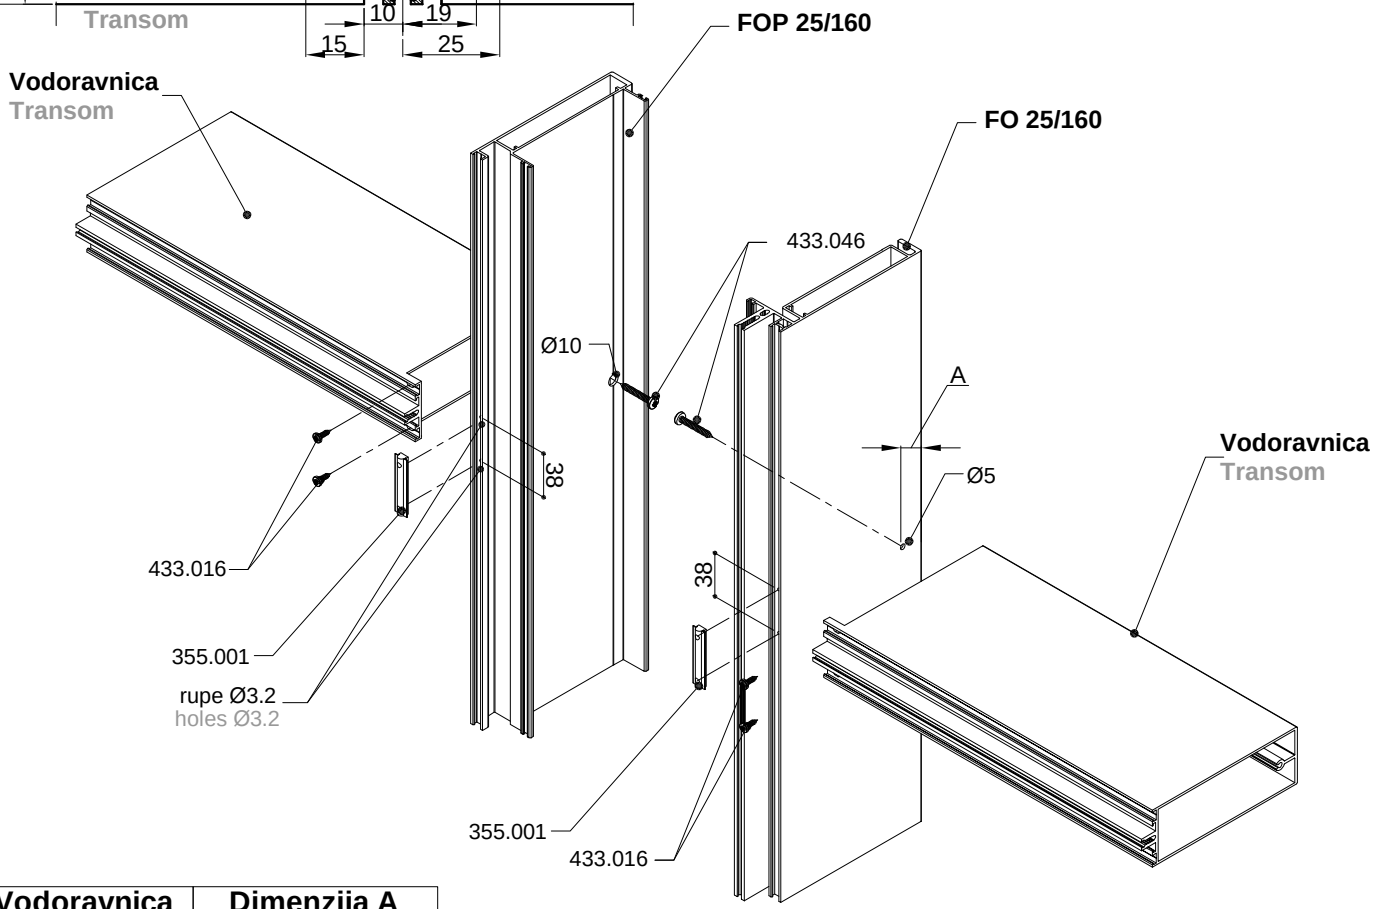

Vodoravnica Transom	**Dimenzija A** Dimension A
FMV 50/158	19,5 mm
FMV 50/138	40,5 mm
FMV 50/118	59,5 mm
FMV 50/88	89,5 mm


- Obrada Poluokomica **FOP 25/120** i **FO 25/120** za vodoravnicu **FMV 50/118** (vijak 433.046; bez dilatacijske brtve)
- Processing of dilatation mullion FOP 25/120 and FO 25/120 for transom FMV 50/118 (screw 433.046;without dilatation rubber)

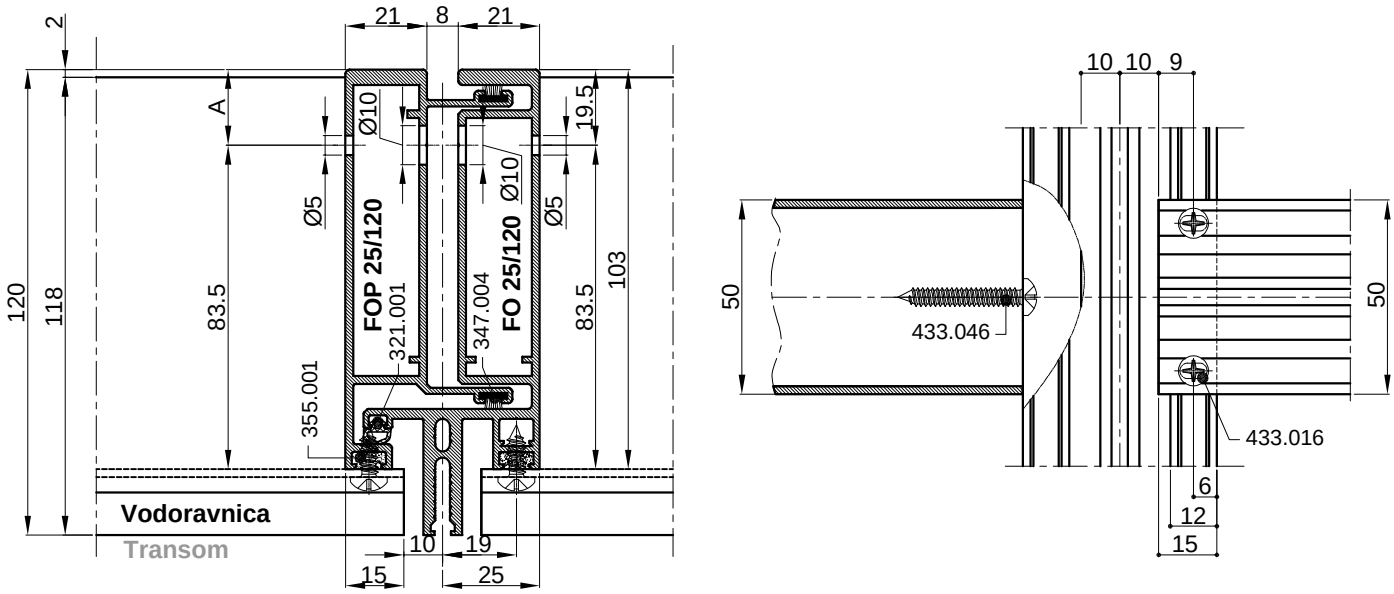


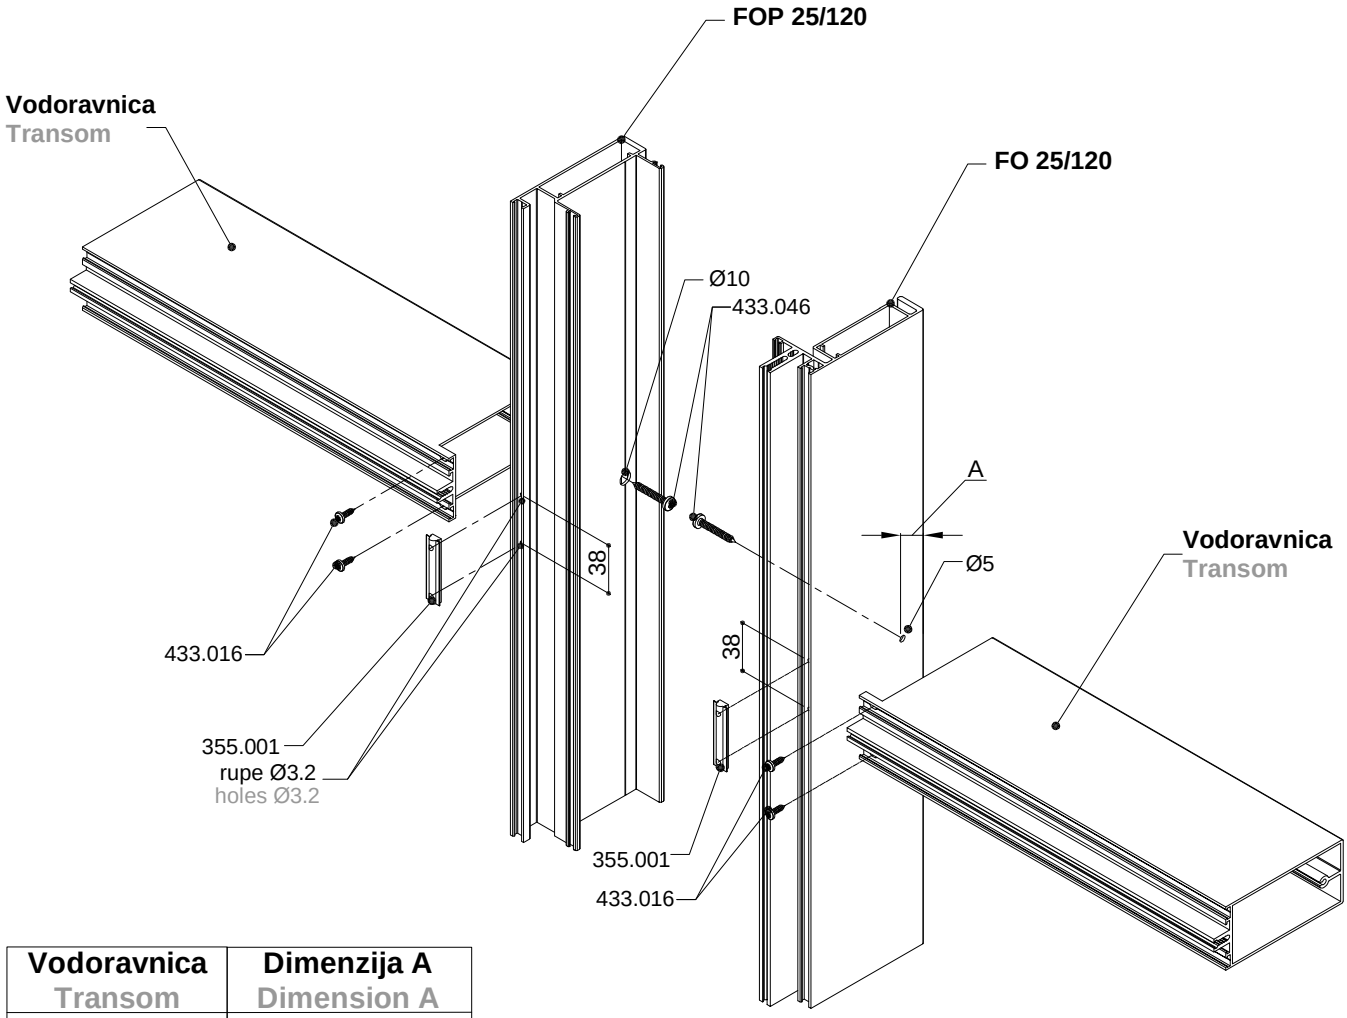


Vodoravnica Transom	**Dimenzija A** Dimension A
FMV 50/118	19,5 mm
FMV 50/88	49,5 mm


- Obrada Poluokomica **FOP 25/90** i **FO 25/90** za vodoravnicu **FMV 50/88** (vijak 433.046; bez dilatacijske brtve)
- Processing of dilatation mullion FOP 25/90 and FO 25/90 for transom FMV 50/88 (screw 433.046; without dilatation rubber)

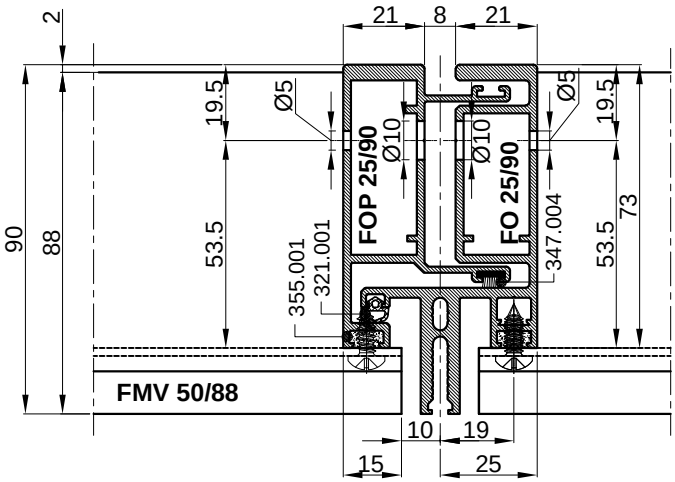


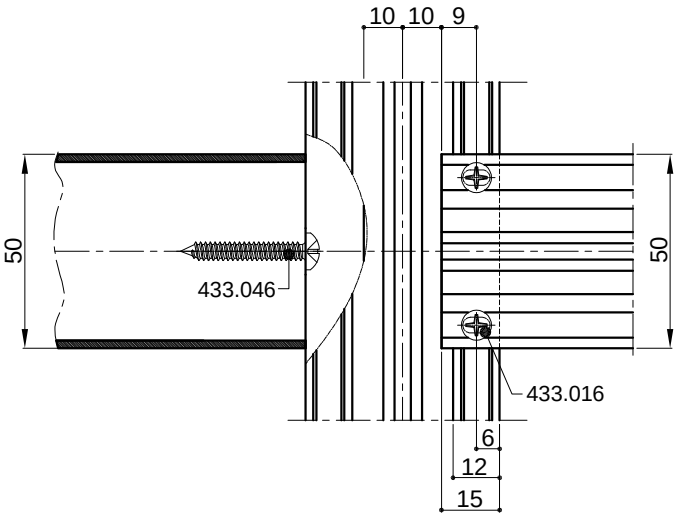


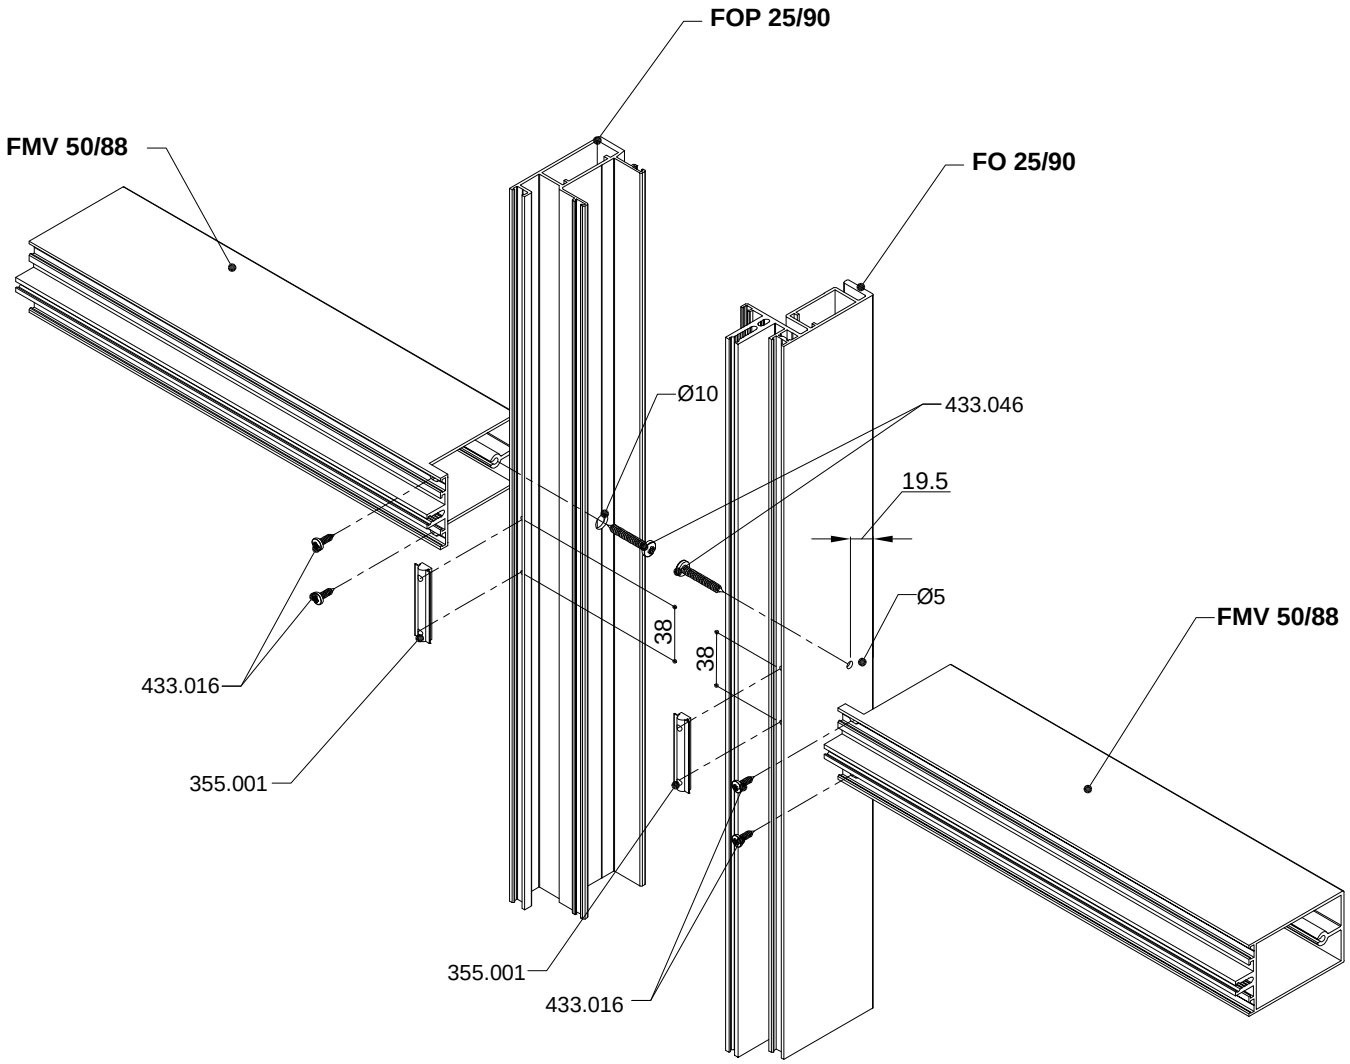

- Obrada okomice **FOP 25/200 i FO 25/200** za vodoravnicu **FMV 50/198 ili manju**
(kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FOP 25/200 i FO 25/200 for transom FMV 50/198 or smaller
(connector 385.006- with dilatation rubber 365.032)

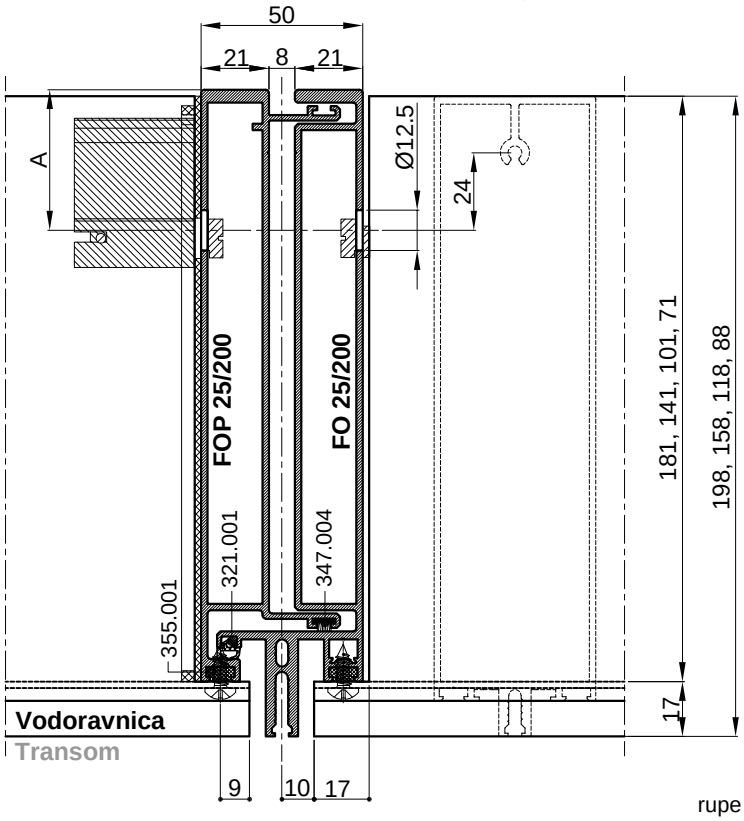


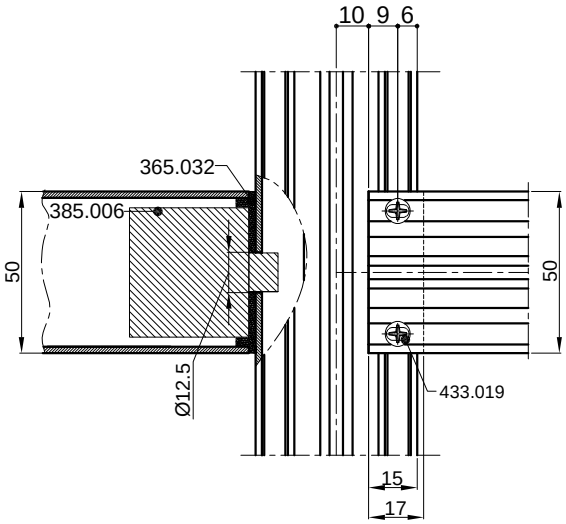


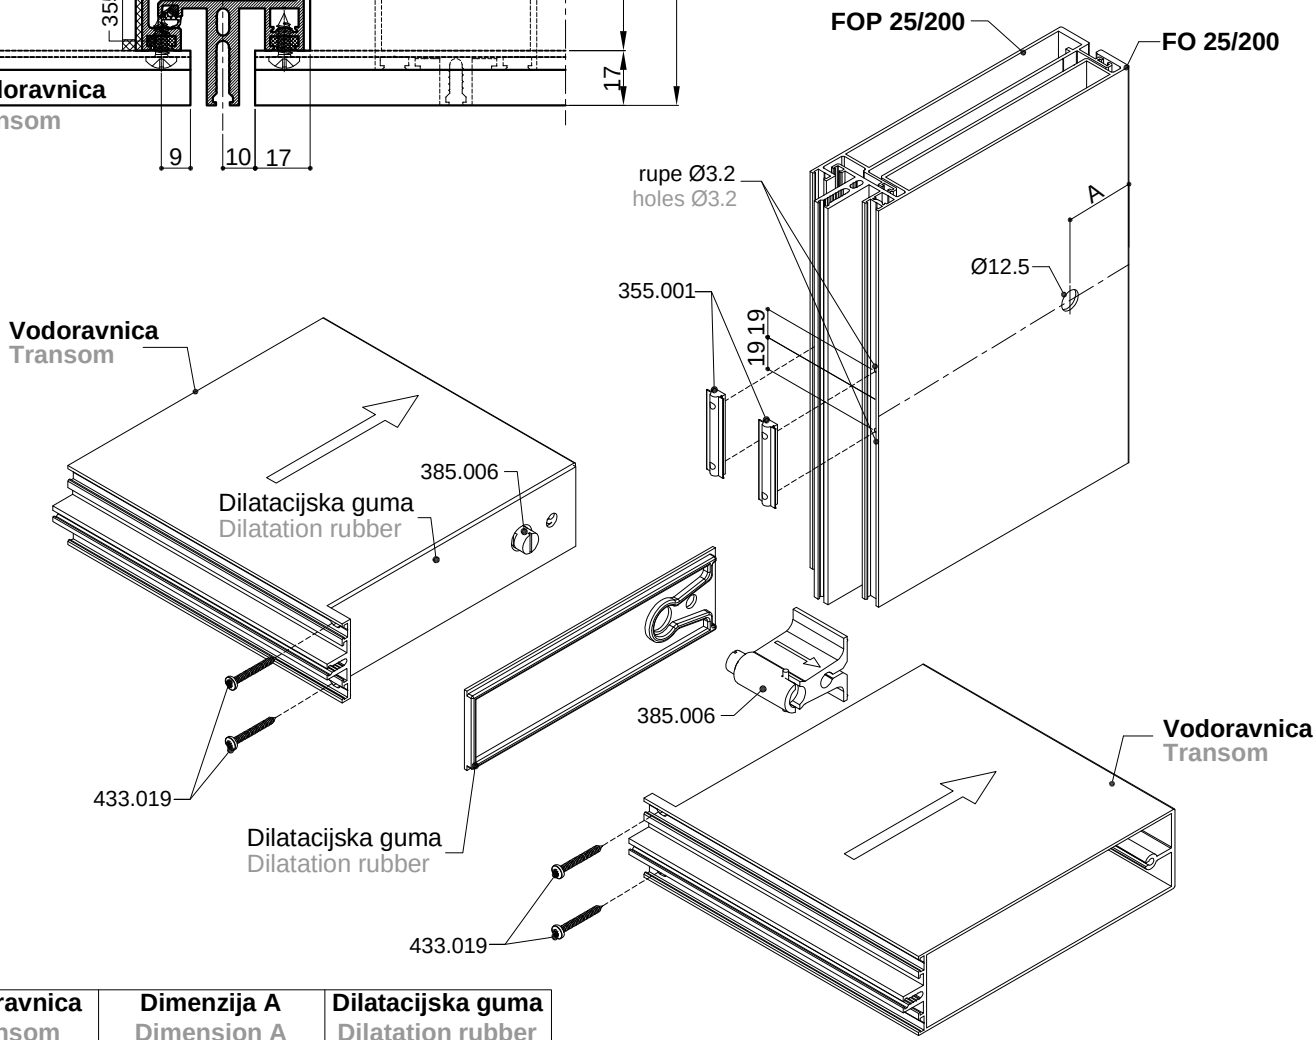


Vodoravnica Transom	**Dimenzija A** Dimension A	**Dilatacijska guma** Dilatation rubber
FMV 50/198	43,5 mm	365.032
FMV 50/158	83,5 mm	365.031
FMV 50/118	123,5 mm	365.030
FMV 50/88	153,5 mm	365.029

- Obrada okomice **FOP 25/160 i FO 25/160** za vodoravnicu **FMV 50/158 ili manju**
(kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FOP 25/160 i FO 25/160 for transom FMV 50/158 or smaller
(connector 385.006- with dilatation rubber 365.032)

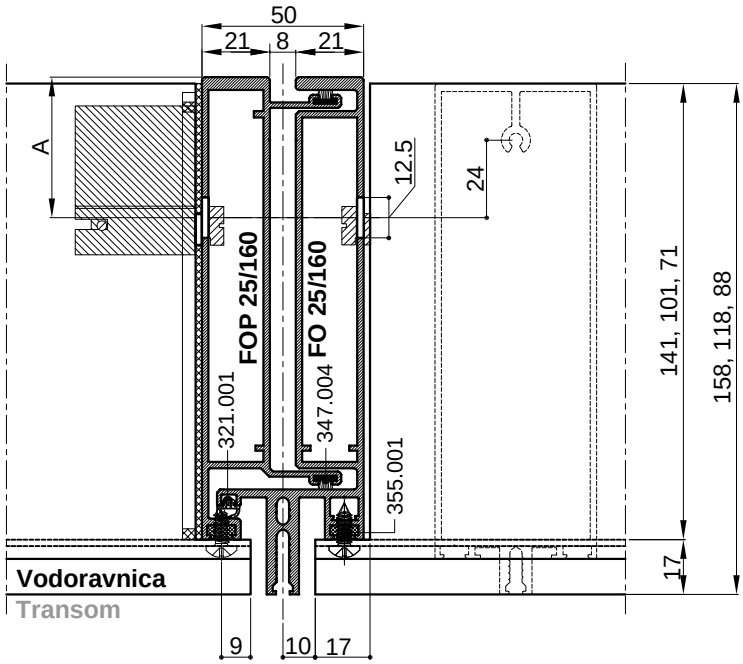


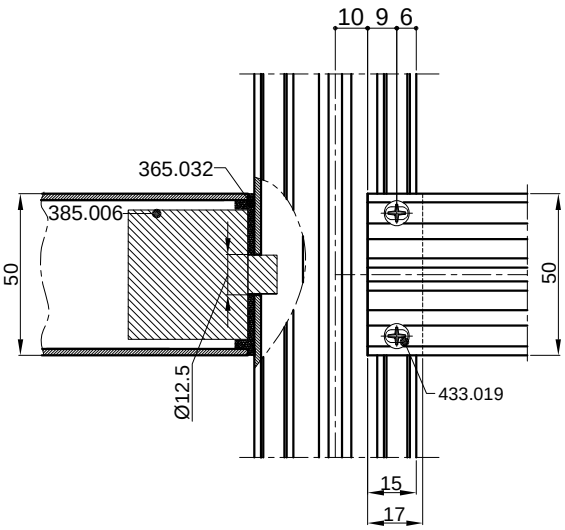


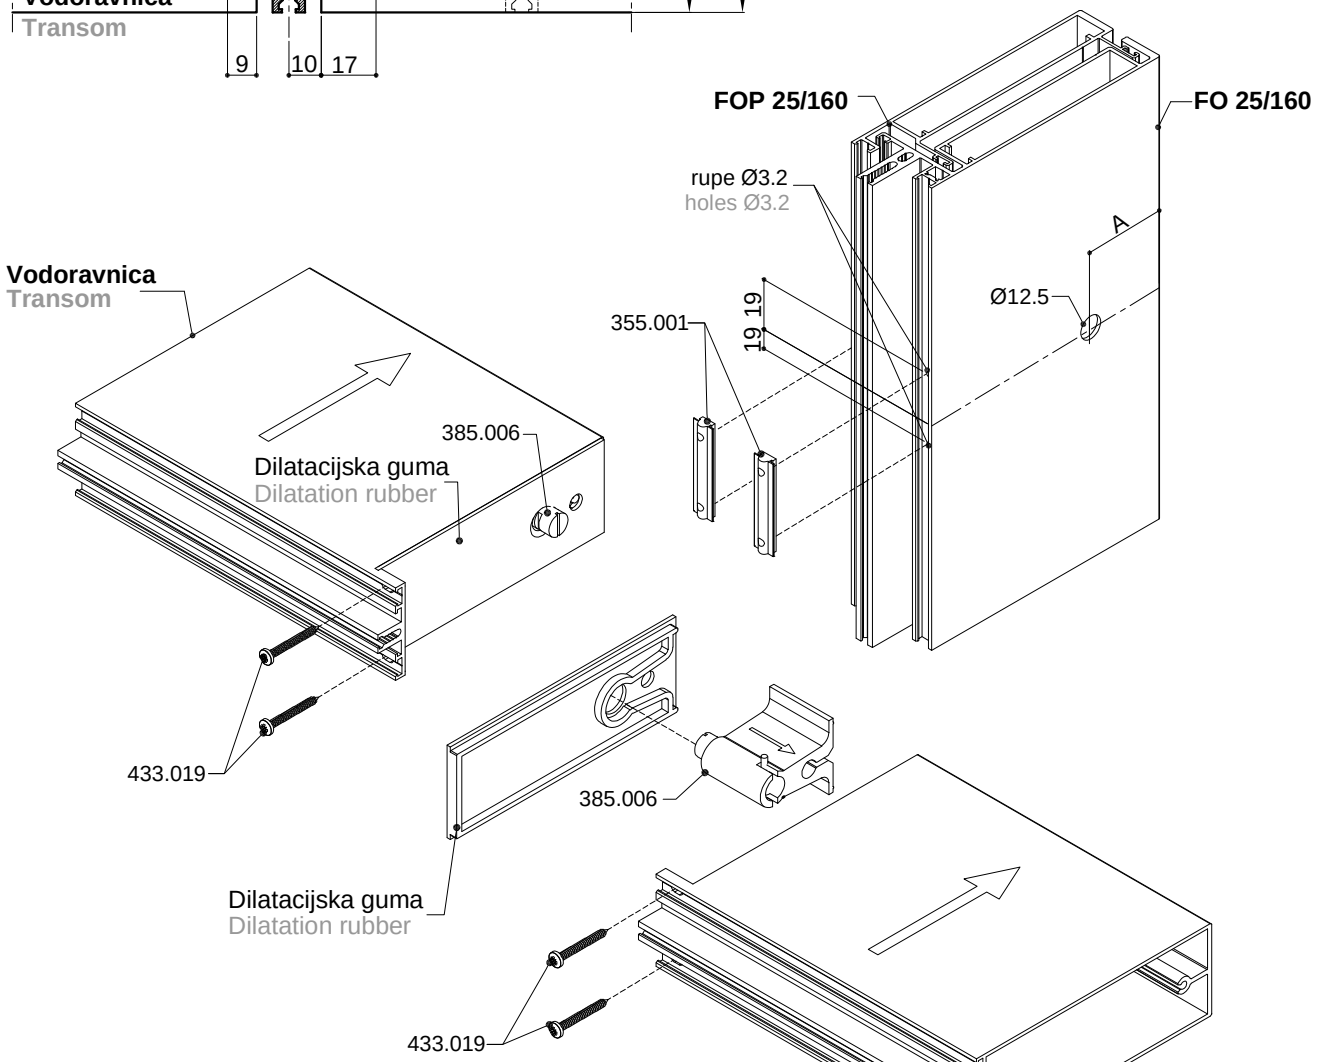

Vodoravnica Transom	Dimenzija A Dimension A	Dilatacijska guma Dilatation rubber
FMV 50/158	43,5 mm	365.031
FMV 50/118	83,5 mm	365.030
FMV 50/88	113,5 mm	365.029


- Obrada okomice **FMO 50/120** za vodoravnicu **FMV 50/118 ili manju** (kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FMO 50/120 for transom FMV 50/118 or smaller (connector 385.006- with dilatation rubber 365.032)

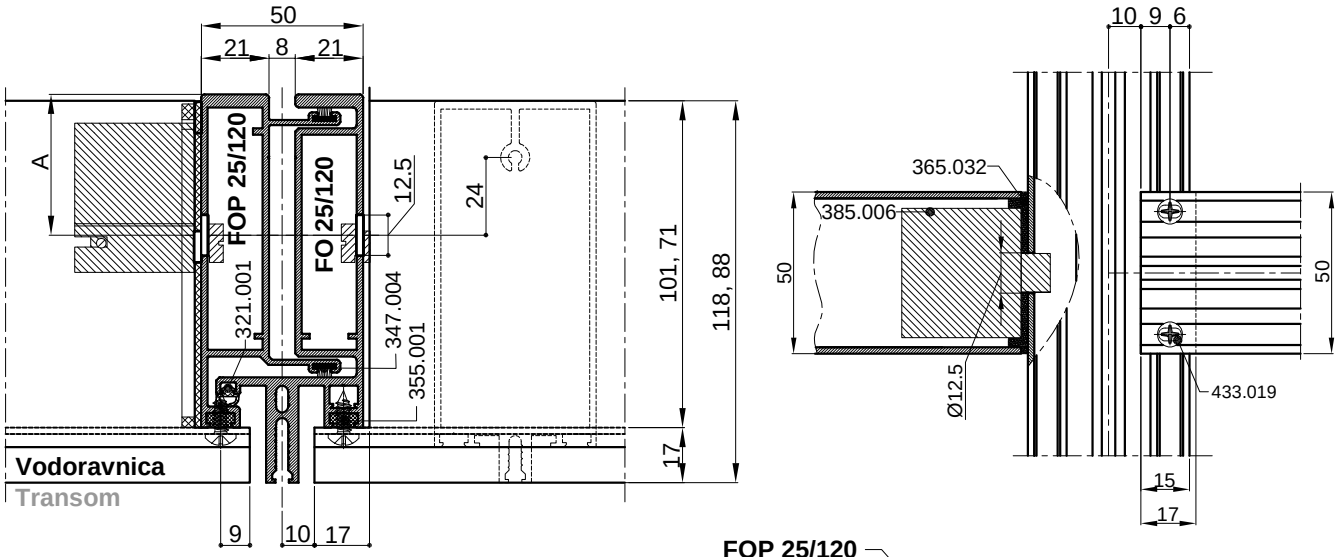


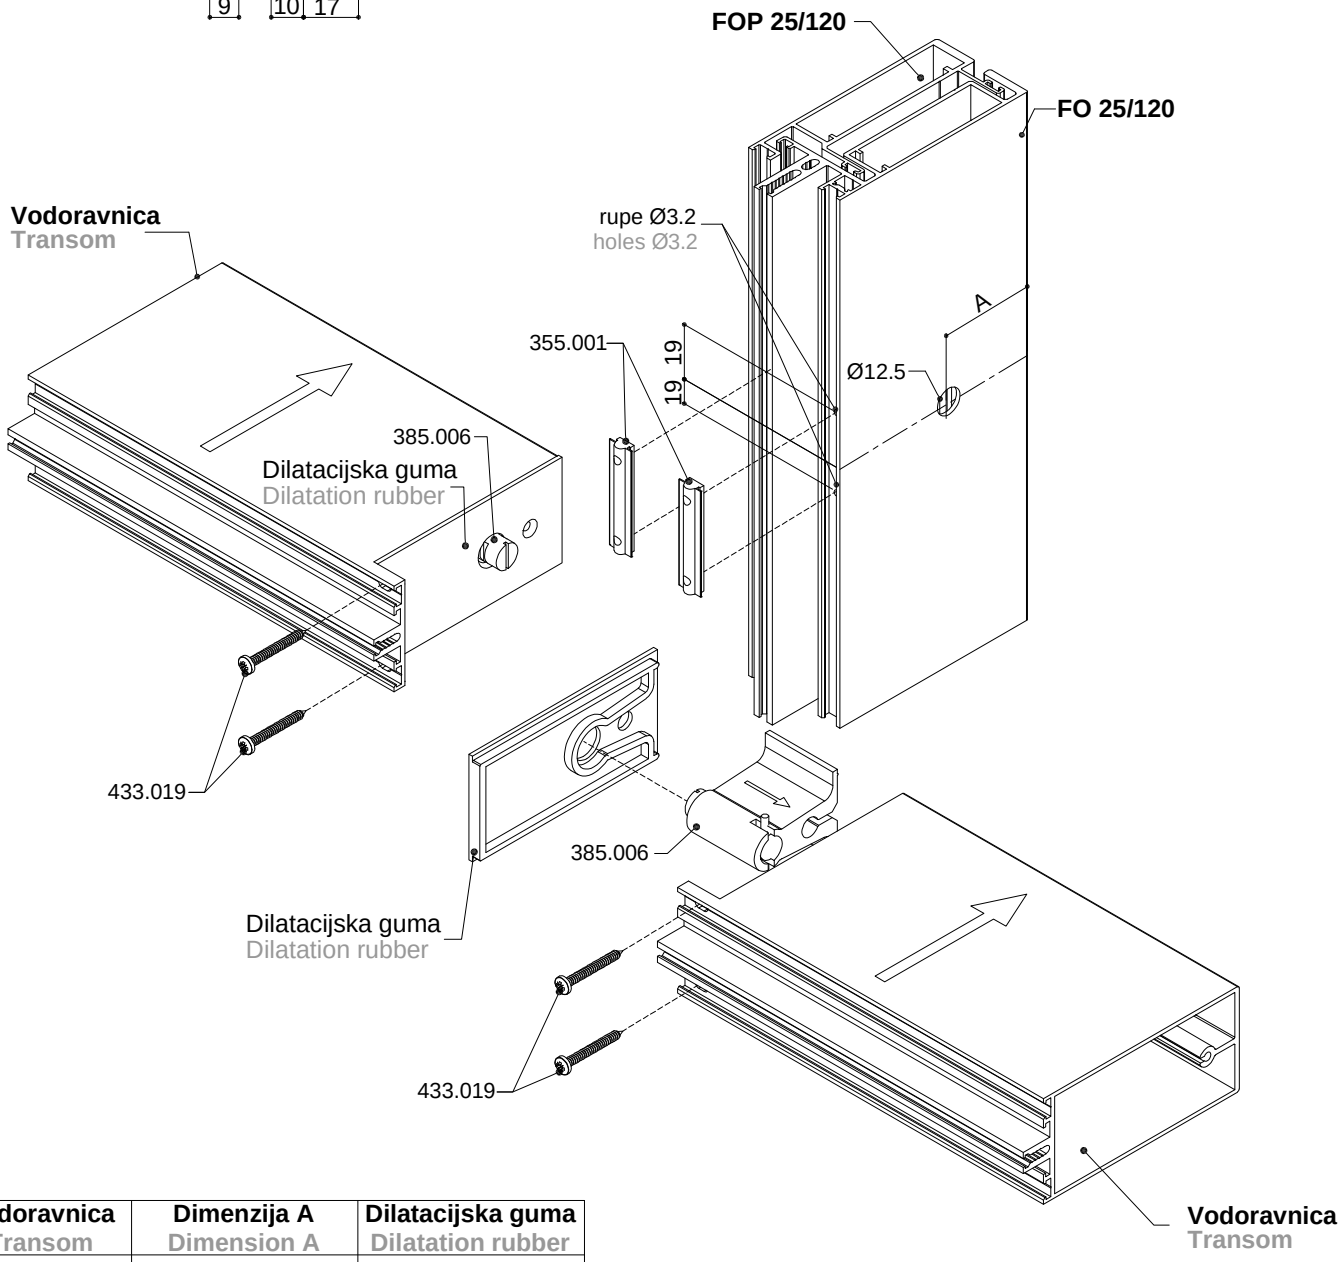


Vodoravnica Transom	Dimenzija A Dimension A	Dilatacijska guma Dilatation rubber
FMV 50/118	43,5 mm	365.030
FMV 50/88	73,5 mm	365.029


- Obrada okomice **FOP 25/90 i FO 25/90** za vodoravnicu **FMV 50/88** (kopča 385.006 - sa dilatacijskom brtvom 365.032)
- Processing of mullion FOP 25/90 i FO 25/90 for transom FMV 50/88 (connector 385.006- with dilatation rubber 365.032)

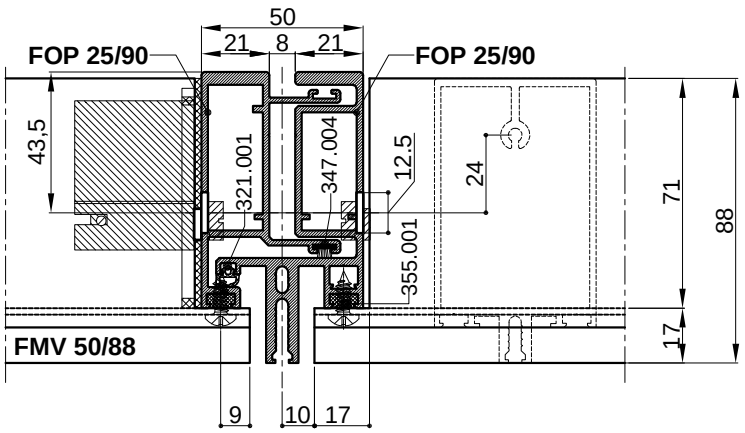


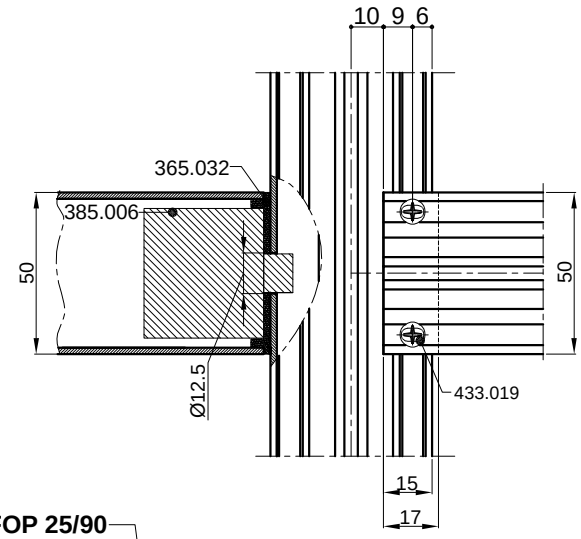

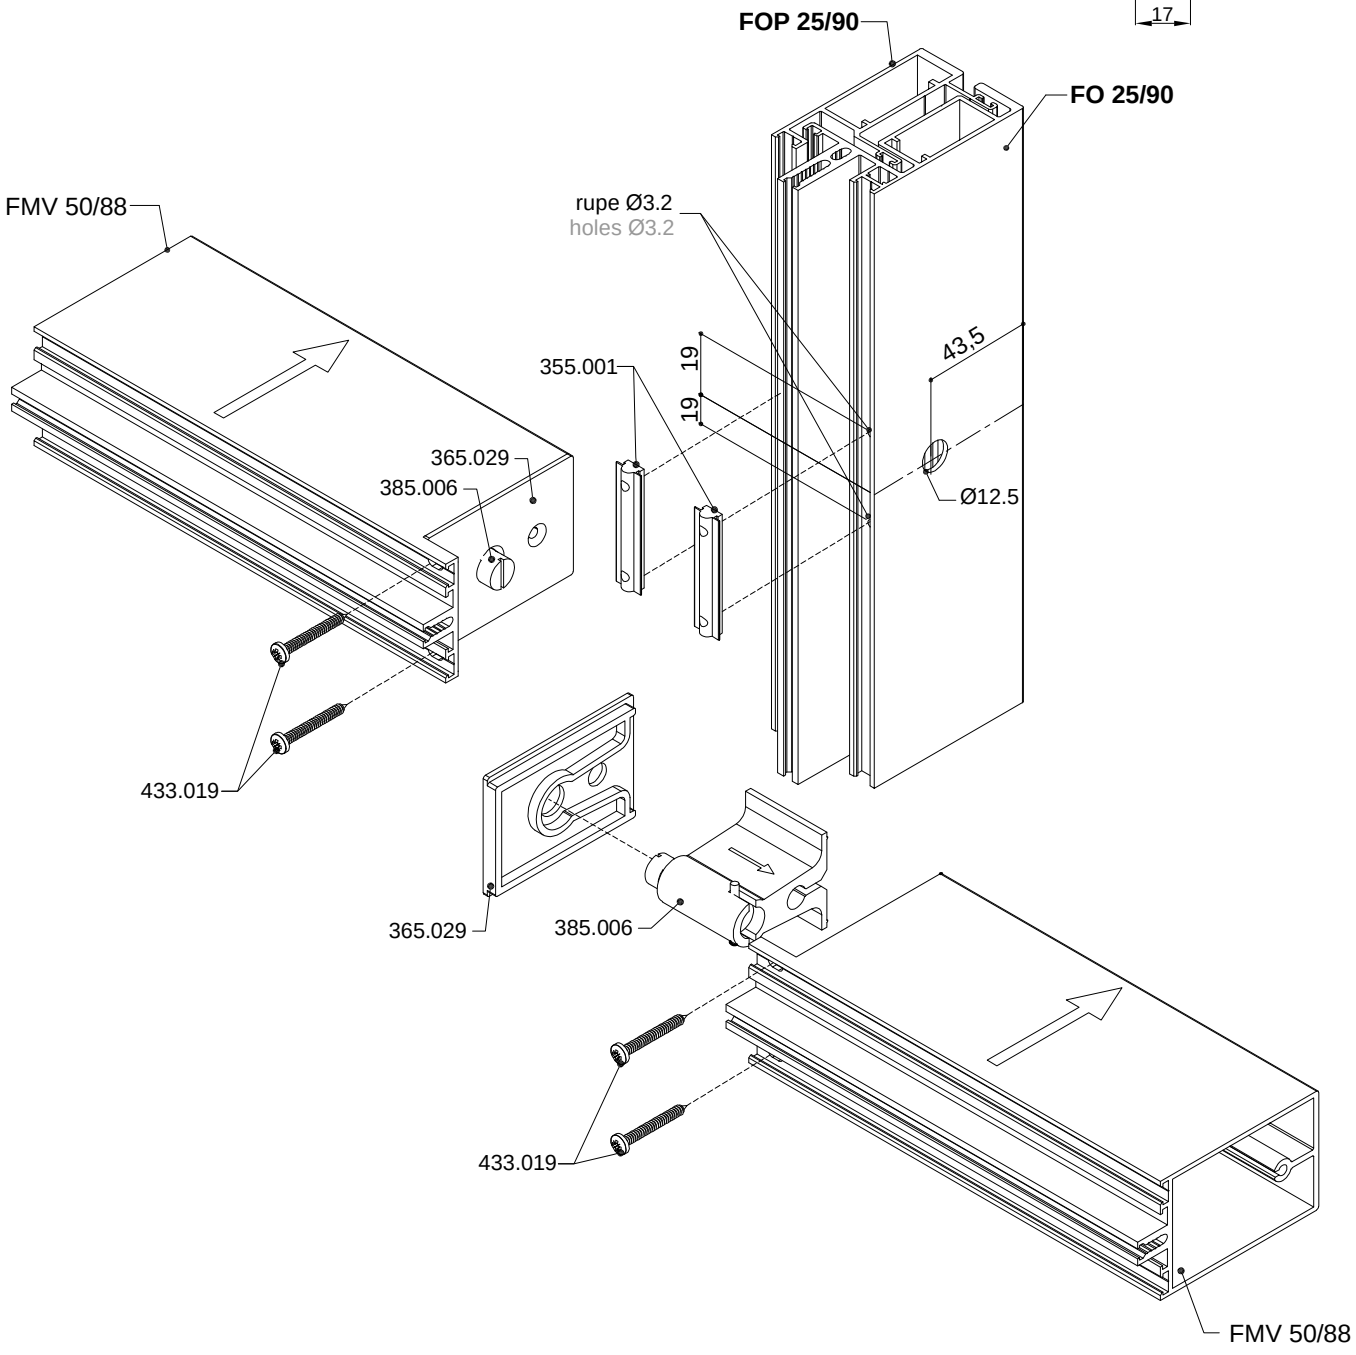


- Obrada okomice **FOP 25/200 i FO 25/200** za vodoravnicu **FMV 50/198 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FOP 25/200 i FO 25/200 for transom FMV 50/198 or smaller (connector 385.006-without dilatation rubber)

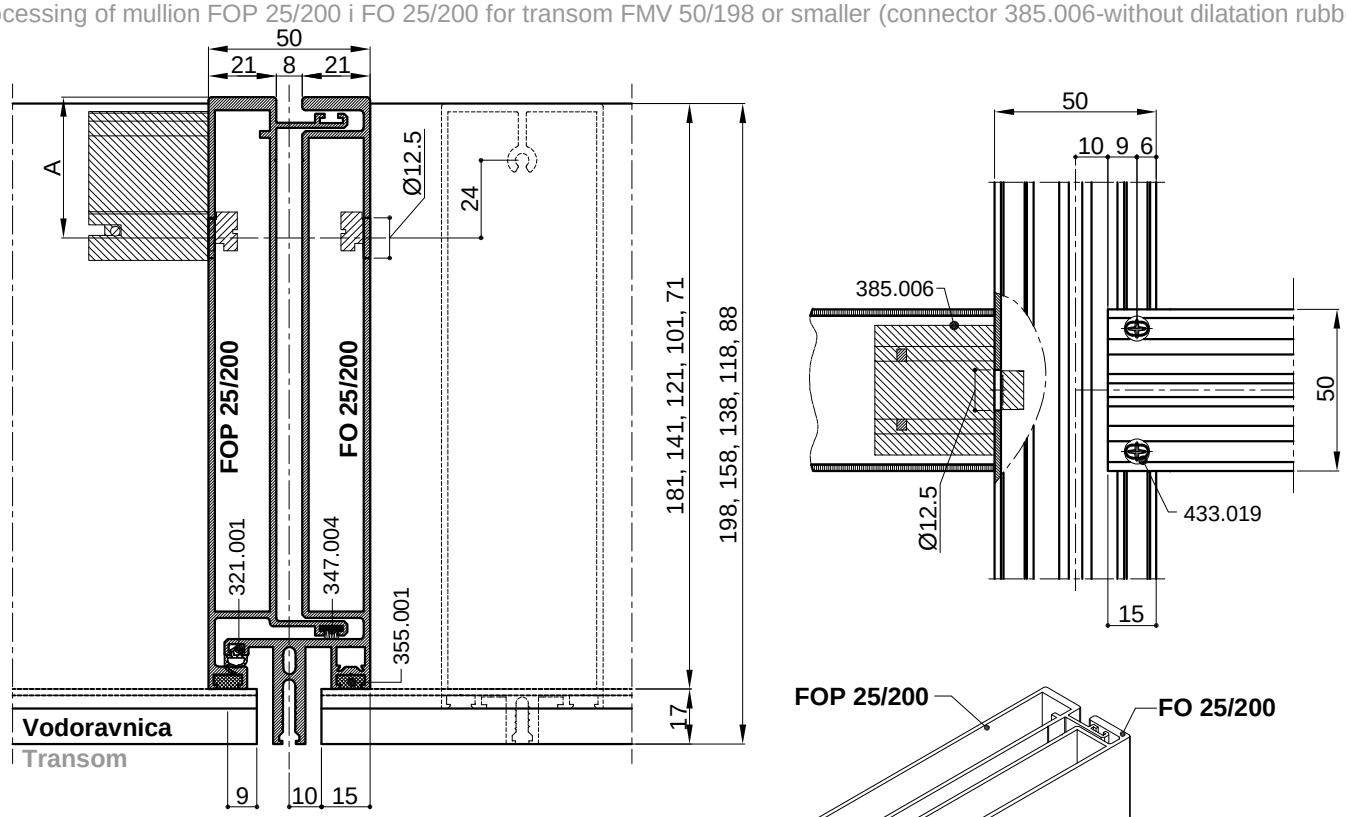


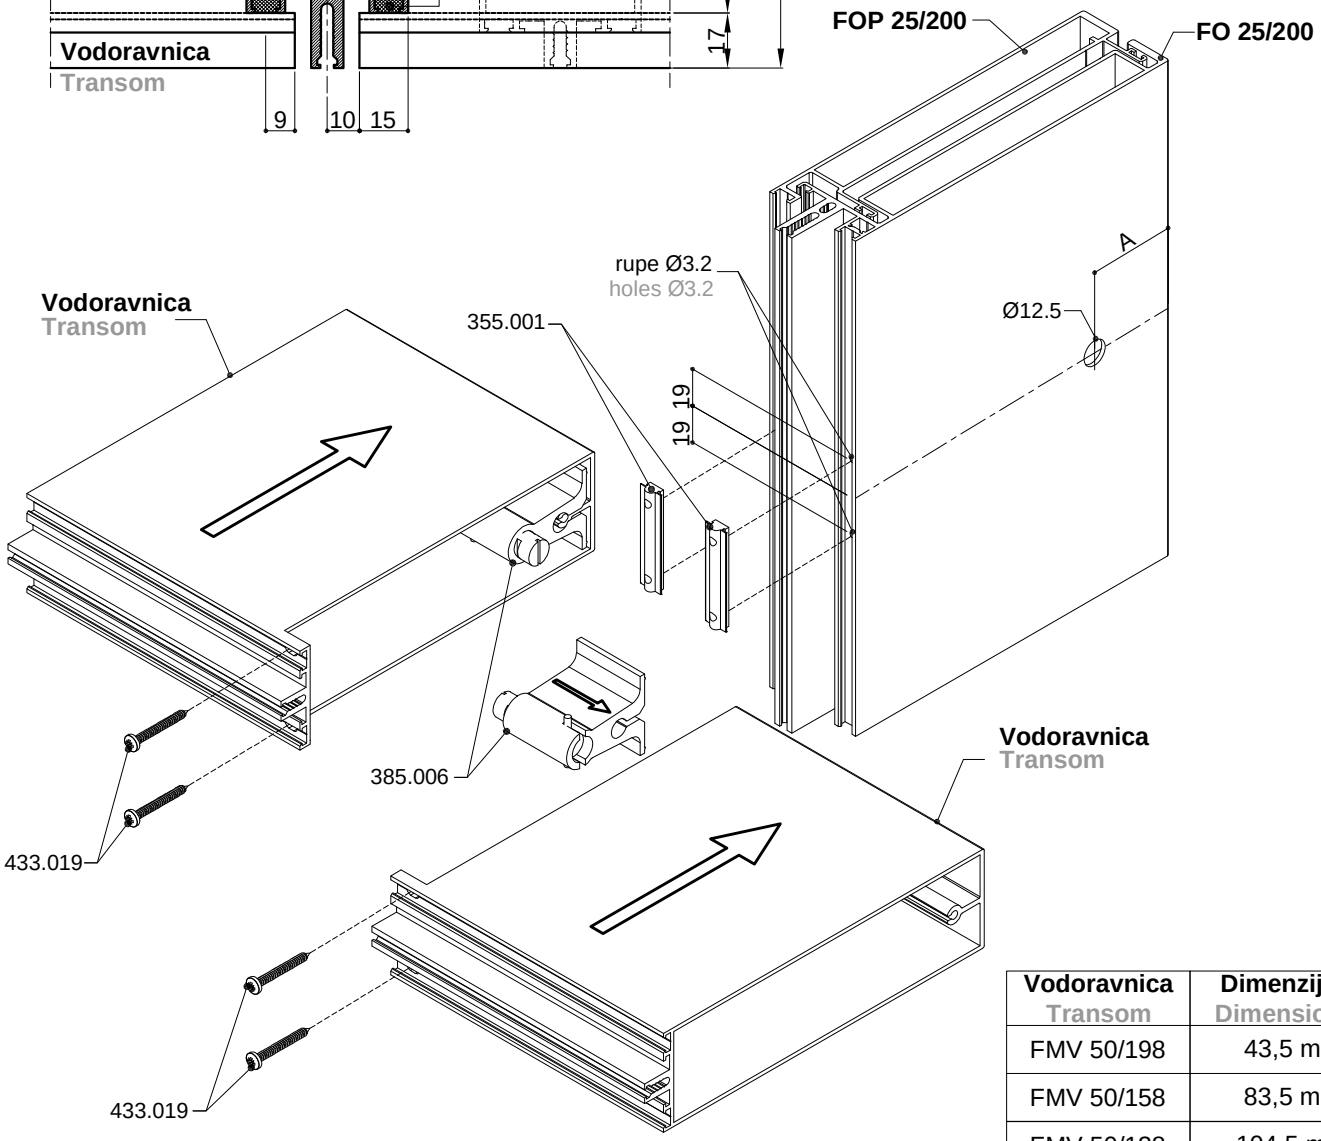

Vodoravnica Transom	Dimenzija A Dimension A
FMV 50/198	43,5 mm
FMV 50/158	83,5 mm
FMV 50/138	104,5 mm
FMV 50/118	123,5 mm
FMV 50/88	153,5 mm


- Obrada okomice **FMO 50/160** za vodoravnicu **FMV 50/158 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/160 for transom FMV 50/158 or smaller (connector 385.006-without dilatation rubber)

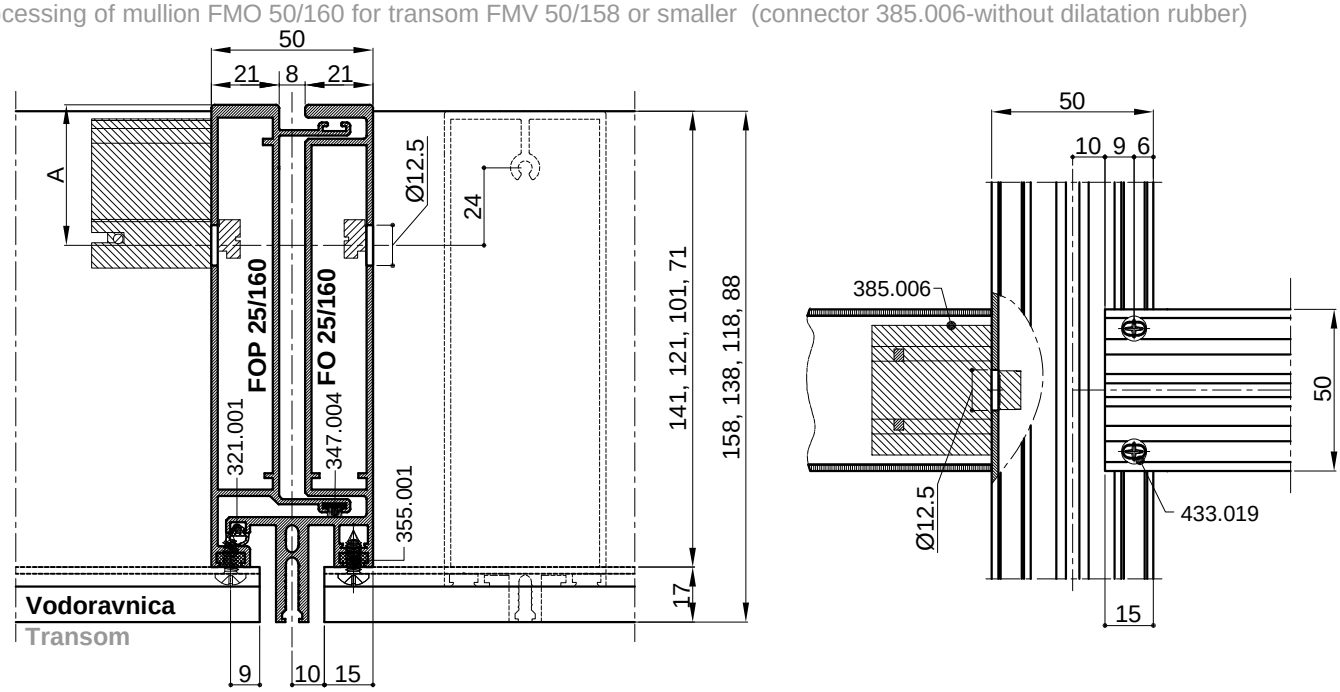


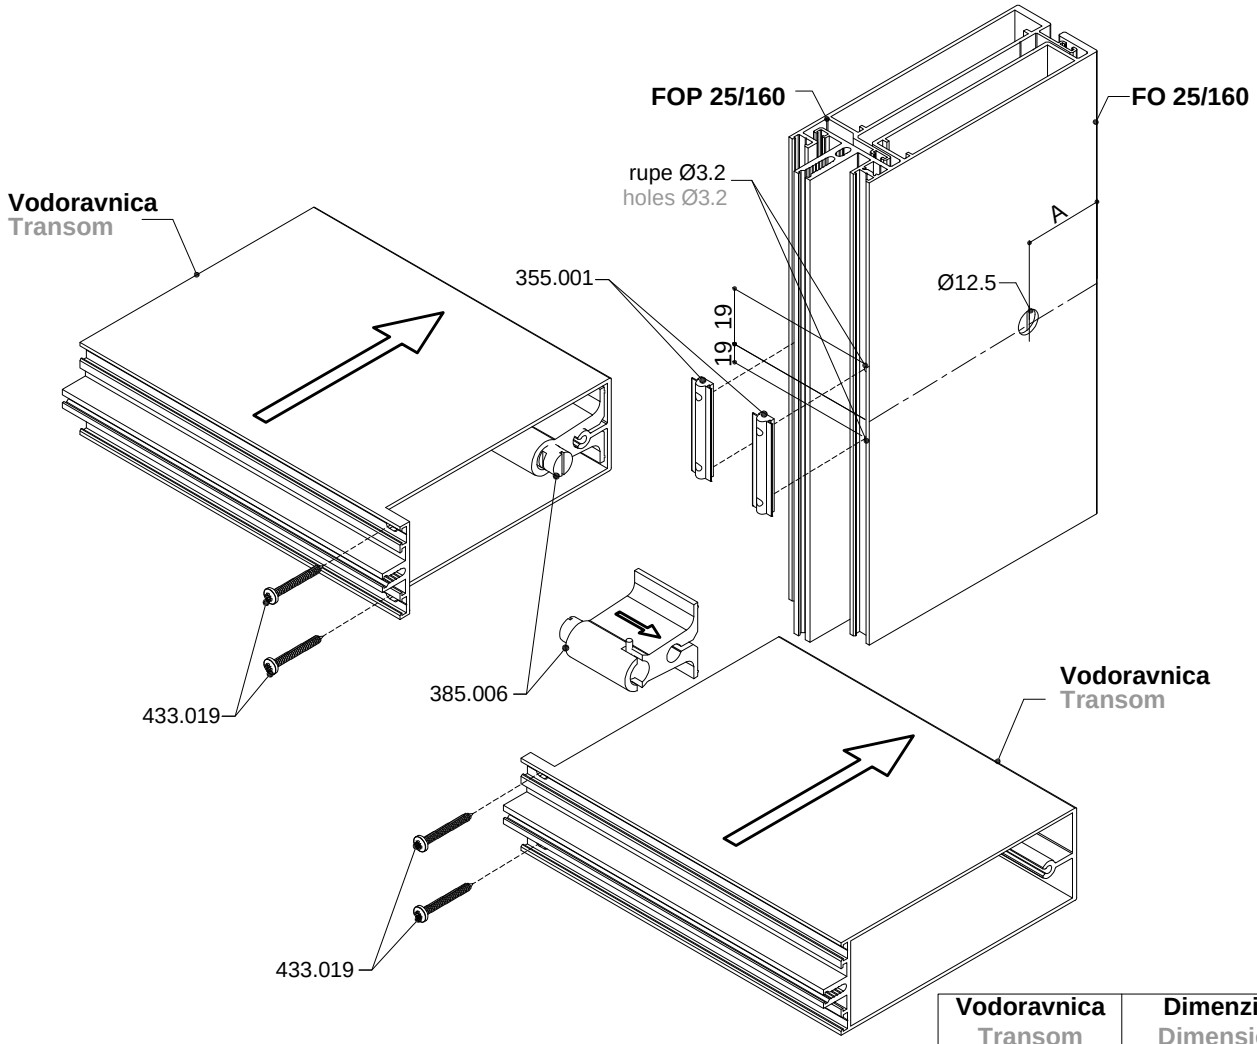

Vodoravnica Transom	**Dimenzija A** Dimension A
FMV 50/158	43,5 mm
FMV 50/138	64,5 mm
FMV 50/118	83,5 mm
FMV 50/88	113,5 mm


- Obrada okomice **FMO 50/120** za vodoravnicu **FMV 50/118 ili manju** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/120 for transom FMV 50/118 or smaller (connector 385.006-without dilatation rubber)

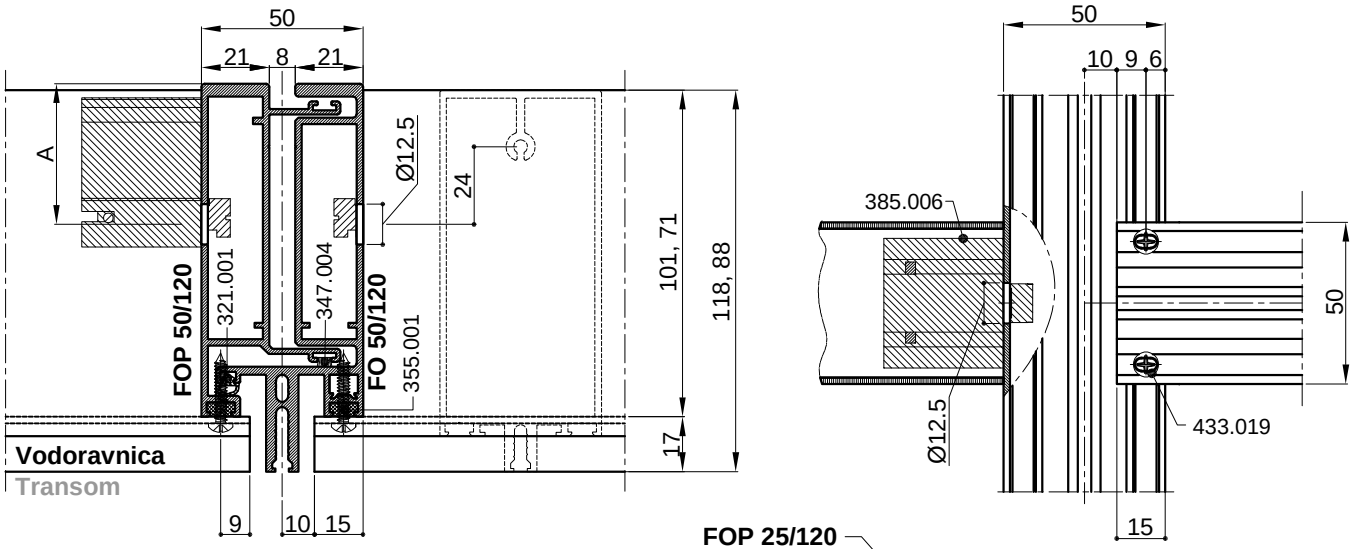


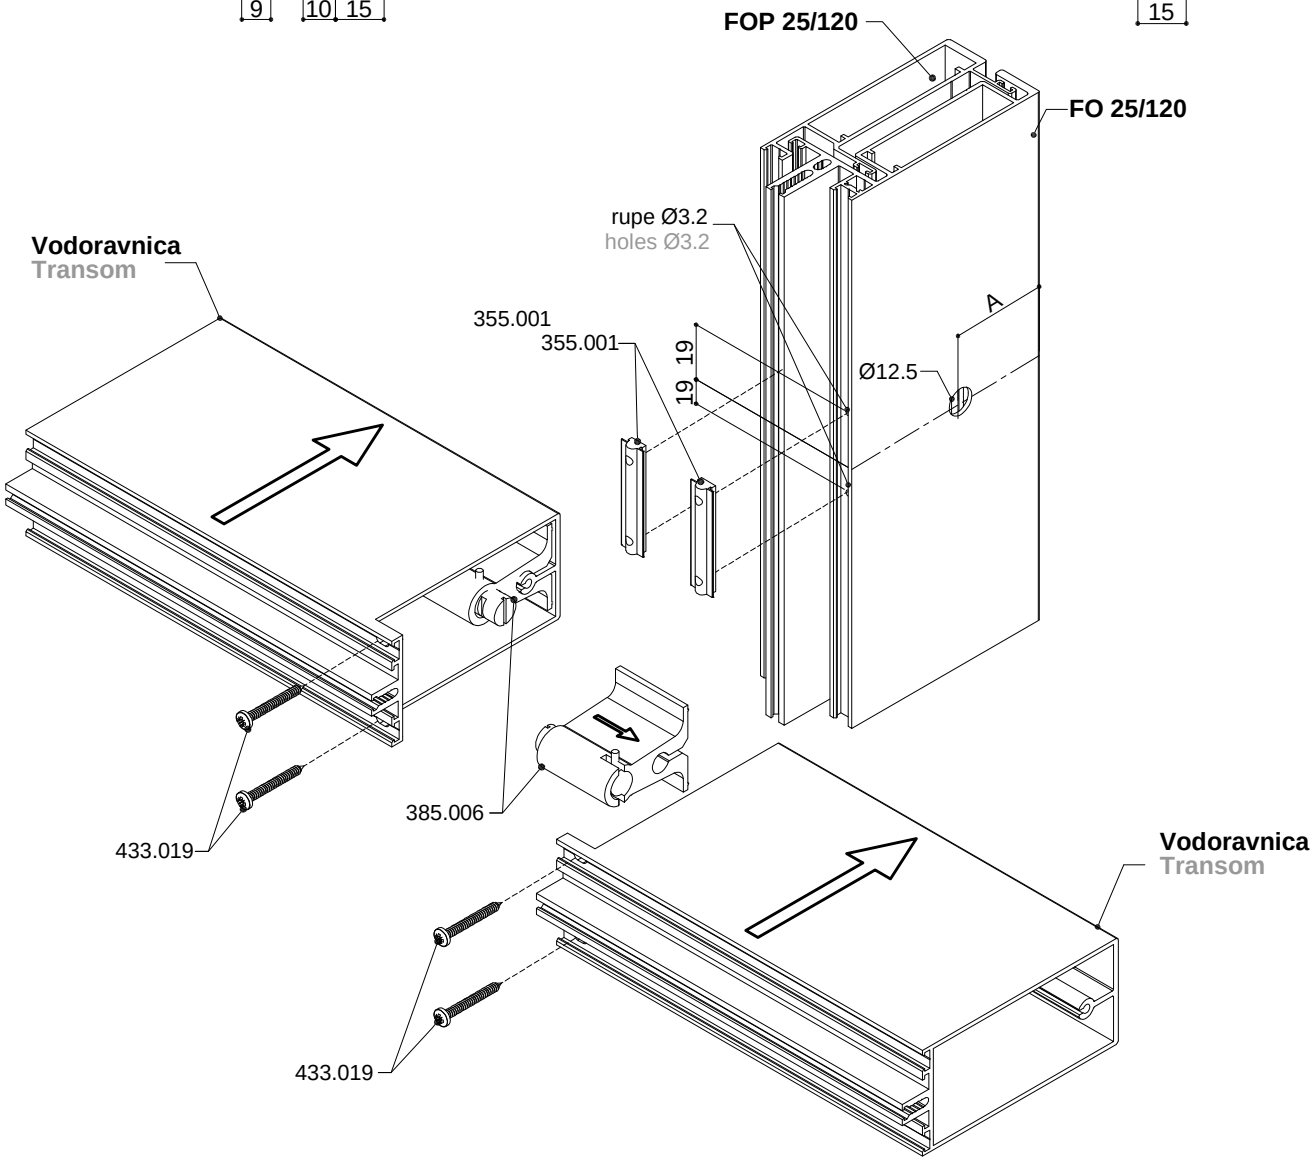


Vodoravnica Transom	**Dimenzija A** Dimension A
FMV 50/118	43,5 mm
FMV 50/88	73,5 mm


- Obrada okomice **FMO 50/90** za vodoravnicu **FMV 50/88** (kopča 385.006-bez dilatacijske brtve)
- Processing of mullion FMO 50/90 for transom FMV 50/88 (connector 385.006-without dilatation rubber)

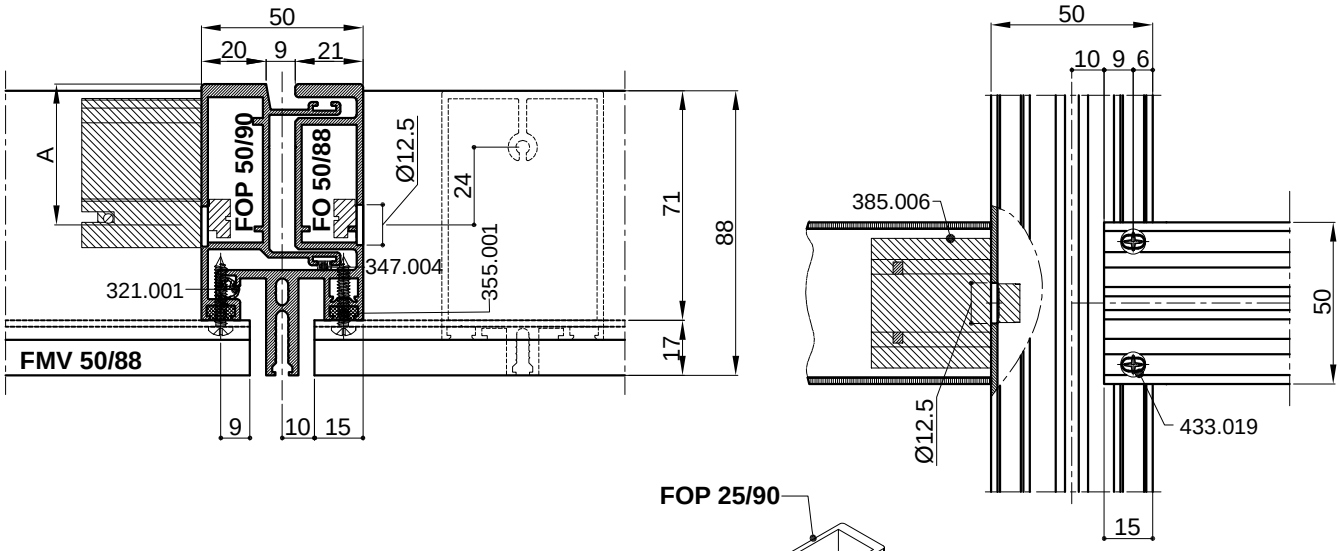

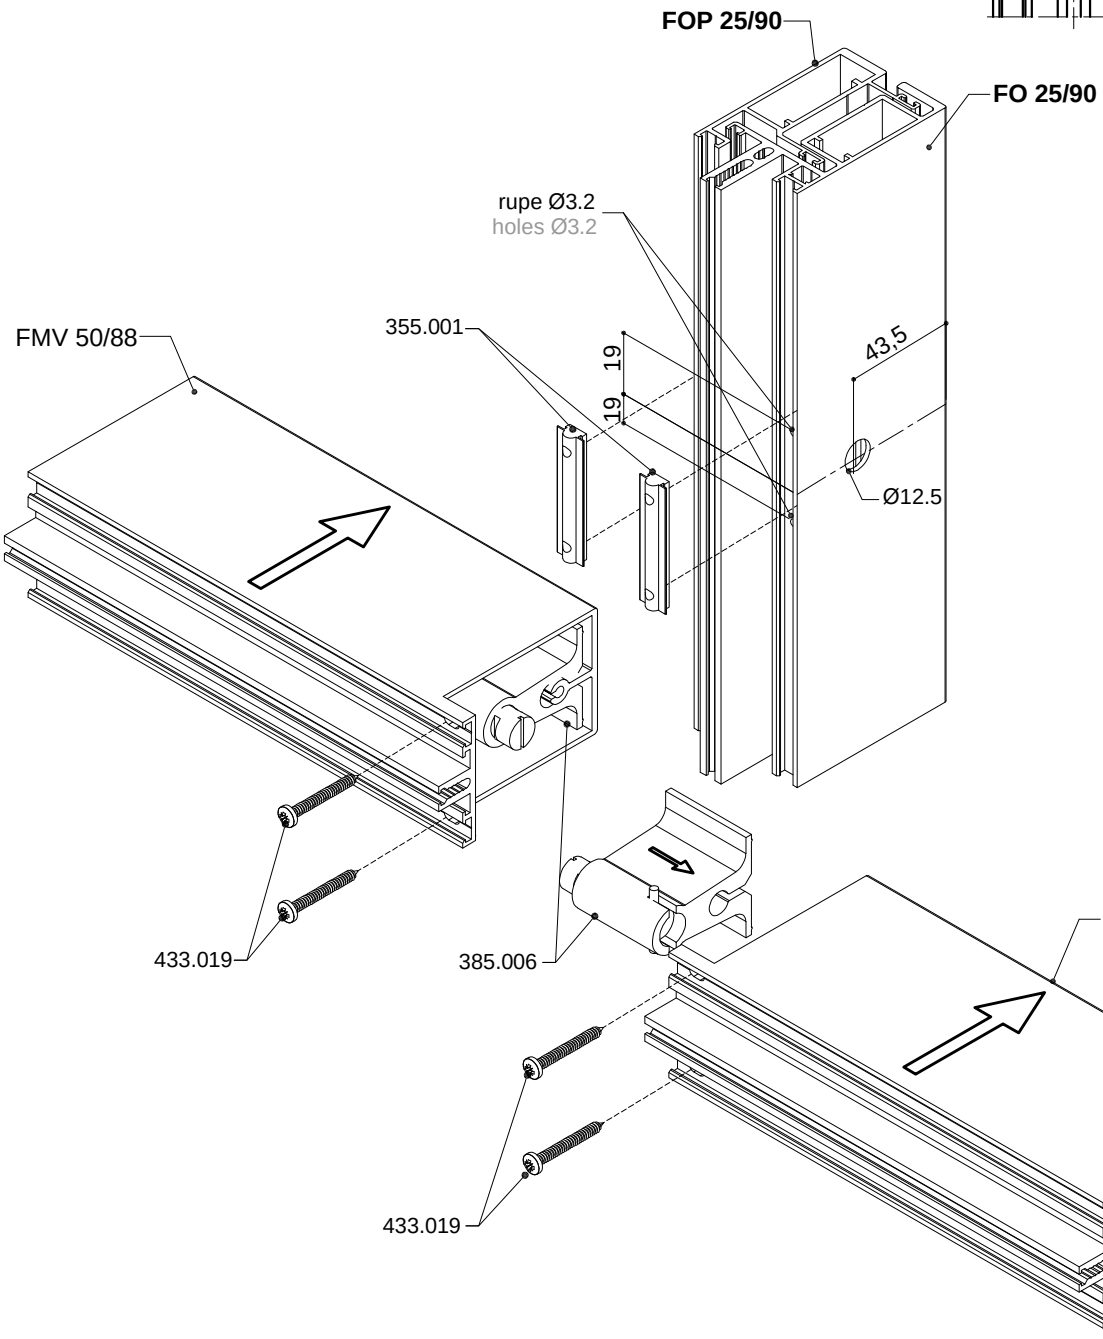


- Obrada vodoravnice **FMV 50/198 za** okomicu **FMO 50/200** ili veću (gumeni odstojnik sa obrubom)
- Processing of transom FMV 50/198 for mullion FMO 50/200 or greater (rimmed dilatation rubber)

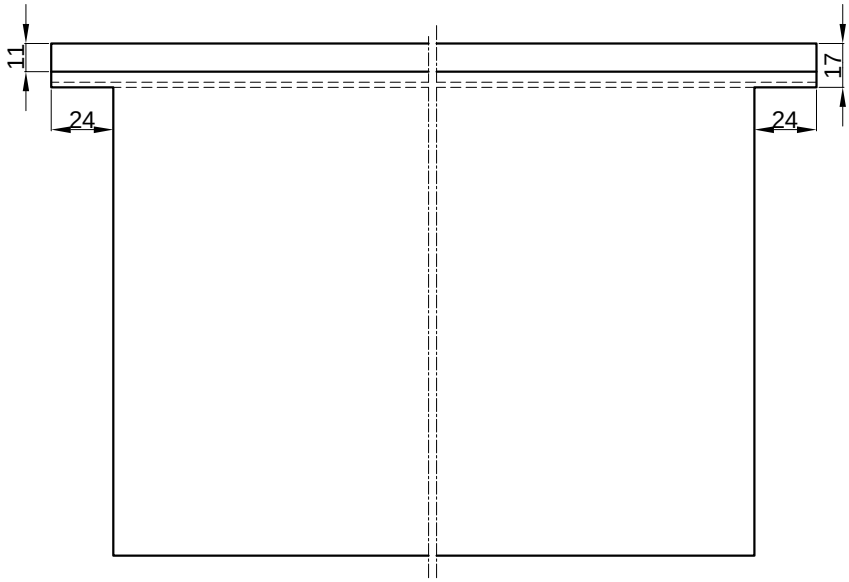





PRESJEK B-B
CROSS SECTION B-B

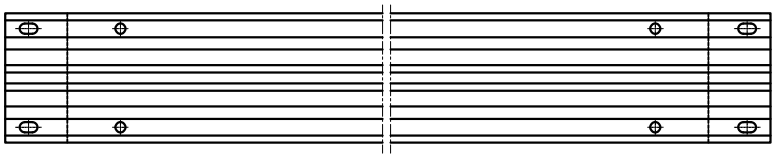




PRESJEK A-A
CROSS SECTION A-A

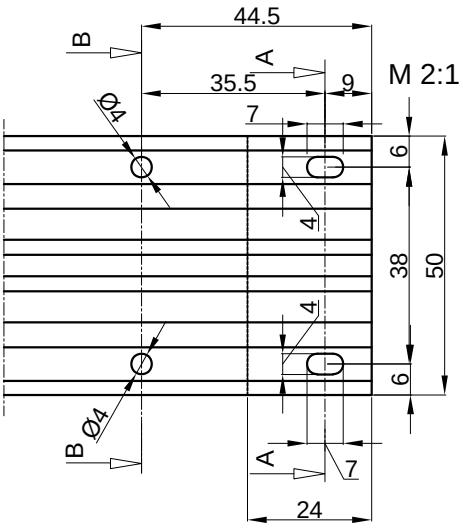


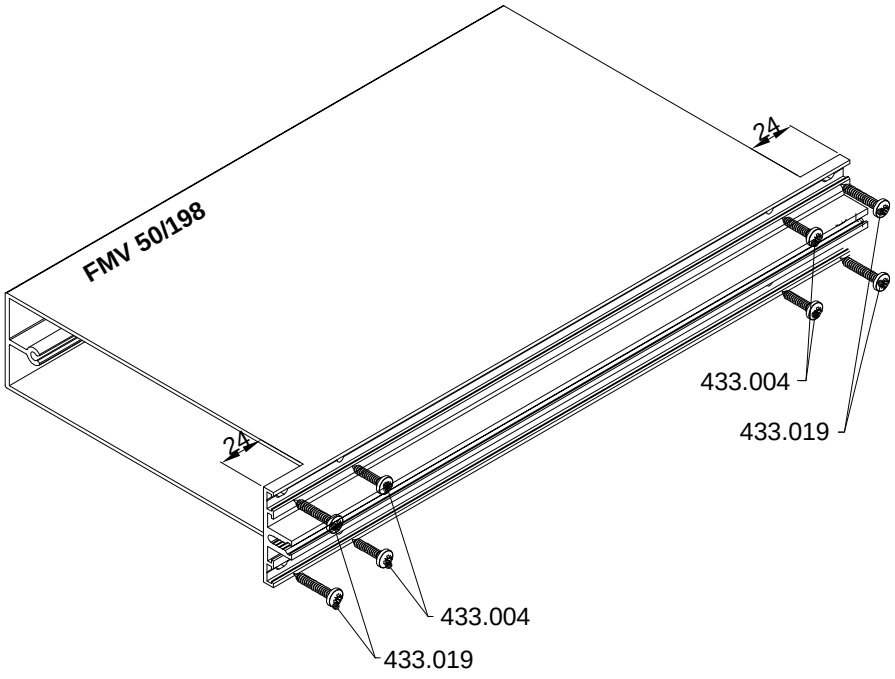


366.007
gumeni odstojnik sa obrubom za vodoravnicu FMV 50/198
rimmed dilatation rubber for transom FMV 50/198



- Obrada vodoravnice **FMV 50/158** za okomicu **FMO 50/160** ili veću (gumeni odstojnik sa obrubom)
- Processing of transom FMV 50/158 for mullion FMO 50/160 or greater (rimmed dilatation rubber)

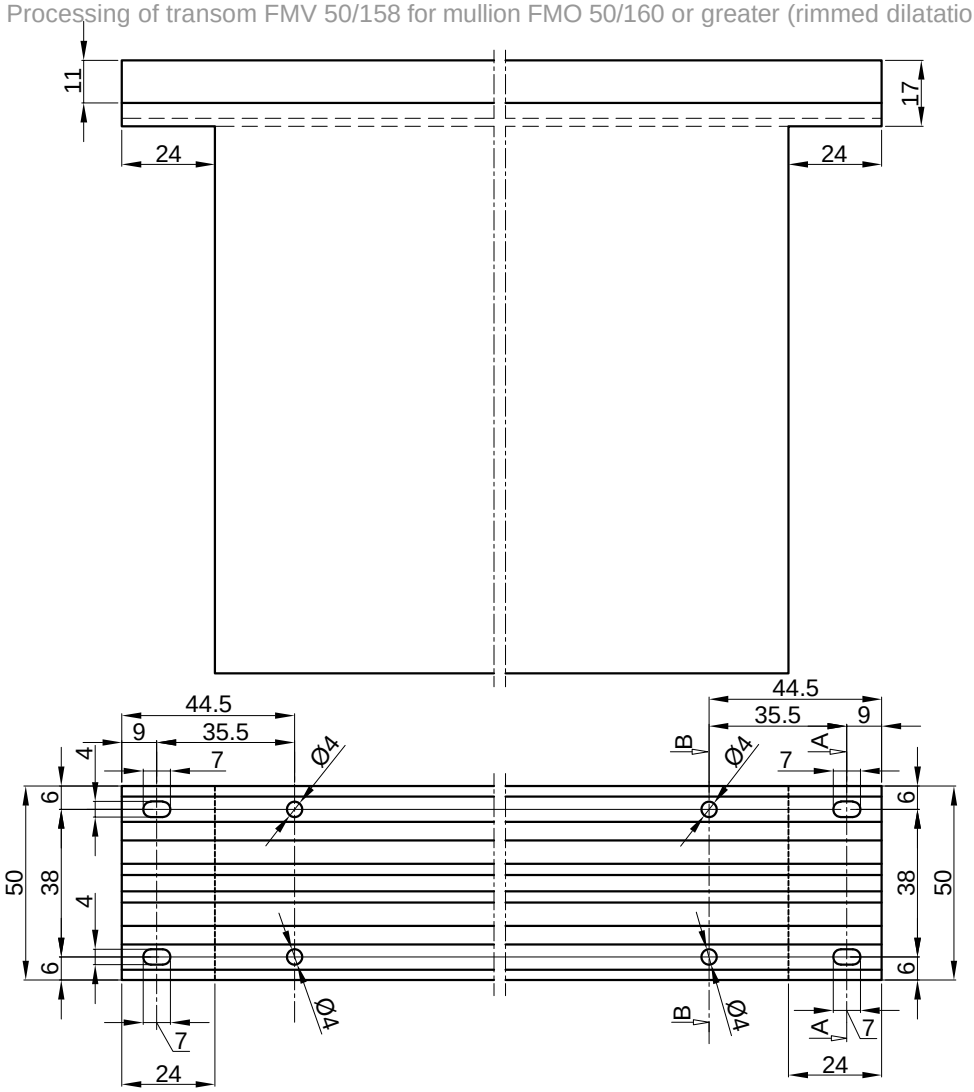


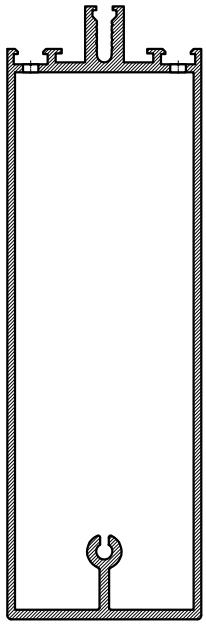

PRESJEK B-B
CROSS SECTION B-B





PRESJEK A-A
CROSS SECTION A-A

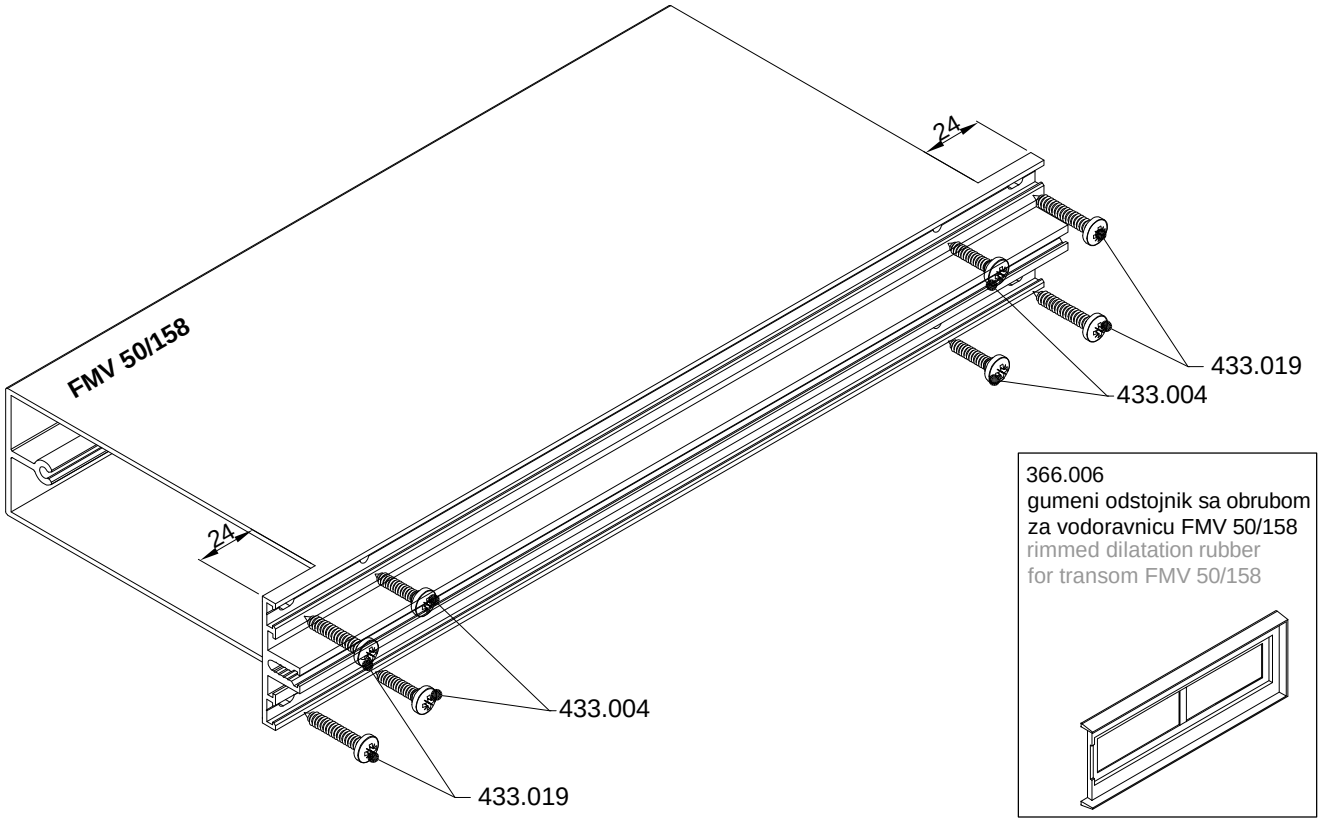

366.006
gumeni odstojnik sa obrubom za vodoravnicu FMV 50/158
rimmed dilatation rubber for transom FMV 50/158

- Obrada vodoravnice **FMV 50/138** za okomicu **FMO 50/140** ili veću (gumeni odstojnik sa obrubom)
- Processing of transom FMV 50/138 for mullion FMO 50/140 or greater (rimmed dilatation rubber)

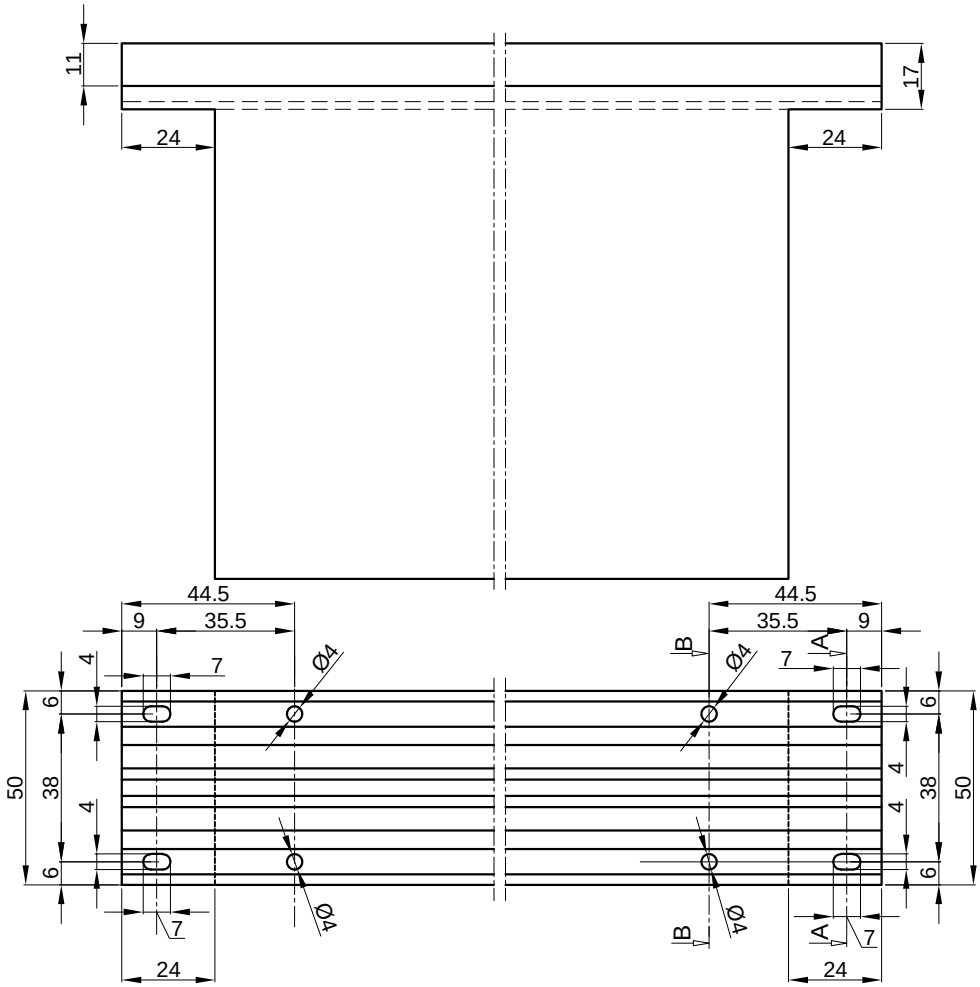


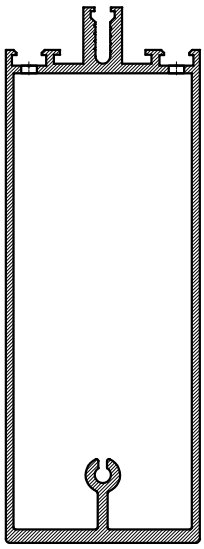

PRESJEK B-B
CROSS SECTION B-B





PRESJEK A-A
CROSS SECTION A-A

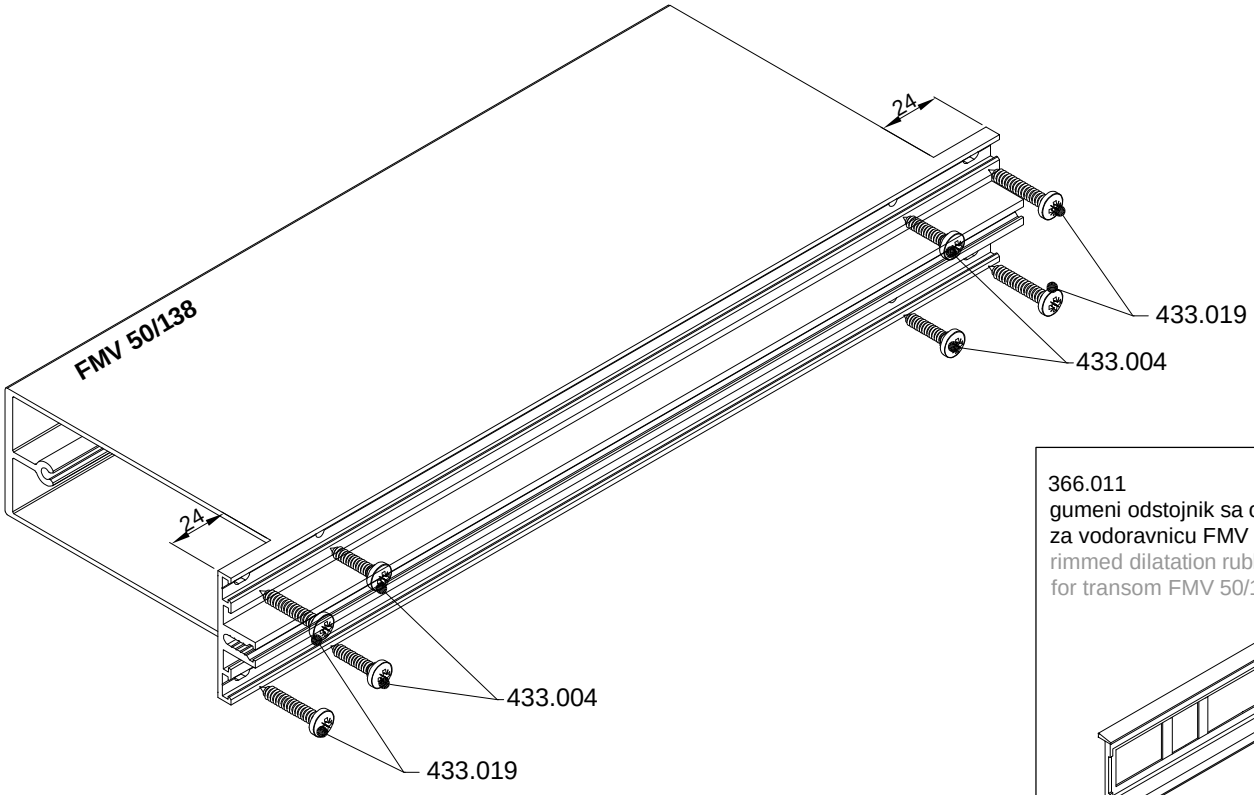


366.011
gumeni odstojnik sa obrubom za vodoravnicu FMV 50/138
rimmed dilatation rubber for transom FMV 50/138

- Obrada vodoravnice **FMV 50/118** za okomicu **FMO 50/120** ili veću (gumeni odstojnik sa obrubom)
- Processing of transom FMV 50/118 for mullion FMO 50/120 or greater (rimmed dilatation rubber)

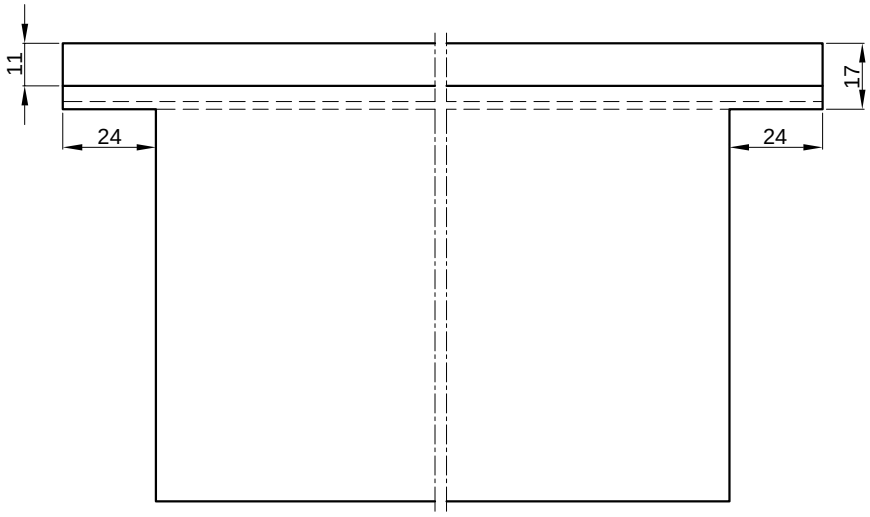

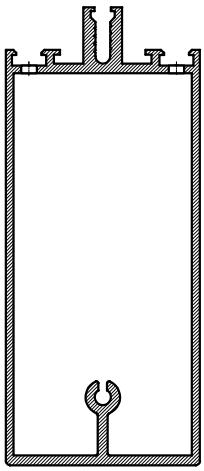


PRESJEK B-B
CROSS SECTION B-B

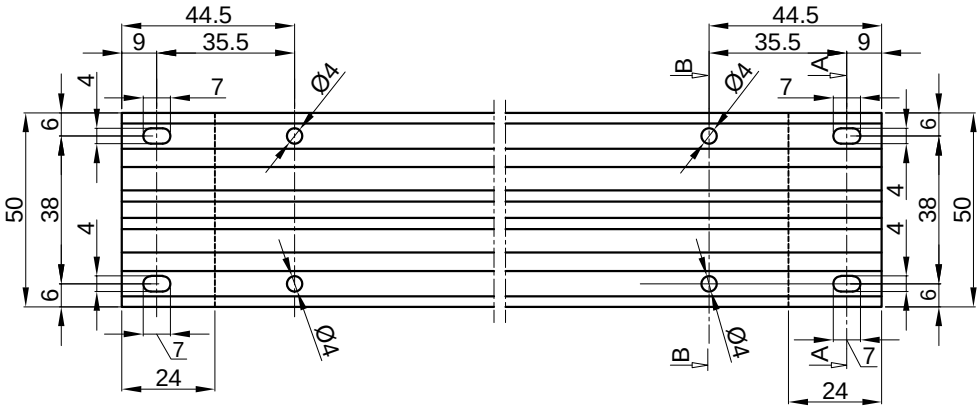





PRESJEK A-A
CROSS SECTION A-A

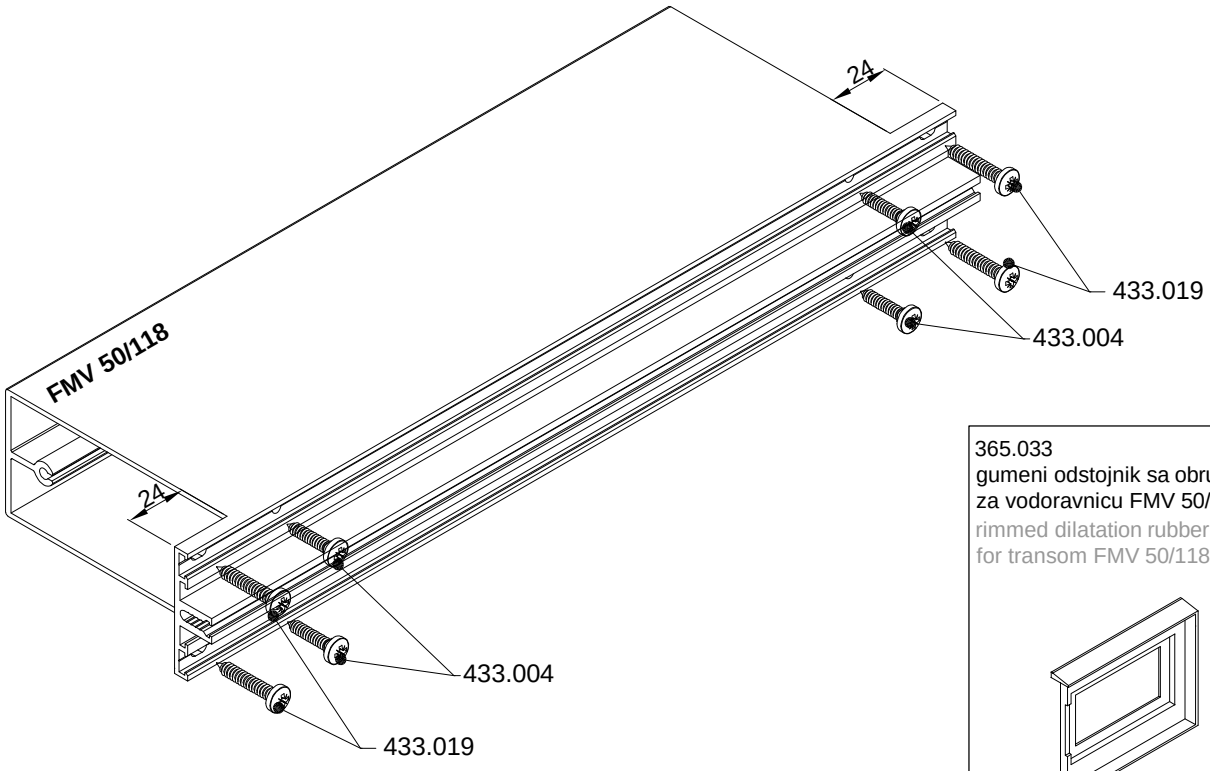


365.033
gumeni odstojnik sa obrubom za vodoravnicu FMV 50/118
rimmed dilatation rubber for transom FMV 50/118

- Obrada vodoravnice **FMV 50/88** za okomicu **FMO** 50/90 ili veću (gumeni odstojnik sa obrubom)
- Processing of transom FMV 50/88 for mullion FMO 50/90 or greater (rimmed dilatation rubber)

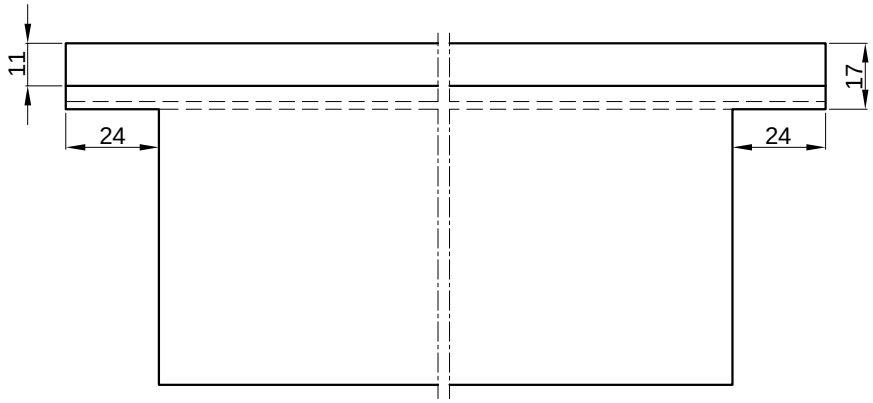

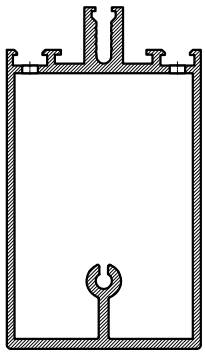


PRESJEK B-B
CROSS SECTION B-B

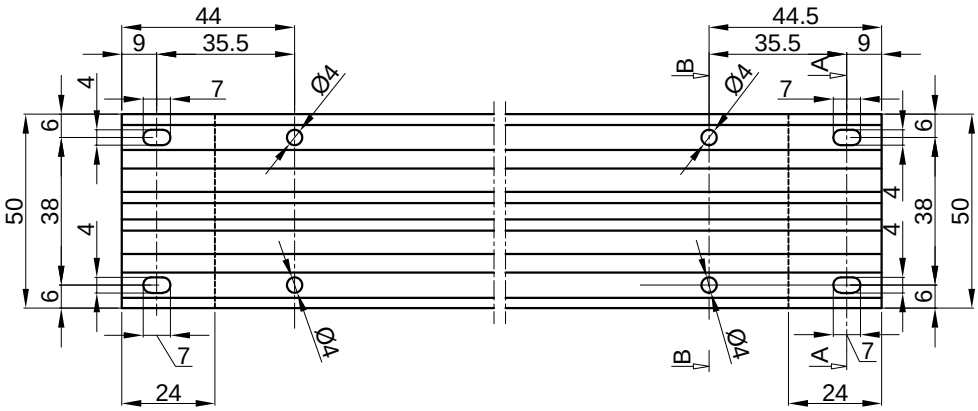





PRESJEK A-A
CROSS SECTION A-A

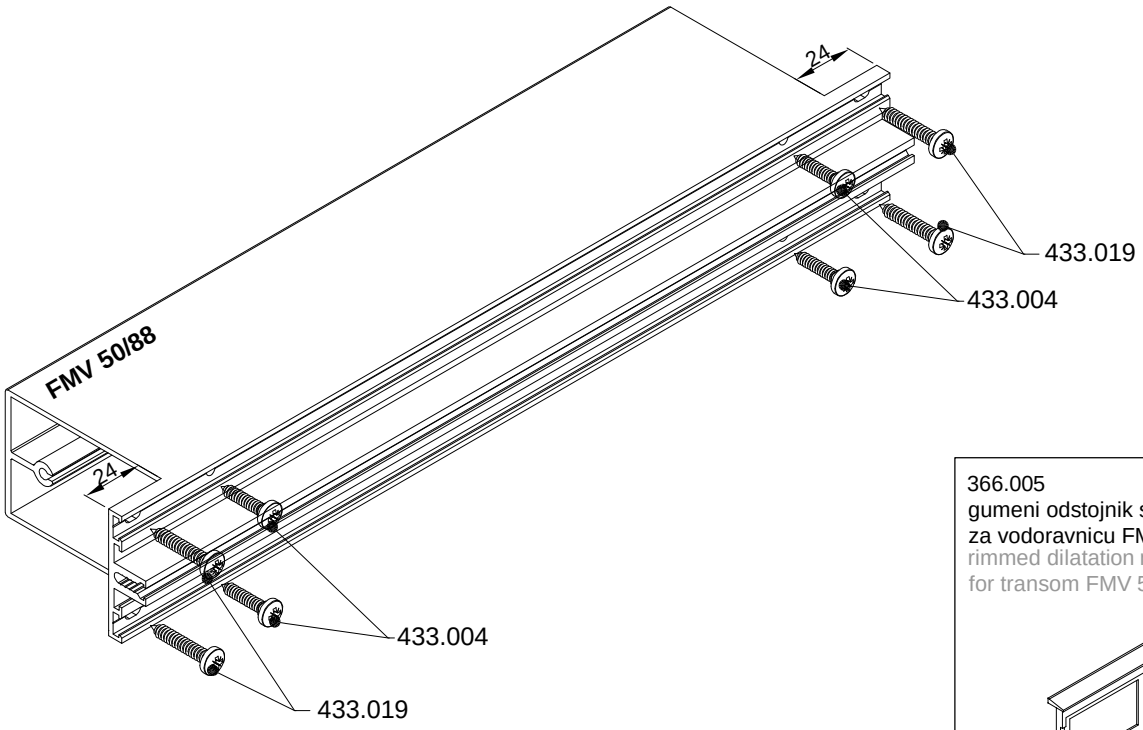


366.005
gumeni odstojnik sa obrubom za vodoravnicu FMV 50/88
rimmed dilatation rubber for transom FMV 50/88




- Obrada vodoravnice **FMV 50/268** za okomicu **FMO 50/270** (ravni gumeni odstojnik)
- Processing of transom FMV 50/268 for mullion FMO 50/270 (flat dilatation rubber)

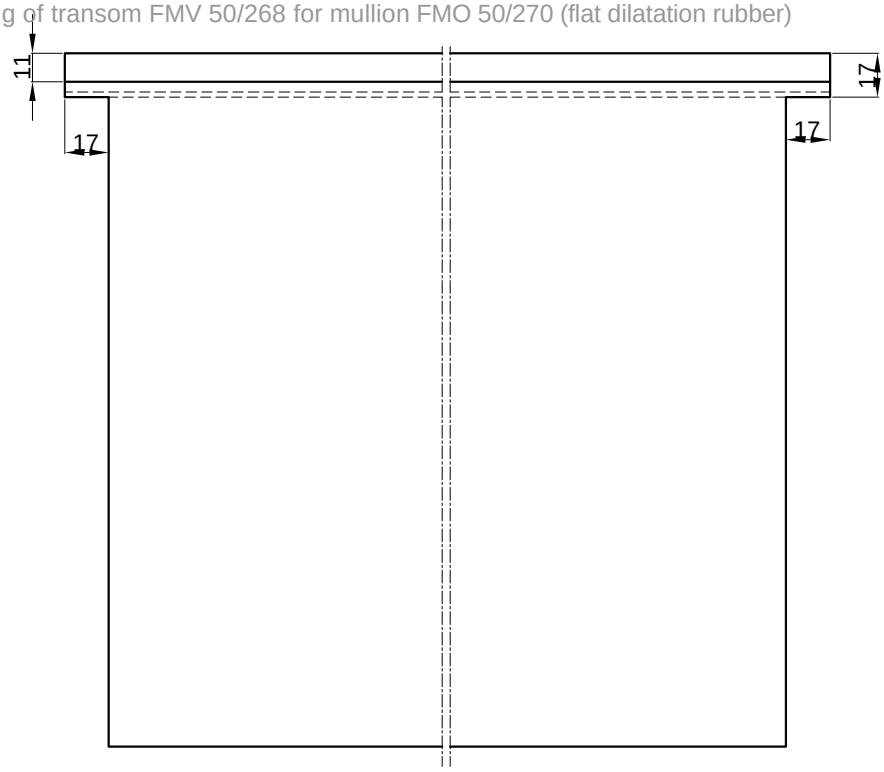





PRESJEK B-B
CROSS SECTION B-B






PRESJEK A-A
CROSS SECTION A-A

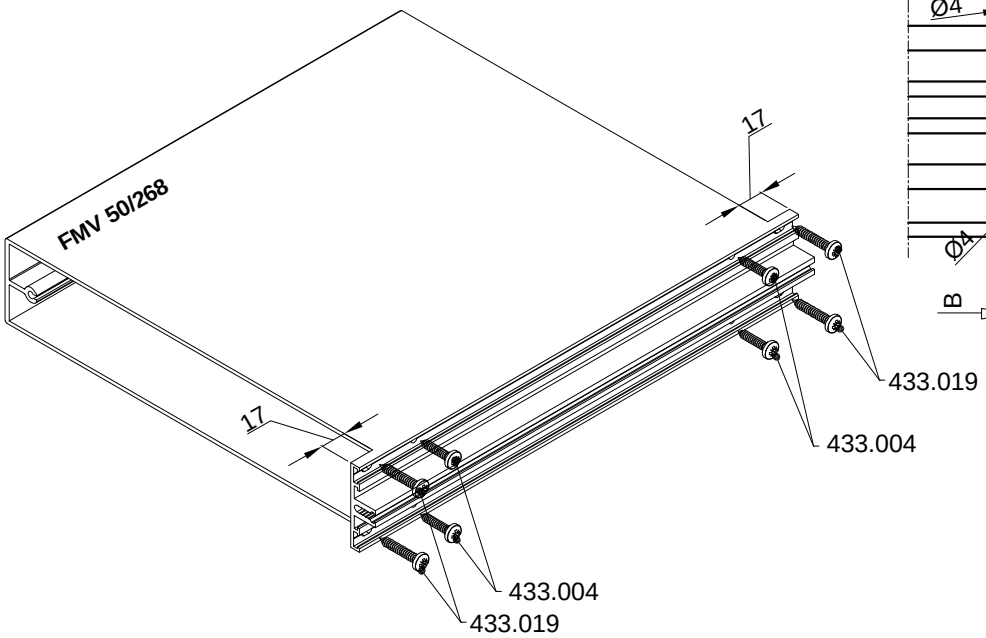


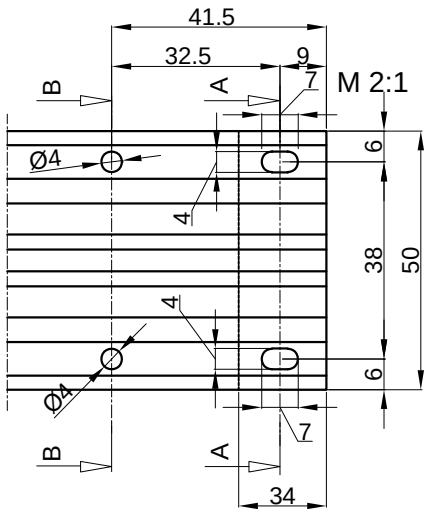


361.032
ravni gumeni odstojnik
za vodoravnicu FMV 50/268
flat dilatation rubber
for transom FMV 50/258



- Obrada vodoravnice **FMV 50/228** za okomicu **FMO 50/230 ili veću** (ravni gumeni odstojnik)
- Processing of transom FMV 50/228 for mullion FMO 50/230 (flat dilatation rubber)

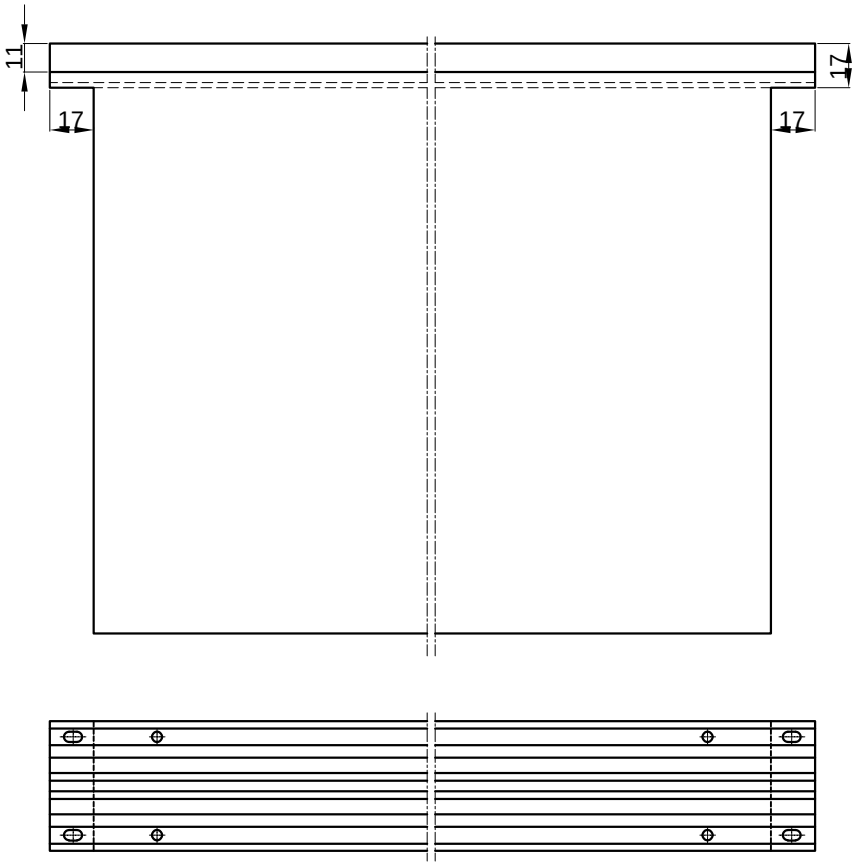





PRESJEK B-B
CROSS SECTION B-B




PRESJEK A-A
CROSS SECTION A-A

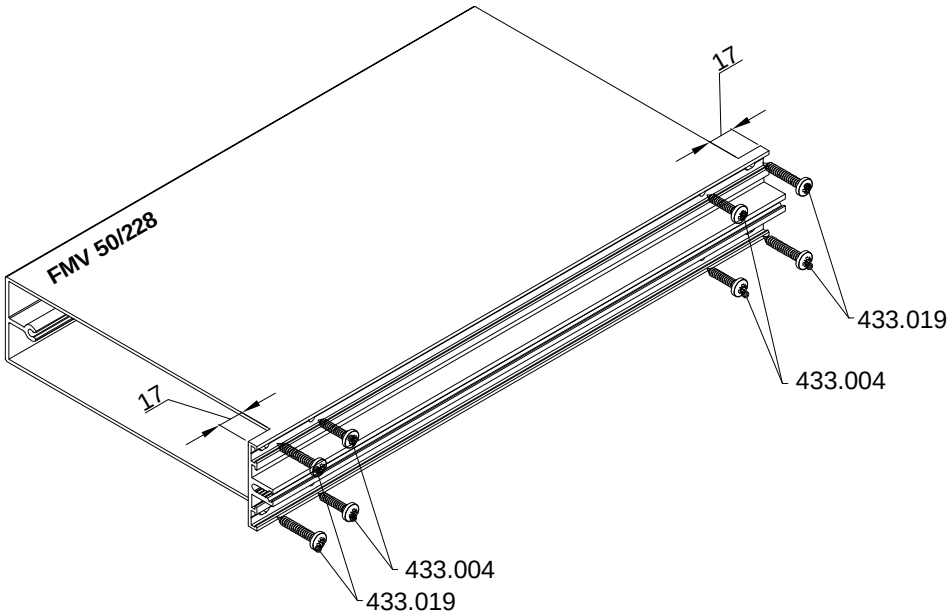


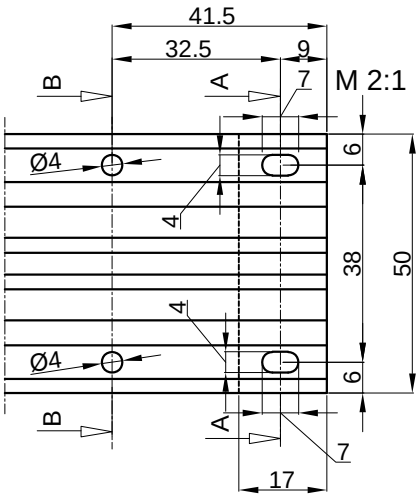


361.047
ravni gumeni odstojnik
za vodoravnicu FMV 50/228
flat dilatation rubber
for transom FMV 50/228




- Obrada vodoravnice **FMV 50/198** za okomicu **FMO 50/200** ili veću (ravni gumeni odstojnik)
- Processing of transom FMV 50/198 for mullion FMO 50/200 or greater (flat dilatation rubber)

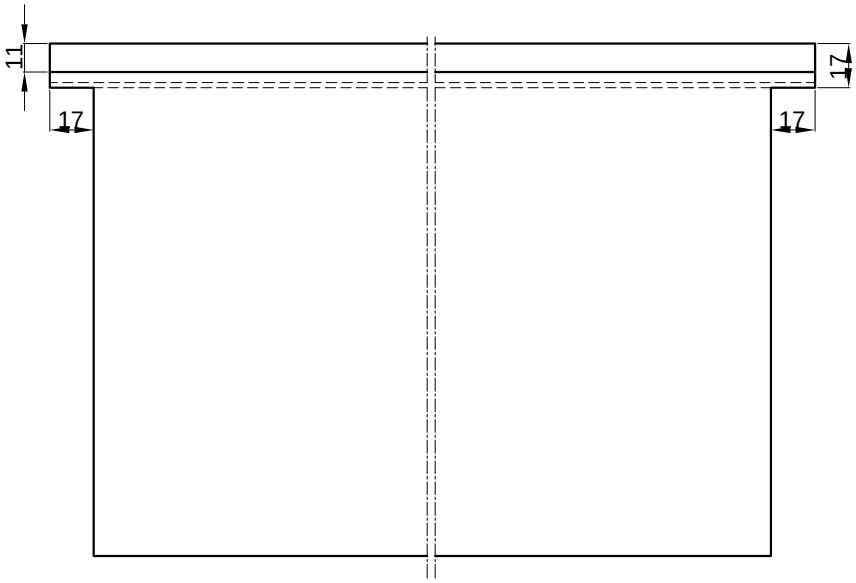





PRESJEK B-B
CROSS SECTION B-B






PRESJEK A-A
CROSS SECTION A-A

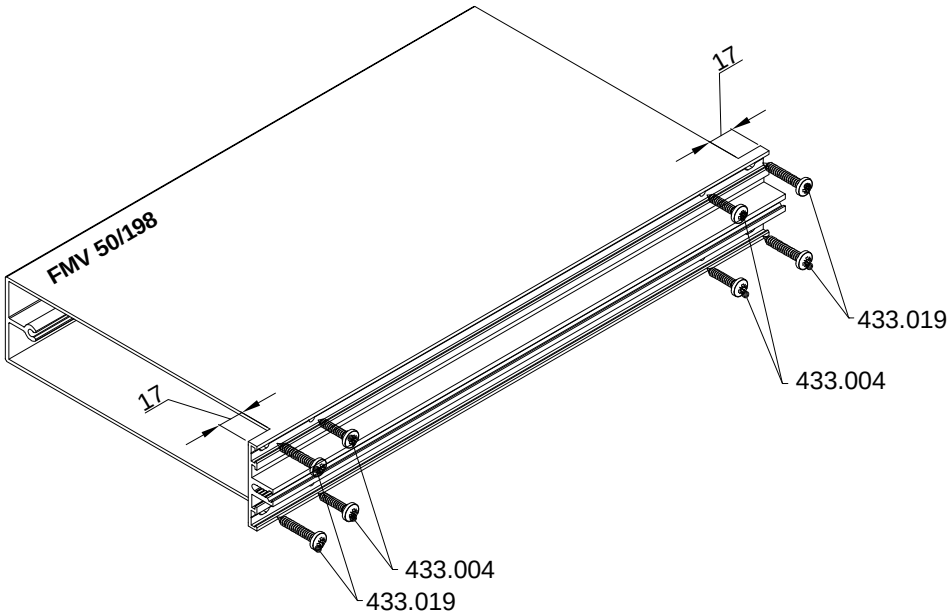


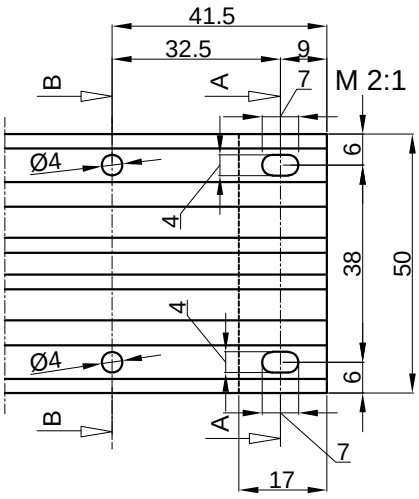


361.006
ravni gumeni odstojnik
za vodoravnicu FMV 50/198
flat dilatation rubber
for transom FMV 50/198



- Obrada vodoravnice **FMV 50/158** za okomicu **FMO 50/160** ili veći (ravni gumeni odstojnik)
- Processing of transom FMV 50/158 for mullion FMO 50/160 or greater (flat dilatation rubber)

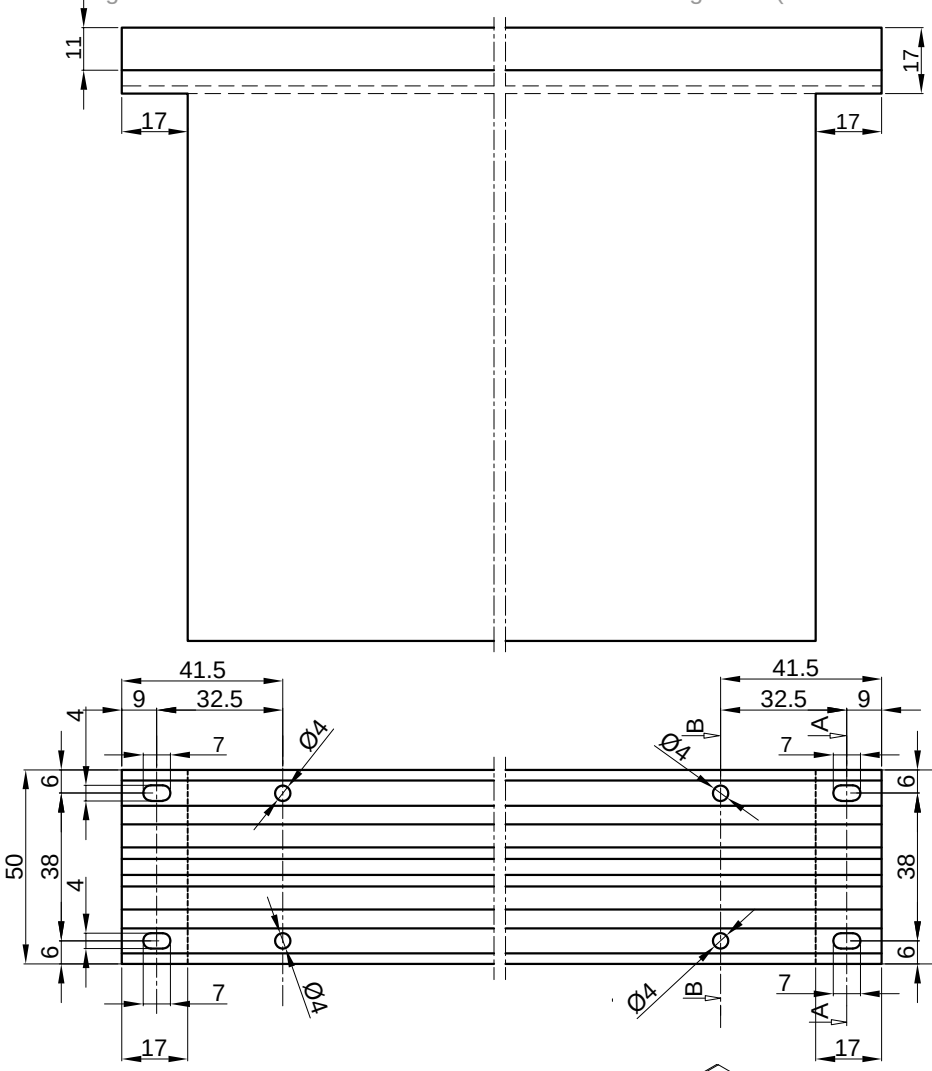




PRESJEK B-B
CROSS SECTION B-B





PRESJEK A-A
CROSS SECTION A-A

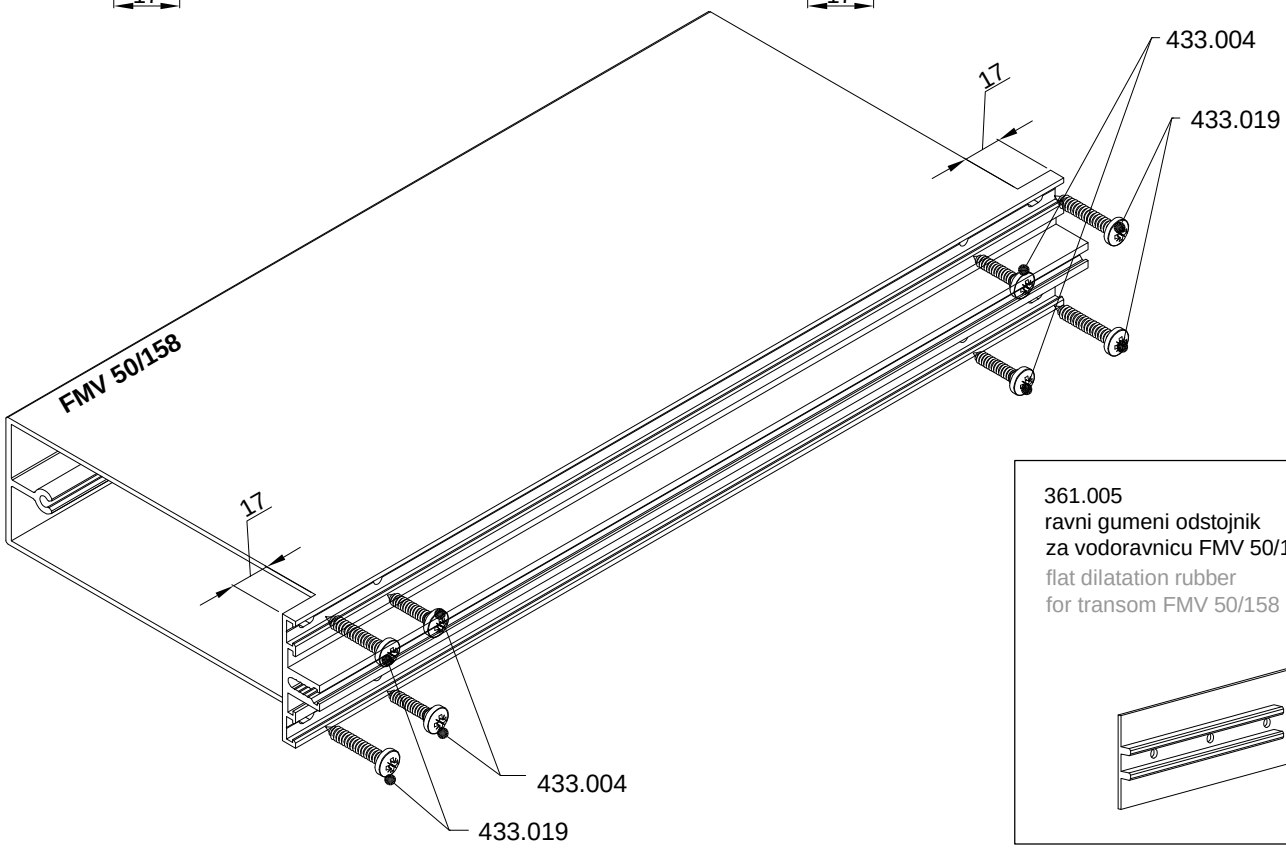

361.005
ravni gumeni odstojnik
za vodoravnicu FMV 50/158
flat dilatation rubber
for transom FMV 50/158

- Obrada vodoravnice **FMV 50/138** za okomicu **FMO 50/140** ili veću (ravni gumeni odstojnik)
- Processing of transom FMV 50/138 for mullion FMO 50/140 or greater (flat dilatation rubber)

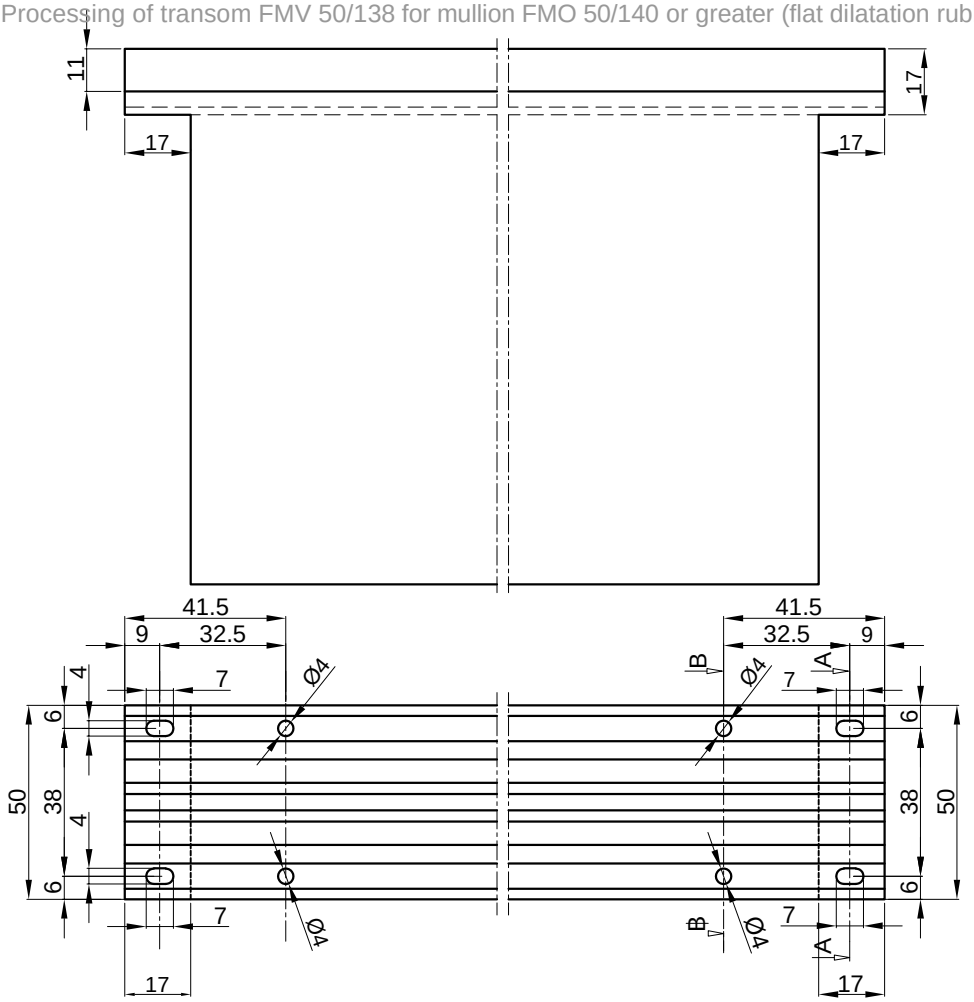


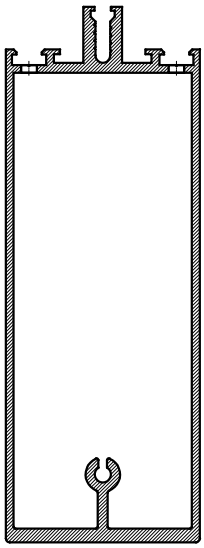

PRESJEK B-B
CROSS SECTION B-B





PRESJEK A-A
CROSS SECTION A-A

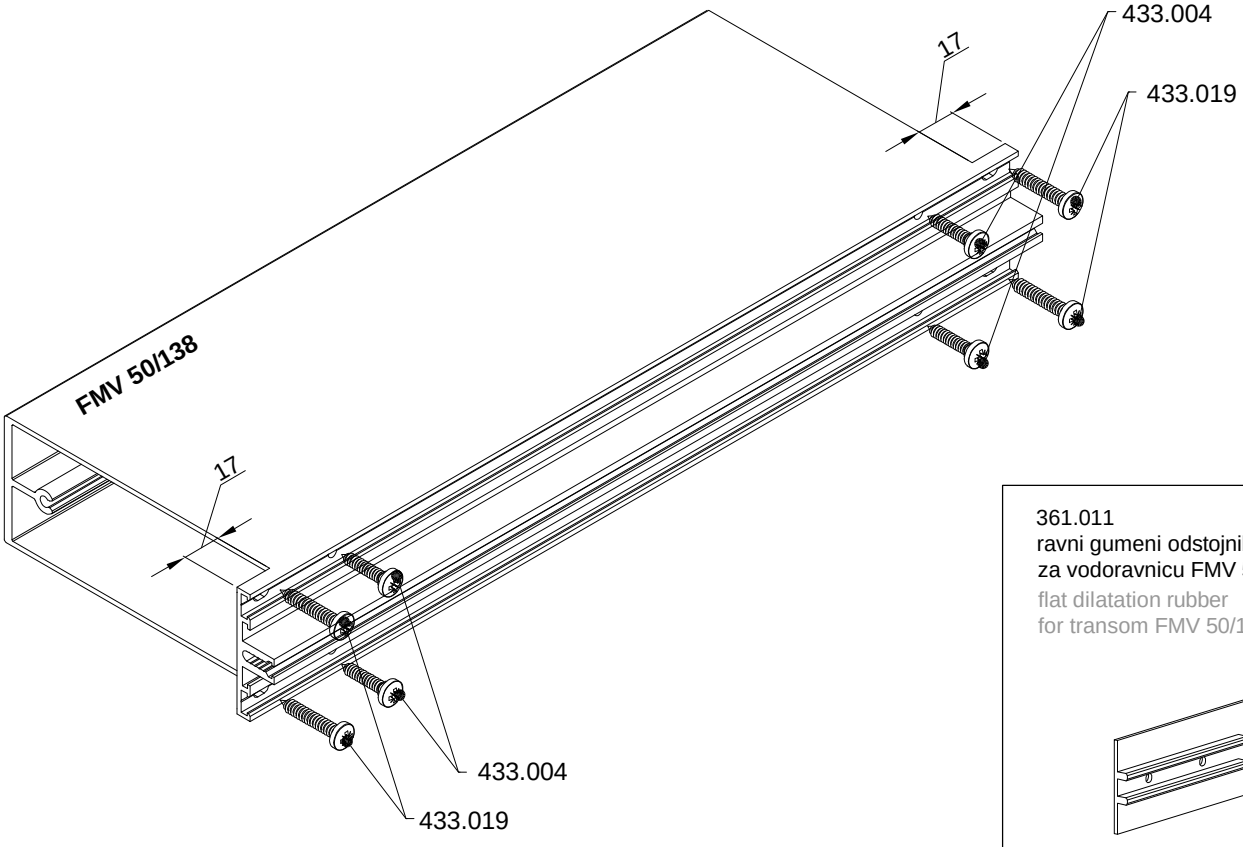

361.011
ravni gumeni odstojnik
za vodoravnicu FMV 50/138
flat dilatation rubber
for transom FMV 50/138

- Obrada vodoravnice **FMV 50/118** za okomicu **FMO 50/120** ili veću (ravni gumeni odstojnik)
- Processing of transom FMV 50/118 for mullion FMO 50/120 or greater (flat dilatation rubber)

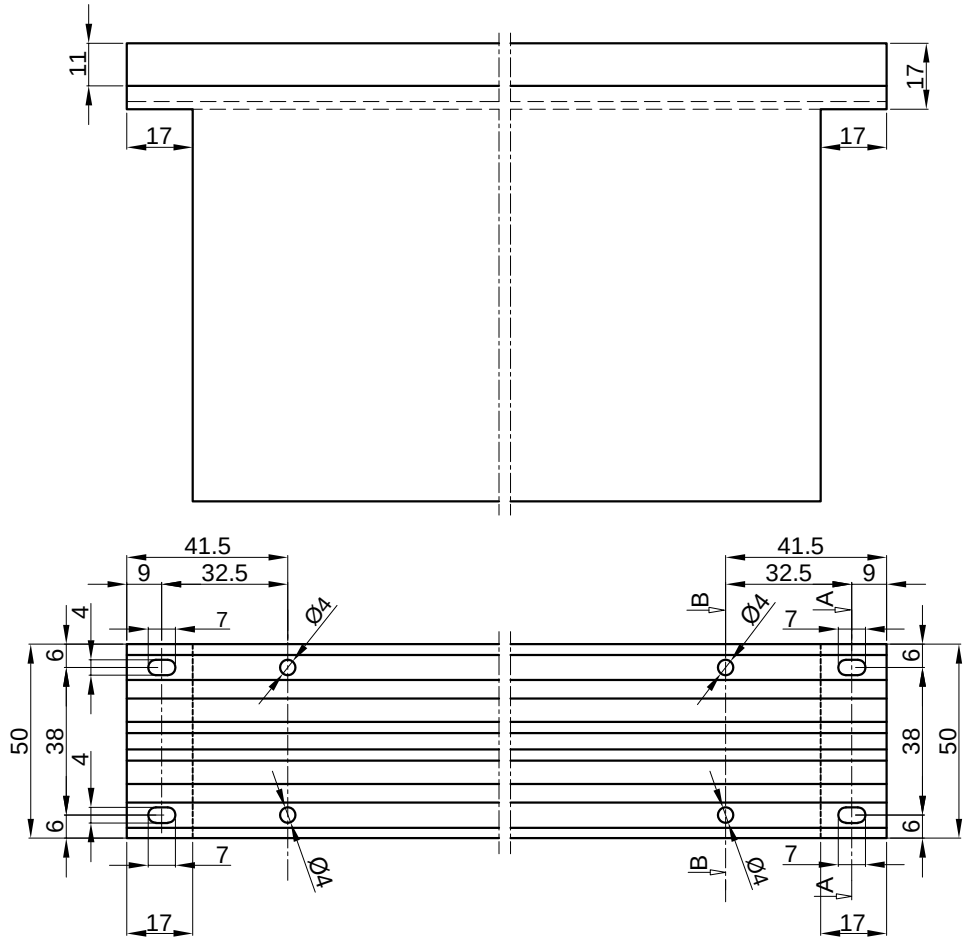


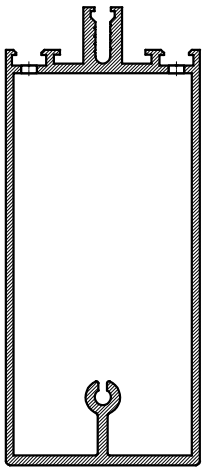

PRESJEK B-B
CROSS SECTION B-B





PRESJEK A-A
CROSS SECTION A-A

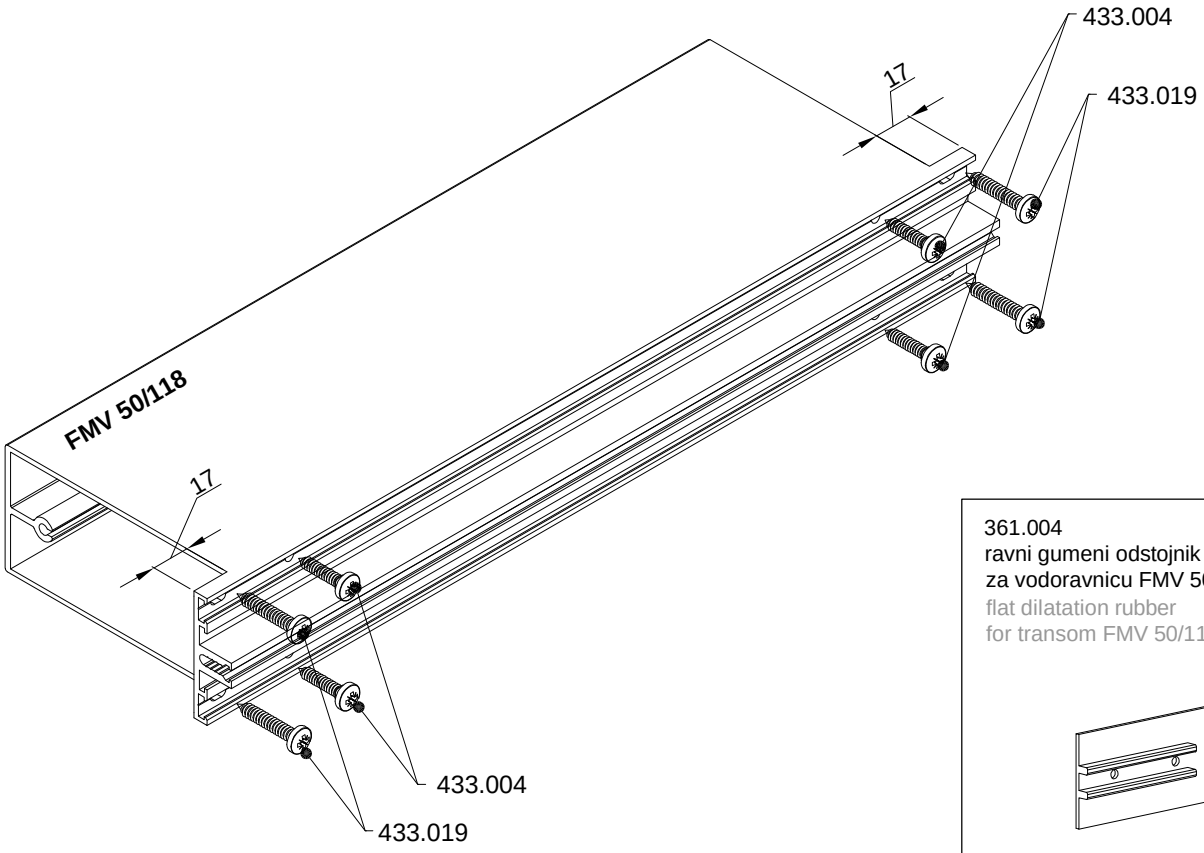


361.004
ravni gumeni odstojnik
za vodoravnicu FMV 50/118
flat dilatation rubber
for transom FMV 50/118

- Obrada vodoravnice **FMV 50/88** za okomicu **FMO 50/90** ili veću (ravni gumeni odstojnik)
- Processing of transom FMV 50/88 for mullion FMO 50/90 or greater (flat dilatation rubber)

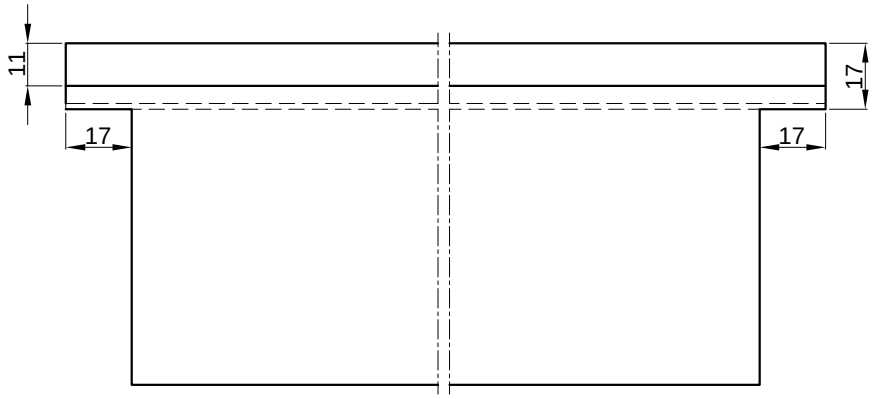

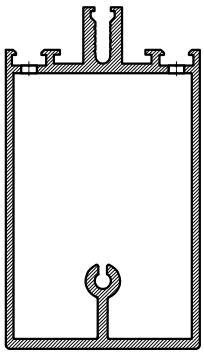


PRESJEK B-B
CROSS SECTION B-B

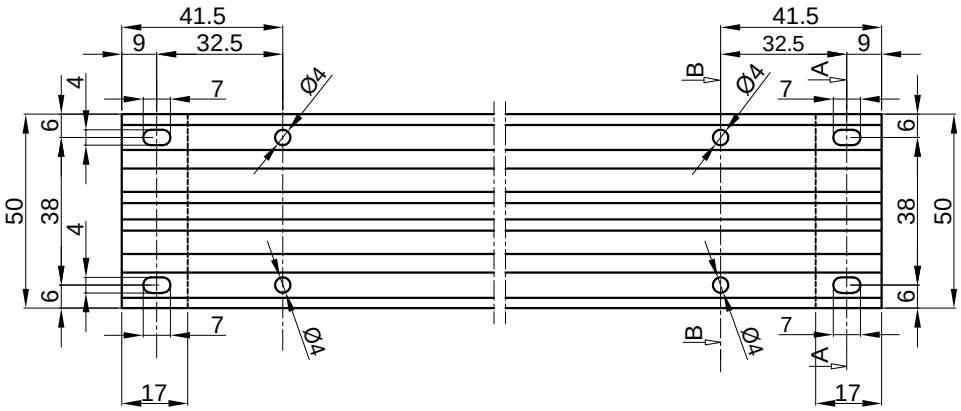





PRESJEK A-A
CROSS SECTION A-A

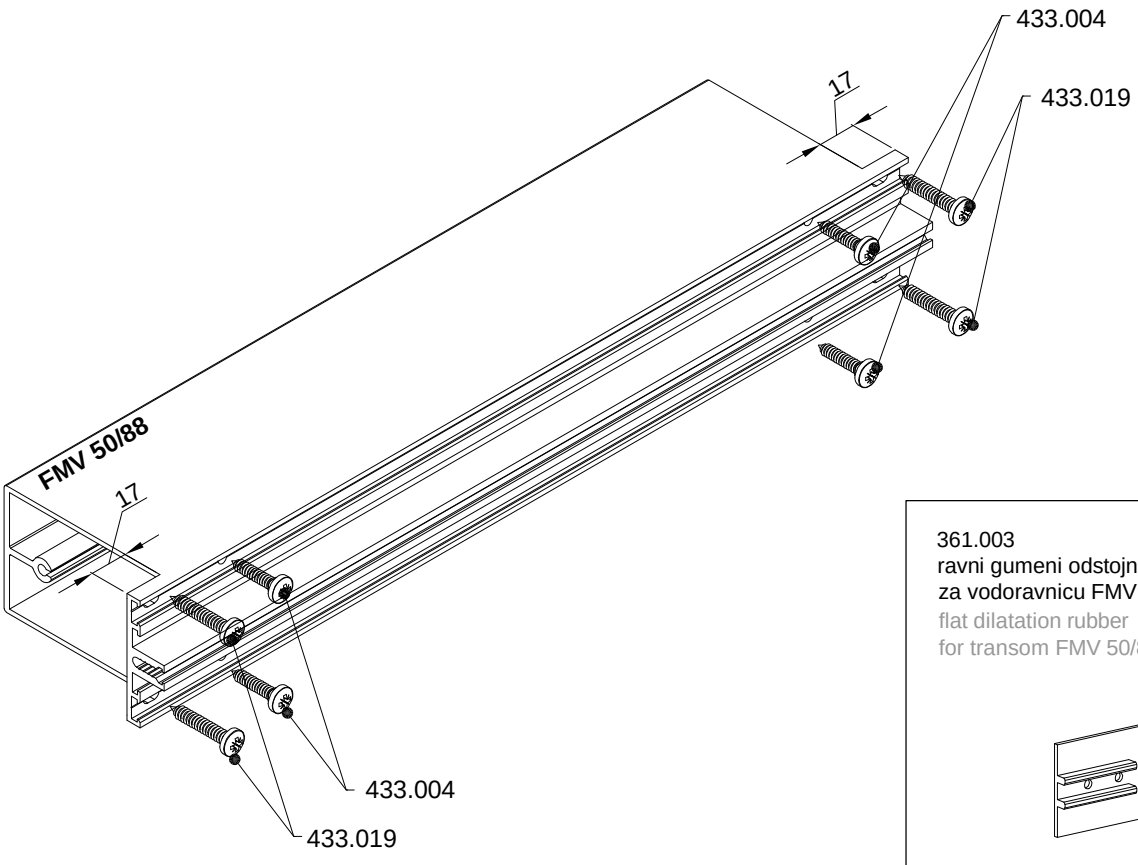


361.003
ravni gumeni odstojnik
za vodoravnicu FMV 50/88
flat dilatation rubber
for transom FMV 50/88

- Obrada vodoravnice **FMV 50/198** za okomicu **FMO 50/200** ili veću (gumeni odstojnik 365.032 za kopču 385.006)
- Processing of transom FMV 50/198 for mullion FMO 50/200 or greater (dilatation rubber 365.032 for connector 385.006)

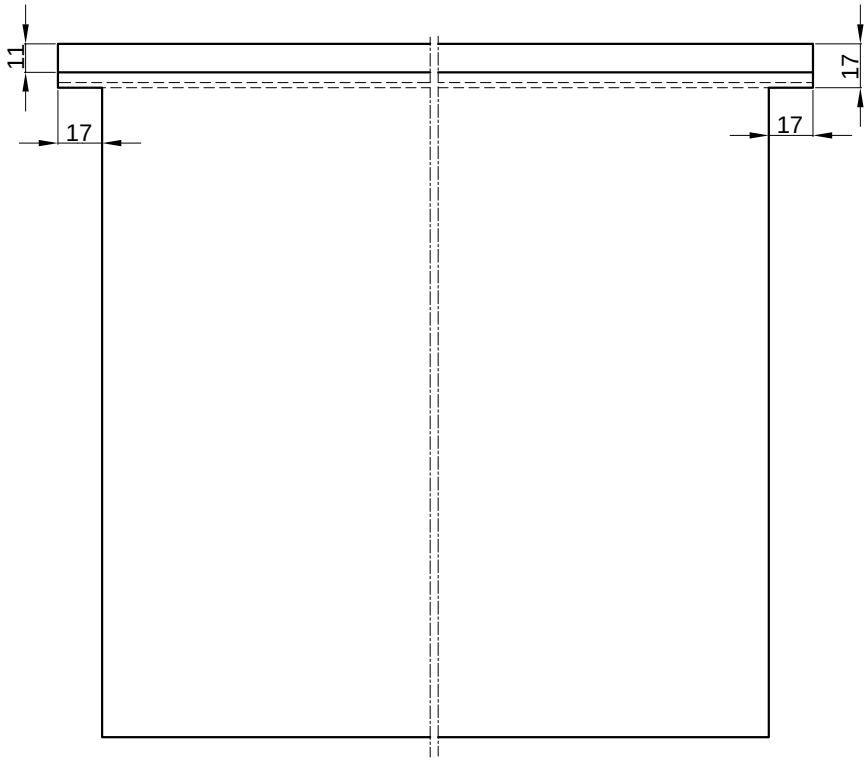





PRESJEK B-B
CROSS SECTION B-B

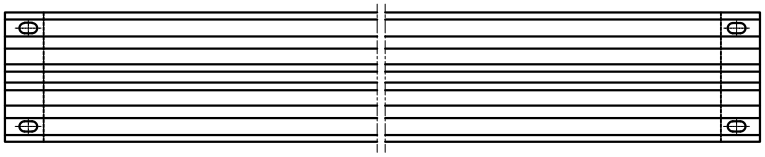




PRESJEK A-A
CROSS SECTION A-A

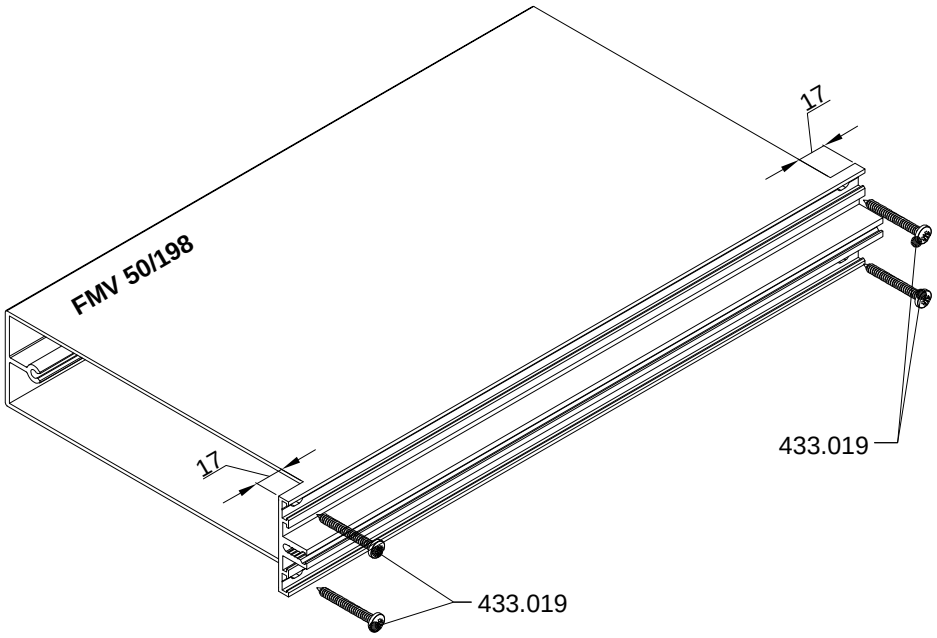


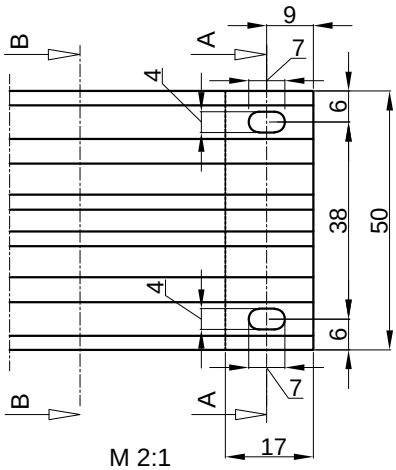

M 2:1


365.032
gumeni odstojnik za kopču 385.006 i vodoravnicu FMV 50/198
dilatation rubber for connector 385.006 and transom FMV 50/198







385.006
kopča
connector

- Obrada vodoravnice **FMV 50/158** za okomicu **FMO 50/160** ili veću (gumeni odstojnik 365.031 za kopču 385.006)
- Processing of transom FMV 50/158 for mullion FMO 50/160 or greater (dilatation rubber 365.031 for connector 385.006)

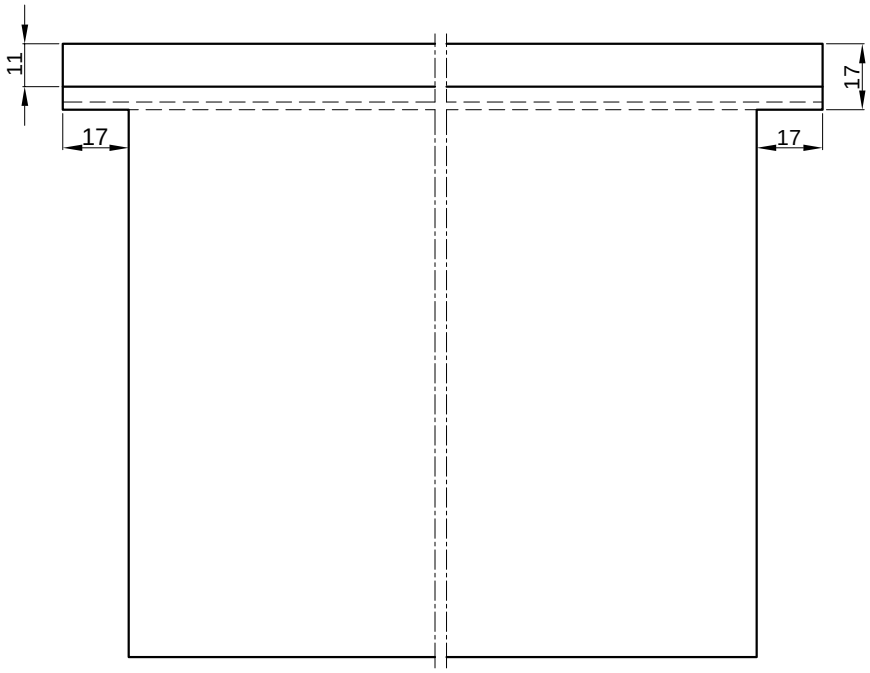




PRESJEK B-B
CROSS SECTION B-B

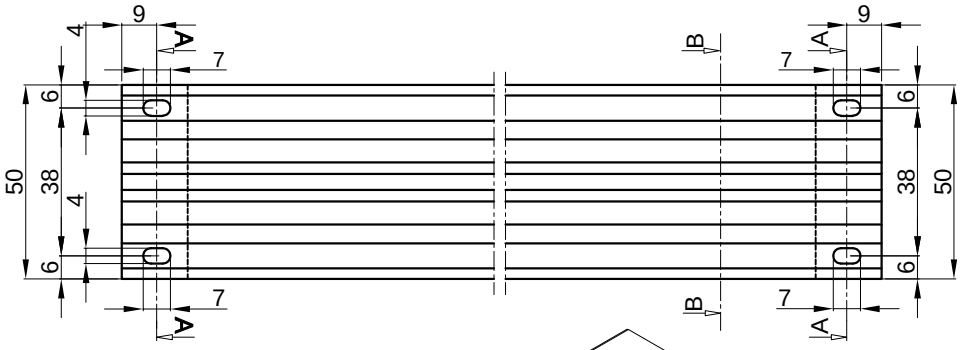




PRESJEK A-A
CROSS SECTION A-A

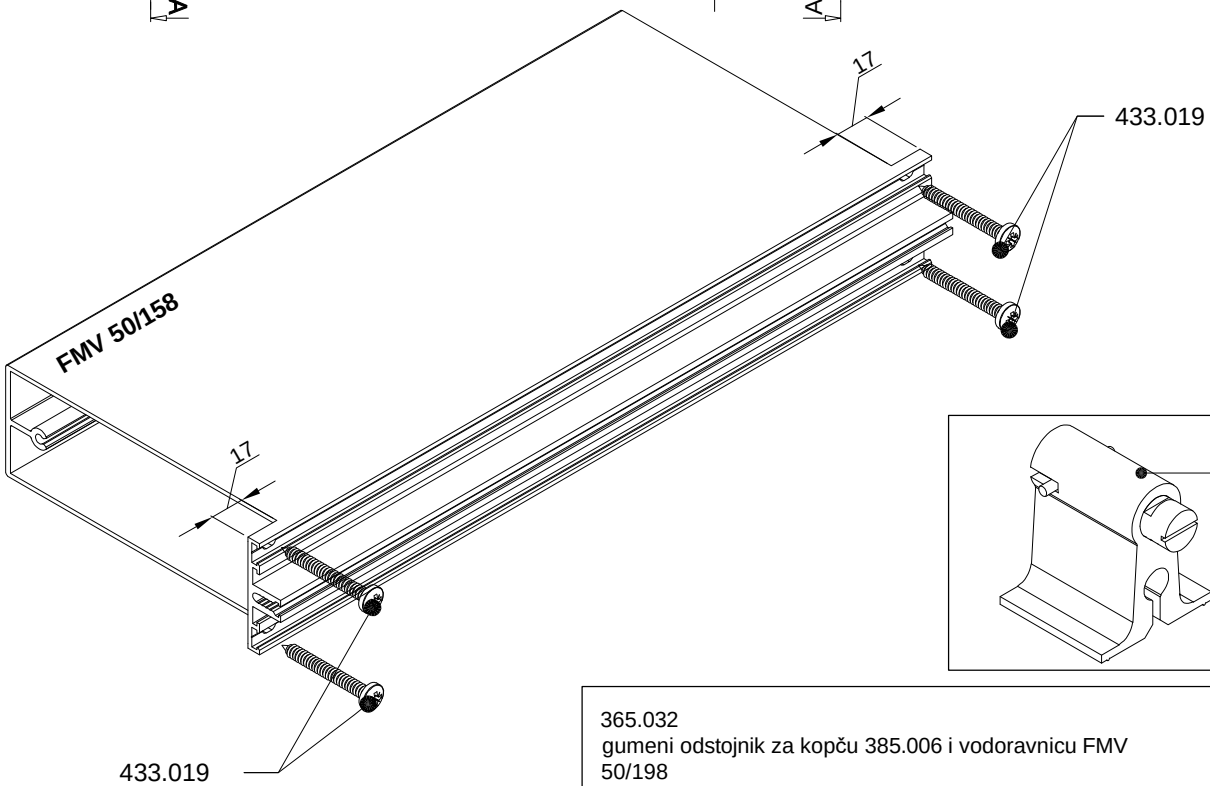



365.032
gumeni odstojnik za kopču 385.006 i vodoravnicu FMV 50/198

dilatation rubber for connector 385.006 and transom FMV 50/198




- Obrada vodoravnice **FMV 50/118** za okomicu **FMO 50/120** ili veću (gumeni odstojnik 365.030 za kopču 385.006)
- Processing of transom FMV 50/118 for mullion FMO 50/120 or greater (dilatation rubber 365.030 for connector 385.006)

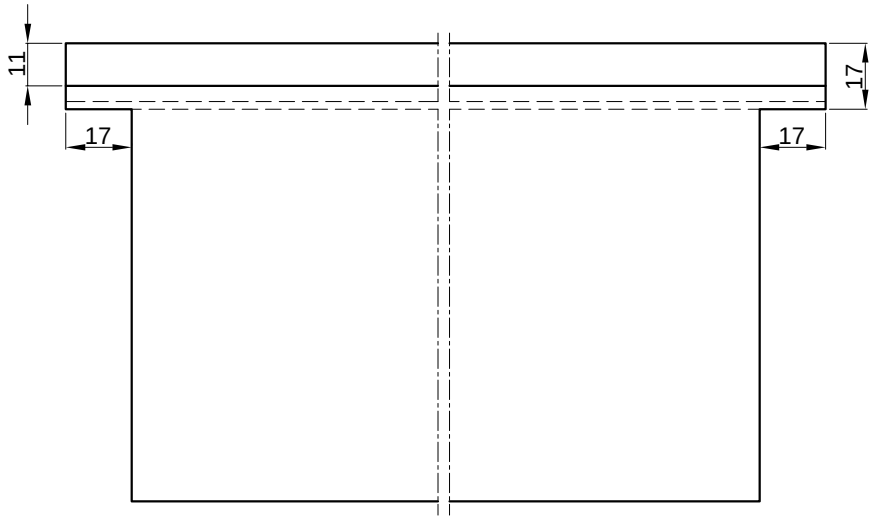

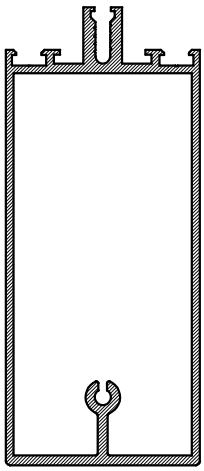


PRESJEK B-B
CROSS SECTION B-B

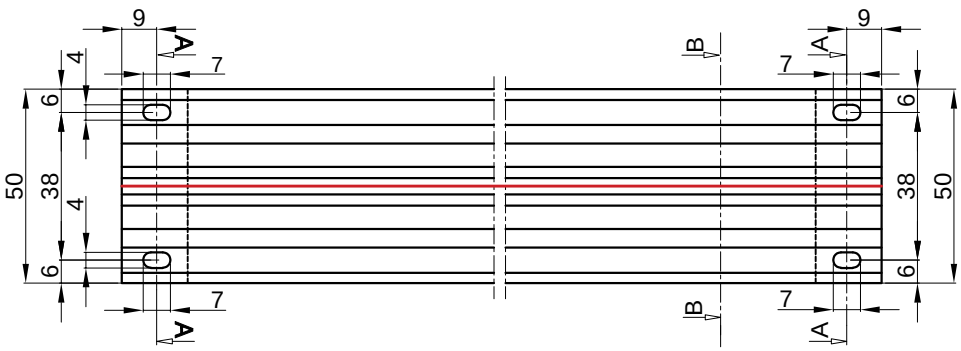




PRESJEK A-A
CROSS SECTION A-A

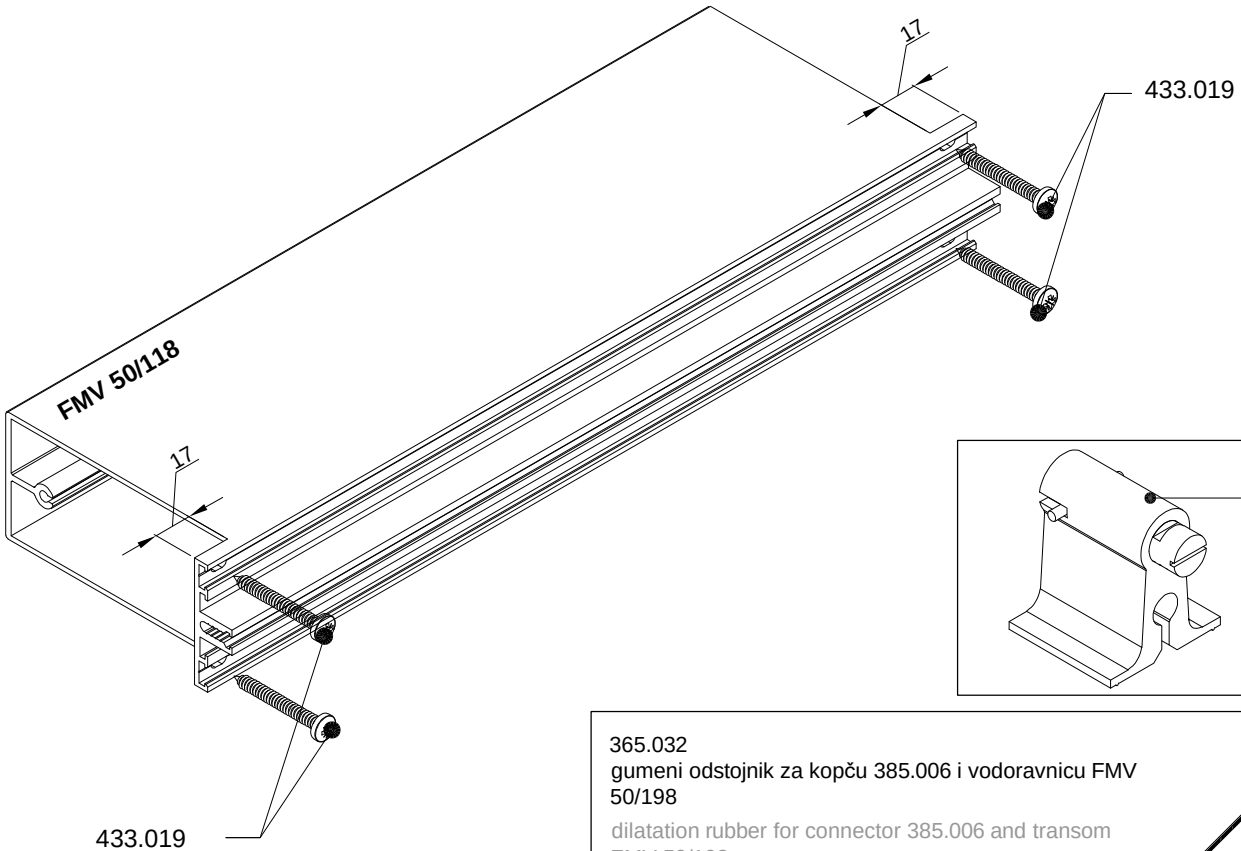



365.032
gumeni odstojnik za kopču 385.006 i vodoravnicu FMV 50/198

dilatation rubber for connector 385.006 and transom FMV 50/198




- Obrada vodoravnice **FMV 50/88** za okomicu **FMO 50/90** ili veću (gumeni odstojnik 365.029 za kopču 385.006)
- Processing of transom FMV 50/88 for mullion FMO 50/90 or greater (dilatation rubber 365.029 for connector 385.006)

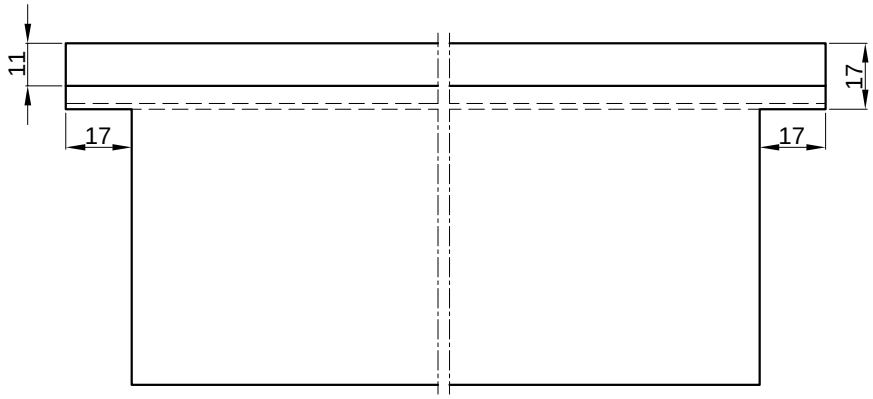

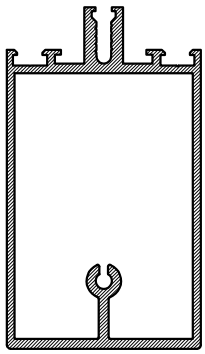


PRESJEK B-B
CROSS SECTION B-B

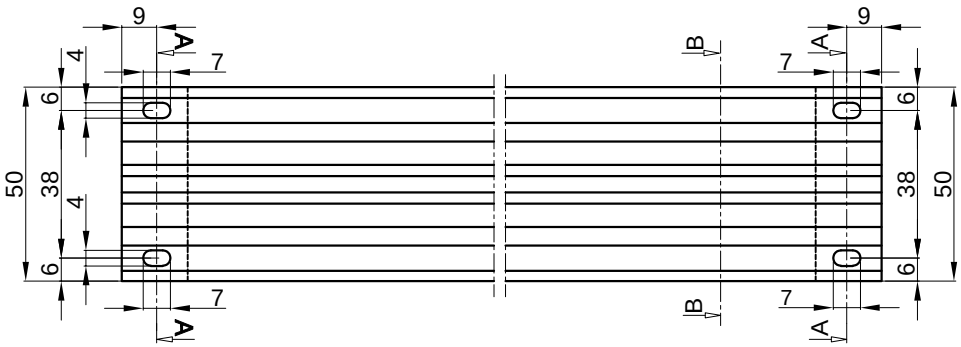



PRESJEK A-A
CROSS SECTION A-A

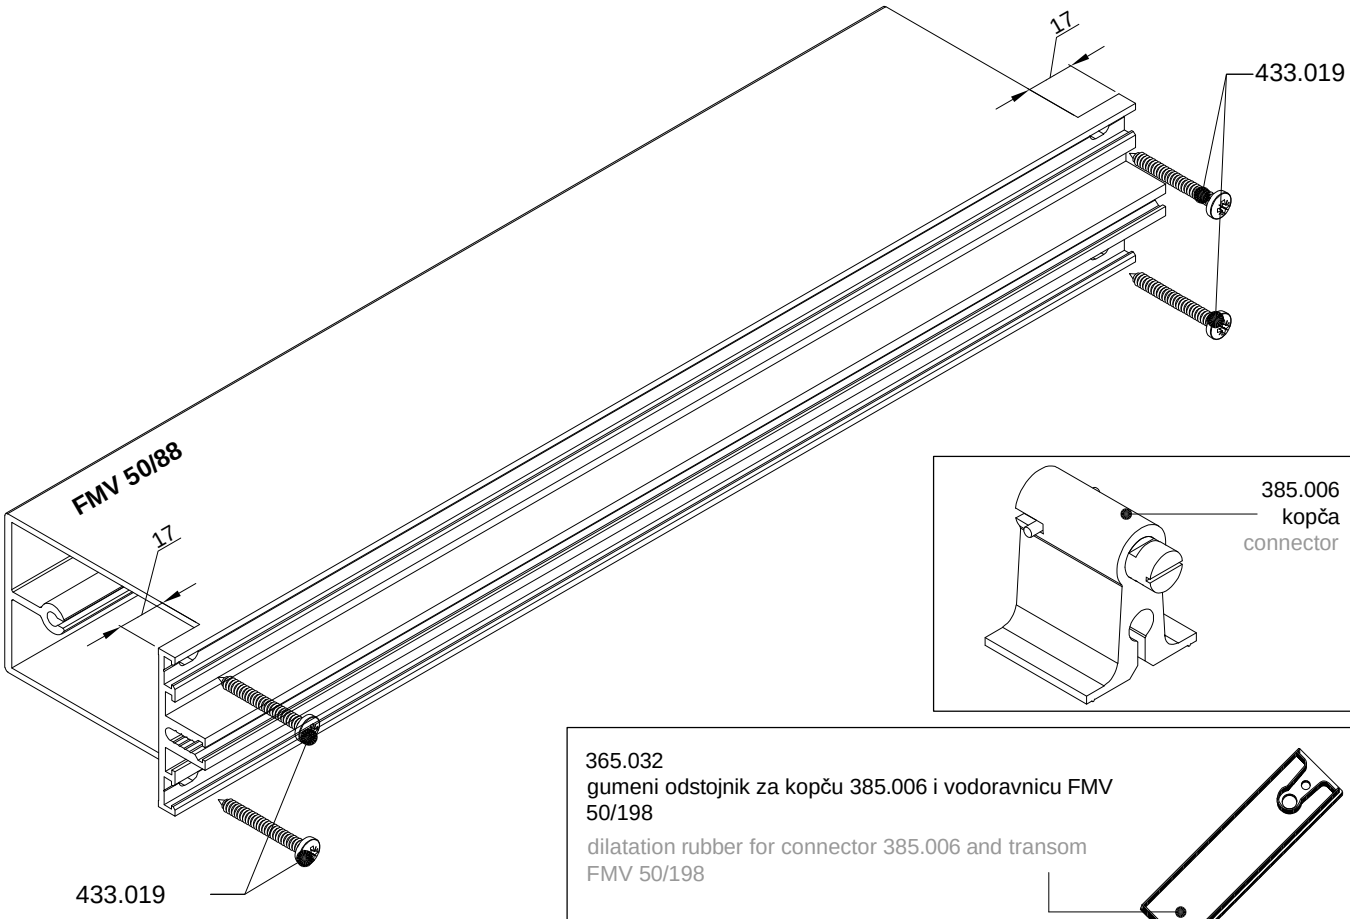



385.006
kopča
connector

365.032
gumeni odstojnik za kopču 385.006 i vodoravnicu FMV 50/198

dilatation rubber for connector 385.006 and transom FMV 50/198

- Obrada vodoravnice **FMV 50/268** za okomicu **FMO 50/270** (na nulu)
- Processing of transom FMV 50/268 for mullion FMO 50/270 (no dilatation rubber)

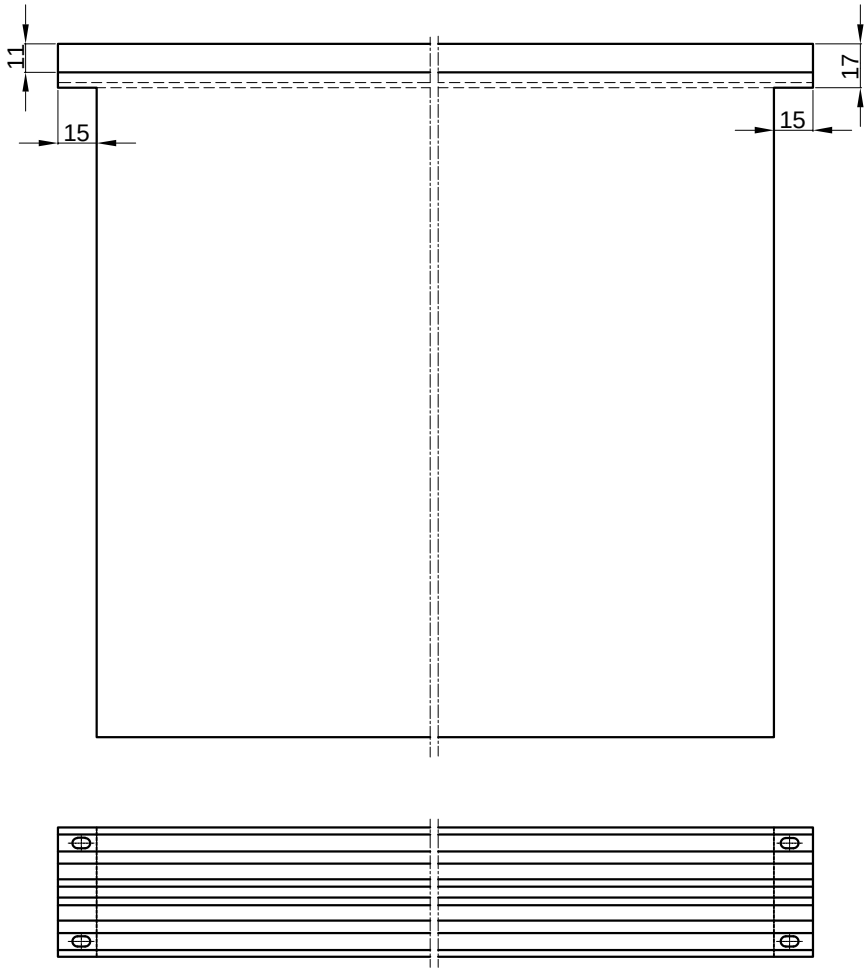





PRESJEK B-B
CROSS SECTION B-B




PRESJEK A-A
CROSS SECTION A-A

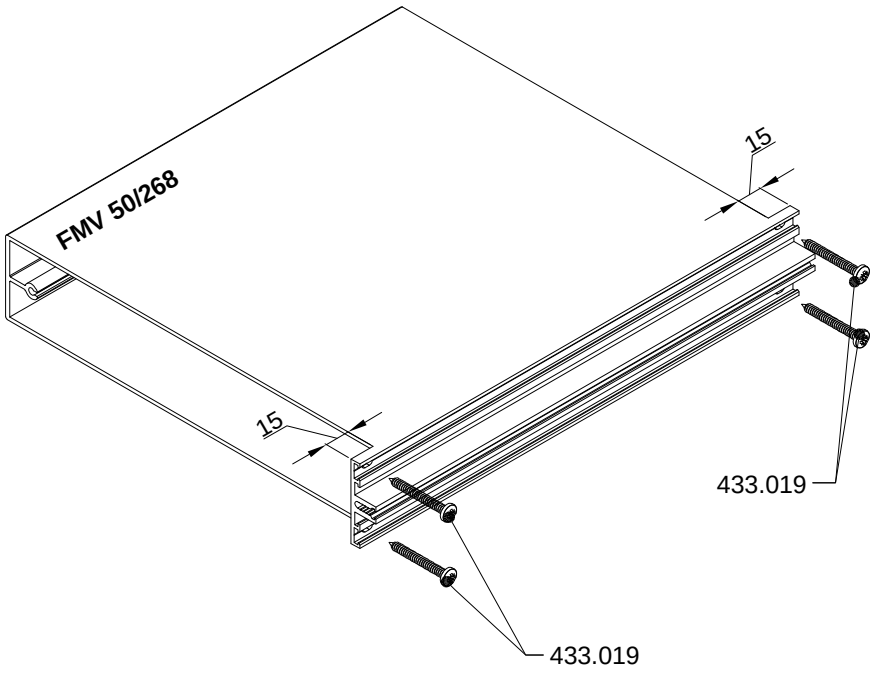


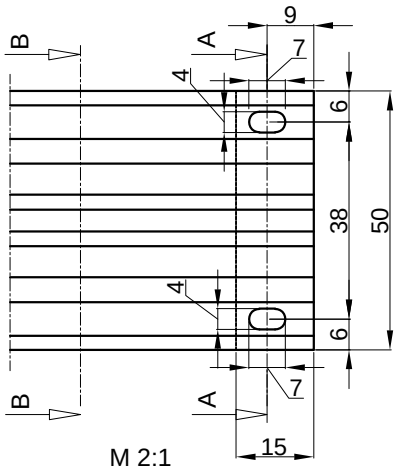


M 2:1




- Obrada vodoravnice **FMV 50/198** za okomicu **FMO 50/200** ili veću (na nulu)
- Processing of transom FMV 50/198 for mullion FMO 50/200 or greater (no dilatation rubber)

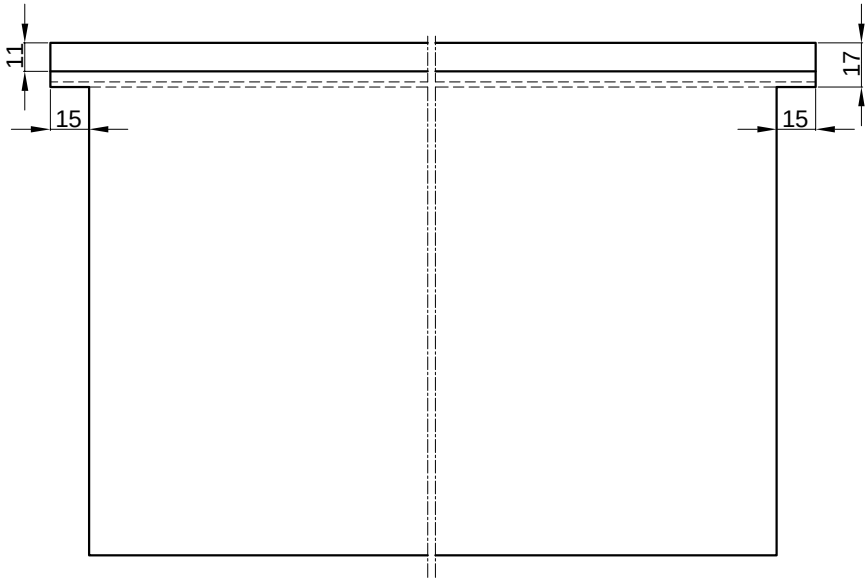





PRESJEK B-B
CROSS SECTION B-B

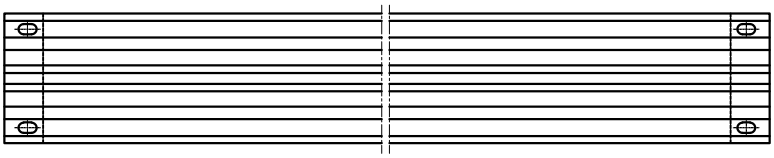




PRESJEK A-A
CROSS SECTION A-A

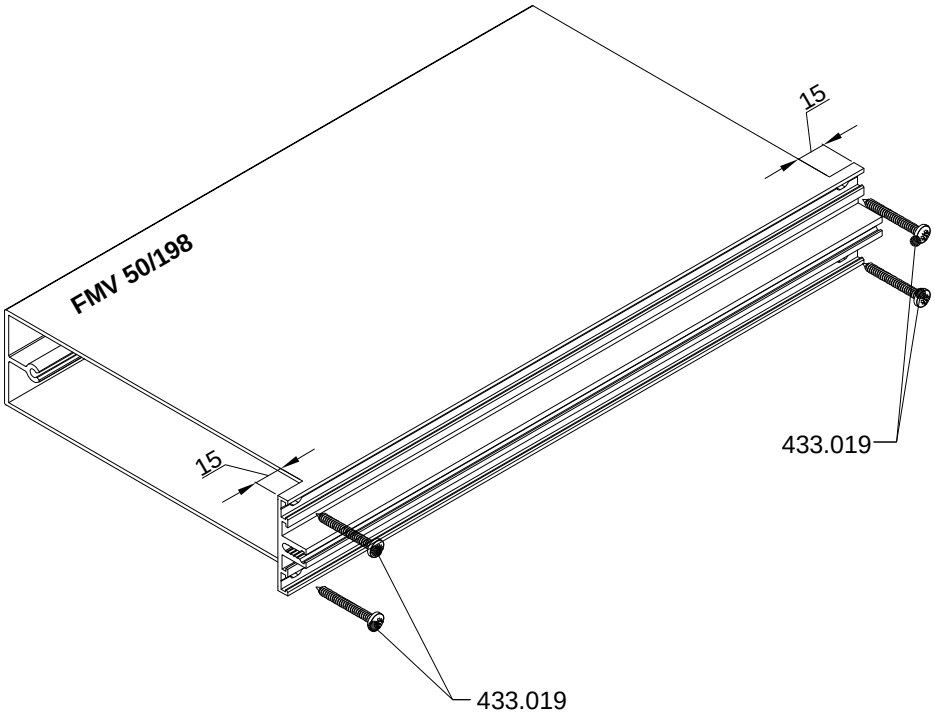


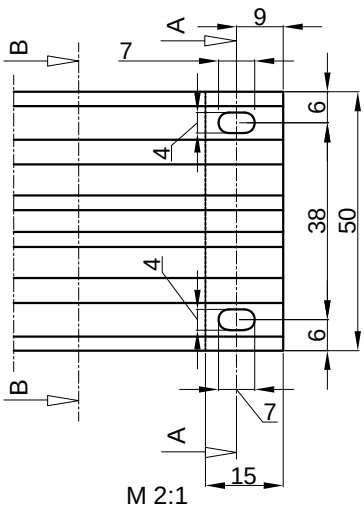


M 2:1




- Obrada vodoravnice **FMV 50/158** za okomicu **FMO 50/160** ili veću (na nulu)
- Processing of transom FMV 50/158 for mullion FMO 50/160 or greater (no dilatation rubber)

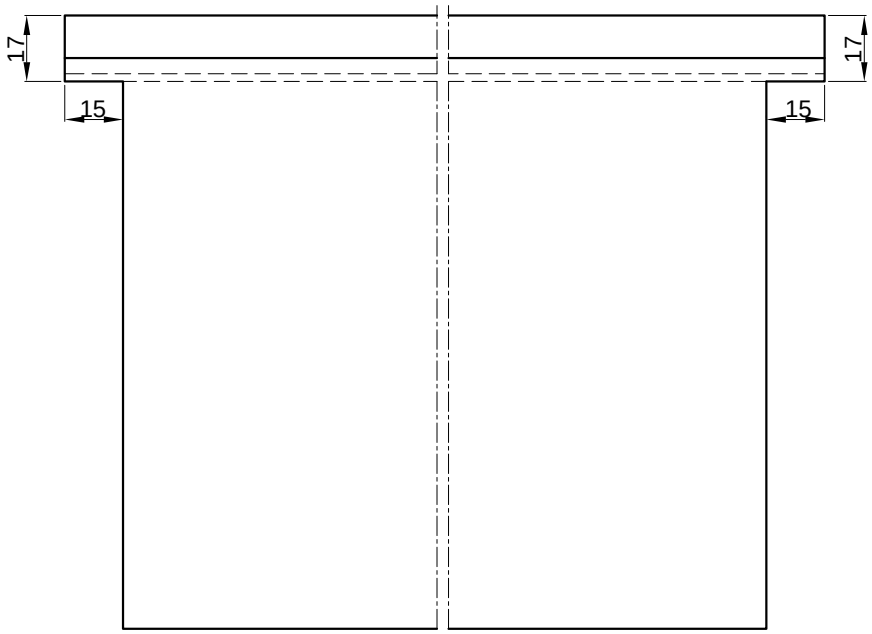

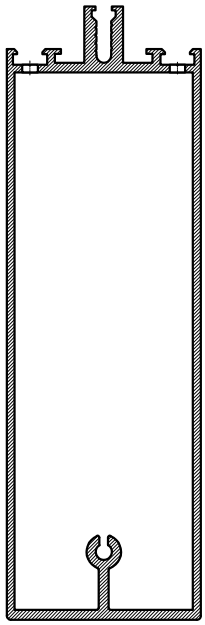


PRESJEK B-B
CROSS SECTION B-B

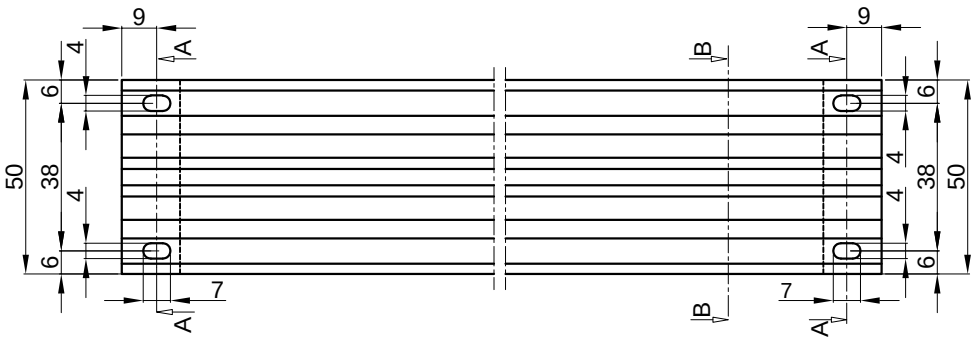





PRESJEK A-A
CROSS SECTION A-A

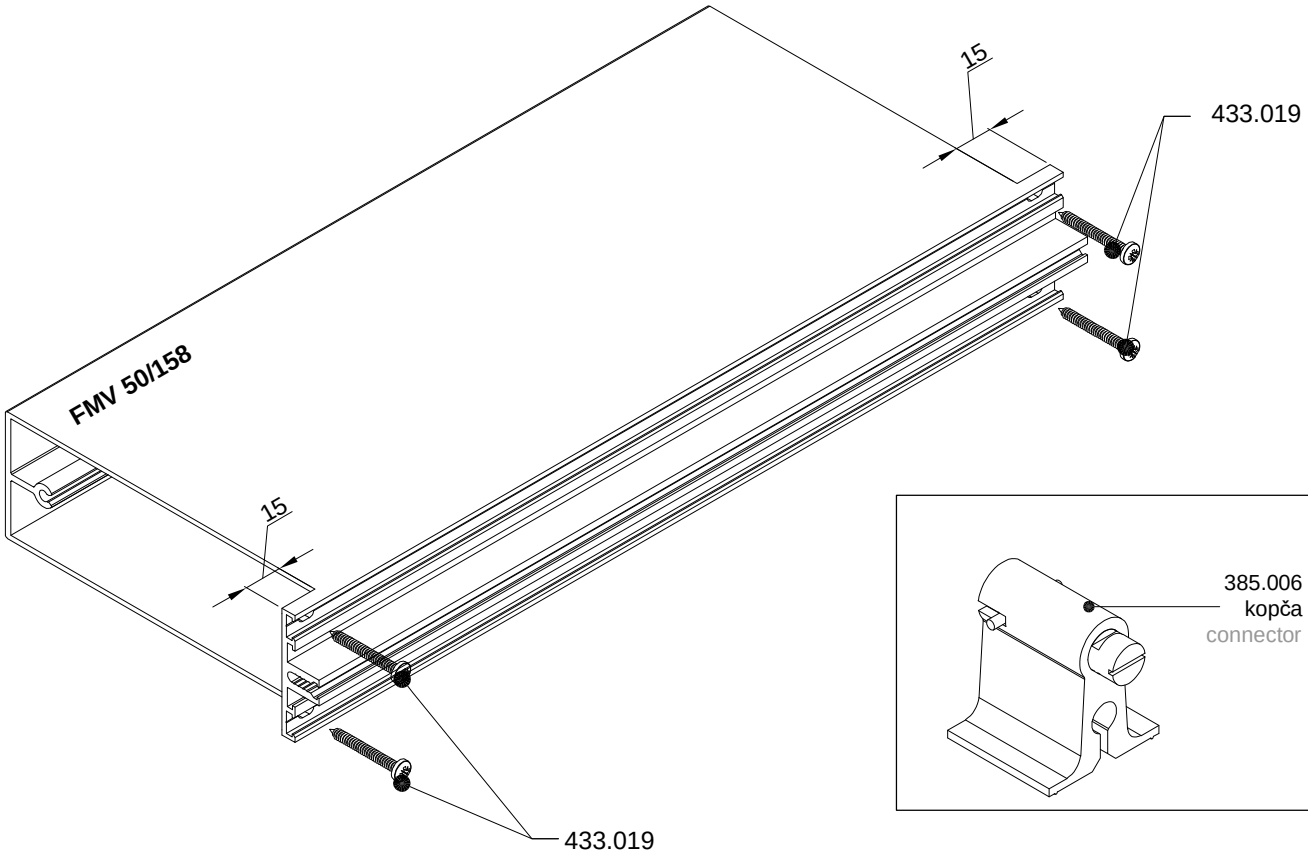

- Obrada vodoravnice **FMV 50/138** za okomicu **FMO 50/140** ili veću (na nulu)
- Processing of transom FMV 50/138 for mullion FMO 50/140 or greater (no dilatation rubber)

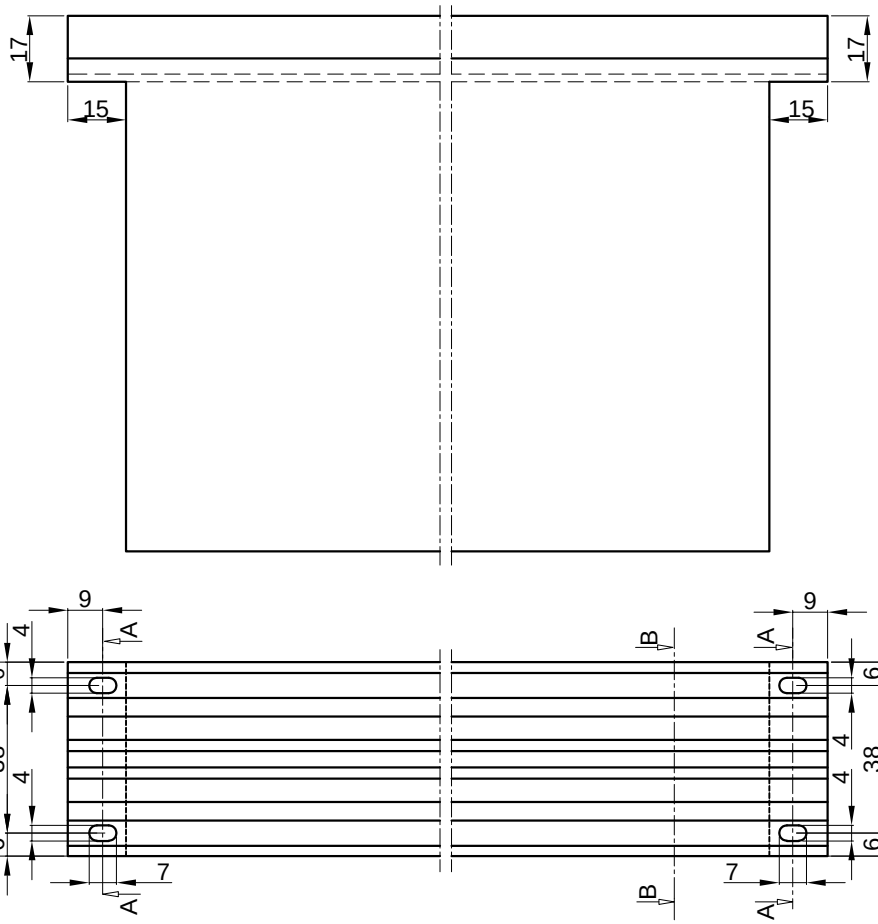


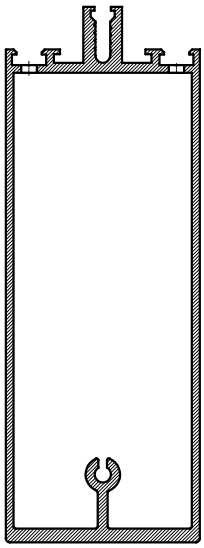


PRESJEK B-B
CROSS SECTION B-B




PRESJEK A-A
CROSS SECTION A-A

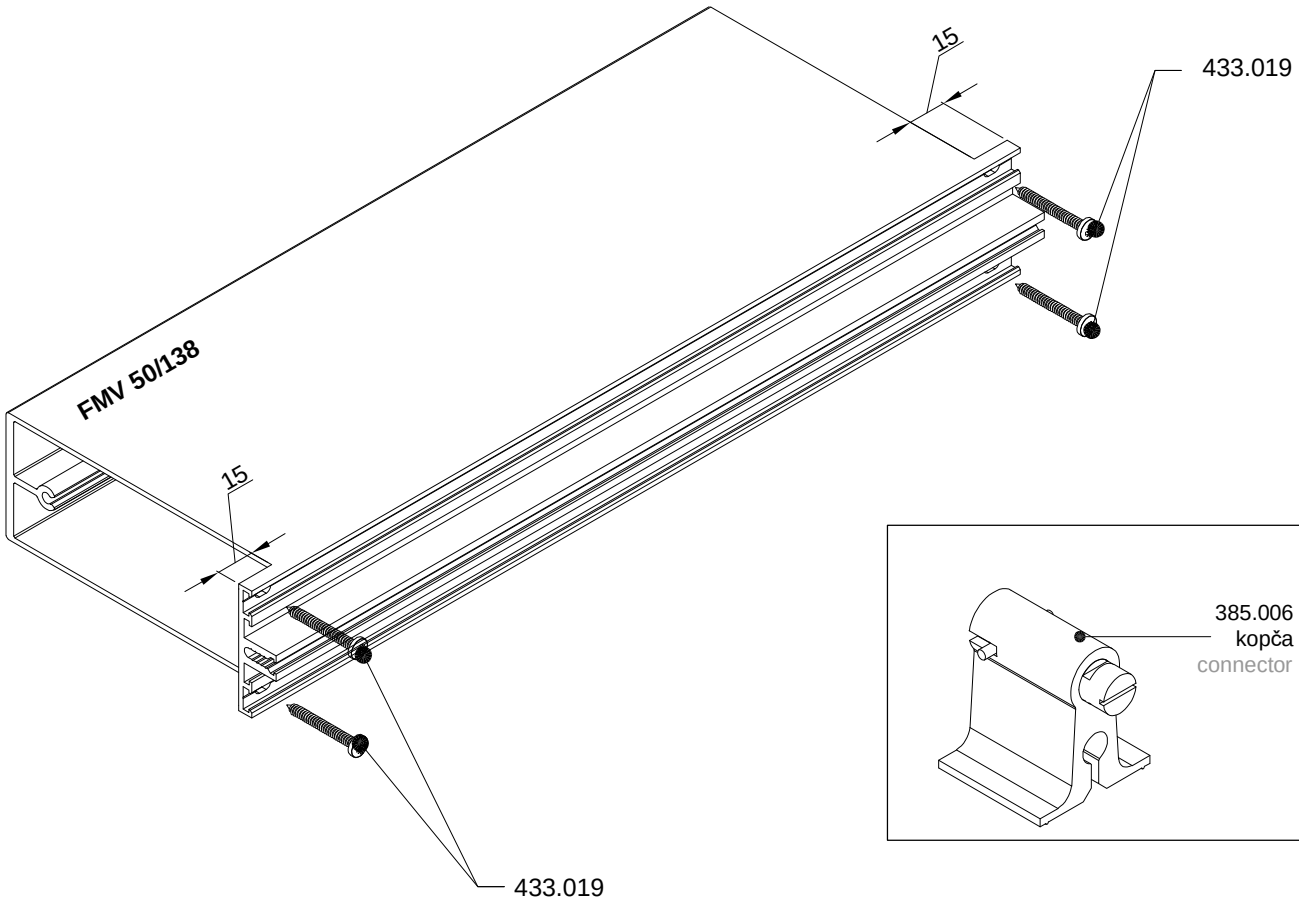


- Obrada vodoravnice **FMV 50/118** za okomicu **FMO 50/120** ili veću (na nulu)
- Processing of transom FMV 50/118 for mullion FMO 50/120 or greater (no dilatation rubber)

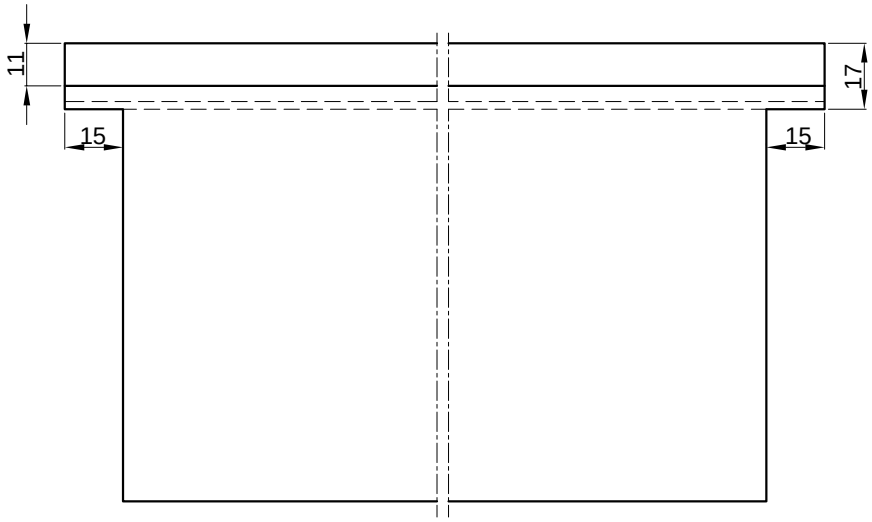

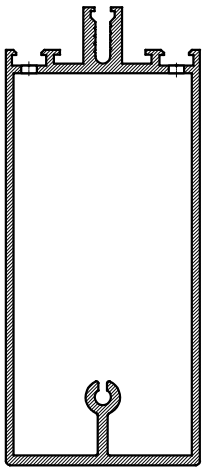


PRESJEK B-B
CROSS SECTION B-B

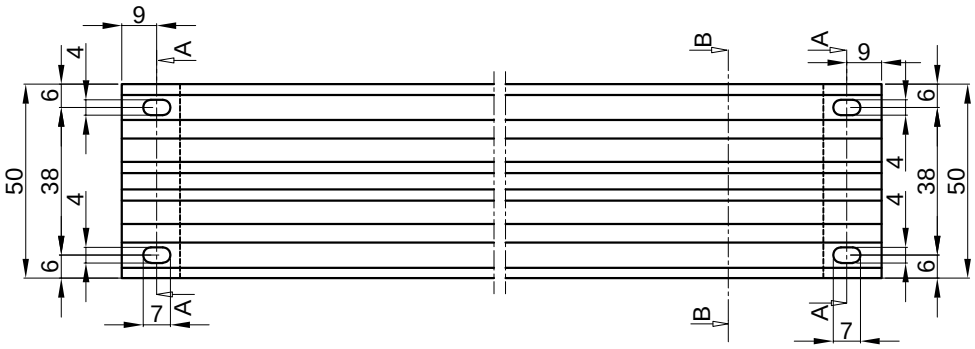





PRESJEK A-A
CROSS SECTION A-A

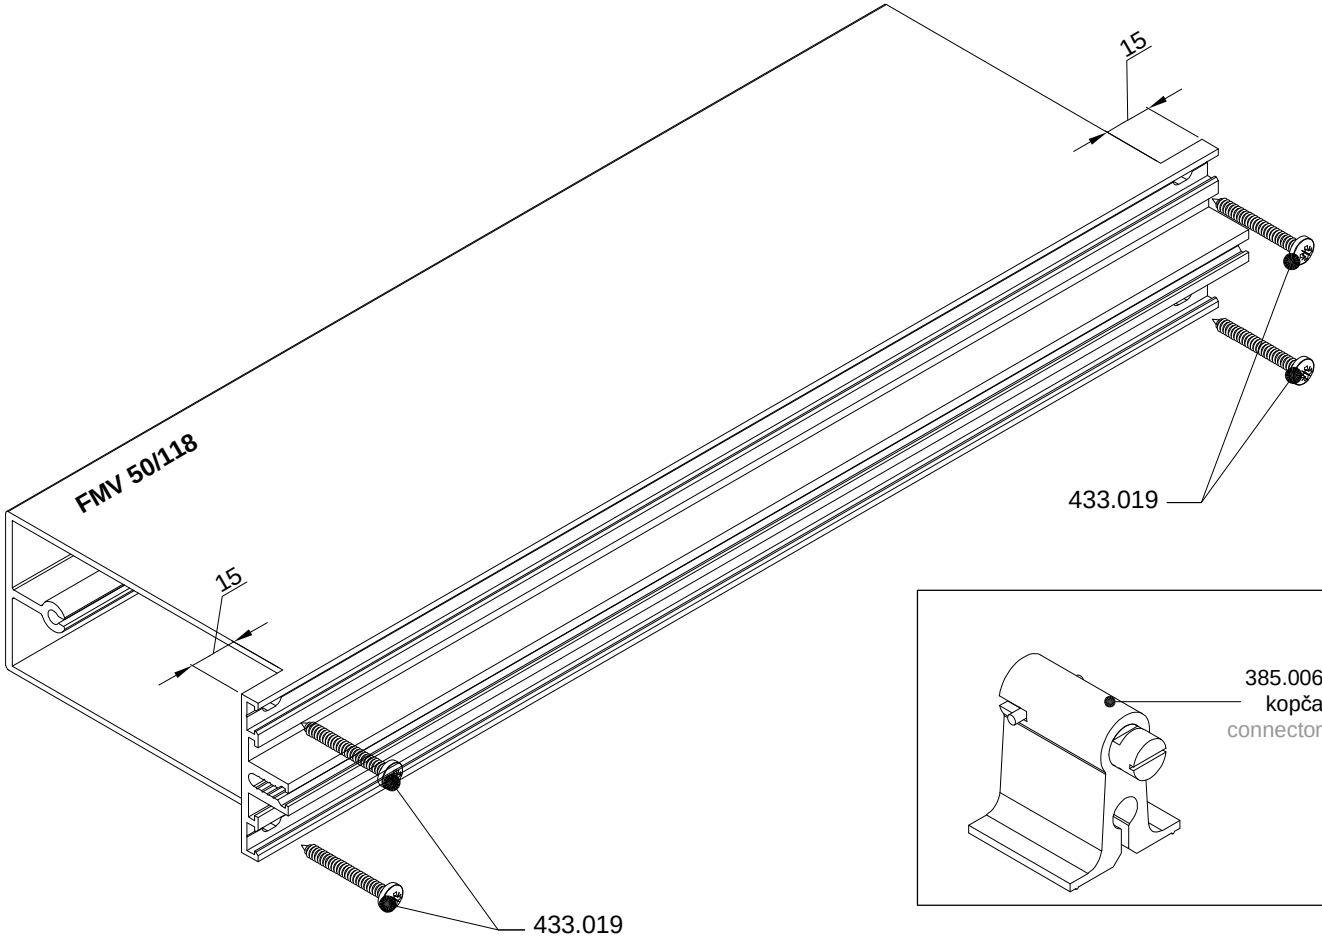


- Obrada vodoravnice **FMV 50/88** za okomicu **FMO 50/90** ili veću (na nulu)
- Processing of transom FMV 50/88 for mullion FMO 50/90 or greater (no dilatation rubber)

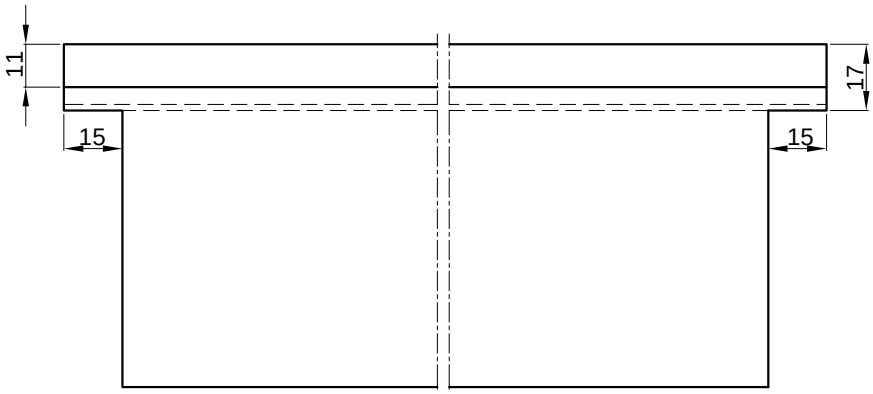

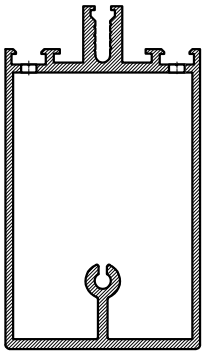


PRESJEK B-B
CROSS SECTION B-B

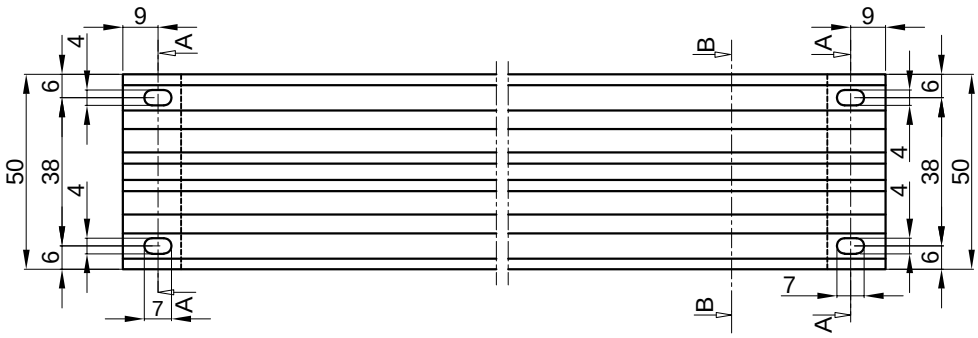





PRESJEK A-A
CROSS SECTION A-A

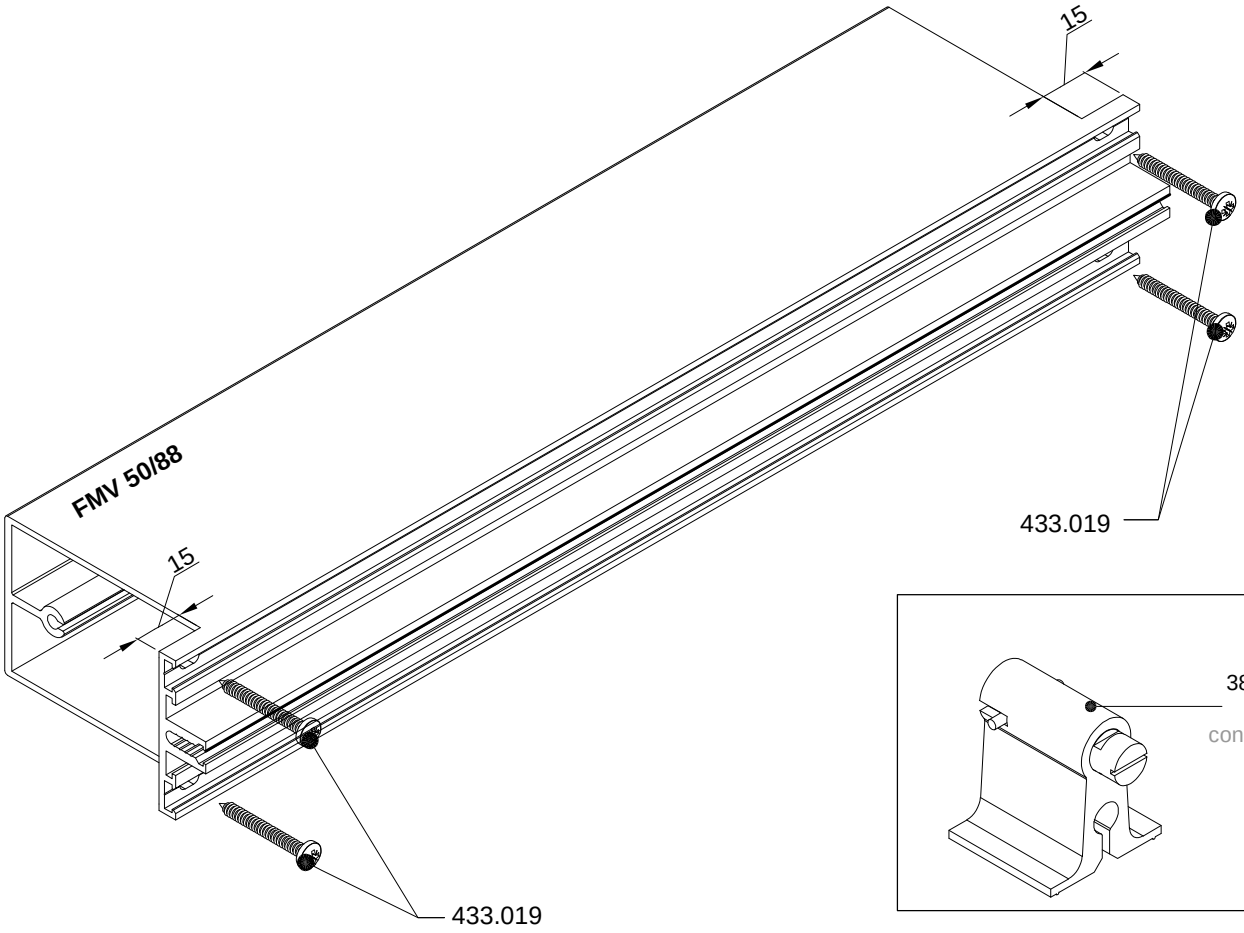


- Obrada vodoravnice **FMV 50/32** za okomicu **FMO 50/32** (na nulu)
- Processing of transom FMV 50/32 for mullion FMO 50/32 (no dilatation rubber)

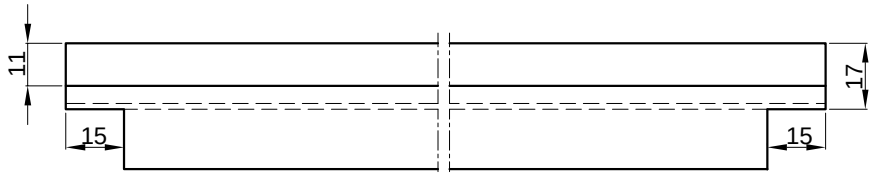




PRESJEK B-B
CROSS SECTION B-B

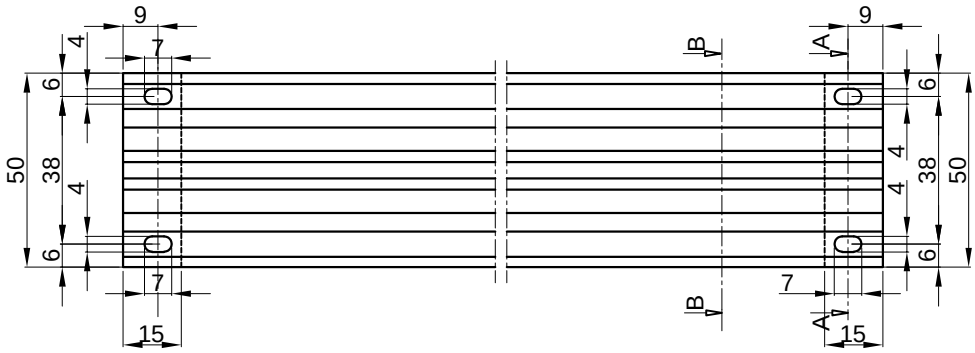






PRESJEK A-A
CROSS SECTION A-A

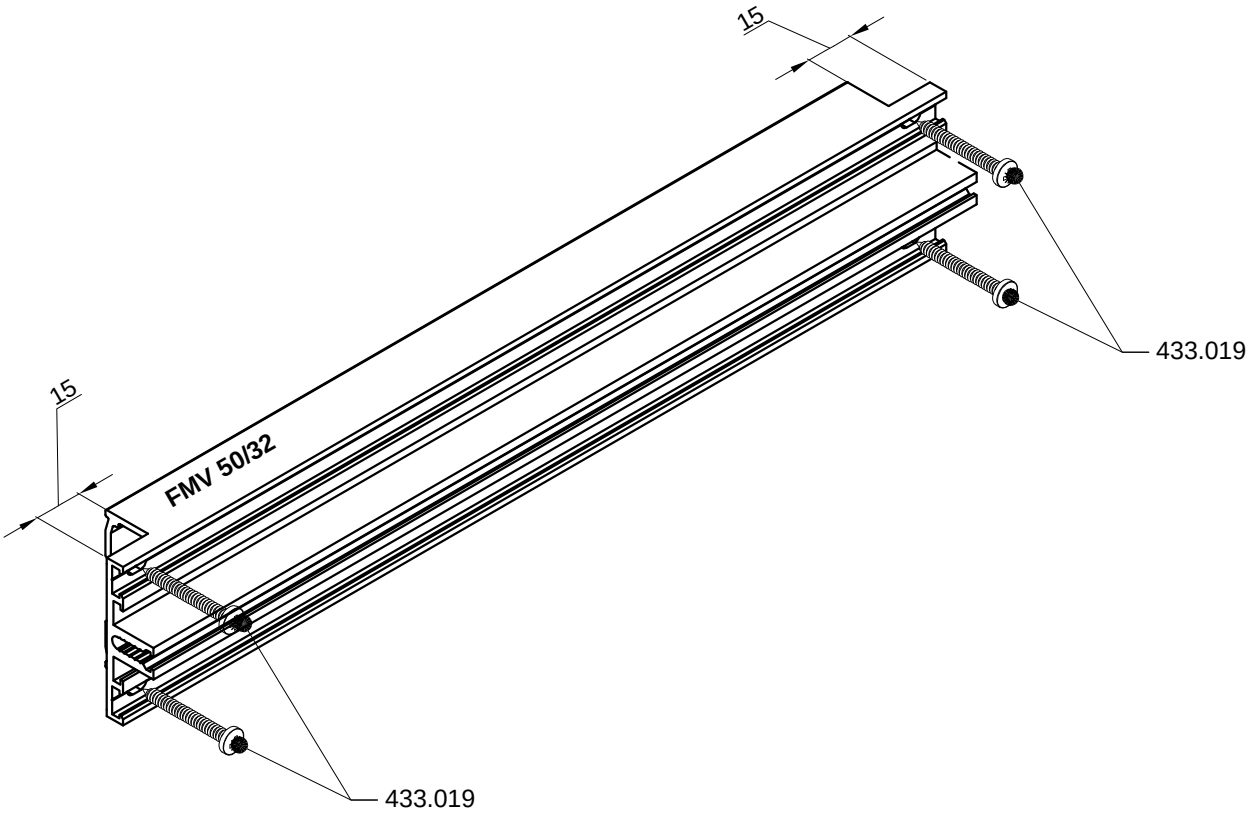


- Obrada okomice F**MO 50/160** za prihvat pomoćne vodoravnice **FVS 50/158** treći nivo fasade (gumeni odstojnik s obrubom)
- Processing of mullion FMO 50/160 for auxiliary transom FVS 50/158 third level (rimmed dilatation rubber)

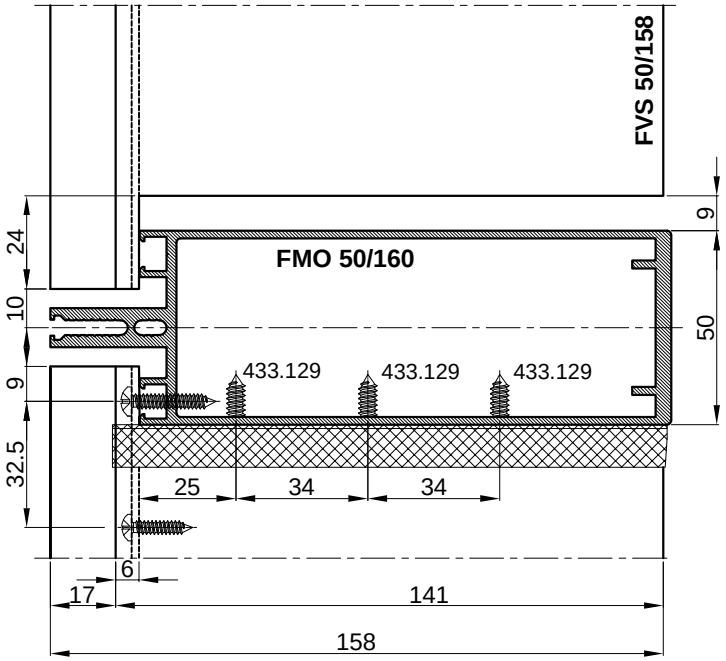


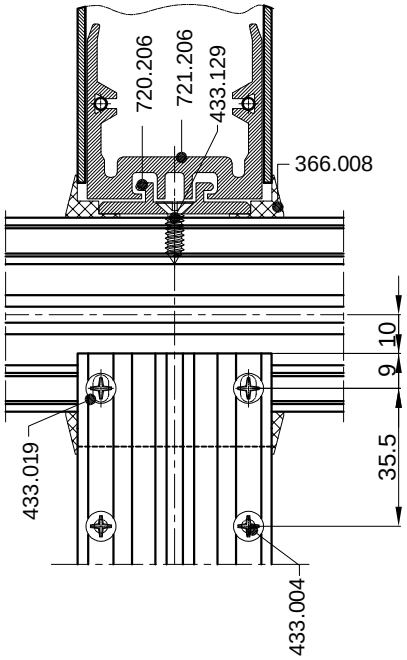


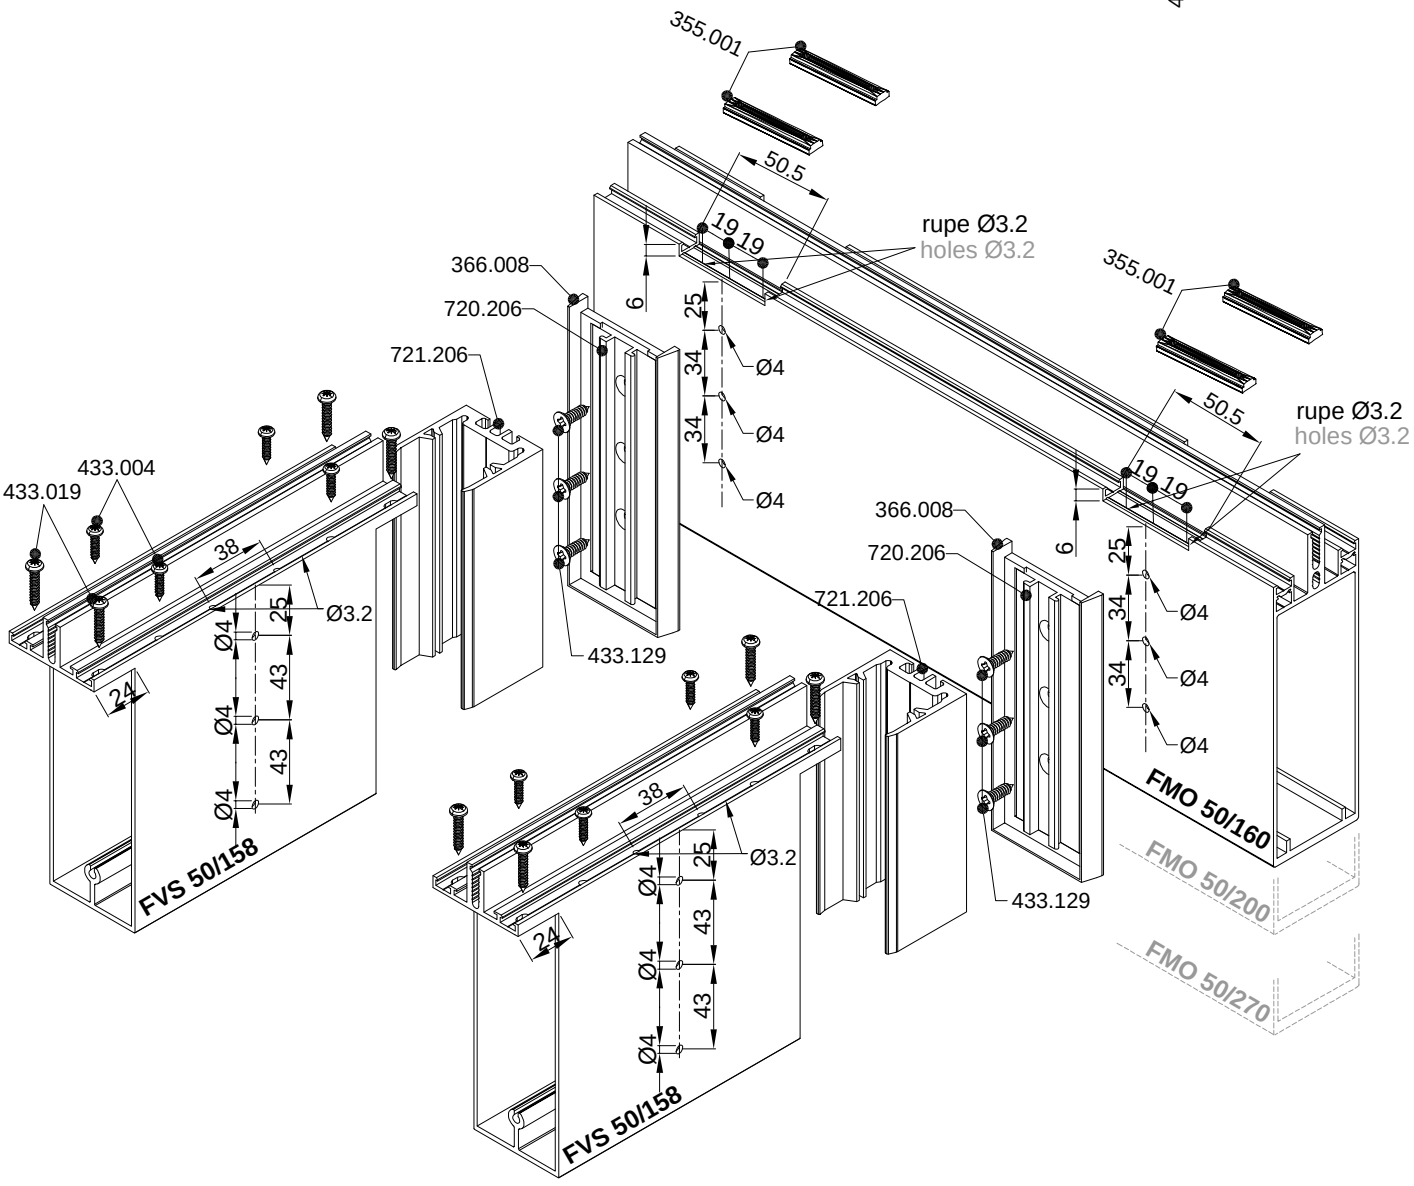

- Obrada pomoćne vodoravnice **FVS 50/158** za okomicu **FMO 50/160** (gumeni odstojnik s obrubom) i vodoravnicu **FMV 50/158** (gumeni odstojnik s obrubom) treći nivo
- Processing of auxiliary transom FVS 50/138 for mullion FMO 50/160 (rimmed dilatation rubber) and transom FMV 50/158 (rimmed dilatation rubber) third level

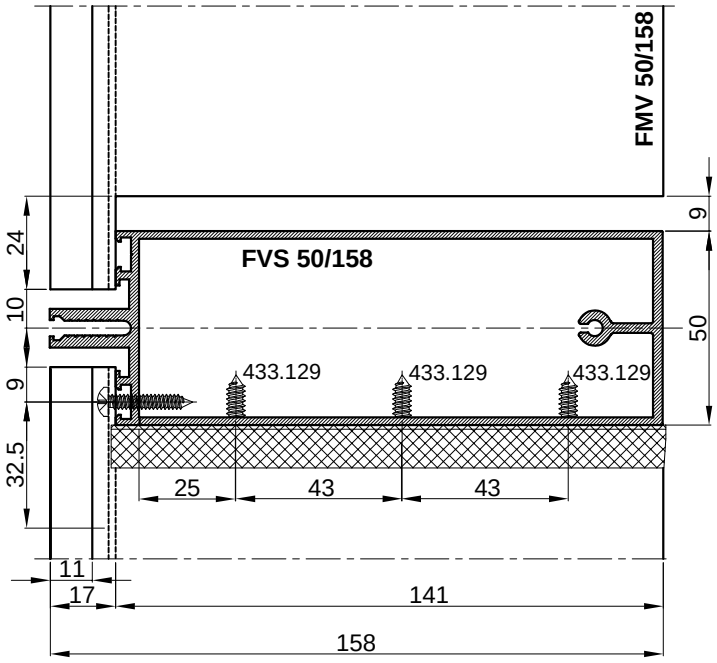


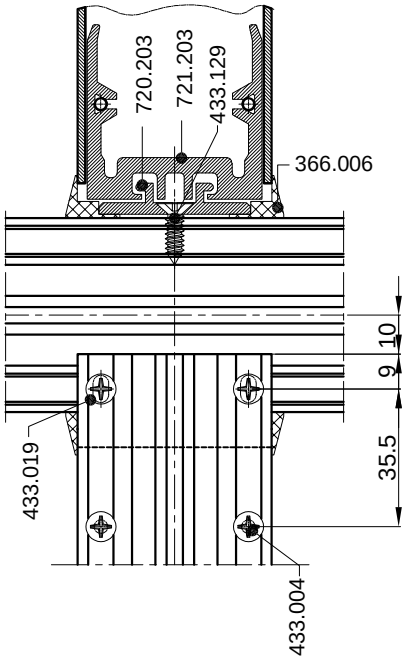


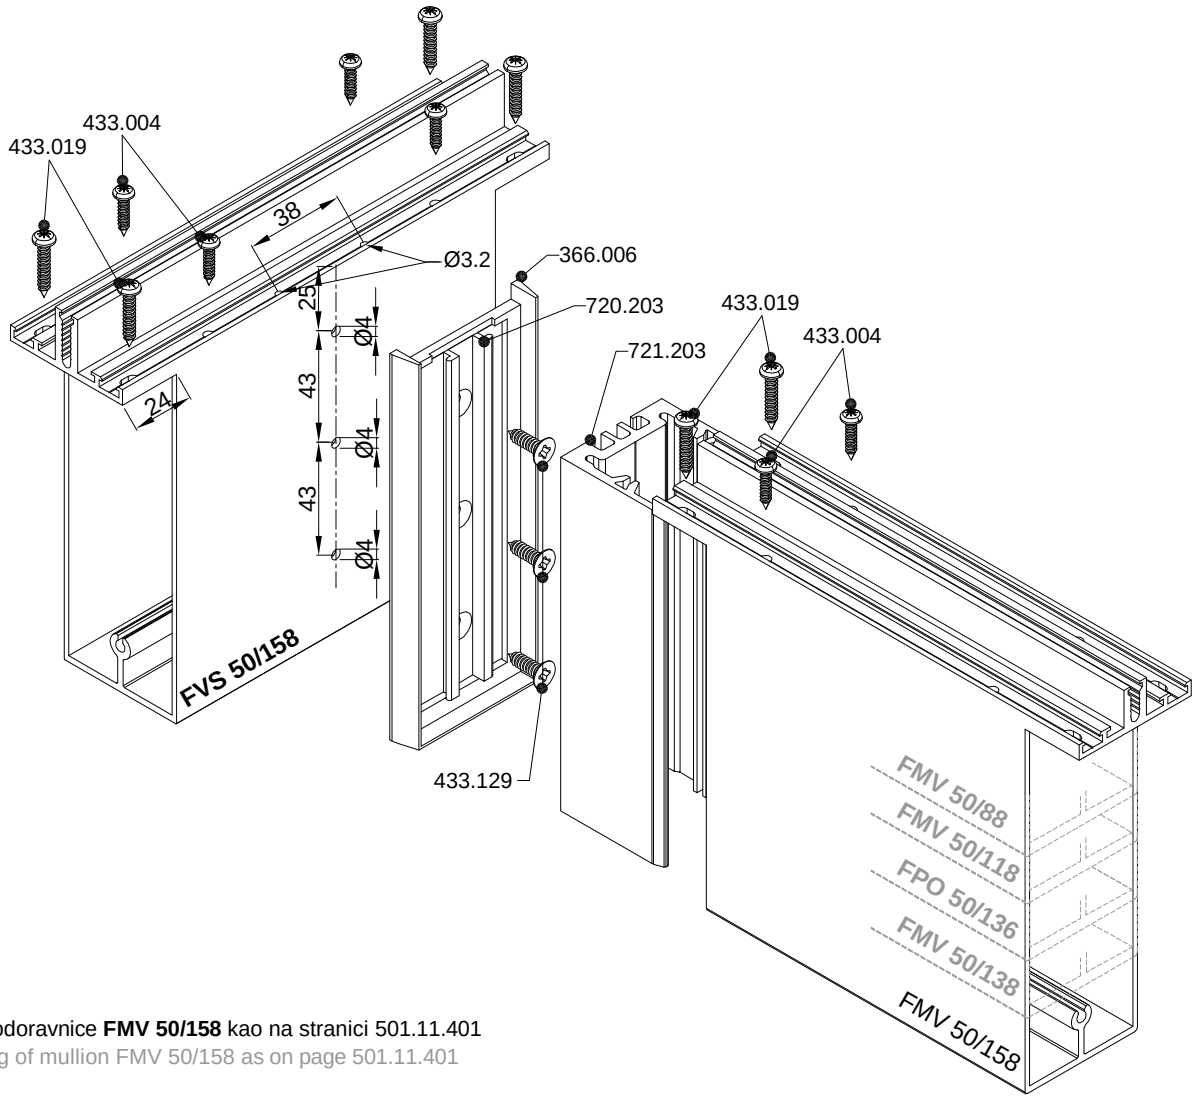


Obrada vodoravnice **FMV 50/158** kao na stranici 501.11.401
Processing of mullion FMV 50/158 as on page 501.11.401


- Obrada pomoćne vodoravnice **FVS 50/158** za okomicu **FMO 50/160** (gumeni odstojnik s obrubom) i vodoravnicu **FMV 50/158** (gumeni odstojnik s obrubom) treći nivo
- Processing of auxiliary transom FVS 50/158 for mullion FMO 50/160 (rimmed dilatation rubber) and transom FMV 50/158 (rimmed dilatation rubber) third level

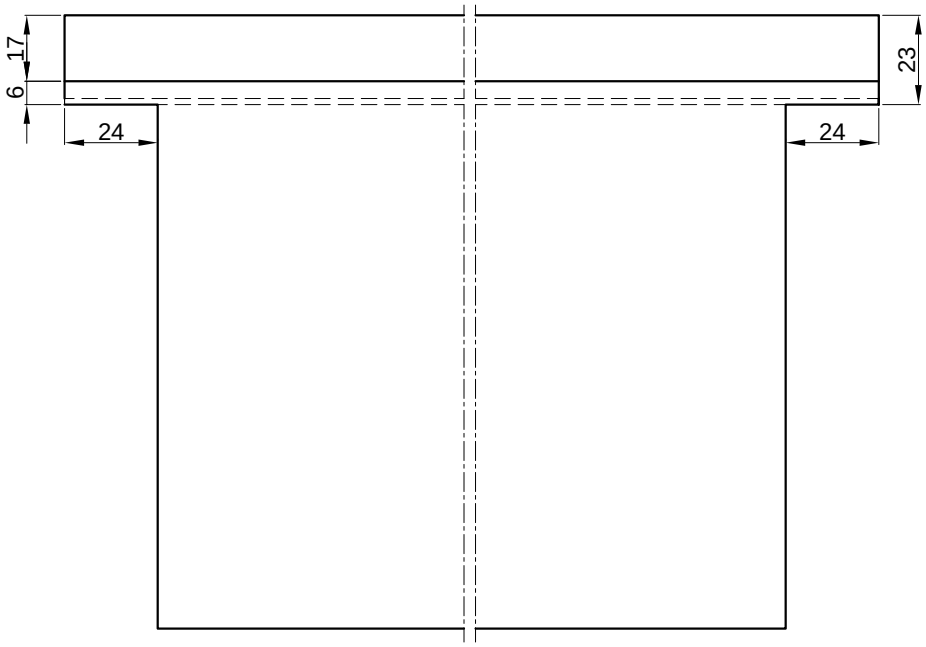

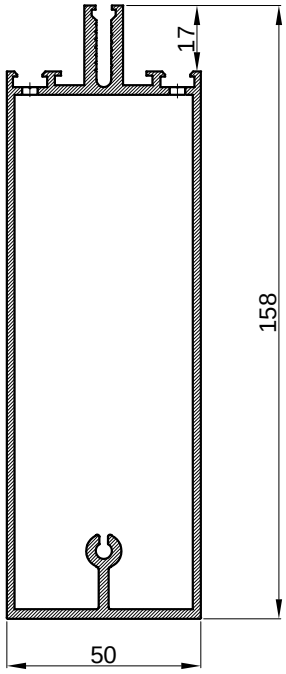


PRESJEK B-B
CROSS SECTION B-B

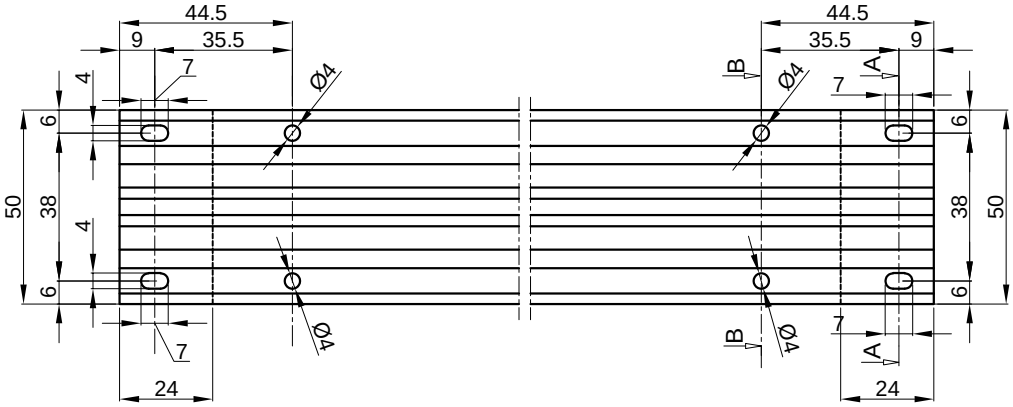





PRESJEK A-A
CROSS SECTION A-A

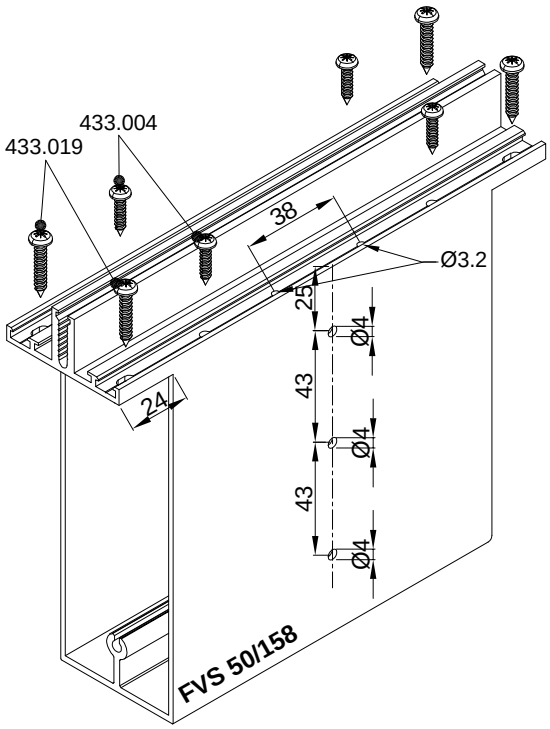



366.008
gumeni odstojnik s obrubom
za pom. vodoravnicu FVS 50/158
366.008
rimmed dilatation rubber
for aux. transom FVS 50/158




- Obrada okomice F**MO 50/120** za prihvat pomoćne vodoravnice **FVS 50/118** treći nivo fasade (gumeni odstojnik s obrubom)
- Processing of mullion FMO 50/120 for auxiliary transom FVS 50/118 third level (rimmed dilatation rubber)

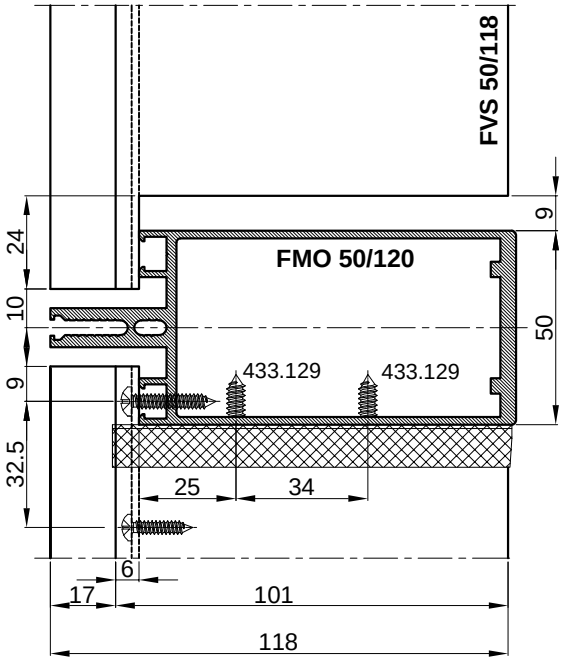


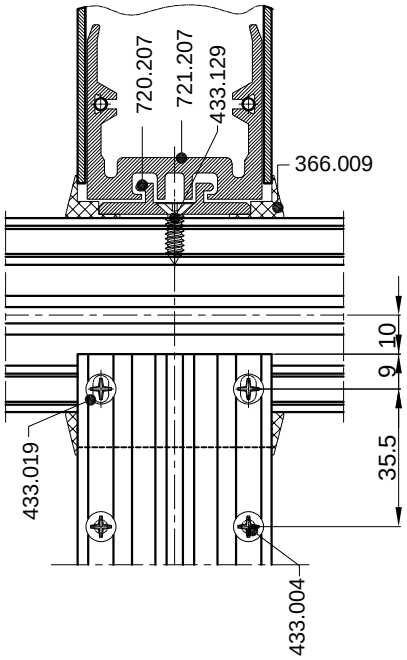


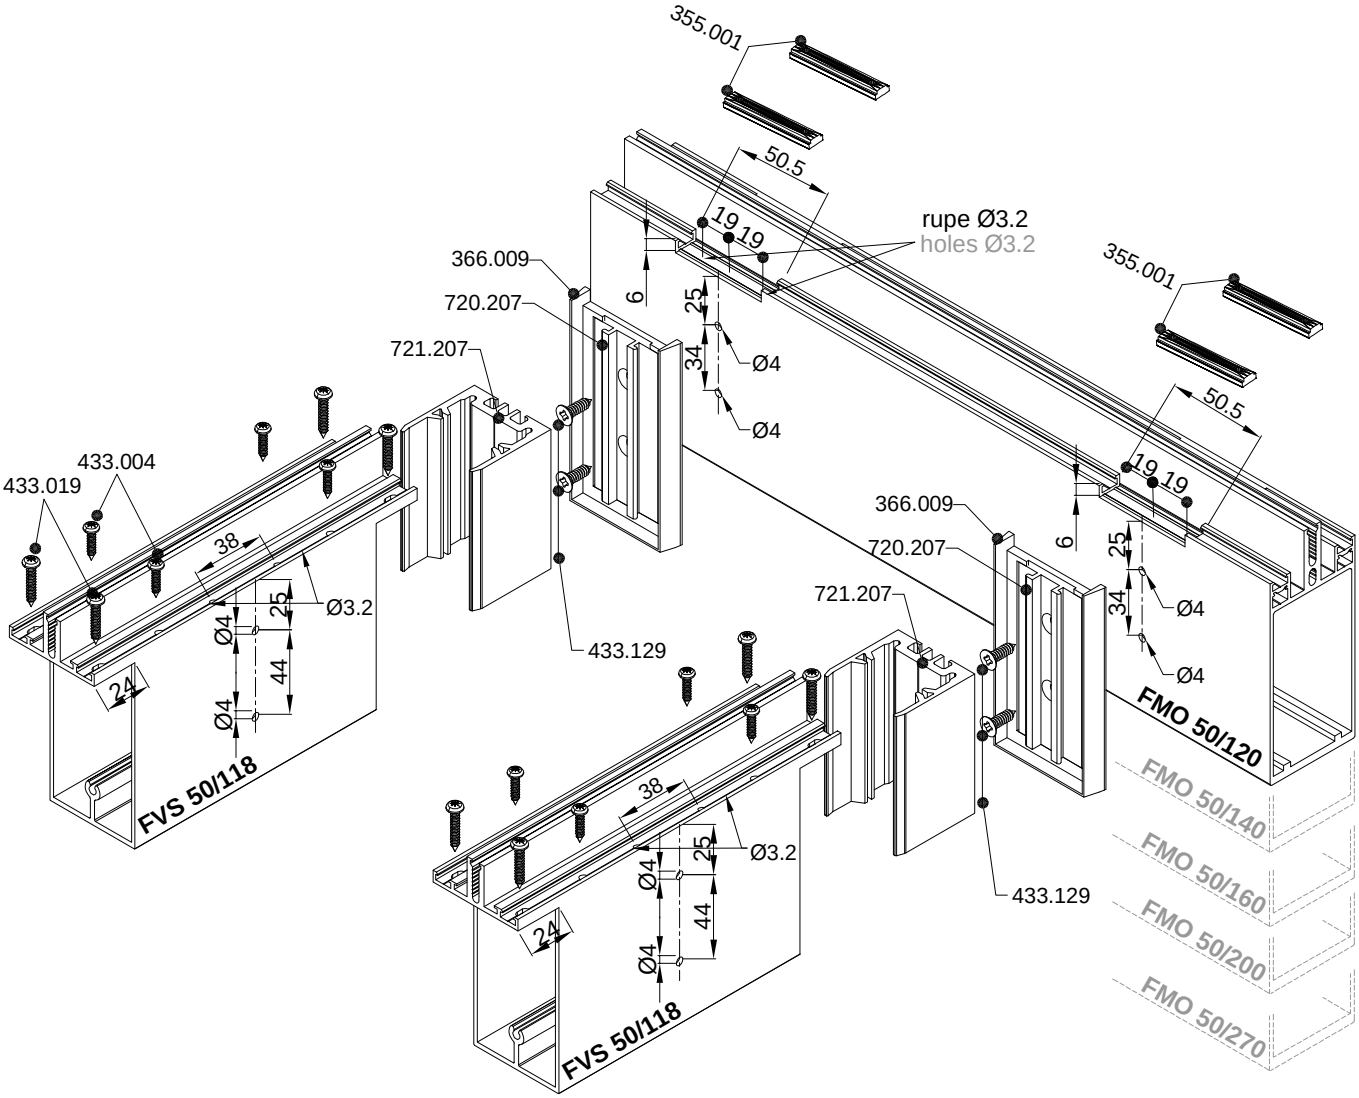

- Obrada pomoćne vodoravnice **FVS 50/118** za okomicu **FMO 50/120** (gumeni odstojnik s obrubom) i vodoravnicu **FMV 50/118** (gumeni odstojnik s obrubom) treći nivo
- Processing of auxiliary transom FVS 50/118 for mullion FMO 50/120 (rimmed dilatation rubber) and transom FMV 50/118 (rimmed dilatation rubber) third level

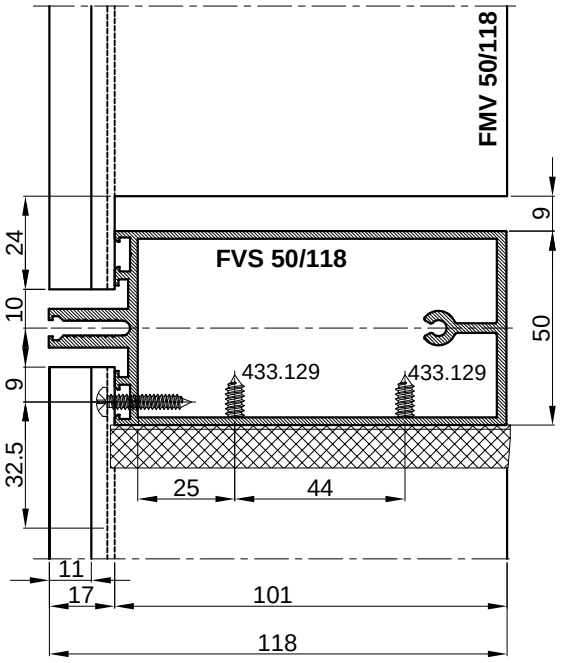


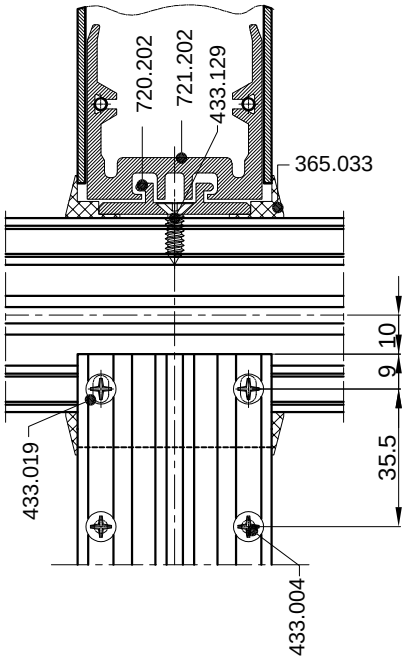


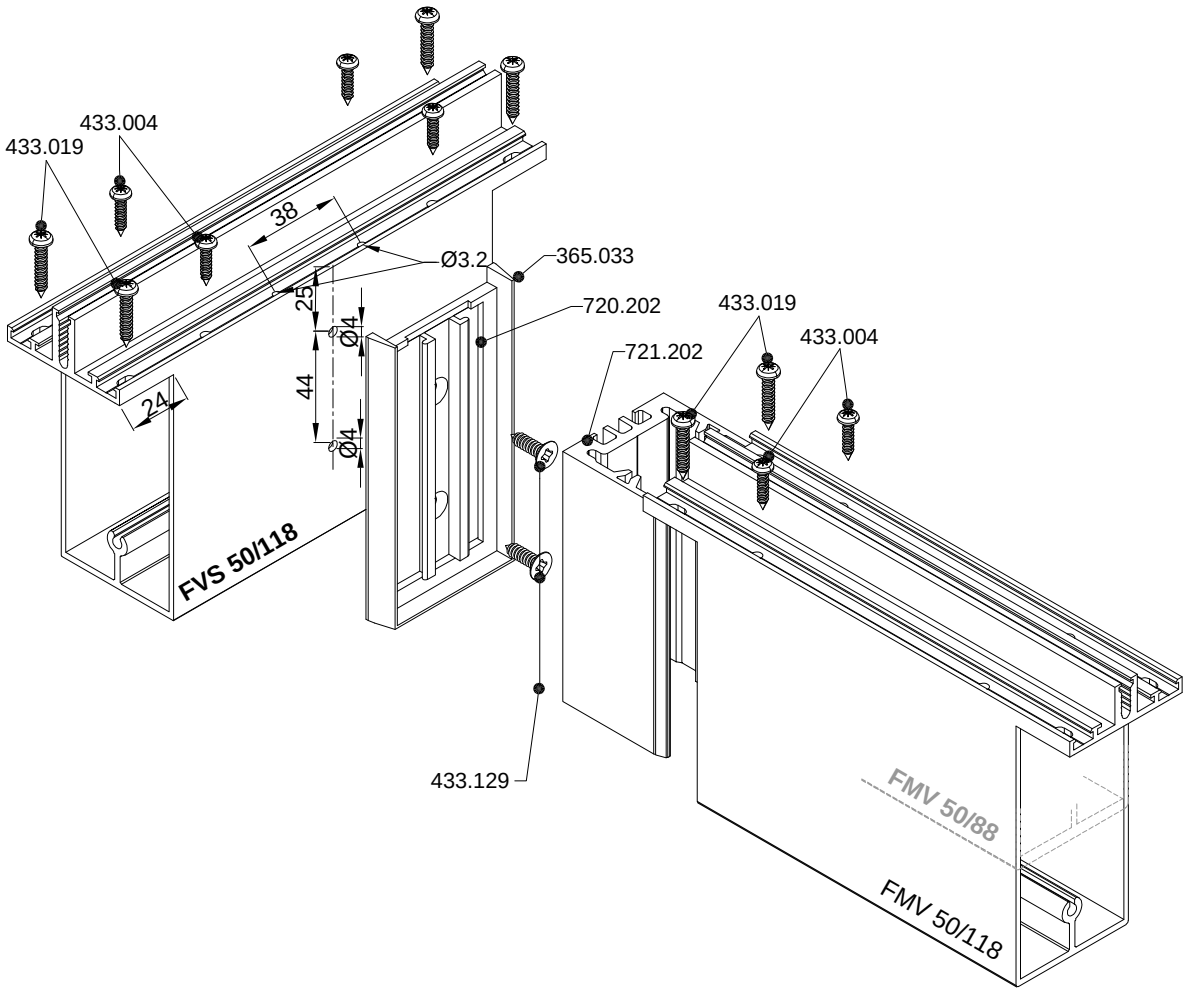


Obrada vodoravnice **FMV 50/118** kao na stranici 501.11.403
Processing of mullion FMV 50/118 as on page 501.11.403


- Obrada pomoćne vodoravnice **FVS 50/118** za okomicu **FMO 50/120** (gumeni odstojnik s obrubom) i vodoravnicu **FMV 50/118** (gumeni odstojnik s obrubom) treći nivo
- Processing of auxiliary transom FVS 50/118 for mullion FMO 50/120 (rimmed dilatation rubber) and transom FMV 50/118 (rimmed dilatation rubber) third level

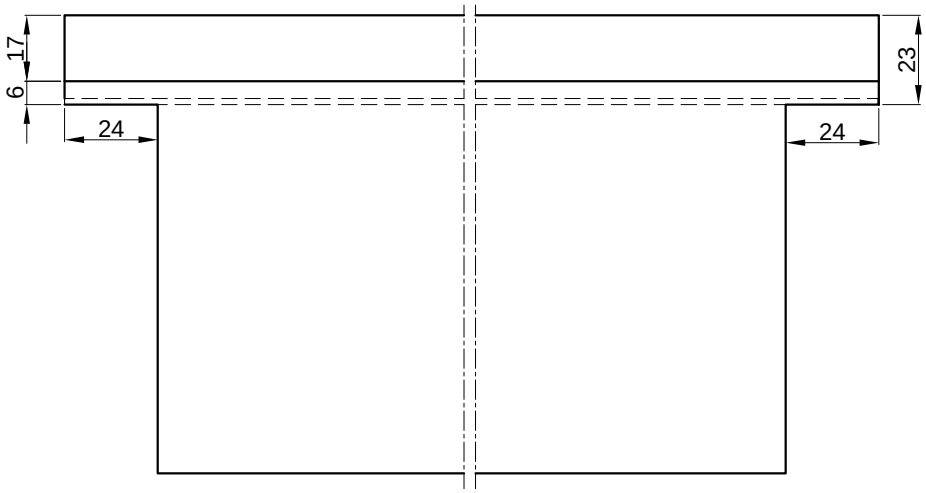

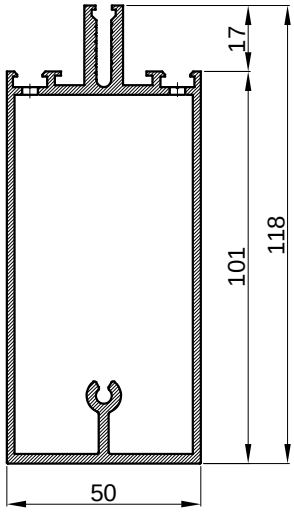


PRESJEK B-B
CROSS SECTION B-B

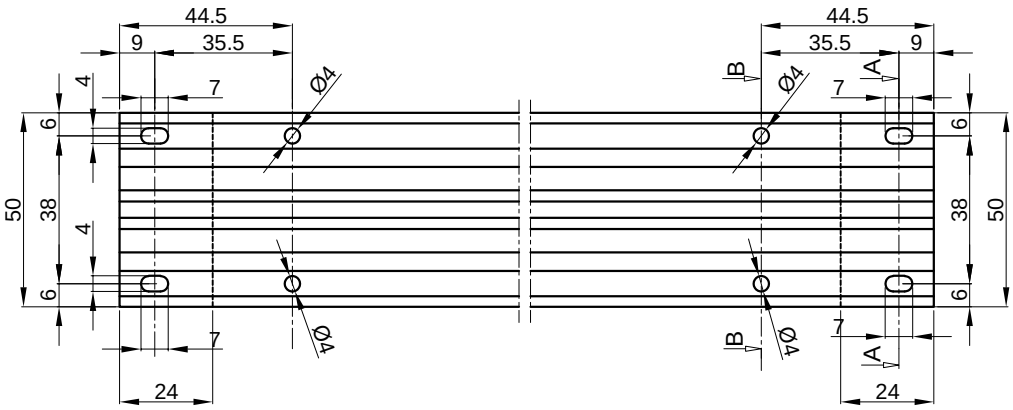





PRESJEK A-A
CROSS SECTION A-A

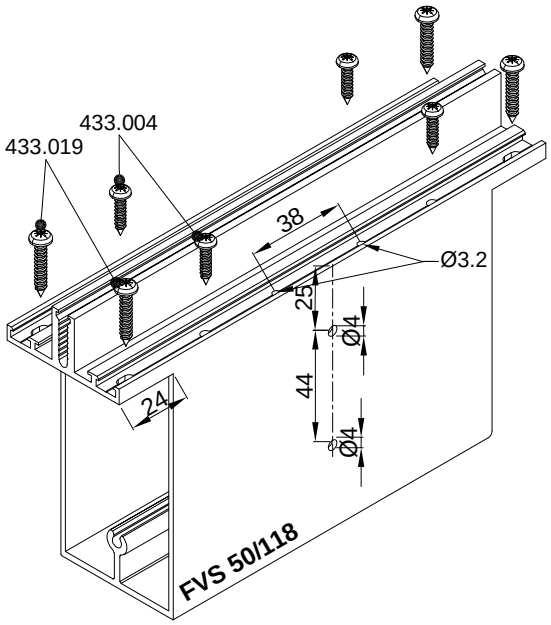



366.009
gumeni odstojnik s obrubom
za pom. vodoravnicu FVS 50/118
366.009
rimmed dilatation rubber
for aux. transom FVS 50/118




- Obrada okomice F**MO 50/90** za prihvat pomoćne vodoravnice **FVS 50/88** treći nivo fasade (gumeni odstojnik s obrubom)
- Processing of mullion FMO 50/90 for auxiliary transom FVS 50/88 third level (rimmed dilatation rubber)

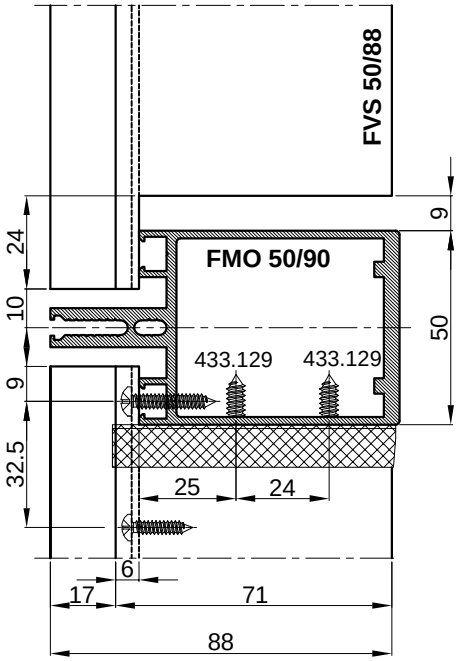


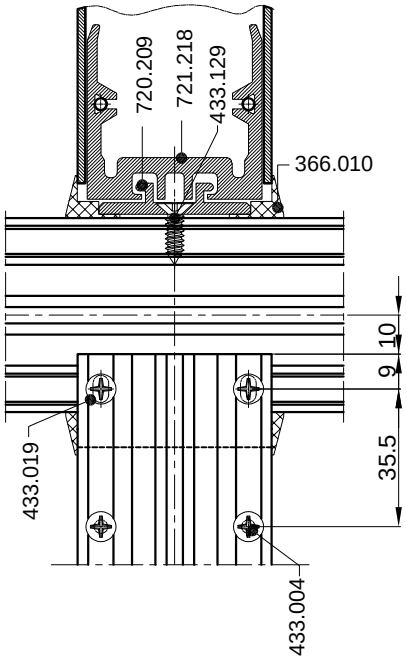


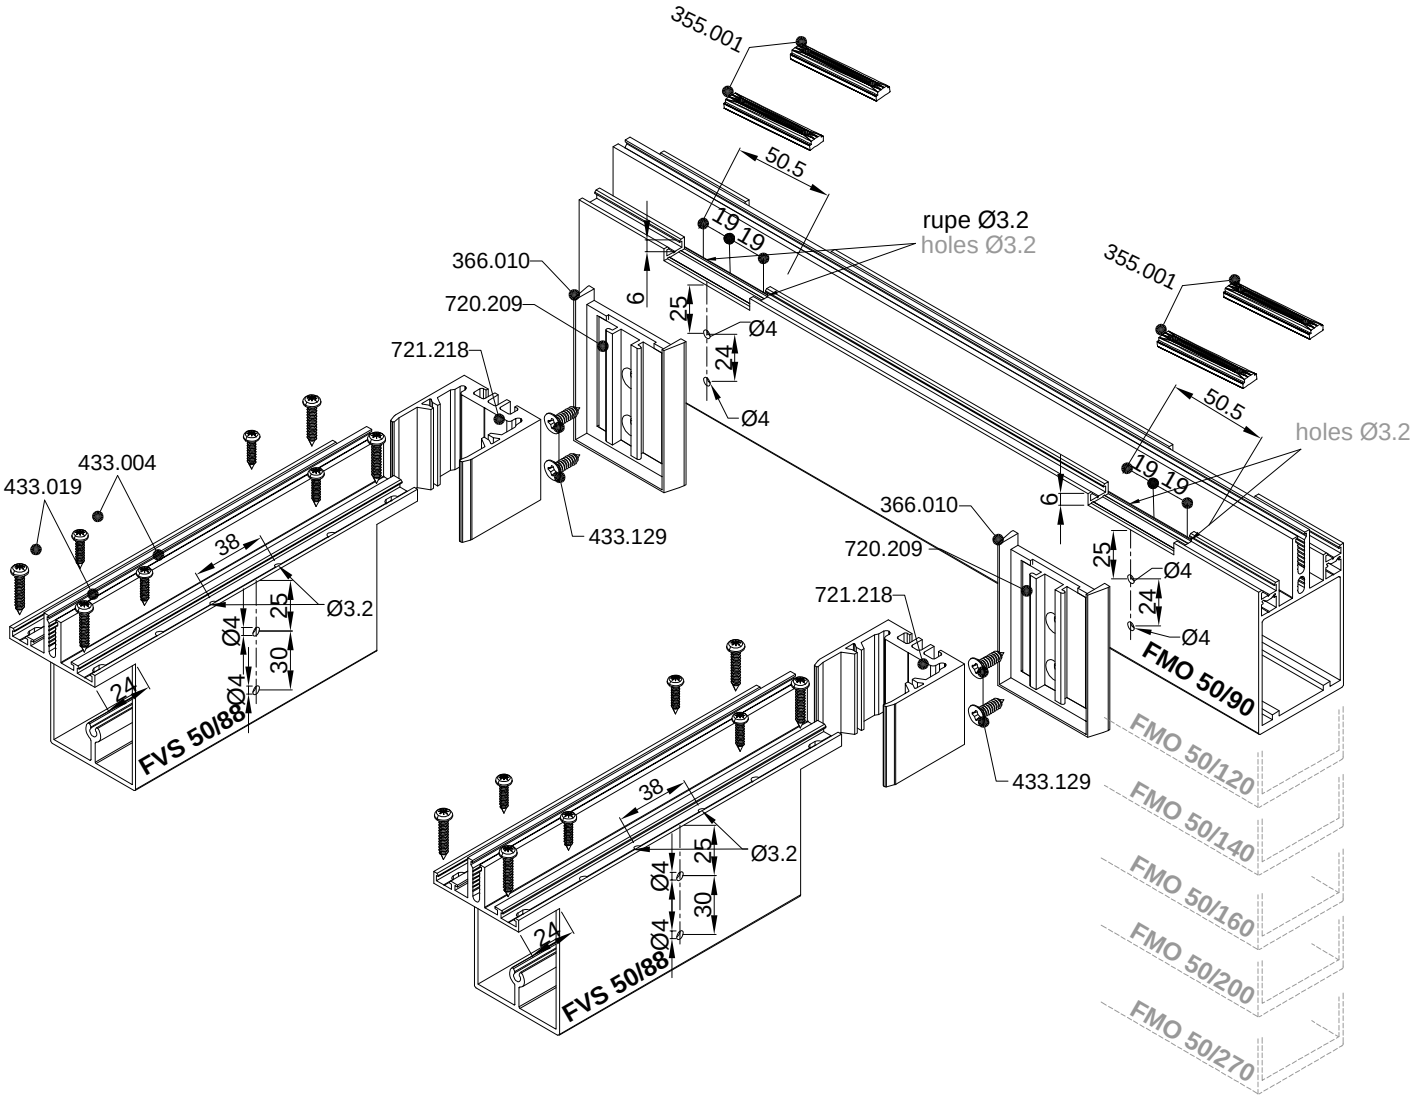

- Obrada pomoćne vodoravnice **FVS 50/88** za okomicu **FMO 50/90** (gumeni odstojnik s obrubom) i vodoravnicu **FMV 50/118** (gumeni odstojnik s obrubom) treći nivo
- Processing of auxiliary transom FVS 50/88 for mullion FMO 50/90 (rimmed dilatation rubber) and transom FMV 50/118 (rimmed dilatation rubber) third level

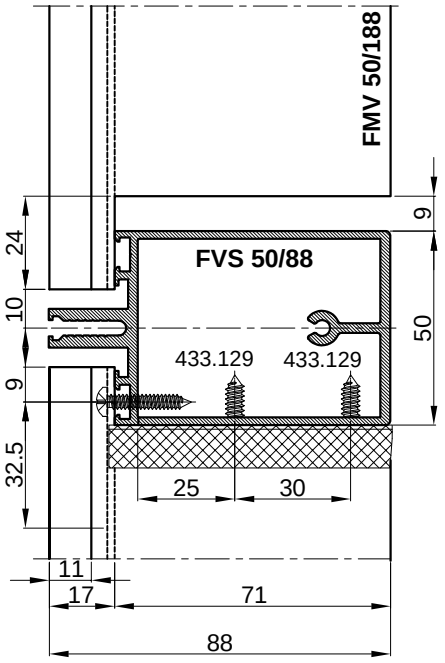


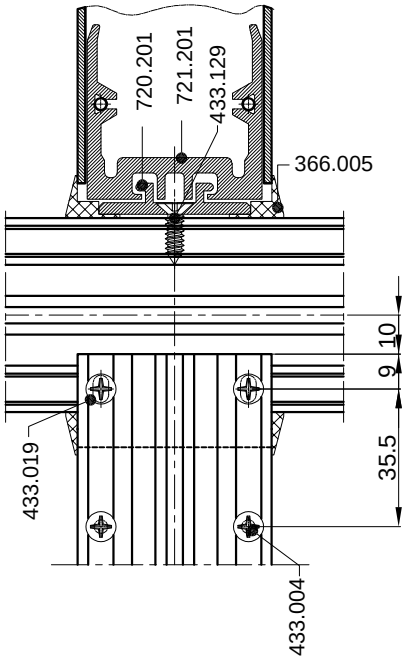


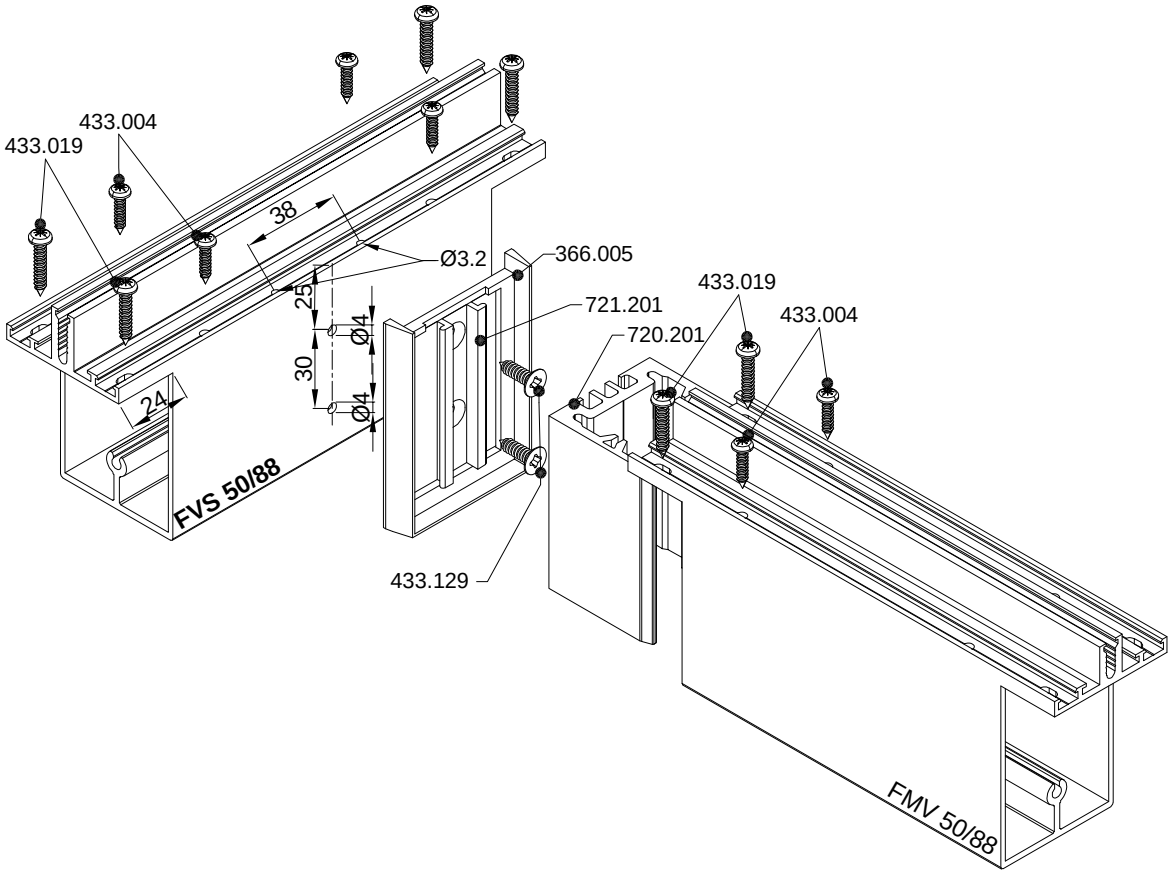


Obrada vodoravnice **FMV 50/88** kao na stranici 501.11.404
Processing of mullion FMV 50/88 as on page 501.11.404

- Obrada pomoćne vodoravnice **FVS 50/88** za okomicu **FMO 50/90** (gumeni odstojnik s obrubom) i vodoravnicu **FMV 50/88** (gumeni odstojnik s obrubom) treći nivo
- Processing of auxiliary transom FVS 50/88 for mullion FMO 50/90 (rimmed dilatation rubber) and transom FMV 50/88 (rimmed dilatation rubber) third level

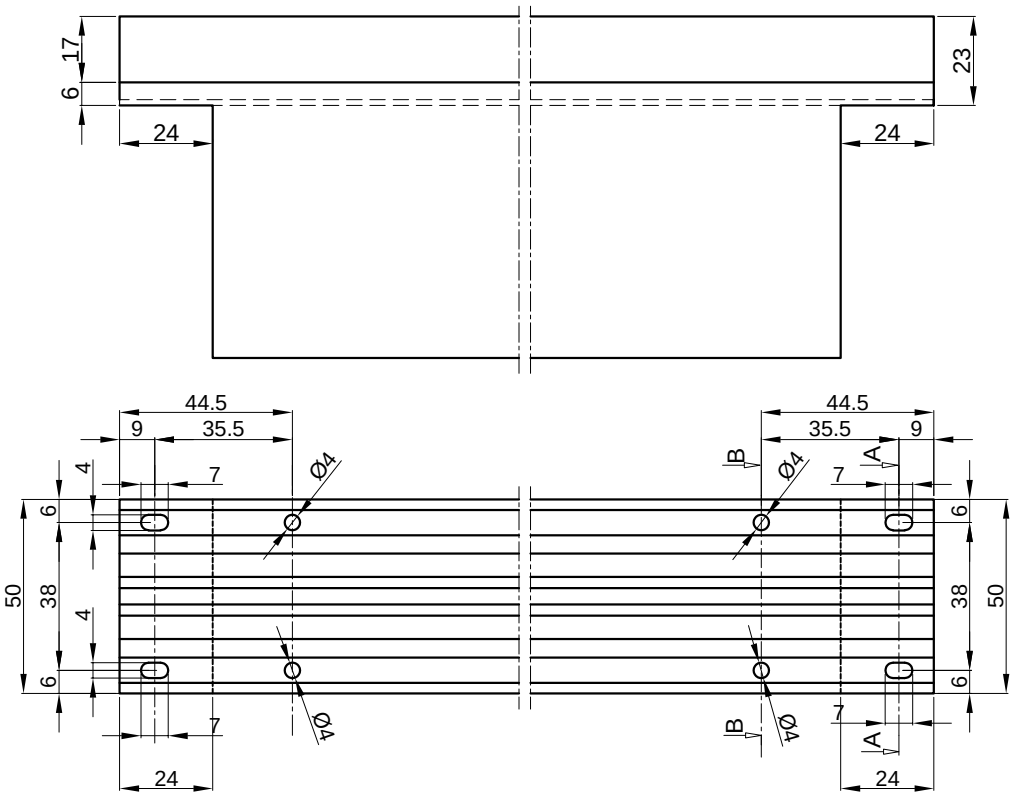


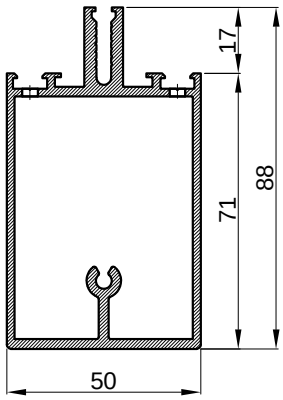


PRESJEK B-B
CROSS SECTION B-B




PRESJEK A-A
CROSS SECTION A-A

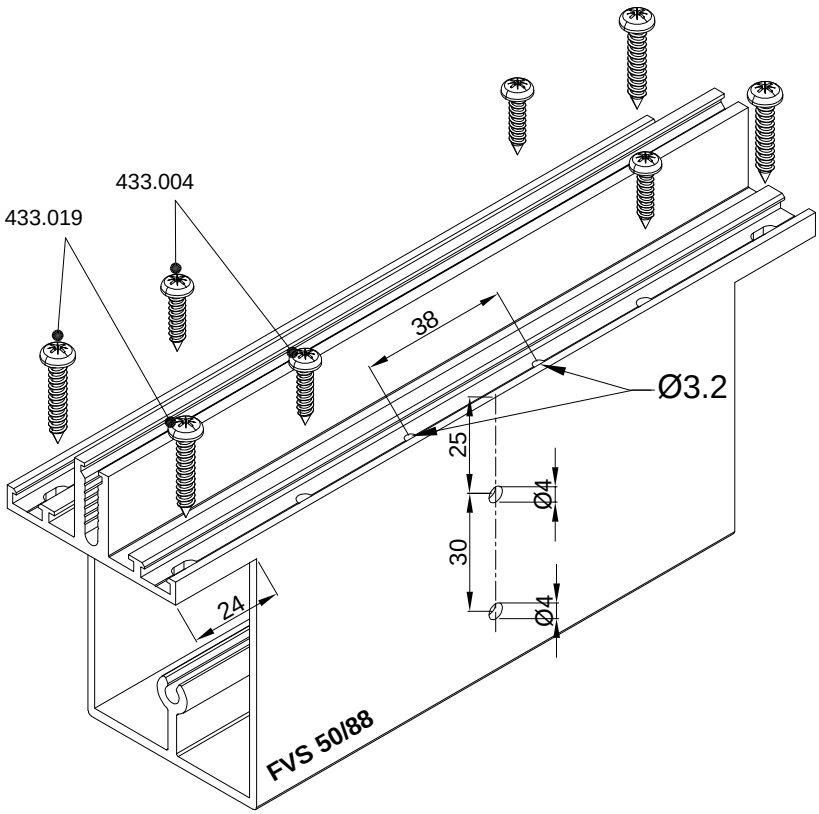


gumeni odstojnik s obrubom
za pom. vodoravnicu FVS 50/88
366.010
rimmed dilatation rubber
for aux. transom FVS 50/88





- Obrada okomice F**MO 50/140** za prihvat pomoćne vodoravnice **FPV 50/138** treći nivo fasade (ravni gumeni odstojnik)
- Processing of mullion FMO 50/140 for auxiliary transom FPV 50/138 third level (flat dilatation rubber)

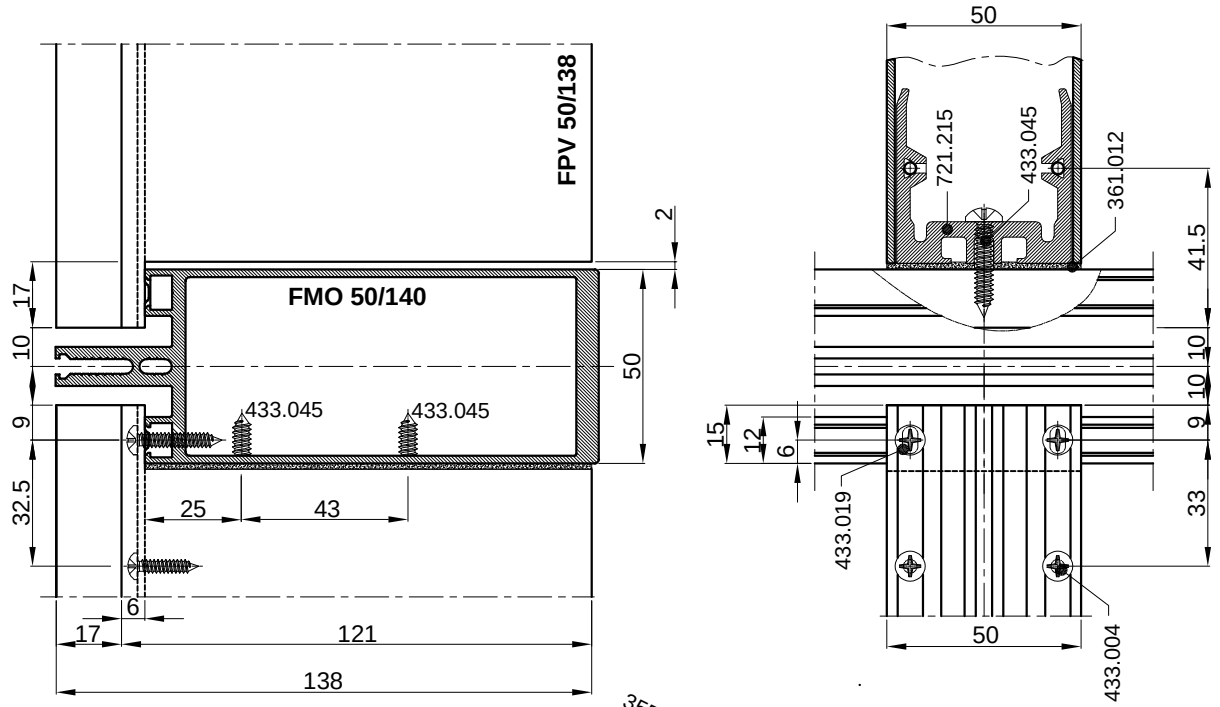

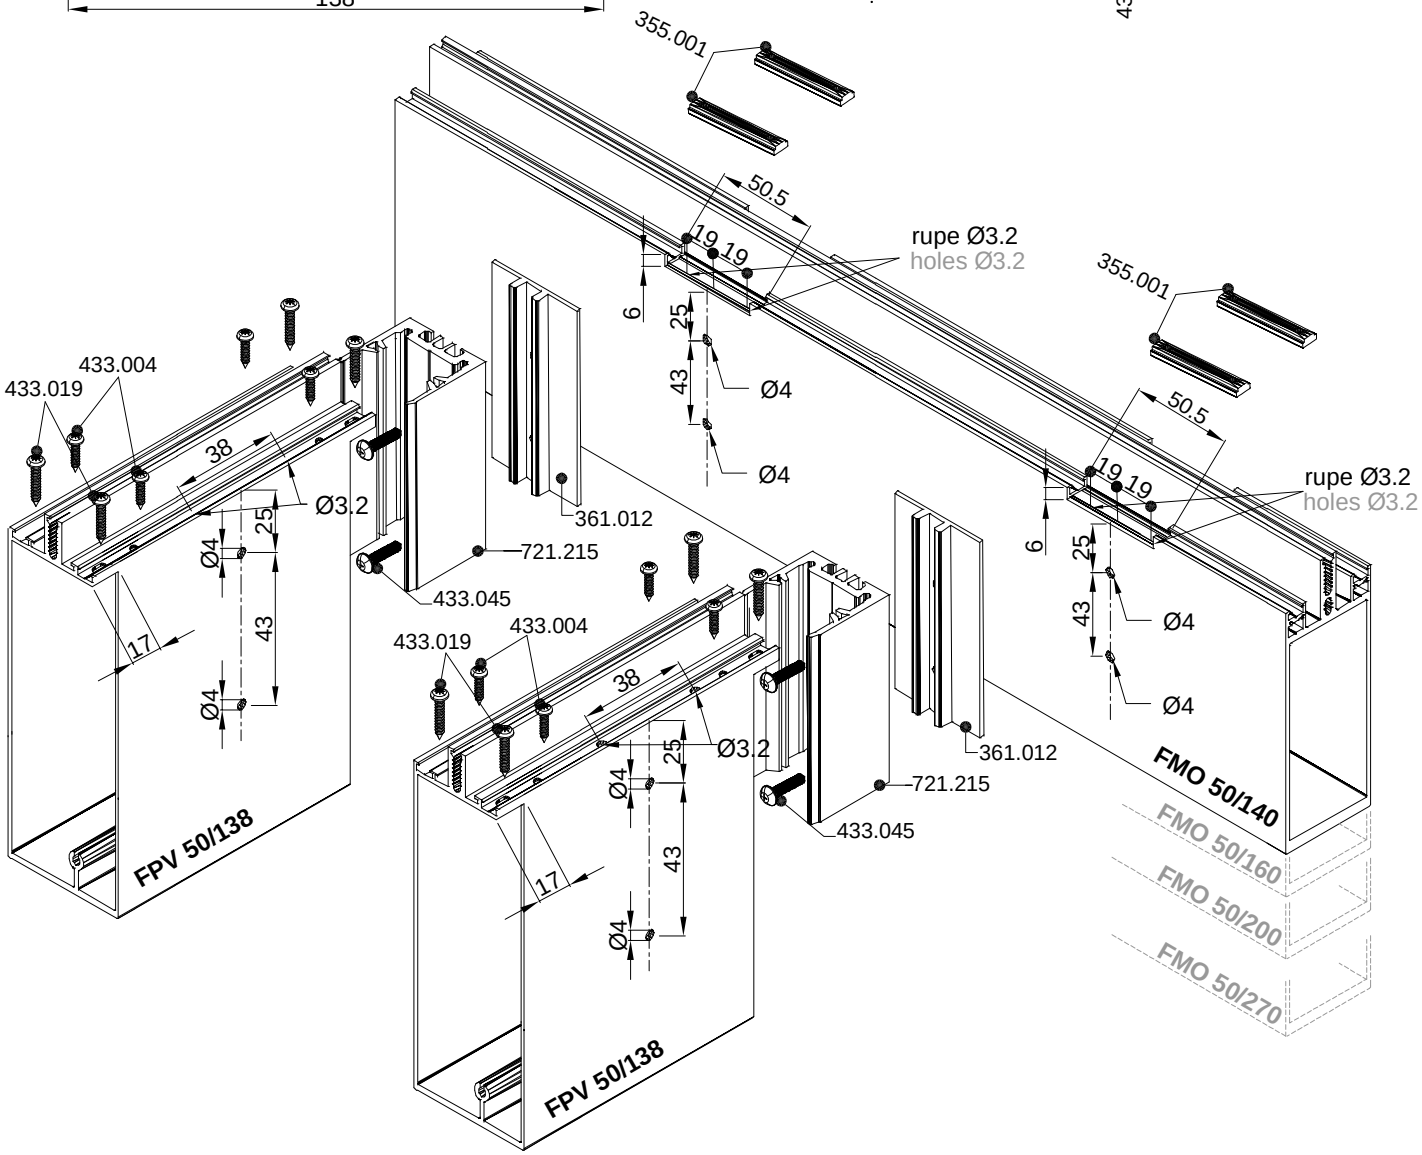



- Obrada pomoćne vodoravnice **FPV 50/138** za okomicu **FMO 50/140** (ravni gumeni odstojnik) i vodoravnicu **FPO 50/136** (ravni gumeni odstojnik) treći nivo
- Processing of auxiliary transom FPV 50/138 for mullion FMO 50/140 (flat dilatation rubber) and transom FPO 50/136 (flat dilataion rubber) third level

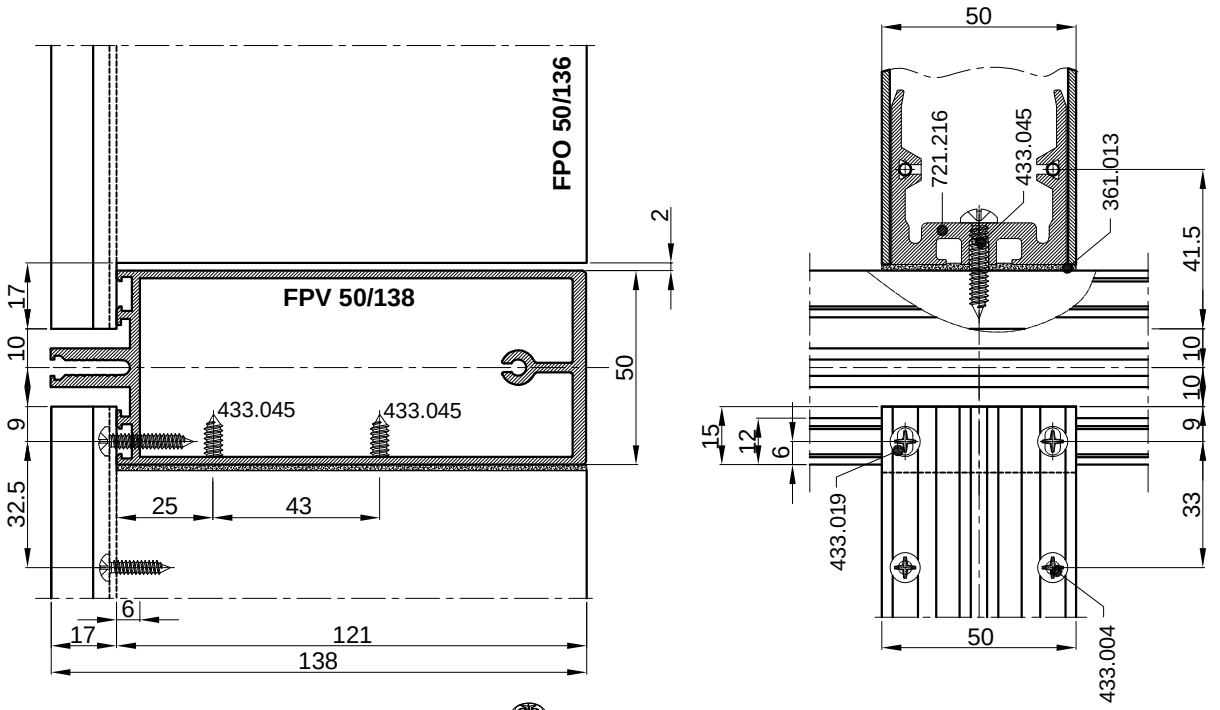

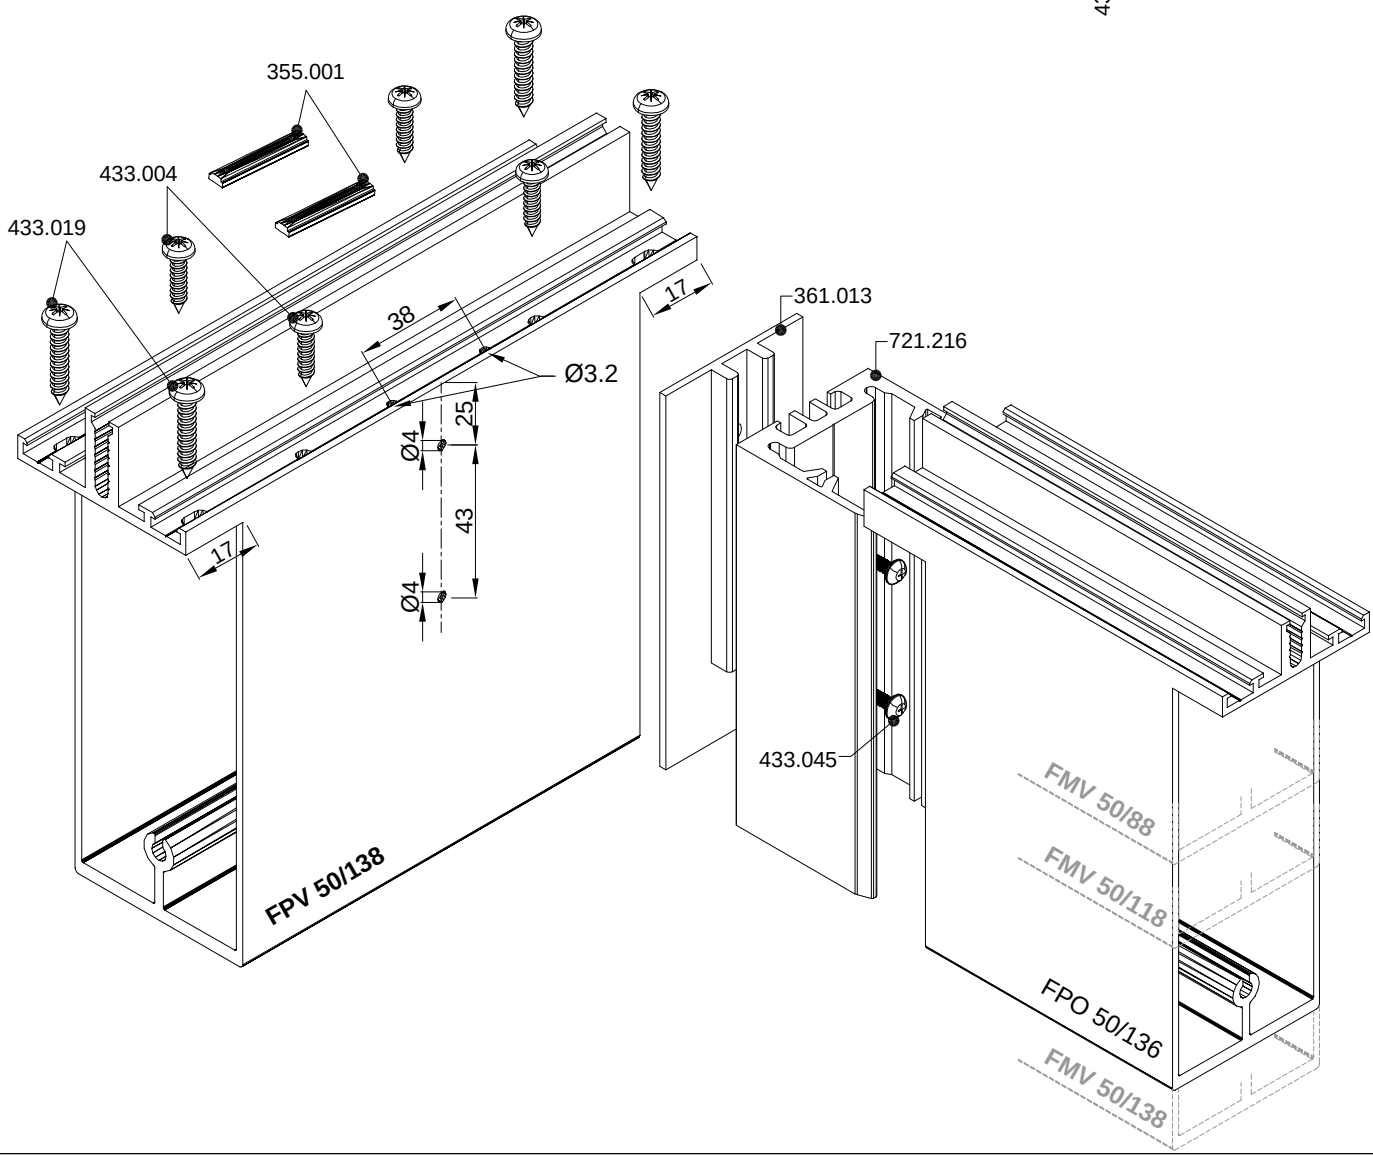


- Obrada pomoćne vodoravnice **FPV 50/138** za okomicu **FMO 50/140** (ravni gumeni odstojnik) i vodoravnicu **FPO 50/136** (ravni gumeni odstojnik) treći nivo
- Processing of auxiliary transom FPV 50/138 for mullion FMO 50/140 (flat dilatation rubber) and transom FPO 50/136 (flat dilataion rubber) third level

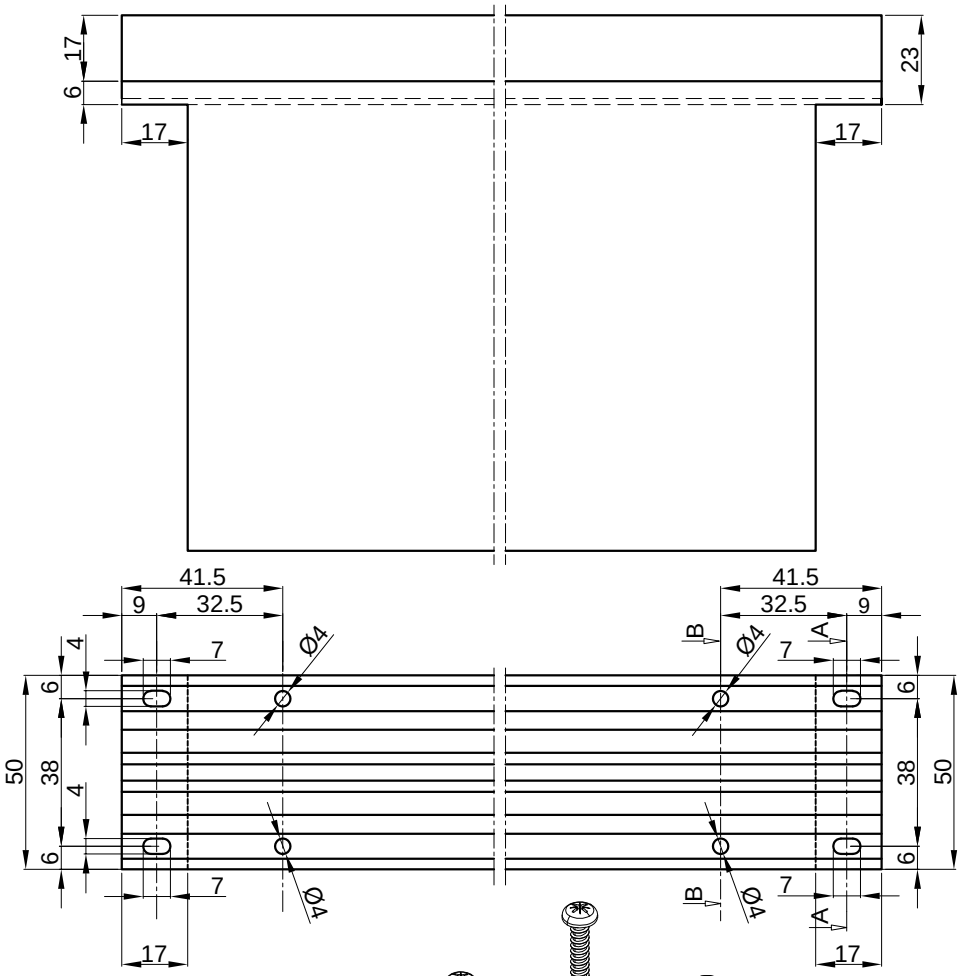


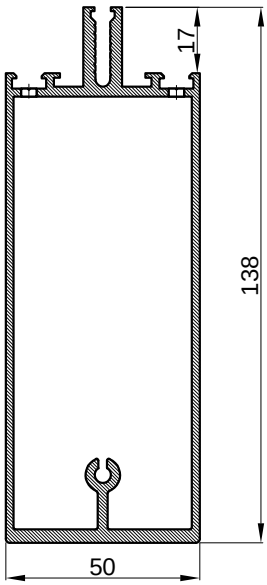

PRESJEK B-B
CROSS SECTION B-B




PRESJEK A-A
CROSS SECTION A-A

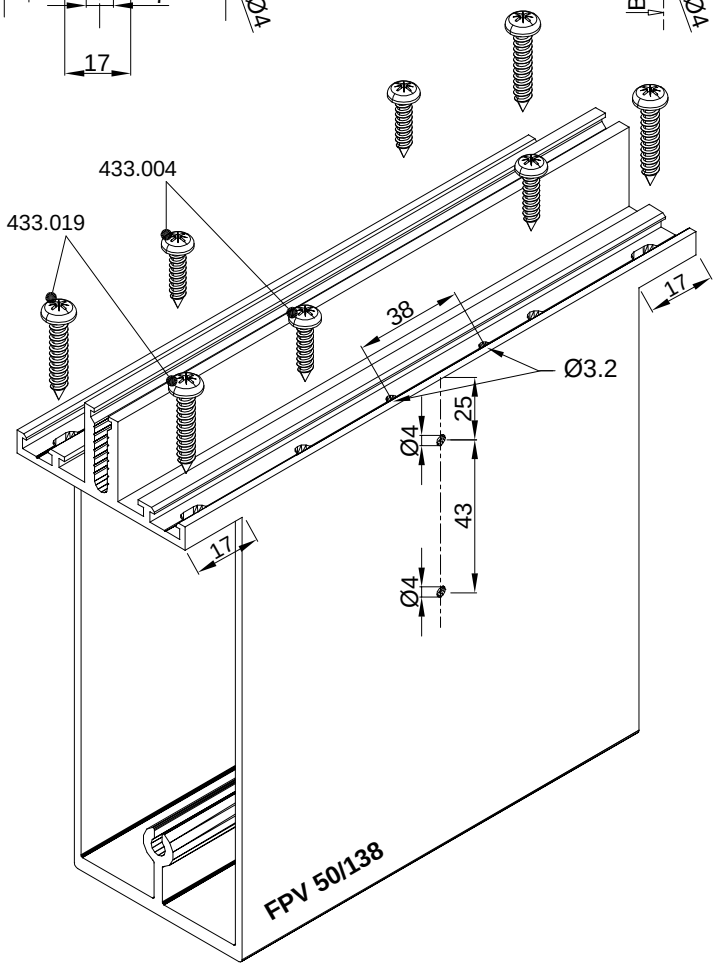



361.012
ravni gumeni odstojnik
za pom. vodoravnicu FPV 50/138

361.012
flat dilatation rubber
for aux. transom FPV 50/138



- Obrada vodoravnice **FPO 50/136** za pomoćnu vodoravnicu **FPV 50/138** treći nivo (ravni gumeni odstojnik)
- Processing of transom FPO 50/136 for auxiliary transom FPV 50/138 third level (flat dilatation rubber)

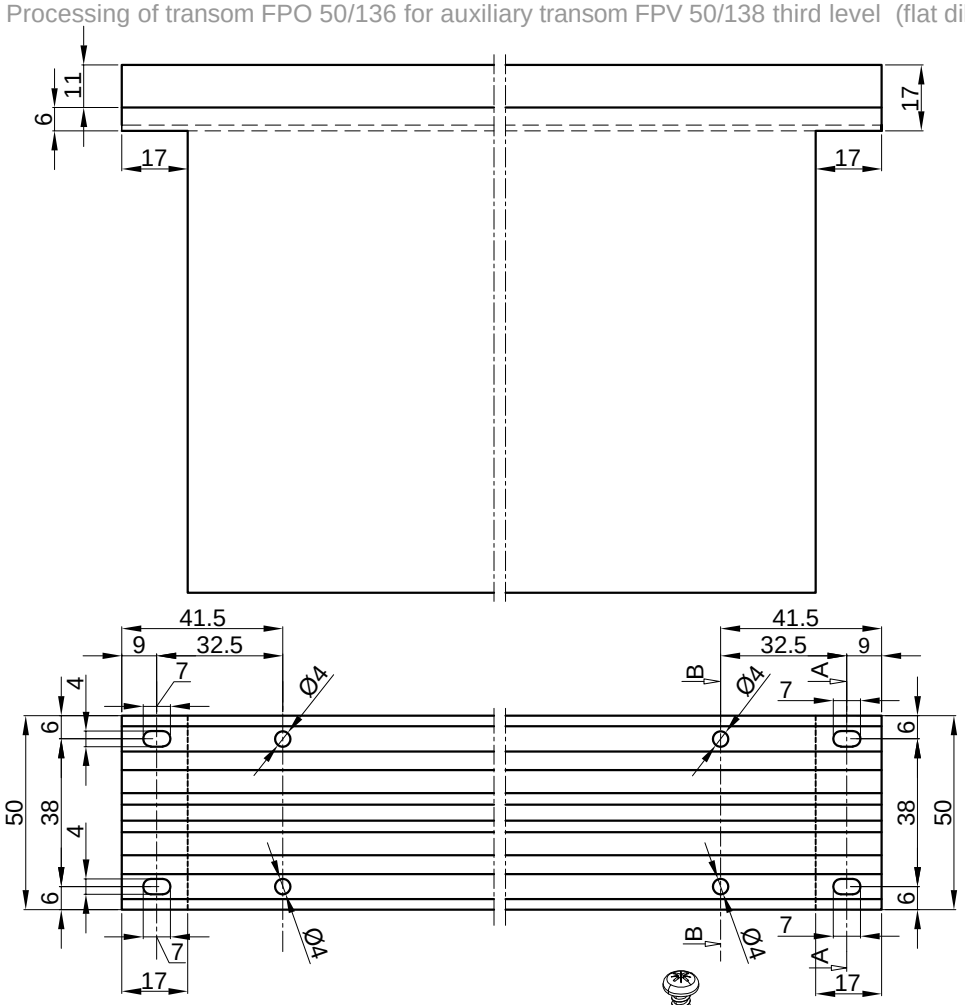


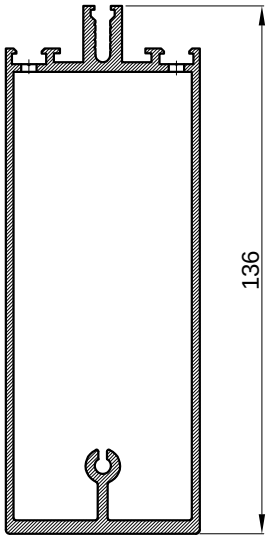

PRESJEK B-B
CROSS SECTION B-B




PRESJEK A-A
CROSS SECTION A-A

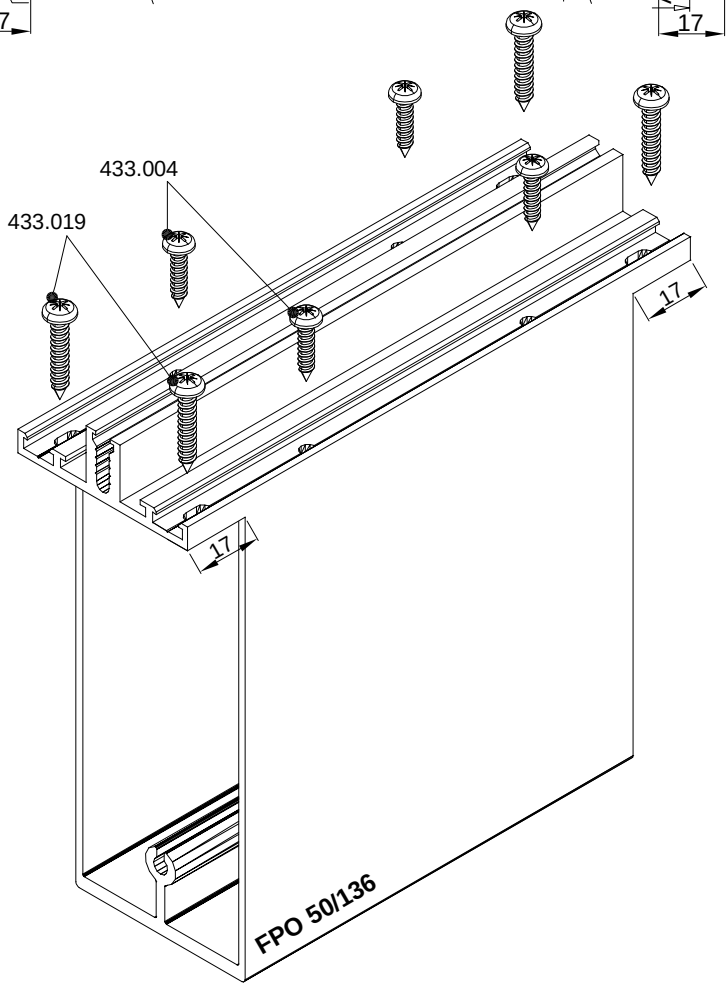



361.013
ravni gumeni odstojnik
za vodoravnicu FPO 50/136

361.013
flat dilatation rubber
for transom FPO 50/136





- Obrada okomice F**MO 50/160** za prihvat pomoćne vodoravnice **FVS 50/158** treći nivo fasade (ravni gumeni odstojnik)
- Processing of mullion FMO 50/160 for auxiliary transom FVS 50/158 third level (flat dilatation rubber)

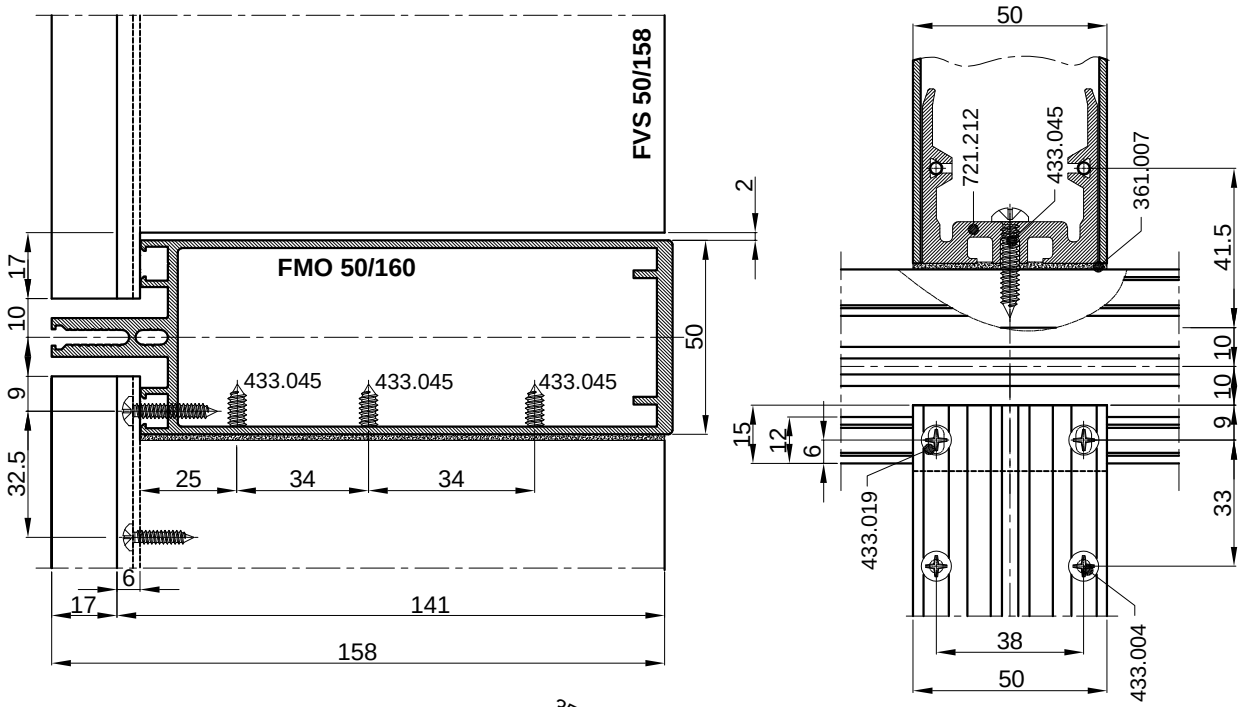

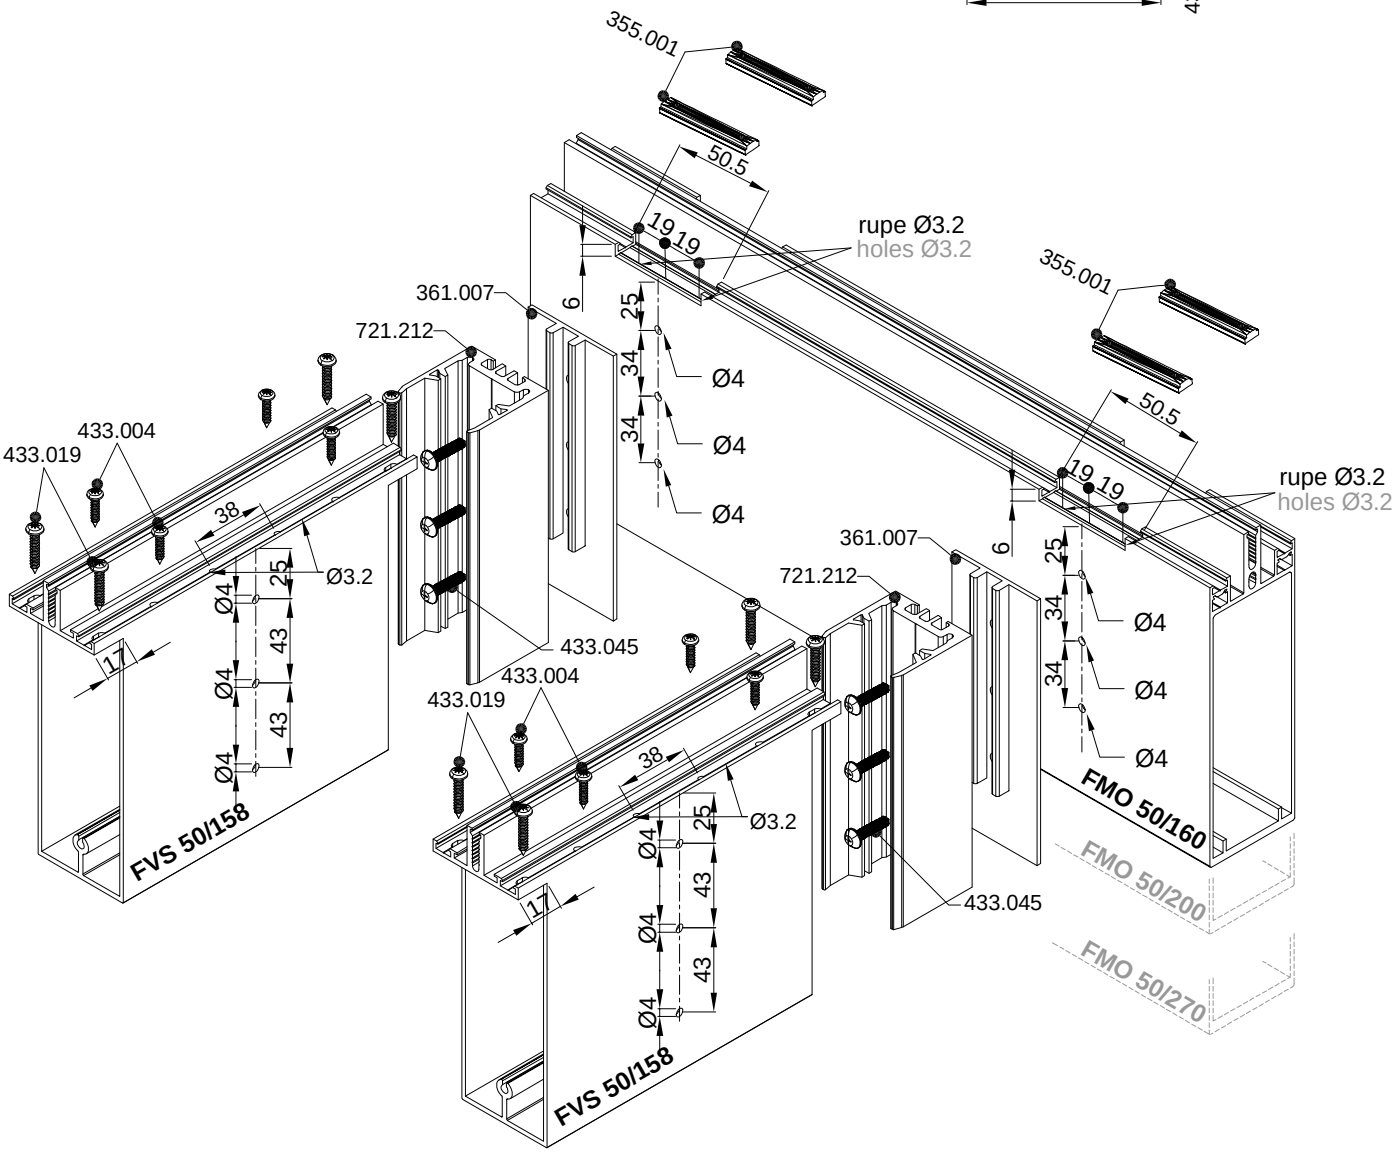


- Obrada pomoćne vodoravnice **FVS 50/158** za okomicu **FMO 50/160** (ravni gumeni odstojnik) i vodoravnicu **FMV 50/158** (ravni gumeni odstojnik) treći nivo
- Processing of auxiliary transom FVS 50/158 for mullion FMO 50/160 (flat dilatation rubber) and transom FMV 50/158 (flat dilataion rubber) third level

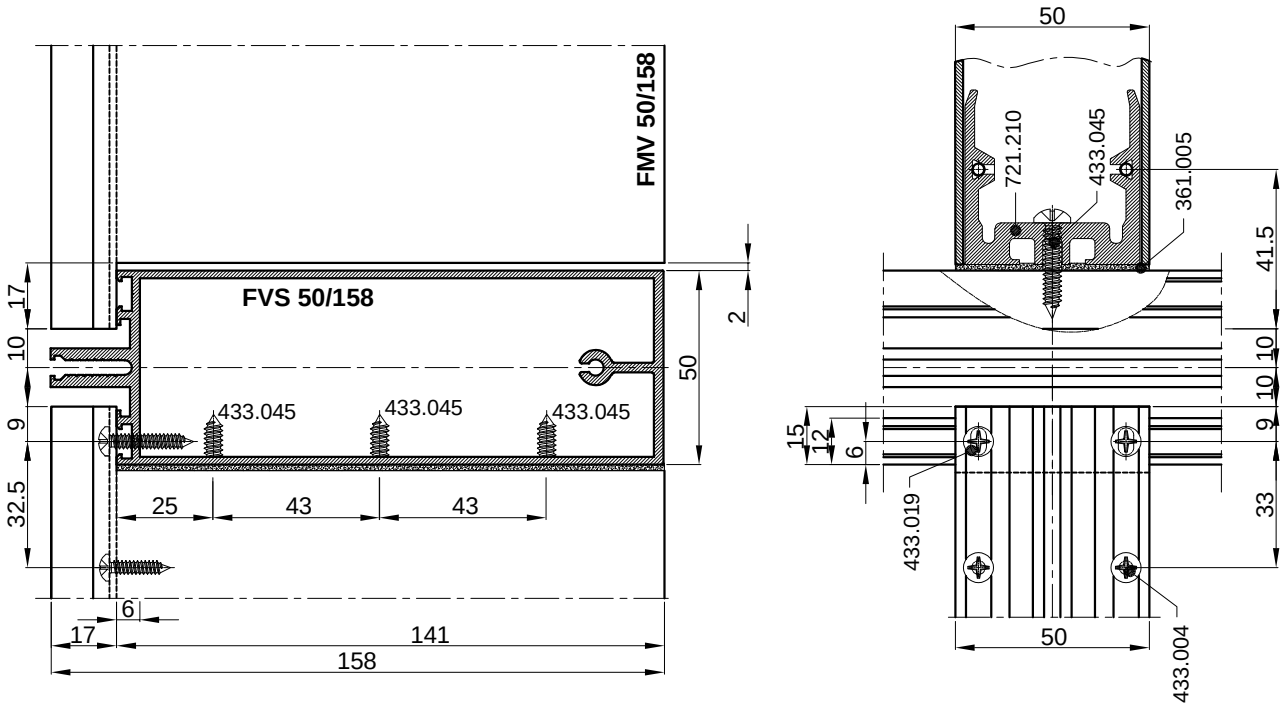


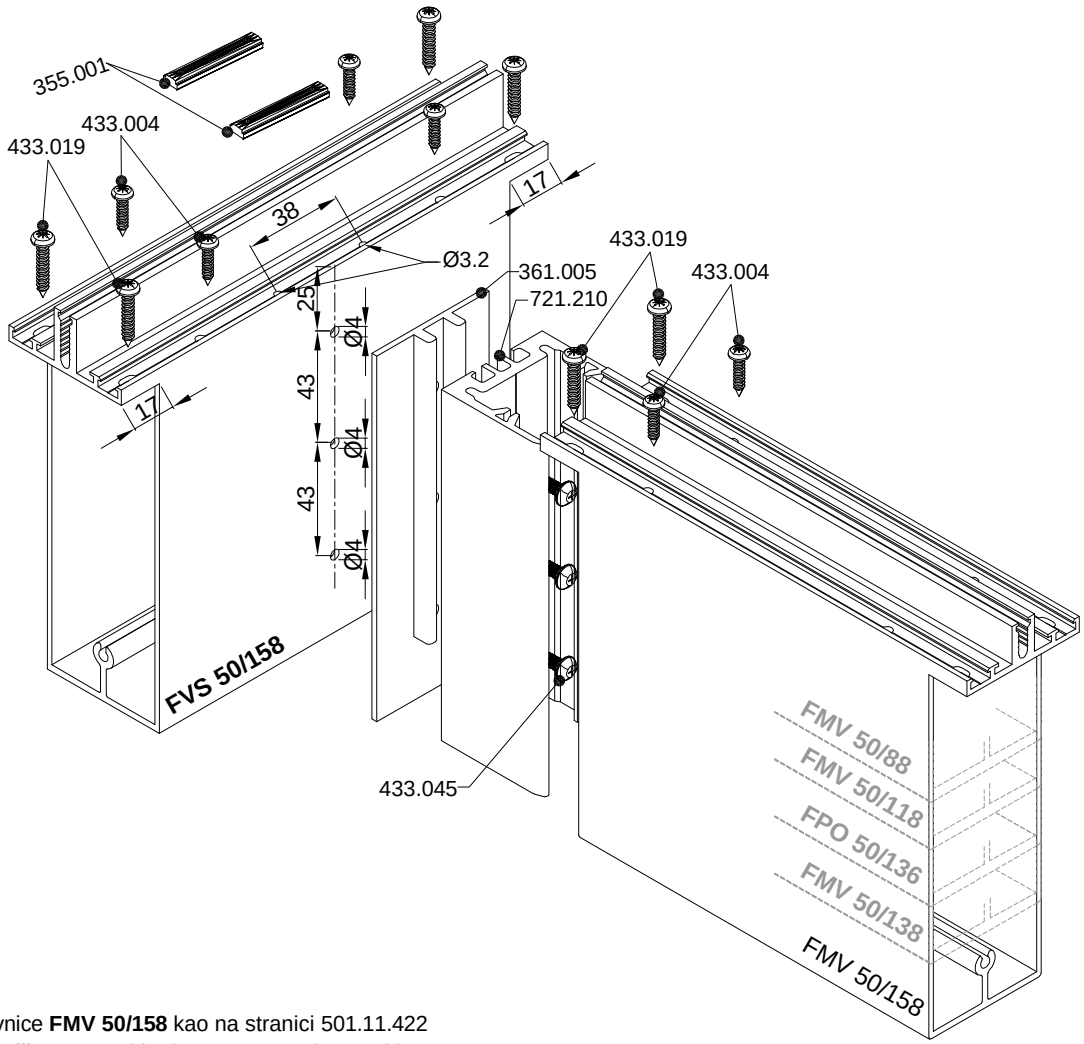


Obrada vodoravnice **FMV 50/158** kao na stranici 501.11.422
Processing of mullion FMV 50/158 as on page 501.11.422


- Obrada pomoćne vodoravnice **FVS 50/158** za okomicu **FMO 50/160** (ravni gumeni odstojnik) i vodoravnicu **FMV 50/158** (ravni gumeni odstojnik) treći nivo
- Processing of auxiliary transom FVS 50/158 for mullion FMO 50/160 (flat dilatation rubber) and transom FMV 50/158 (flat dilataion rubber) third level

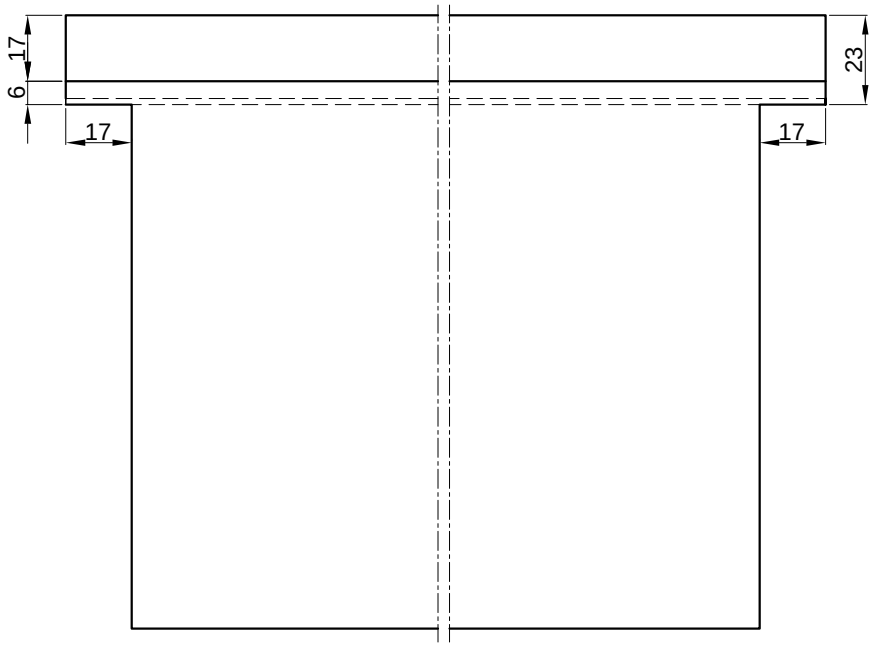

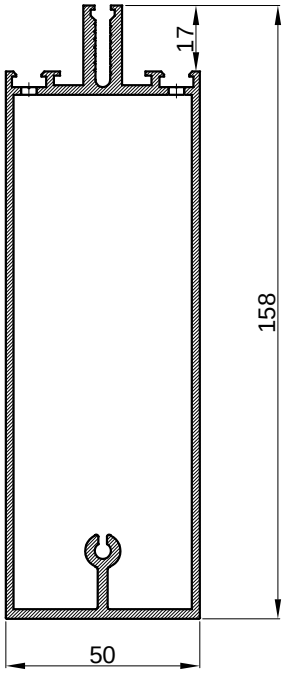


PRESJEK B-B
CROSS SECTION B-B

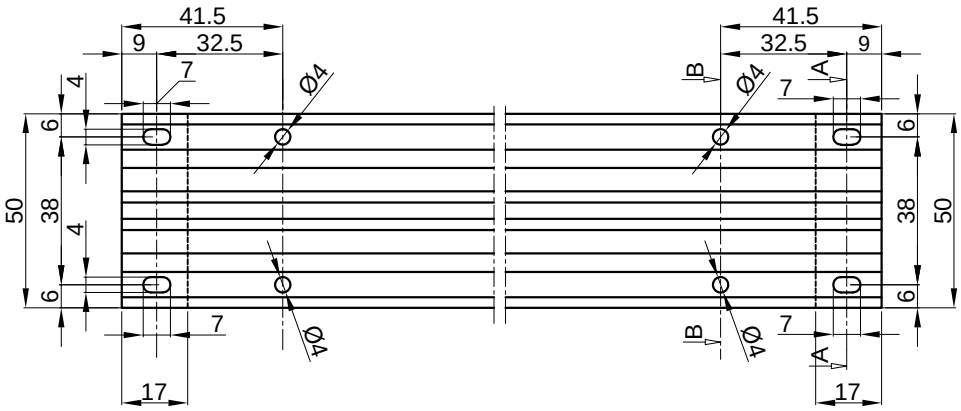





PRESJEK A-A
CROSS SECTION A-A

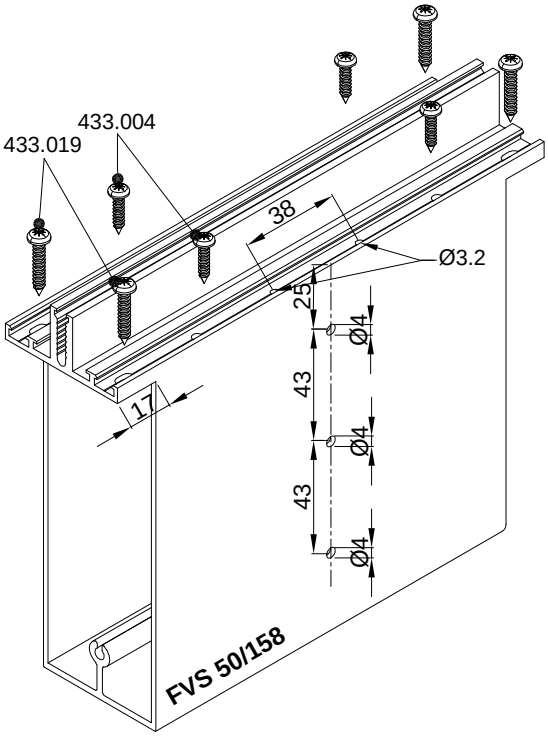



361.007
ravni gumeni odstojnik
za pom. vodoravnicu FVS 50/158
361.007
flat dilatation rubber
for aux. transom FVS 50/158




- Obrada okomice F**MO 50/120** za prihvat pomoćne vodoravnice **FVS 50/118** treći nivo fasade (ravni gumeni odstojnik)
- Processing of mullion FMO 50/120 for auxiliary transom FVS 50/118 third level (flat dilatation rubber)

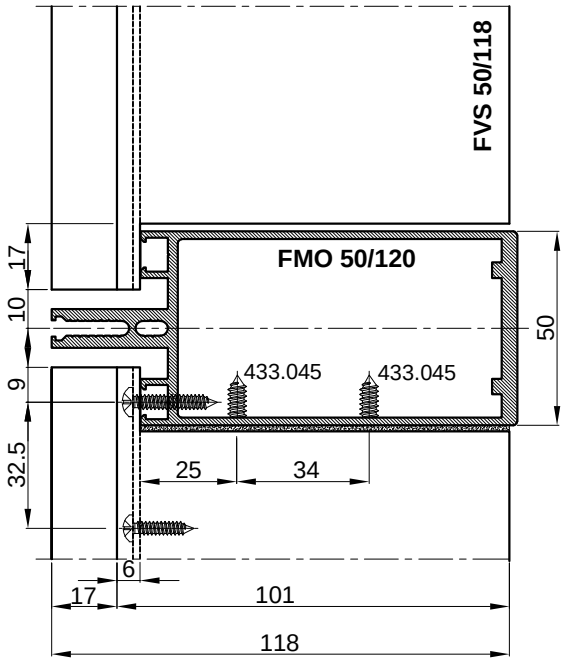


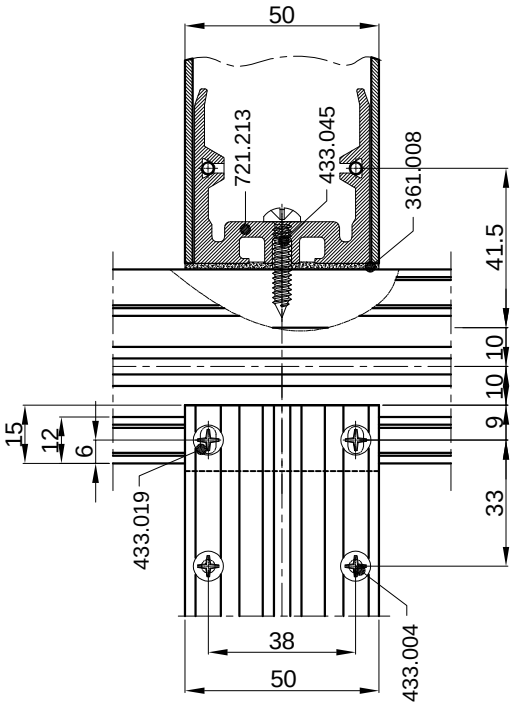

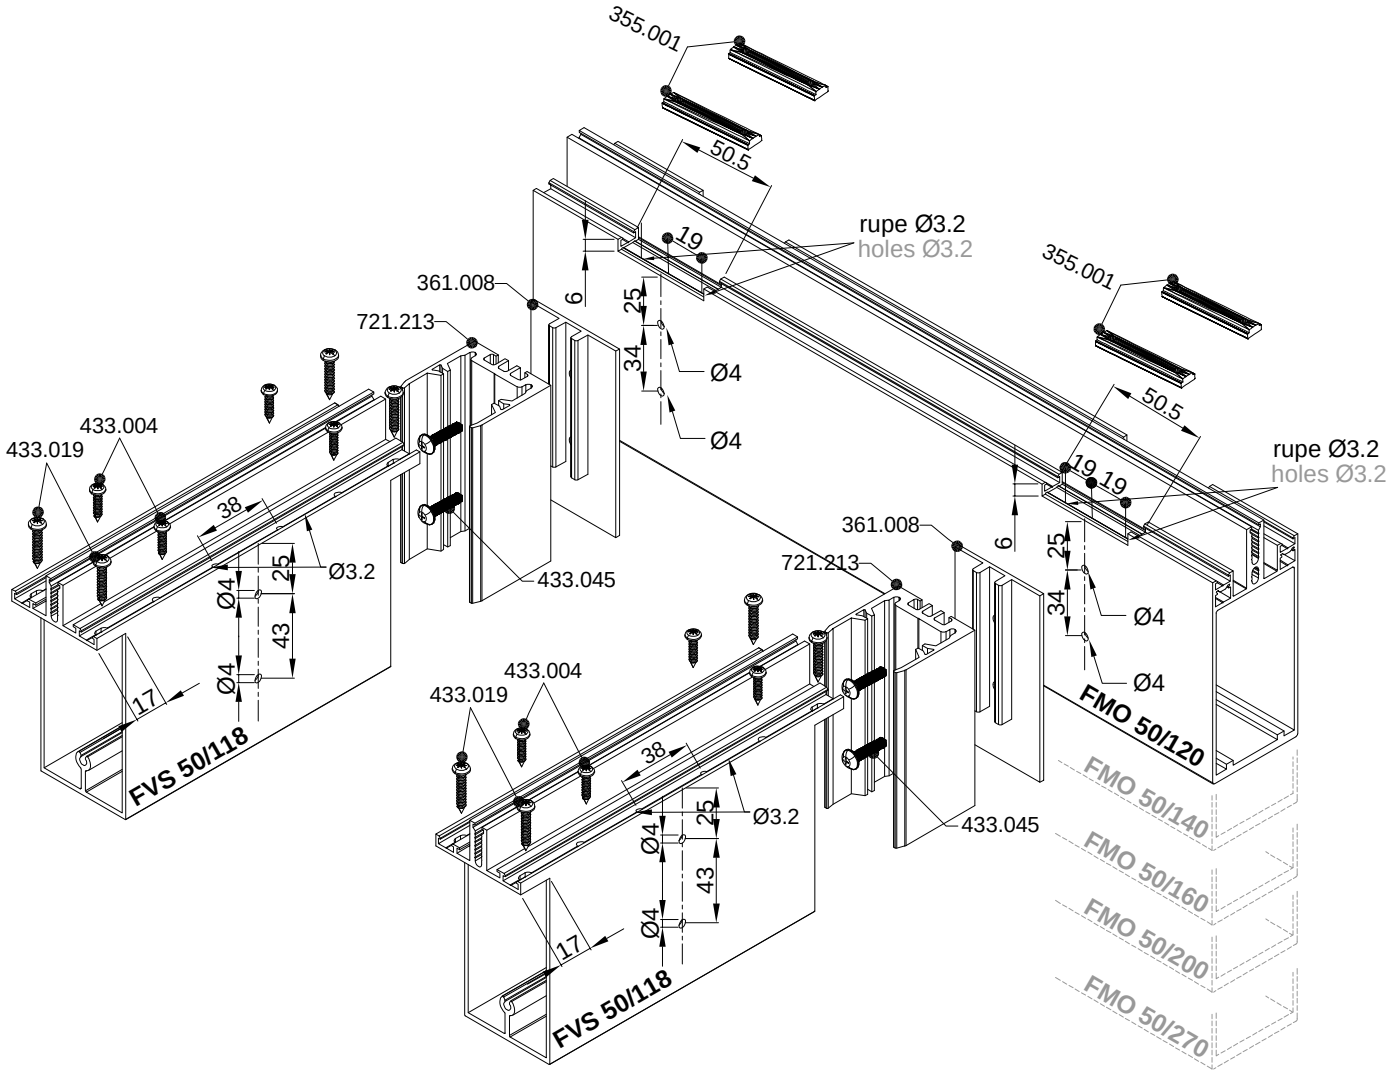


- Obrada pomoćne vodoravnice **FVS 50/118** za okomicu **FMO 50/120** (ravni gumeni odstojnik) i vodoravnicu **FMV 50/118** (ravni gumeni odstojnik) treći nivo
- Processing of auxiliary transom FVS 50/118 for mullion FMO 50/120 (flat dilatation rubber) and transom FMV 50/118 (flat dilataion rubber) third level

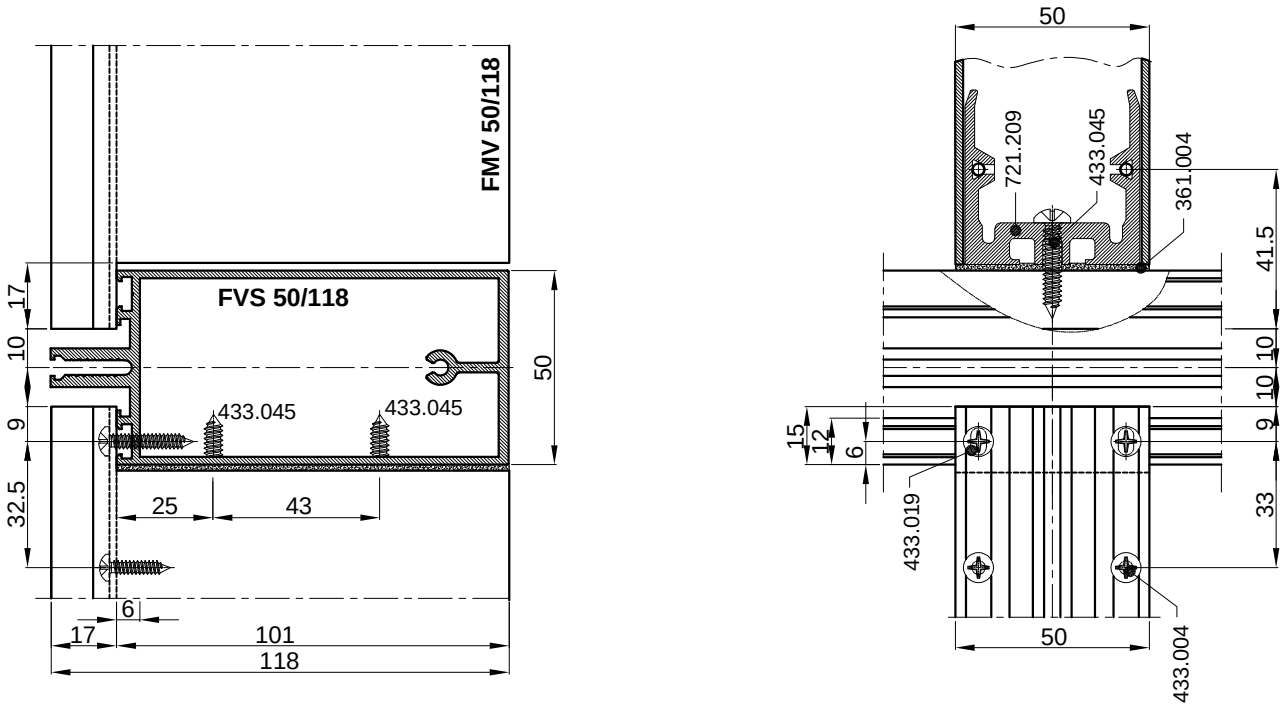


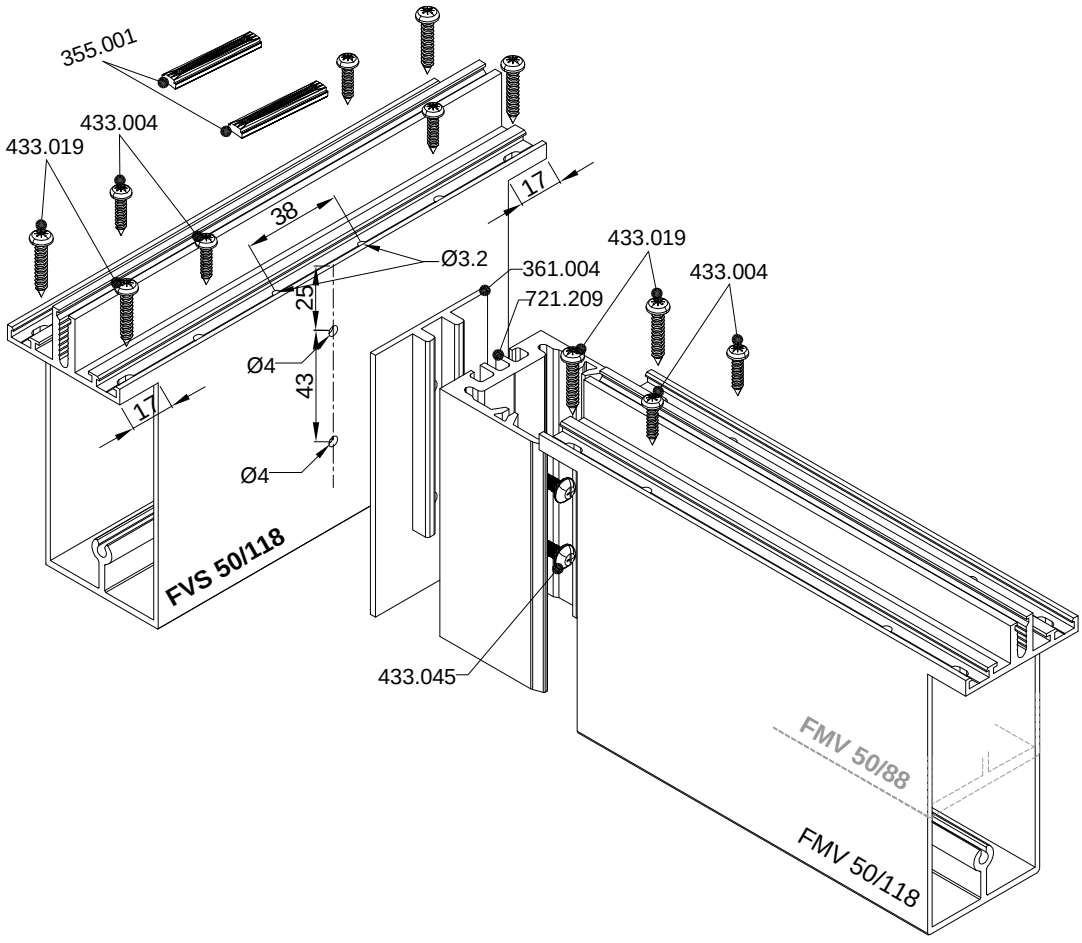


Obrada vodoravnice **FMV 50/118** kao na stranici 501.11.424
Processing of mullion FMV 50/118 as on page 501.11.424


- Obrada pomoćne vodoravnice **FVS 50/118** za okomicu **FMO 50/120** (ravni gumeni odstojnik) i vodoravnicu **FMV 50/118** (ravni gumeni odstojnik) treći nivo
- Processing of auxiliary transom FVS 50/118 for mullion FMO 50/120 (flat dilatation rubber) and transom FMV 50/118 (flat dilataion rubber) third level

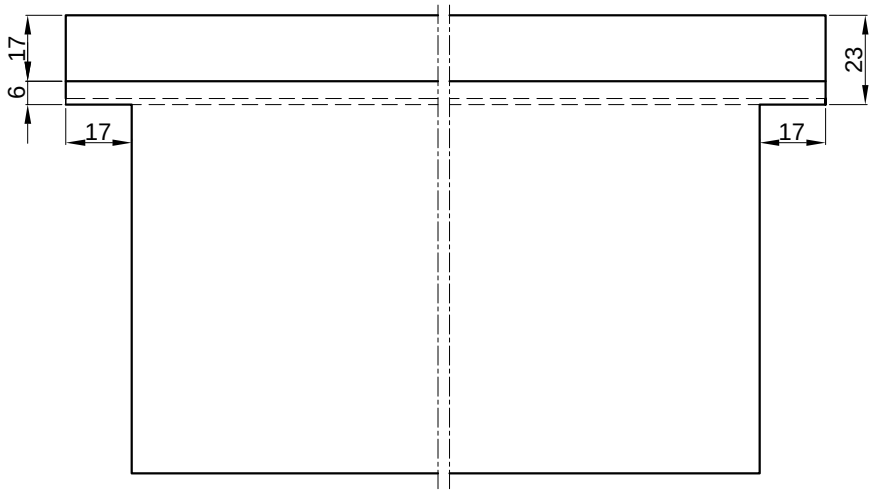

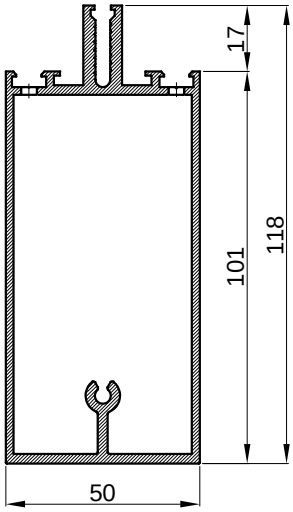


PRESJEK B-B
CROSS SECTION B-B

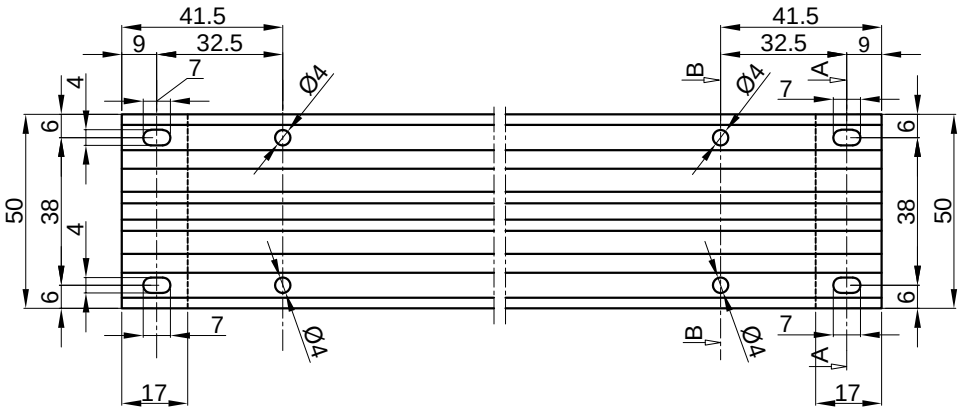





PRESJEK A-A
CROSS SECTION A-A

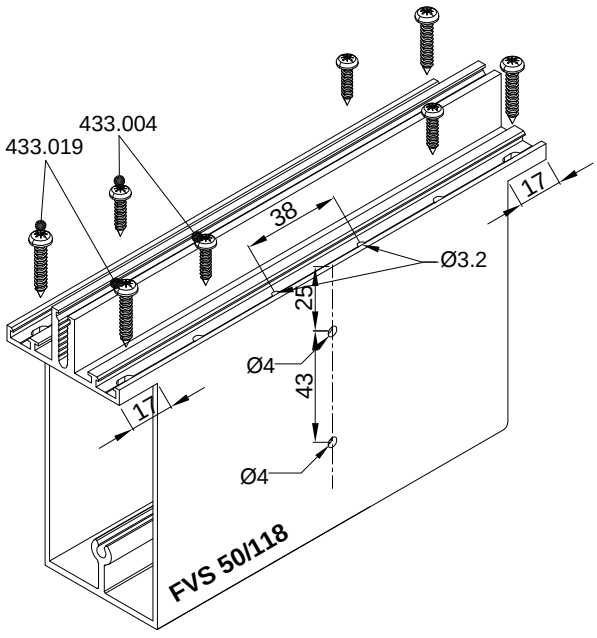



361.008
ravni gumeni odstojnik
za pom. vodoravnicu FVS 50/118
361.008
flat dilatation rubber
for aux. transom FVS 50/118




- Obrada okomice F**MO 50/90** za prihvat pomoćne vodoravnice **FVS 50/88** treći nivo fasade (ravni gumeni odstojnik)
- Processing of mullion FMO 50/90 for auxiliary transom FVS 50/88 third level (flat dilatation rubber)

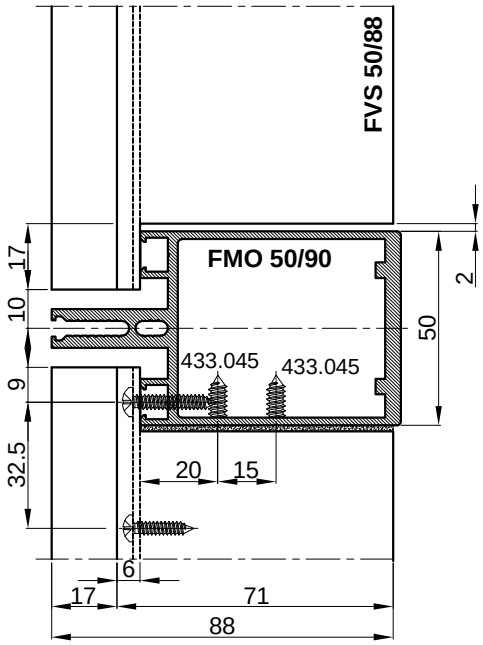


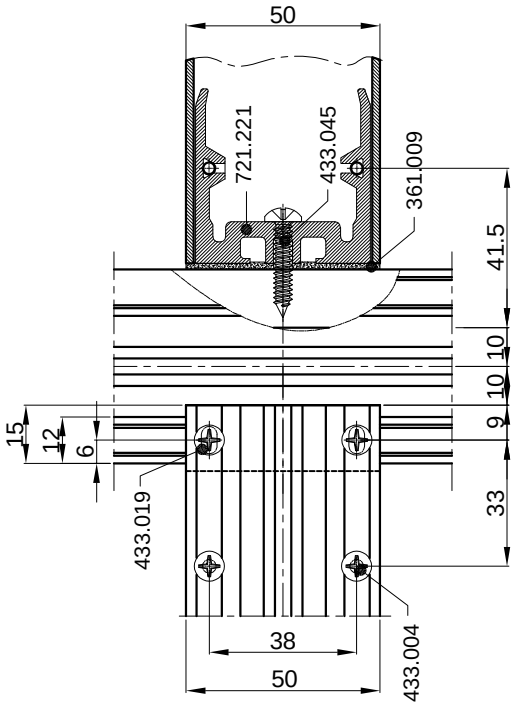

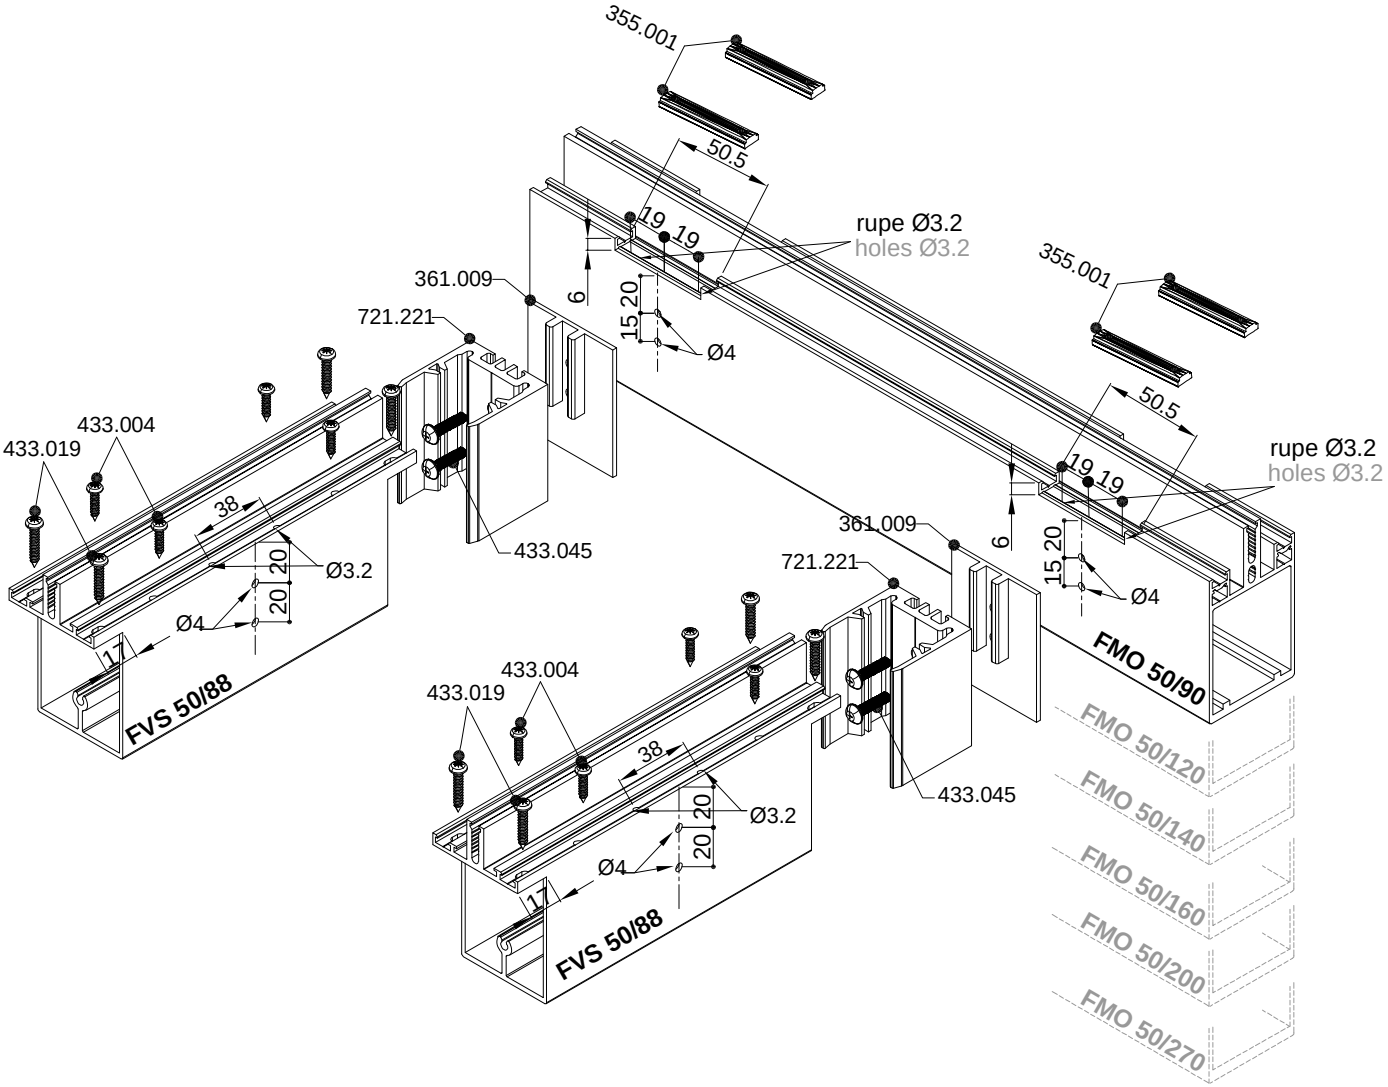


- Obrada pomoćne vodoravnice **FVS 50/88** za okomicu **FMO 50/90** (ravni gumeni odstojnik) i vodoravnicu **FMV 50/88** (ravni gumeni odstojnik) treći nivo
- Processing of auxiliary transom FVS 50/88 for mullion FMO 50/90 (flat dilatation rubber) and transom FMV 50/88 (flat dilataion rubber) third level

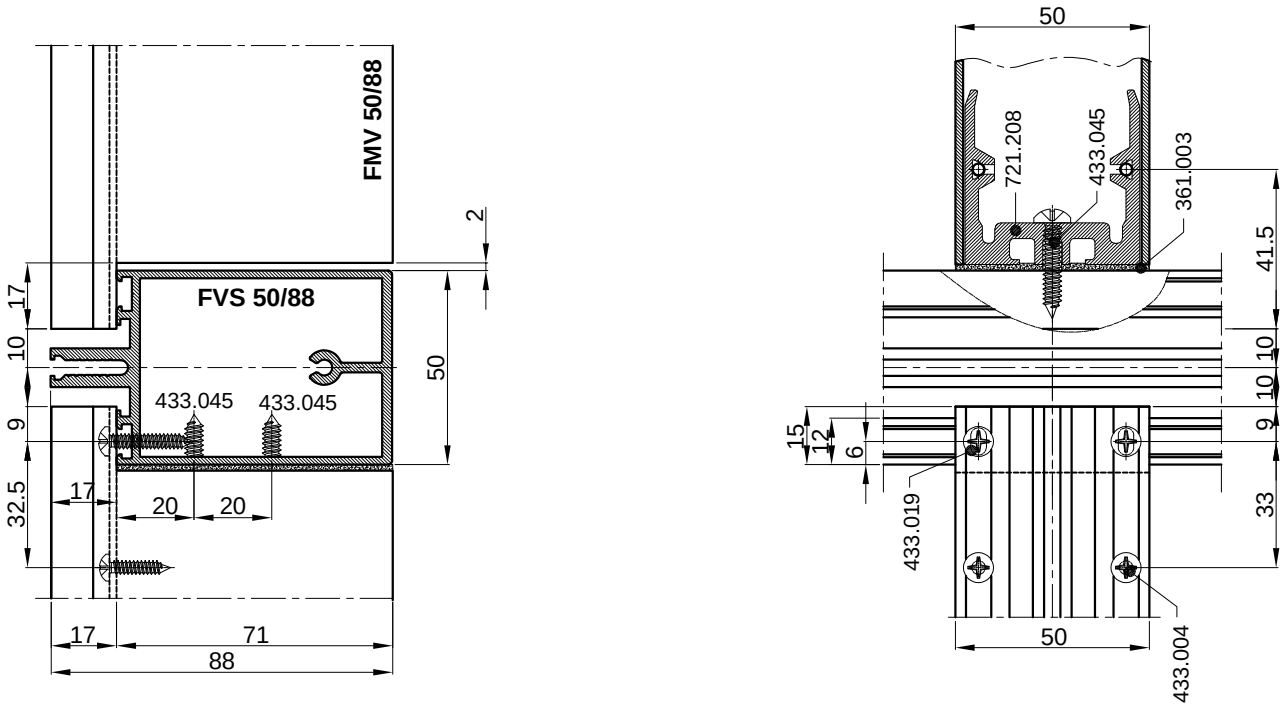


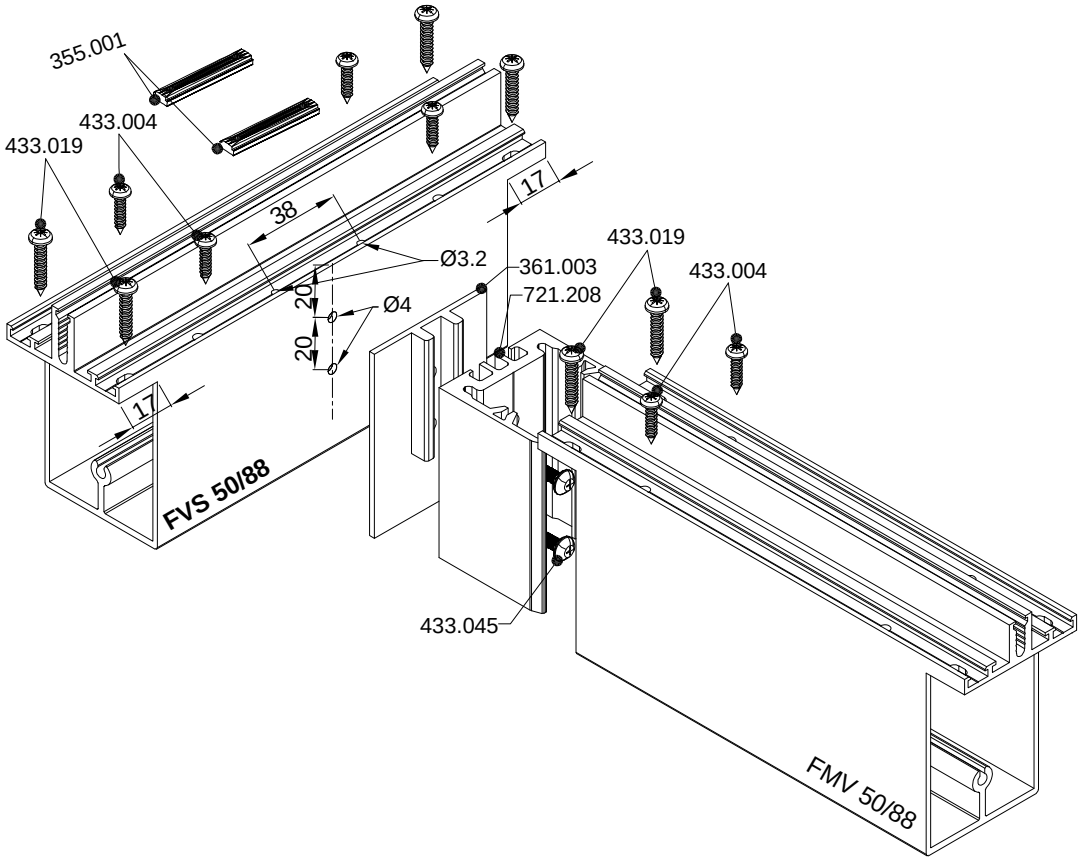


Obrada vodoravnice **FMV 50/88** kao na stranici 501.11.425
Processing of mullion FMV 50/88 as on page 501.11.425


- Obrada pomoćne vodoravnice **FVS 50/88** za okomicu **FMO 50/90** (ravni gumeni odstojnik) i vodoravnicu **FMV 50/88** (ravni gumeni odstojnik) treći nivo
- Processing of auxiliary transom FVS 50/88 for mullion FMO 50/90 (flat dilatation rubber) and transom FMV 50/88 (flat dilataion rubber) third level

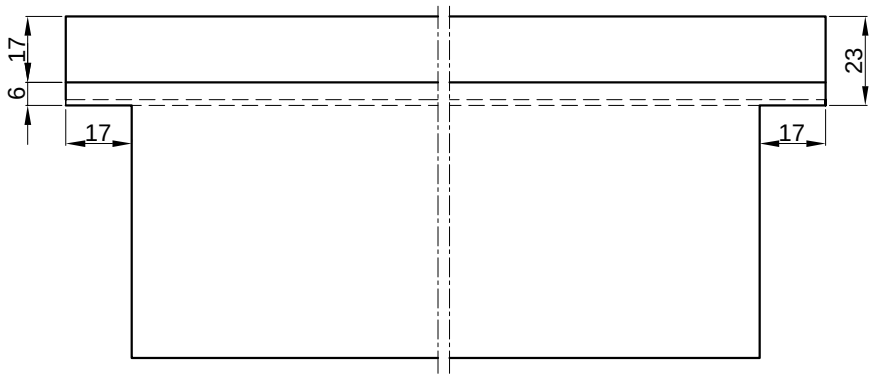

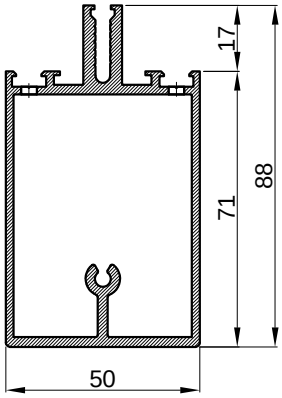


PRESJEK B-B
CROSS SECTION B-B

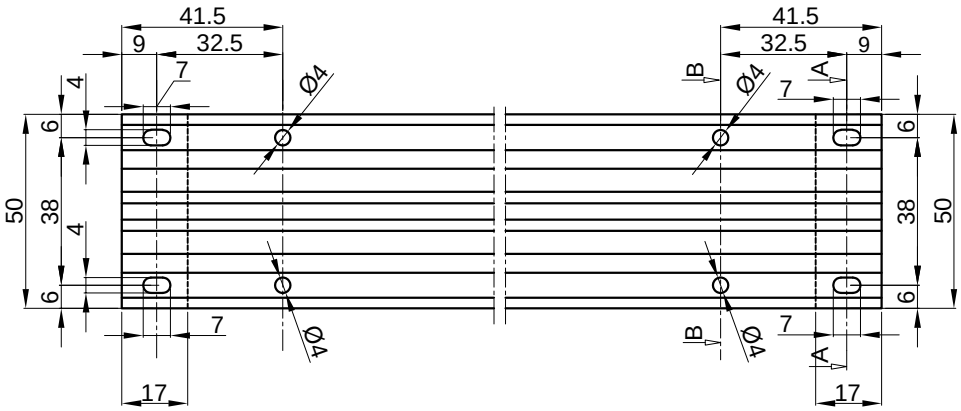




PRESJEK A-A
CROSS SECTION A-A

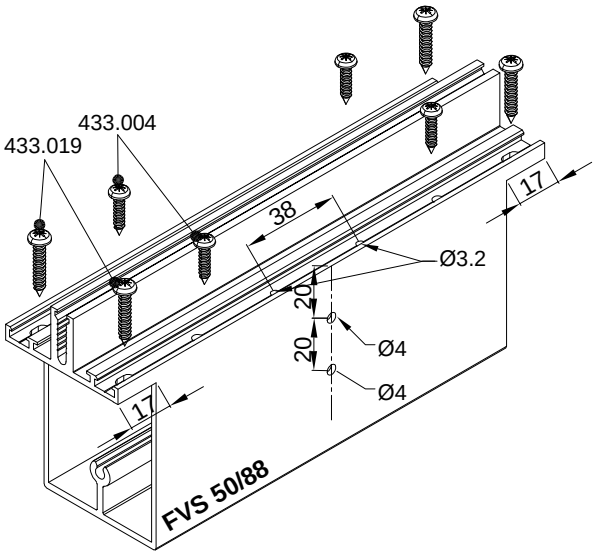


361.009
ravni gumeni odstojnik
za pom. vodoravnicu FVS 50/888

361.009
flat dilatation rubber
for aux. transom FVS 50/88




- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

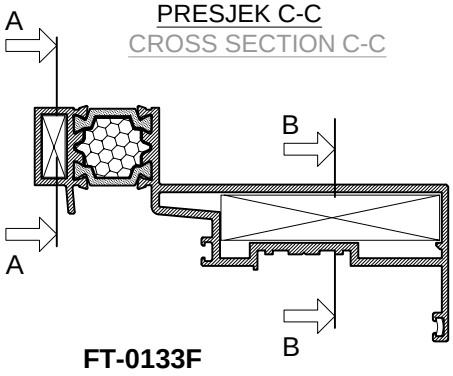


FT-0133F

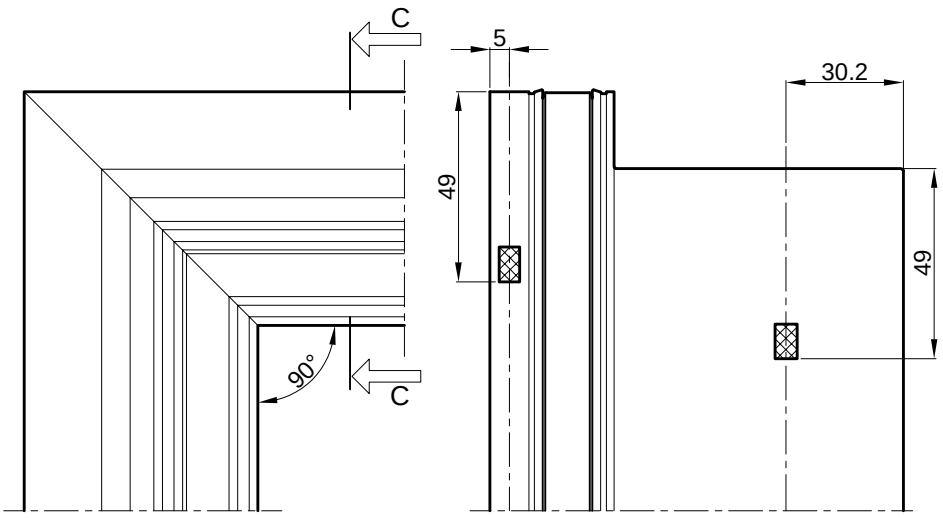


PRESJEK A-A
CROSS SECTION A-A


725.027
(l=6,3mm)

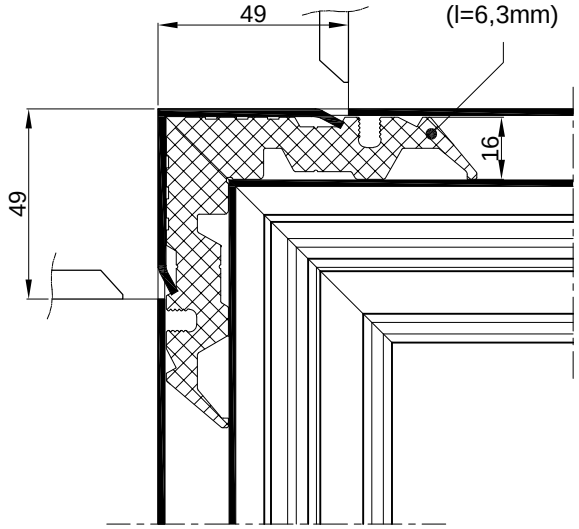

PRESJEK B-B
CROSS SECTION B-B

725.122
(l=56.3 mm)

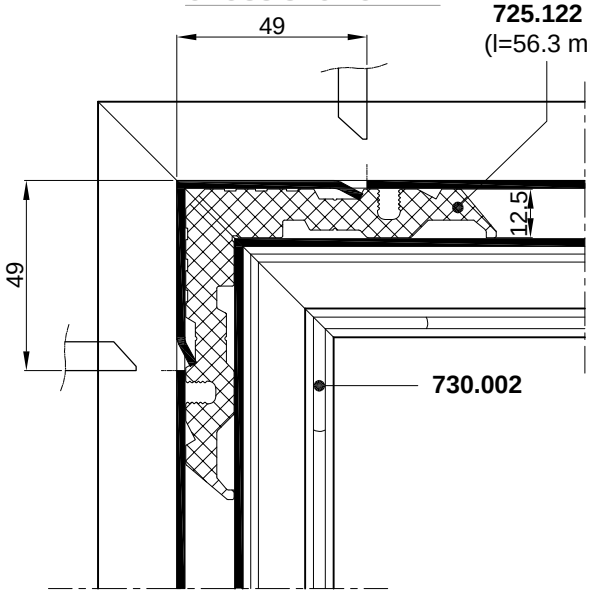

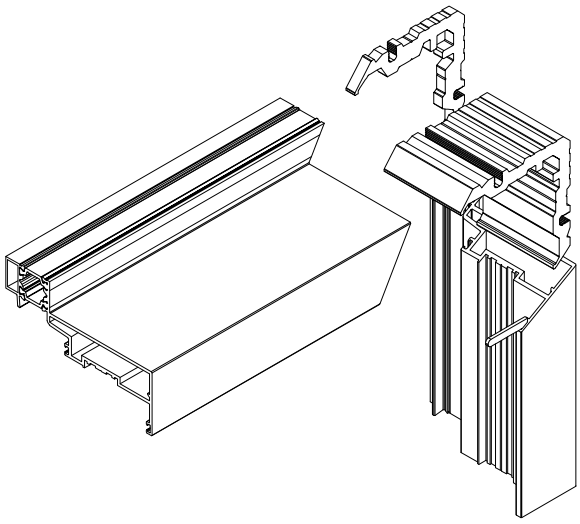


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

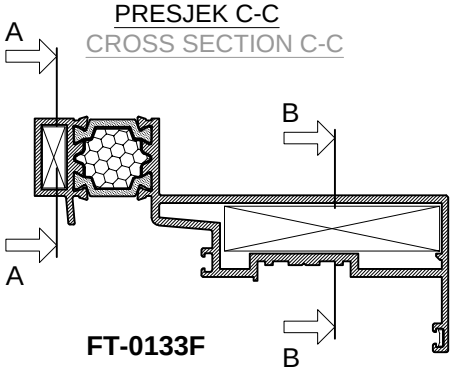


FT-0133F

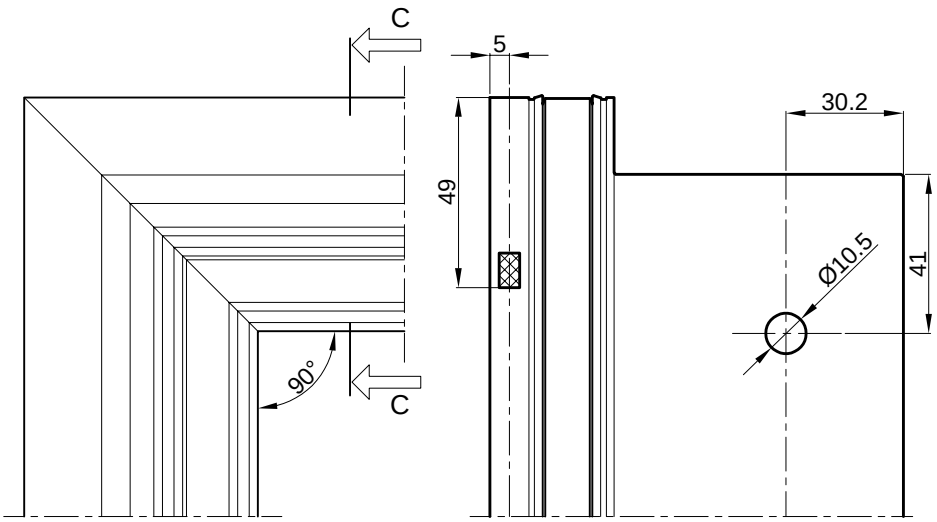


PRESJEK A-A
CROSS SECTION A-A


725.027
(l=6,3mm)

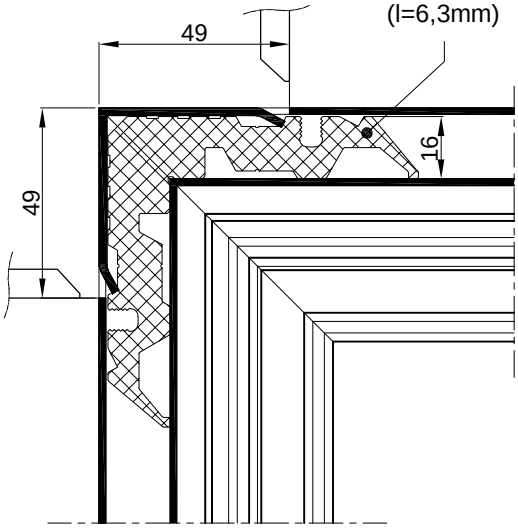

PRESJEK B-B
CROSS SECTION B-B

725.123
(l=56.3 mm)

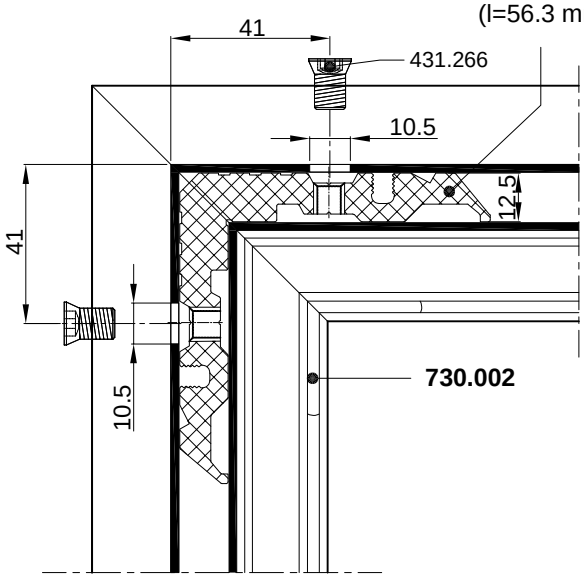

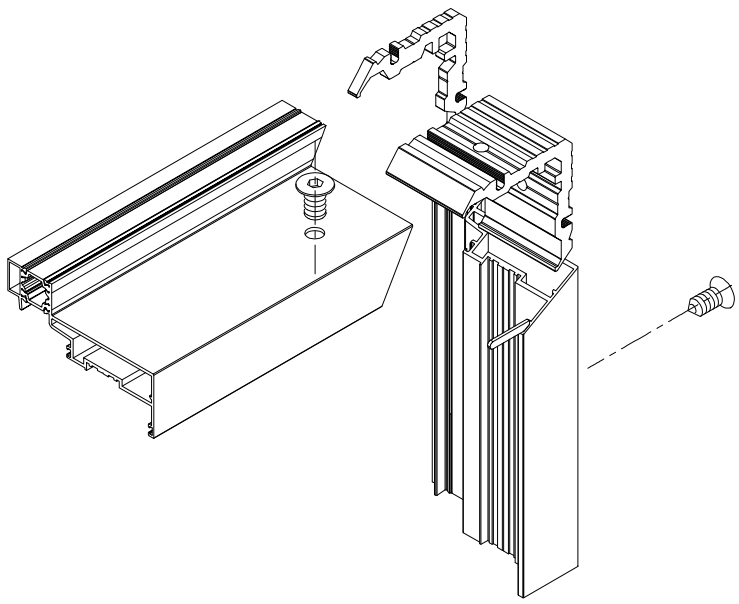


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

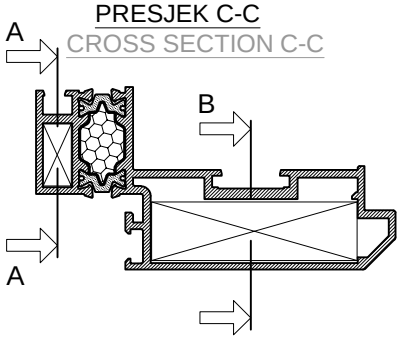


FT-0134F

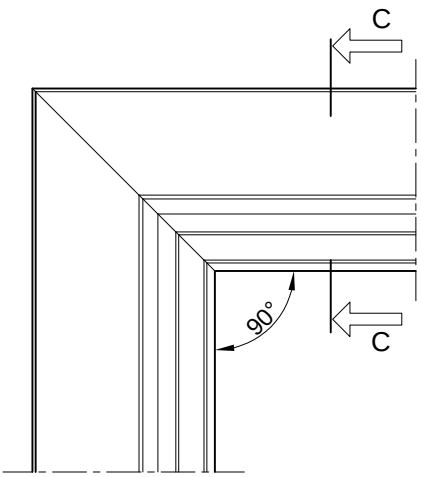

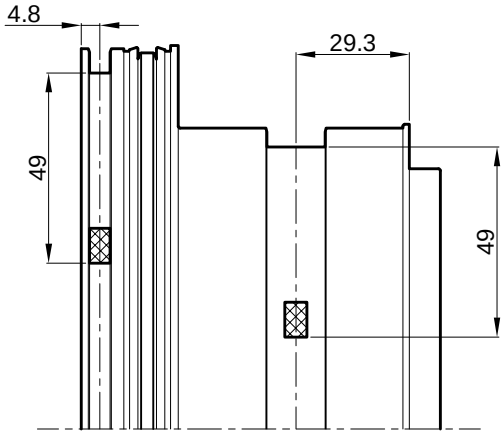


PRESJEK A-A
CROSS SECTION A-A


725.028
(l=7,3mm)

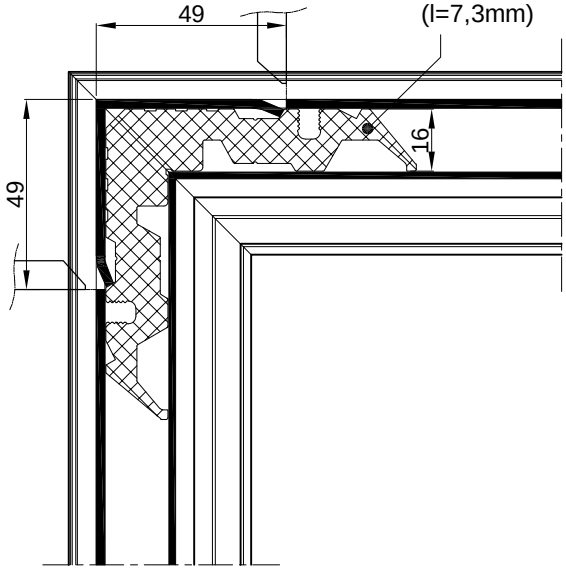

PRESJEK B-B
CROSS SECTION B-B

725.025
(l=53mm)

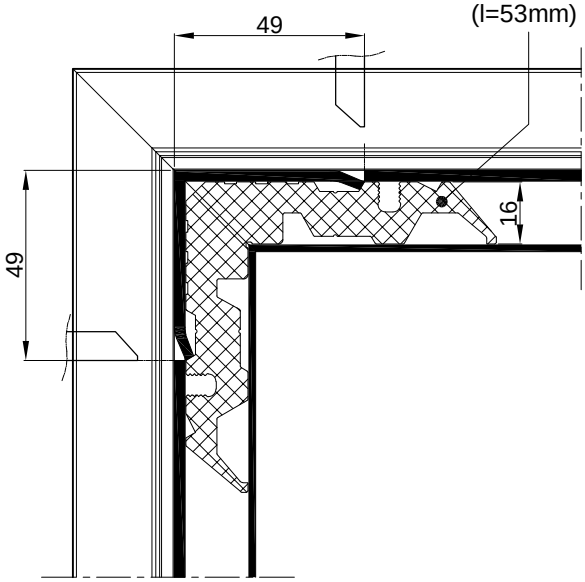

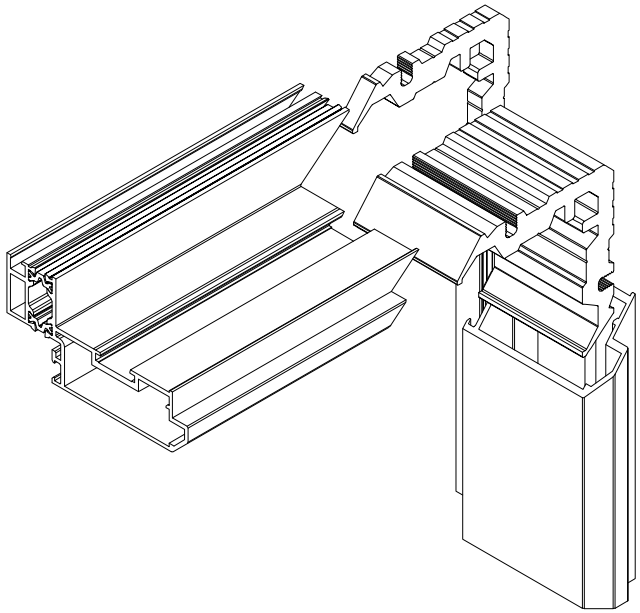


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

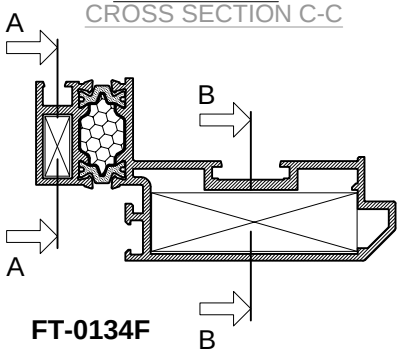


FT-0134F

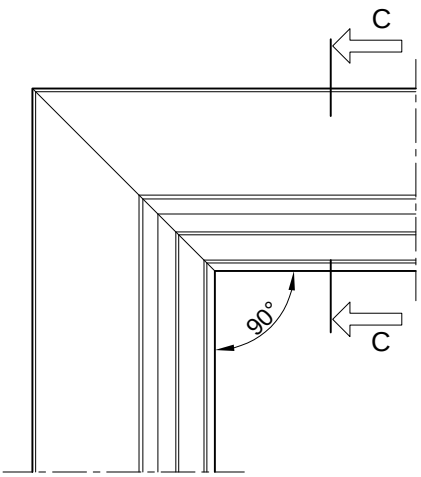

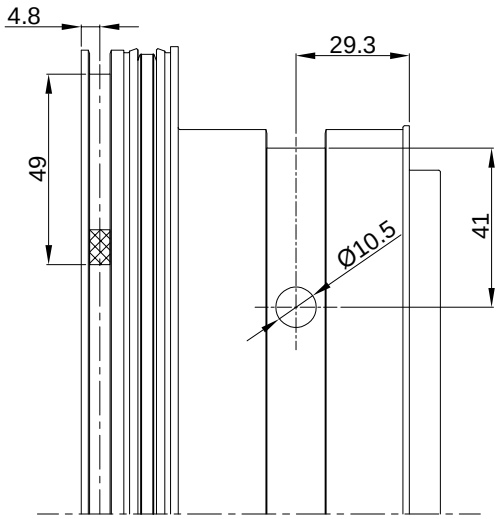


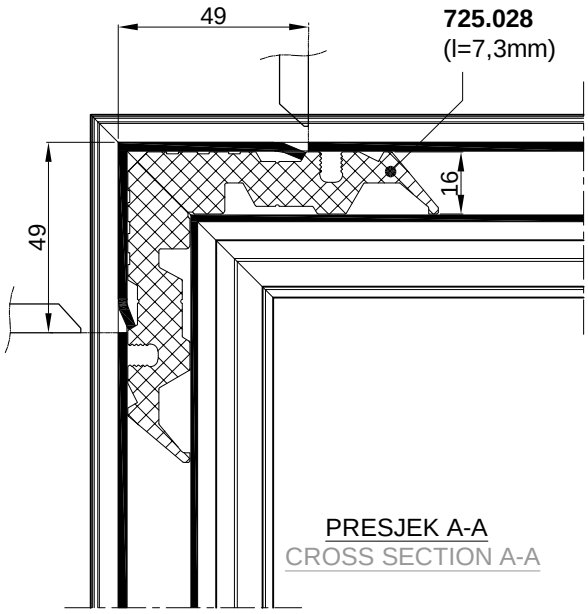

PRESJEK A-A
CROSS SECTION A-A

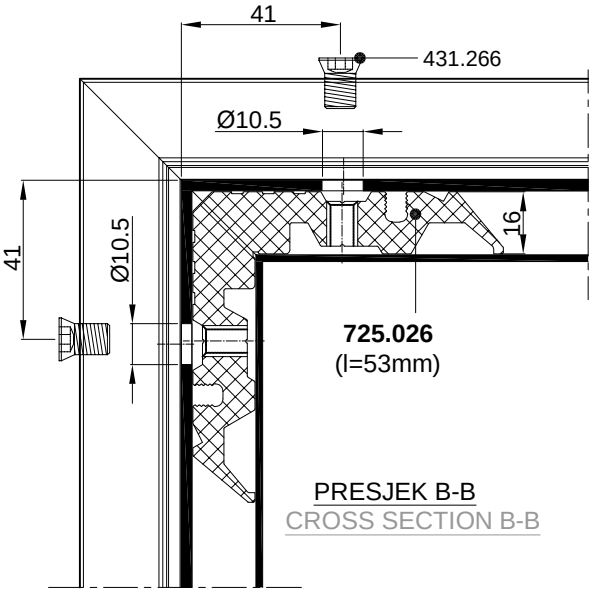


PRESJEK B-B
CROSS SECTION B-B

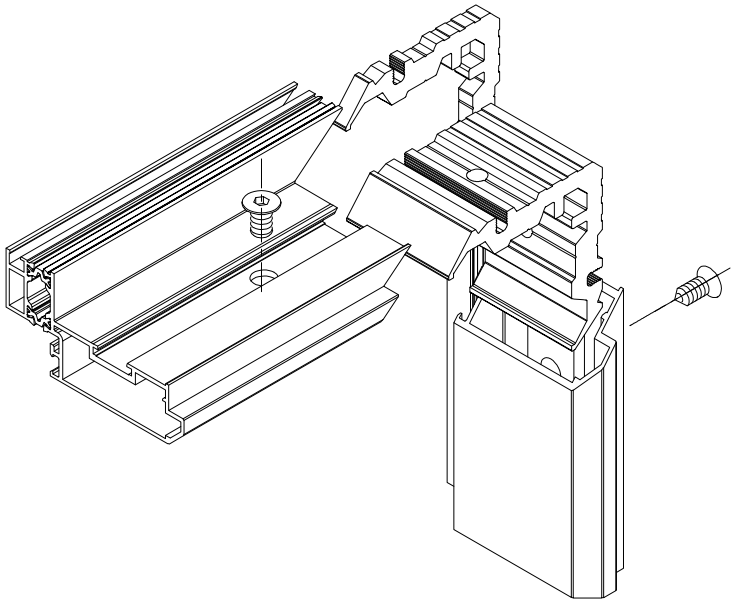


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C




FT-0157F

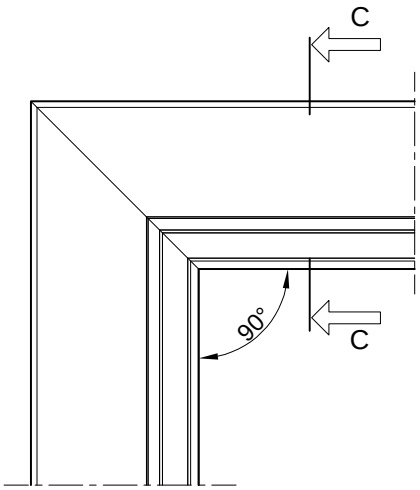

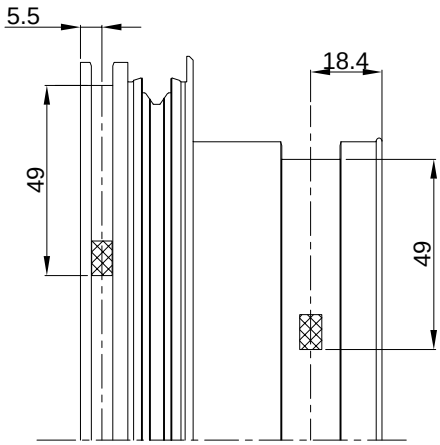


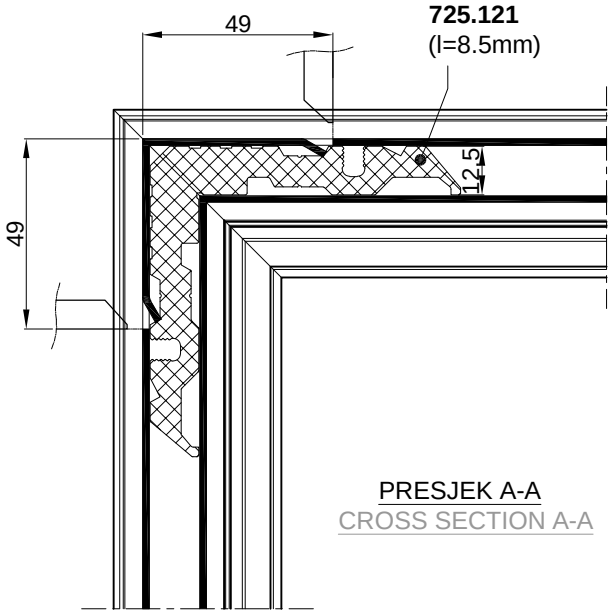

PRESJEK A-A
CROSS SECTION A-A

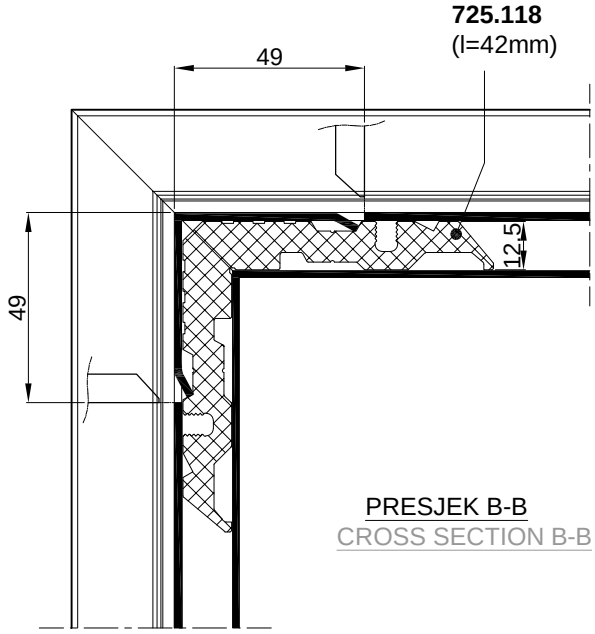


PRESJEK B-B
CROSS SECTION B-B

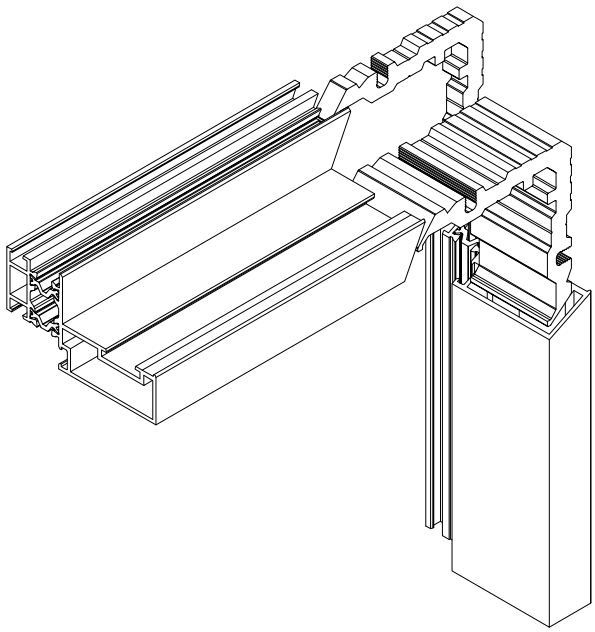


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

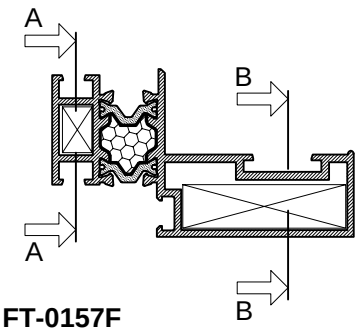

FT-0157F

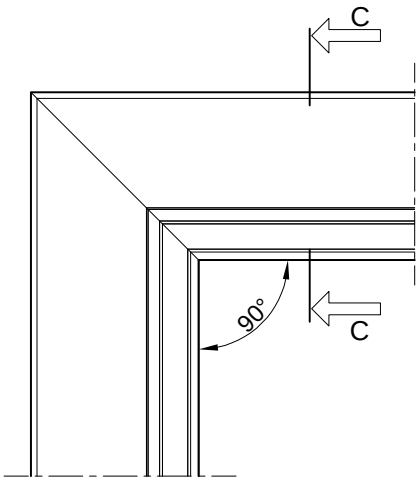


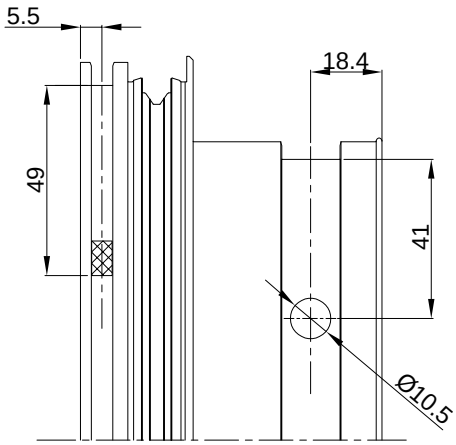

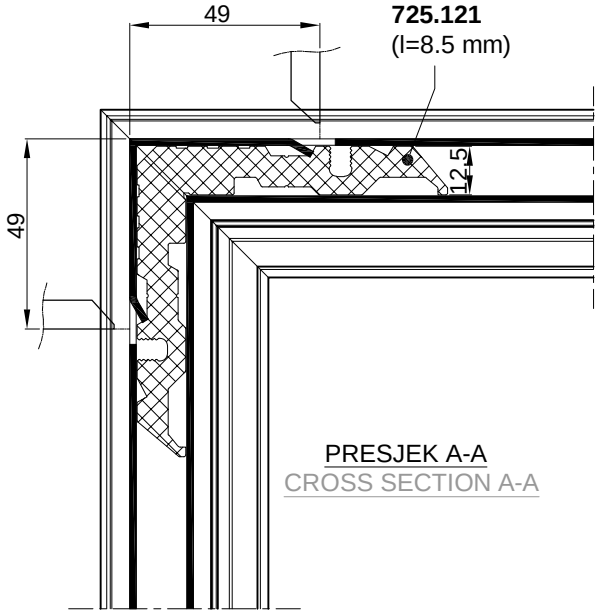


725.121
(l=8.5 mm)

PRESJEK A-A
CROSS SECTION A-A

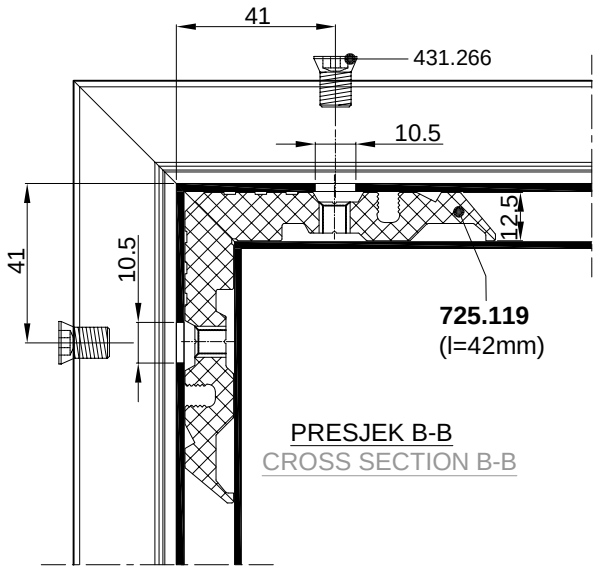

725.119
(l=42mm)


PRESJEK B-B
CROSS SECTION B-B

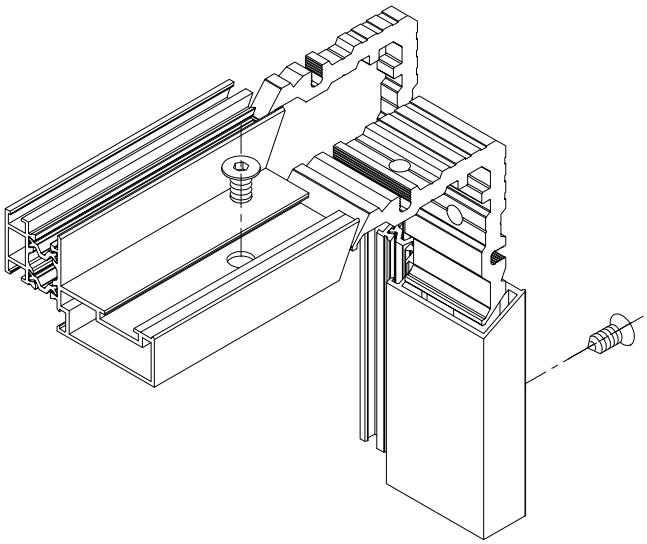


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

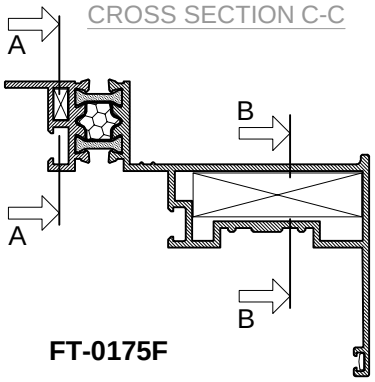


FT-0175F

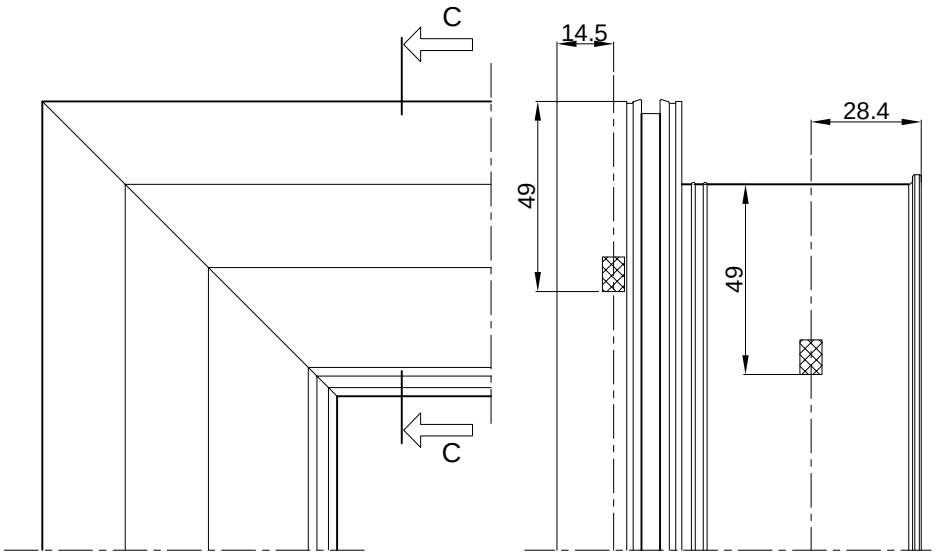


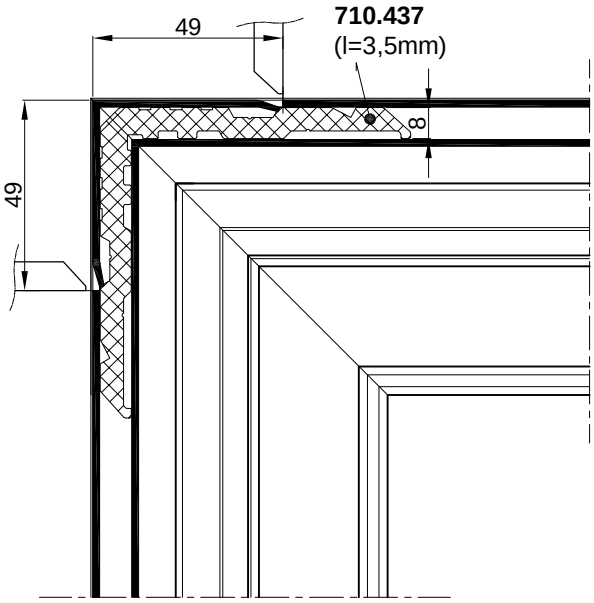

PRESJEK A-A
CROSS SECTION A-A

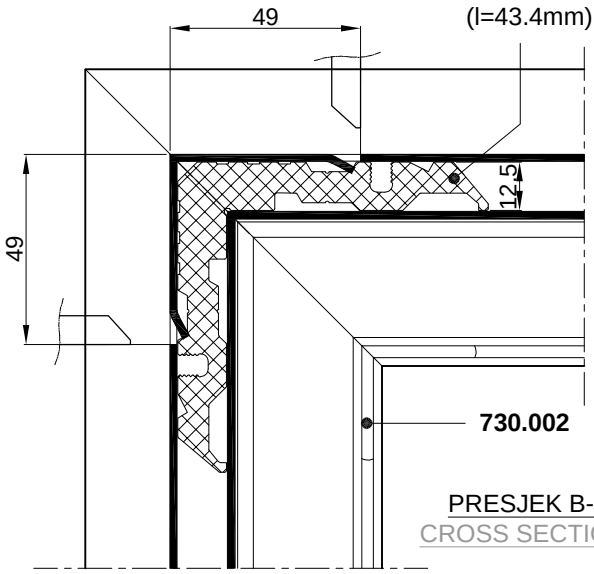


PRESJEK B-B
CROSS SECTION B-B

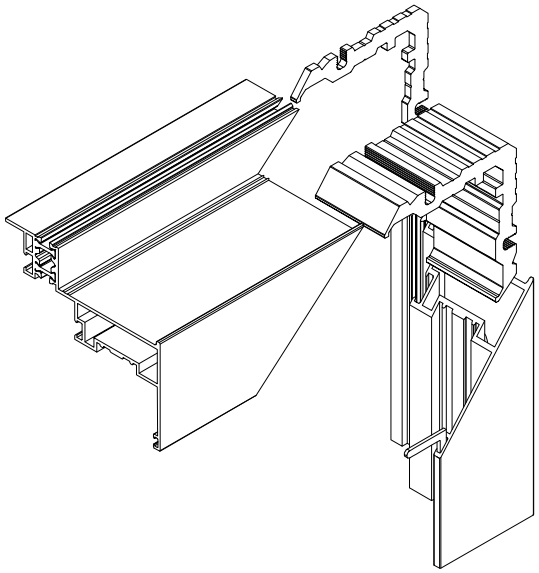



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

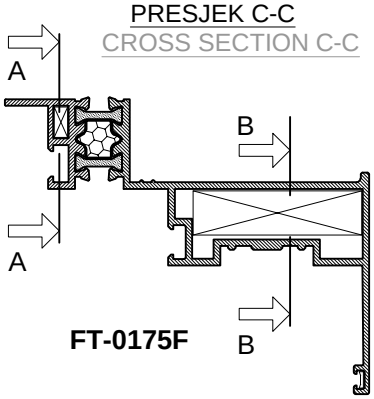


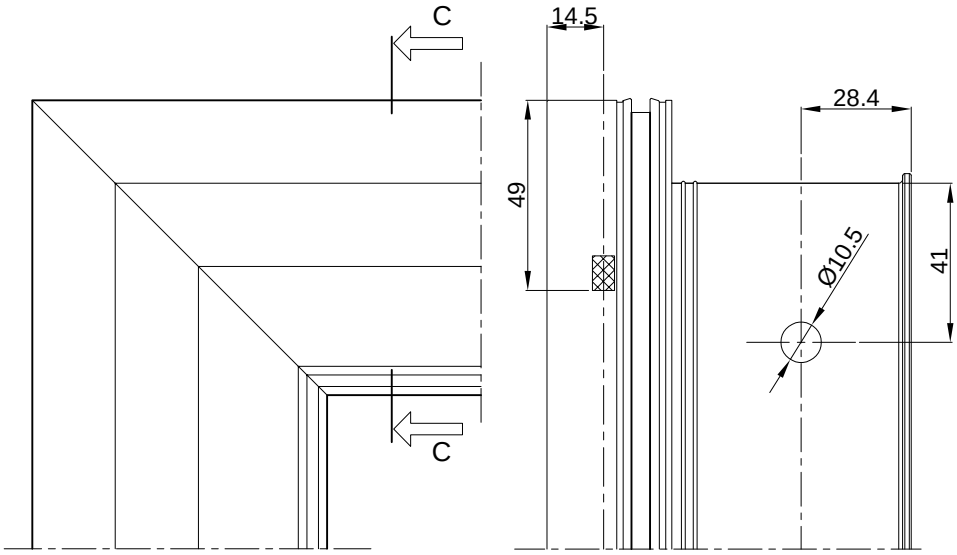


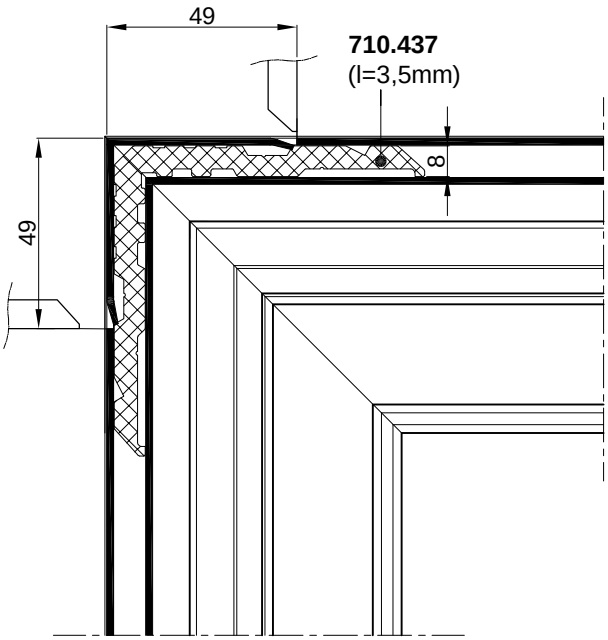

PRESJEK A-A
CROSS SECTION A-A

PRESJEK B-B
CROSS SECTION B-B

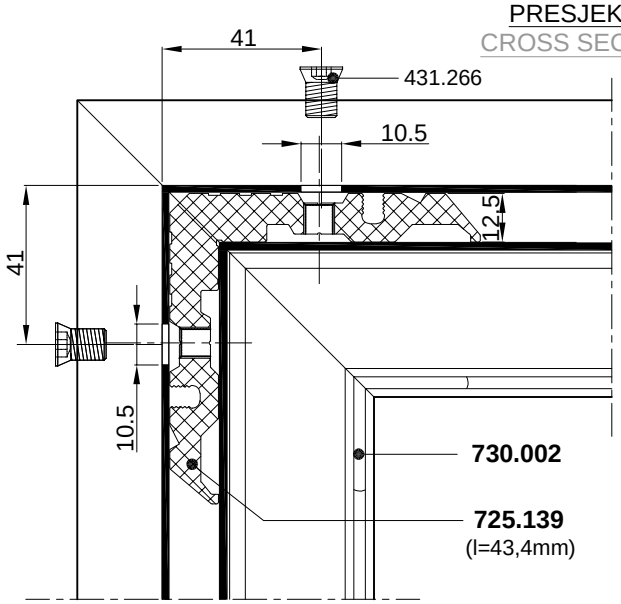

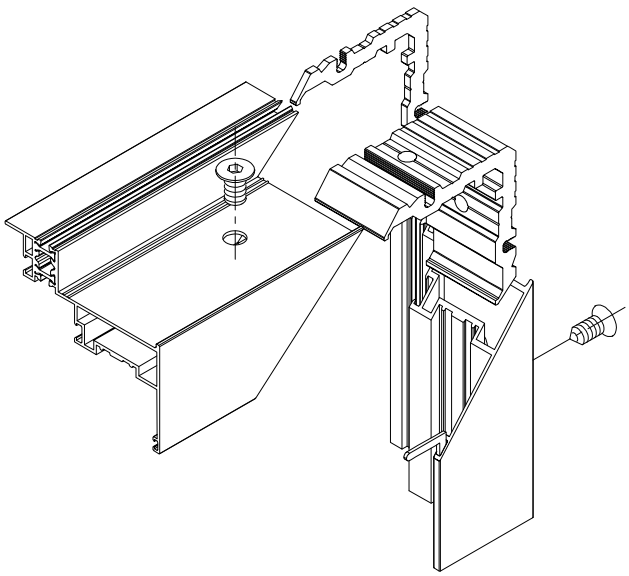


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C





FT-0162F

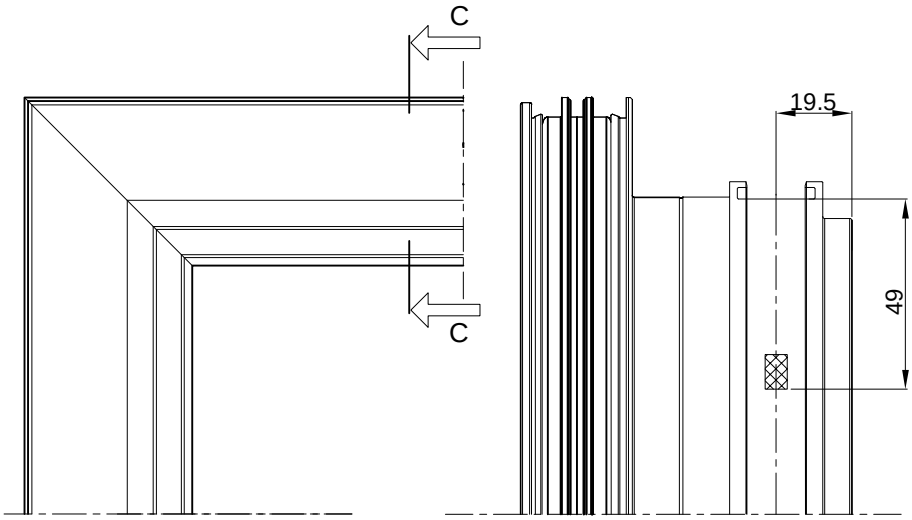

PRESJEK A-A
CROSS SECTION A-A

725.118
(l=42mm)

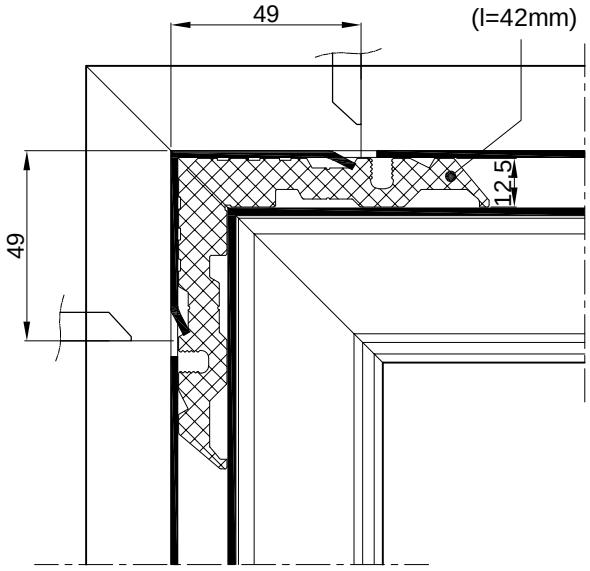

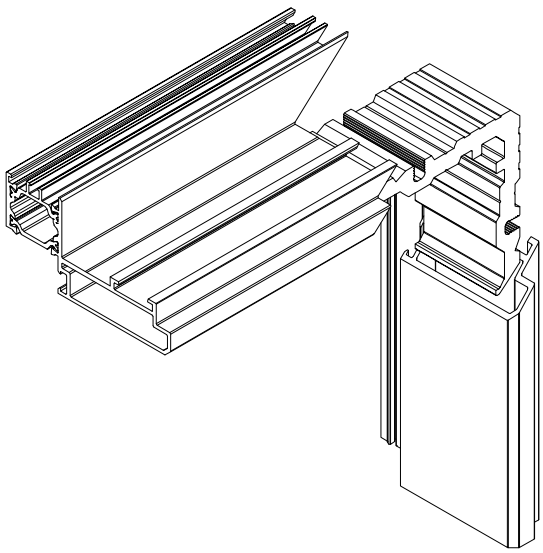


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION

PRESJEK C-C
CROSS SECTION C-C

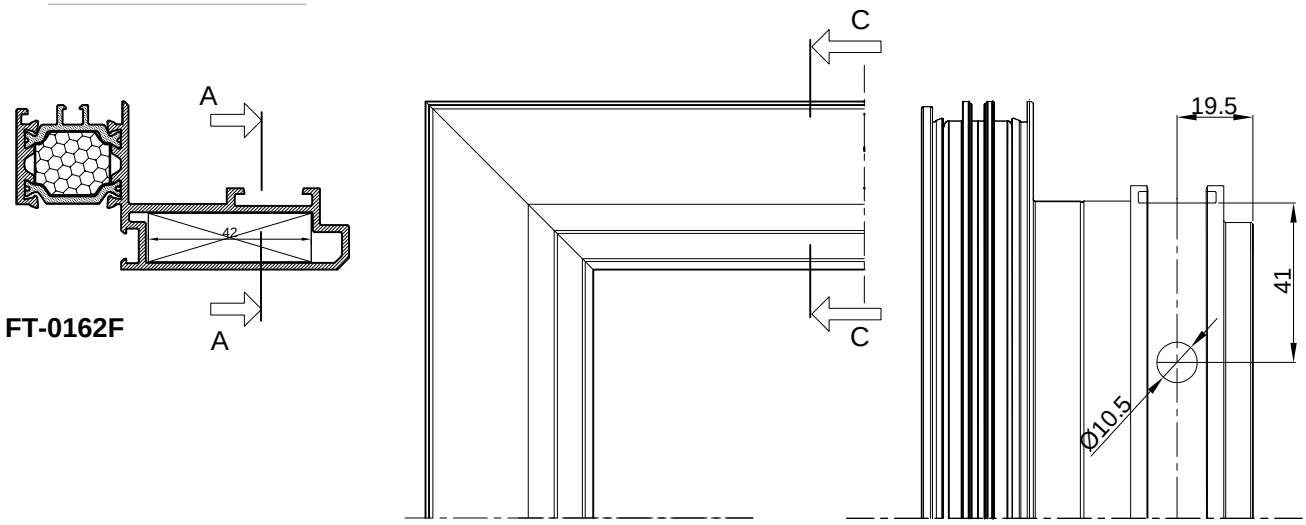

PRESJEK A-A
CROSS SECTION A-A

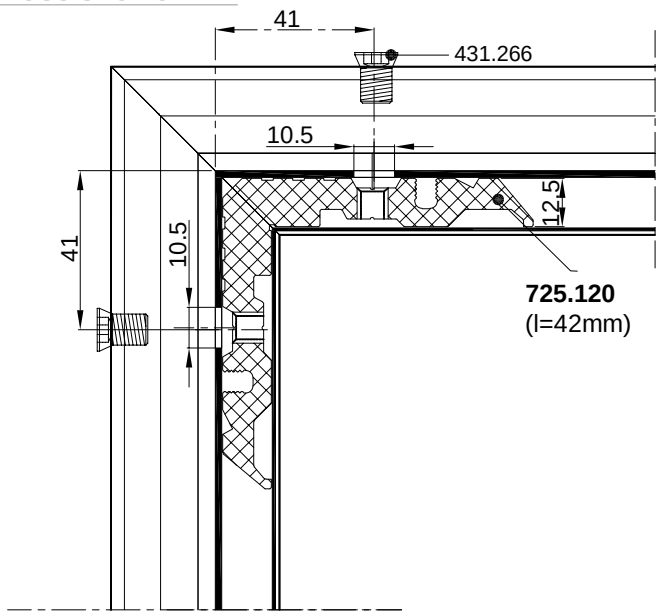


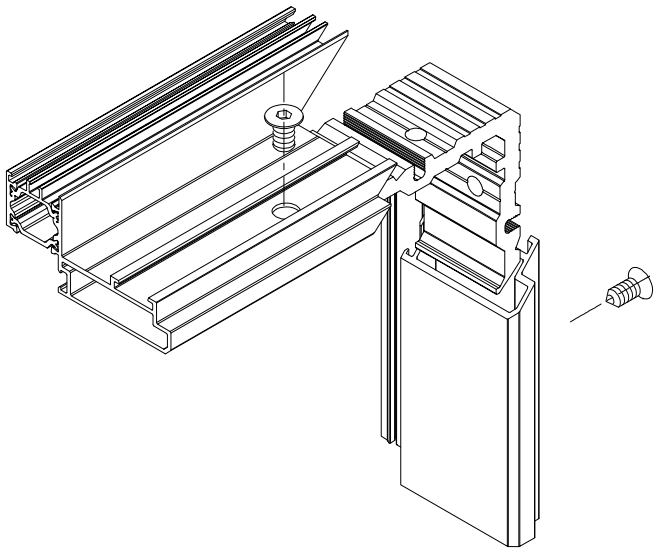


1. VIJČANA VEZA
1. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

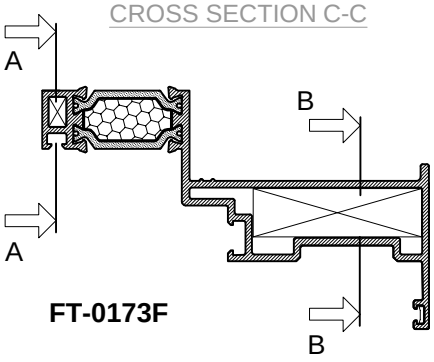


FT-0173F

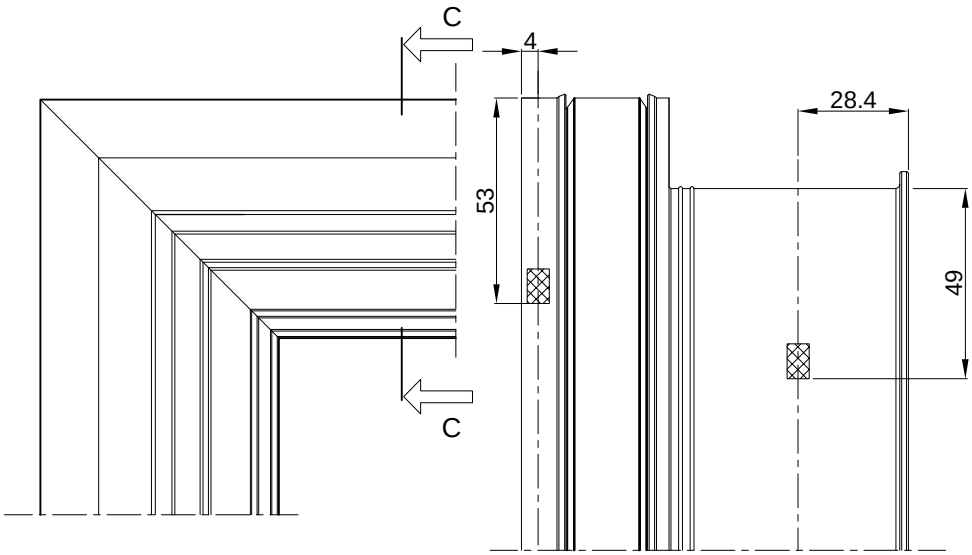


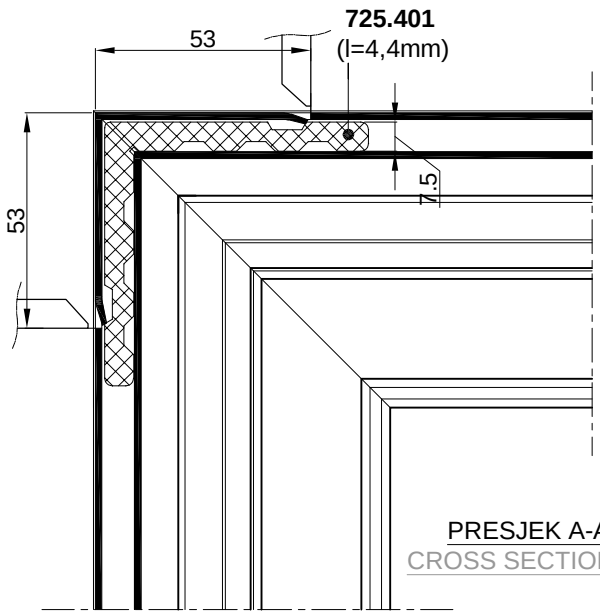

PRESJEK A-A
CROSS SECTION A-A

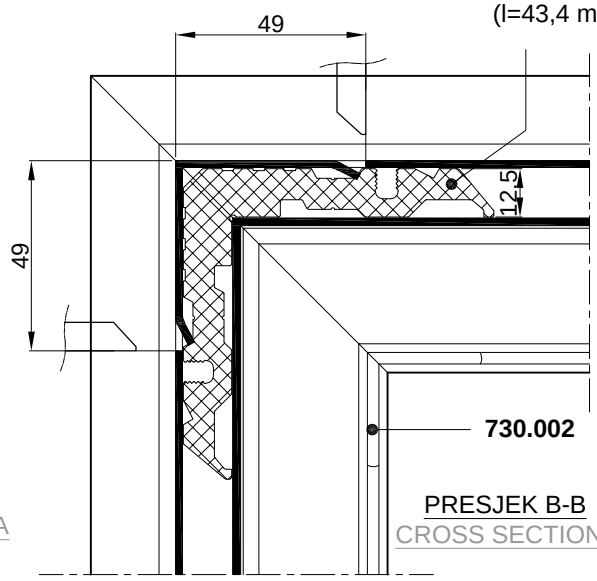

PRESJEK B-B
CROSS SECTION B-B

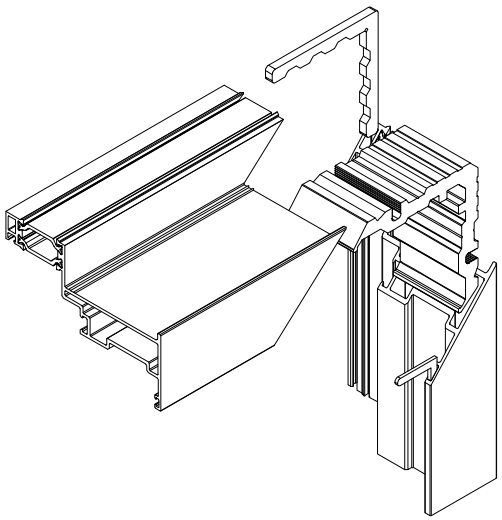


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

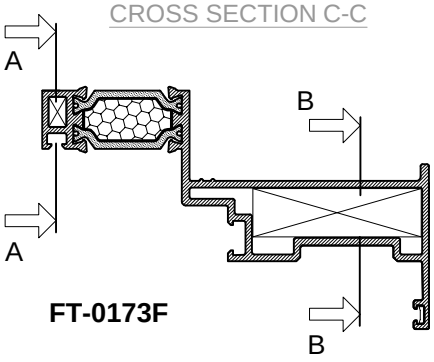


FT-0173F

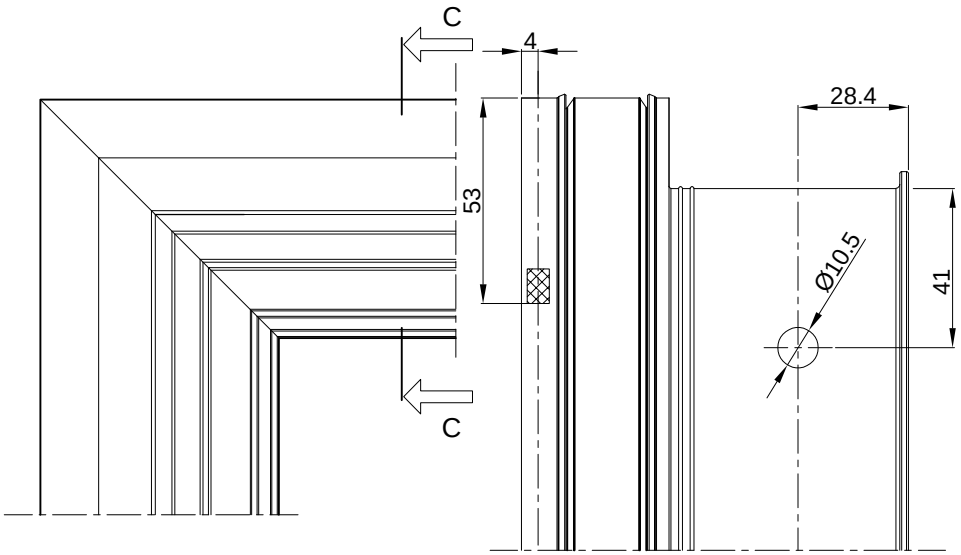


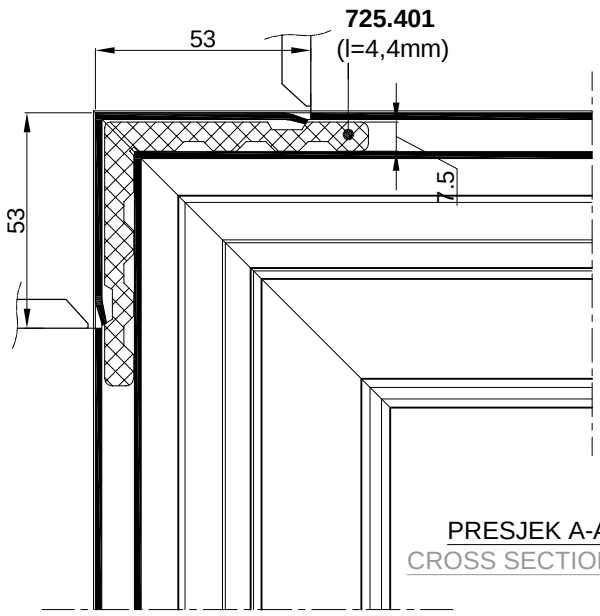

PRESJEK A-A
CROSS SECTION A-A

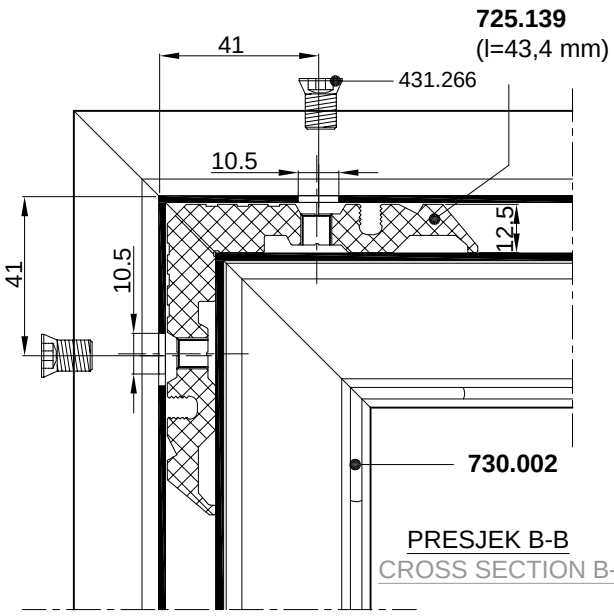

PRESJEK B-B
CROSS SECTION B-B

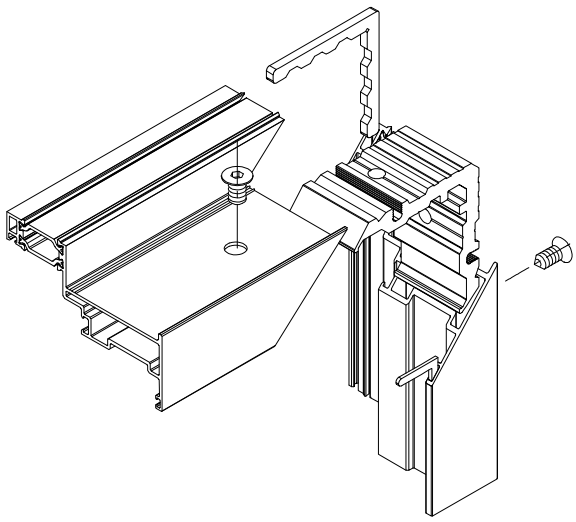



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

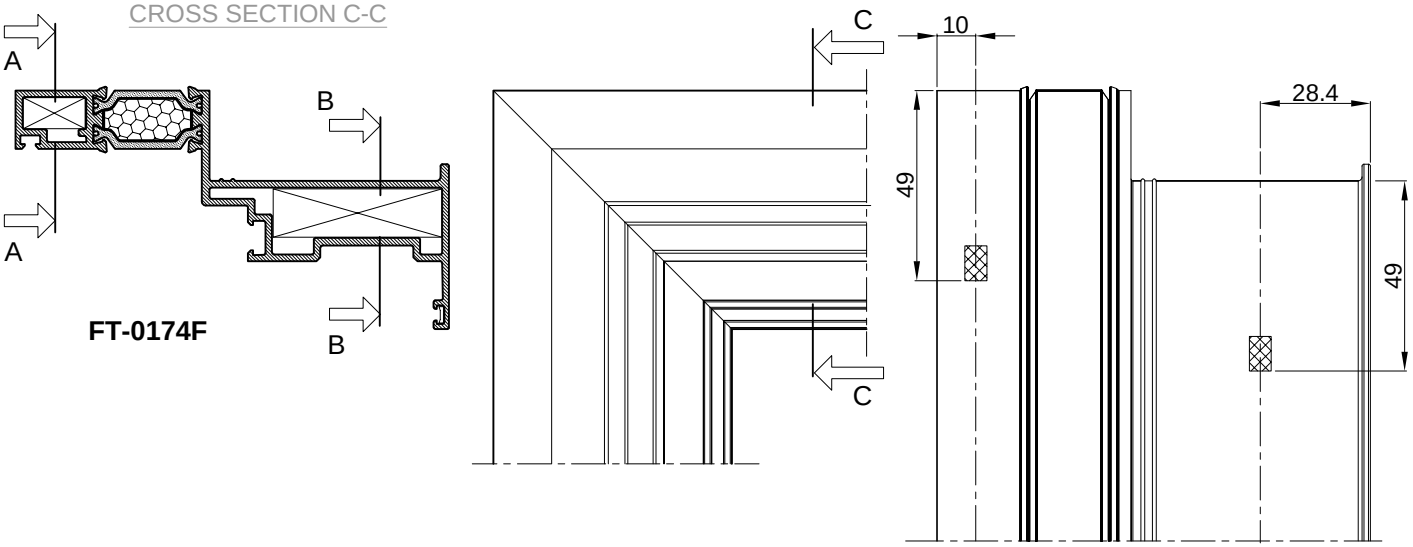

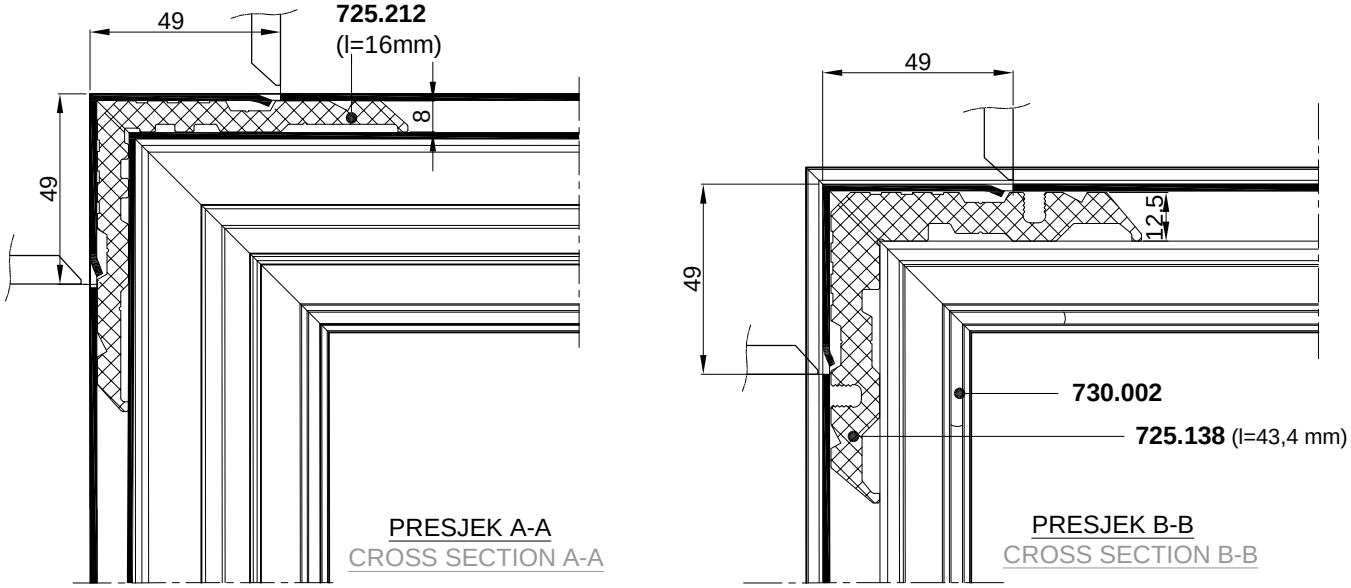

PRESJEK A-A
CROSS SECTION A-A

PRESJEK B-B
CROSS SECTION B-B

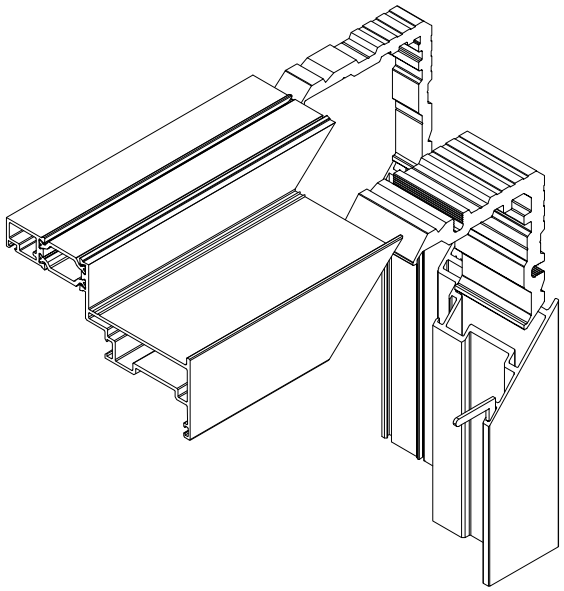


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION

PRESJEK C-C
CROSS SECTION C-C

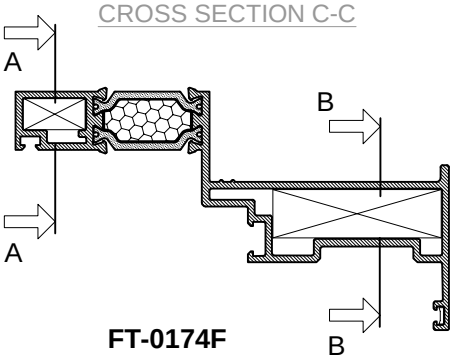


FT-0174F

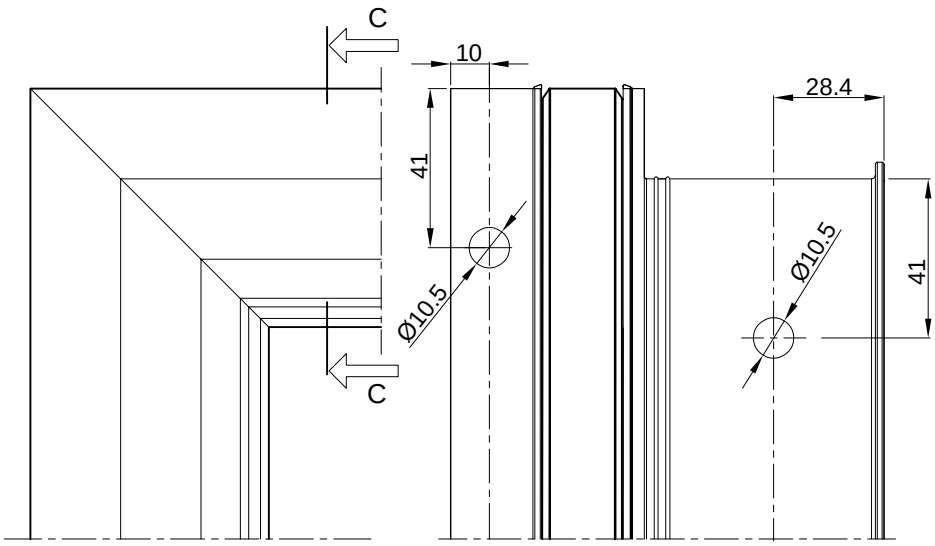


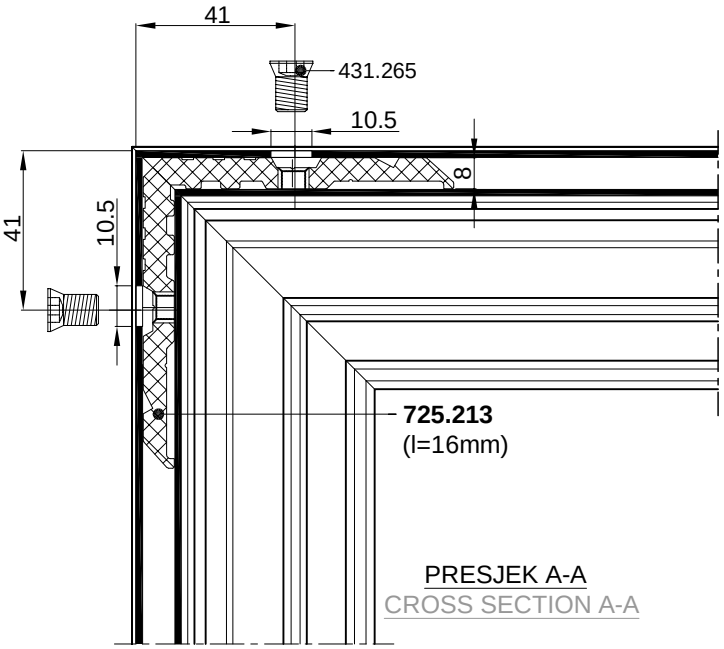

PRESJEK A-A
CROSS SECTION A-A

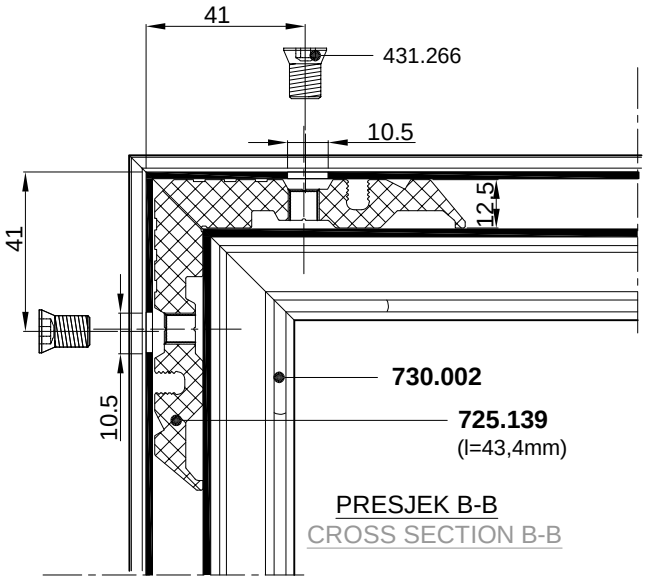


PRESJEK B-B
CROSS SECTION B-B

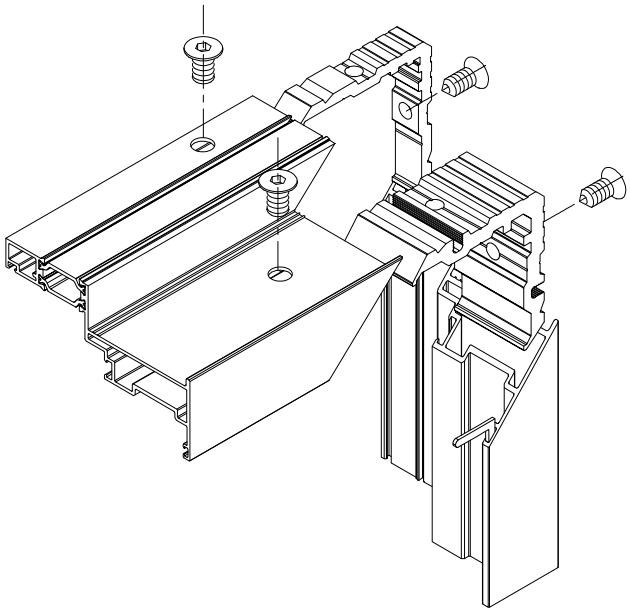


1. VIJČANA VEZA
1. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

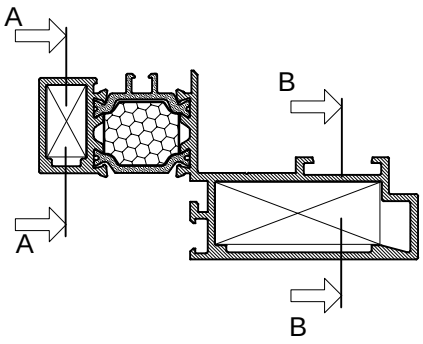


FT-0170F

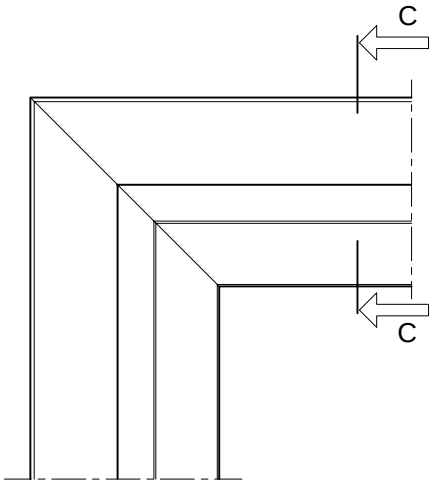


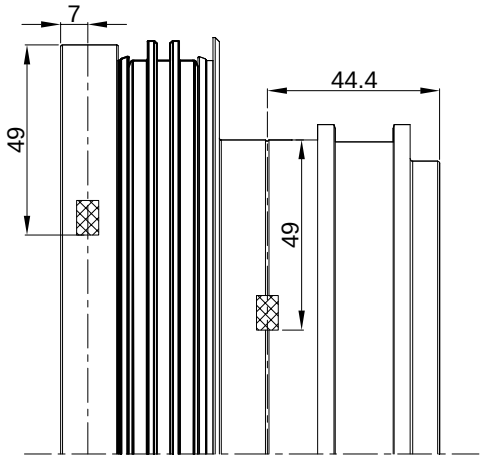

710.153
(l=10mm)

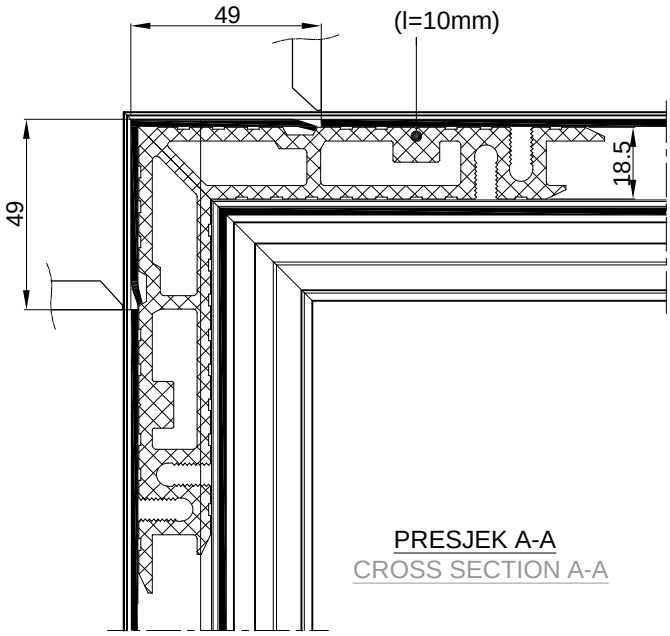


PRESJEK A-A
CROSS SECTION A-A

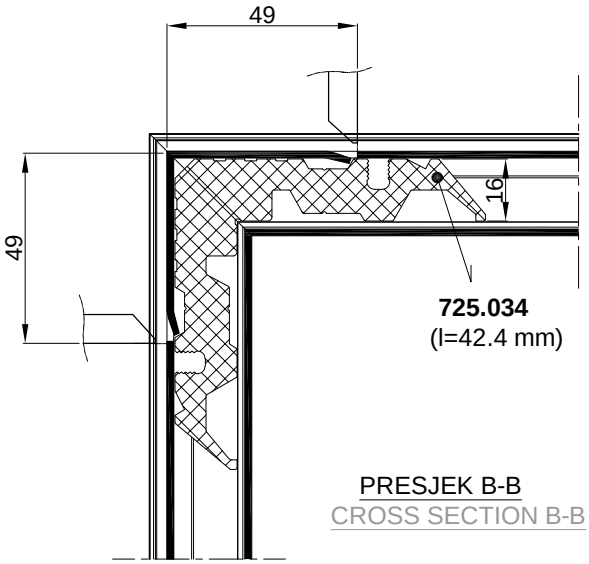

725.034
(l=42.4 mm)

PRESJEK B-B
CROSS SECTION B-B

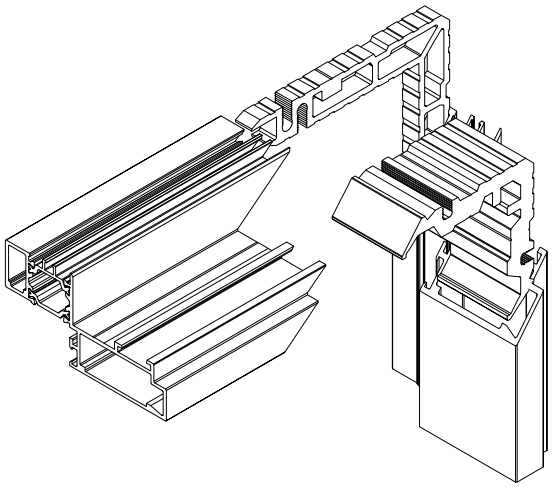


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

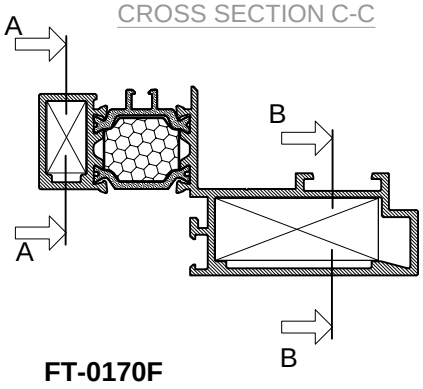

FT-0170F

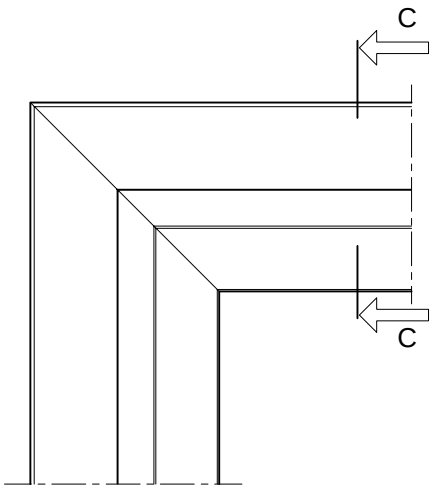


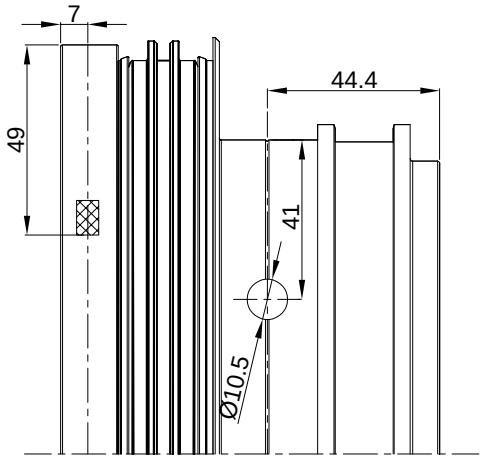

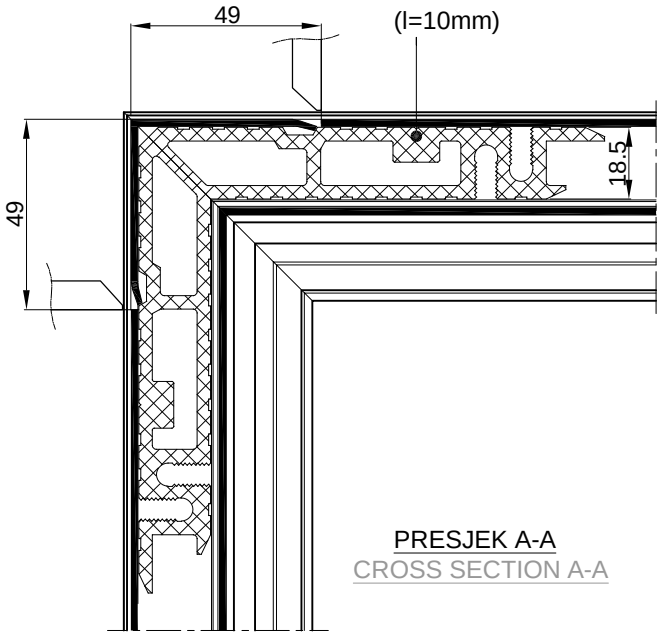


710.153
(l=10mm)

PRESJEK A-A
CROSS SECTION A-A

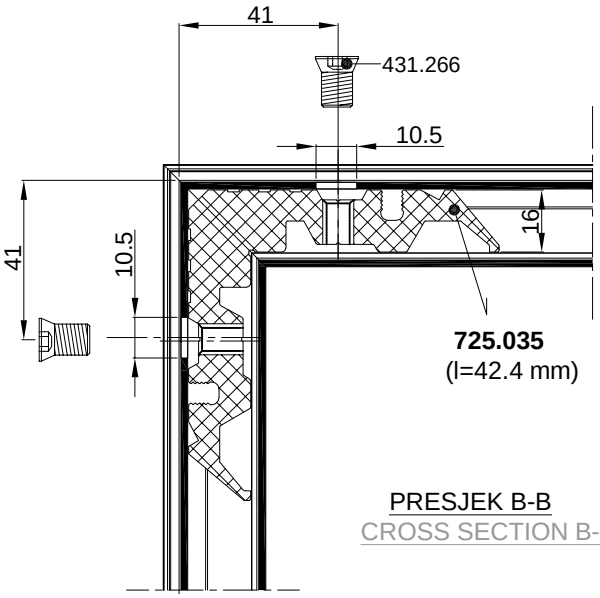

725.035
(l=42.4 mm)

PRESJEK B-B
CROSS SECTION B-B

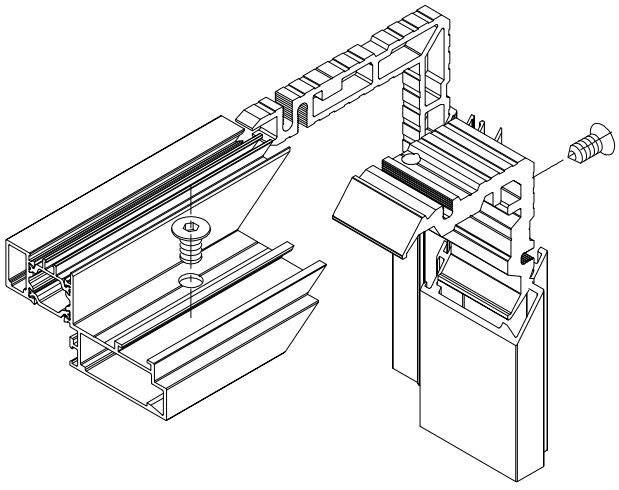


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION


PRESJEK C-C
CROSS SECTION C-C



FT-0164F

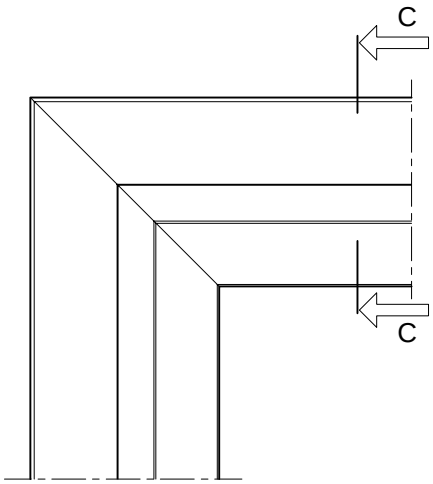


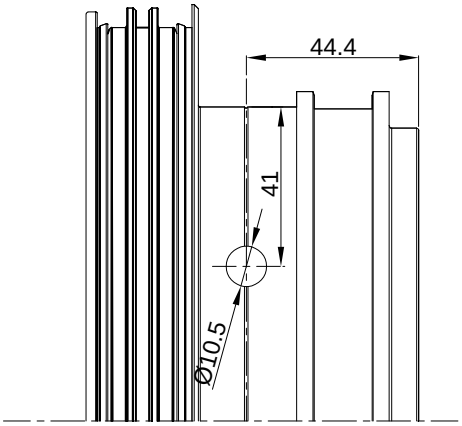

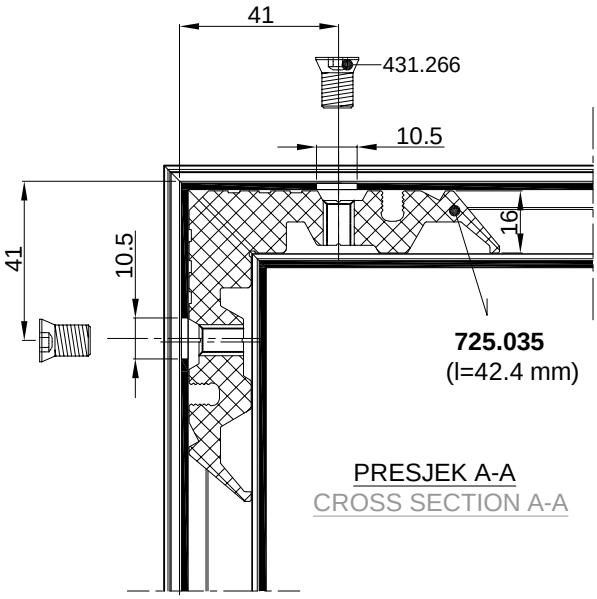

725.035
(l=42.4 mm)


PRESJEK A-A
CROSS SECTION A-A

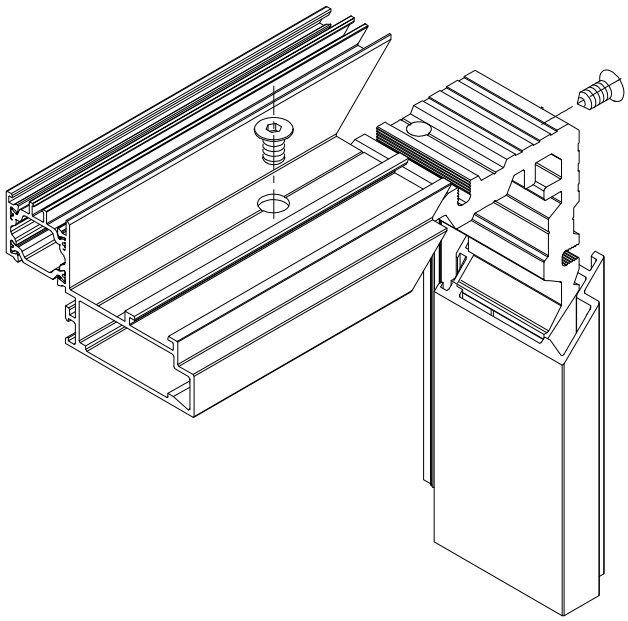



1. VIJČANA VEZA
1. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA PREMA KUTNIKU
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

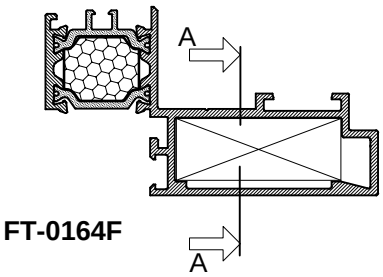


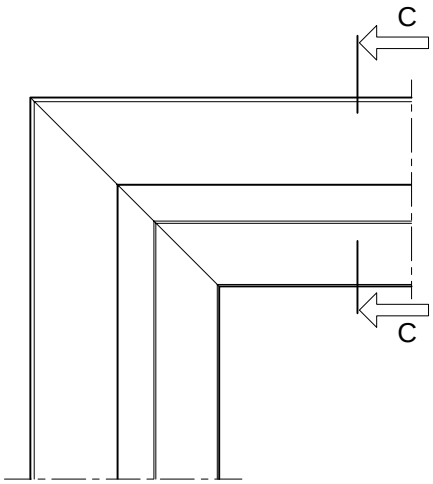

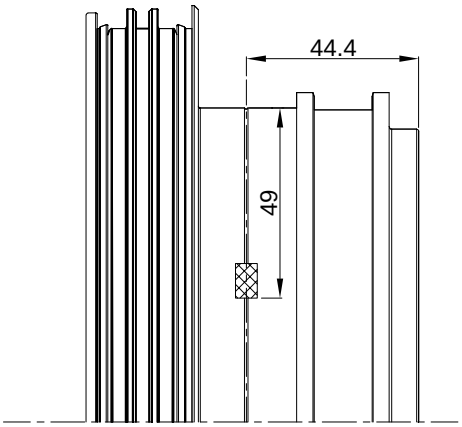

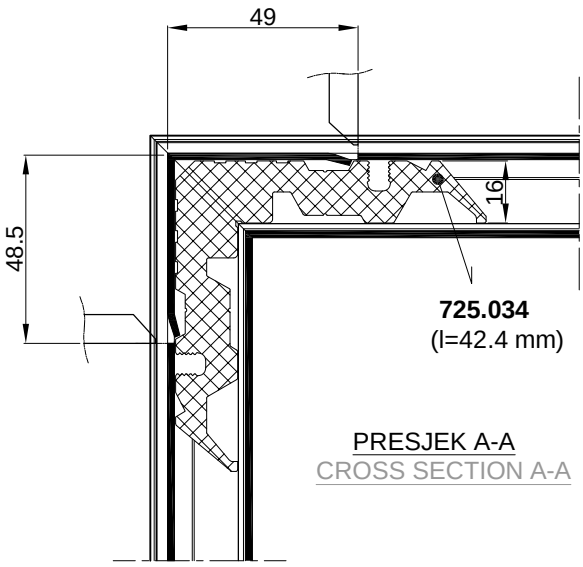

PRESJEK A-A
CROSS SECTION A-A

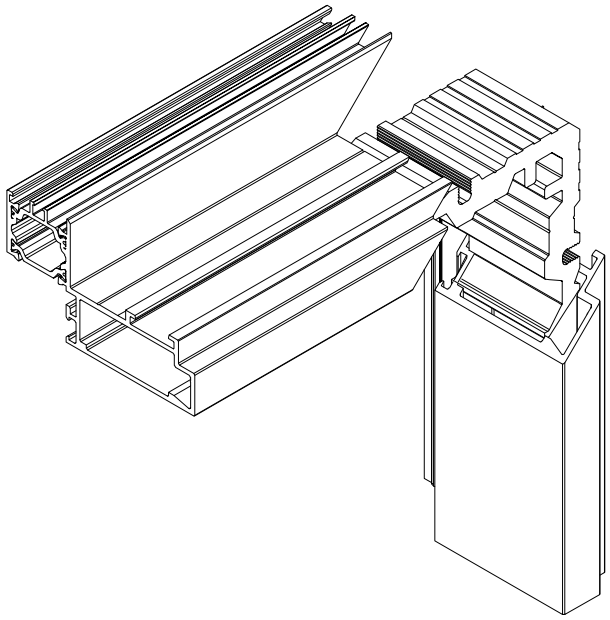


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

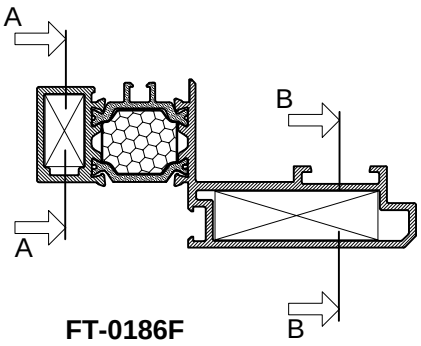


FT-0186F

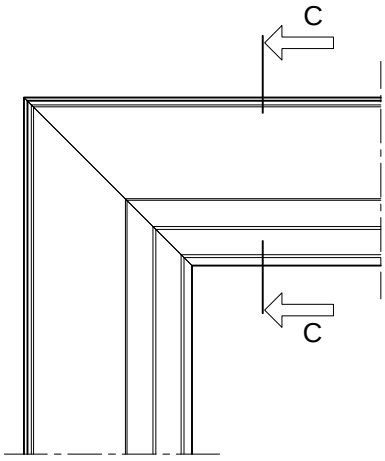

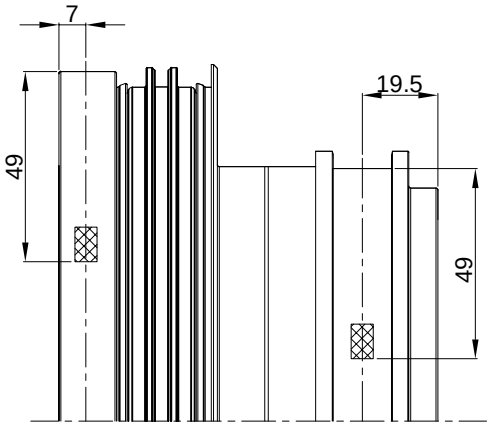


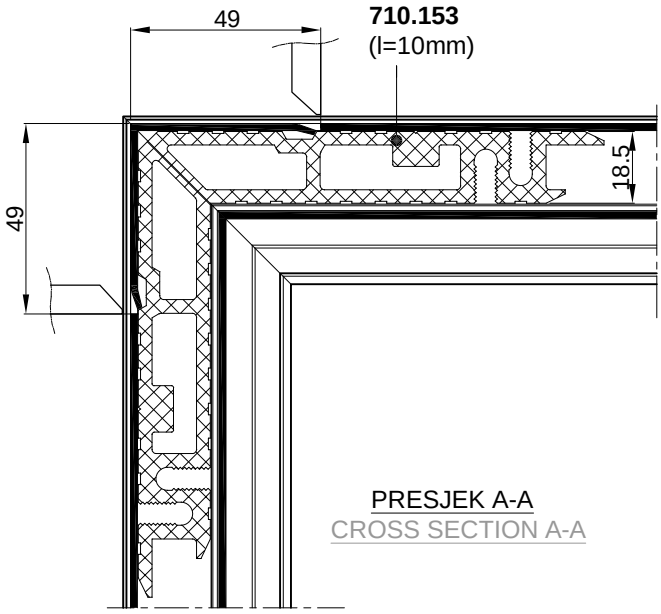

PRESJEK A-A
CROSS SECTION A-A

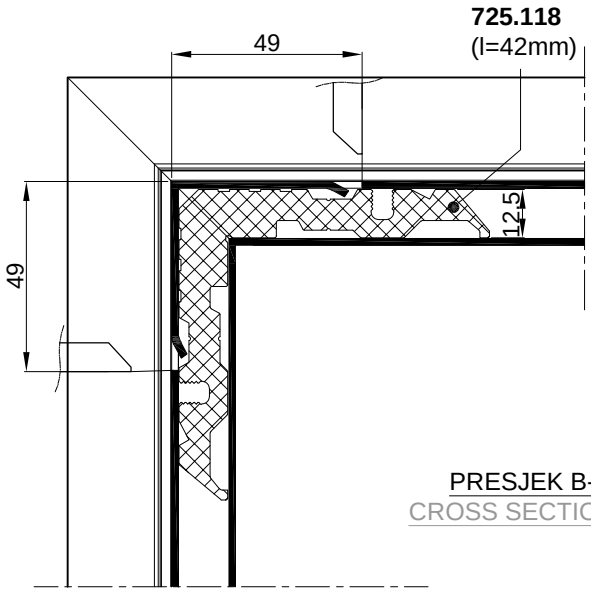

PRESJEK B-B
CROSS SECTION B-B

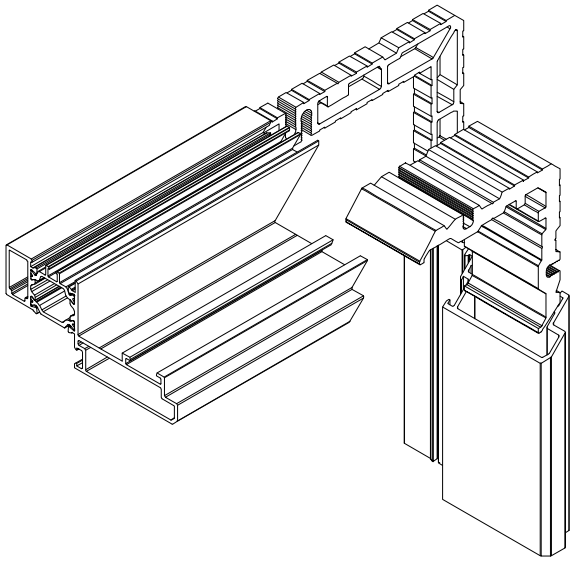


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- UPREŠAVANJE STJENKE PROFILA U KUTNIK + VIJČANA VEZA
- ALUMINIUM PROFILE CORNER CRIMPING AND SCREW CONNECTION


PRESJEK C-C
CROSS SECTION C-C

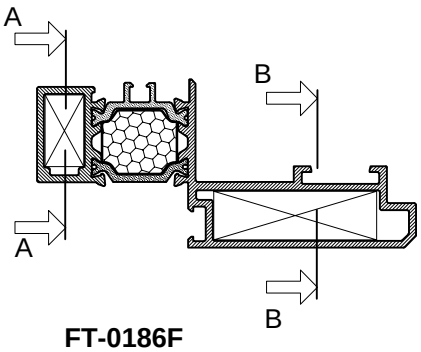

FT-0186F

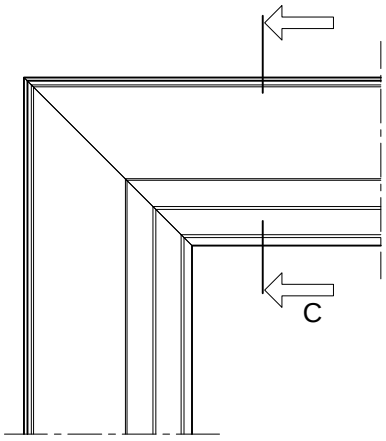


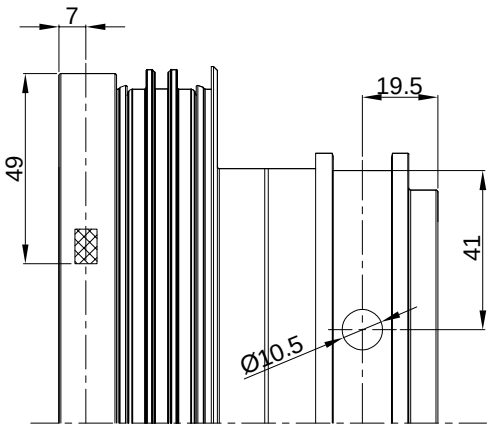

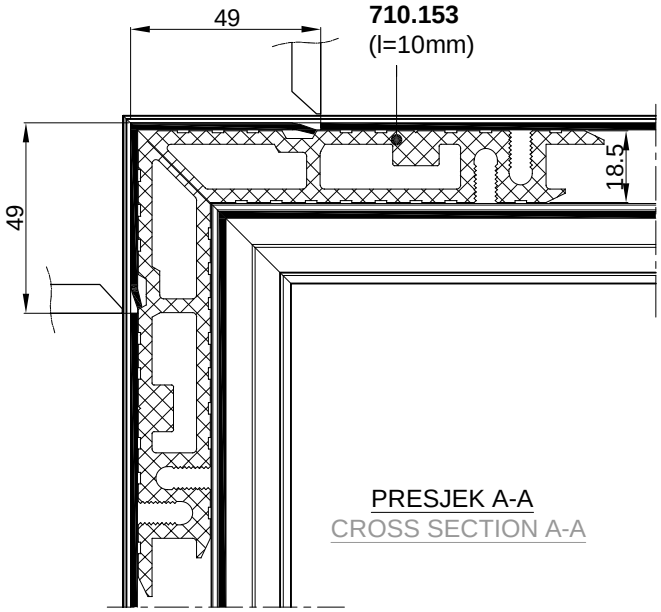


710.153
(l=10mm)

PRESJEK A-A
CROSS SECTION A-A

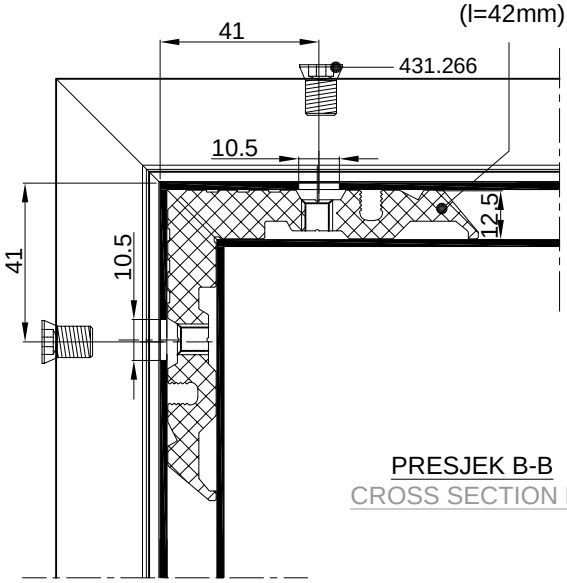

725.120
(l=42mm)


PRESJEK B-B
CROSS SECTION B-B

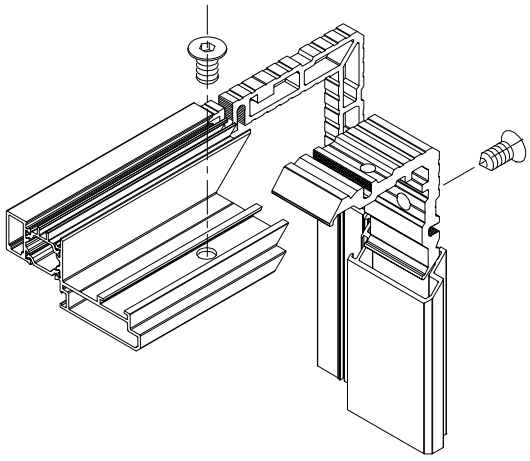


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

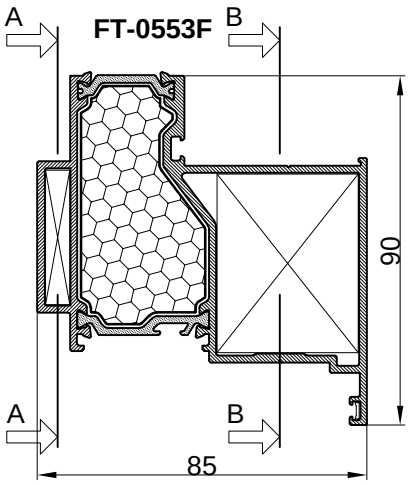

PRESJEK C-C
CROSS SECTION C-C

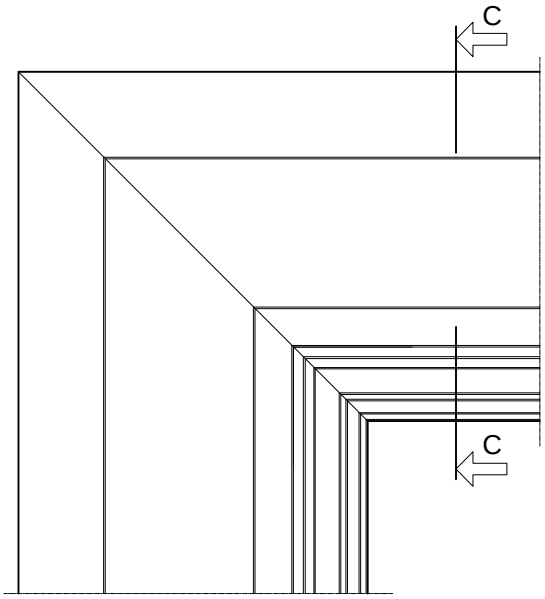


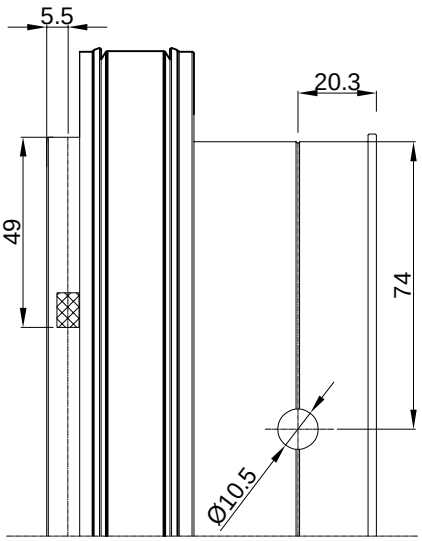

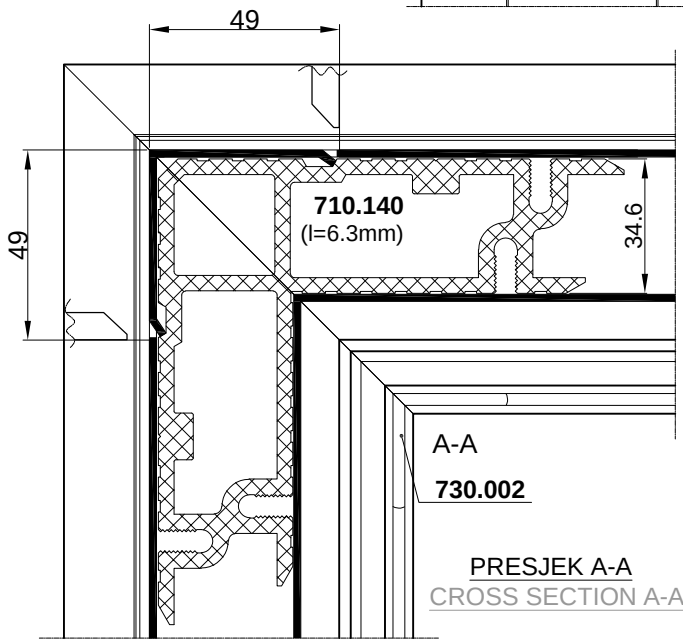


A-A
730.002

PRESJEK A-A
CROSS SECTION A-A

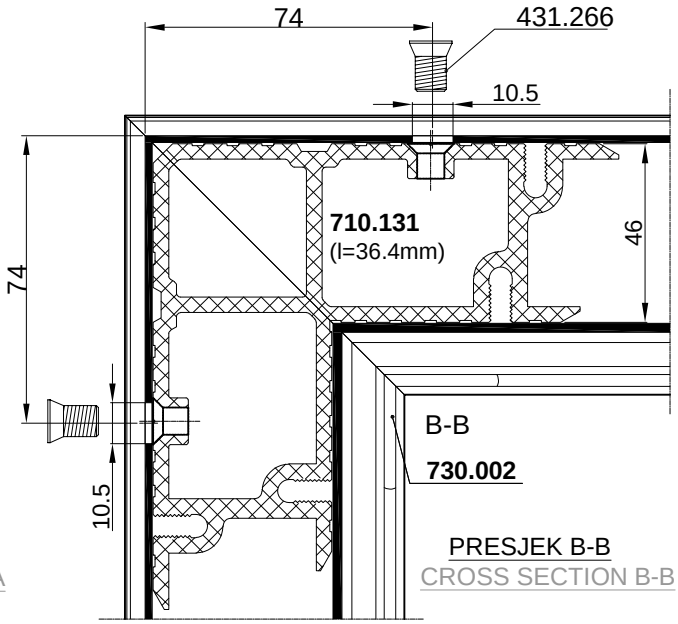

B-B
730.002


PRESJEK B-B
CROSS SECTION B-B

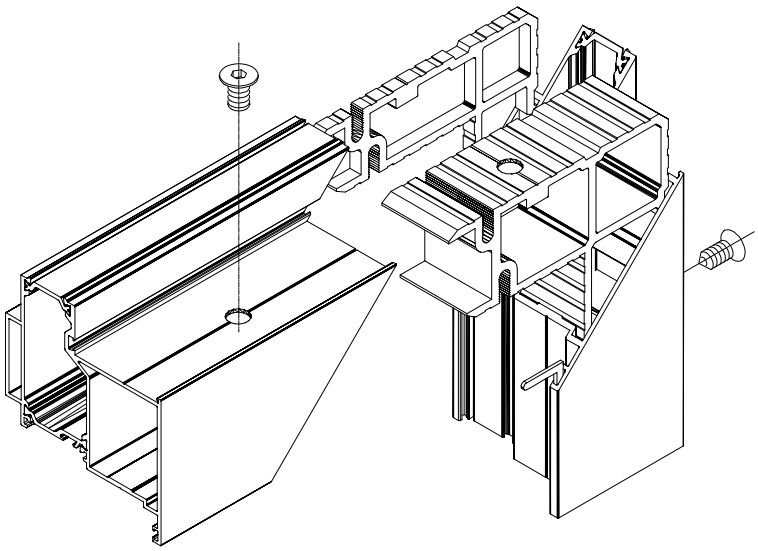


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

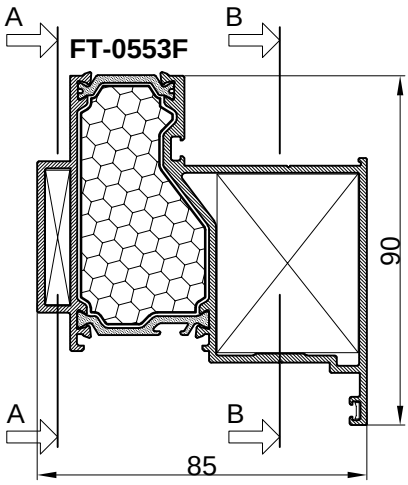


PRESJEK C-C
CROSS SECTION C-C

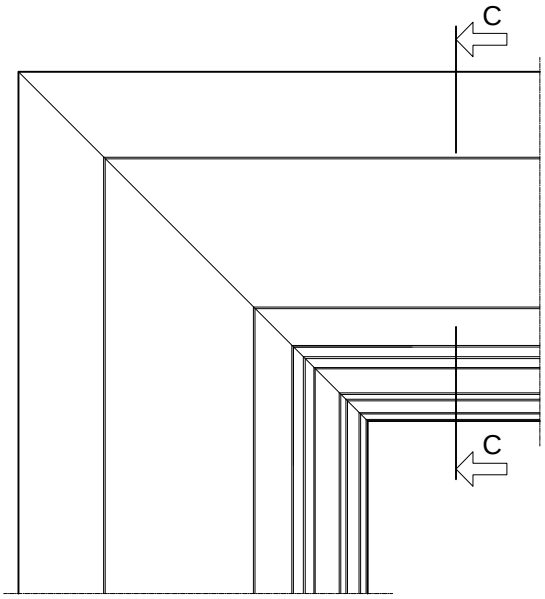

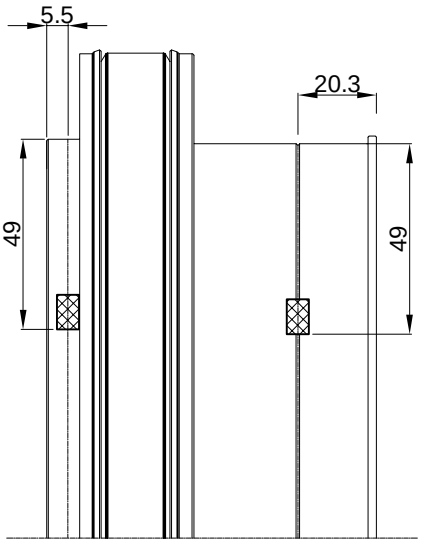


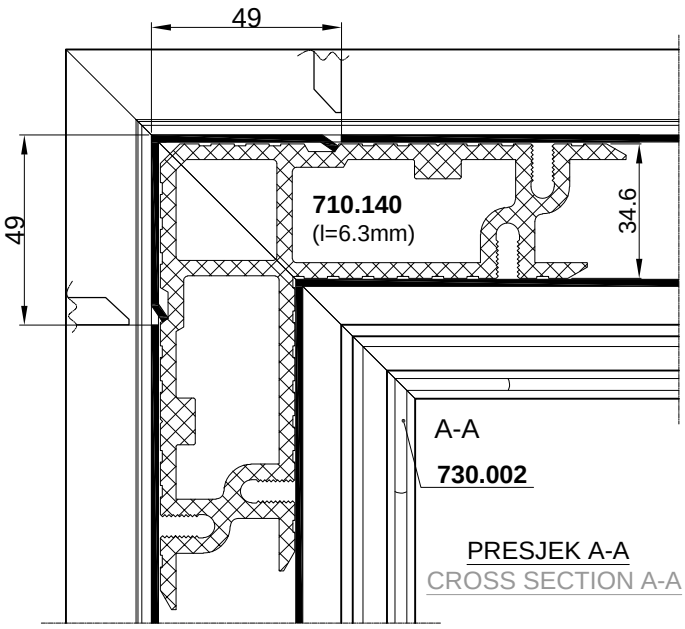

PRESJEK A-A
CROSS SECTION A-A

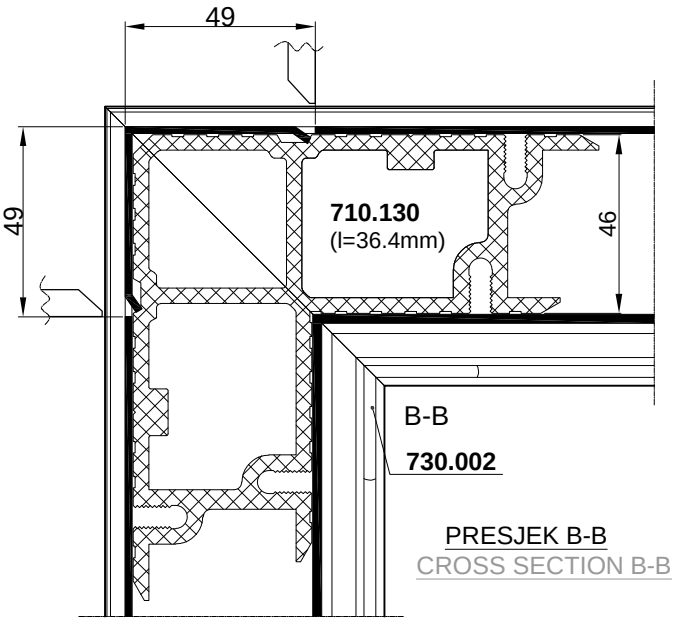


PRESJEK B-B
CROSS SECTION B-B

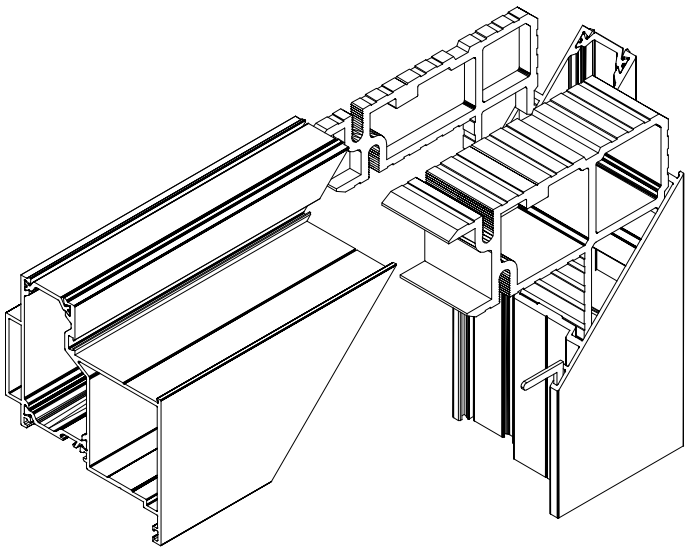


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

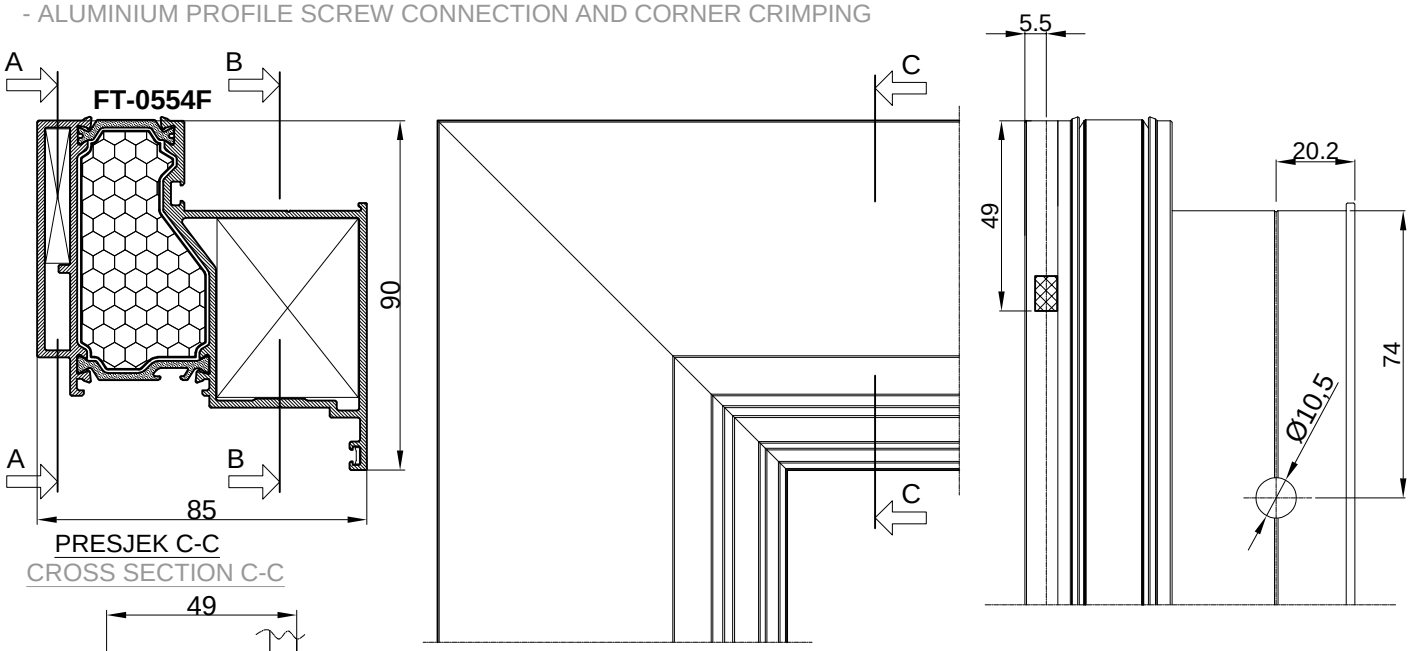


PRESJEK C-C
CROSS SECTION C-C

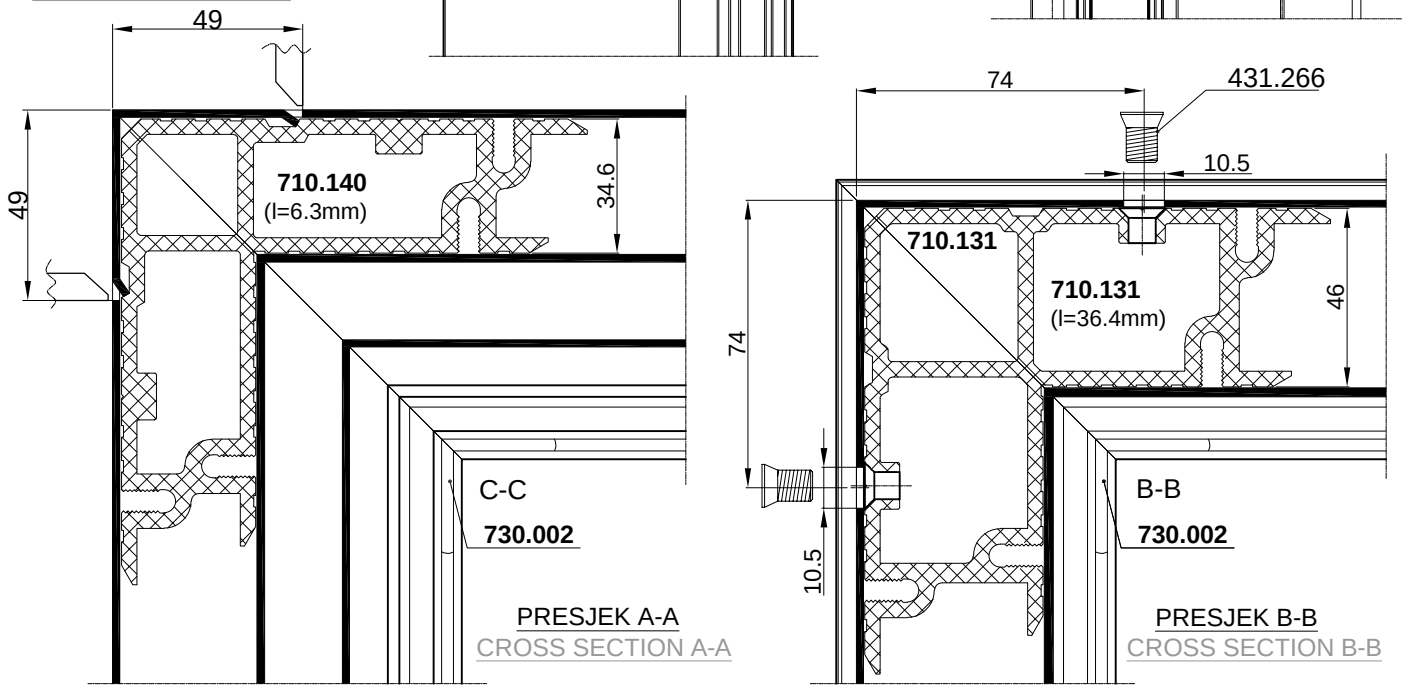

PRESJEK A-A
CROSS SECTION A-A


PRESJEK B-B
CROSS SECTION B-B

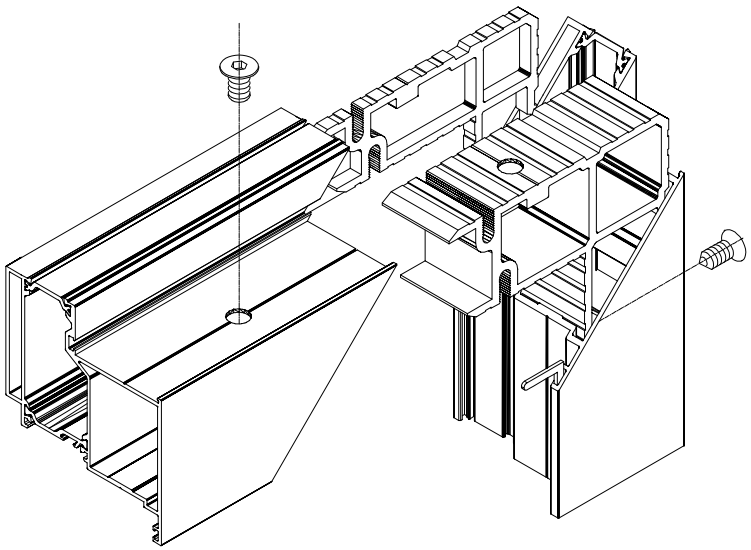


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

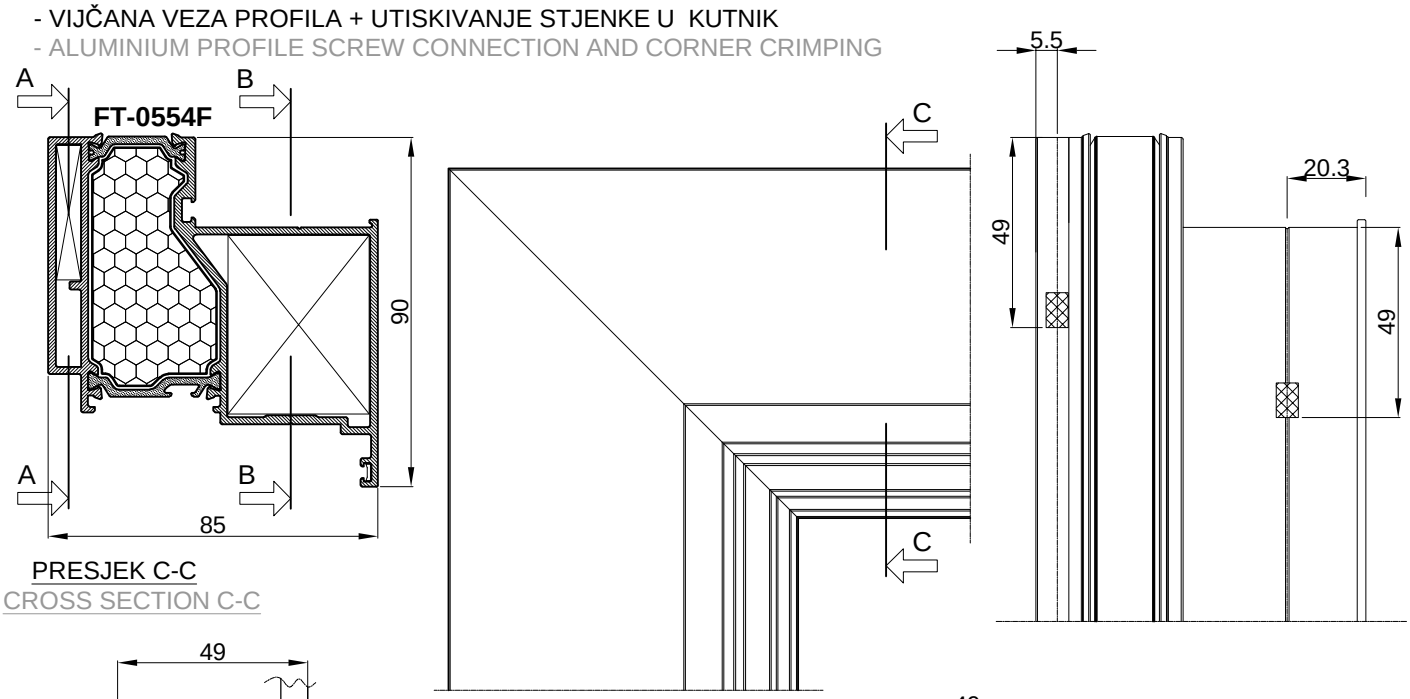


PRESJEK C-C
CROSS SECTION C-C

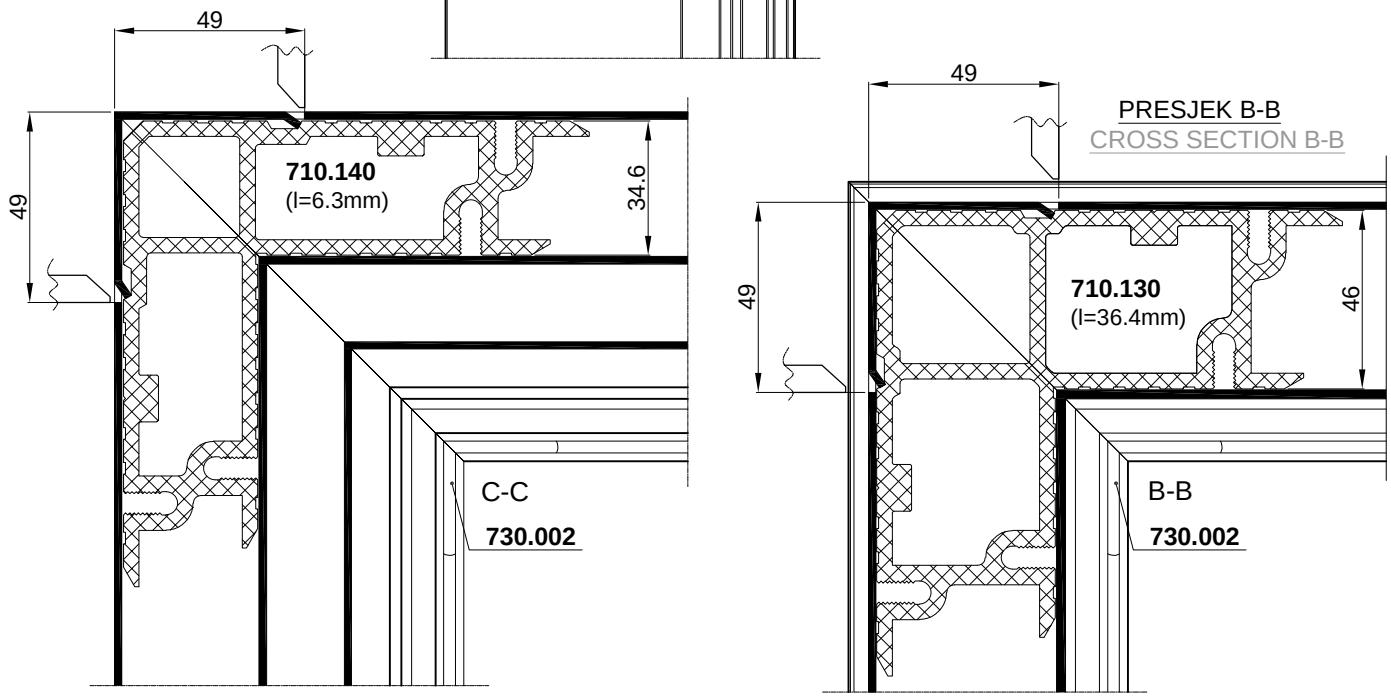

PRESJEK B-B
CROSS SECTION B-B


PRESJEK A-A
CROSS SECTION A-A

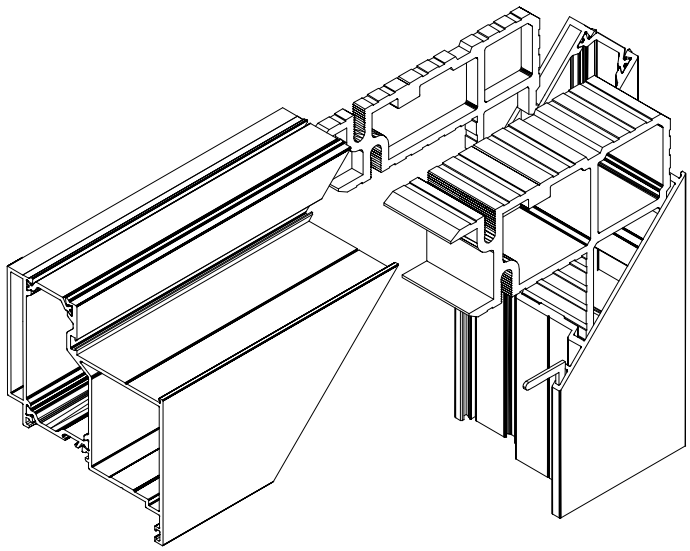


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

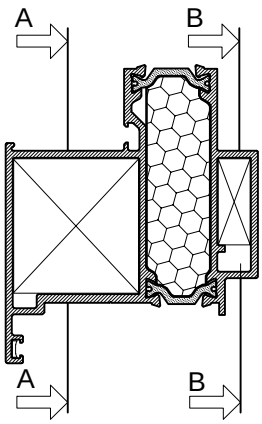


FT-0260F

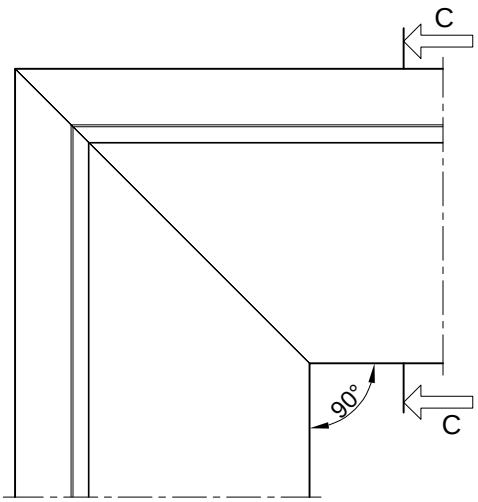

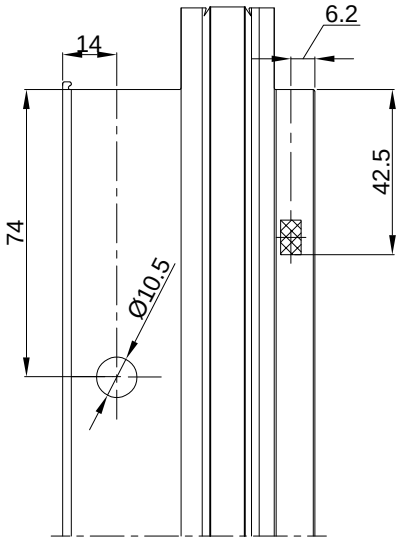


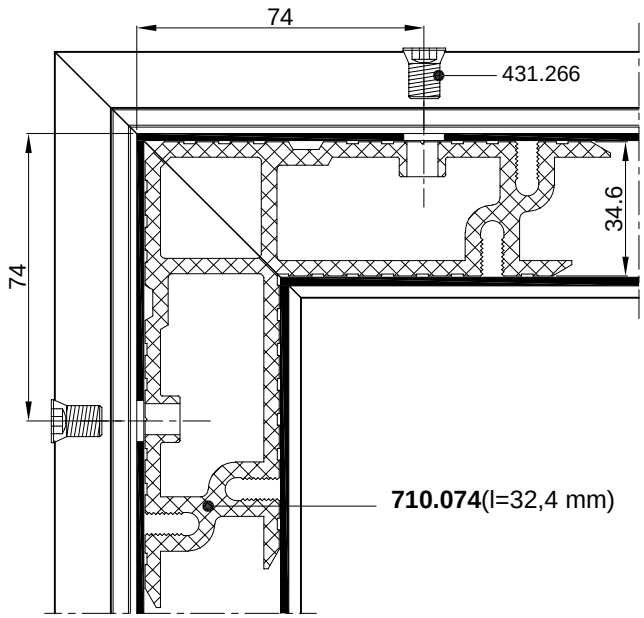

PRESJEK A-A
CROSS SECTION A-A

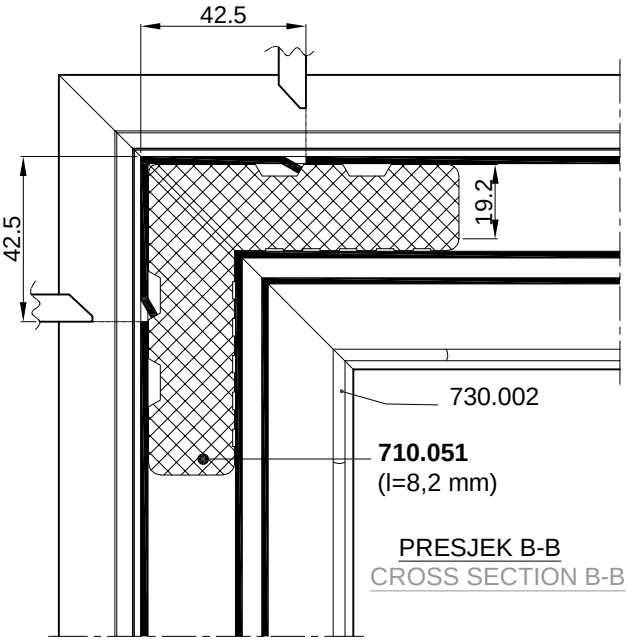

PRESJEK B-B
CROSS SECTION B-B

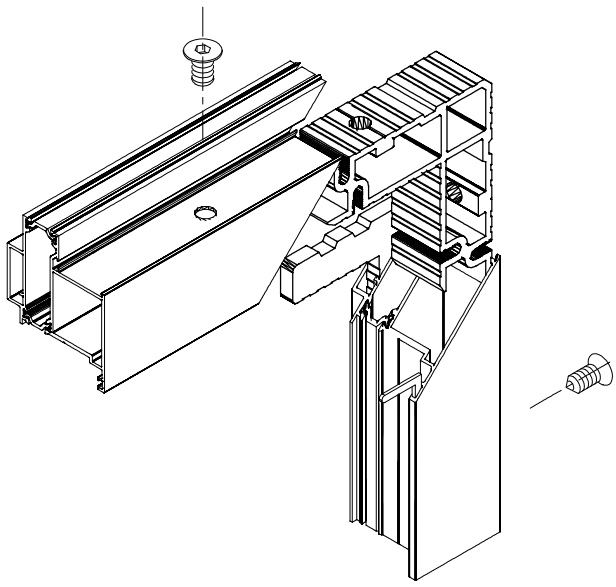


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

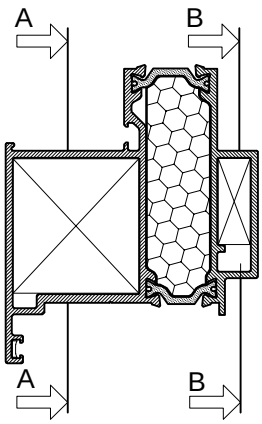

FT-0260F

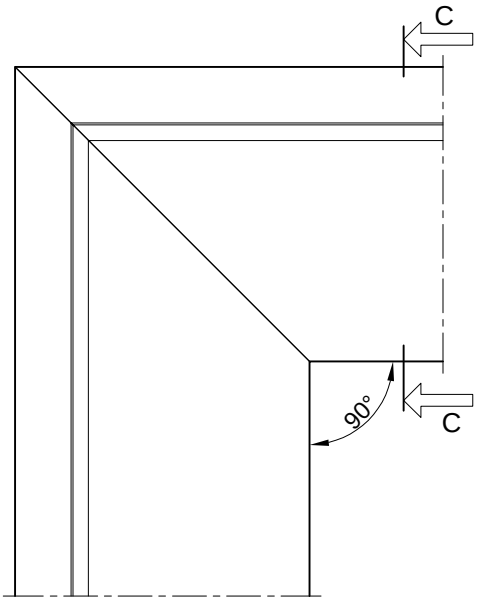


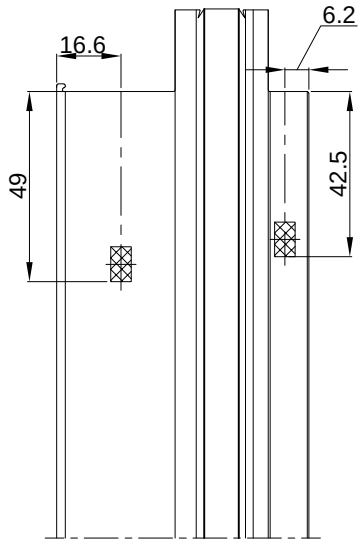

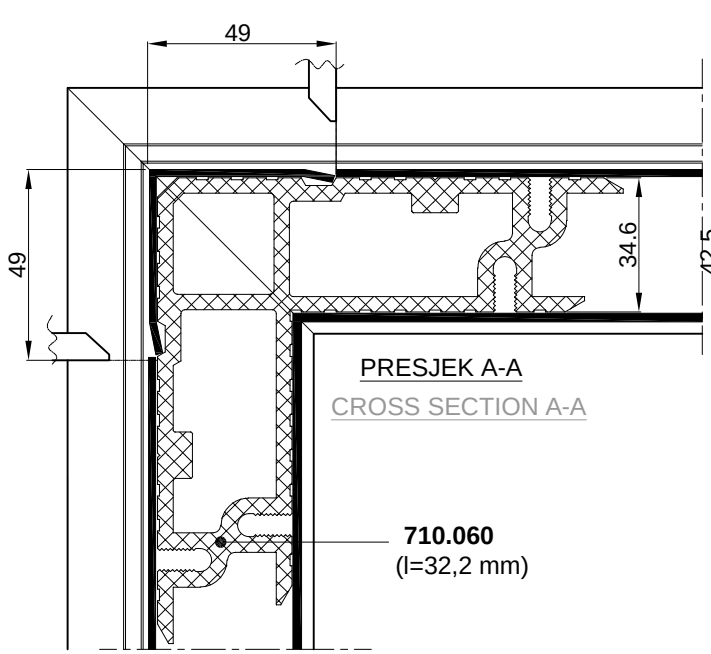


PRESJEK A-A
CROSS SECTION A-A

710.060
(l=32,2 mm)

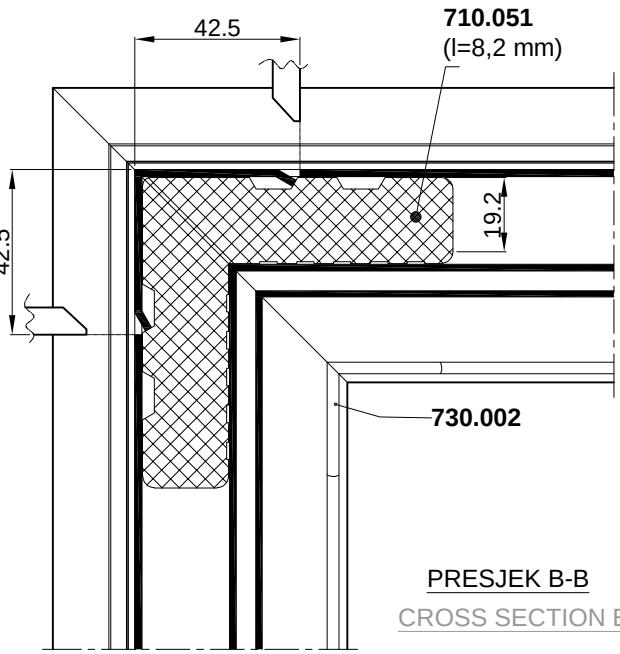


PRESJEK B-B
CROSS SECTION B-B

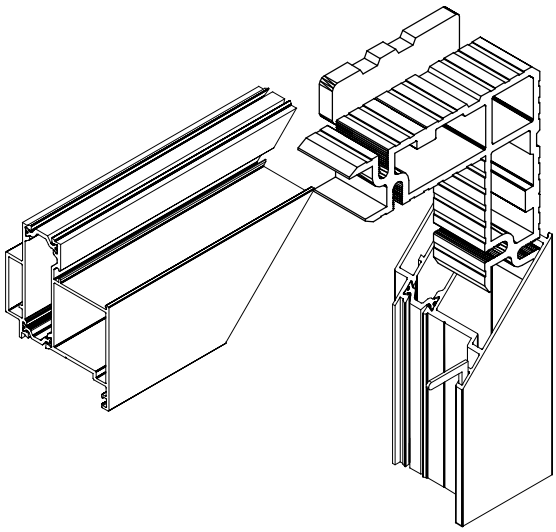


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

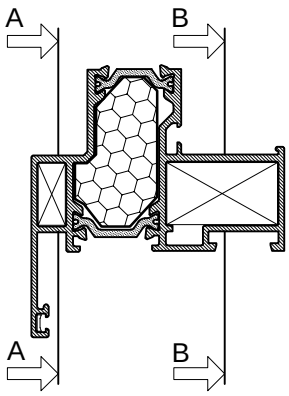


FT-0261F

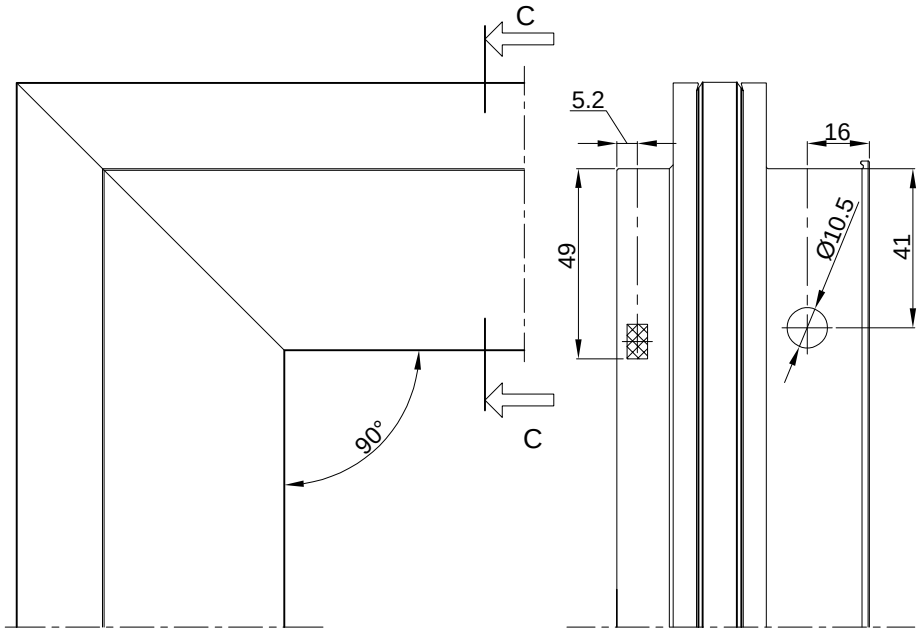


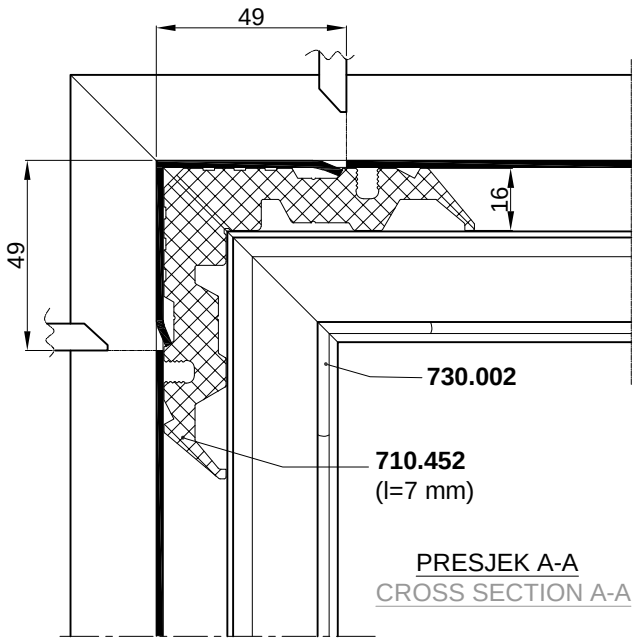

PRESJEK A-A
CROSS SECTION A-A

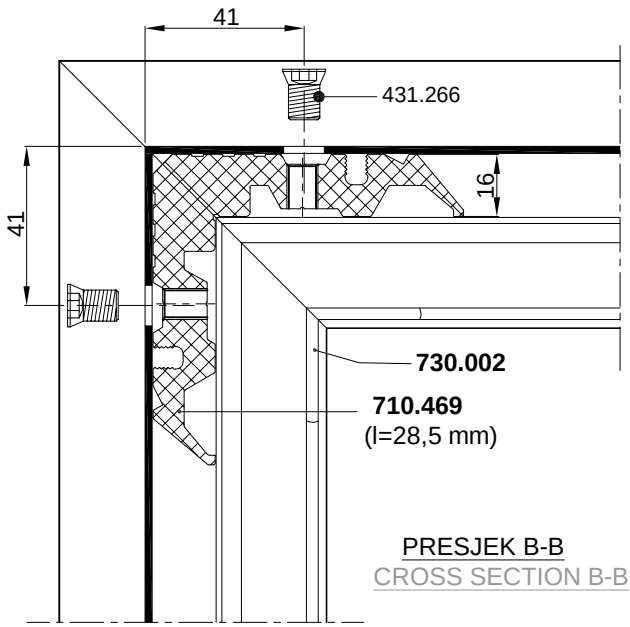

PRESJEK B-B
CROSS SECTION B-B

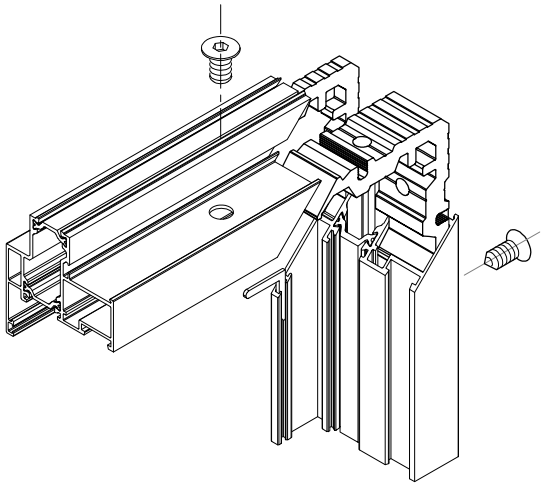


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

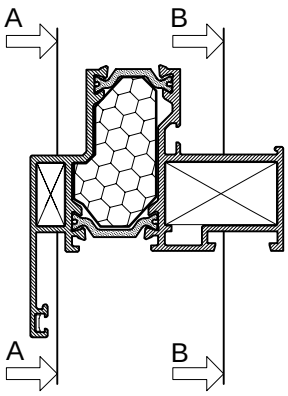


FT-0261F

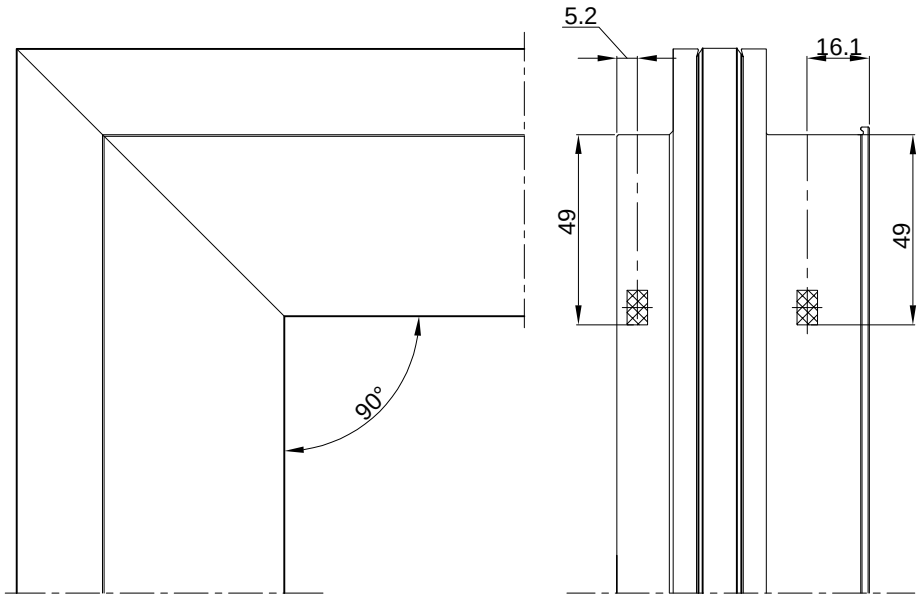

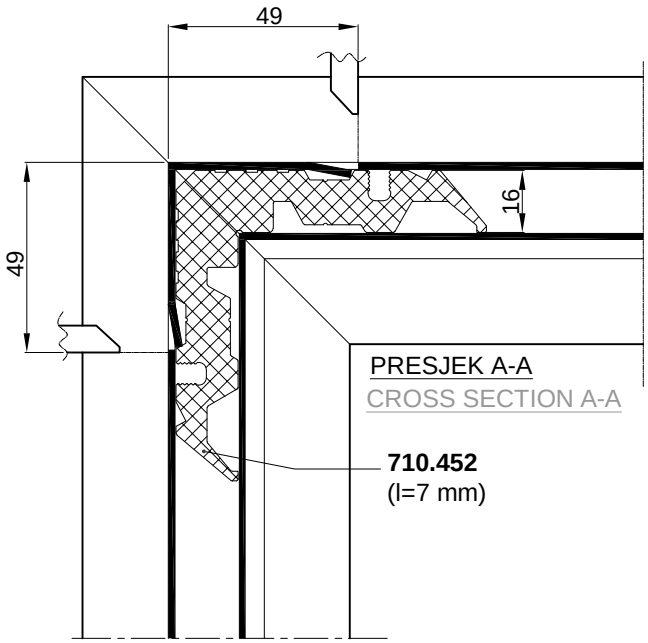


PRESJEK A-A
CROSS SECTION A-A

710.452
(l=7 mm)

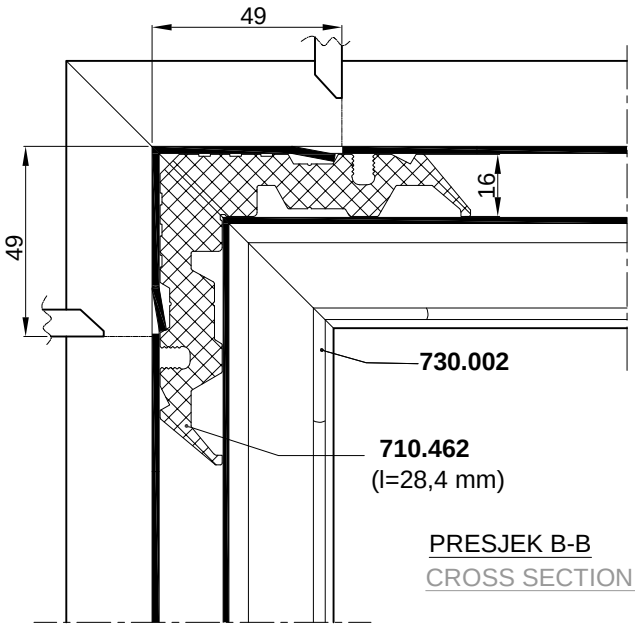

(l=28,4 mm)


PRESJEK B-B
CROSS SECTION B-B

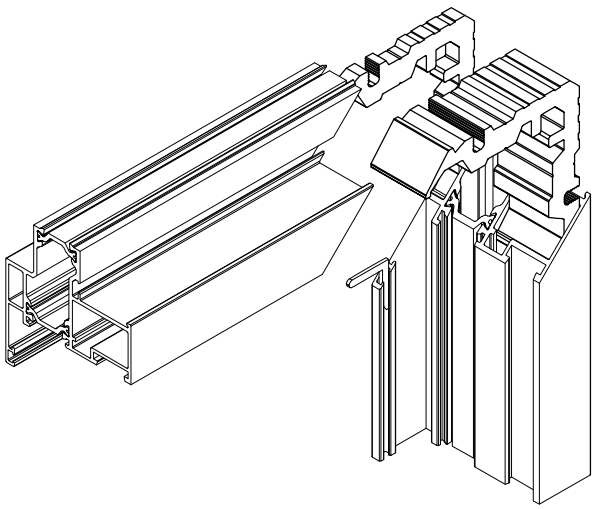


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

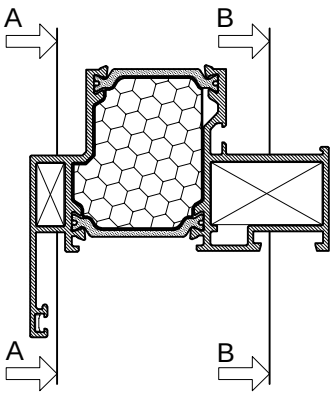


FT-0261HF

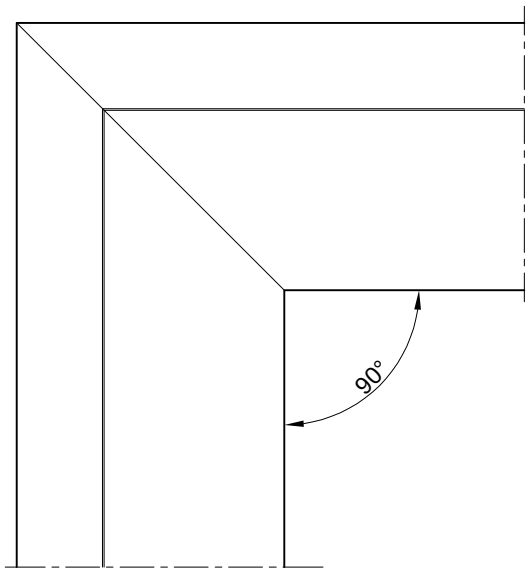

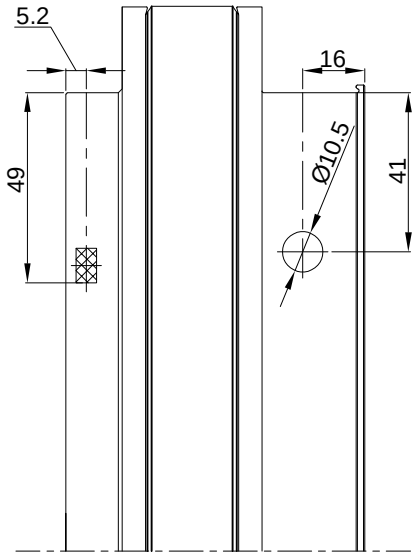


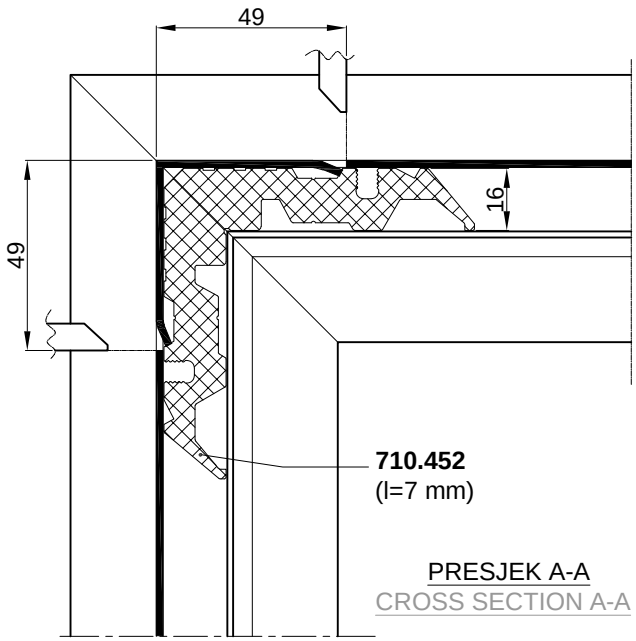

PRESJEK A-A
CROSS SECTION A-A

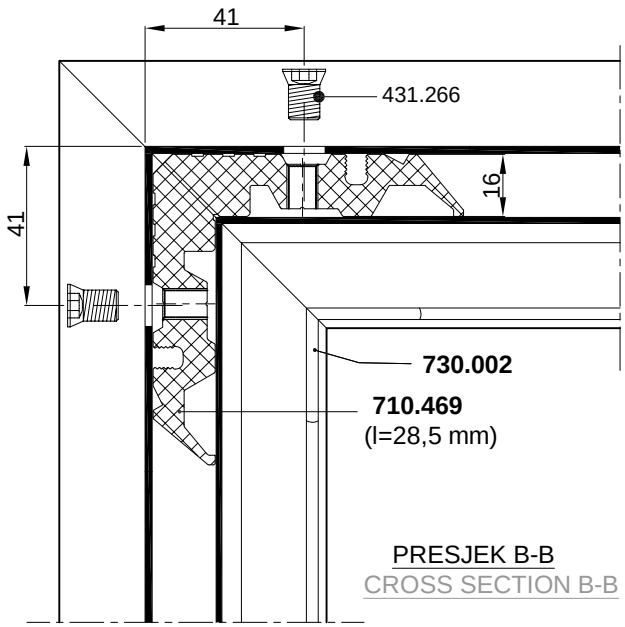

PRESJEK B-B
CROSS SECTION B-B

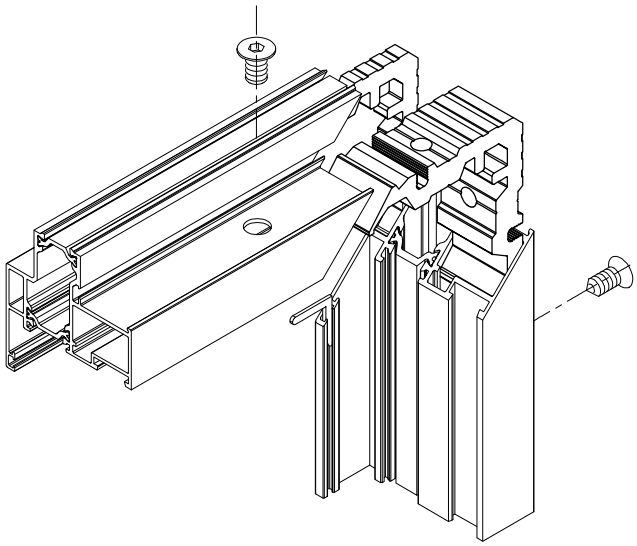


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

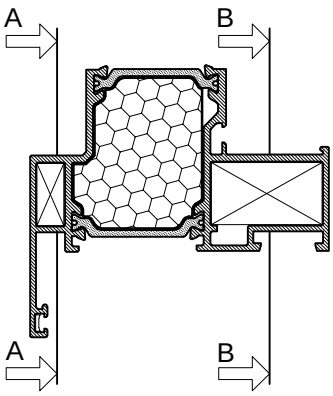


FT-0261HF

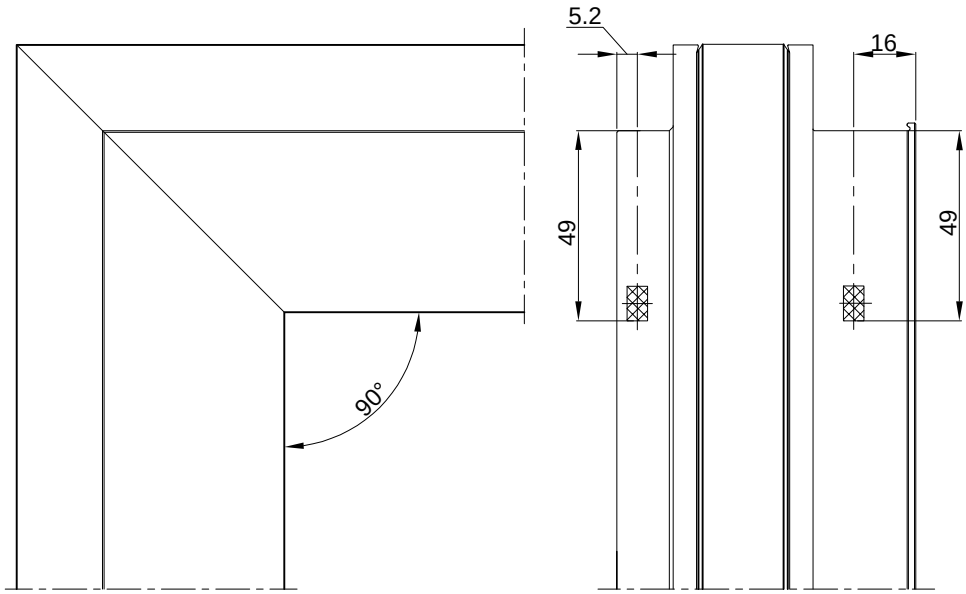

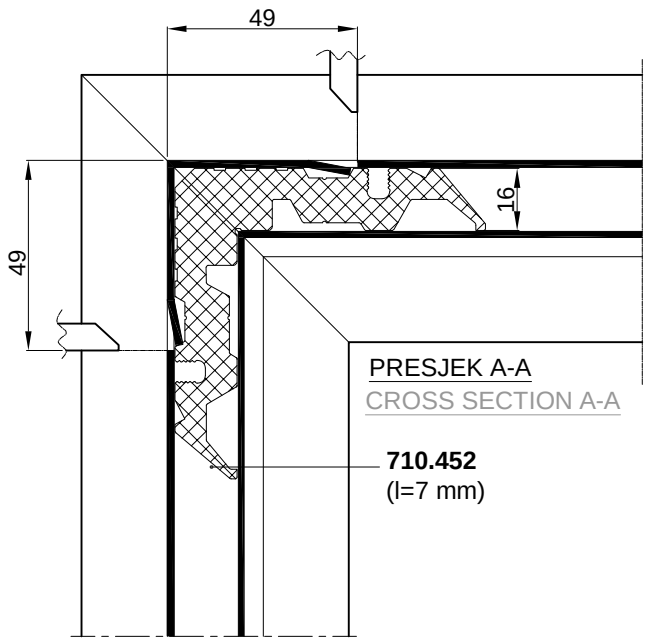


PRESJEK A-A
CROSS SECTION A-A

710.452
(l=7 mm)

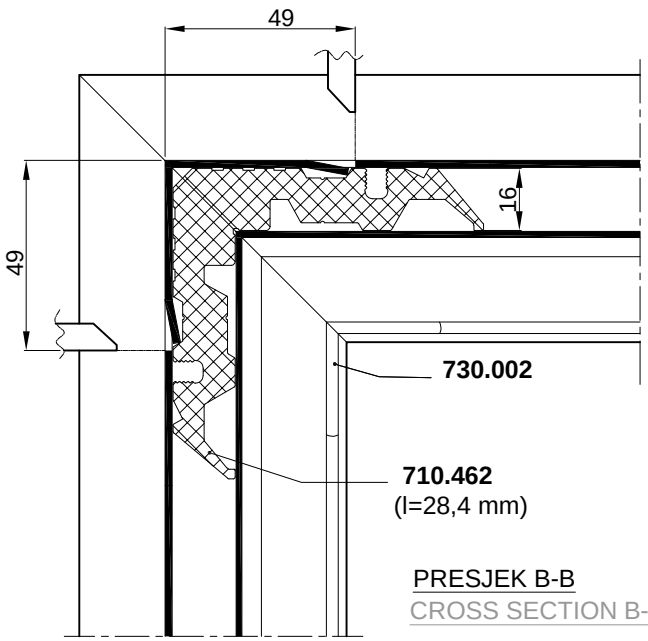

710.462
(l=28,4 mm)

PRESJEK B-B
CROSS SECTION B-B

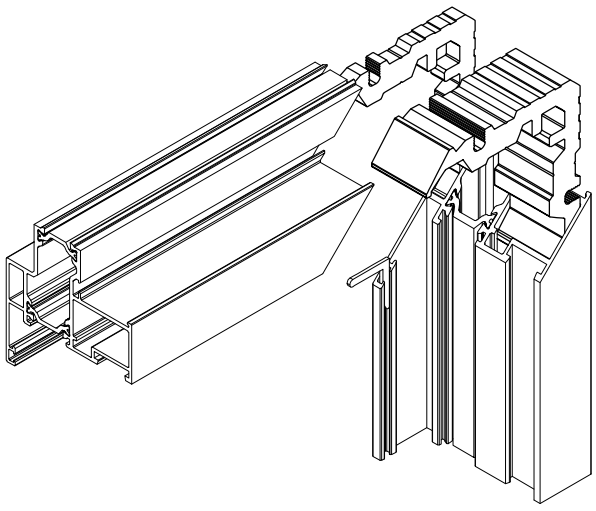



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

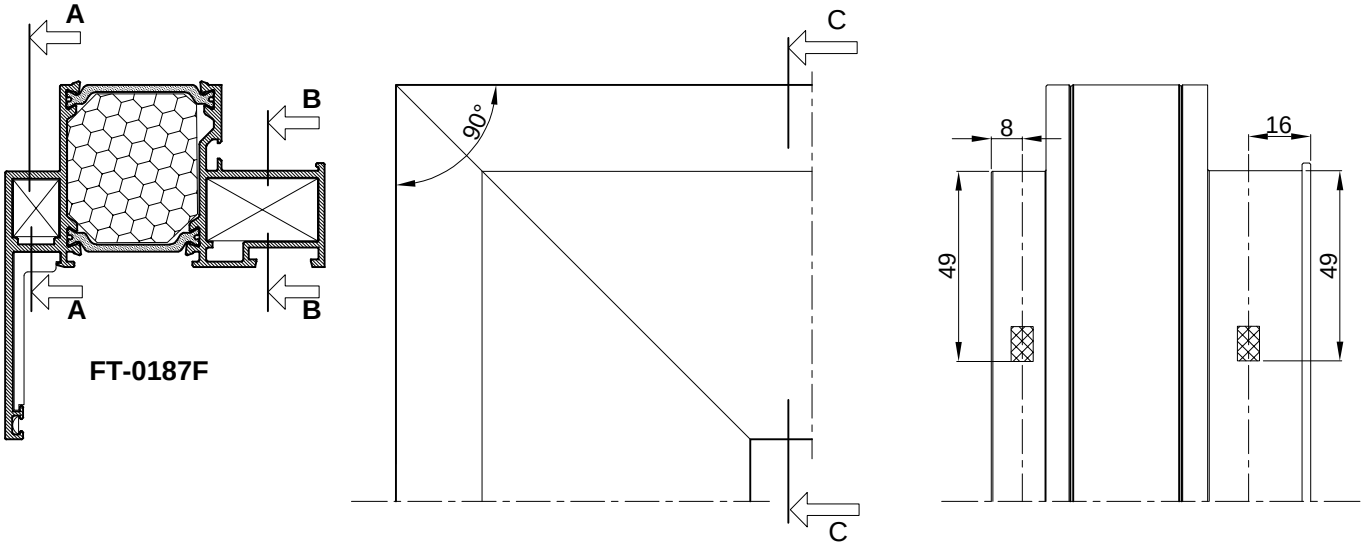


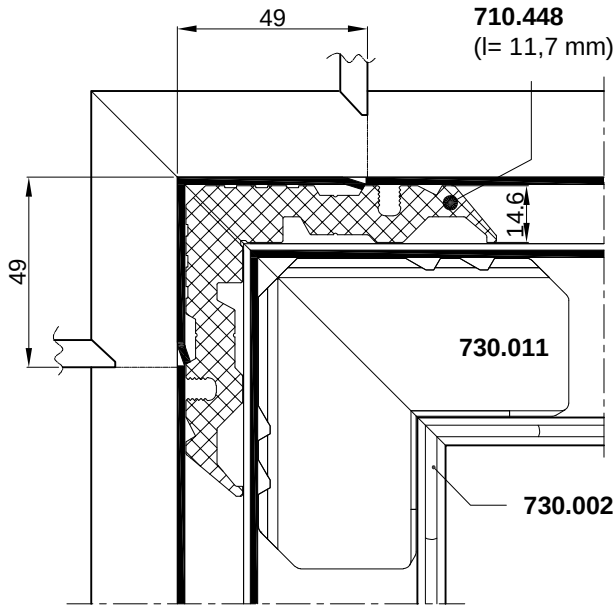

PRESJEK A-A
CROSS SECTION A-A

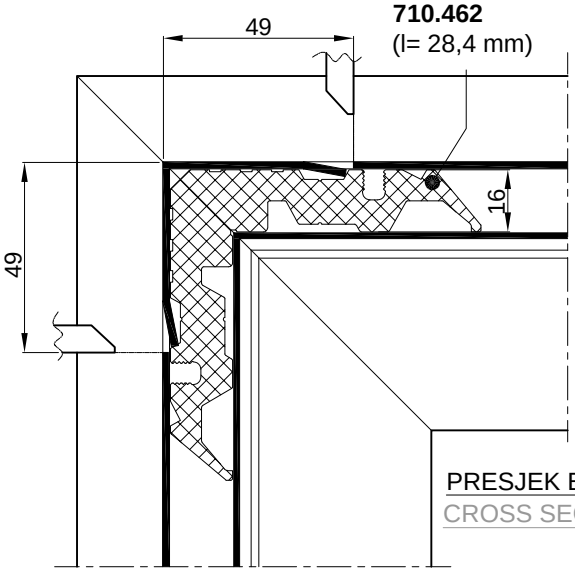

PRESJEK B-B
CROSS SECTION B-B

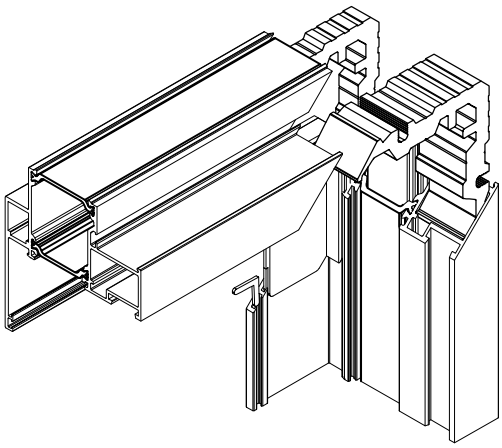



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION

PRESJEK C-C
CROSS SECTION C-C

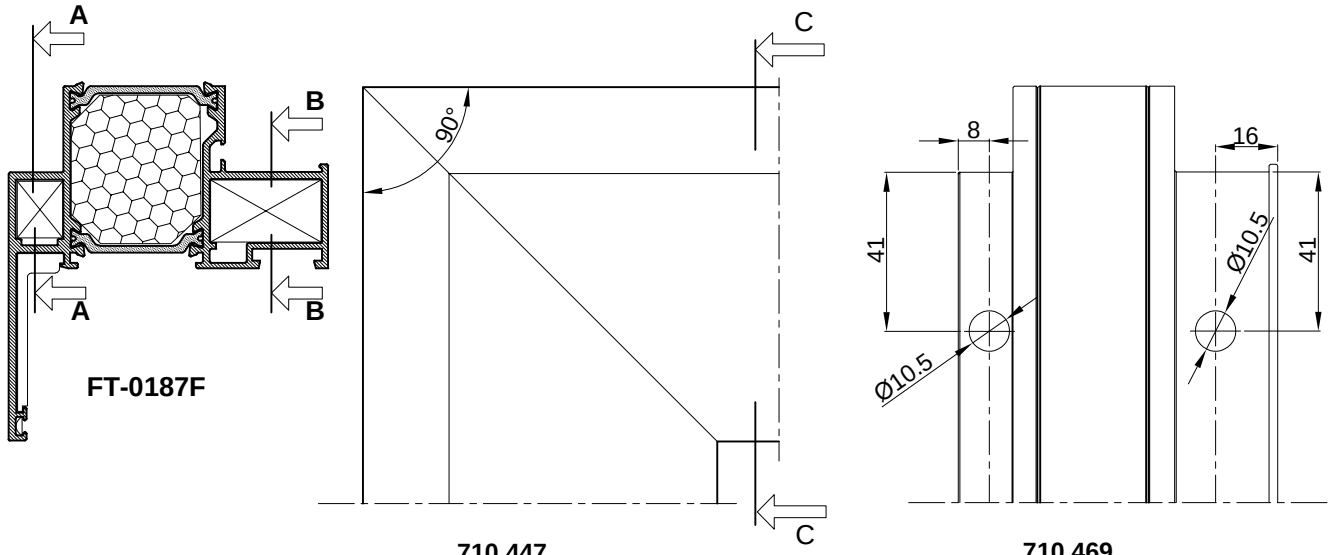


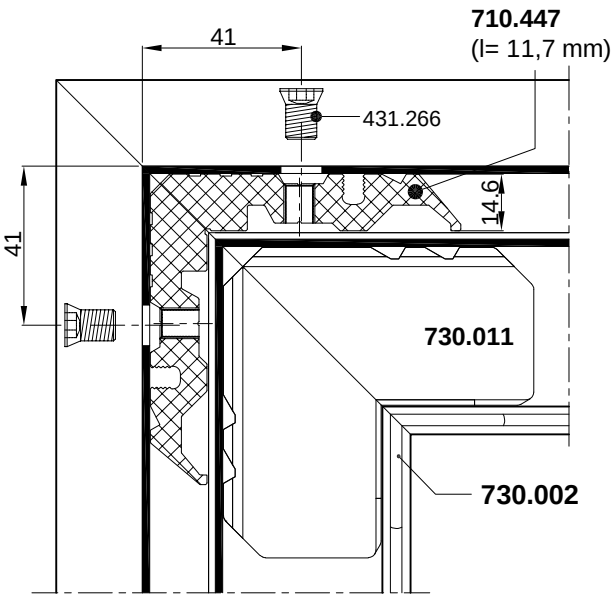

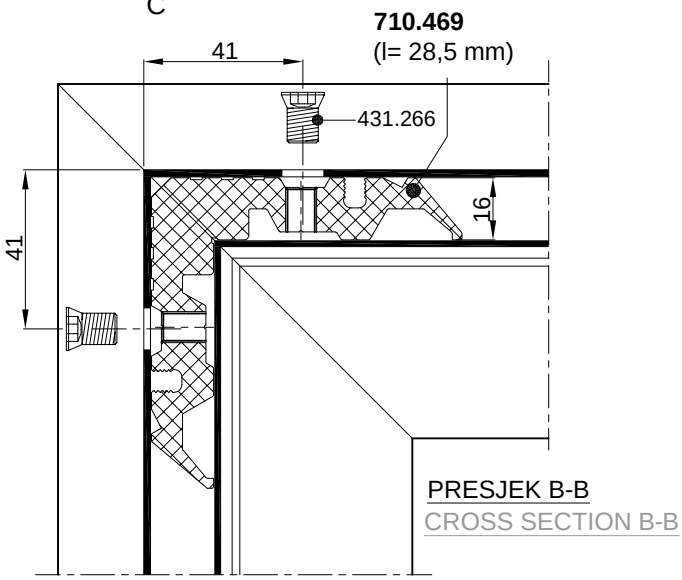

PRESJEK B-B
CROSS SECTION B-B


PRESJEK A-A
CROSS SECTION A-A

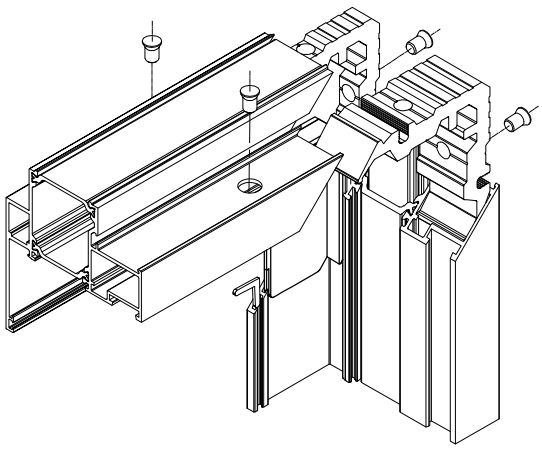


1. VIJČANA VEZA
1. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

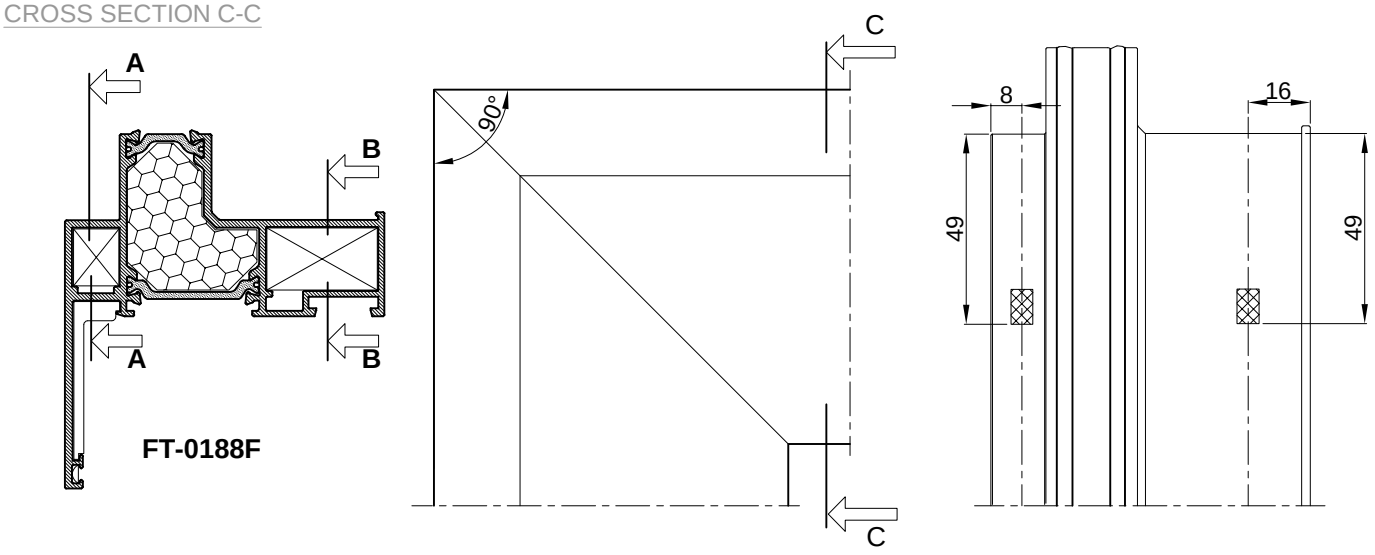


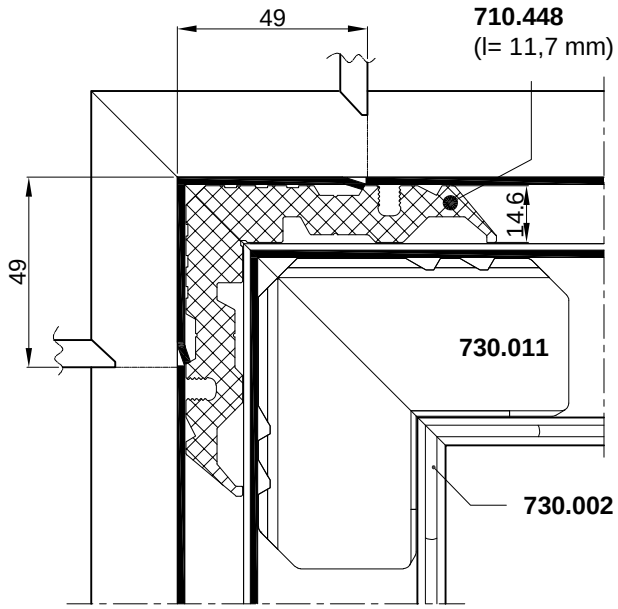

PRESJEK A-A
CROSS SECTION A-A

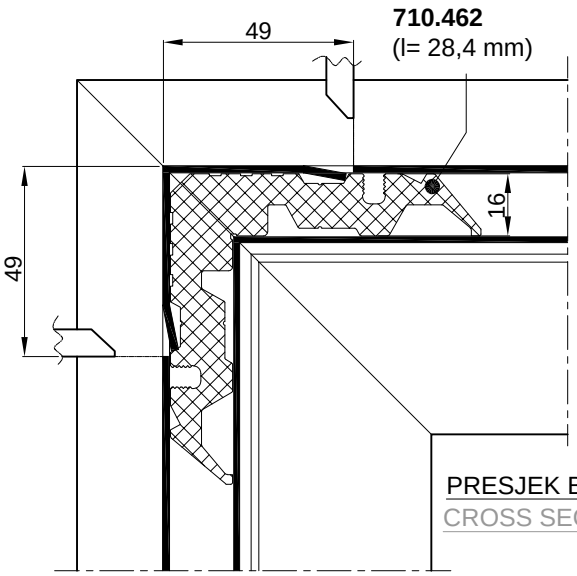

PRESJEK B-B
CROSS SECTION B-B

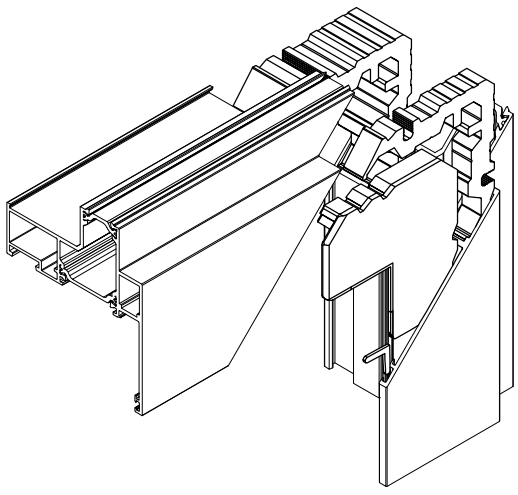


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION

PRESJEK C-C


CROSS SECTION C-C

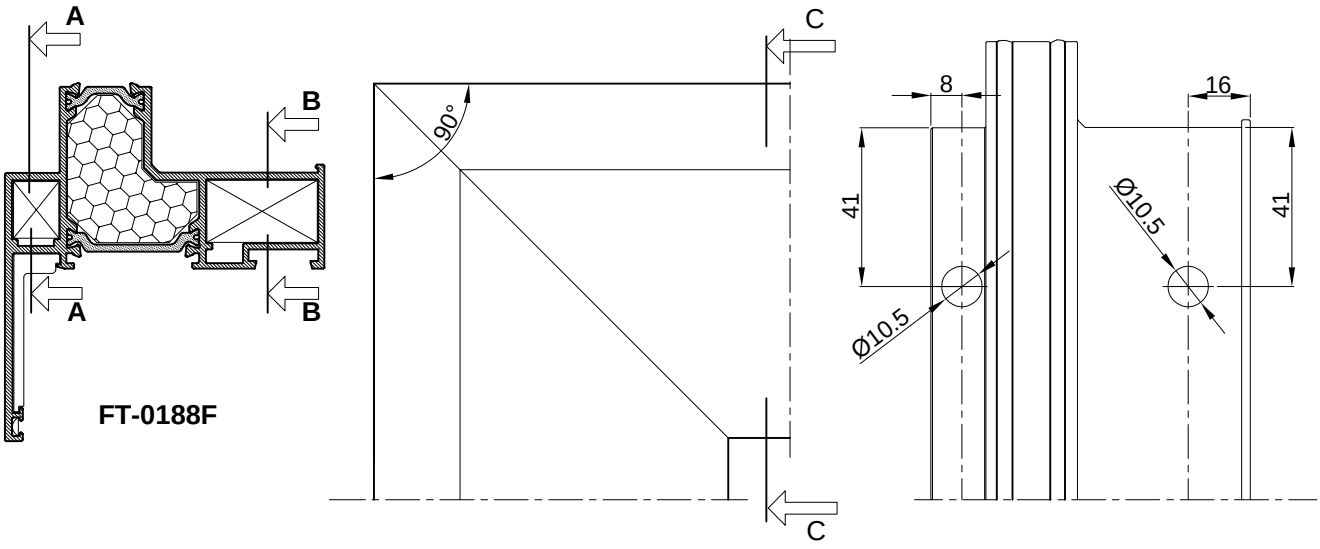

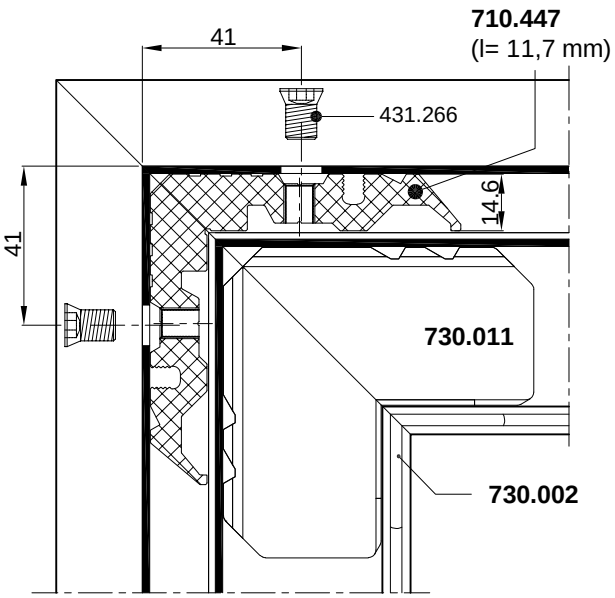


PRESJEK A-A

CROSS SECTION A-A

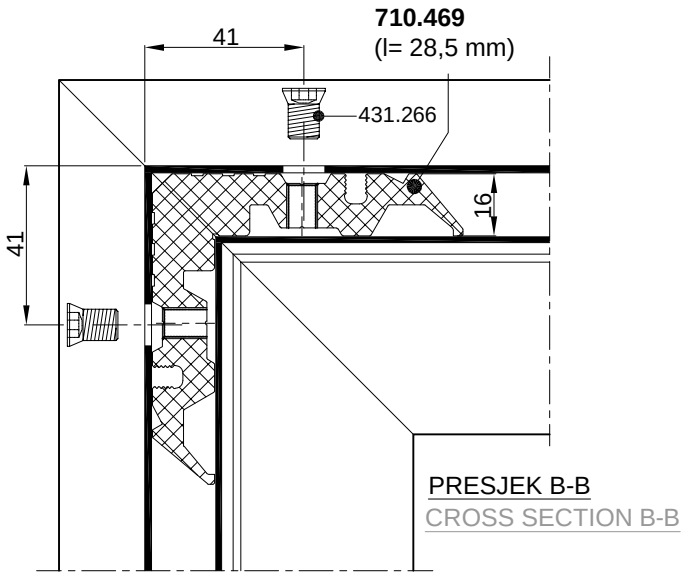

PRESJEK B-B


CROSS SECTION B-B

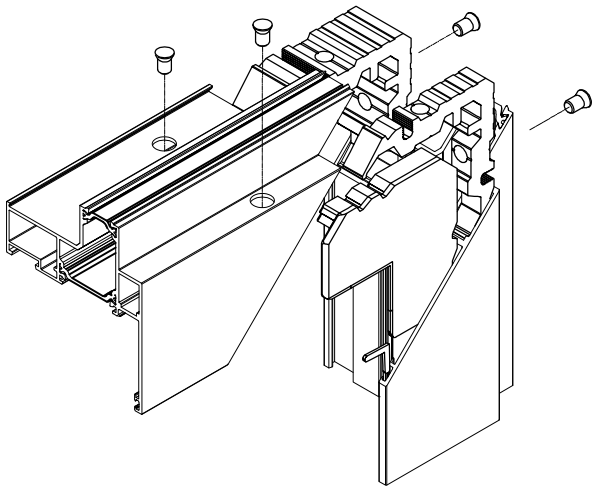


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C




FT-0148F
(krilo Termo 85sk)

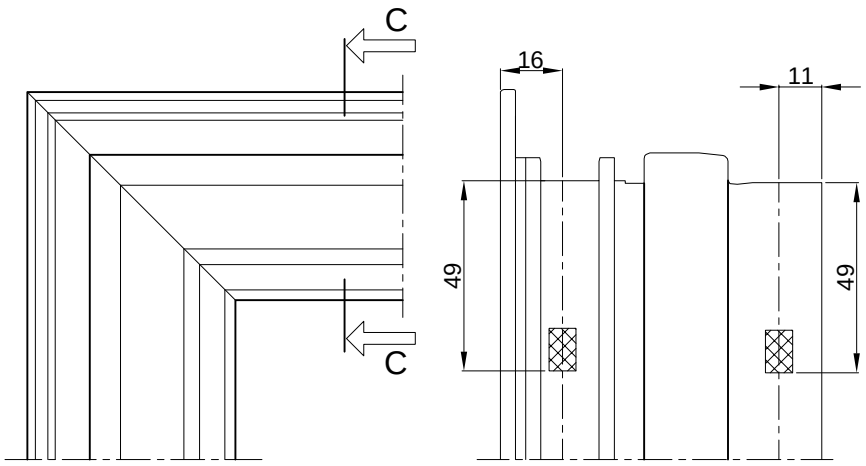


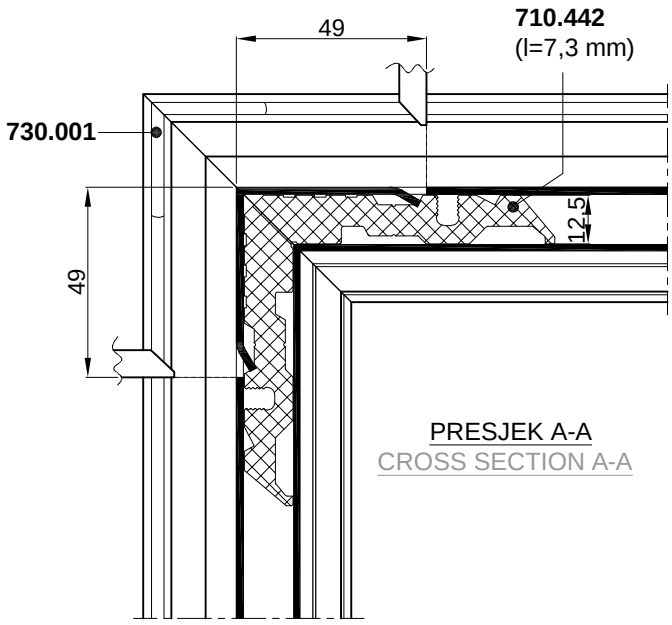

PRESJEK A-A
CROSS SECTION A-A

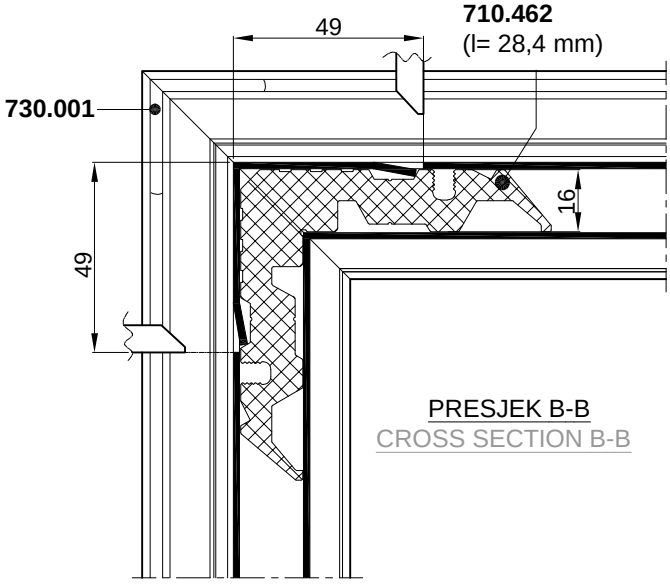


PRESJEK B-B
CROSS SECTION B-B

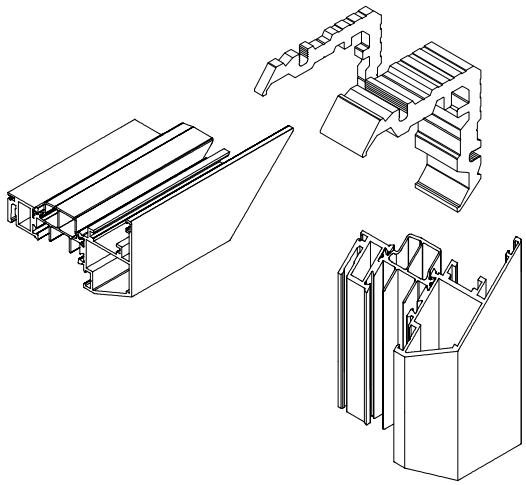


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE-
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C




FT-0148F
(krilo Termo 85sk)

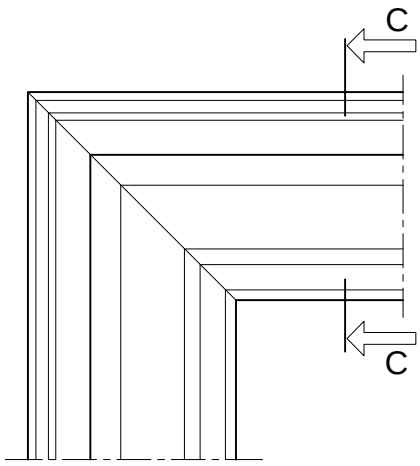

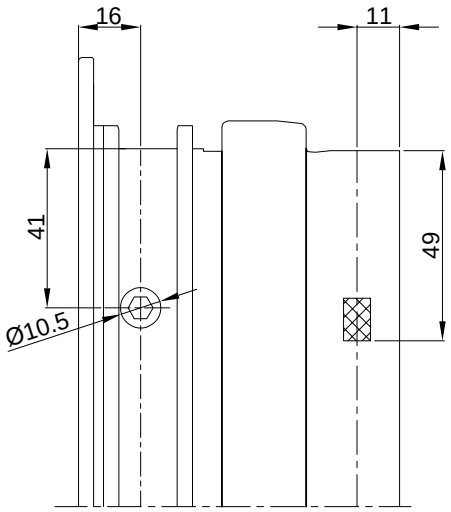


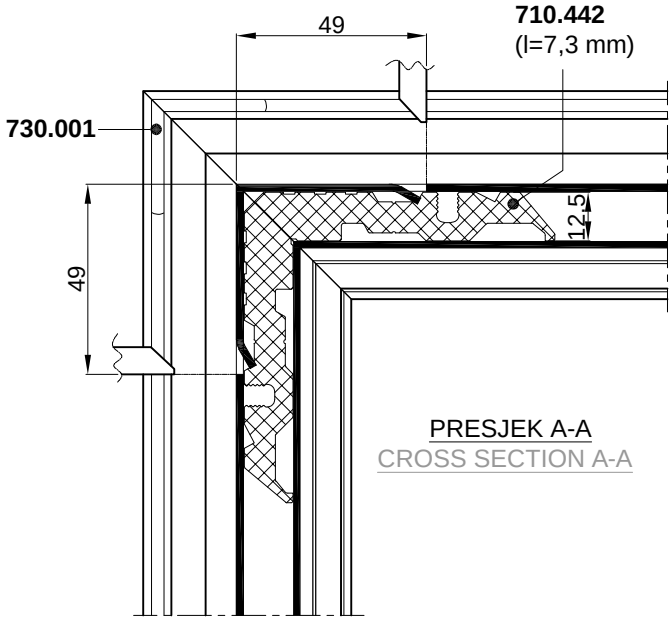

PRESJEK A-A
CROSS SECTION A-A

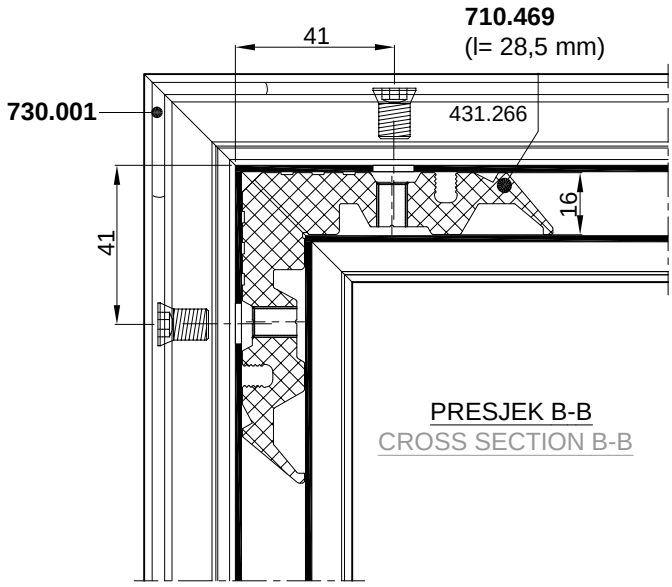


PRESJEK B-B
CROSS SECTION B-B

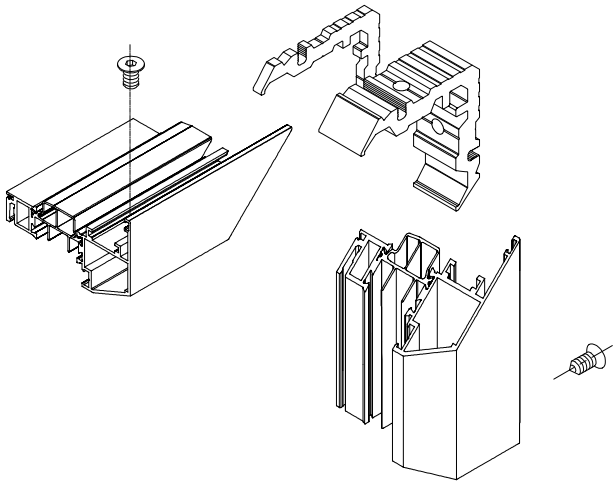

1. STROJNO UPREŠAVANJE
2. RUČNO
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

SPAJANJE PROFILA FT-1403F KUTNICIMA; 710.592 i 725.032
CONNECTION OF PROFILES FT-1403F WITH CORNER BRACKETS; 710.592 i 725.032

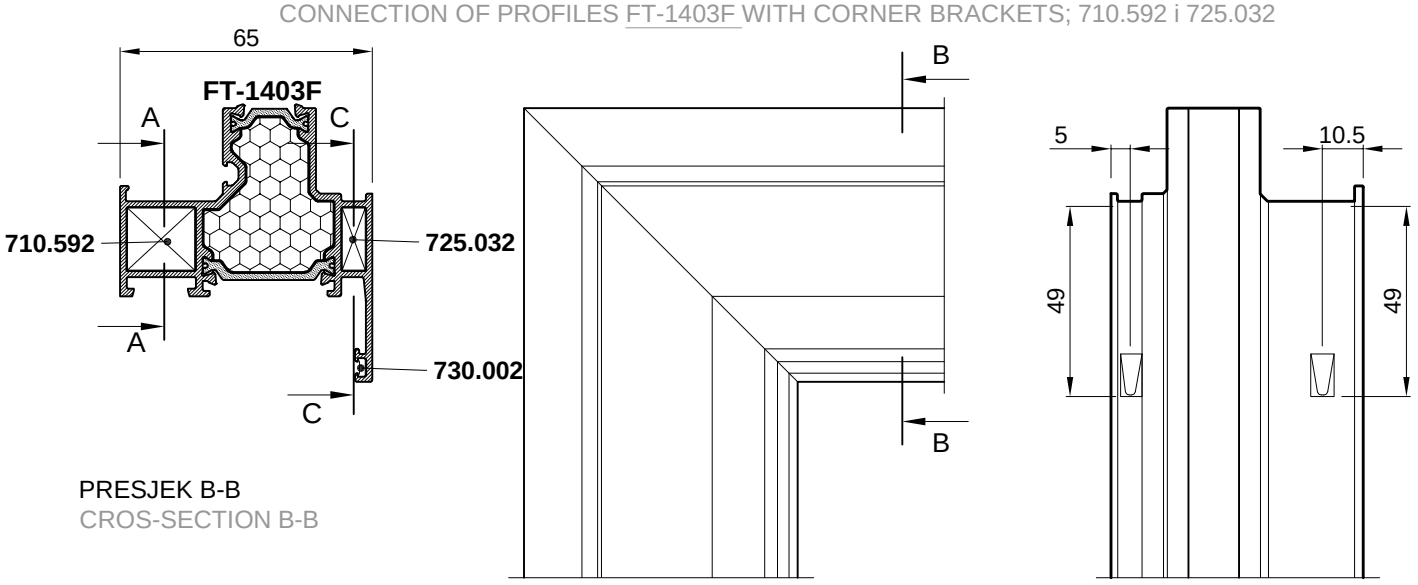


PRESJEK B-B
CROS-SECTION B-B

Spajanje kutnikom 710.592 uprešavanjem stijenke profila prema kutniku
Corn. brac. connection 710.592 aluminium profile corner crimping

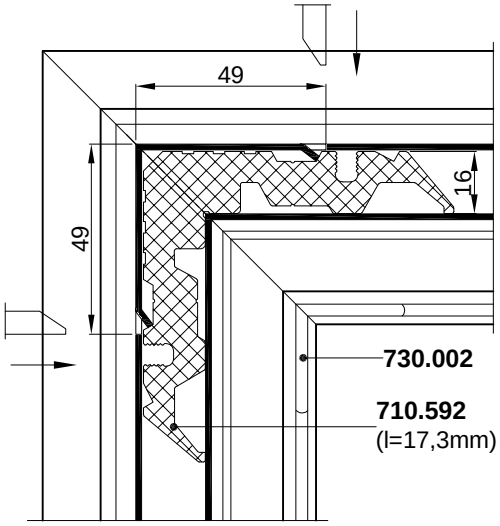


PRESJEK A-A
CROSS SECTION A-A

Spajanje kutnikom 725.032 uprešavanjem stijenke profila prema kutniku
Corn. brac. connection 725.032 aluminium profile corner crimping

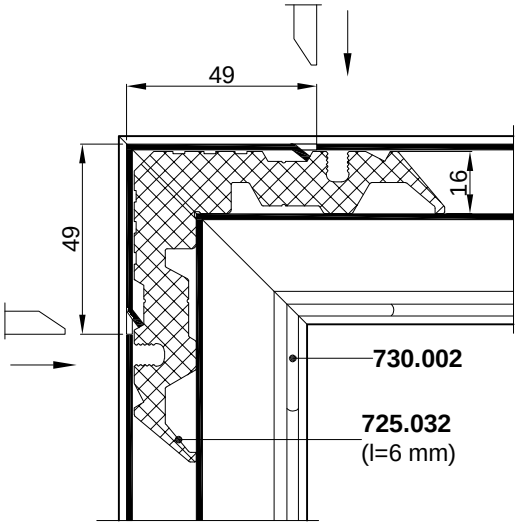



PRESJEK C-C
CROSS SECTION C-C

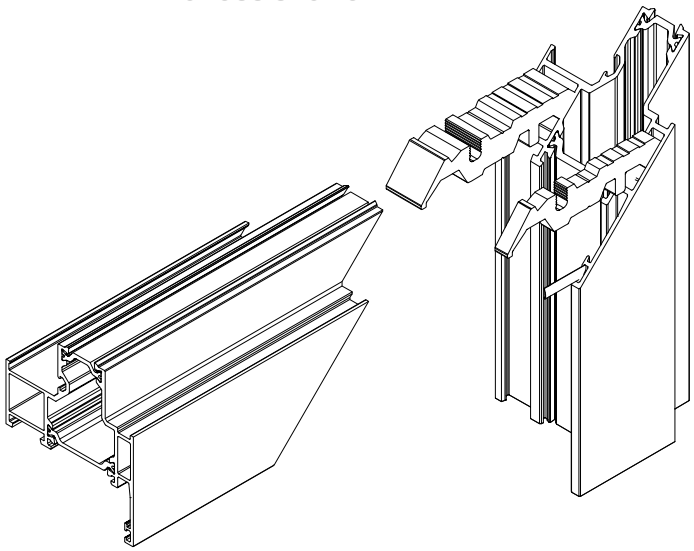


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE-
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

SPAJANJE PROFILA FT-1403F KUTNICIMA; 710.593 i 725.032
CONNECTION OF PROFILES FT-1403F WITH CORNER BRACKETS; 710.593 i 725.032

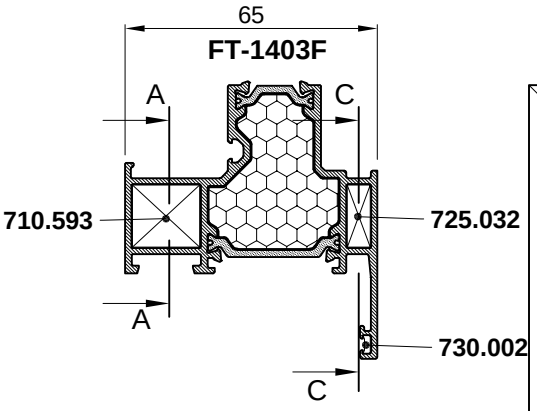


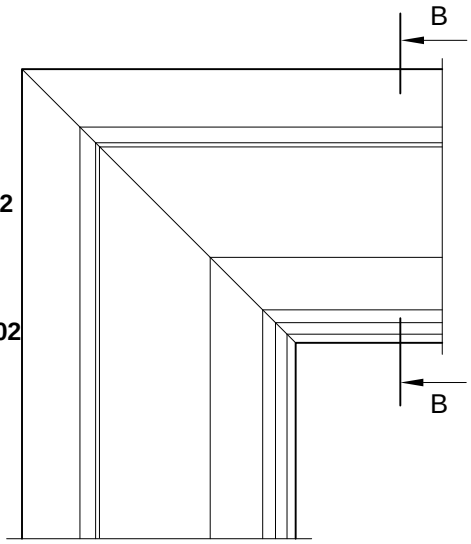

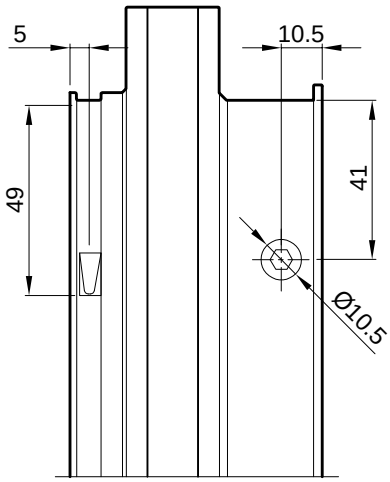


PRESJEK B-B
CROS-SECTION B-B

Spajanje kutnikom 710.593
vijcima M8x13 *-tip Feal-(štanca)*
Corner bracket connection 710.593
screws M8x13 *-type Feal-(punch)*

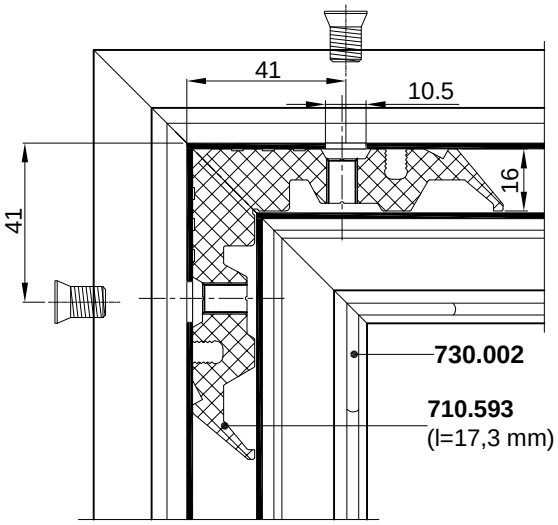


Spajanje kutnikom 725.032
uprešavanjem stijenke profila
prema kutniku
Corn. brac. connection 725.032
aluminium profile corner
crimping

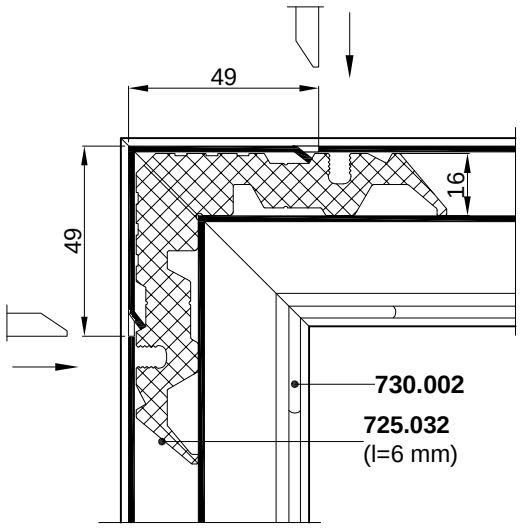

PRESJEK A-A
CROSS SECTION A-A

PRESJEK C-C
CROSS SECTION C-C

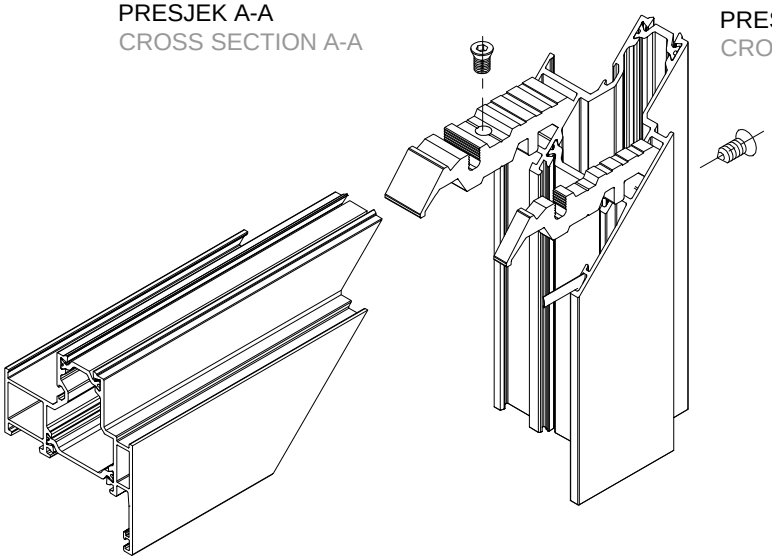


1. STROJNO UPREŠAVANJE
2. RUČNO
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

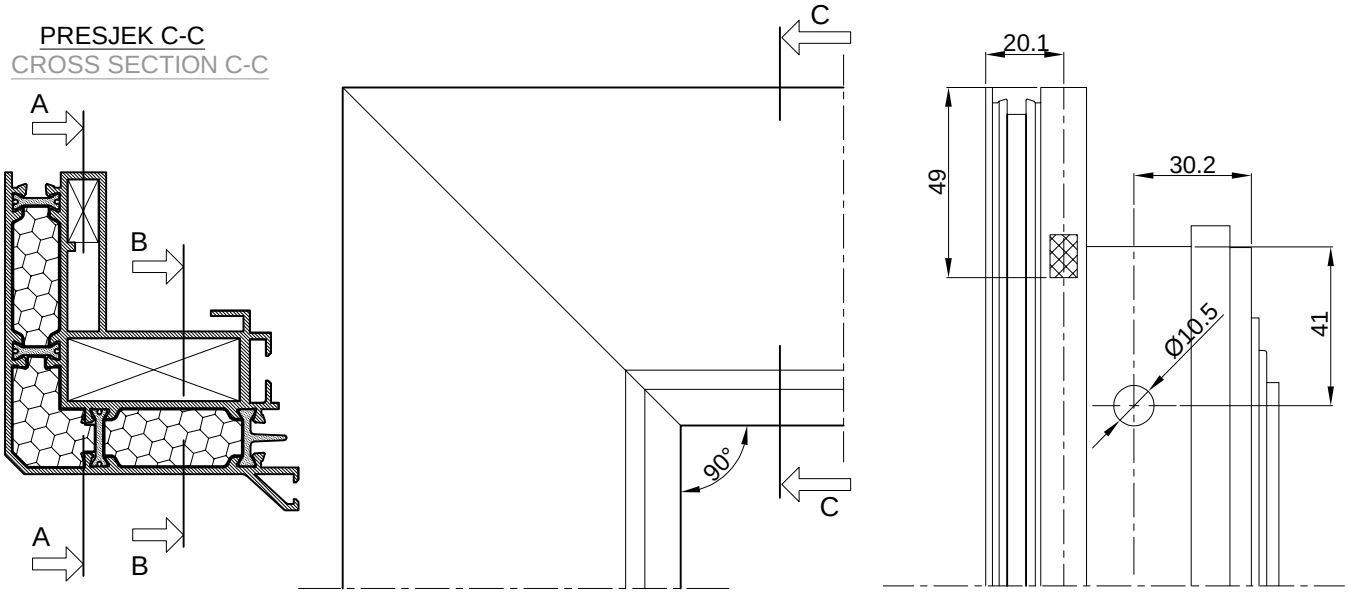


FT-0125F

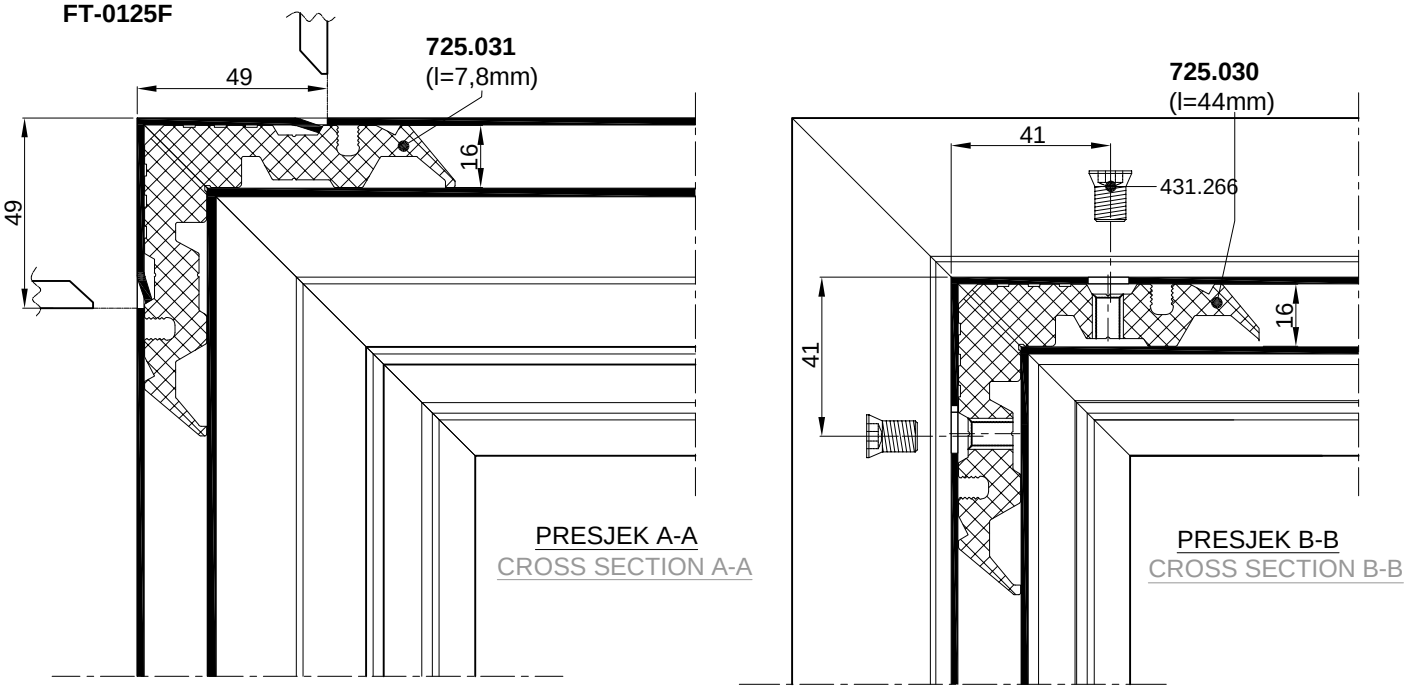

PRESJEK A-A
CROSS SECTION A-A

PRESJEK B-B
CROSS SECTION B-B

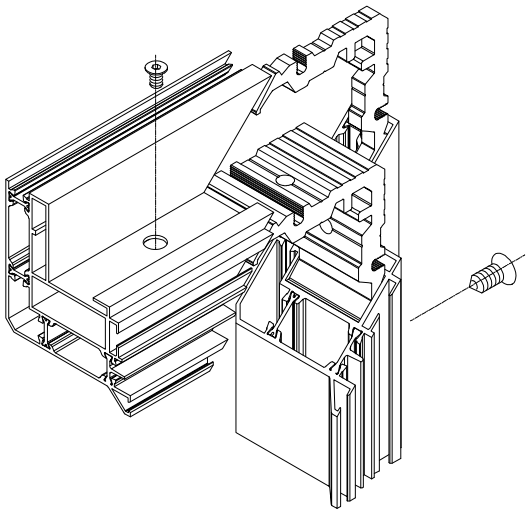



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION


PRESJEK C-C
CROSS SECTION C-C

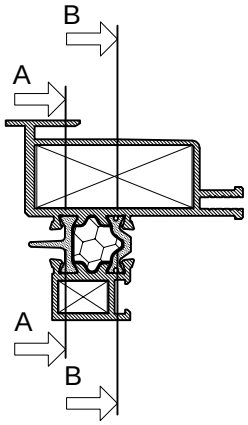

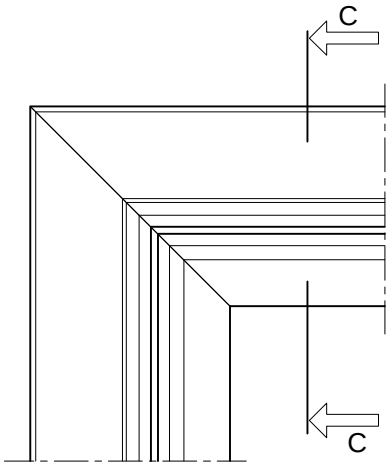


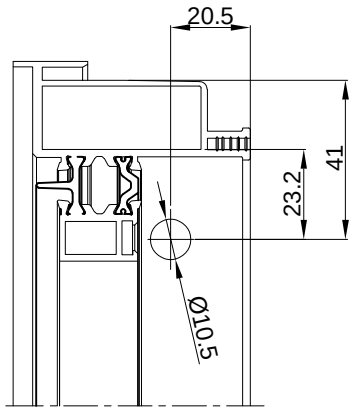


FT-0124F

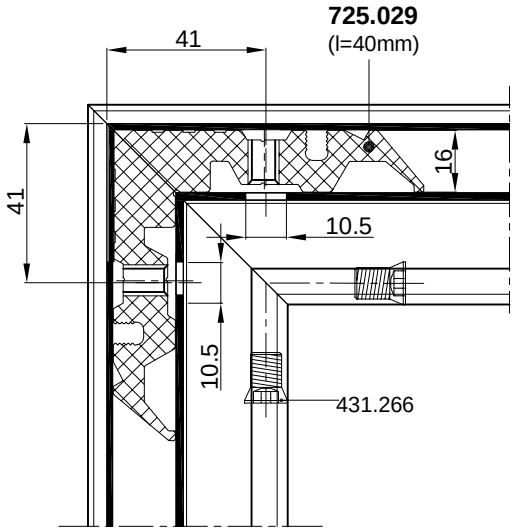

PRESJEK A-A
CROSS SECTION A-A

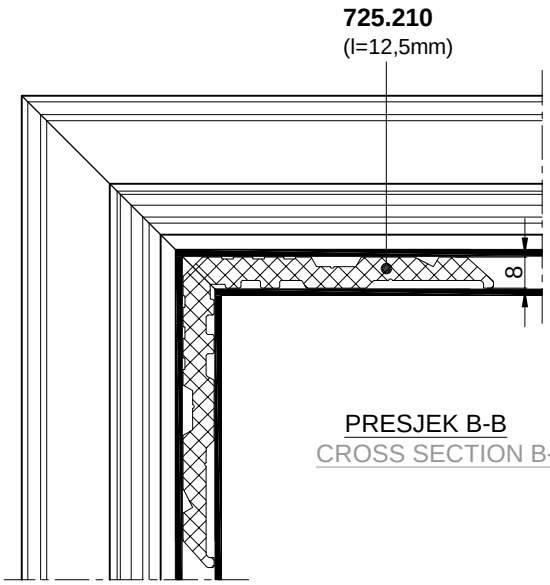


PRESJEK B-B
CROSS SECTION B-B

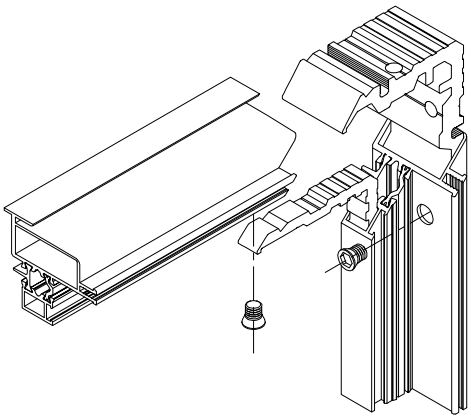


1. VIJČANA VEZA
1. SCREW CONNECTION

- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION

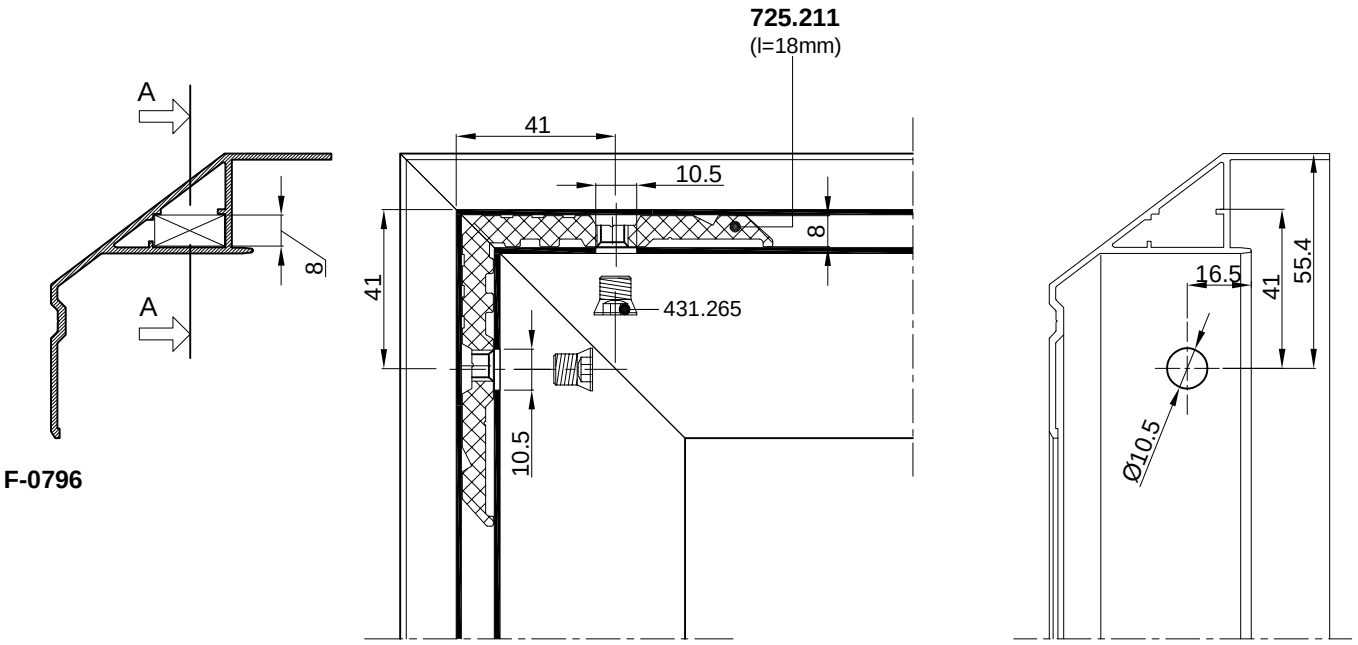


PRESJEK A-A
CROSS SECTION A-A

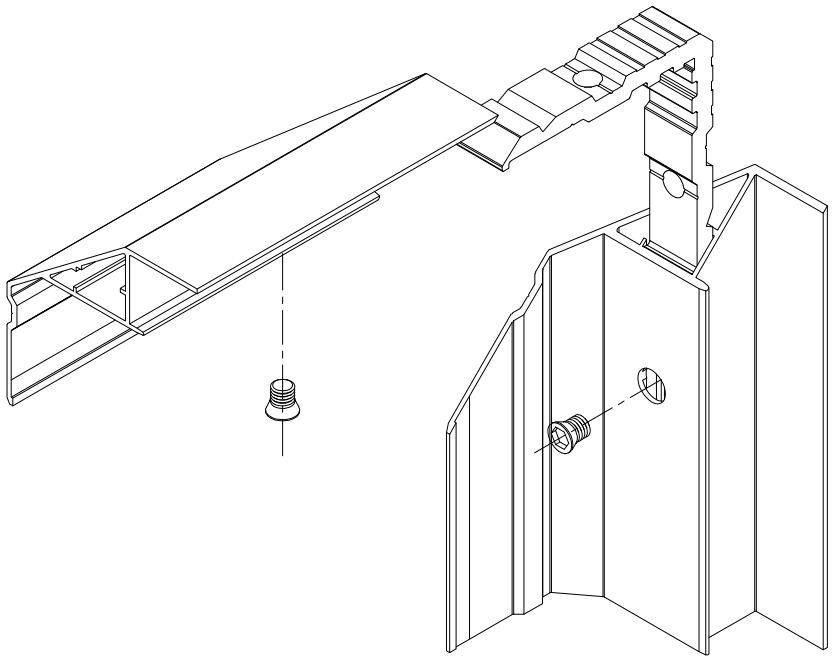


1. VIJČANA VEZA
1. SCREW CONNECTION


- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION

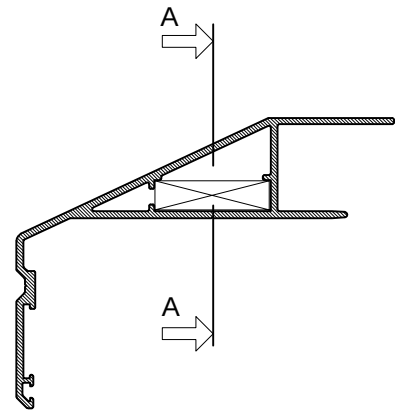


F-1572

725.708
(l=29.3 mm)

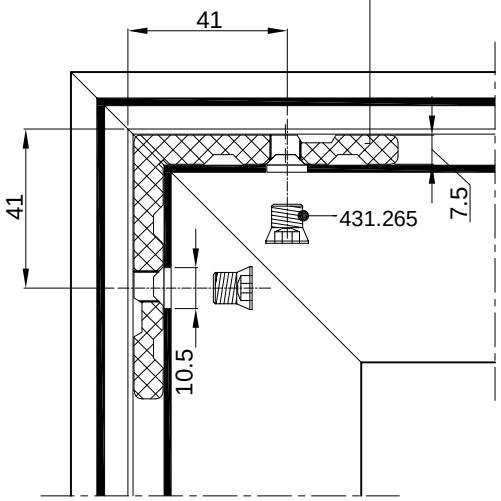

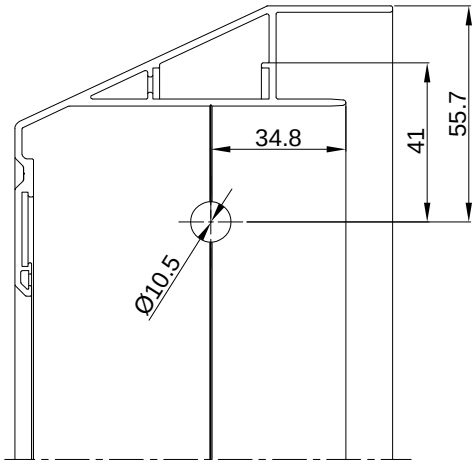


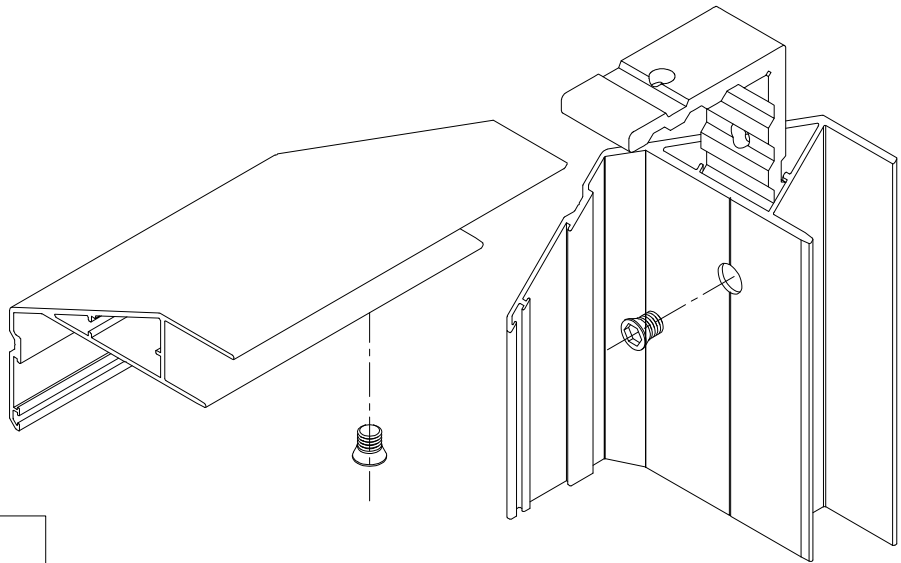



1. VIJČANA VEZA
1. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

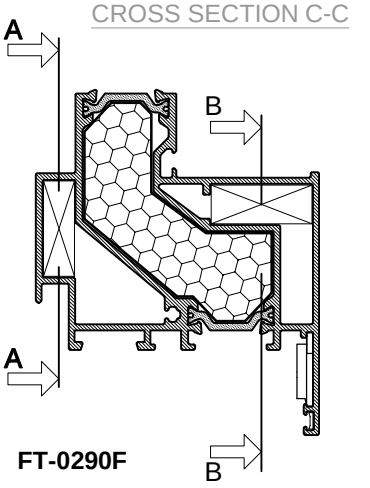


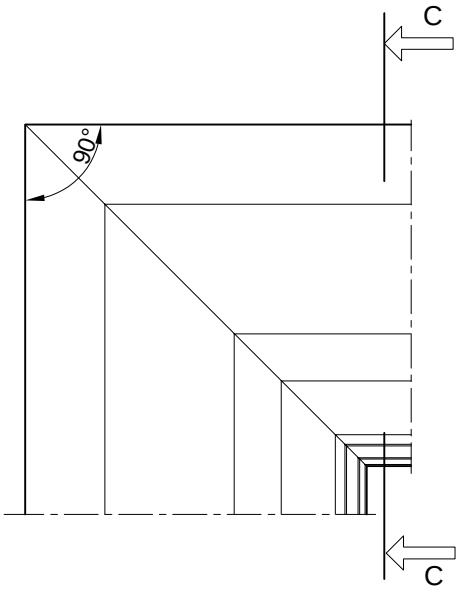

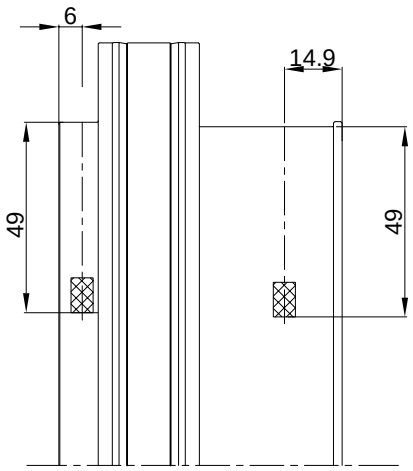


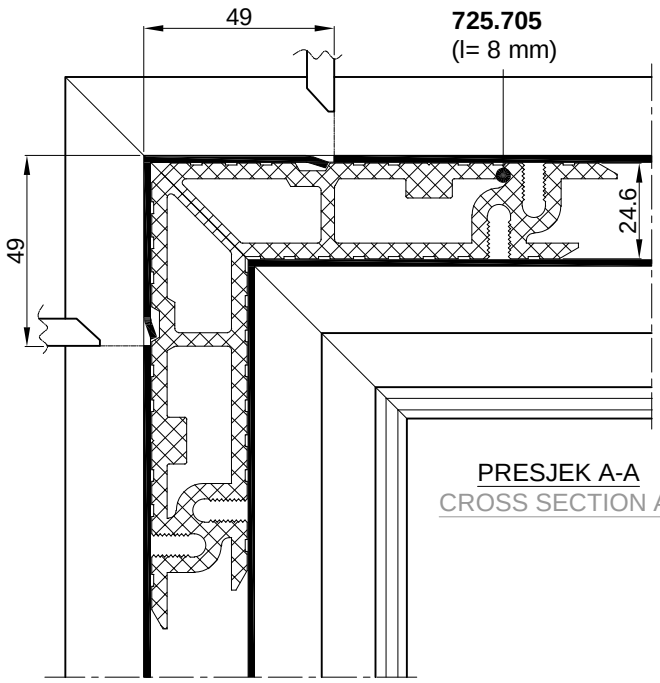

PRESJEK A-A
CROSS SECTION A-A

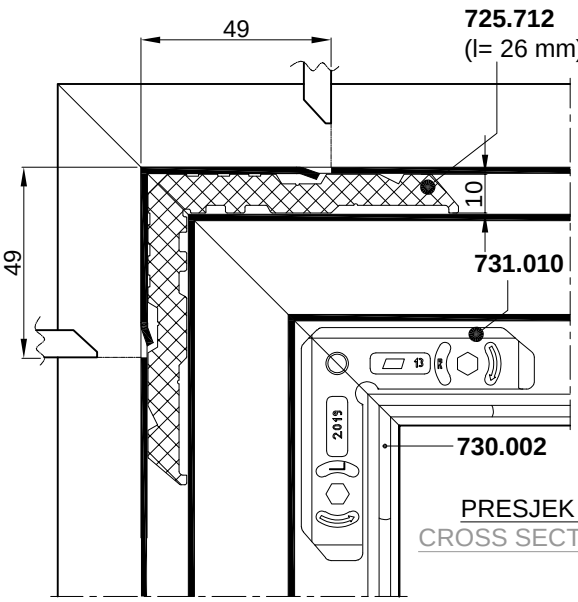

PRESJEK B-B
CROSS SECTION B-B

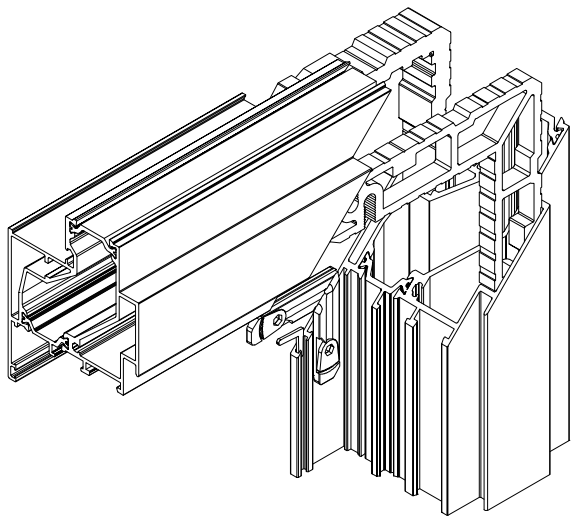



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

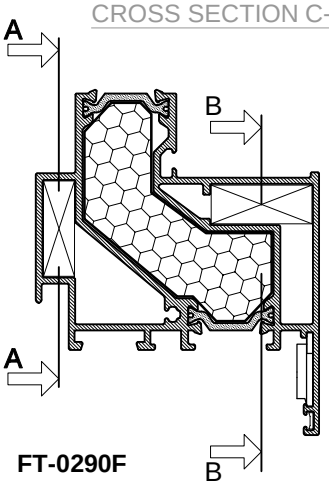


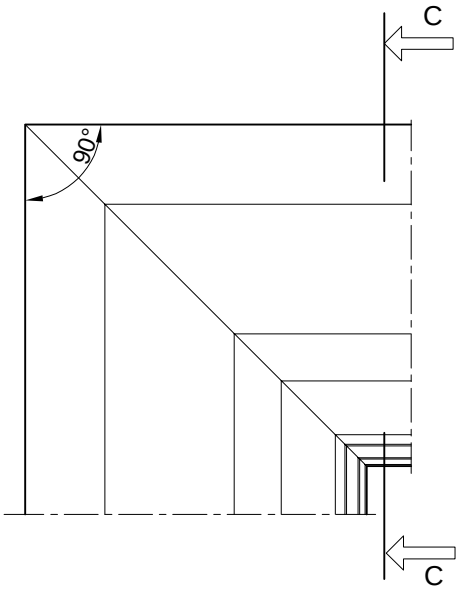

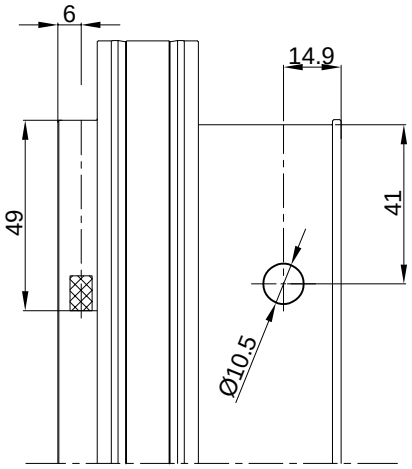


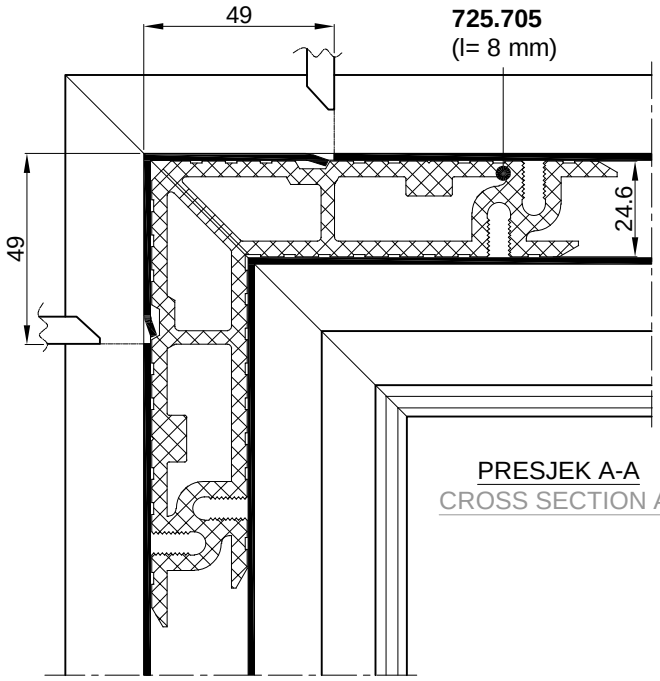

PRESJEK A-A
CROSS SECTION A-A

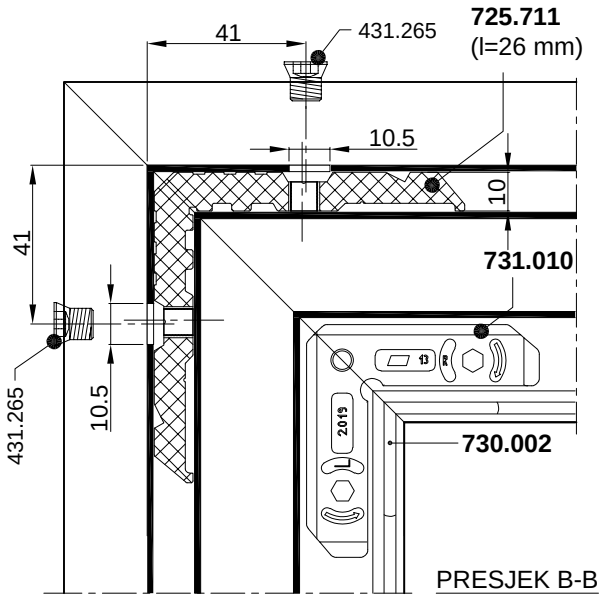


PRESJEK B-B
CROSS SECTION B-B

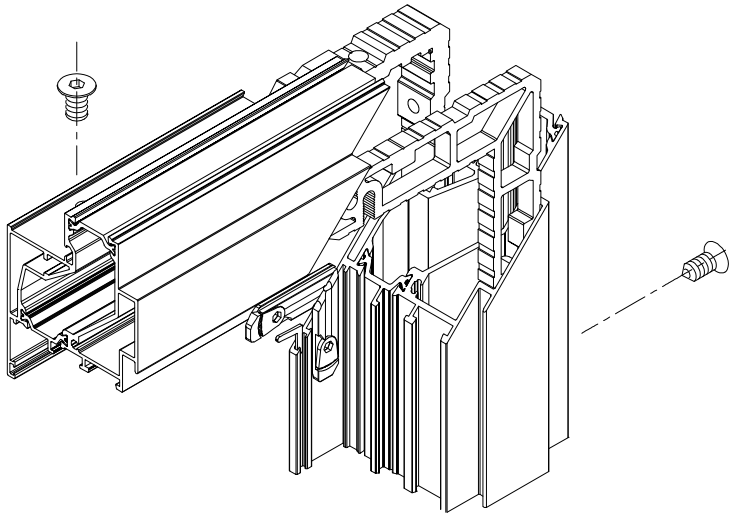


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

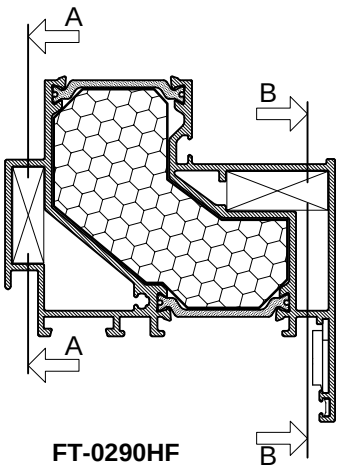


FT-0290HF

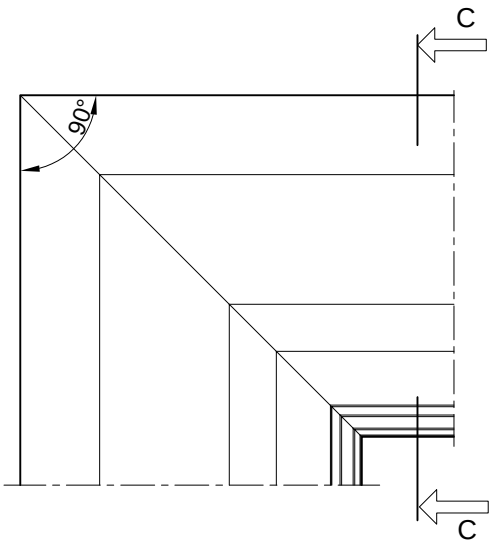

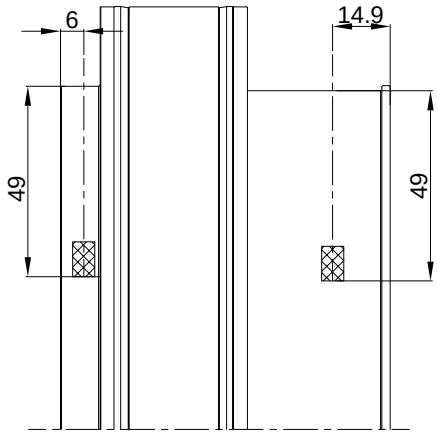


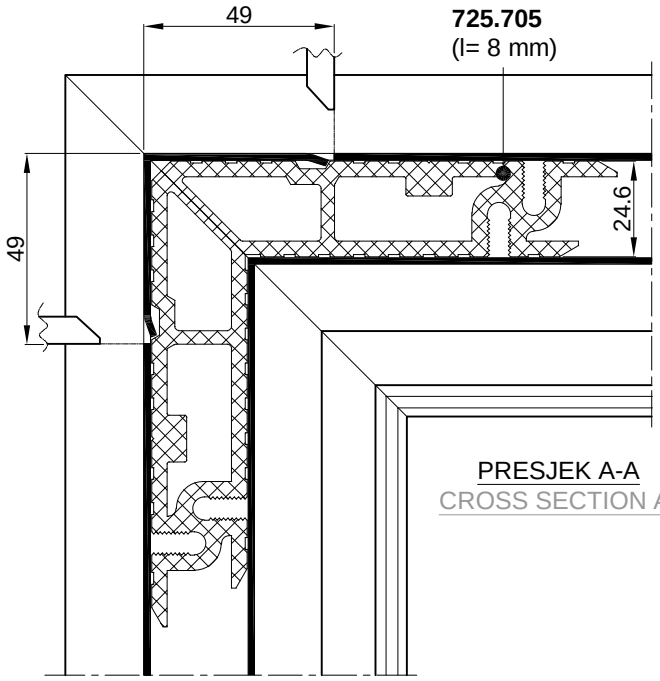

PRESJEK A-A
CROSS SECTION A-A

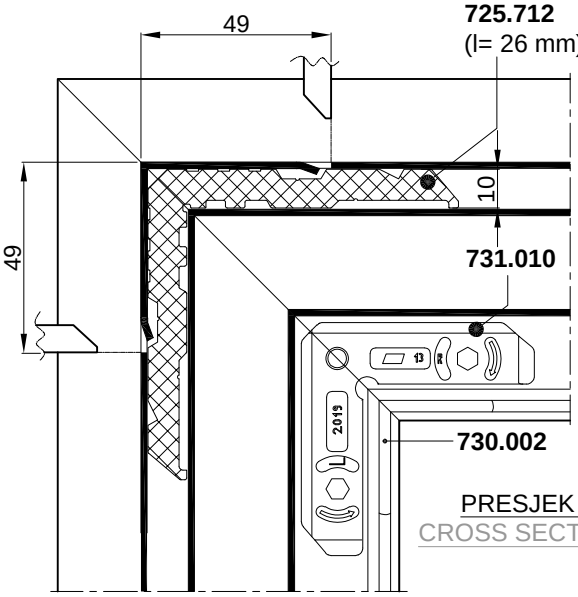

PRESJEK B-B
CROSS SECTION B-B

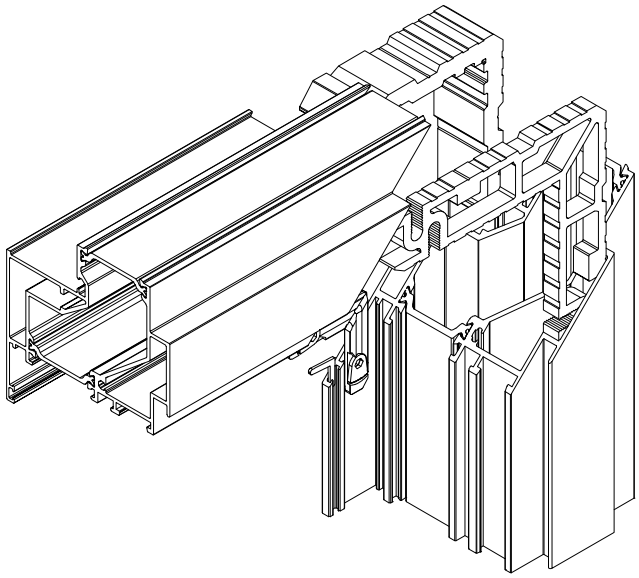



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

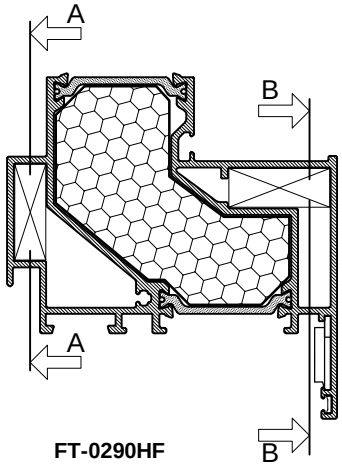


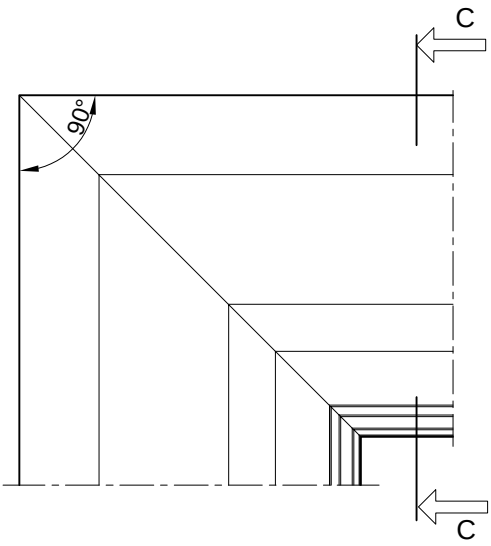

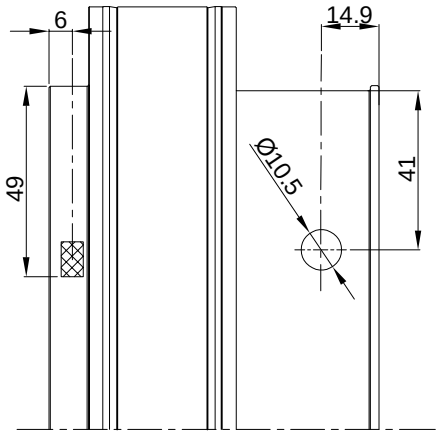


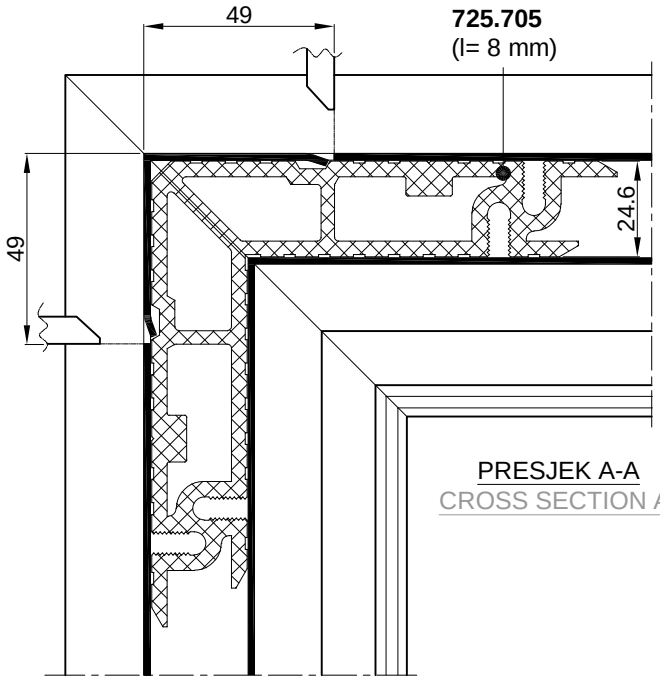

PRESJEK A-A
CROSS SECTION A-A

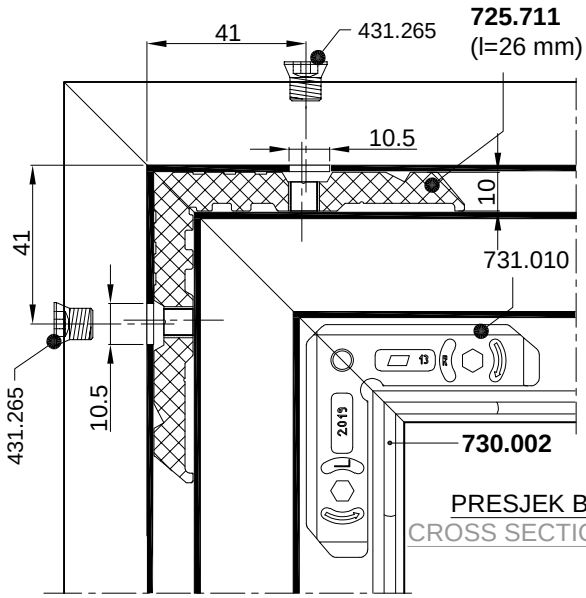

PRESJEK B-B
CROSS SECTION B-B

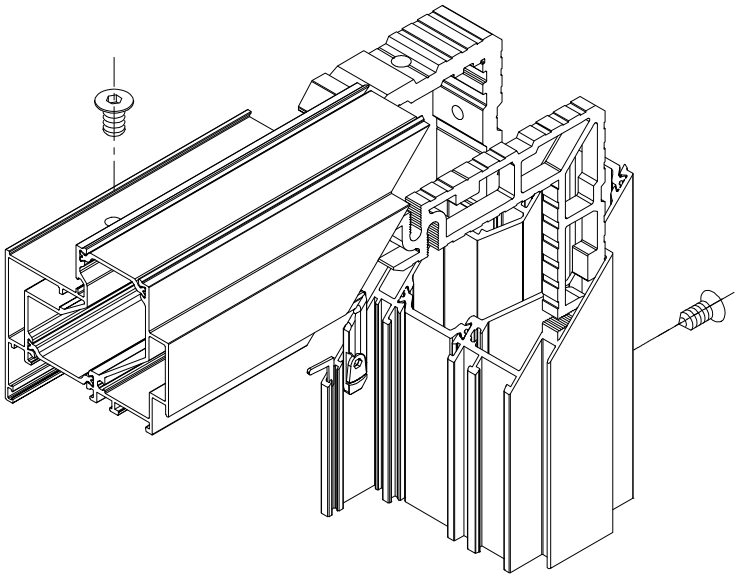


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

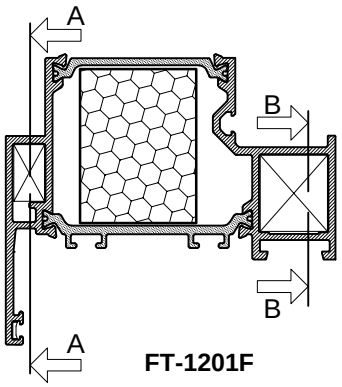


FT-1201F

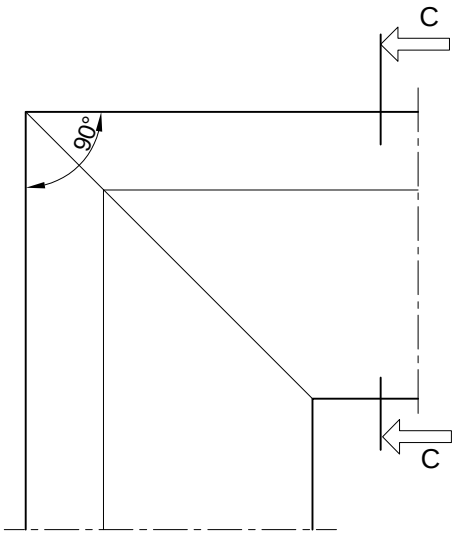

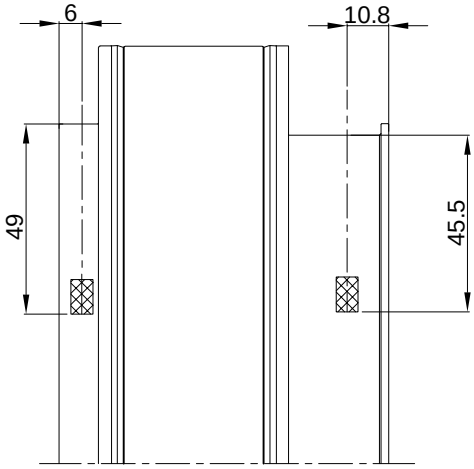


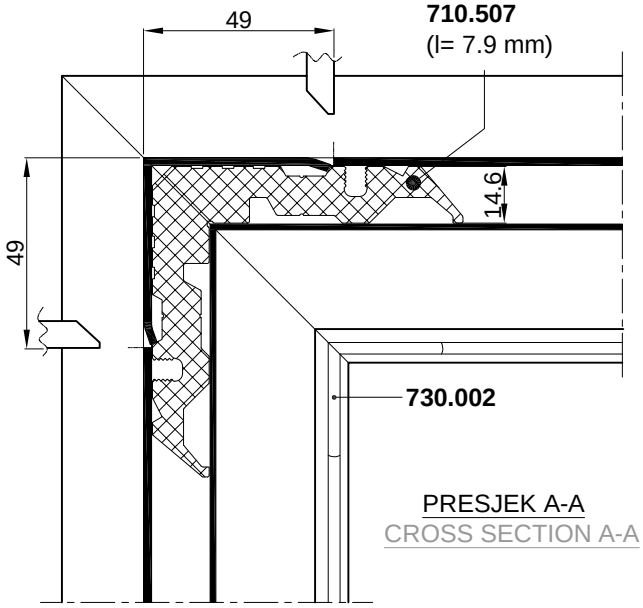

PRESJEK A-A
CROSS SECTION A-A

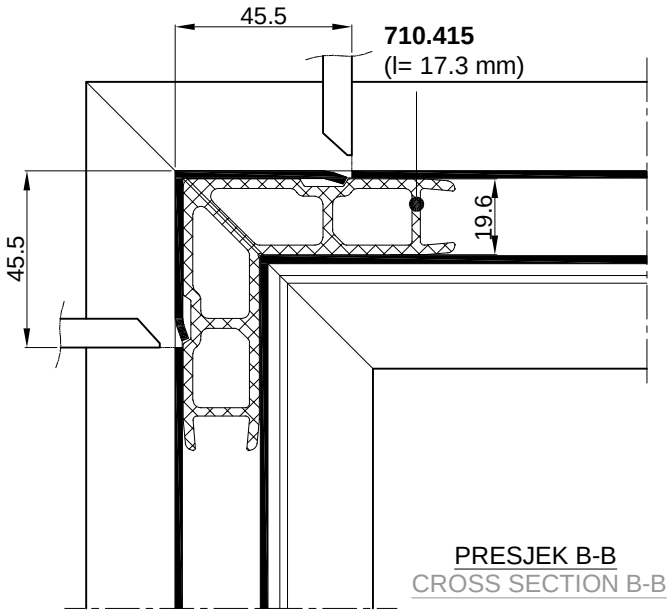


PRESJEK B-B
CROSS SECTION B-B

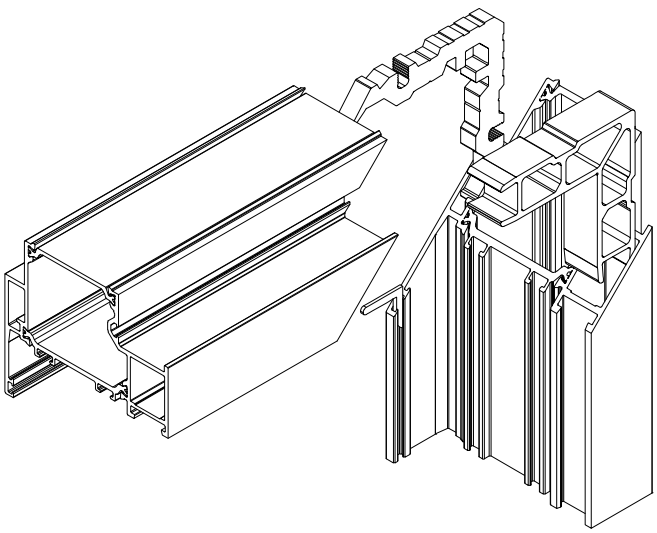



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

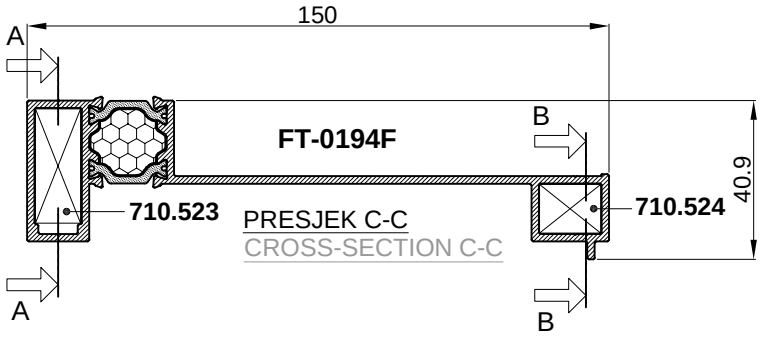

PRESJEK C-C
CROSS-SECTION C-C

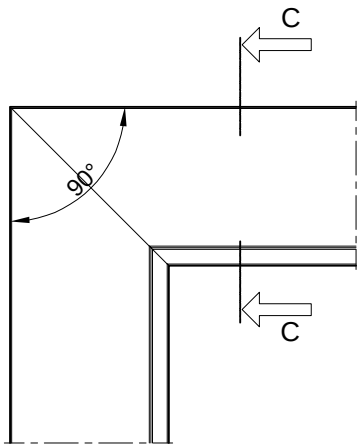


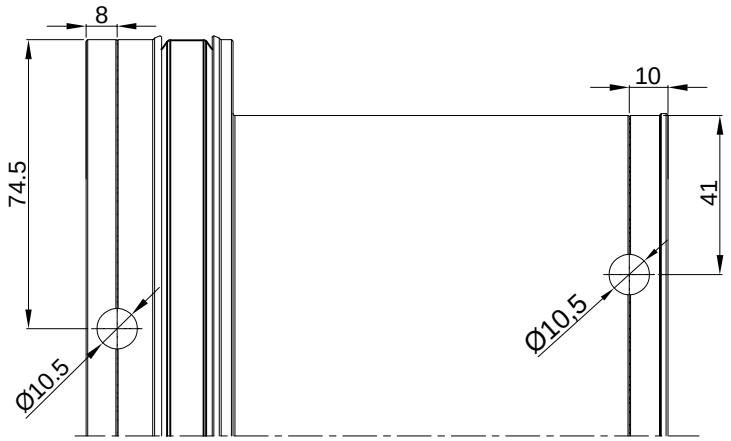

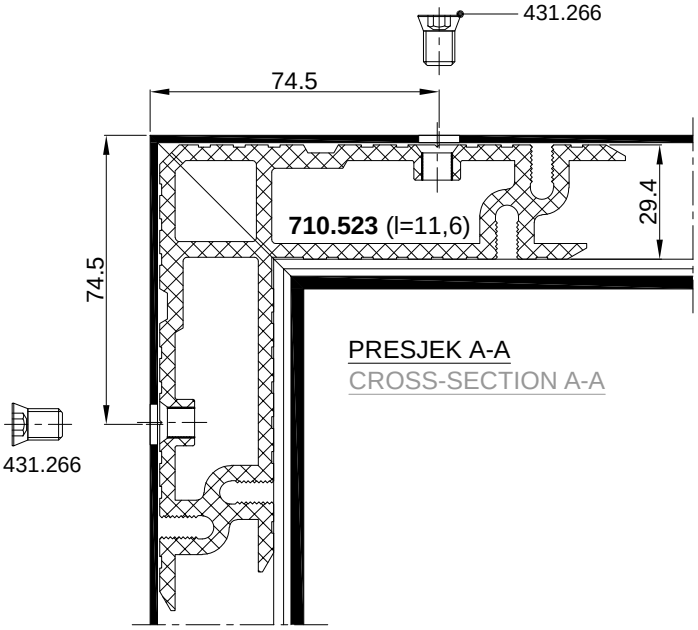



PRESJEK A-A
CROSS-SECTION A-A

1. VIJČANA VEZA
1. SCREW CONNECTION

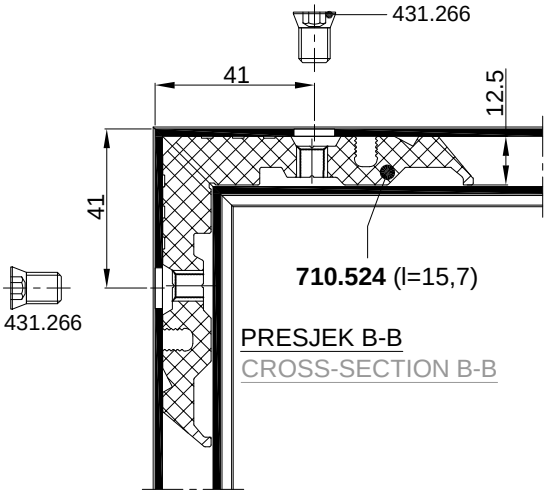



PRESJEK B-B
CROSS-SECTION B-B

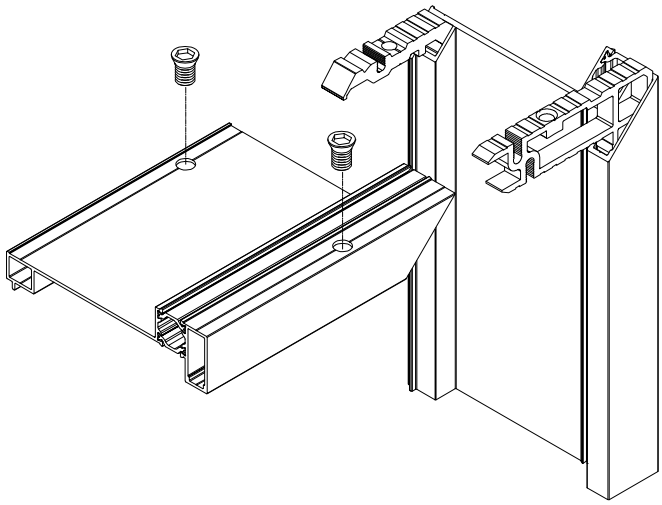

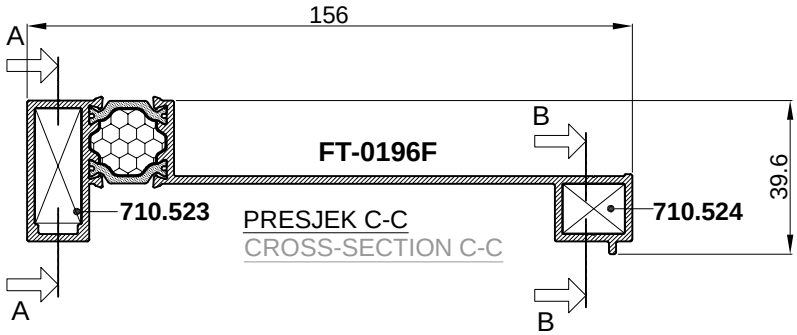


PRESJEK C-C
CROSS-SECTION C-C

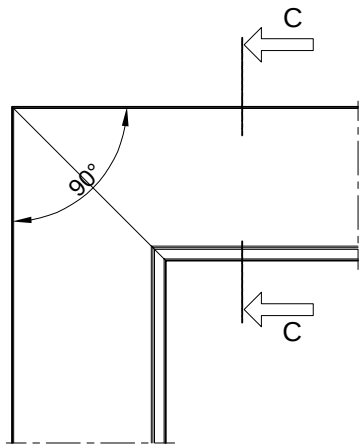


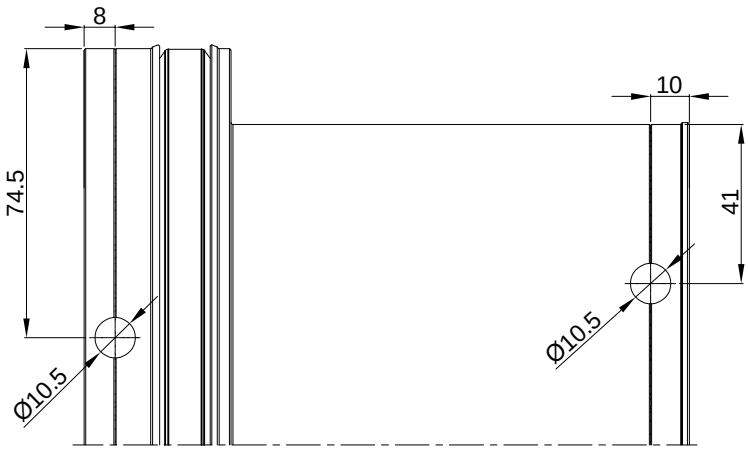


PRESJEK A-A
CROSS-SECTION A-A

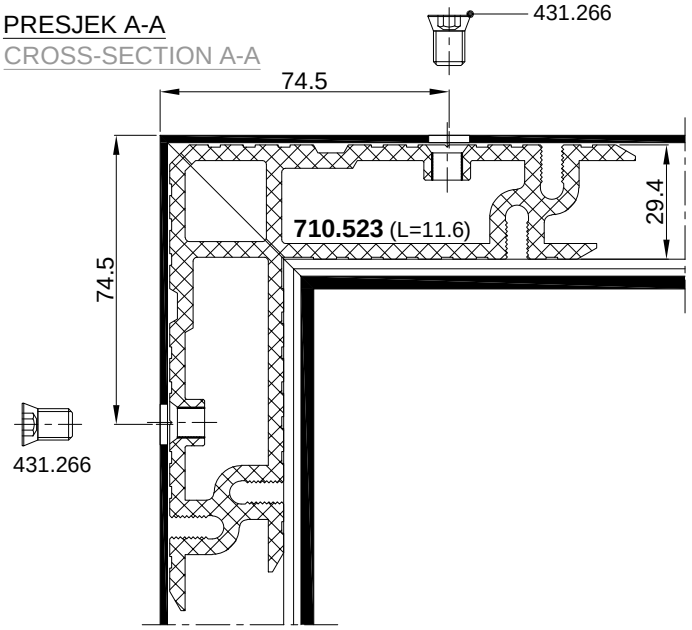



1. VIJČANA VEZA
1. SCREW CONNECTION

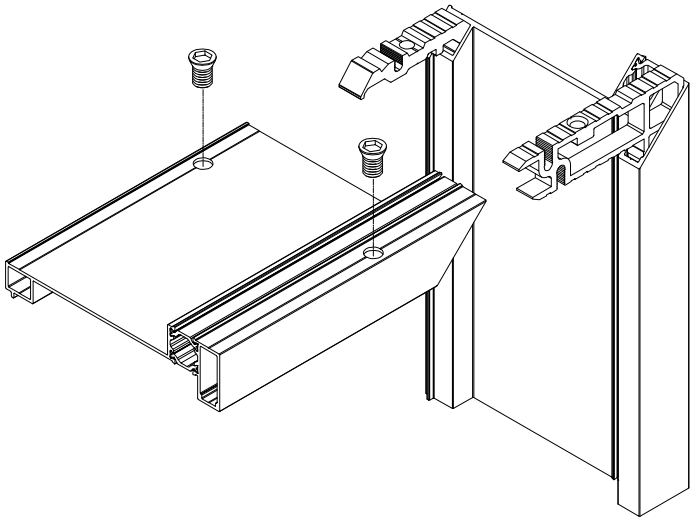


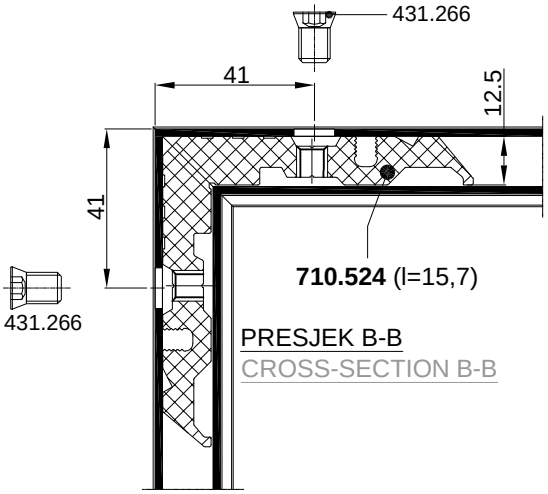


PRESJEK B-B
CROSS-SECTION B-B

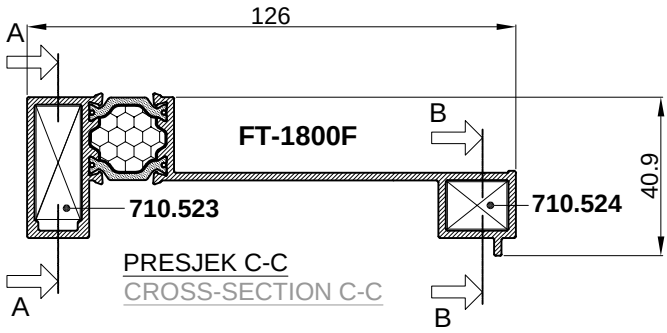


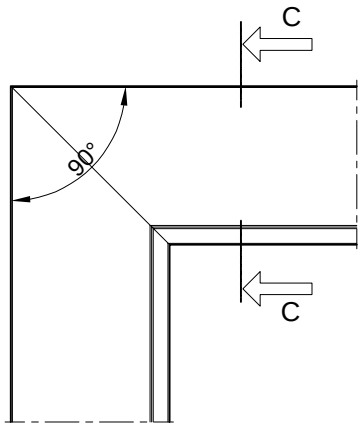


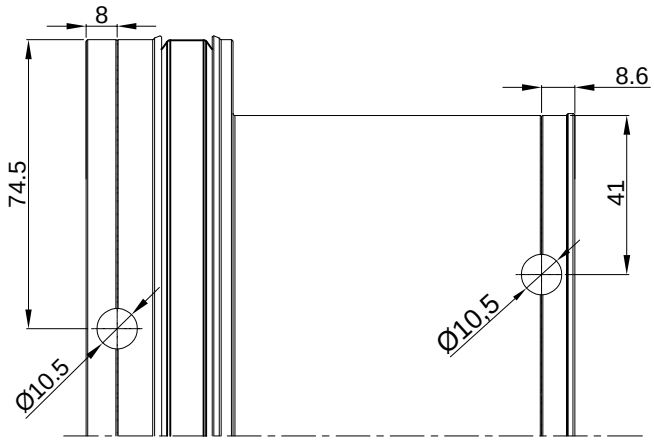


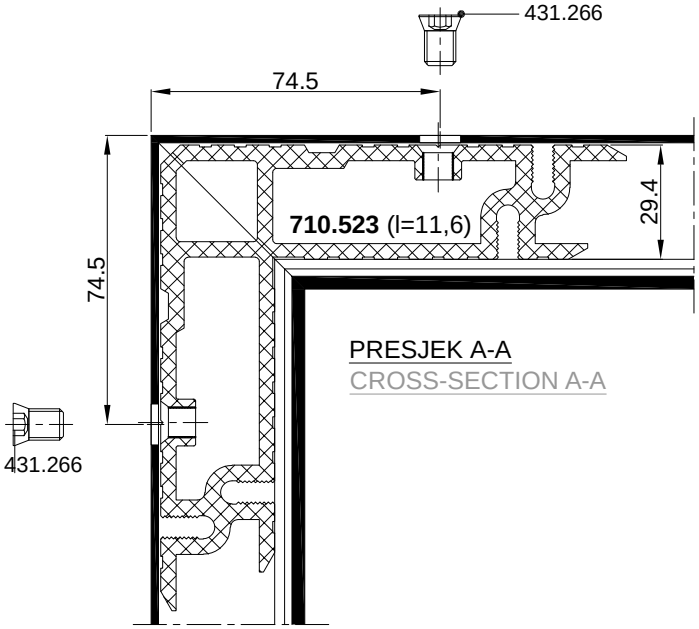


1. VIJČANA VEZA
1. SCREW CONNECTION

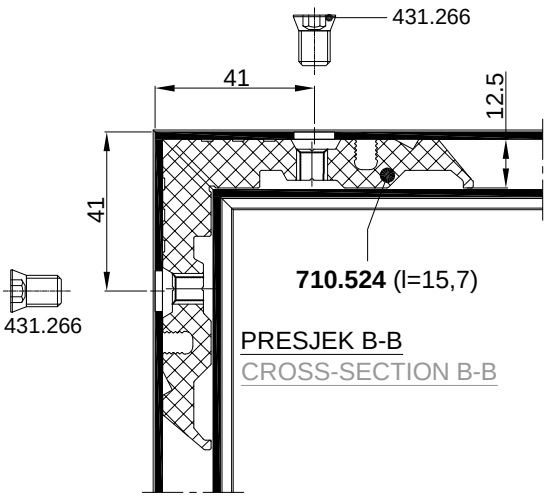


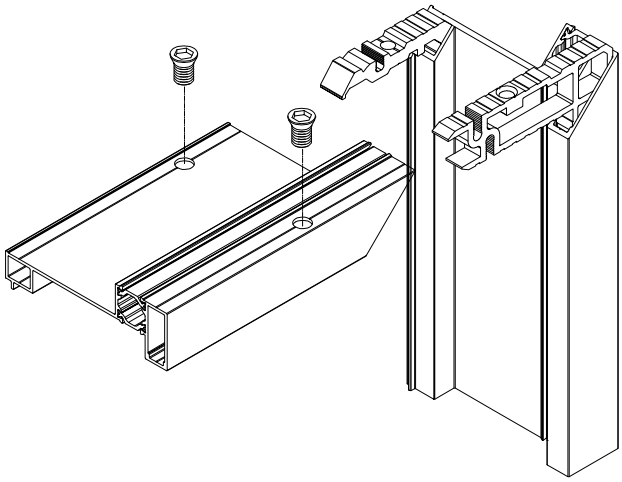

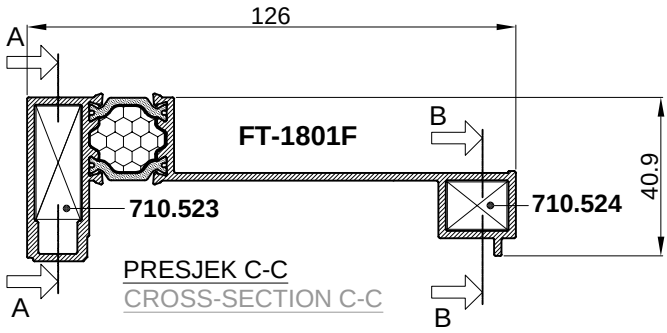


PRESJEK C-C
CROSS-SECTION C-C

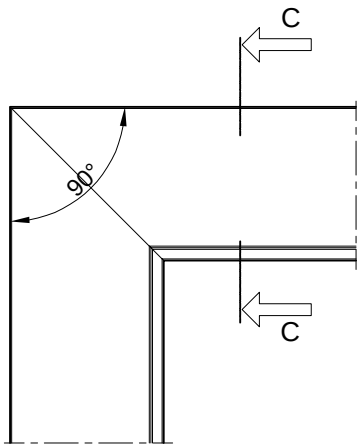


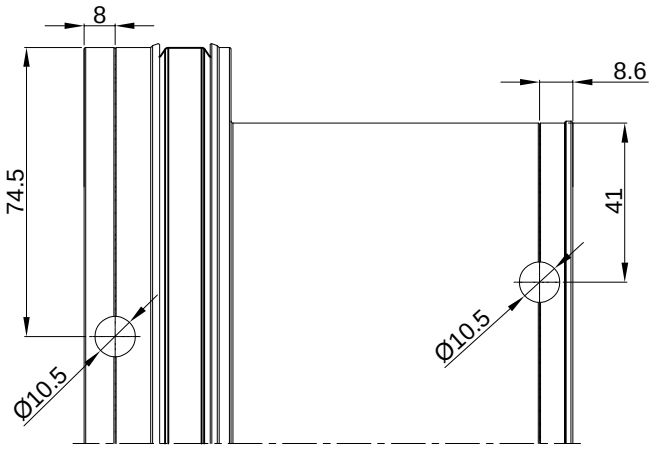


PRESJEK A-A
CROSS-SECTION A-A

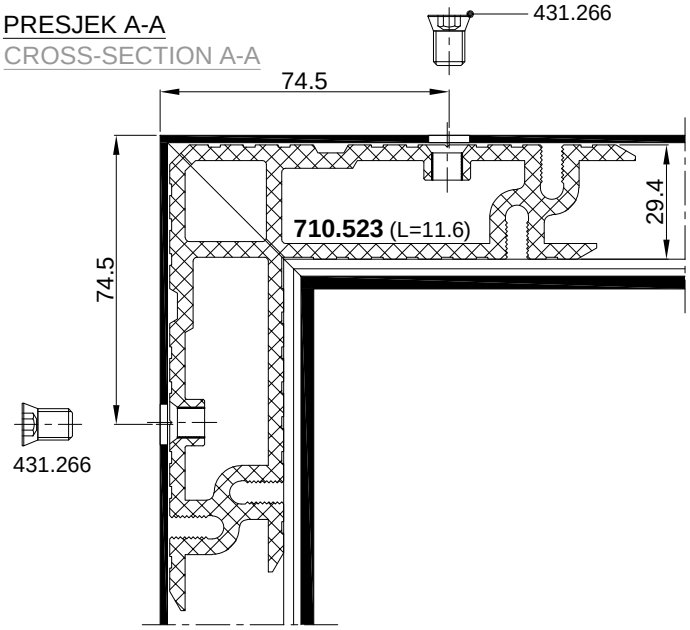

1. VIJČANA VEZA
1. SCREW CONNECTION

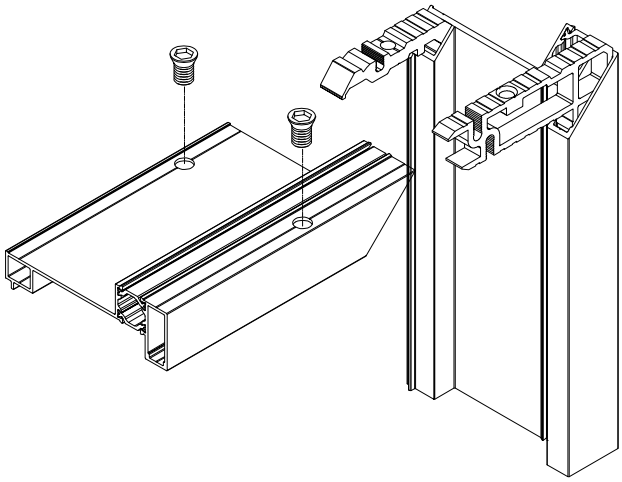


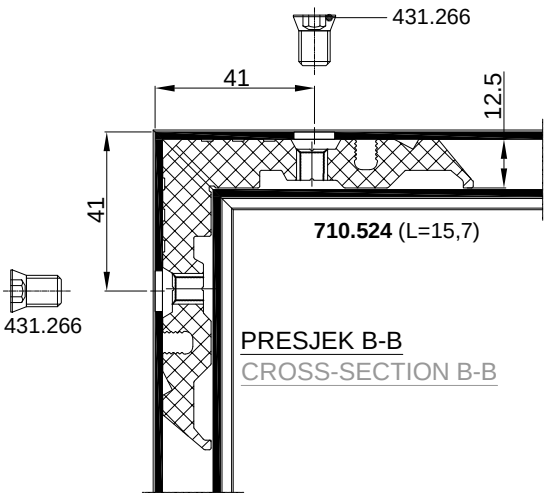



PRESJEK B-B
CROSS-SECTION B-B


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS-SECTION C-C



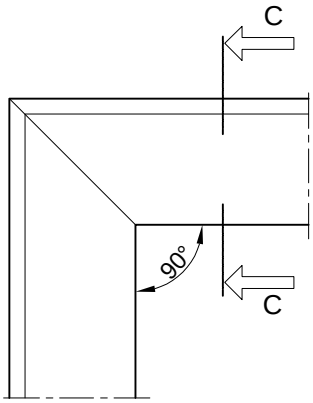

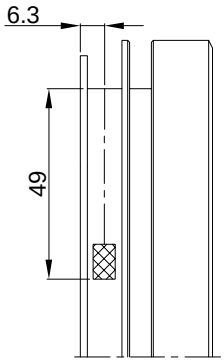

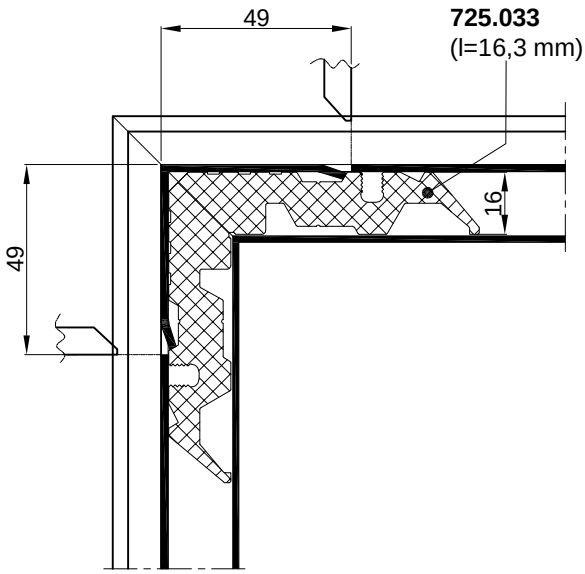

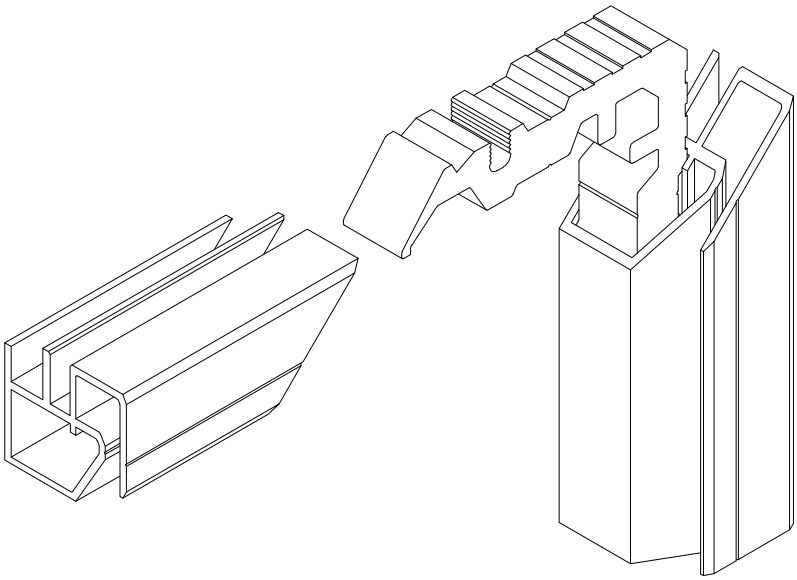


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS-SECTION C-C




F-1127

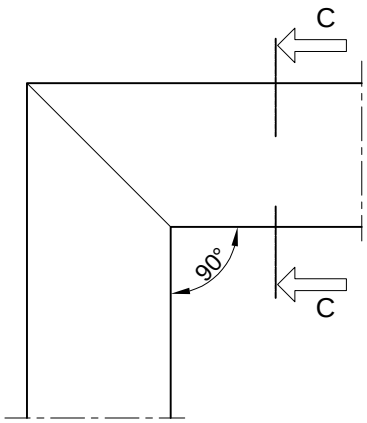




725.217
(l=39.5 mm)

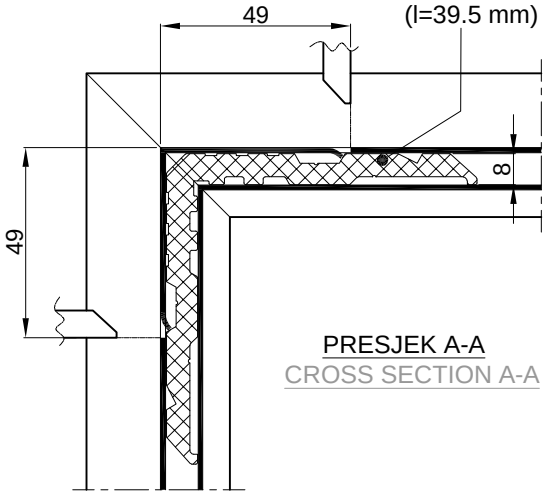

PRESJEK A-A
CROSS SECTION A-A

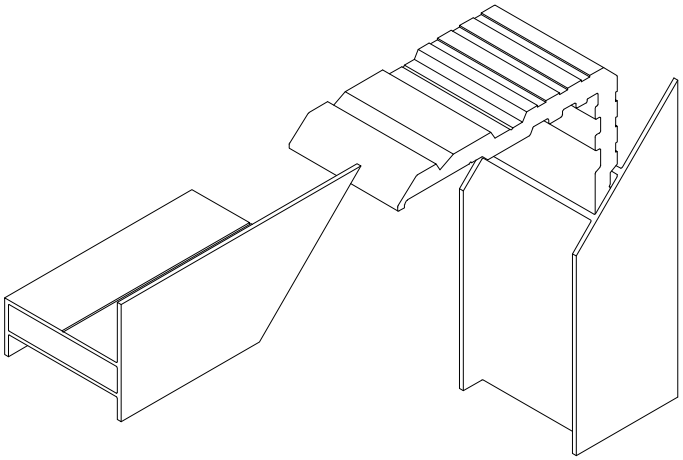



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS-SECTION C-C




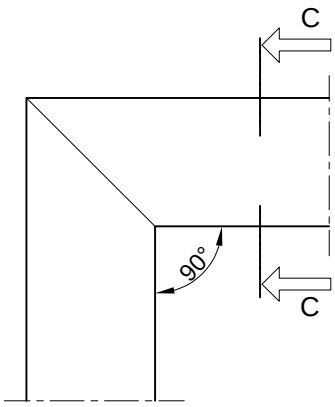



F-0855
(eloksaža S-10 ne starija od 6 mjeseci)

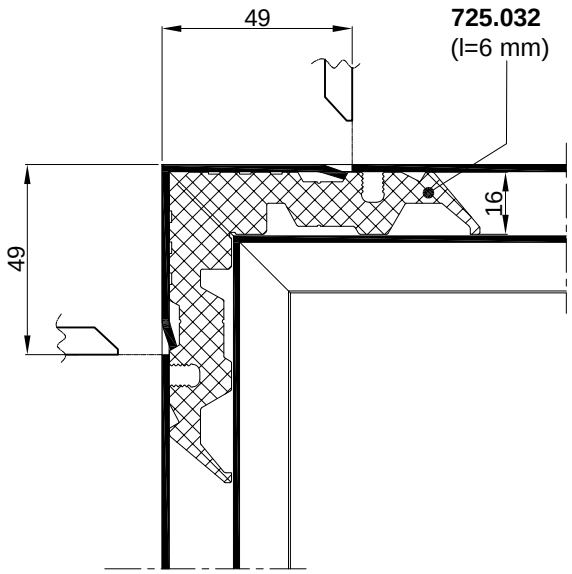


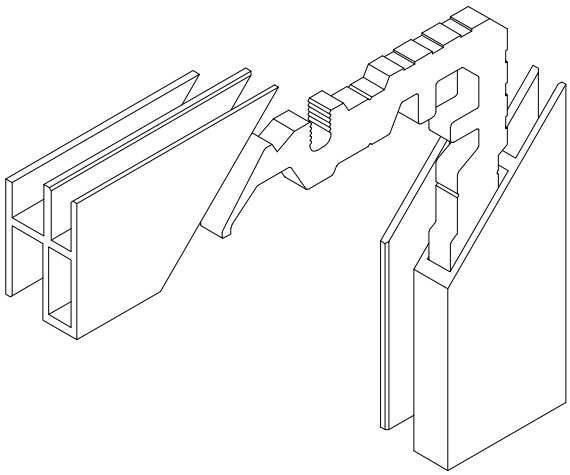



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- Obrada rama FT-0125F za prihvat šarke
- Processing of frame FT-0125 for hinge installation

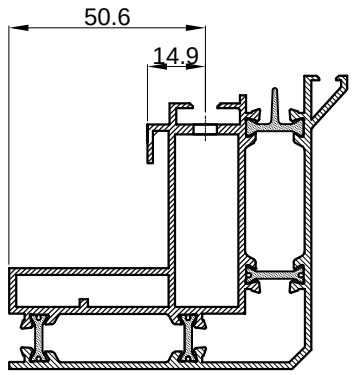

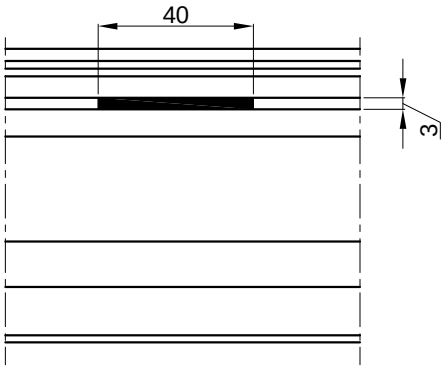


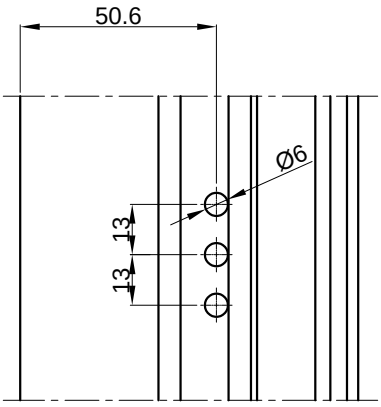




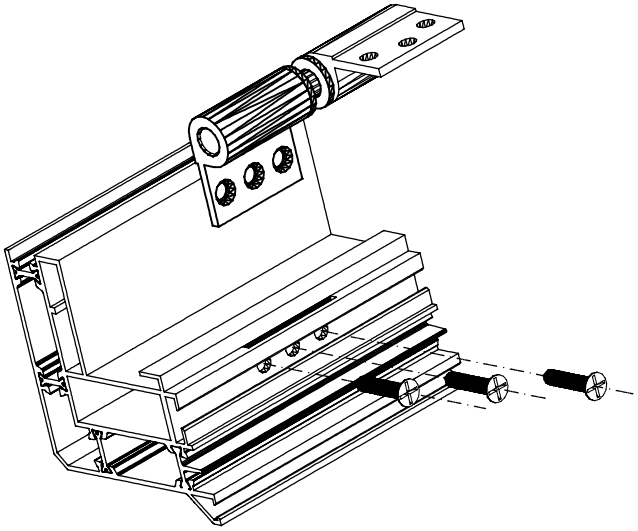


- Obrada profila (krilo) FT-0124F za prihvat šarke
- Processing of sash FT-0125 for hinge installation

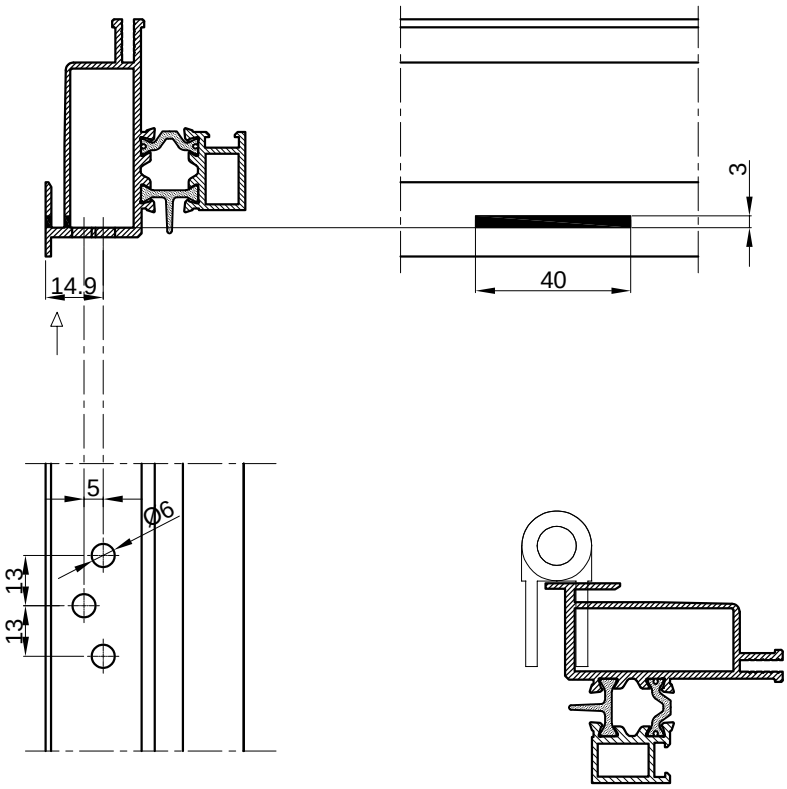


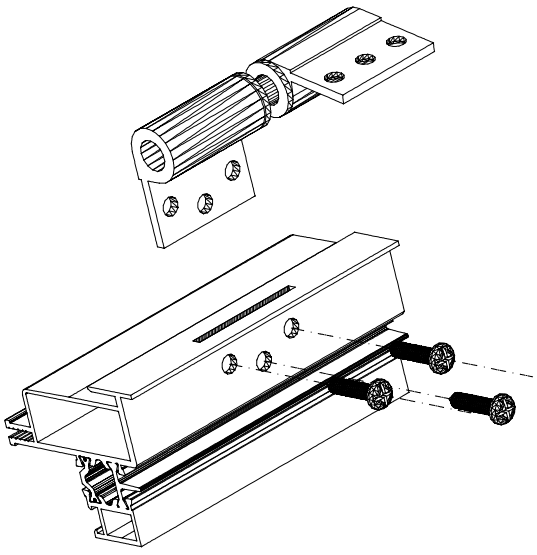


OBRADA PROFILA ZA RUČKU -104.013.01 PROFILE PROCESSING FOR HANDLE -104.013.01
02 02
03 03


FT-0157

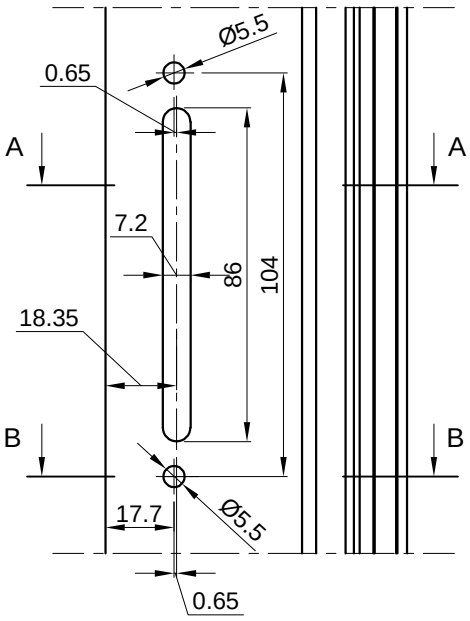

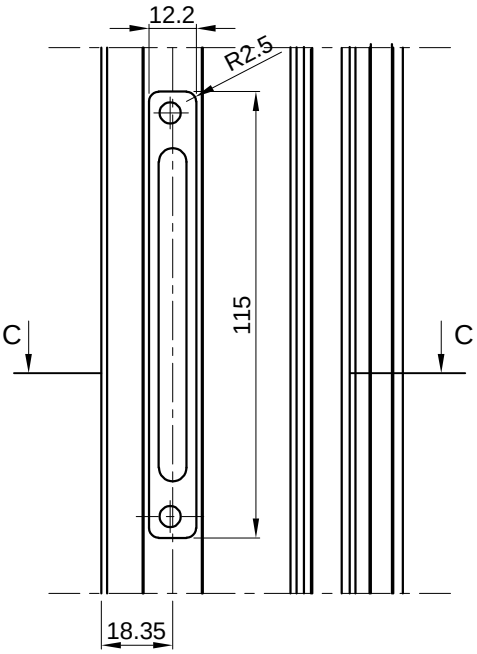





PRESJEK A-A
CROSS SECTION A-A



PRESJEK C-C
CROSS SECTION C-C



PRESJEK B-B
CROSS SECTION B-B

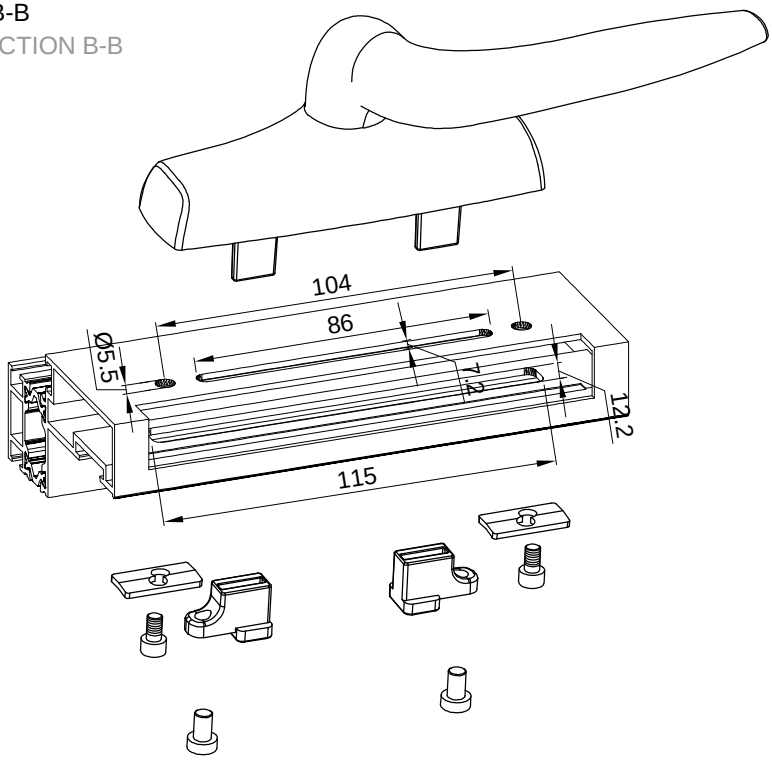



Za fasadni ventus
For hung vent


OBRADA PROFILA ZA RUČKU -104.013.01
02
03

PROFILE PROCESSING FOR HANDLE -104.013.01
02
03


FT-0134

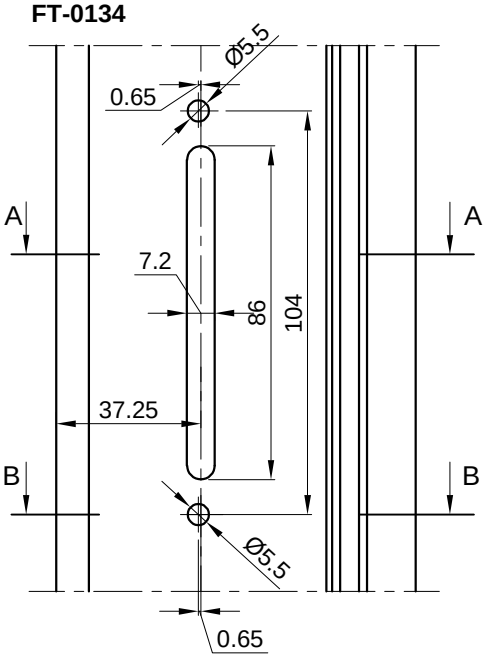

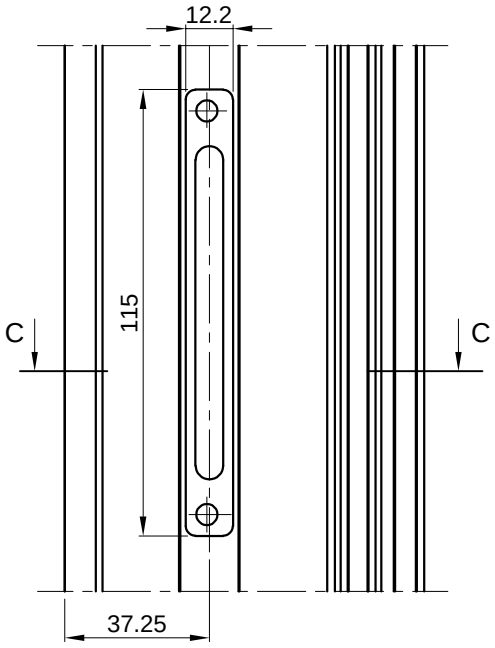


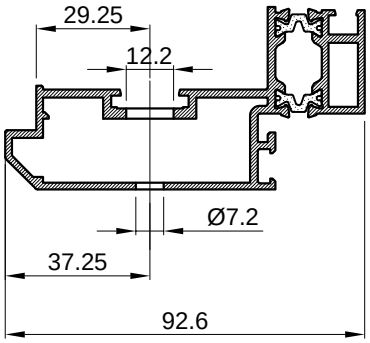


PRESJEK A-A
CROSS SECTION A-A

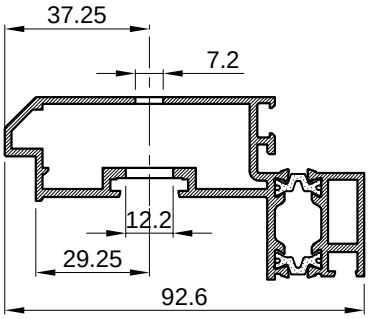

PRESJEK C-C
CROSS SECTION C-C

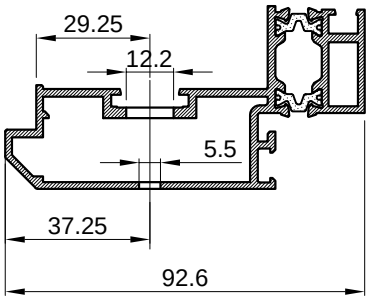


PRESJEK B-B
CROSS SECTION B-B

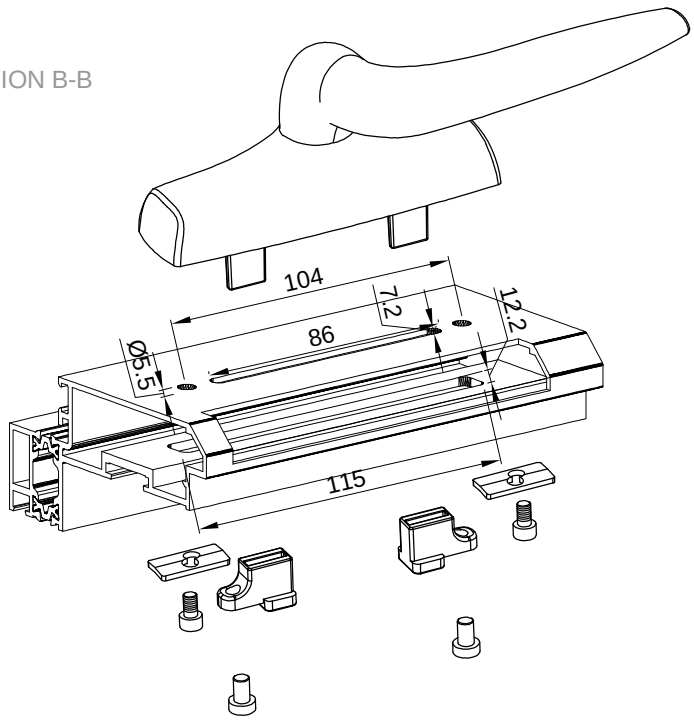

Za fasadni ventus
For hung vent


FT-0175 pozicioniranje makaza u odnosu na ram
positioning of strays related to the frame

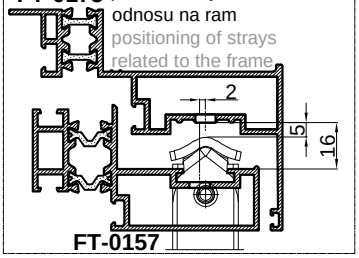

ugradnja fasadnih makaza Stublina 134.022
installation of friction stays Stublina 134.022

obrada krila za fasadne makaze Stublina 134.022
sash processing for friction stays Stublina 134.022

obrada rama za fasadne makaze Stublina 134.022
frame processing for friction stays Stublina 134.022

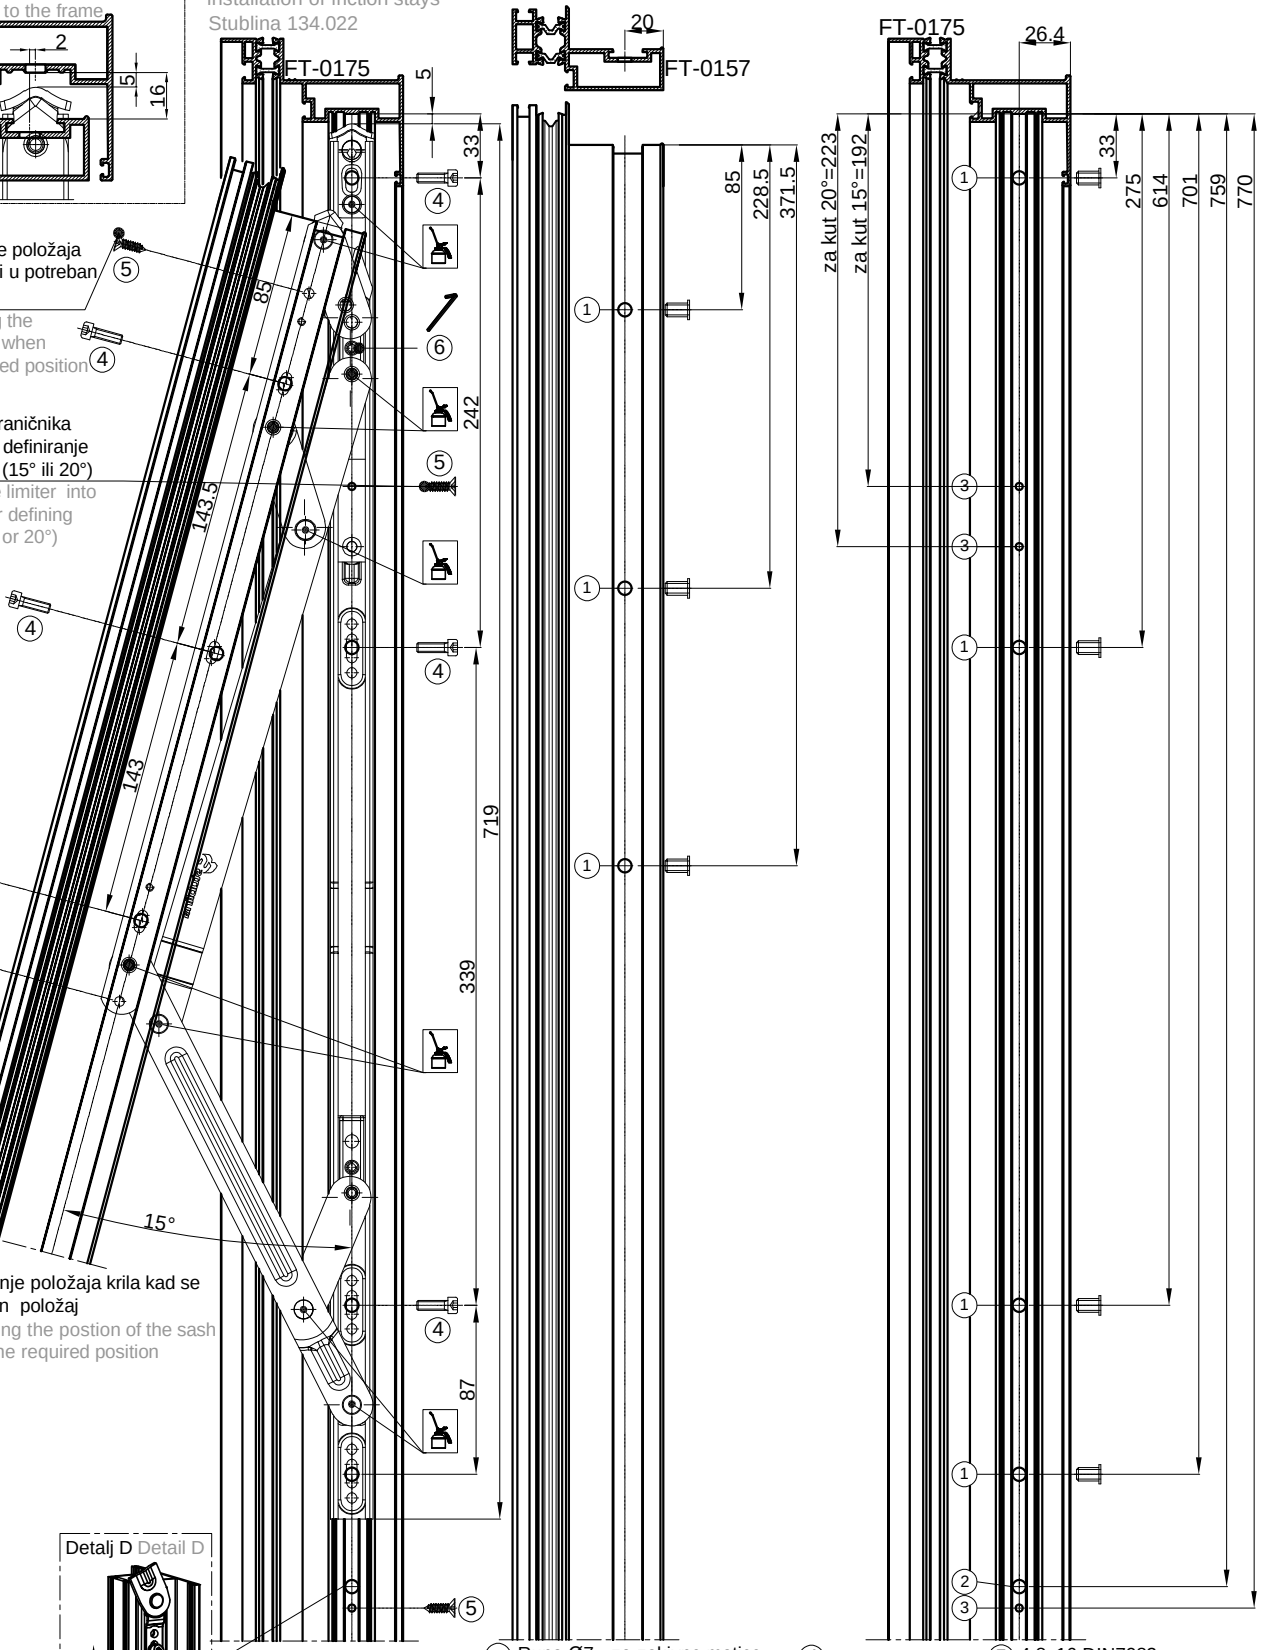


vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the position of the sash when it is set in the required position

vijak za fiksiranje graničnika u željeni položaj za definiranje kuta otvaranja krila (15° ili 20°)
screw for fixing the limiter into wanted position for defining opening angle (15° or 20°)

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the postion of the sash when it is set in the required position

Detalj D Detail D



podmazivanje vršiti nakon 5000 otvaranja
to be greased after 5000 openings

podešavanje makaza po visini (±5 mm) preko mehanizma za podešavanje
stray height adjustment (±5 mm) with adjustment mechanism

① Rupa Ø7 - za zakivne matice M5 (M5x16 DIN 6912)
Hole Ø7 - for rivet nuts M5 (M5x16 DIN 6912)

② Rupa Ø7-za element za fino podešavanje
Hole Ø7-for fine adjustment element

③ Rupa Ø3.7 - za samourezujući vijak 4.8x16 DIN7982
Hole Ø3.7 - for selftapping screw 4.8x16 DIN7982

④ M5x16 DIN 6912 ⑤ 4.8x16 DIN7982

⑥ povećanjem ili smanjenjem sile trenja omogućava se lakše ili teže otvaranje prozora. Vijak ne smije biti previše zategnut,ukoliko je jako zategnut prozor neće funkcionirati.
with fraction force change one regulates the window closing force. Screw should not be screwed too tight, otherwise the window will not be able to open/close.

pozicioniranje makaza u odnosu na ram
positioning of strays related to the frame

FT-0133

FT-0134

5

16

ugradnja fasadnih makaza Stublina 134.022
installation of friction stays Stublina 134.022

FT-0133

5

33

242

719

339

87

obrada krila za fasadne makaze Stublina 134.022
sash processing for friction stays Stublina 134.022

38.9

FT-0134

85

228.5

371.5

obrada rama za fasadne makaze Stublina 134.022
frame processing for friction stays Stublina 134.022

FT-0133

37.2

33

za kut 20°=223

za kut 15°=192

275

614

701

759

770

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the position of the sash when it is set in the required position

vijak za fiksiranje graničnika u željeni položaj za definiranje kuta otvaranja krila (15° ili 20°)
screw for fixing the limiter into wanted position for defining opening angle (15° or 20°)

89

143.5

143

15°

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the postion of the sash when it is set in the required position

Detalj D Detail D


±5

OK4

podmazivanje vršiti nakon 5000 otvaranja
to be greased after 5000 openings

podešavanje makaza po visini (±5 mm) preko mehanizma za podešavanje
stray height adjustment (±5 mm) with adjustment mechanism

1. Rupa Ø7 - za zakivne matice M5 (M5x16 DIN 6912)
   Hole Ø7 - for rivet nuts M5 (M5x16 DIN 6912)
2. Rupa Ø7-za element za fino podešavanje
   Hole Ø7-for fine adjustment element
3. Rupa Ø3.7 - za samourezujući vijak 4.8x16 DIN7982
   Hole Ø3.7 - for selftapping screw 4.8x16 DIN7982
4. M5x16 DIN 6912
5. 4.8x16 DIN7982
6. povećanjem ili smanjenjem sile trenja omogućava se lakše ili teže otvaranje prozora. Vijak ne smije biti previše zategnut,ukoliko je jako zategnut prozor neće funkcionirati.
   with fraction force change one regulates the window closing force. Screw should not be screwed too tight, otherwise the window will not be able to open/close.

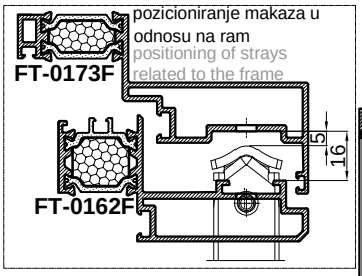

ugradnja fasadnih makaza Stublina 134.022
installation of friction stays Stublina 134.022

obrada krila za fasadne makaze Stublina 134.022
sash processing for friction stays Stublina 134.022

obrada rama za fasadne makaze Stublina 134.022
frame processing for friction stays Stublina 134.022

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the position of the sash when it is set in the required position

vijak za fiksiranje graničnika u željeni položaj za definiranje kuta otvaranja krila (15° ili 20°)
screw for fixing the limiter into wanted position for defining opening angle (15° or 20°)

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the postion of the sash when it is set in the required position

podmazivanje vršiti nakon 5000 otvaranja
to be greased after 5000 openings

podešavanje makaza po visini (±5 mm) preko mehanizma za podešavanje
stray height adjustment (±5 mm) with adjustment mechanism


① Rupa Ø7 - za zakivne matice M5 (M5x16 DIN 6912)
Hole Ø7 - for rivet nuts M5 (M5x16 DIN 6912)

② Rupa Ø7-za element za fino podešavanje
Hole Ø7-for fine adjustment element

③ Rupa Ø3.7 - za samourezujući vijak 4.8x16 DIN7982
Hole Ø3.7 - for selftapping screw 4.8x16 DIN7982

④ M5x16 DIN 6912 ⑤ 4.8x16 DIN7982

⑥ povećanjem ili smanjenjem sile trenja omogućava se lakše ili teže otvaranje prozora. Vijak ne smije biti previše zategnut,ukoliko je jako zategnut prozor neće funkcionirati.
with fraction force change one regulates the window closing force. Screw should not be screwed too tight, otherwise the window will not be able to open/close.

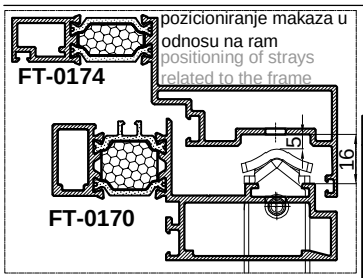

obrada krila za fasadne makaze Stublina 134.022 sash processing for friction stays Stublina 134.022


obrada rama za fasadne makaze Stublina 134.022 frame processing for friction stays Stublina 134.022

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the position of the sash when it is set in the required position

vijak za fiksiranje graničnika u željeni položaj za definiranje kuta otvaranja krila (15° ili 20°)
screw for fixing the limiter into wanted position for defining opening angle (15° or 20°)

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the postion of the sash when it is set in the required position

Detalj D Detail D

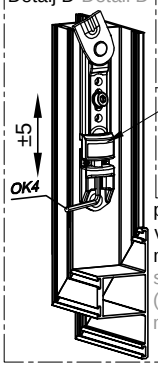


podmazivanje vršiti nakon 5000 otvaranja
to be greased after 5000 openings


podešavanje makaza po visini (±5 mm) preko mehanizma za podešavanje
stray height adjustment (±5 mm) with adjustment mechanism


1. Rupa Ø7 - za zakivne matice M5 (M5x16 DIN 6912)
   Hole Ø7 - for rivet nuts M5 (M5x16 DIN 6912)
2. Rupa Ø7-za element za fino podešavanje
   Hole Ø7-for fine adjustment element
3. Rupa Ø3.7 - za samourezujući vijak 4.8x16 DIN7982
   Hole Ø3.7 - for selftapping screw 4.8x16 DIN7982

4. M5x16 DIN 6912
5. 4.8x16 DIN7982
6. povećanjem ili smanjenjem sile trenja omogućava se lakše ili teže otvaranje prozora. Vijak ne smije biti previše zategnut,ukoliko je jako zategnut prozor neće funkcionirati.
   with fraction force change one regulates the window closing force. Screw should not be screwed too tight, otherwise the window will not be able to open/close.

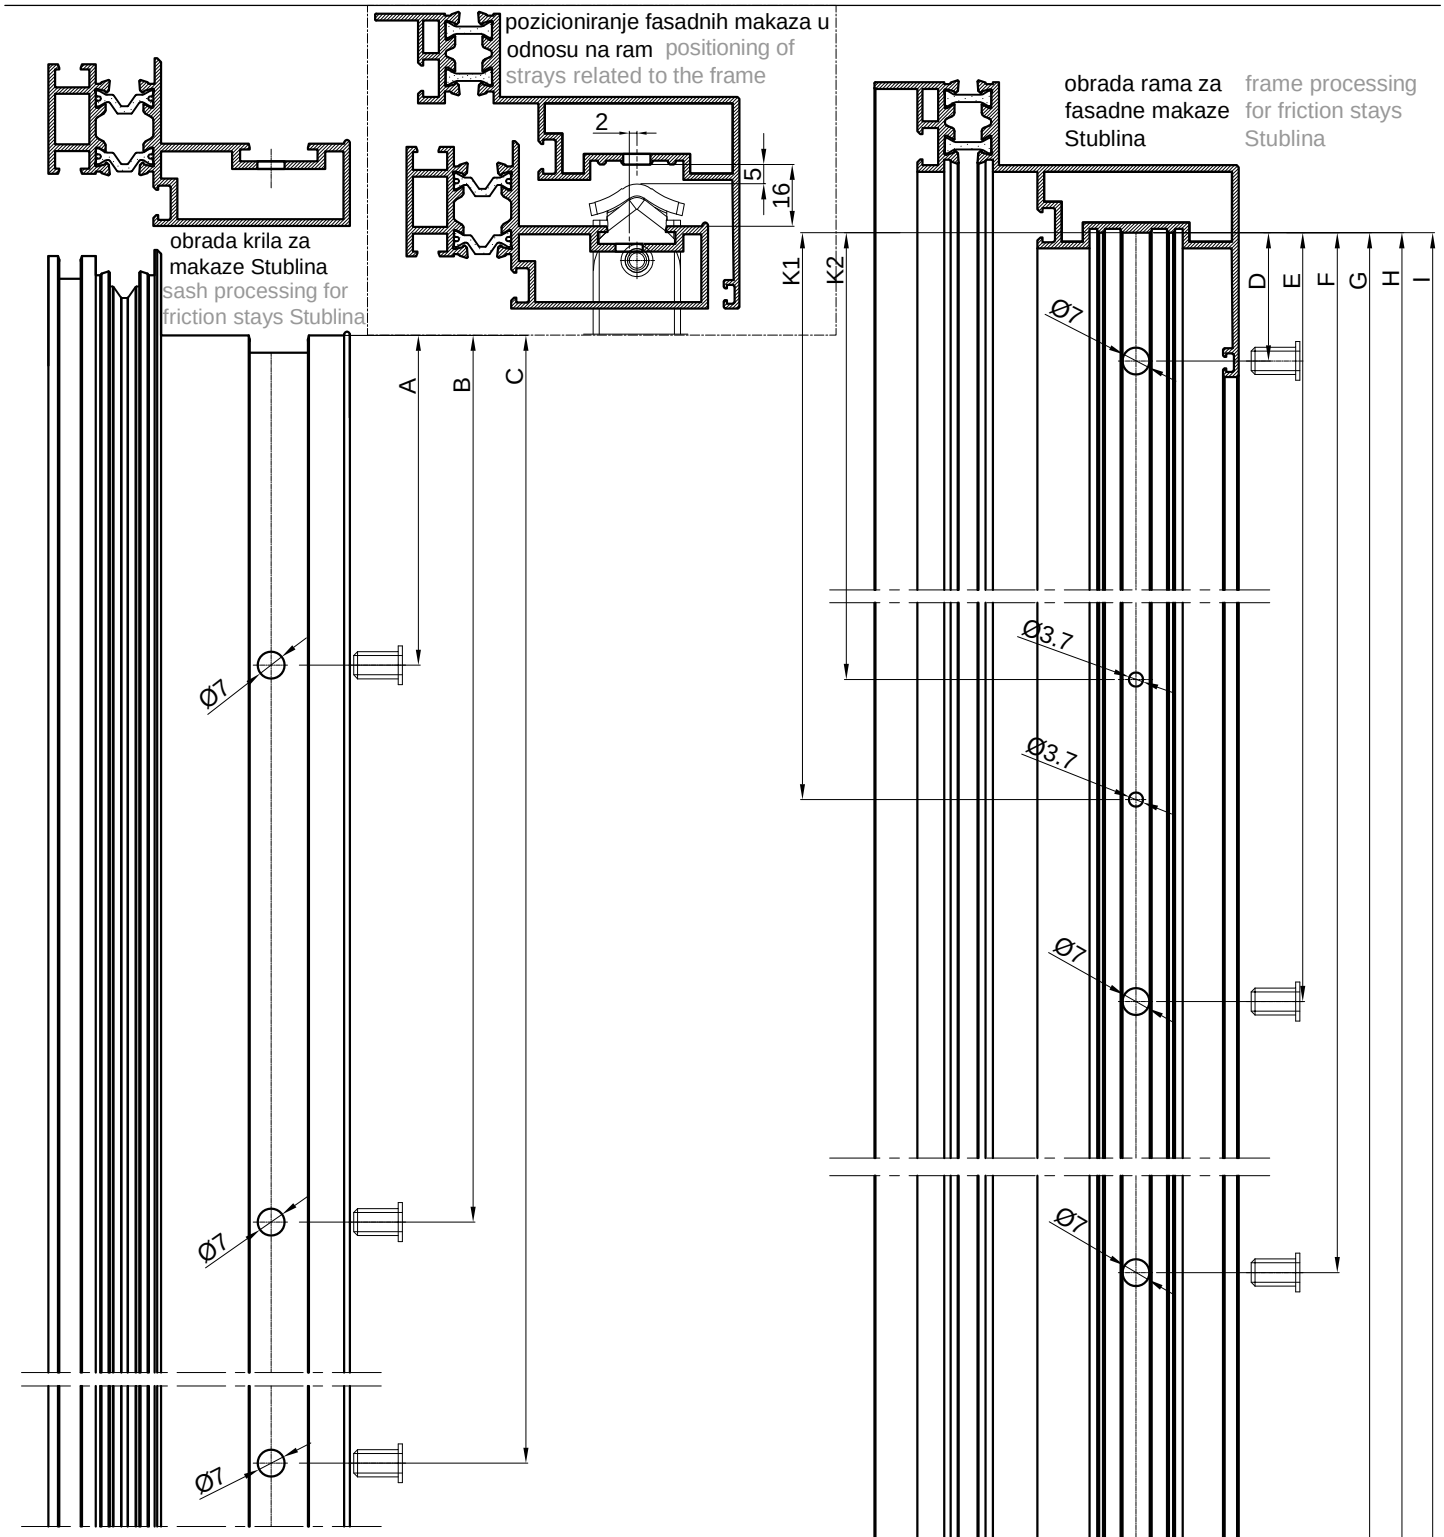


	Tip makaza Type of friction stays							
	134.019		134.020		134.021		134.022	
KUT OTVARANJA KRILA SASH OPENING ANGLE	25°	30°	20°	25°	15°	20°	15°	20°
A (mm)	85		85		85		85	
B (mm)	-		-		-		228.5	
C (mm)	155.5		235.5		302.5		371.5	
D (mm)	33		33		33		33	
E (mm)	235		258		258		275	
F (mm)	314		414		514		614	
G (mm)	401		501		601		701	
H (mm)	459		559		659		759	
I (mm)	470		570		670		770	
K1 (mm)		182		206		205		223
K2 (mm)	165		180		181		192	

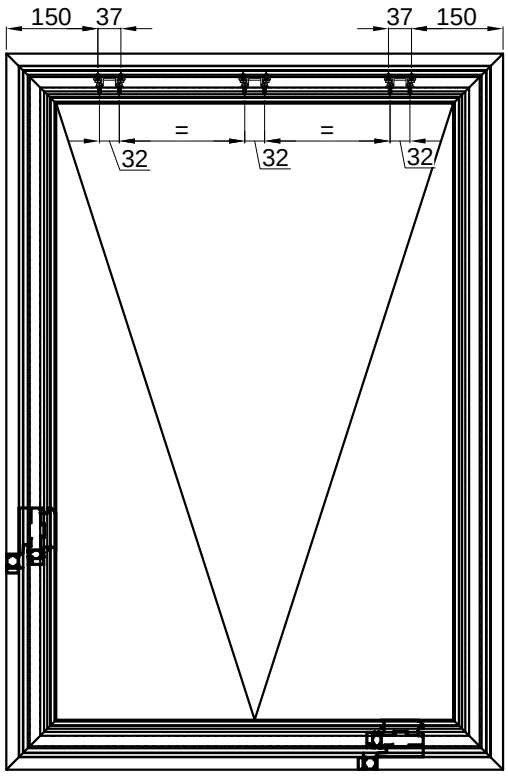


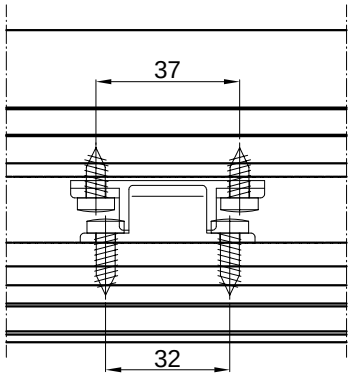



RAM FRAME	KRILO SASH	PASIVNO KLJUČANJE PASSIV LOCKING
FT-0133	FT-0134	132.016 (134.028)
FT-0173	FT-0162	132.016 (134.028)
FT-0174	FT-0170	132.016 (134.028)
FT-0175	FT-0157	132.016 (134.028)


*132.016 - G-U
*134.028 - Stublina

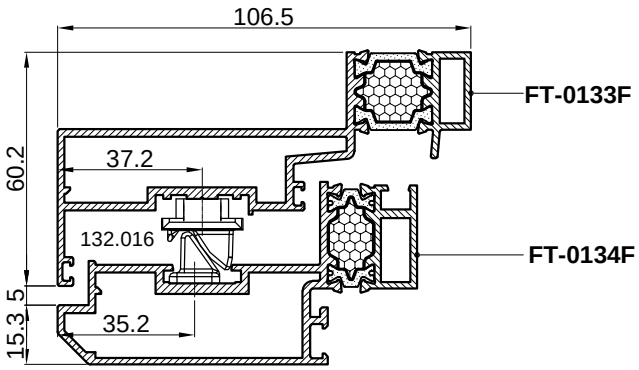


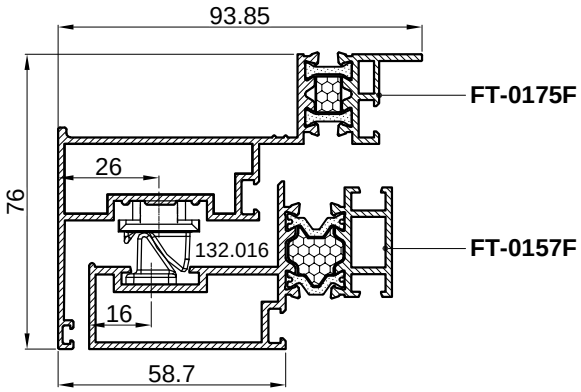


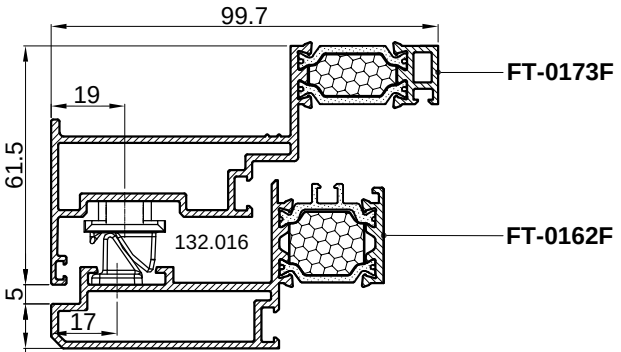

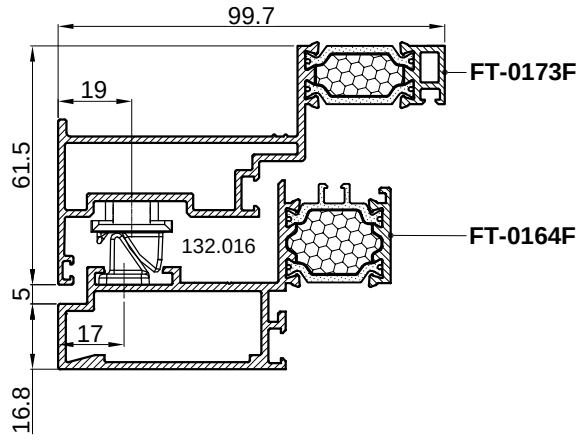

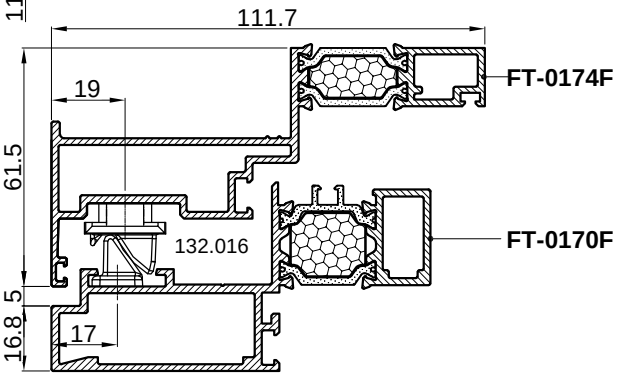

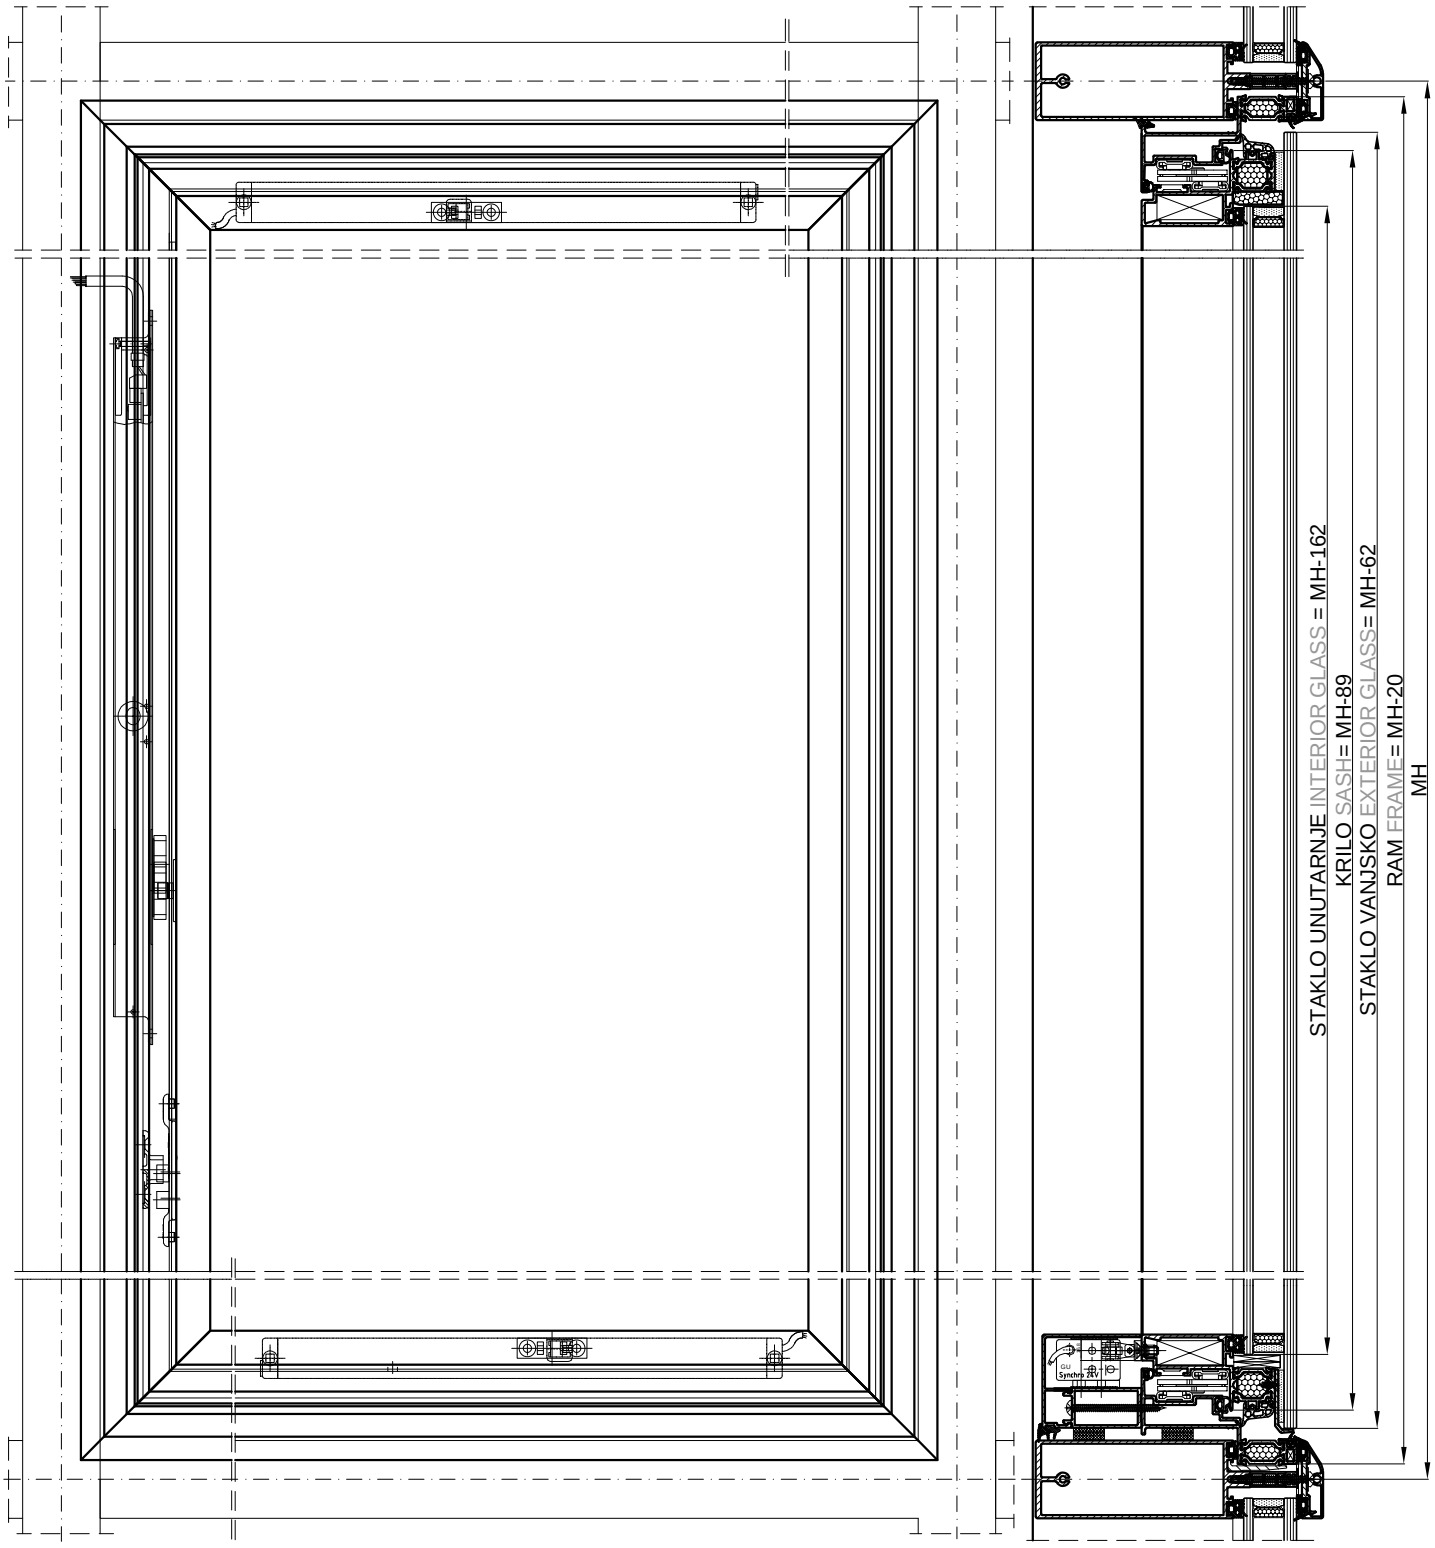


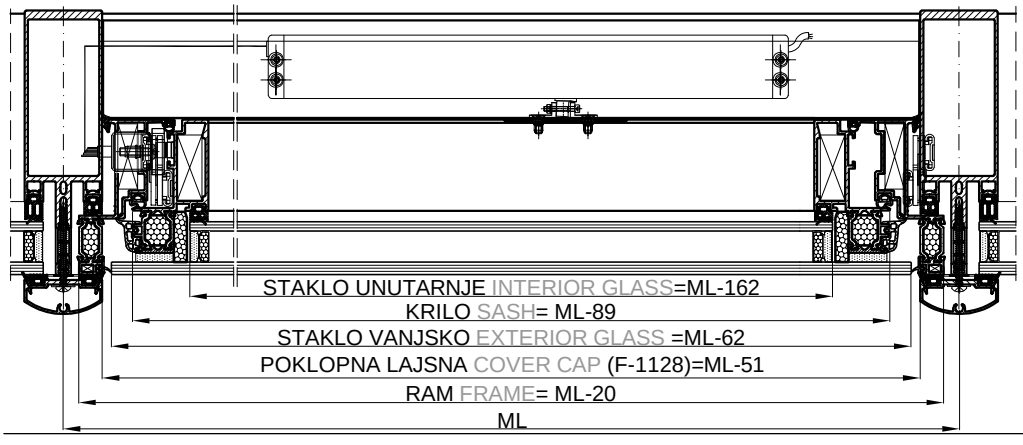


Izračun dimenzija
- RAM FT-0173
- KRILO FT-0164


Cutting list
- FRAME FT-0173
- SASH FT-0164


- Obrada desne okomice za motor za zaključavanje G-U VA 25
- Processing of right mullion for locking motor G-U VA 25

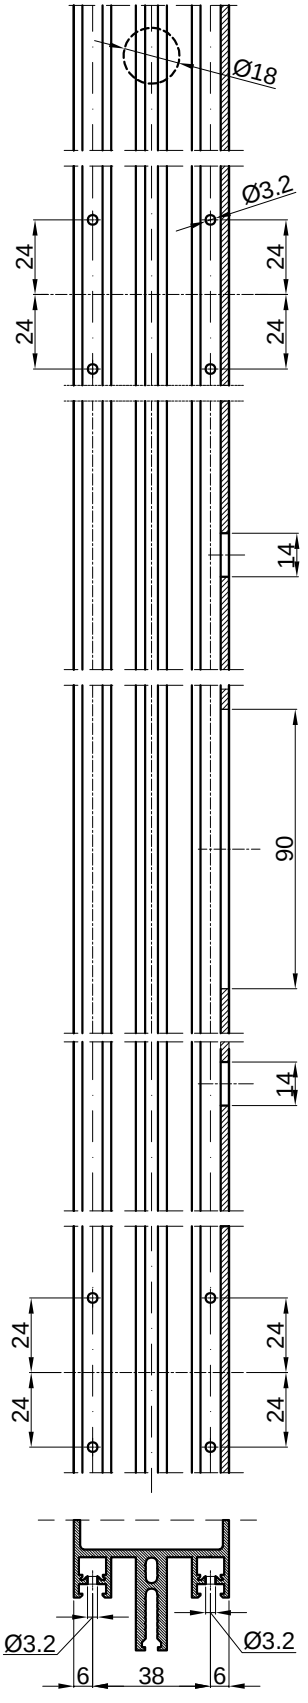



Pogled iznutra
Inside view

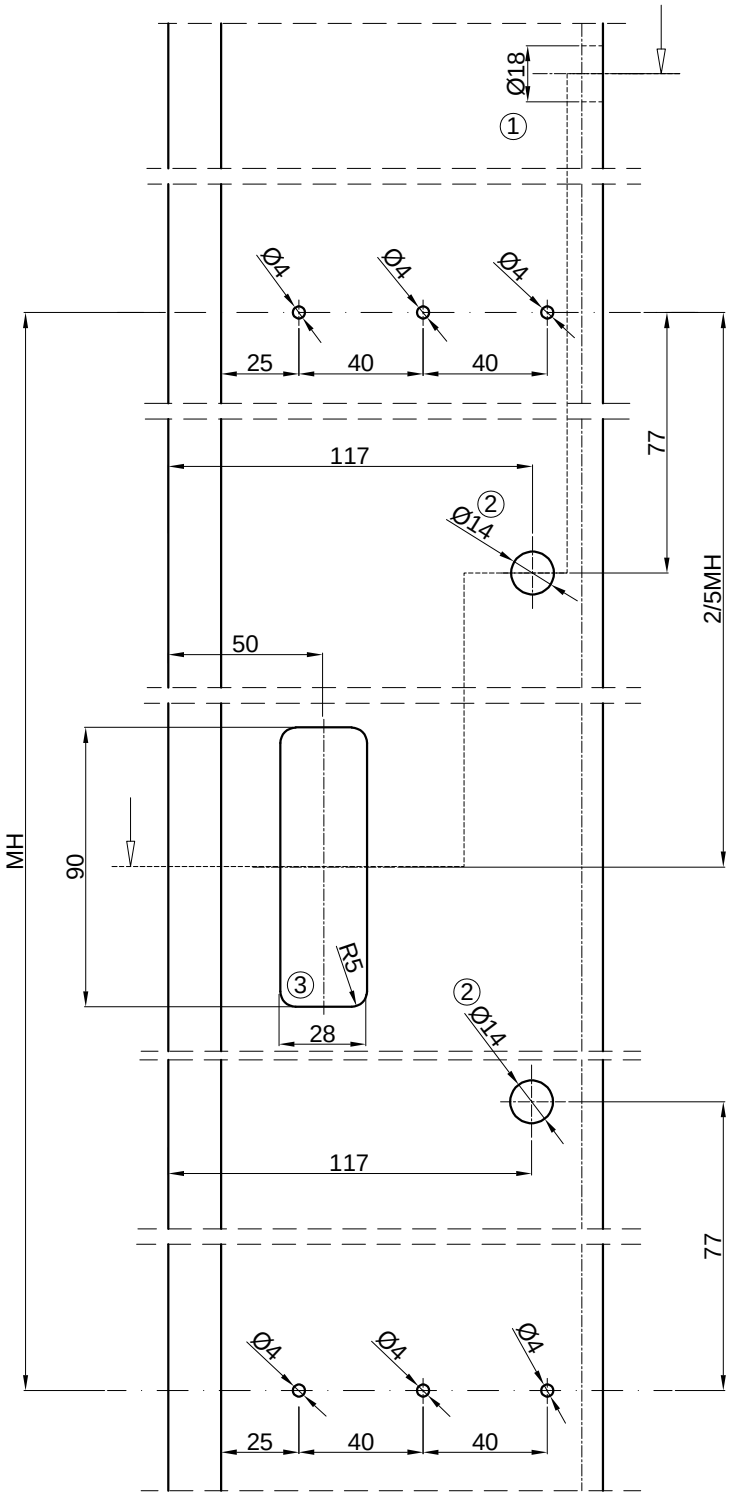

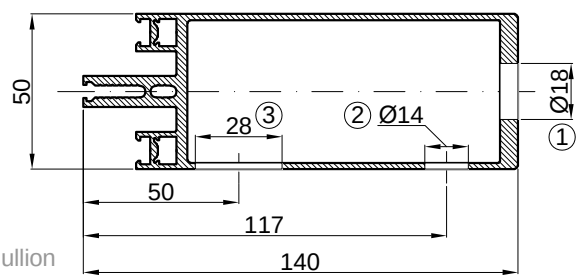


① Rupa za izvod kabla iz okomice
Hole for leading the cable from the mullion


② Rupa za uvod kabla motora otvaranja/zatvaranja u okomicu
Hole for leading the cable of opening/closing motor into the mullion

③ Rupa za uvod kabla motorazaključavanja u okomicu
Hole for leading the cable of the locking motor in the mullion


- Obrada desne okomice rama FT-173 za prihvat motora za zaključavanje G-U VA 25
- Processing of right vertical frame FT-173 for landing of the locking motor G-U VA 25




Pogled iznutra
Inside view

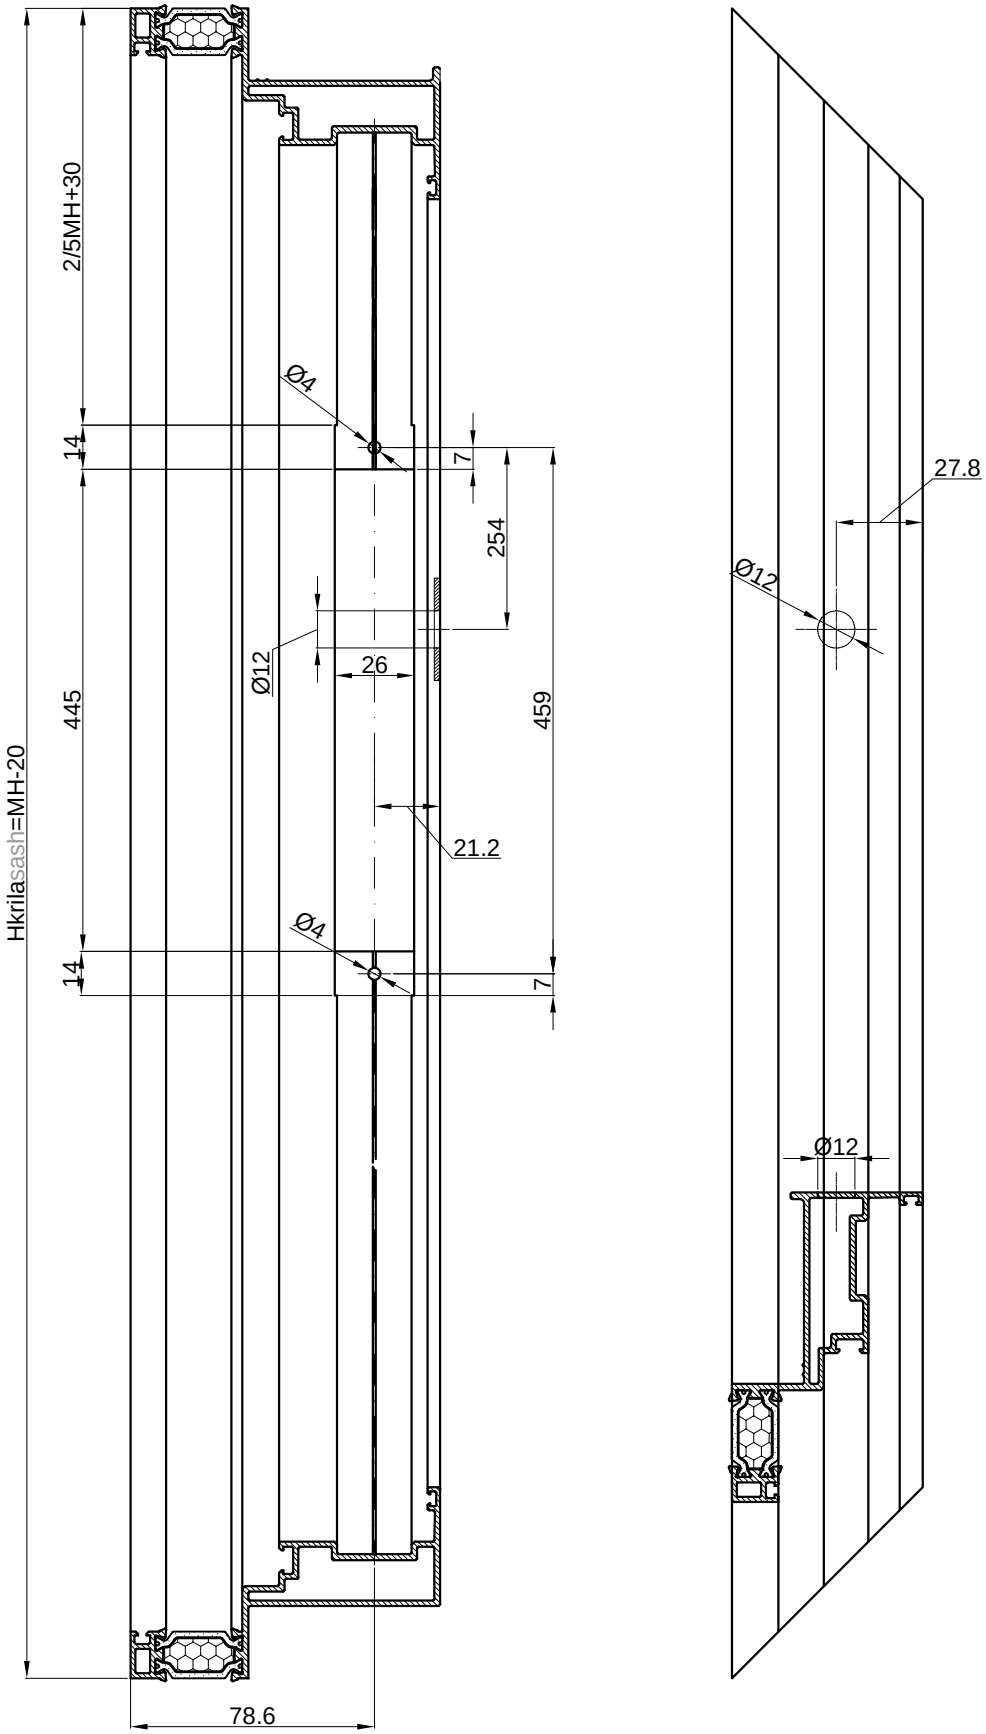


Obrada vodoravnica krila FT-164
Processing of horizontal sash profiles FT-164

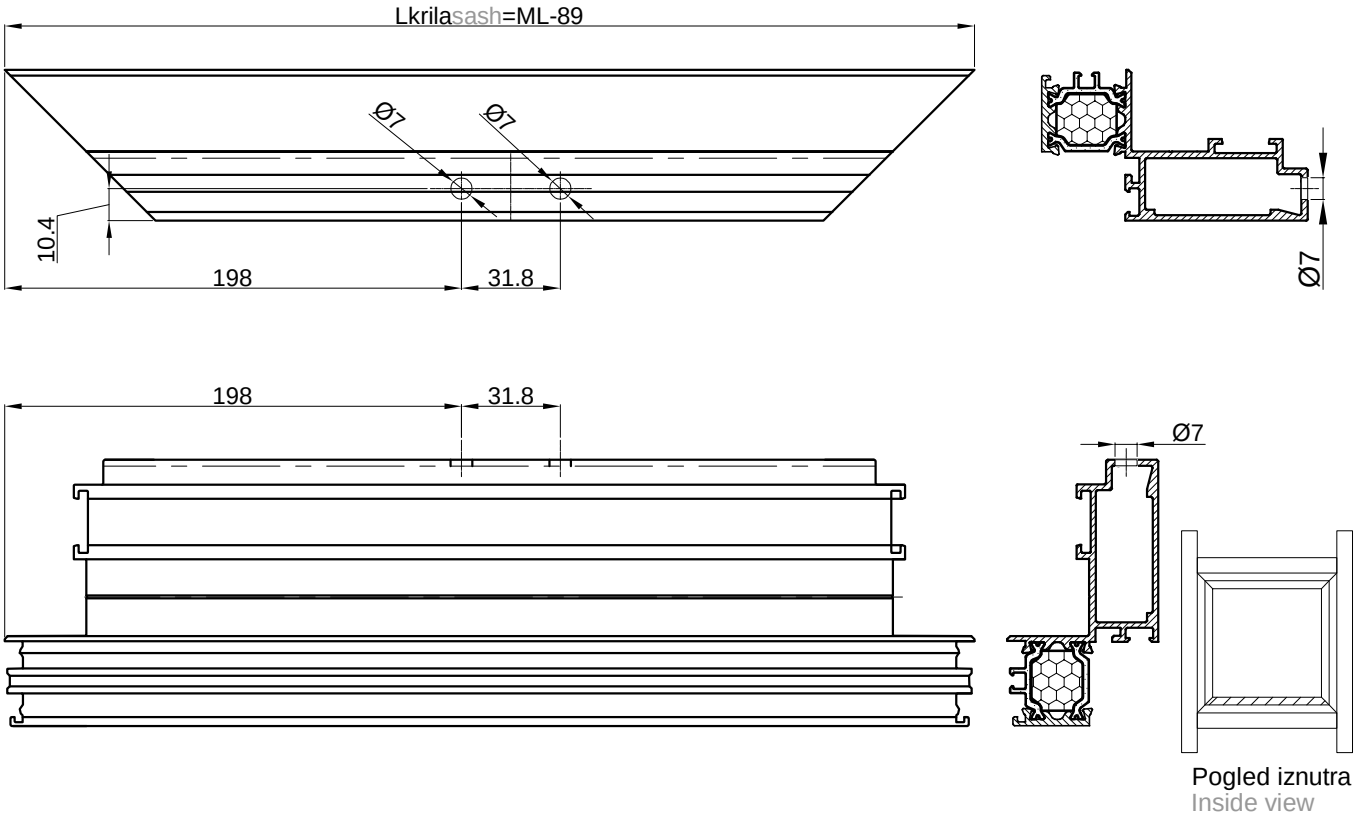

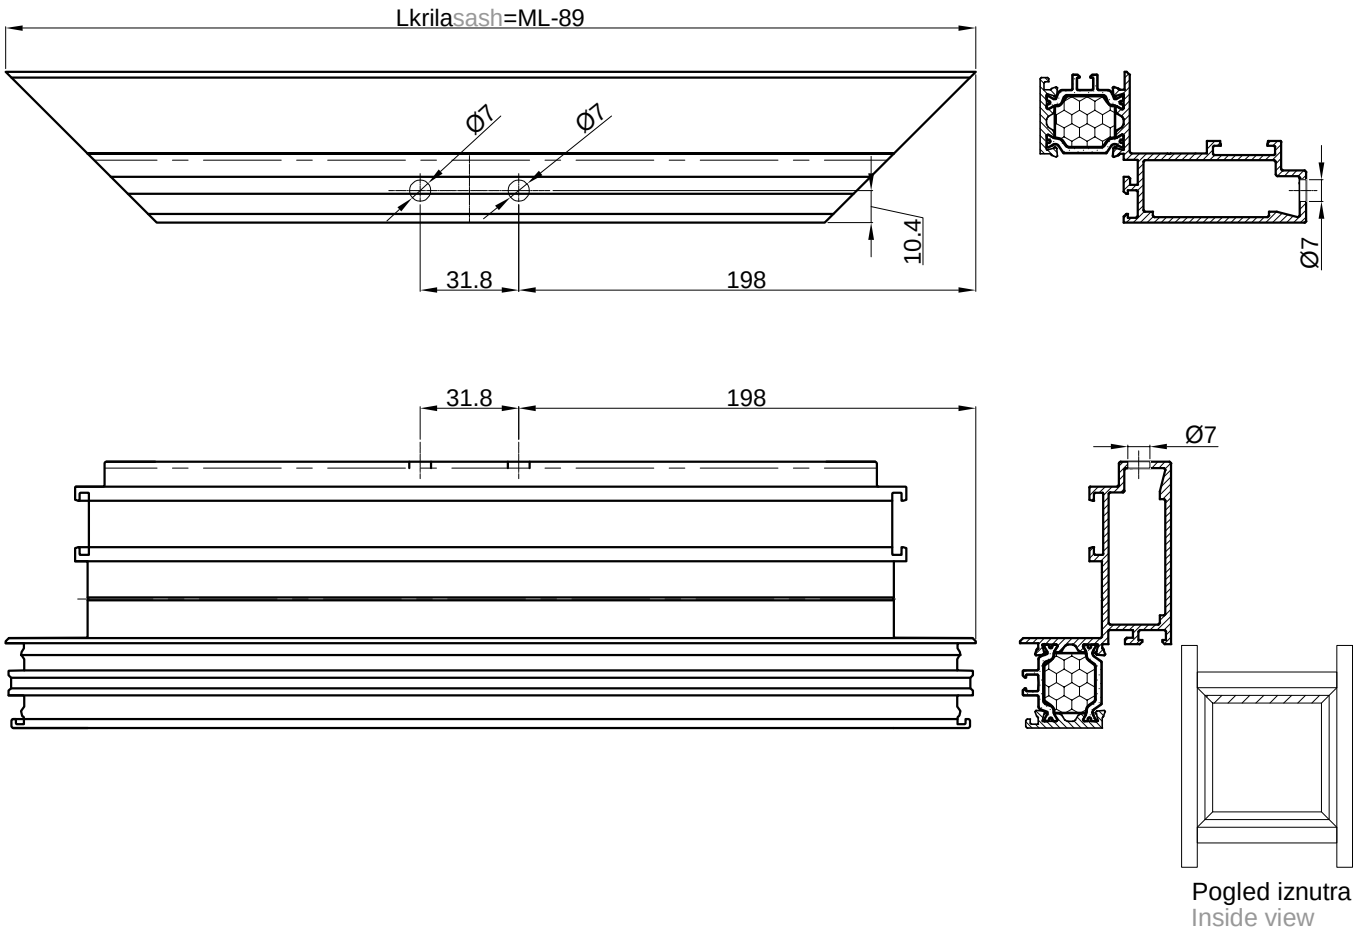



Obrada nosača F-1129 za prihvat motor K 20/25 300 mm
Processing of support profile F-1129 for K 20/25 300 mm

Nosač F-1129 gore
Support profile F-1129 up

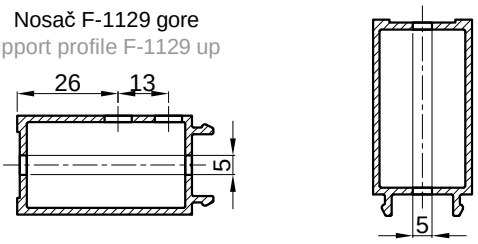


Nosač F-1129 dolje
Support profile F-1129 down

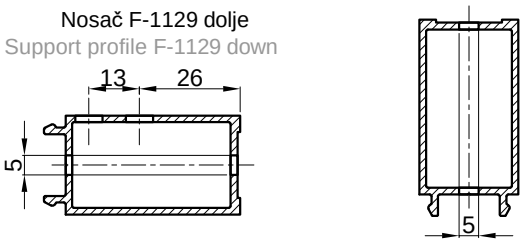


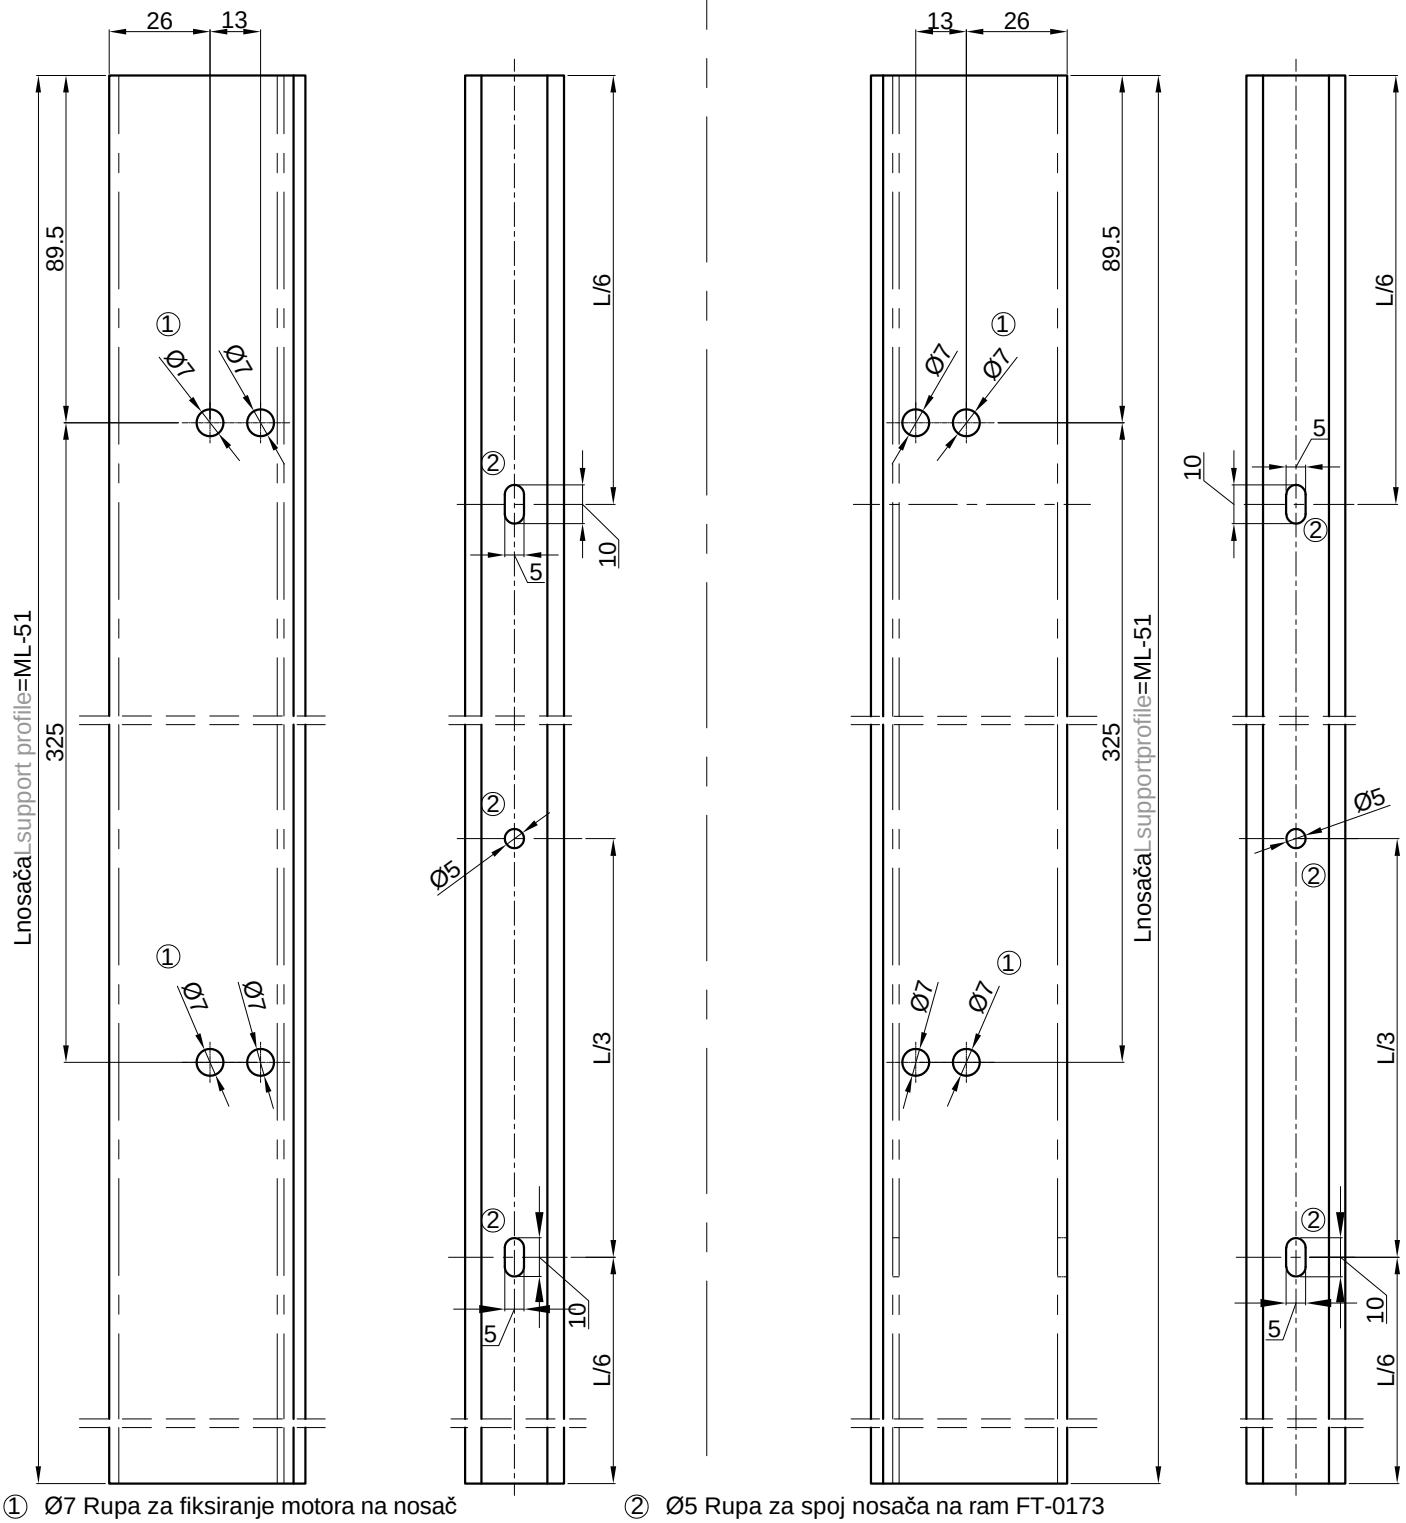



① Ø7 Rupa za fiksiranje motora na nosač
Ø7 Hole for fixing the profile on the support profile


② Ø5 Rupa za spoj nosača na ram FT-0173
Ø5 Hole for support profile-frame connection FT-0173

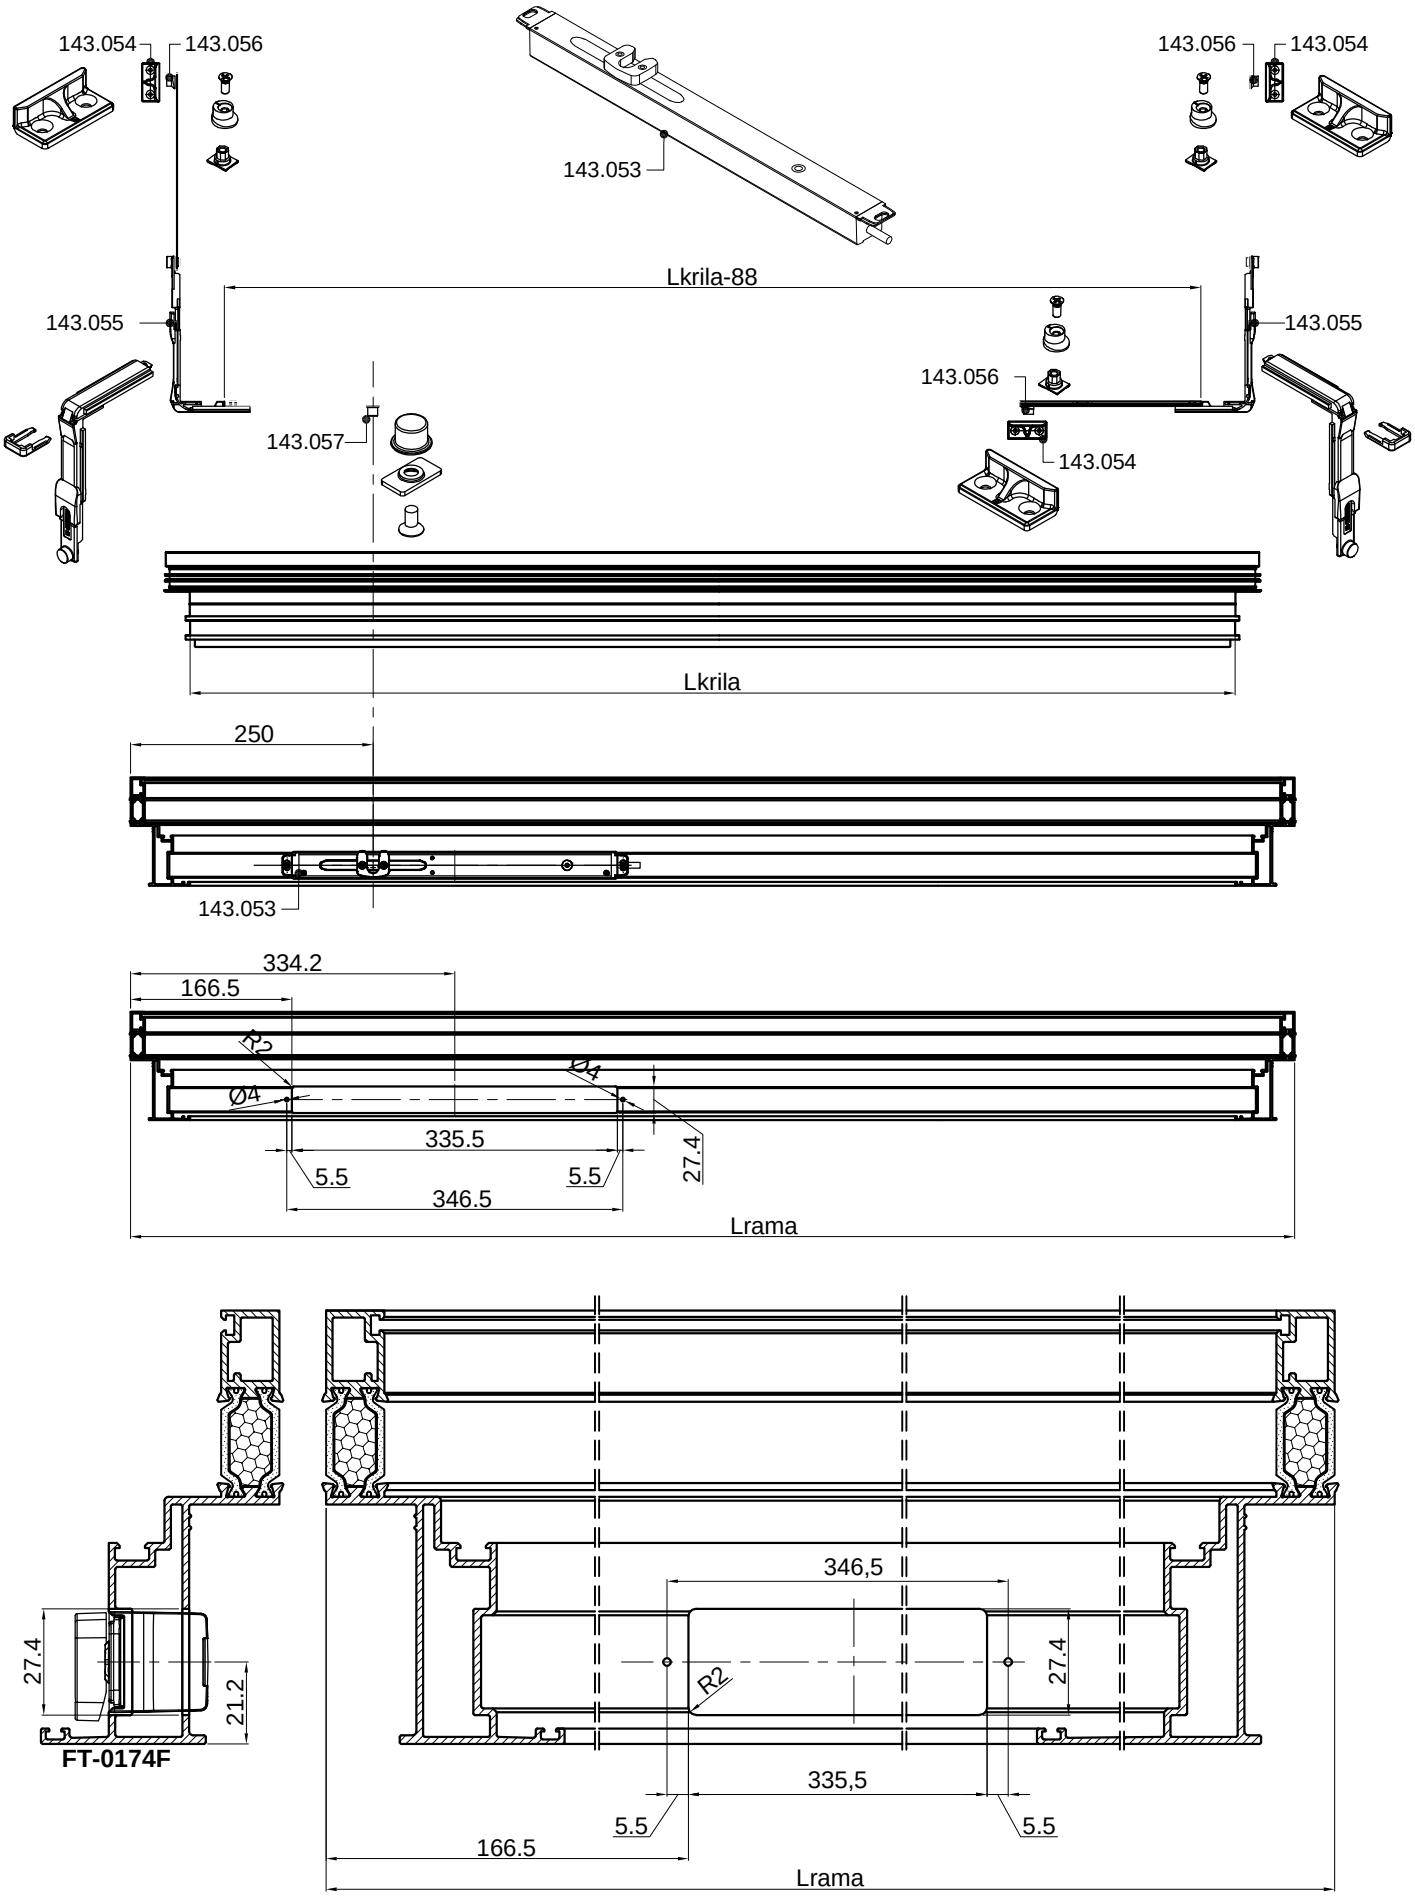
143.054
143.056
143.053
143.056
143.054
Lkrila-88
143.055
143.055
143.056
143.057
143.054
Lkrila
250
143.053
334.2
166.5
R5
Ø4
Ø4
335.5
5.5
5.5
27.4
346.5
Lrama
346,5
27.4
R2
27.4
21.2
FT-0174F
335,5
5.5
5.5
166.5
Lrama

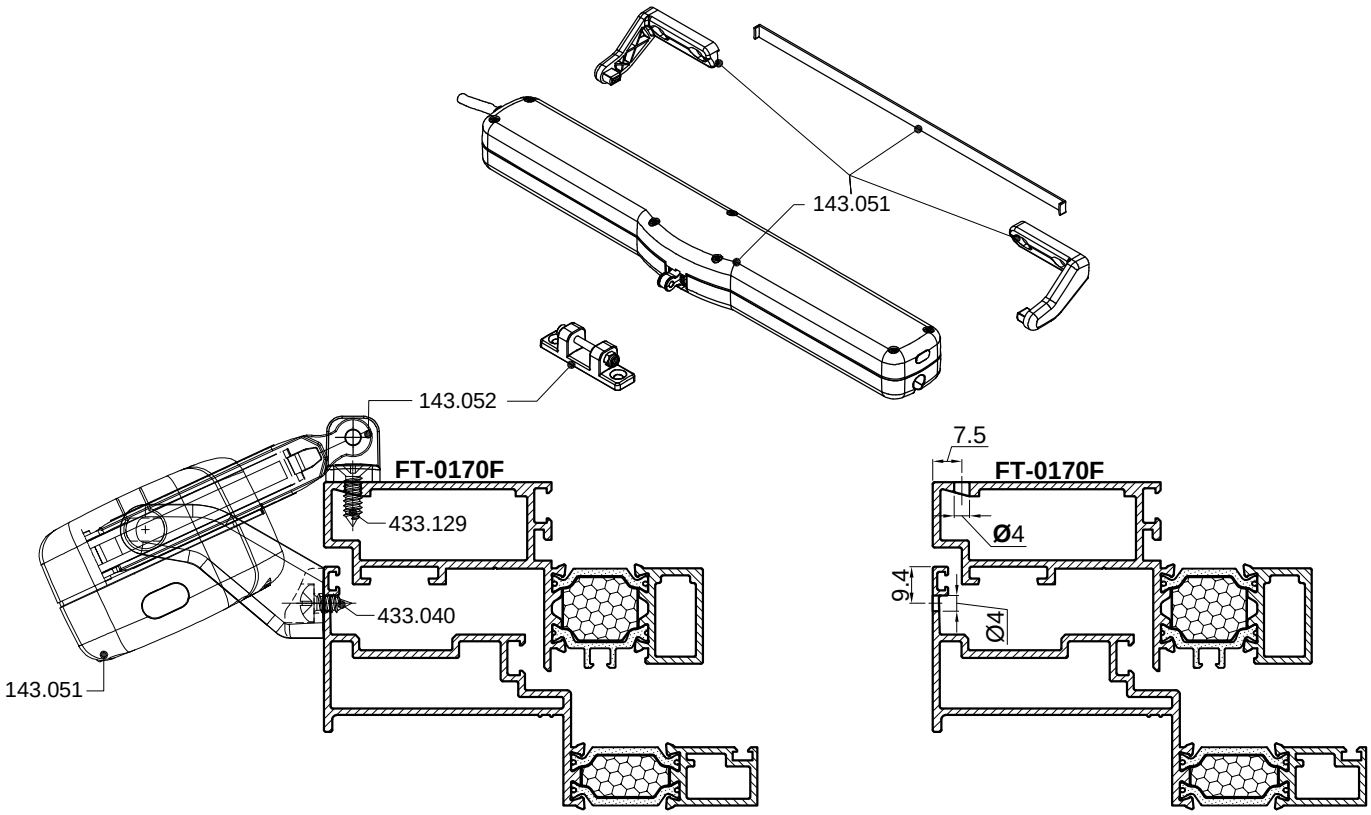
143.051
143.052
FT-0170F
433.129
433.040
143.051
7.5
FT-0170F
Ø4
9.4
Ø4

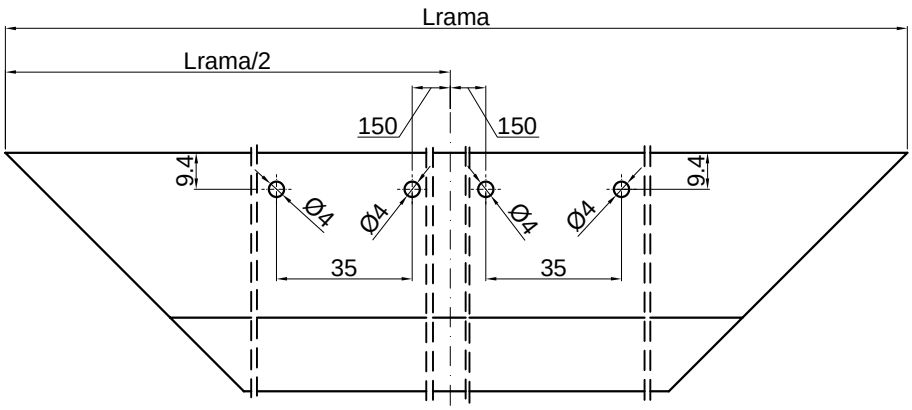
Lrama
Lrama/2
150
150
9.4
9.4
Ø4
Ø4
Ø4
Ø4
35
35

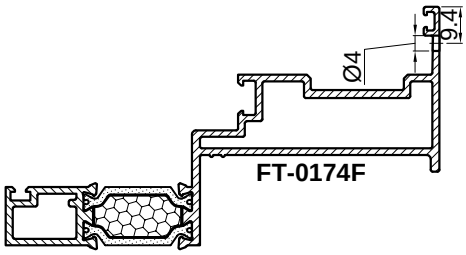

9.4
Ø4
FT-0174F

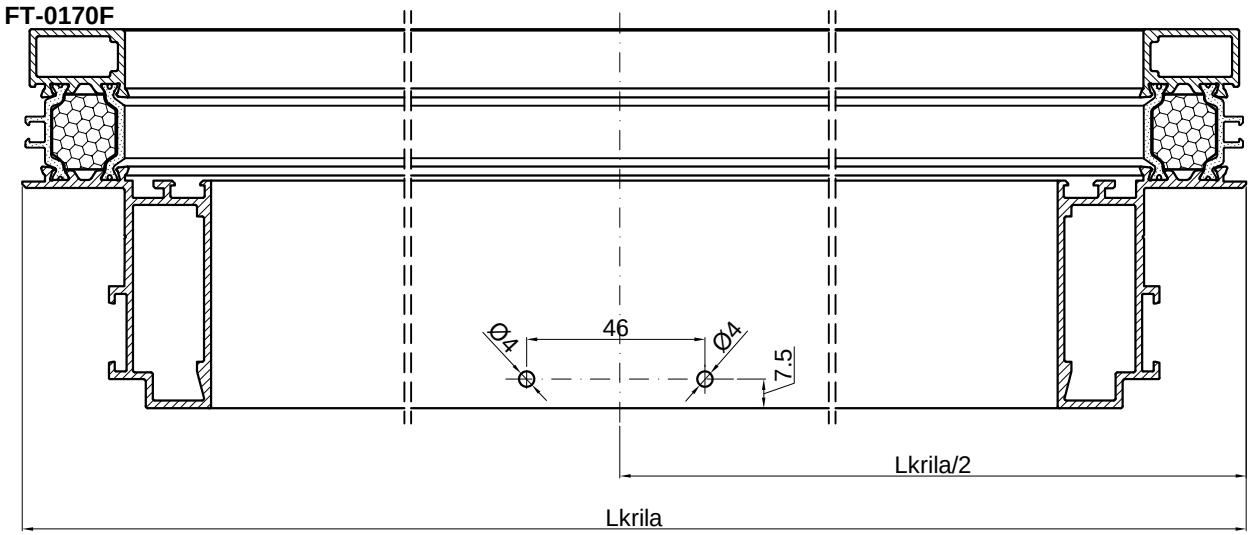

FT-0170F
Ø4
46
Ø4
7.5
Lkrila/2
Lkrila

Rezne liste
Cutting lists

Rezna lista - Ram FT-0133F Cutting list -FRAME FT-0133F
- Krilo FT-0134F -SASH FT-0134F

naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0133F	.....	ML-20	2	45-45
Ram Frame FT-0133F	.....	MH-20	2	45-45
Krilo Sash FT-0134F	.....	ML-87	2	45-45
Krilo Sash FT-0134F	.....	MH-87	2	45-45
Lajsna Glazing bead FM 30/20	.....	ML-70	2	45-45
Lajsna Glazing bead FM 30/20	.....	MH-70	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.027	.....		4	
Kutna spojnica Corner bracket 725.122	.....		4	
Kutna spojnica Corner bracket 725.025	.....		4	
Kutna spojnica Corner bracket 725.028	.....		4	
Kutna spojnica Corner bracket 725.301	.....		4	
Kutna spojnica Corner bracket 730.002	.....		4	
Brtve Gaskets				
Brtva Gasket 328.001	.....	6L+6H		
Brtva Gasket 318.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 311.007	.....	2LkrLsa+2HkrHsa		
Okovi i vijci Hardware and screws				
Makaze fasadnog ventusa (vrsta ovisno o visini prozora) Friction stays (type depending on window height)			1 par 1 pair	
Okov fasadnog ventusa sa mogućnošću zaključavanja u više točaka: Hung vent hardware with option of multiple locking points			1 par 1 pair	
Zaključavanje u donjem pojasu: Lower position locking:	....	101.000 133.003 133.005	1 1 (jedno zaklj. one lock) set 1 (tri zaklj. three locks)	
Zaključavanje u donjem pojasu i bočno: Lower and side position locking	....	101.000 133.003 133.004 133.005	1 1 set 1 set 1 (tri zaklj. three locks)	
Vijak Screw 433.092	.....	(2LlajsneLbead+2HlajsneLbead)/250		
Vijak Screw 433.043	.....	(2L+2H)/300		
Staklo vanjsko Exterior glass	.....	(ML-101)x(MH-101)	1	
Staklo unutarnje Interior glass	.....	(ML-156)x(MH-156)	1	

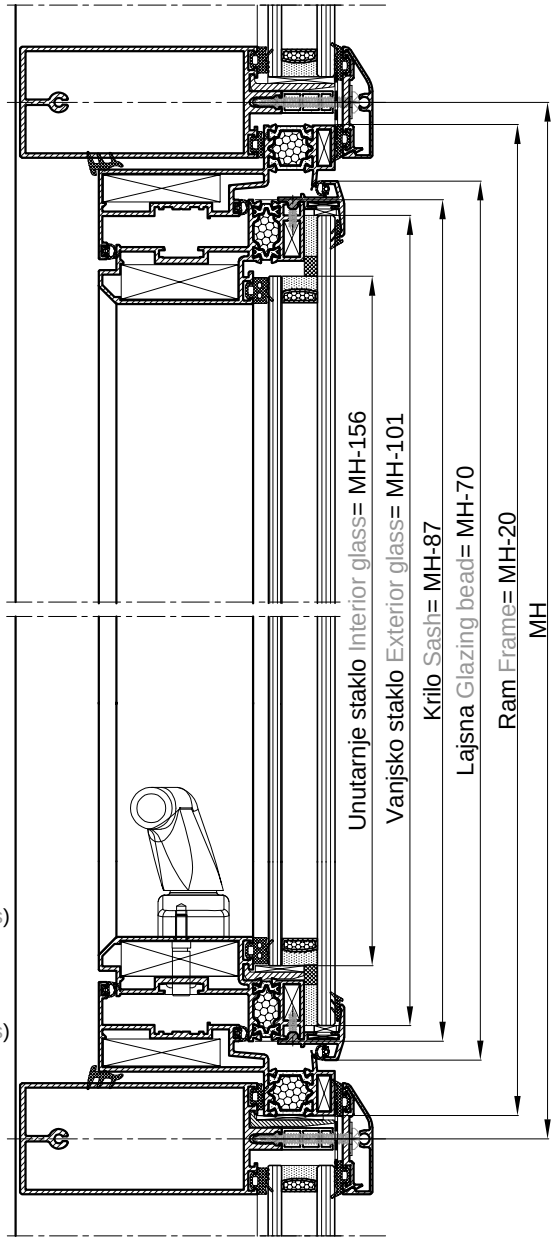

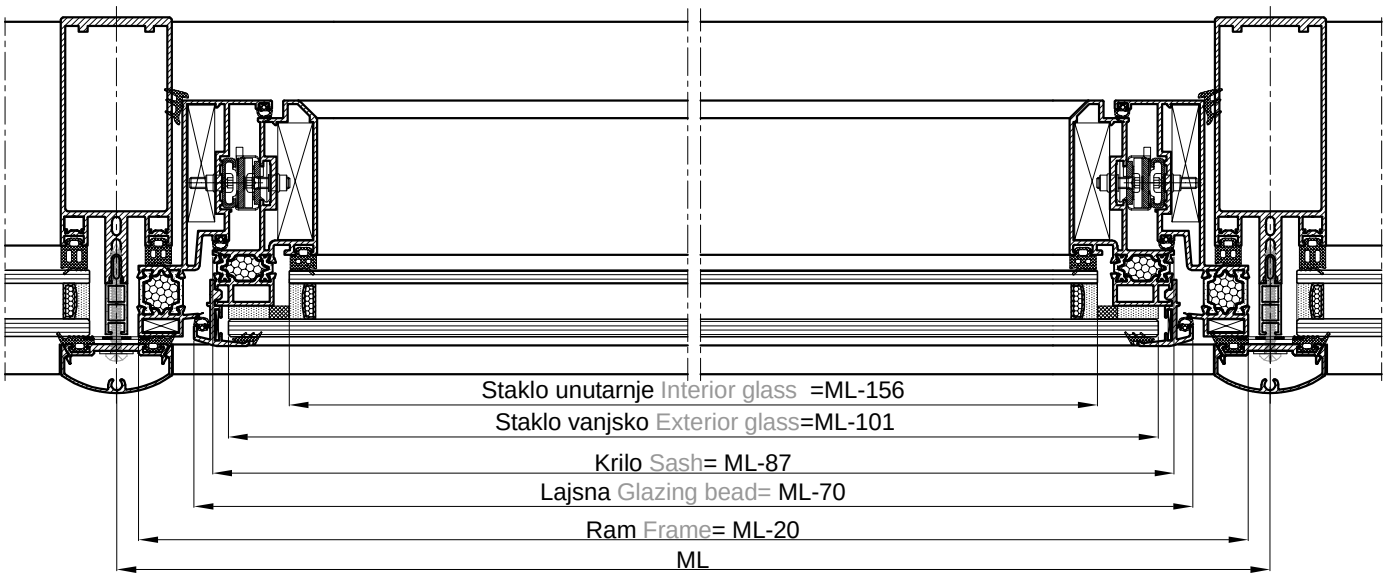

Rezna lista - Ram FT-0173F
- Krilo FT-0162F

Cutting list -Frame FT-0173F
-Sash FT-0162F

naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili				
Ram Frame FT-0173F	.....	ML-20	2	45-45
Ram Frame FT-0173F	.....	MH-20	2	45-45
Krilo Sash FT-0162F	.....	ML-89.5	2	45-45
Krilo Sash FT-0162F	.....	MH-89.5	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.118		.....	8	
Kutna spojnica Corner bracket 725.401		.....	4	
Kutna spojnica Corner bracket 730.002		.....	4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+2L		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		


Okovi i vijci Hardware and screws


Izbor mehanizma za ručno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.501.06.007 do 501.06.013

Selection of hardware for manual paralel opening depends upon window dimensions - according to the shematic on pages 501.06.007 through 501.06.013

Vijak Screw 433.044	.....	(2L+2H)/300	
Sigur. držač Exterior glass support 521.041			4

Staklo vanjsko	Exterior glass	.....	(ML-60)x(MH-64)	1
Staklo unutarnje	Interior glass	.....	(ML-152)x(MH-152)	1

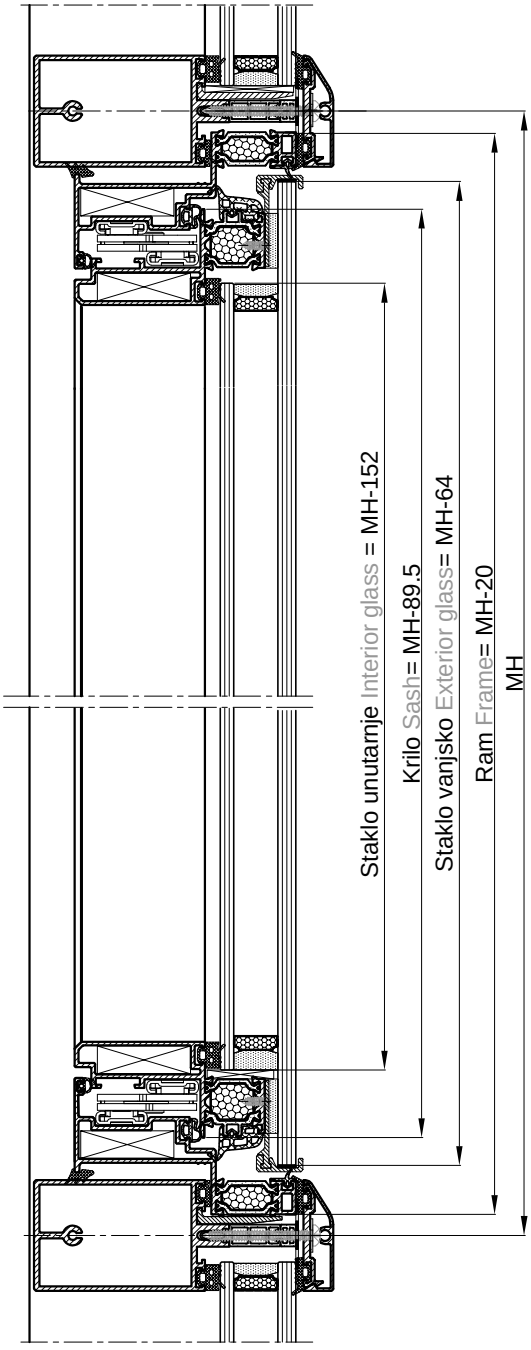


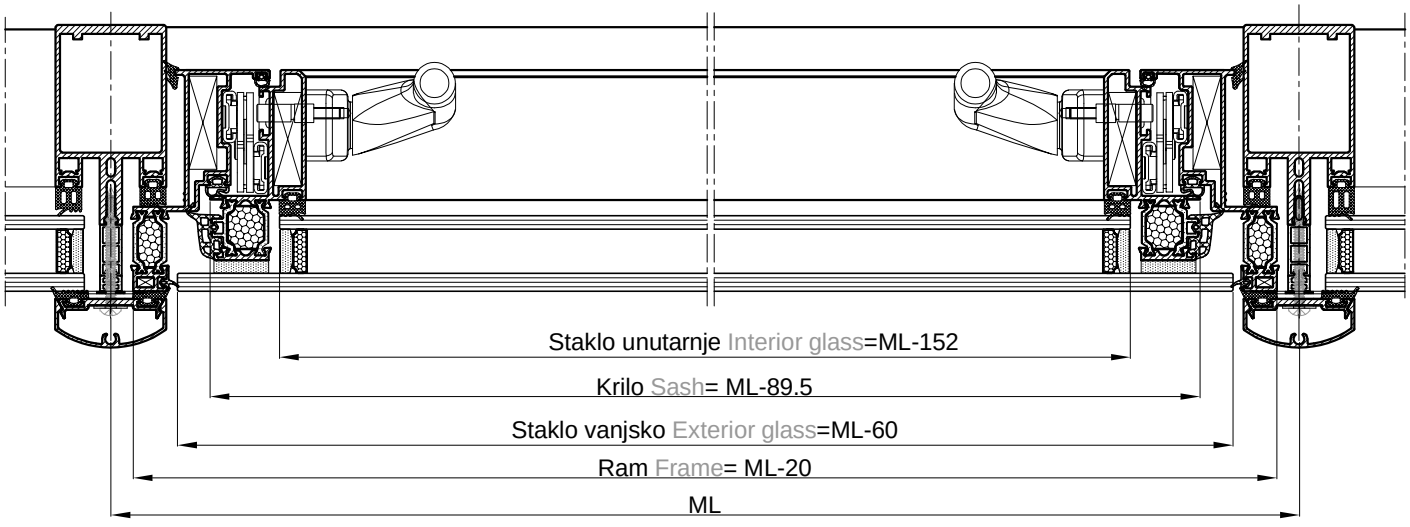


Rezna lista - Ram FT-0173F
- Krilo FT-0164F

Cutting list - Frame FT-0173F
- Sash FT-0164F


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0173F	.....	ML-20	2	45-45
Ram Frame FT-0173F	.....	MH-20	2	45-45
Krilo Sash FT-0164F	.....	ML-89.5	2	45-45
Krilo Sash FT-0164F	.....	MH-89.5	2	45-45
Držač motora Motor support F-1129	.....	ML-51	1	90-90
Pokl. lajsna Motor cover cap F-1128	.....	ML-51	1	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.118	.....		4	
Kutna spojnica Corner bracket 725.401	.....		4	
Kutna spojnica Corner bracket 725.034	.....		4	
Kutna spojnica Corner bracket 730.002	.....		4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+2L		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 311.009	.....	2L		
Brtva Gasket 311.007	.....	2H		
Okovi i vijci Hardware and screws				
Izbor mehanizma za motorno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.501.06.007 do 501.06.015 Selection of hardware for motorized paralel opening depends upon window dimensions - according to the shematic on pages 501.06.007 through 501.06.015				
Vijak Screw 433.044	.....	(2L+2H)/300		
Vijak Screw 433.050	.....	(ML-51)/300		
Sigur. držač Exterior glass support 521.041			4	
Staklo vanjsko Exterior glass	...	(ML-60)x(MH-64)	1	
Staklo unutarnje Interior glass	...	(ML-162)x(MH-162)	1	

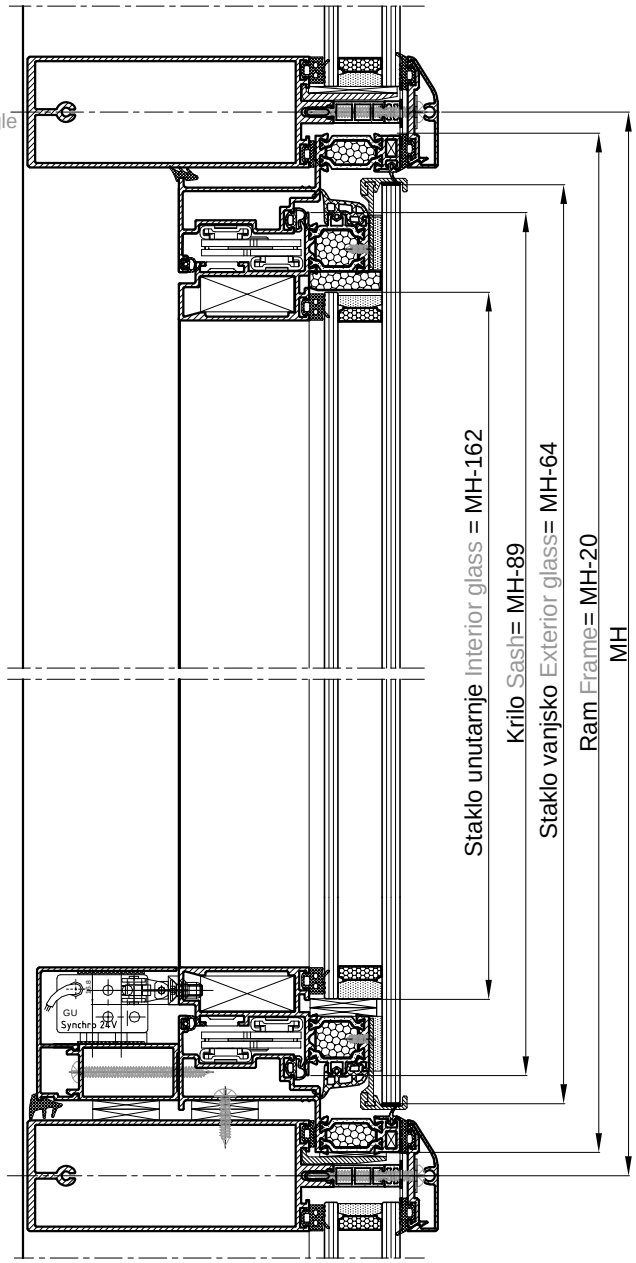


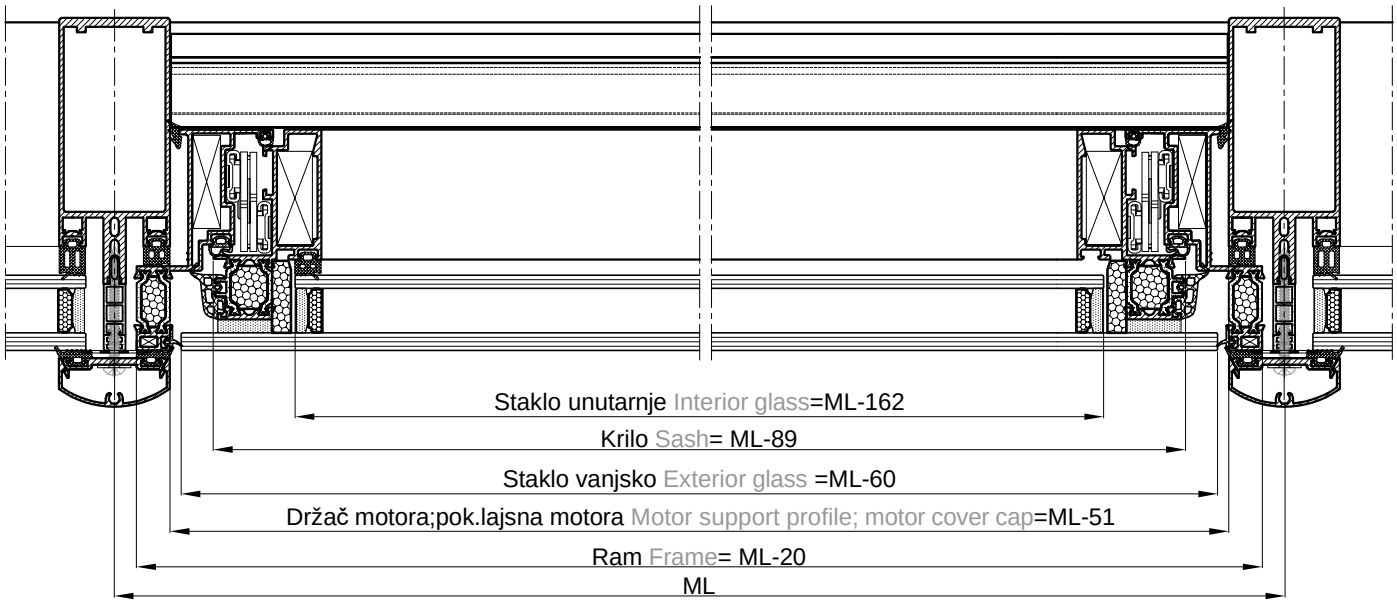

Rezna lista - Ram FT-0174F Cutting list -Frame FT-0174F
- Krilo FT-0170F -Sash FT-0170F


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0174F	.....	ML-20	2	45-45
Ram Frame FT-0174F	.....	MH-20	2	45-45
Krilo Sash FT-0170F	.....	ML-89.5	2	45-45
Krilo Sash FT-0170F	.....	MH-89.5	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.212		.....	4	
Kutna spojnica Corner bracket 725.118		.....	4	
Kutna spojnica Corner bracket 725.034		.....	4	
Kutna spojnica Corner bracket 710.153		.....	4	
Kutna spojnica Corner bracket 730.002		.....	4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+2L		
Brtva Gasket 358.011	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Izolacijski umetak Isolation 340.013	.....	2(LkrLsa-53)+2(HkrHsa-76)		
Okovi i vijci				
Izbor mehanizma za ručno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.501.06.007 do 501.06.013				
Selection of hardware for manual paralel opening depends upon window dimensions - according to the shematic on pages 501.06.007 through 501.06.013				
Vijak Screw 433.044	.....	(2L+2H)/300		
Držač stakla Glass support 521.014	.....		2	
Sigur. držač Exterior glass support 521.041			4	
Staklo vanjsko Exterior glass	.....	(ML-60)x(MH-66)	2	
Staklo unutarnje Interior glass	.....	(ML-162)x(MH-162)	1	

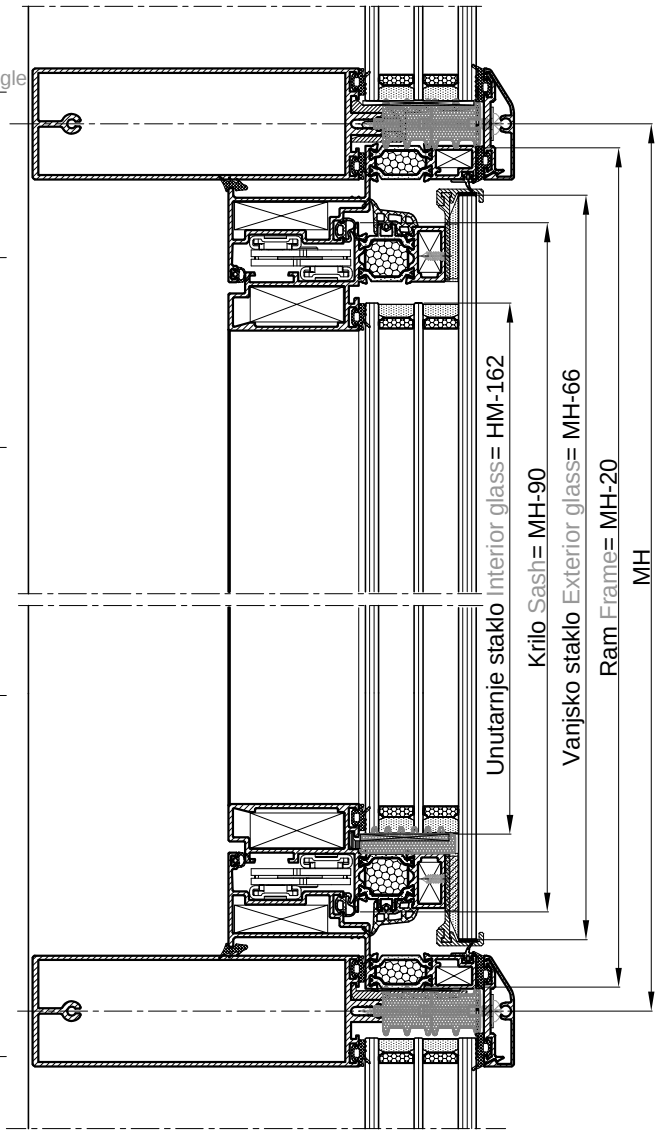


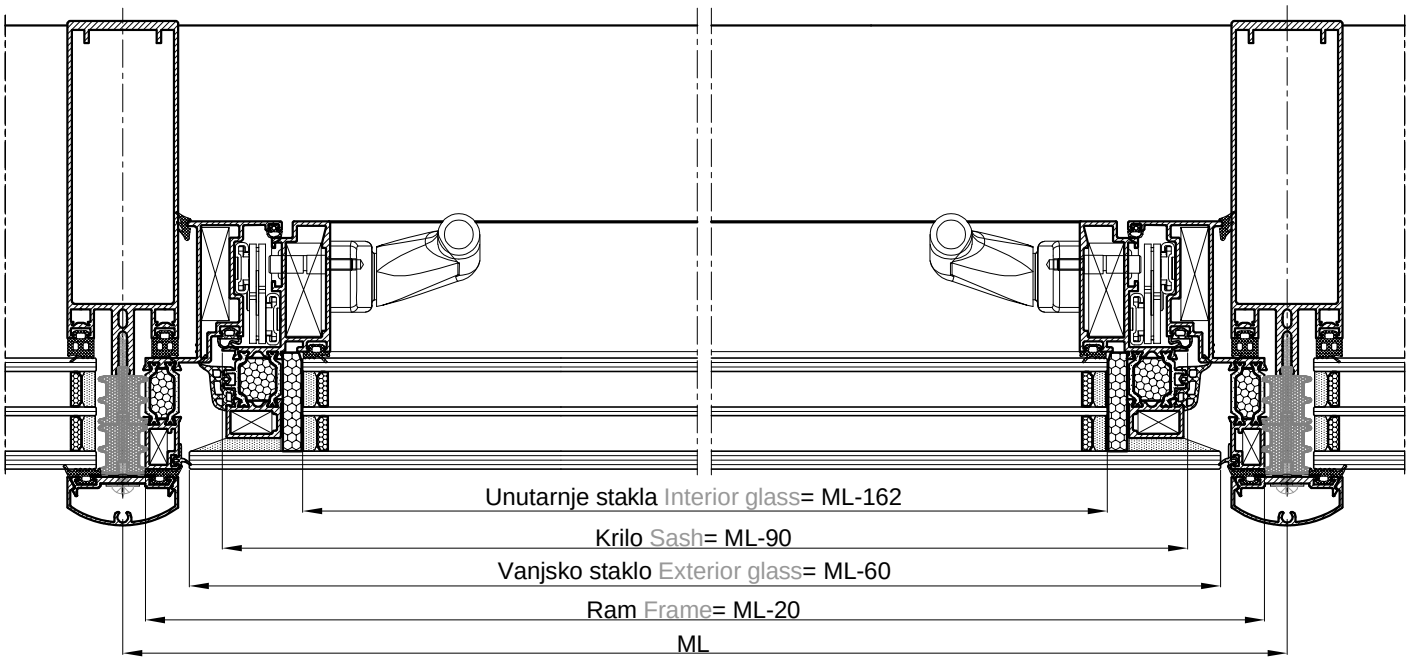

Rezna lista - Ram FT-0261F Cutting list - Frame FT-0261F
- Krilo FT-0203F - Sash FT-0203F


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0261F	.....	ML-18	2	45-45
Ram Frame FT-0261F	.....	MH-18	2	45-45
Krilo Sash FT-0203F	.....	ML-100	2	45-45
Krilo Sash FT-0203F	.....	MH-100	2	45-45
Lajsna Glazing bead Z40-668	.....	LkrLsa-93	2	90-90
Lajsna Glazing bead Z40-668	.....	HkrHsa-137	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.469		.....	4	
Kutna spojnica Corner bracket 710.452		.....	4	
Kutna spojnica Corner bracket 710.458		.....	4	
Kutna spojnica Corner bracket 710.443		.....	4	
Kutna spojnica Corner bracket 730.005		.....	4	
Kutna spojnica Corner bracket 730.001		.....	4	
Kutna spojnica Corner bracket 730.002		.....	4	
Brtve Gaskets				
Centralna brtva Central gasket 331.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 354.011	.....	2L+2H		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva prema staklu vanjska 328.002	.....	2Lkr+2Hkr		
Exterior glass gasket 328.002	.....	2Lsar+2Hsa		
Brtva prema staklu unutarnja318.001	.....	2Lkr+2Hkr		
Interior glass gasket 318.001	.....	2Lsa+2Hsa		
Brtva (spoj fasade i rama) 318.002	.....	2L+2H		
Gasket (between facade and frame) 318.002		2L+2H		
Okovi i vijci Hardware and screws				
Zaokretno otklopni mehanizam Turn tilt mechanism	.....	1 komplet 1 set		
Vijak Screw 433.049	.....	(2L+2H)/300		
Staklo 26 mm Glass 26 mm	.....	(LkrLsash-107)x(HkrHsash-107)	1	

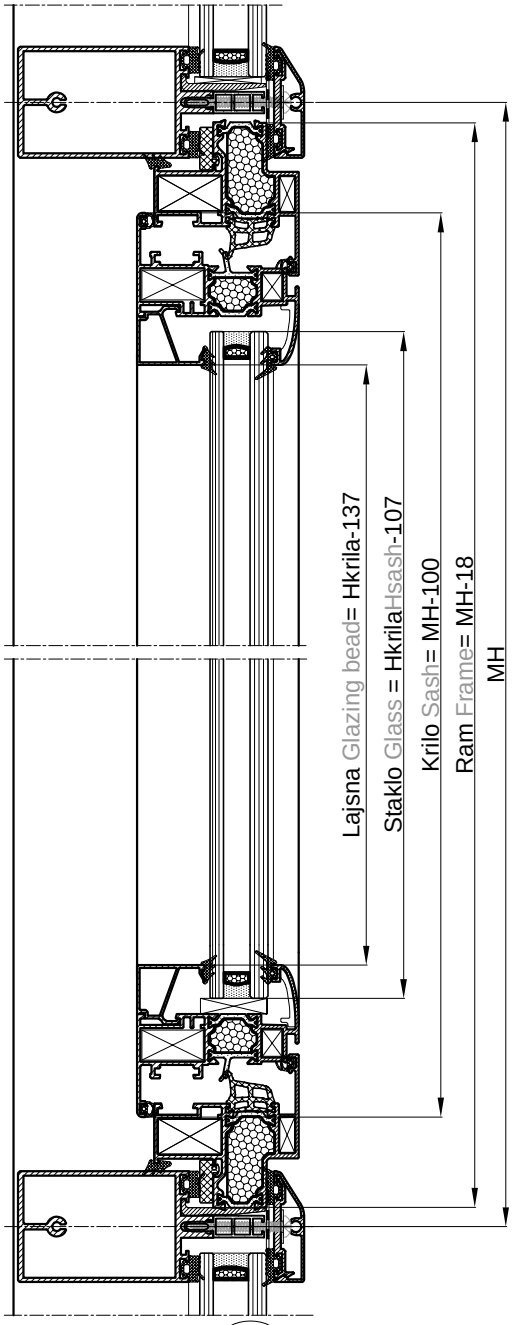


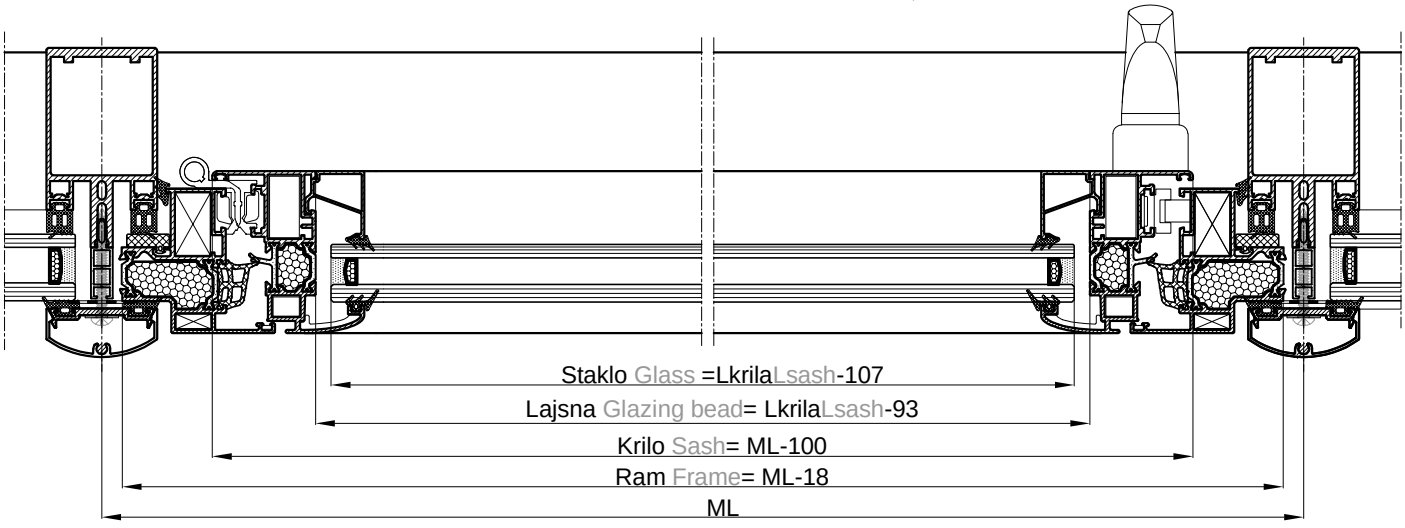

Rezna lista - Ram FT-1403F Cutting list - Frame FT-1403F
- Krilo FT-1420F - Sash FT-1420F

naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-1403F	.....	ML-18	2	45-45
Ram Frame FT-1403F	.....	MH-18	2	45-45
Krilo Sash FT-1420F	.....	ML-103	2	45-45
Krilo Sash FT-1420F	.....	MH-103	2	45-45
Lajsna Glazing bead Z40-667	.....	LkrLsa-93	2	90-90
Lajsna Glazing bead Z40-667	.....	HkrHsa-137	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.593		.....	4	
Kutna spojnica Corner bracket 725.032		.....	4	
Kutna spojnica Corner bracket 710.571		.....	4	
Kutna spojnica Corner bracket 710.570		.....	4	
Kutna spojnica Corner bracket 731.010		.....	4	
Kutna spojnica Corner bracket 730.001		.....	8	
Kutna spojnica Corner bracket 730.002		.....	4	
Brtve Gaskets				
Centralna brtva Central gasket 334.008	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 354.011	.....	2L+2H		
Brtva Gasket 328.006	.....	2LkrLsa+2HkrHsa		
Brtva prema staklu vanjska 321.003	.....	2Lkr+2Hkr		
Exterior glass gasket 321.003	.....	2Lsar+2Hsa		
Brtva prema staklu unutarnja318.002	.....	2Lkr+2Hkr		
Interior glass gasket 318.002	.....	2Lsa+2Hsa		
Brtva (spoj fasade i rama) 318.002	.....	2L+2H		
Gasket (between facade and frame) 318.002		2L+2H		
Izolacijski umetak Isolation 340.450	.....	2(LkrLsa-93)+2(HkrHsa-93)		
Okovi i vijci Hardware and screws				
Zaokretno otklopni mehanizam Turn tilt mechanism	.....	1 komplet 1 set		
Vijak Screw 433.050	.....	(2L+2H)/300		
Staklo 34 mm Glass 34 mm	.....	(LkrLsash-107)x(HkrHsash-107)	1	

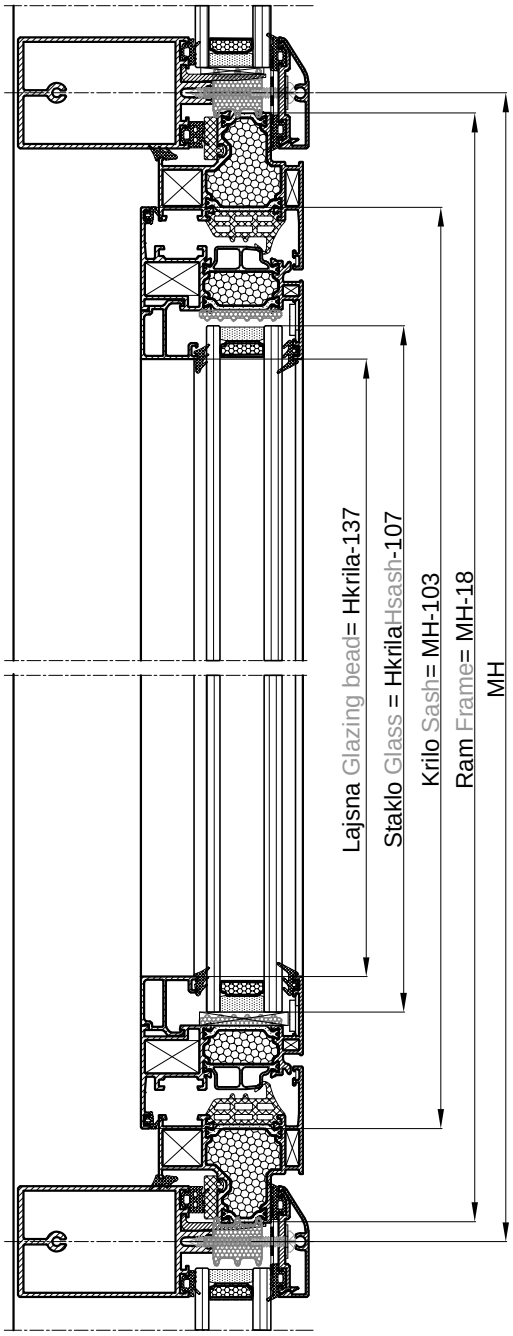


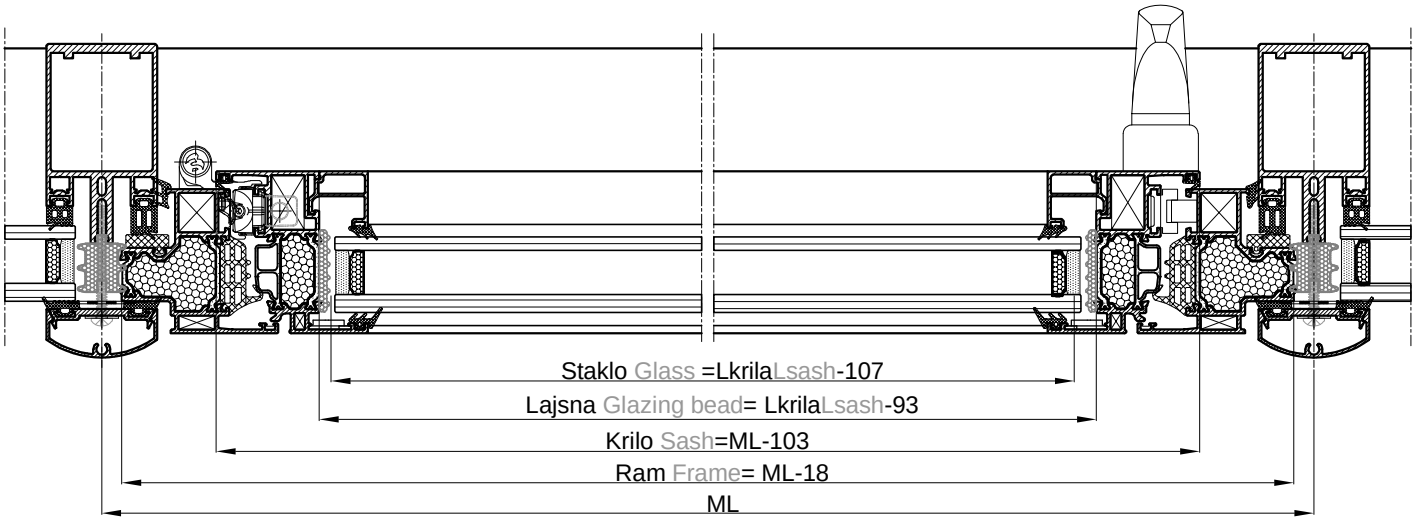


Rezna lista - Ram FT-0261 HF
- Krilo FT-0203 HF

Cutting list - Frame FT-0261F HF
- Sash FT-0203F HF


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0261 HF	.....	ML-18	2	45-45
Ram Frame FT-0261 HF	.....	MH-18	2	45-45
Krilo Sash FT-0203 HF	.....	ML-100	2	45-45
Krilo Sash FT-0203 HF	.....	MH-100	2	45-45
Staklo Lajsna Glazing bead Z40-667	.....	LkrLsa-93	2	90-90
Staklo Lajsna Glazing bead Z40-667	.....	HkrHsa-137	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.469		.....	4	
Kutna spojnica Corner bracket 710.452		.....	4	
Kutna spojnica Corner bracket 710.458		.....	4	
Kutna spojnica Corner bracket 710.443		.....	4	
Kutna spojnica Corner bracket 730.005		.....	4	
Kutna spojnica Corner bracket 730.001		.....	4	
Kutna spojnica Corner bracket 730.002		.....	4	
Brtve Gaskets				
Centralna brtva Central gasket 331.004	....	2LkrLsa+2HkrHsa		
Brtva Gasket 354.011	.....	2L+2H		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva prema staklu vanjska 321.004 Exterior glass gasket 321.004	.....	2LkrLsa+2HkrHsa		
Brtva prema staklu unutarnja 311.003	.....	2LkrLsa+2HkrHsa		
Interior glass gasket 311.003	.....	2L+2H		
Brtva (spoj fasade i rama) 318.002	.....	2(Lkr-93)+2(Hkr-109)		
Gasket (between frame and facade) 318.002		2(Lsa-93)+2(Hsa-109)		
Izolacijski umetak Isolation 348.002				
Okovi i vijci Hardware and screws				
Zaokretno otklopni mehanizam Turn tilt mechanism	.....	1 komplet 1 set		
Vijak Screw 433.135	.....	(2L+2H)/300		
Staklo 40 mm Glass 40 mm	.....	(LkrLsa-107)x(HkrHsa-107)		

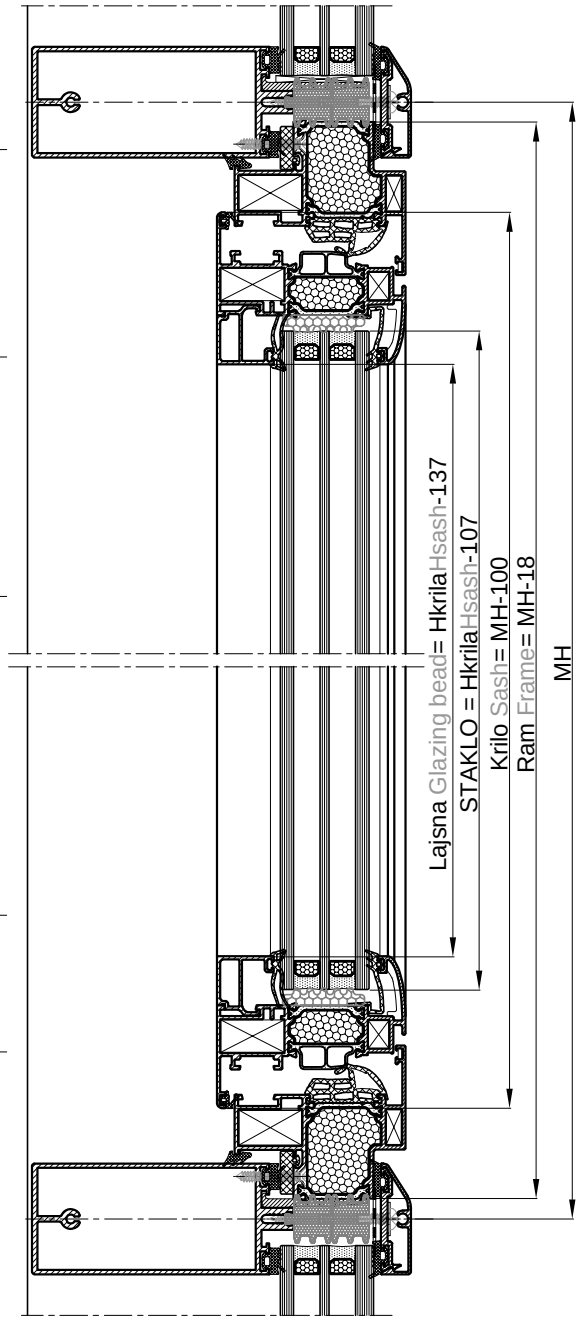


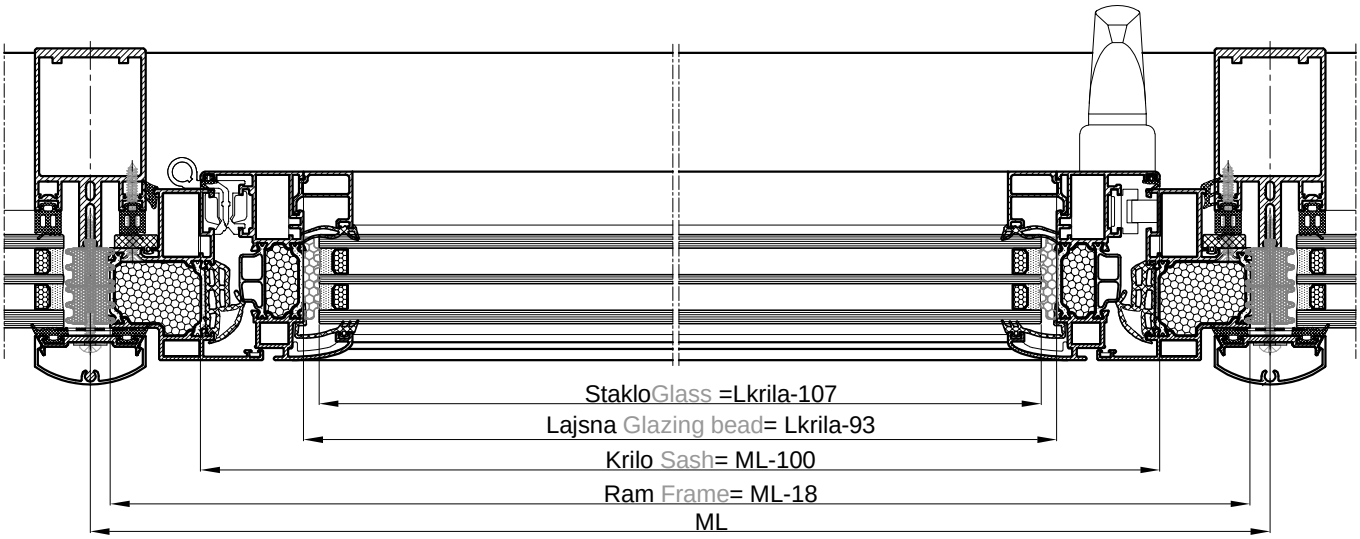

Rezna lista - Ram FT-1201 Cutting list - Frame FT-1201
- Krilo FT-1211 - Sash FT-1211


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-1201	.....	ML-20	2	45-45
Ram Frame FT-1201	.....	MH-20	2	45-45
Krilo Sash FT-1211	.....	ML-112	2	45-45
Krilo Sash FT-1211	.....	MH-112	2	45-45
Lajsna Glazing bead Z40-669	.....	LkrLsa-121	2	90-90
Lajsna Glazing bead Z40-669	.....	HkrHsa-165	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.415		.....	4	
Kutna spojnica Corner bracket 710.507		.....	4	
Kutna spojnica Corner bracket 730.001		.....	4	
Kutna spojnica Corner bracket 730.002		.....	4	
Kutna spojnica Corner bracket 710.411		.....	4	
Kutna spojnica Corner bracket 710.506		.....	4	
Kutna spojnica Corner bracket 731.010		.....	4	
Brtve Gaskets				
Brtva Gasket 327.001	.....	2LstaklaLglass+2HstaklaHglass		
Brtva Gasket 317.001	.....	2LstaklaLglass+2HstaklaHglass		
Brtva Gasket 317.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 327.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 337.001	.....	2LkrLsa+2HkrHsa		
Izolacijski umetak Isolation 340.142	.....	2(LkrLsa-111)+2(HkrHsa-129)		
Okovi i vijci Hardware and screws				
Zaokretno otklopni mehanizam	.....	1 komplet		
Turn-tilt mechanism	.....	1 set		
Vijak Screw 433.136	.....	(2L+2H)/300		
Držač stakla Glass suport 521.234	.....	2		
Staklo Glass	.....	(LkrilaLsash-129)x(HkrilaHsash-129)		

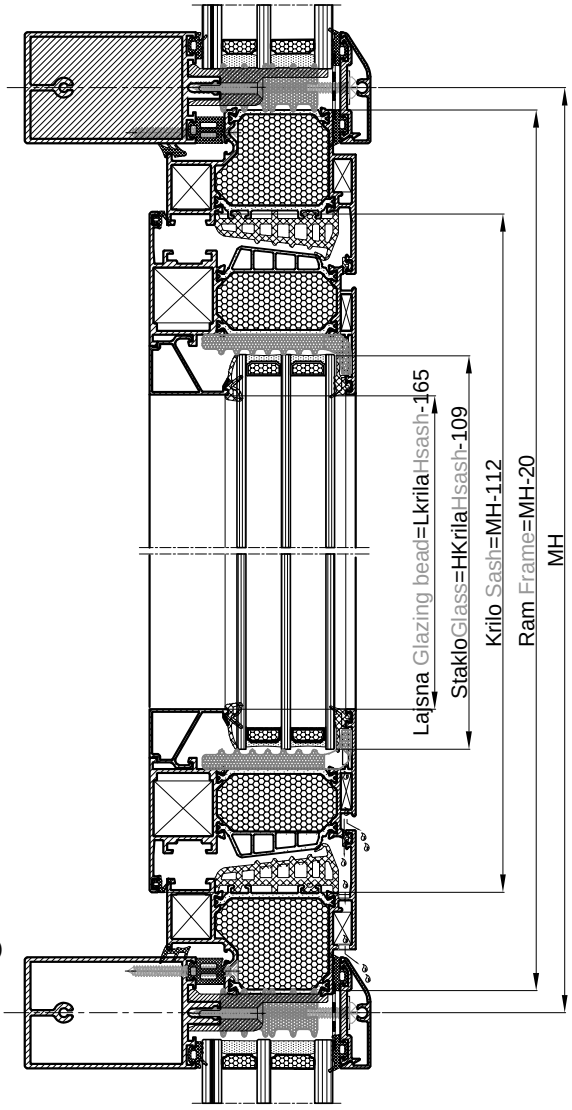


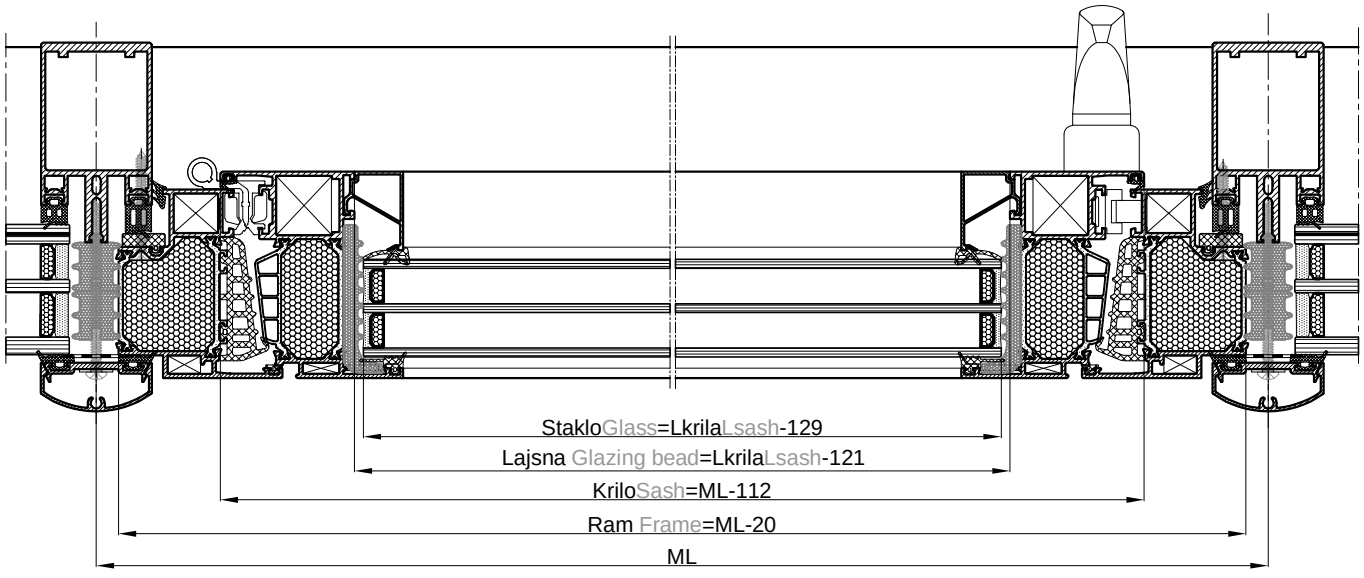

Rezna lista - Ram FT-0187 F Cutting list - FRAME FT-0187 F
- Krilo FT-0167 F - SASH FT-0167 F


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0187F	.....	ML-18	2	45-45
Ram Frame FT-0187F	.....	MH-18	2	45-45
Krilo Sash FT-0167F	.....	ML-100	2	45-45
Krilo Sash FT-0167F	.....	MH-100	2	45-45
Staklo lajsna Glazing bead F-0807	.....	Lkr-83	2	90-90
Staklo lajsna Glazing bead F-0807	.....	Hkr-111	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.469	....		4	
Kutna spojnica Corner bracket 710.448	....		4	
Kutna spojnica Corner bracket 730.011	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Kutna spojnica Corner bracket 730.002	....		4	
Kutna spojnica Corner bracket 710.442	....		4	
Kutna spojnica Corner bracket 710.111	....		4	
Brtve Gaskets				
Brtva Gasket 321.005	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 331.004	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 358.011	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Izolacijski umetak Isolation 340.002	.....	2L+2H		
Okovi i vijci Hardware and screws				
Dry kip mehanizam Turn tilt mechanism	.....	1 komplet 1 set		
Vijak Screw 433.044	.....	(2L+2H)/300		
Vijak Screw 433.002	.....	(2L+2H)/300	1	
Staklo Glass 30 mm	.....	(LkrLsa-97)x(HkrHsa-97)		

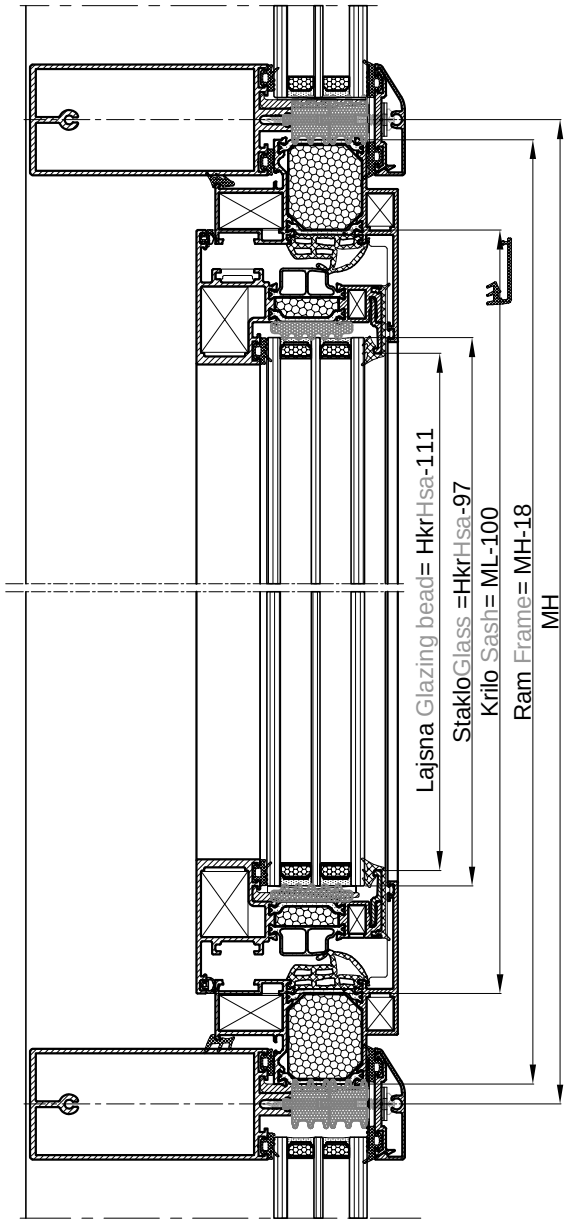


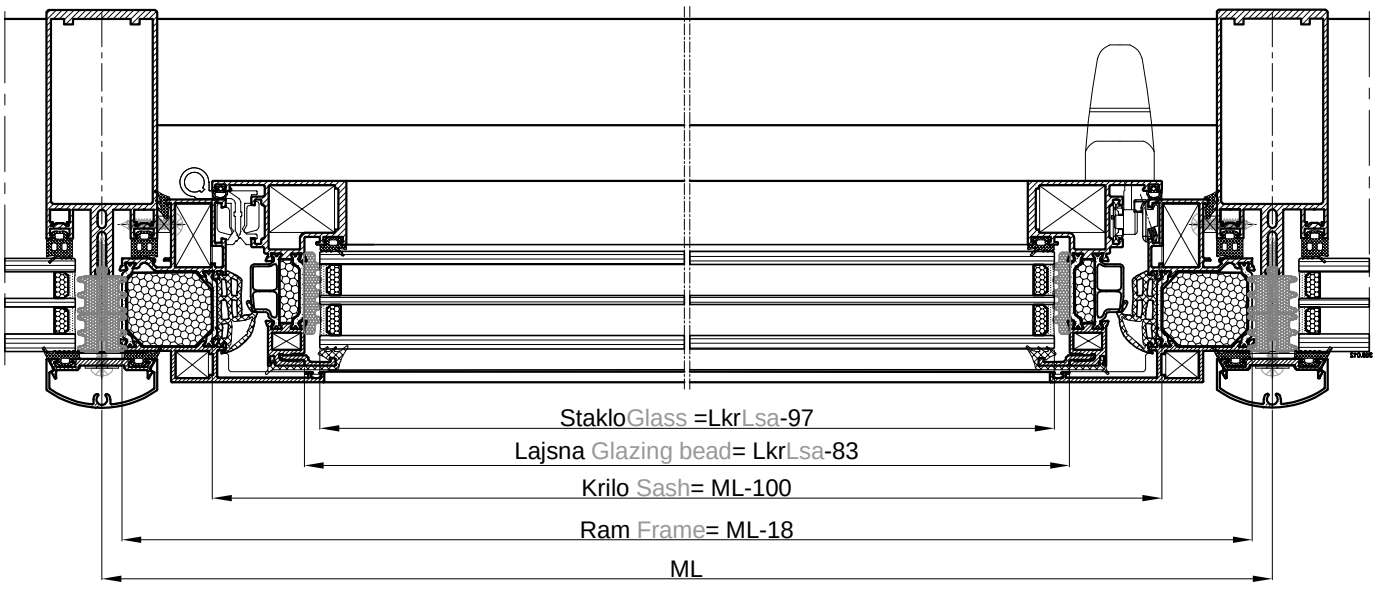

Rezna lista - Ram FT-0260F Cutting list - Frame FT-0260F
- Krilo FT-0254F - Sash FT-0254F


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0260F	.....	ML-18	1	45-45
Ram Frame FT-0260F	.....	MH-9	2	45-90
Krilo Sash FT-0260F	.....	ML-136	2	45-45
Krilo Sash FT-0260F	.....	MH-78.5	2	45-45
Prag Threshold FT-0251	.....	Lkr-44	1	90-90
Lajsna Glazing bead Z40-667	.....	LkrLsa-146	2	90-90
Lajsna Glazing bead Z40-667	.....	HkrHsa-190	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.056		.....	4	
Kutna spojnica Corner bracket 725.401		.....	4	
Kutna spojnica Corner bracket 710.060		.....	2	
Kutna spojnica Corner bracket 710.051		.....	2	
Kutna spojnica Corner bracket 730.001		.....	10	
Brtve Gaskets				
Brtva Gasket 354.011	.....	2H		
Brtva Gasket 328.006	.....	3LkrLsa+4HkrHsa		
Brtva prema staklu vanjska 321.003	.....	2Lkr+2Hkr		
Exterior glass gasket 321.003	.....	2Lsar+2Hsa		
Brtva prema staklu unutarnja 318.002	.....	Lkr+2Hkr		
Interior glass gasket 318.002	.....	Lsa+2Hsa		
Brtva (spoj fasade i rama) 318.002	.....	L+2H		
Gasket (between facade and frame) 318.002		L+2H		
Set čepova za prag 401.008	.....	1 par		
Set of threshold plugs 401.008	.....	1 pair		
Brtva prema pragu 341.001	.....	Lkr		
Gasket towards threshold 341.001	.....	Lsa		
Maska za drenažu Drainage cap 373.003	.....	2 kom 2pcs		
Okovi i vijci Hardware and screws				
Vijak Screw 433.049	.....	(L+2H)/300		
Vijak Screw 433.135	.....	(L+2H)/300		
Brava Lock 124.001	.....	1		
Šild za vrata Door shield 121.002	.....	1		
Ručka za vrata Door handle 104.001.xx	.....	par pair		
Protuprovalni umetak Anti-burglary insert 141.002	.....	2		
Uložak za bravu - ISEO cylinder for lock 126.003	.....	1		
Usadna baglama 65mm Hinge 65mm 112.001	.....	2		
Staklo 28 mm Glass 28 mm	.....	(LkrLsash-160)x(HkrHsash-160)	1	

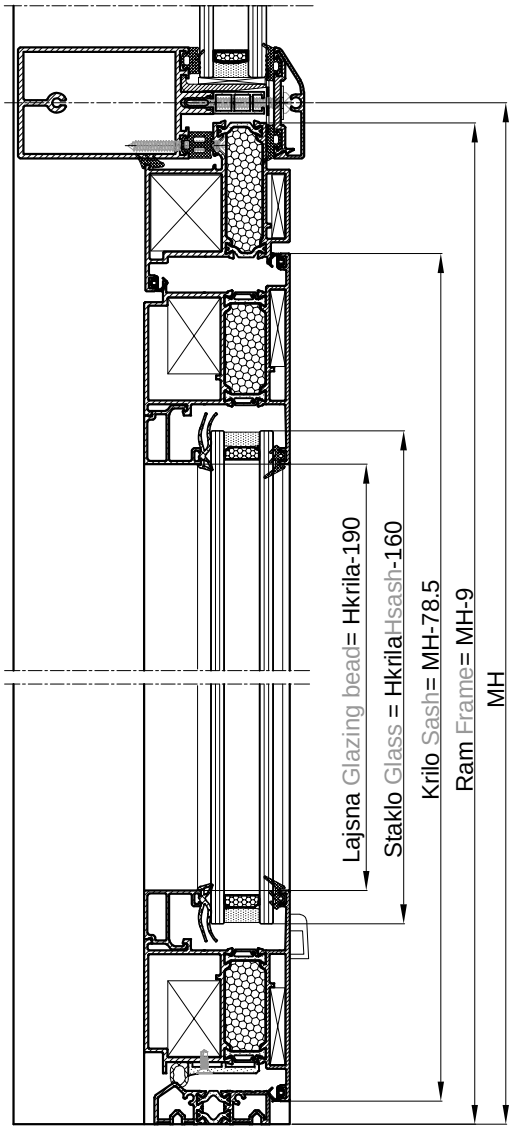


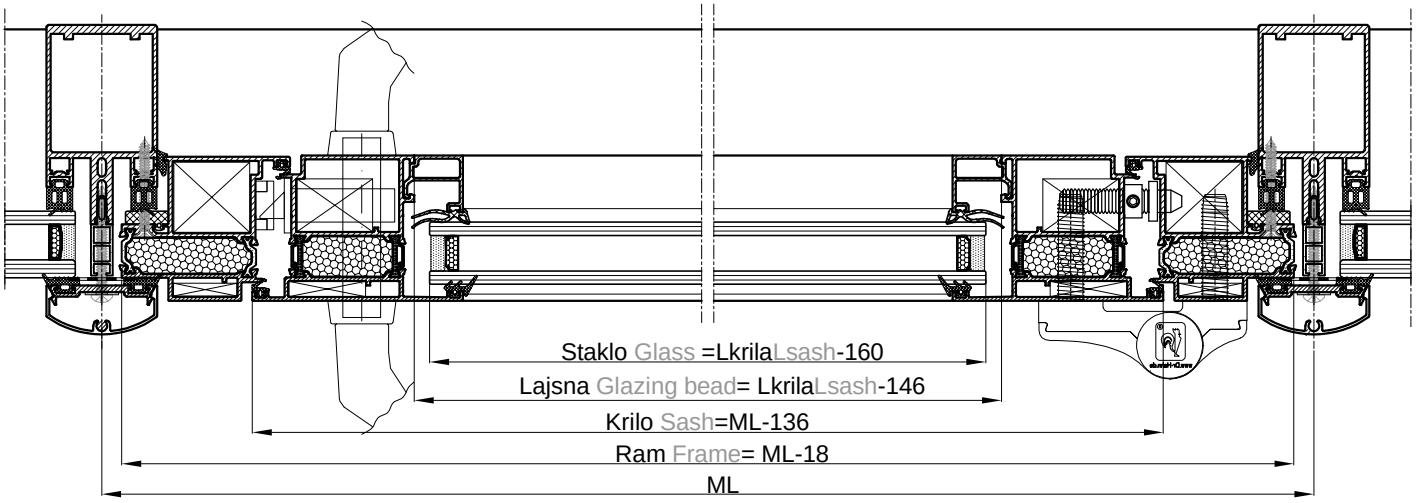

Rezna lista - Ram FT-0553F Cutting list - Frame FT-0553F
- Krilo FT-0562F - Sash FT-0562F


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0553F	.....	ML-18	1	45-45
Ram Frame FT-0553F	.....	MH-9	2	45-90
Krilo Sash FT-0562F	.....	ML-150	2	45-45
Krilo Sash FT-0562F	.....	MH-85	2	45-45
Prag Threshold FT-0585F	.....	Lkr-58	1	90-90
Umetak Insert F-1188		Lkr-58	1	90-90
Lajsna Glazing bead Z40-666	.....	LkrLsa-160	2	90-90
Lajsna Glazing bead Z40-666	.....	HkrHsa-204	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.134		.....	4	
Kutna spojnica Corner bracket 710.062		.....	4	
Kutna spojnica Corner bracket 710.140		.....	2	
Kutna spojnica Corner bracket 710.130		.....	2	
Kutna spojnica Corner bracket 730.001		.....	2	
Kutna spojnica Corner bracket 731.010		.....	4	
Brtve Gaskets				
Centralna brtva Central gasket-331.014		1L+2H		
Centralna brtva Central gasket-331.016		2Lkr+2Hkr		
Brtva praga Threshold gasket 331.012		L-154		90-90
Brtva prema staklu Glazing gasket 321.003		2Lkr+2Hkr		
Brtva prema staklu Glazing gasket 311.004		2Lkr+2Hkr		
Brtva na spoju rama i krila Rebate gasket 328.006		(1Lrama+2Hrama)+(2Lkr+2Hkr)		
Izolacijski umetak Insulation 340.013		2(Lkr-150)+2(Hkr-174)		
Umetak na pragu Threshold insert 373.020		1 par		
Okovi i vijci Hardware and screws				
Brava Lock G-U Secury s MR2 (35) tri ključanja three locks 122.016			1	
Prihvatna pločica Striking plate 24x6x2 122.028			2	
Prihvatni lim Striking plate 24x6 (L+D) 122.029			1	
Trodijelna cilindrična šarka Barrel door hinge 115.009.01 - bijela white			2 ili (3) ovisno o visini i tež.krila 2 or (3) (dep. of height and weight)	
Ručka za vrata Door handle 104.009.01 - bijela white			1	
Cilindar Cylinder (71+31) 124.013			1	
Štitnik cilindra Cylinder rosette 124.032.01 - bijeli white			1 par	
Protuprovalni umetak Security pin 141.002			2	
Vijak Screw 433.093			3	
Staklo 28 mm Glass 28 mm	.....	(LkrLsash-174)x(HkrHsash-174)	1	

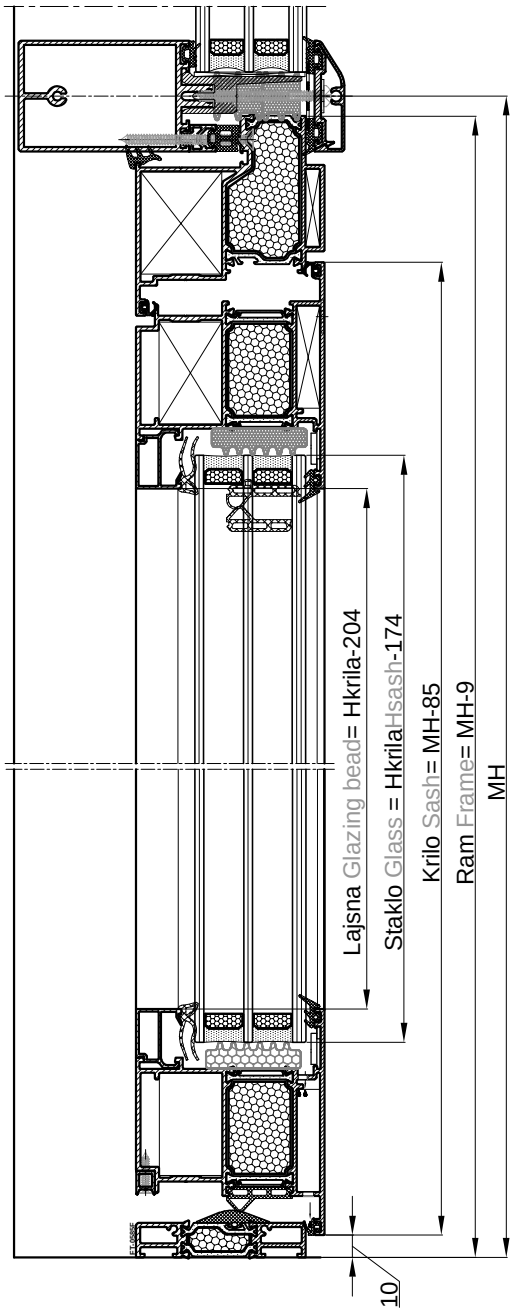


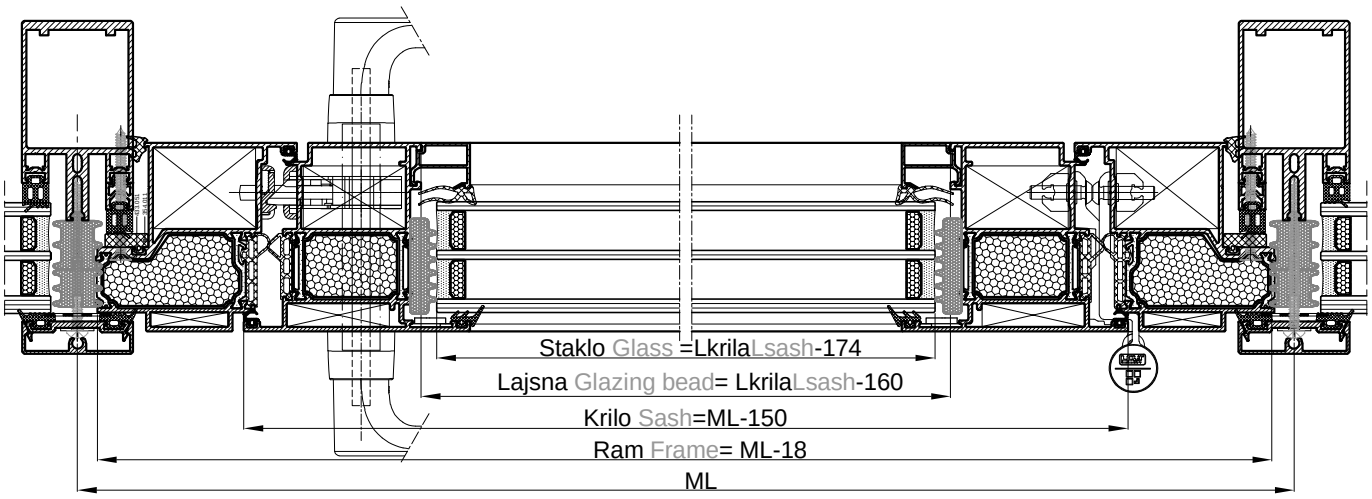

Rezna lista - Ram FT-0175F Cutting list - Frame FT-0175F
- Krilo FT-0157F - Sash FT-0157F

naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0175F	.....	ML-20	2	45-45
Ram Frame FT-0175F	.....	MH-20	2	45-45
Krilo Sash FT-0157F	.....	ML-86	2	45-45
Krilo Sash FT-0157F	.....	MH-86	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket	725.118	.....	8	
Kutna spojnica Corner bracket	710.437	.....	4	
Kutna spojnica Corner bracket	725.121	.....	4	
Kutna spojnica Corner bracket	730.002	.....	4	
Brtve Gaskets				
Brtva Gasket 351.018	.....	2L+2H		
Brtva Gasket 358.021	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Okovi i vijci Hardware and screws				
Makaze fasadnog ventusa (vrsta ovisno o visini prozora) Friction stays (type depending on window height)			1 par 1 pair	
Okov fasadnog ventusa sa mogućnošću zaključavanja u više točaka: Hung vent hardware with option of multiple locking points:				
Zaključavanje u donjem pojasu: Lower position locking:	....	101.000 133.003 133.005	1 1 (jedno zaklj. one lock) set 1 (tri zaklj. three locks)	
Zaključavanje u donjem pojasu i bočno: Lower and side position locking:	....	101.000 133.003 133.004 133.005	1 1 set 1 set 1 (tri zaklj. three locks)	
Vijak Screw 433.043	.....	(2L+2H)/300		
Sigur. držač Exterior glass support 521.061.			4	
Držač stakla Glass support 521.014	.....		2	
Staklo vanjsko Exterior glass	.....	(ML-40)x(MH-40)	1	
Staklo unutarnje Interior glass	.....	(ML-150)x(MH-150)	1	

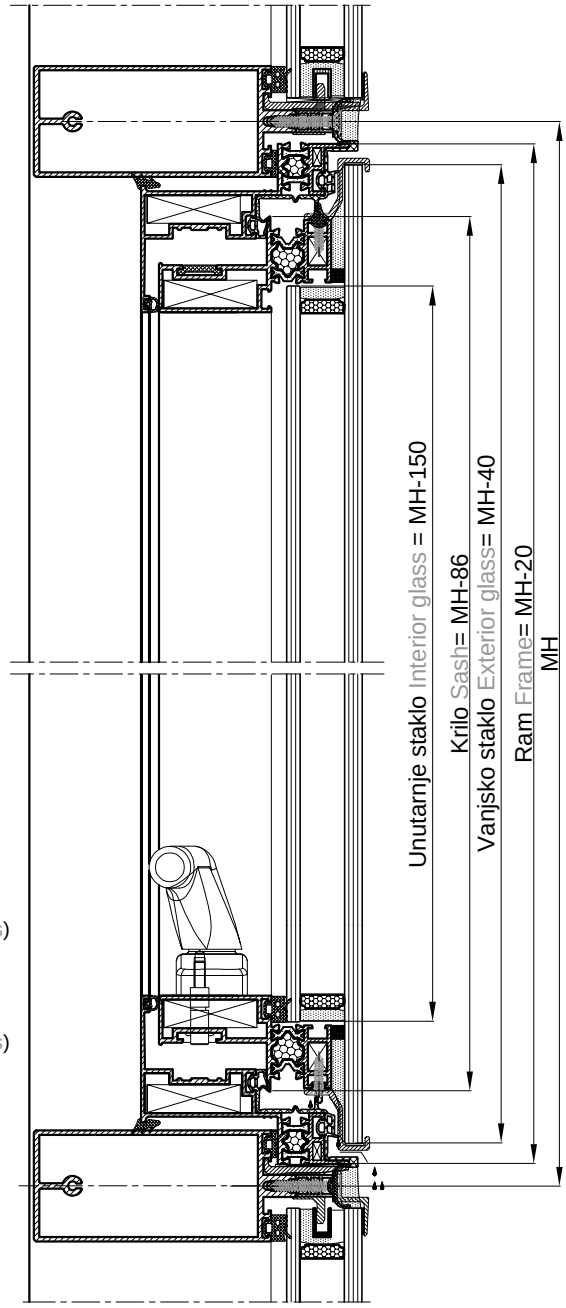

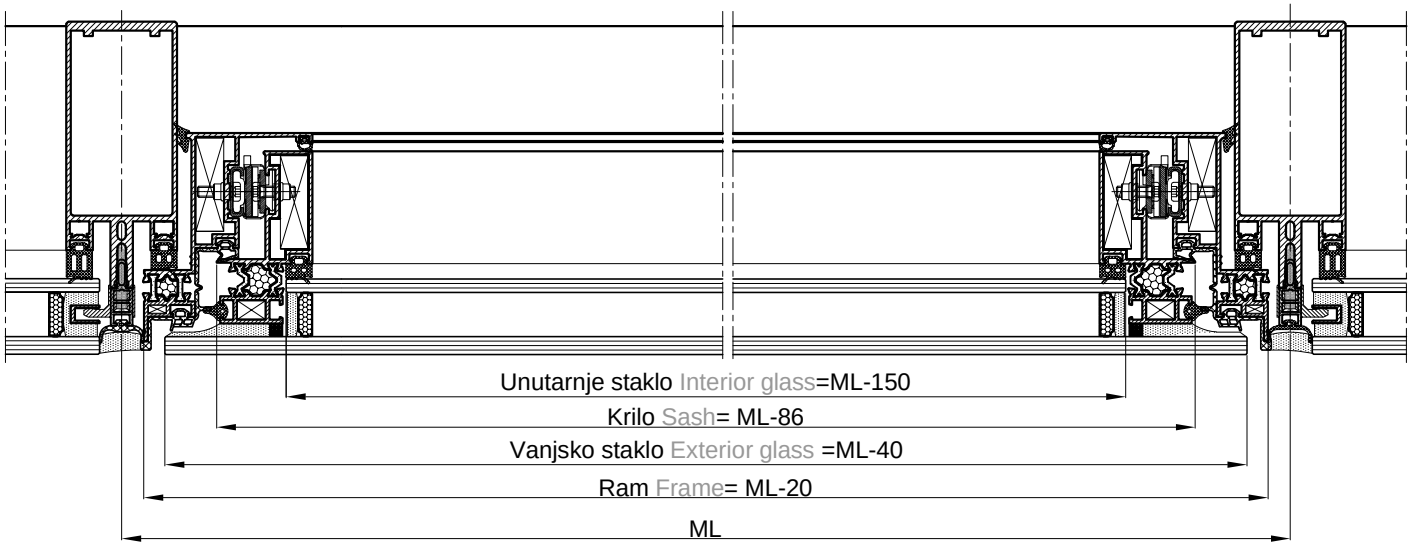

Rezna lista - Ram FT-0173F Cutting list - Frame FT-0173F
- Krilo FT-0162F - Sash FT-0162F

naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0173F	.....	ML-20	2	45-45
Ram Frame FT-0173F	.....	MH-20	2	45-45
Krilo Sash FT-0162F	.....	ML-89.5	2	45-45
Krilo Sash FT-0162F	.....	MH-89.5	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.118		.....	8	
Kutna spojnica Corner bracket 725.401		.....	4	
Kutna spojnica Corner bracket 730.001		.....	4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+2L		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		


Okovi i vijci Hardware and screws


Izbor mehanizma za ručno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.501.06.007 do 501.06.013

Selection of hardware for manual paralel opening depends upon window dimensions - according to the shematic on pages 501.06.007 do 501.06.013

Vijak Screw 433.044	.....	(2L+2H)/300	
Sigur. držač Exterior glass support 521.041.			4
Držač stakla Glass support 521.014	.....		2


Staklo vanjsko	Exterior glass	.....	(ML-60)x(MH-64)	1
Staklo unutarnje	Interior glass	.....	(ML-152)x(MH-152)	1

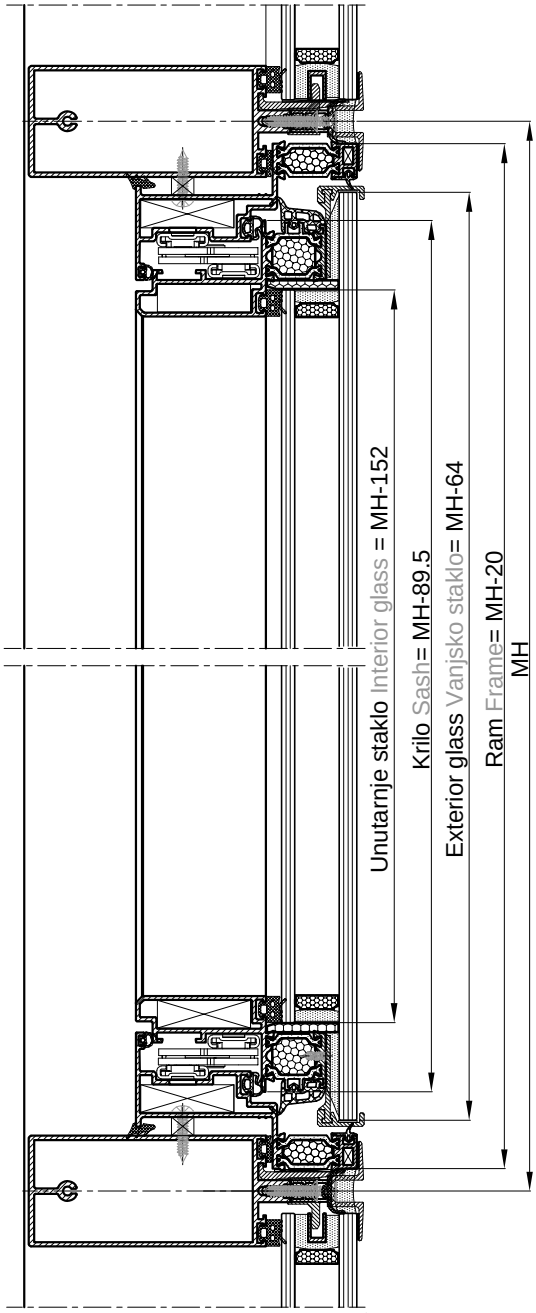


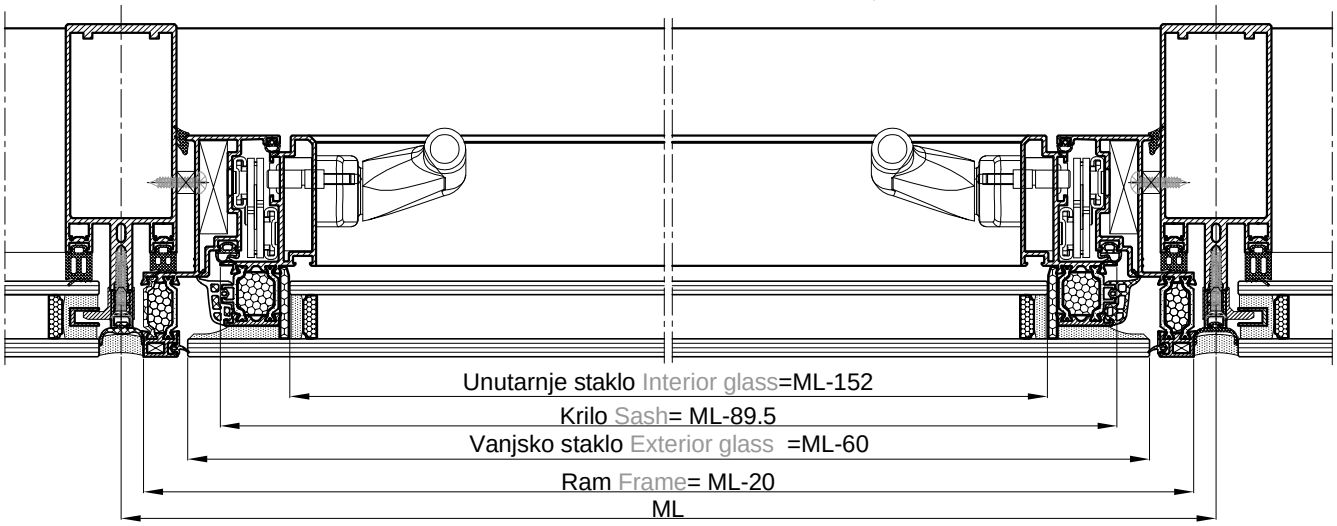

Rezna lista - Ram FT-0173F Cutting list - Frame FT-0173F
- Krilo FT-0164F - Sash FT-0164F

naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0173F	.....	ML-20	2	45-45
Ram Frame FT-0173F	.....	MH-20	2	45-45
Krilo Sash FT-0164F	.....	ML-89.5	2	45-45
Krilo Sash FT-0164F	.....	MH-89.5	2	45-45
Držač motora Motor support profile F-1129	..	ML-51	1	90-90
Pokl. lajsna Motor cover cap F-1128	.....	ML-51	1	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.118		.....	4	
Kutna spojnica Corner bracket 725.401		.....	4	
Kutna spojnica Corner bracket 725.034		.....	4	
Kutna spojnica Corner bracket 730.001		.....	4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+2L		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 311.009	.....	2L		
Brtva Gasket 318.002	.....	2H		
Okovi i vijci Hardware and screws				
Izbor mehanizma za motorno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.501.06.007 do 501.06.015 Selection of hardware for motorized paralel opening depends upon window dimensions - according to the shematic on pages 501.06.007 do 501.06.015				
Vijak Screw 433.044	.....	(2L+2H)/300		
Vijak Screw 433.050	.....	(ML-51)/300		
Sigur. držač Exterior glass support 521.041	.	4		
Držač stakla Glass support 521.014	.....	2		
Staklo vanjsko Exterior glass	.....	(ML-60)x(MH-64)	1	
Staklo unutarnje Interior glass	.....	(ML-162)x(MH-162)	1	

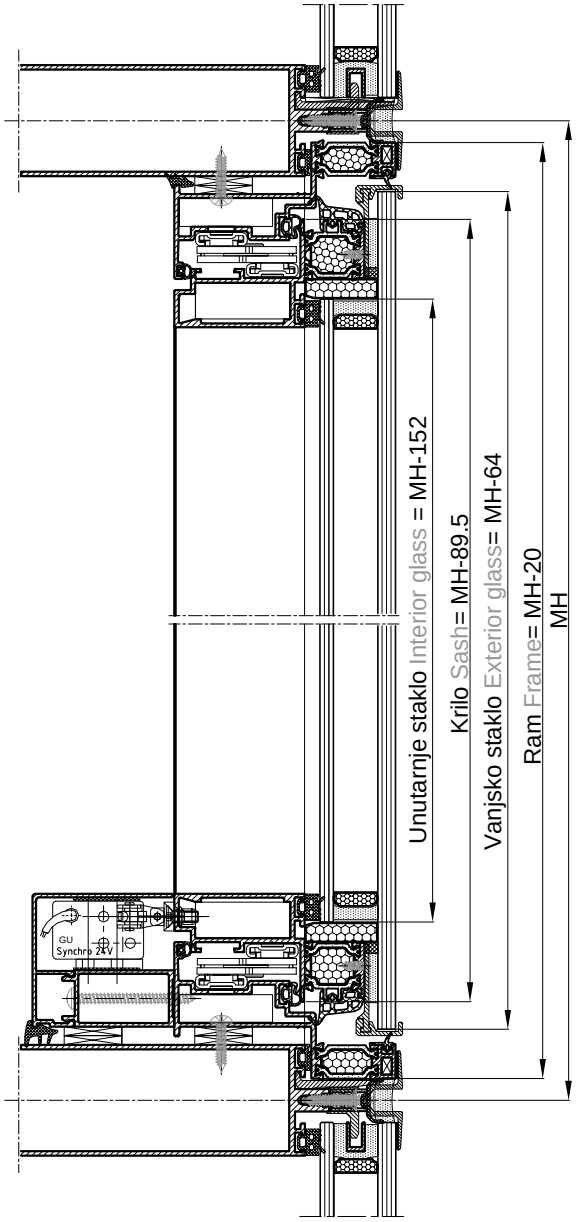

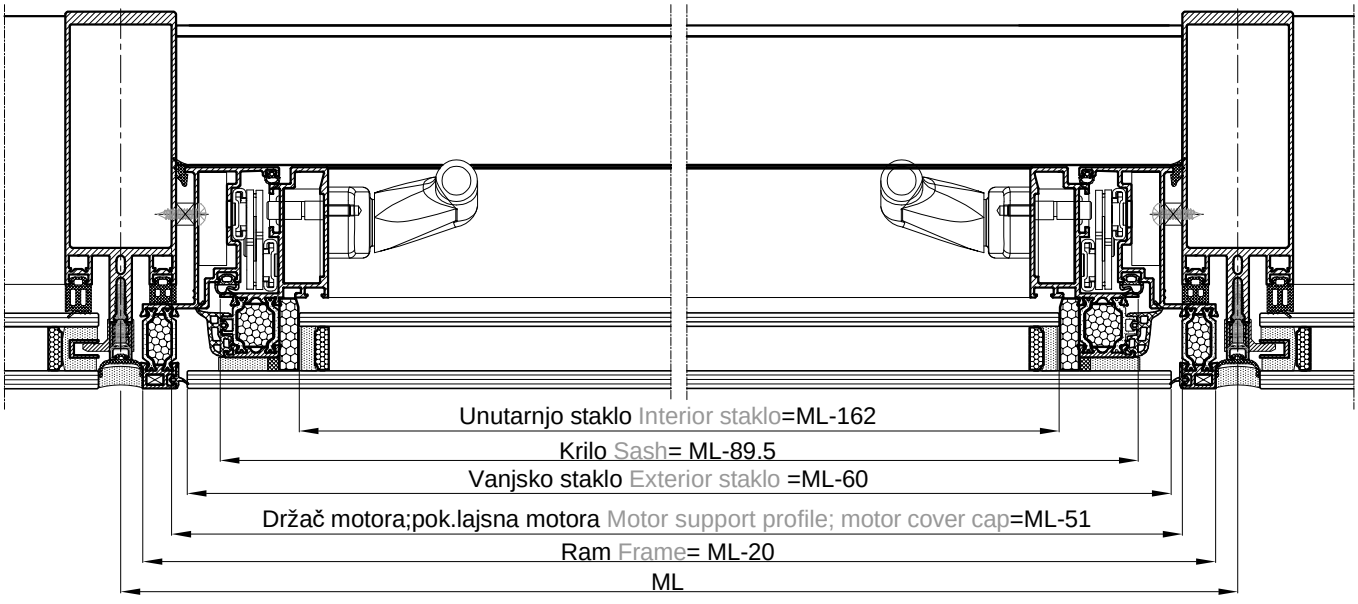

Rezna lista - Ram FT-0174F Cuting list - Frame FT-0174F
- Krilo FT-0170F - Sash FT-0170F


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0174F	.....	ML-20	2	45-45
Ram Frame FT-0174F	.....	MH-20	2	45-45
Krilo Sash FT-0170F	.....	ML-89.5	2	45-45
Krilo Sash FT-0170F	.....	MH-89.5	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.118		.....	4	
Kutna spojnica Corner bracket 725.212		.....	4	
Kutna spojnica Corner bracket 725.034		.....	4	
Kutna spojnica Corner bracket 710.153		.....	4	
Kutna spojnica Corner bracket 730.001		.....	4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+2L		
Brtva Gasket 358.011	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Izolacijski umetak Isolation 340.013	.....	2(LkrLsa-53)+2(HkrHsa-76)		


Okovi i vijci Hardware and screws

Izbor mehanizma za ručno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.501.06.007 do 501.06.013

Selection of hardware for manual paralel opening depends upon window dimensions - according to the shematic on pages 501.06.007 do 501.06.013


Vijak Screw 433.043	.....	(2L+2H)/300	
Držač stakla Glass support 521.064	.....		2
Sig. držač Exterior glass support 521.041	..		4
Staklo vanjsko Exterior glass	.....	(ML-60)x(MH-64)	1
Staklo unutarnje Interior glass	.....	(ML-162)x(MH-162)	1

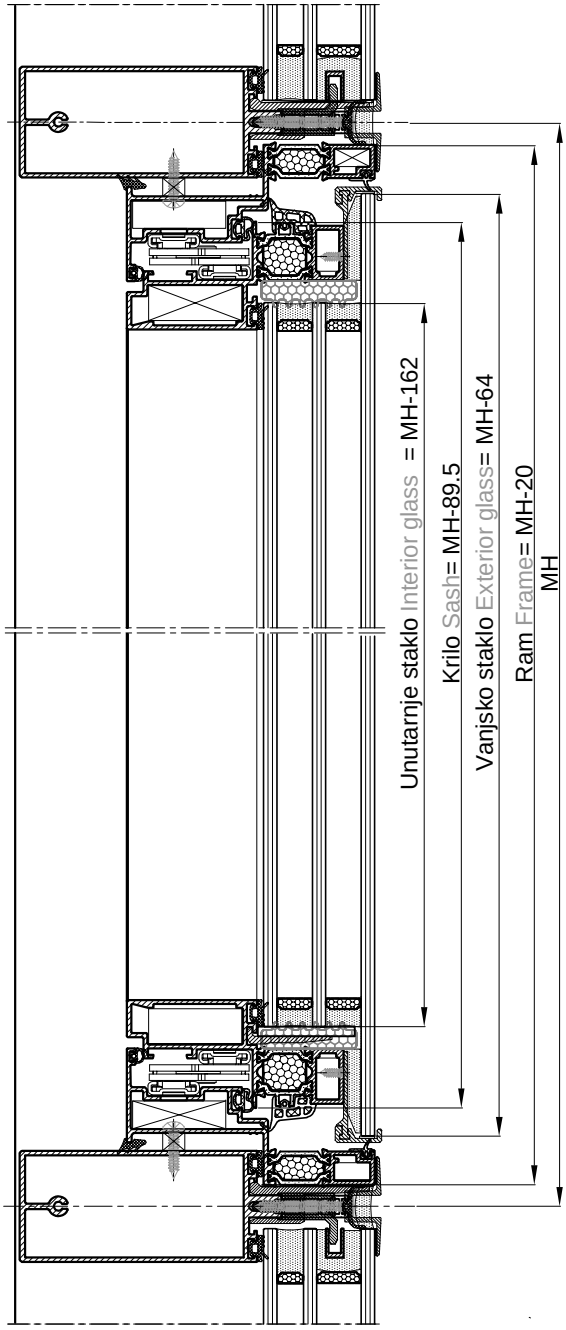

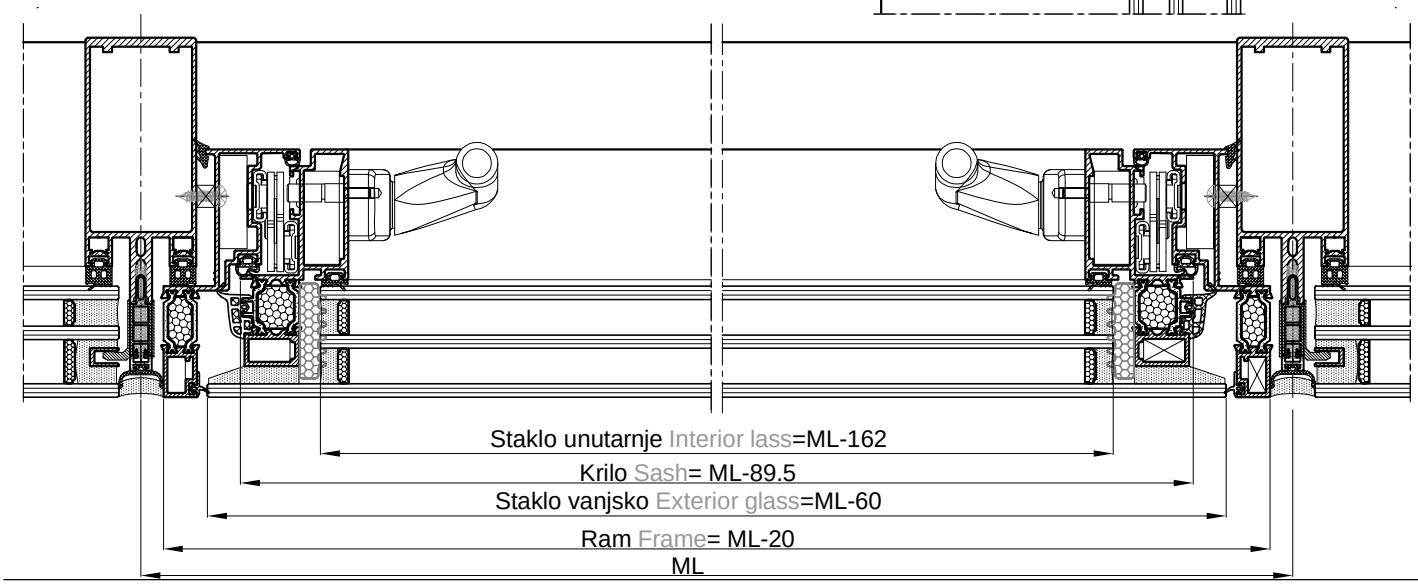

Rezna lista - RAM FT-0125F
- KRILO FT-0124F

Cutting list - FRAME FT-0125F
- SASH FT-0124F

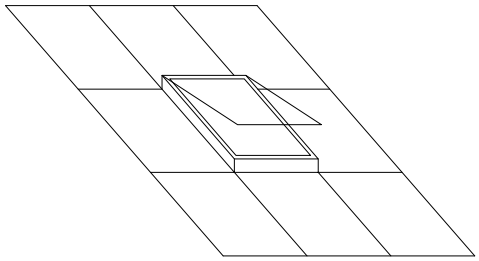



naziv/kod name/code	mjera dimension	kom. pcs.	pilanje sawing angle
Ram Frame FT-0125F	ML-20	2	45-45
Ram Frame FT-0125F	MH-20	2	45-45
Krilo Sash FT-0124F	ML-91	2	45-45
Krilo Sash FT-0124F	MH-91	2	45-45
Lajsna Glazing bead F-0796	ML-47.5	2	45-45
Lajsna Glazing bead F-0796	MH-47.5	2	45-45

OKOVI HARDWARE			kom pcs.	mjera dimension
725.031	kutnik	corner bracket	4	
725.030	kutnik	corner bracket	4	
725.029	kutnik	corner bracket	4	
725.210	kutnik	corner bracket	4	
725.211	kutnik	corner bracket	4	
111.006	šarka	hinge	2	
Elektropodizač (motor) prozora ELTRAL S80 (G-U) Spindle drive for window opening ELTRAL S80 (G-U)			1	

BRTVE GASKETS			
358.013	srednja brtva	central gasket	2L+2H
322.004	brtva na spoju profila	gasket on profile joint	2L+2H
358.011	brtva prema staklu unutarnja	interior glass gasket	2L+2H
318.001	brtva prema staklu vanjska	exterior glass gasket	2L+2H


STAKLO GLASS		
30 mm	1	(ML-164)x(MH-164)

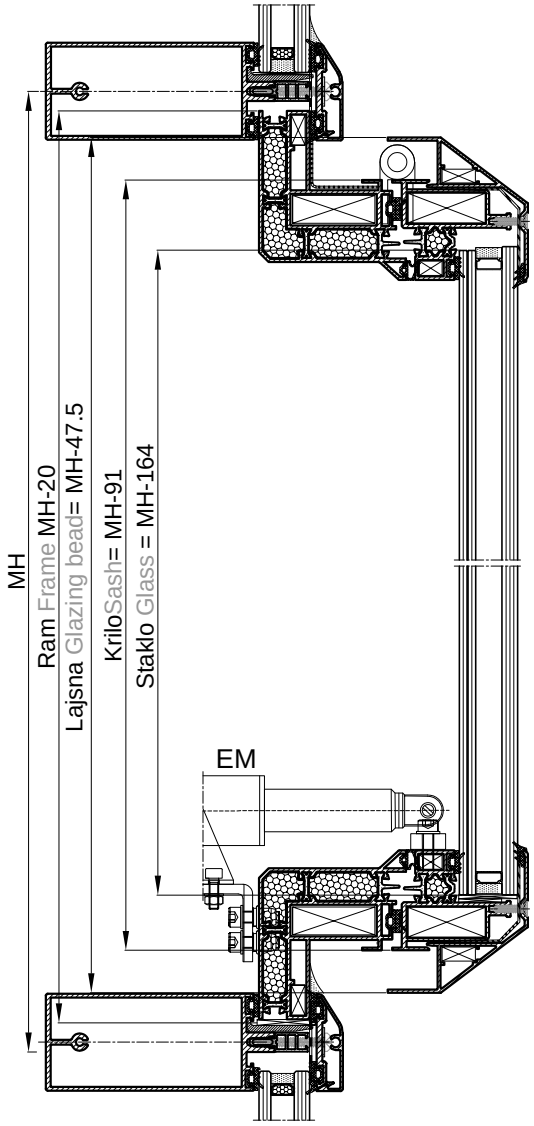

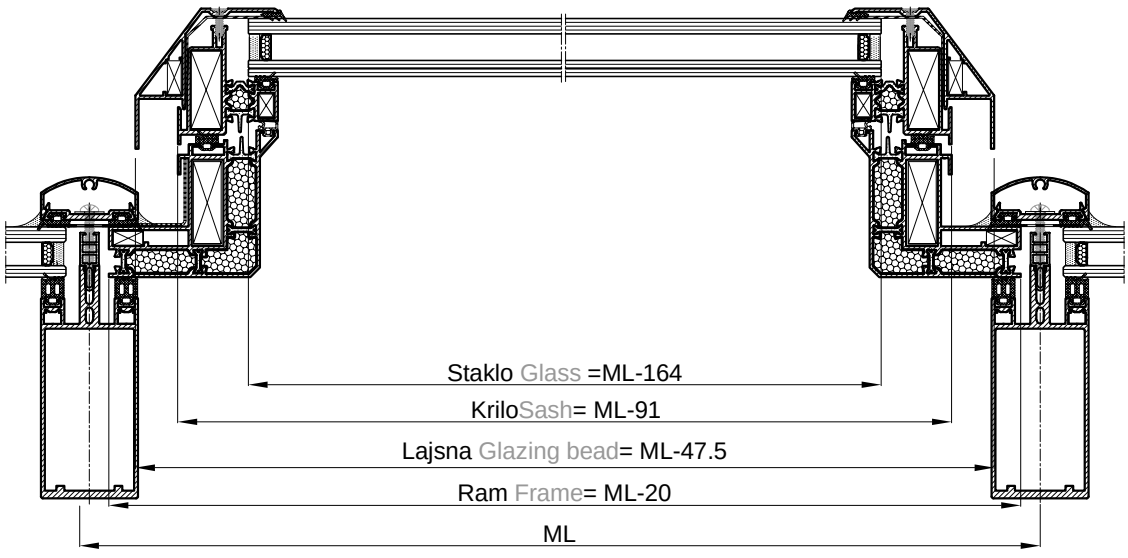


Rezna lista - RAM FT-0125F
- KRILO FT-0124F

Cutting list - FRAME FT-0125F
- SASH FT-0124F

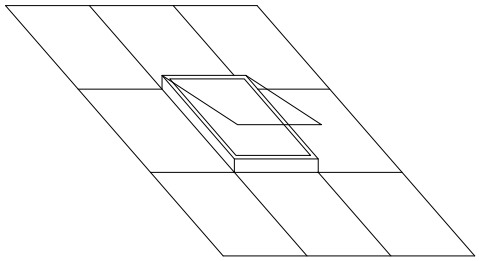


naziv/kod name/code	mjera dimension	kom. pcs.	pilanje sawing angle
Ram Frame FT-0125F	ML-20	2	45-45
Ram Frame FT-0125F	MH-20	2	45-45
Krilo Sash FT-0124F	ML-91	2	45-45
Krilo Sash FT-0124F	MH-91	2	45-45
Lajsna Glazing bead F-1572	ML-47.5	2	45-45
Lajsna Glazing bead F-1572	MH-47.5	2	45-45

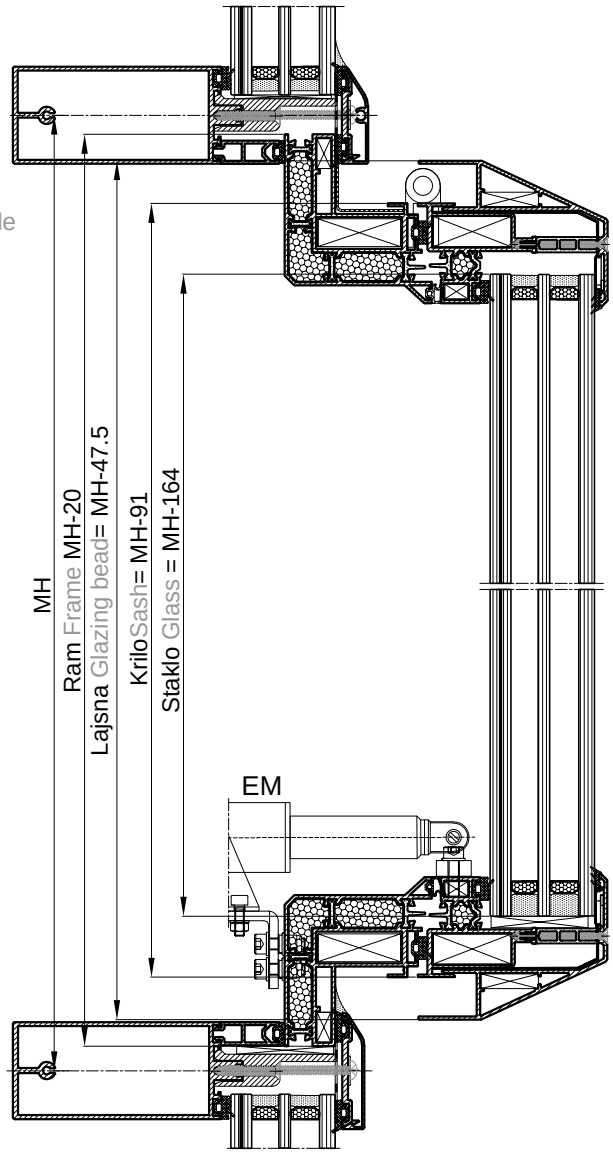

OKOVI HARDWARE		kom pcs.	mjera dimension
725.031	kutnik corner bracket	4	
725.030	kutnik corner bracket	4	
725.029	kutnik corner bracket	4	
725.210	kutnik corner bracket	4	
725.708	kutnik corner bracket	4	
111.006	šarka hinge	2	
Elektropodizač (motor) prozora ELTRAL S80 (G-U)		1	
Spindle drive for window opening ELTRAL S80 (G-U)			

BRTVE GASKETS		
358.013	srednja brtva central gasket	2L+2H
322.004	brtva na spoju profila gasket on profile joint	2L+2H
358.013	brtva prema staklu unutarnja interior glass gasket	2L+2H
318.001	brtva prema staklu vanjska exterior glass gasket	2L+2H


STAKLO GLASS		
53 mm	1	(ML-164)x(ML-164)

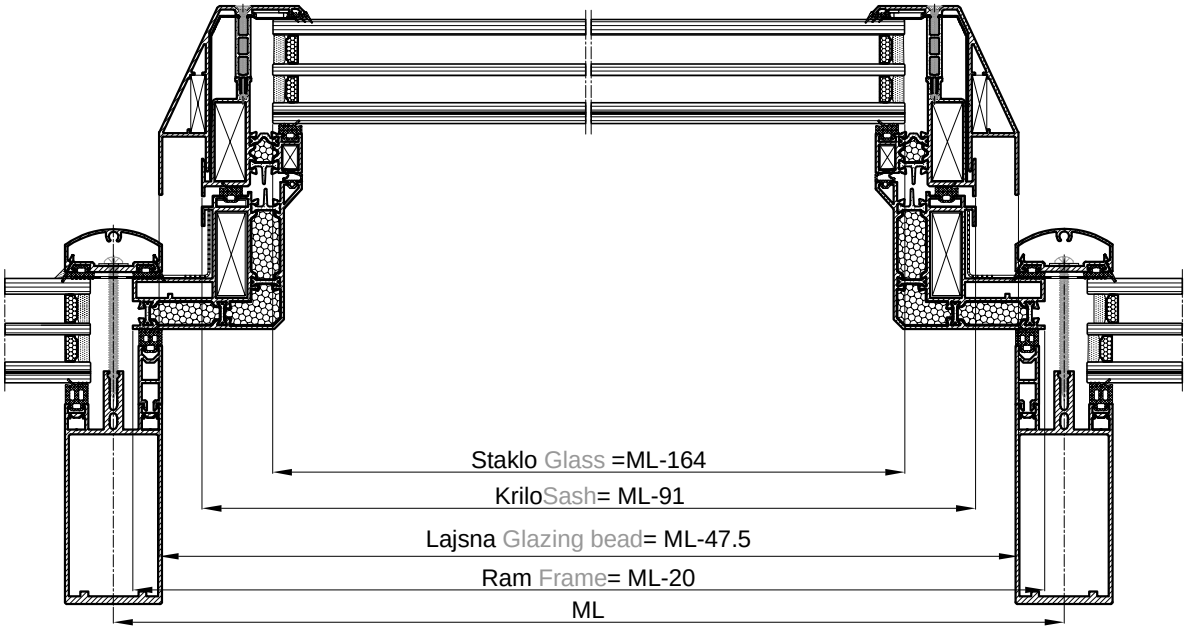


Francuski balkon bez rukohvata - staklo 88.4
French balcony without handrail - glass 88.4

762 mm < ML < 1762 mm
715 mm < MH < 1215 mm

naziv/kod name/code	mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles			
F-1569	MH-12	2	90-90
F-0826	MH-12	2	90-90
Brtve Gaskets			
311.007	MH-12	2	90-90
321.003	MH-12	2	90-90
340.055	MH-12	4	90-90
Staklo Glass			
88.4 polukaljeno 8 mm + 4 PVB 1,52 mm + kaljeno 8 mm semi toughened 8 mm + 4 PVB 1,52 mm + toughened 8 mm	ML-62 x MH-15	1	
Elementi Elements			
373.054		2	
391.148		1	
391.149		1	
433.134		6	
433.042		2	
433.04x*		x**	
PVC podmetač 20x4 mm spacer 20x4 mm***		4	
PVC podmetač 20x20x2 mm spacer 20x20x2 mm***		2	

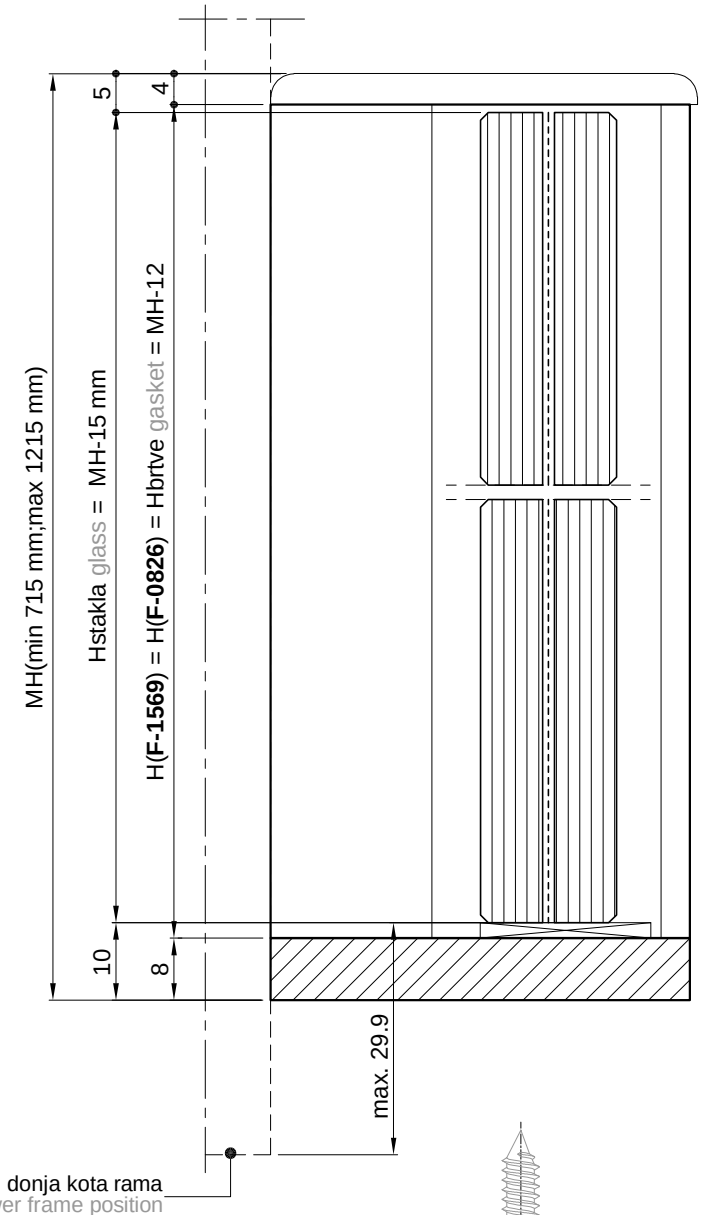

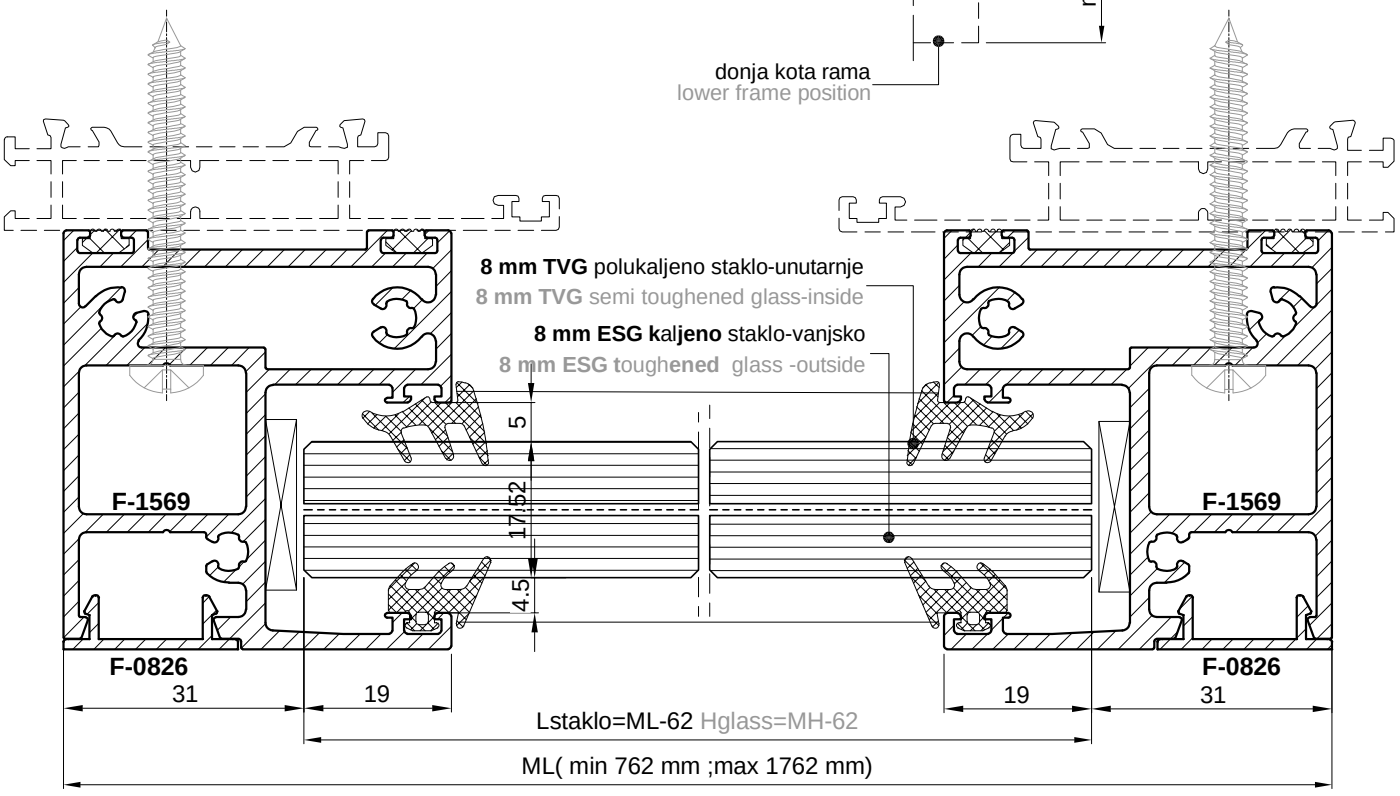


*- ovisi o profila na koji se montira
*- depends upon the mounting profile
**- ovisi o visina balkona
**- depends upon balcony height
***- ne prodaje FEAL
***- not sold by FEAL

Francuski balkon bez rukohvata - staklo 1010.4
French balcony without handrail - glass 1010.4

762 mm < ML < 2462 mm
715 mm < MH < 1215 mm

naziv/kod name/code	mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles			
F-1569	MH-12	2	90-90
F-0826	MH-12	2	90-90
Brtve Gaskets			
318.001	MH-12	2	90-90
328.002	MH-12	2	90-90
340.055	MH-12	4	90-90
Staklo Glass			
1010.4 polukaljeno 10 mm + 4 PVB 1,52 mm + kaljeno 10 mm semi toughened 10 mm + 4 PVB 1,52 mm + toughened 10 mm	ML-62 x MH-15	1	
Elementi Elements			
373.054		2	
391.148		1	
391.149		1	
433.134		6	
433.042		2	
433.04x*		x**	
PVC podmetač 20x4 mm spacer 20x4 mm***		4	
PVC podmetač 20x20x2 mm spacer 20x20x2 mm***		2	

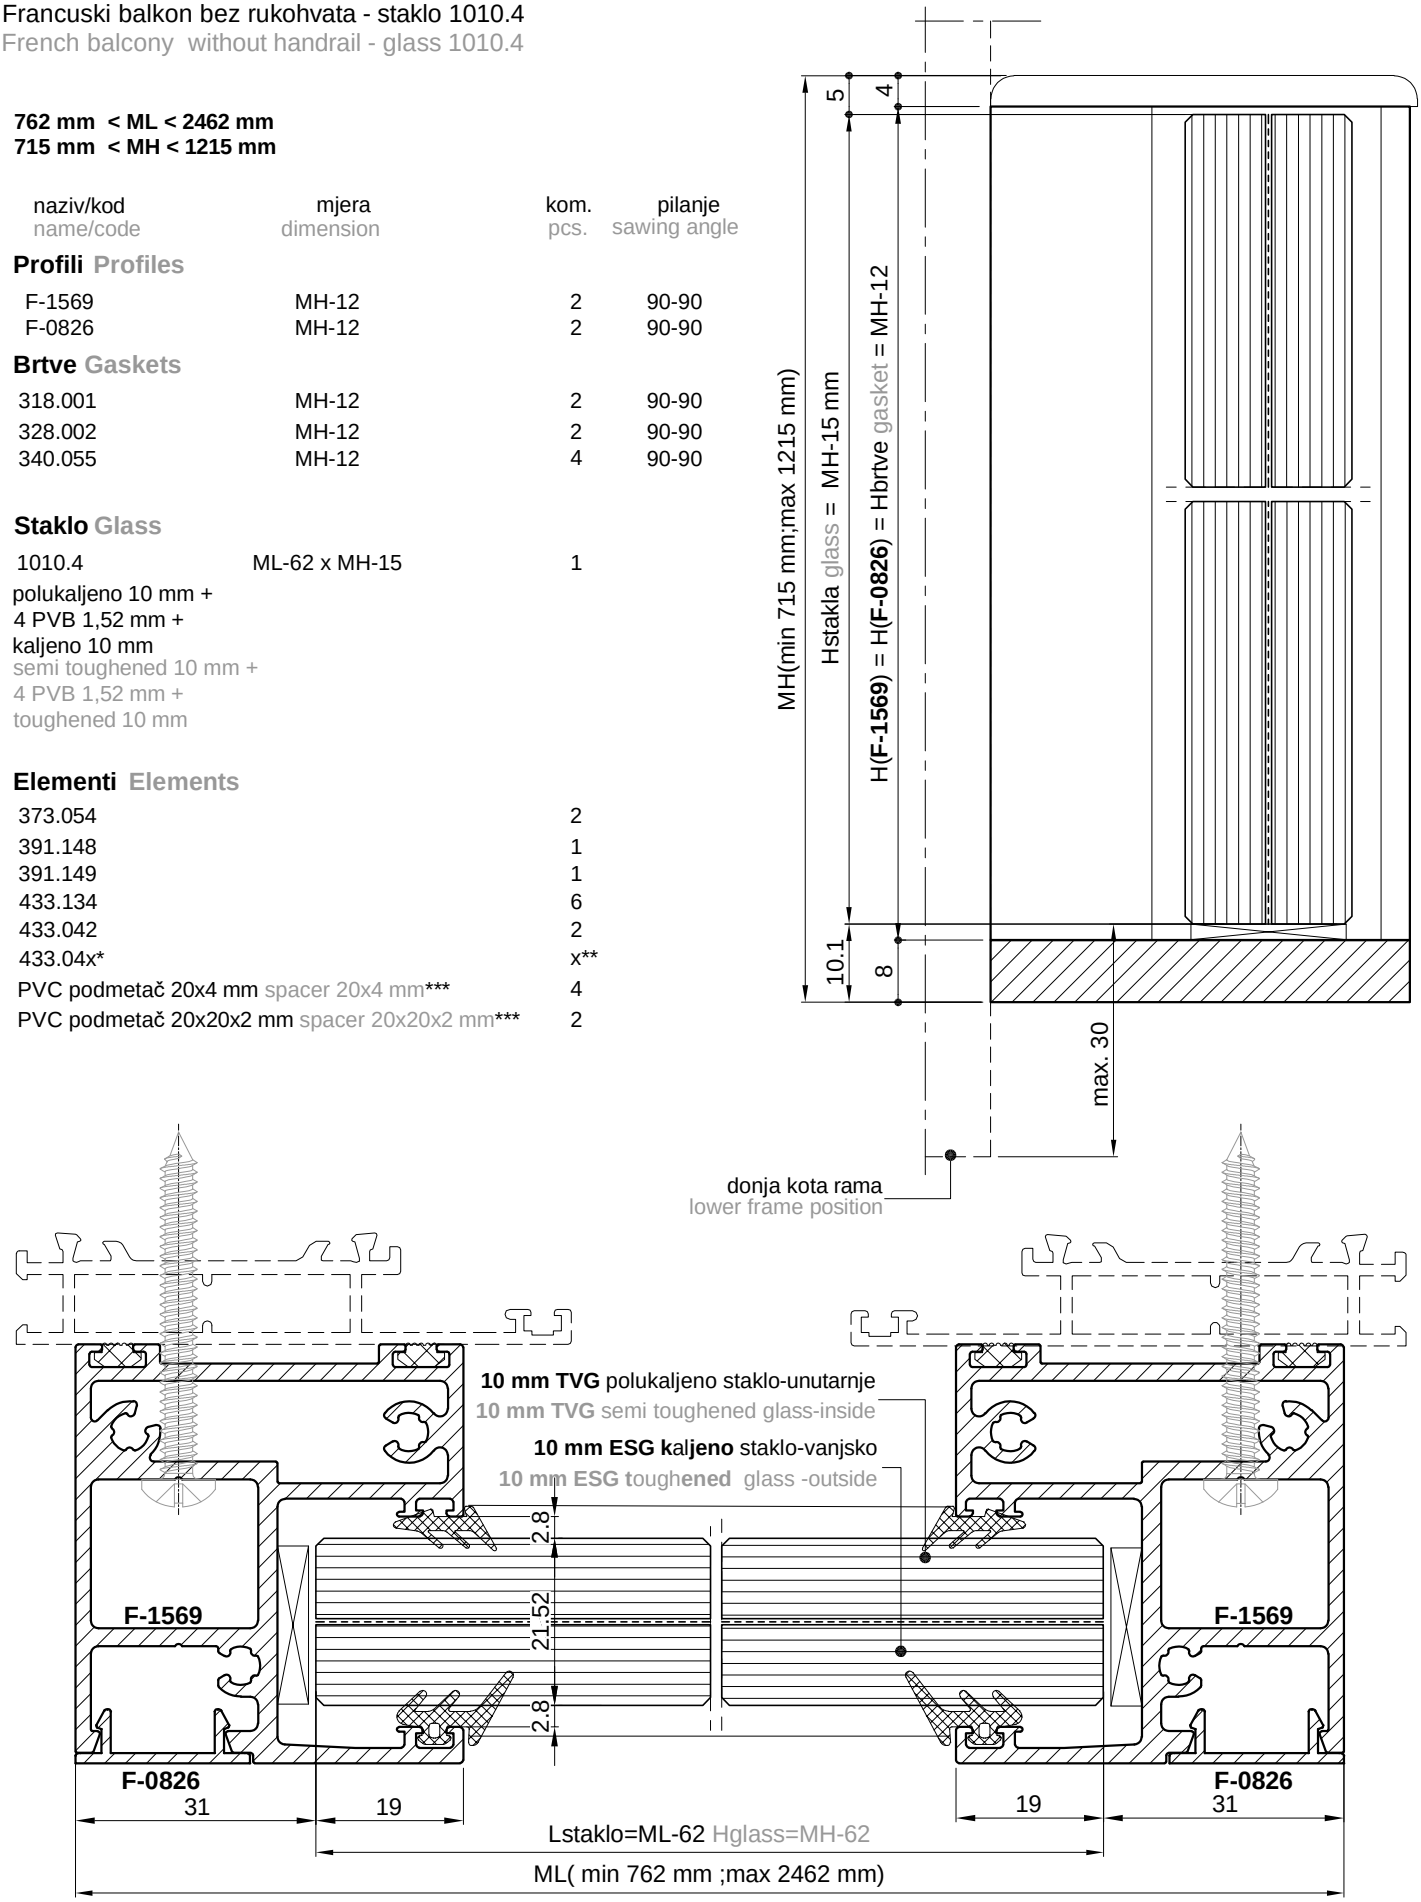

*- ovisi o profila na koji se montira
*- depends upon the mounting profile


**- ovisi o visina balkona
**- depends upon balcony height


***- ne prodaje FEAL
***- not sold by FEAL

Francuski balkon s rukohvatom **F-1490** - staklo 88.4
French balcony with handrail **F-1490** - glass 88.4

762 mm < ML < 1762 mm
723 mm < MH < 1223 mm

naziv/kod name/code	mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles			
F-1569	MH-12	2	90-90
F-0826	MH-12	2	90-90
F-1490	ML-62	1	90-90
Brtve Gaskets			
311.007	MH-43	2	90-90
321.003	MH-43	2	90-90
340.055	MH-12	4	90-90
Staklo Glass			
88.4 polukaljeno 8 mm + 4 PVB 1,52 mm + kaljeno 8 mm semi toughened 8 mm + 4 PVB 1,52 mm + toughened 8 mm	ML-62 x MH-23	1	
Elementi Elements			
373.054		2	
391.148		1	
391.149		1	
433.134		6	
433.042		2	
433.04x*		x**	
PVC podmetač 20x4 mm spacer 20x4 mm***		4	
PVC podmetač 20x20x2 mm spacer 20x20x2 mm***		2	

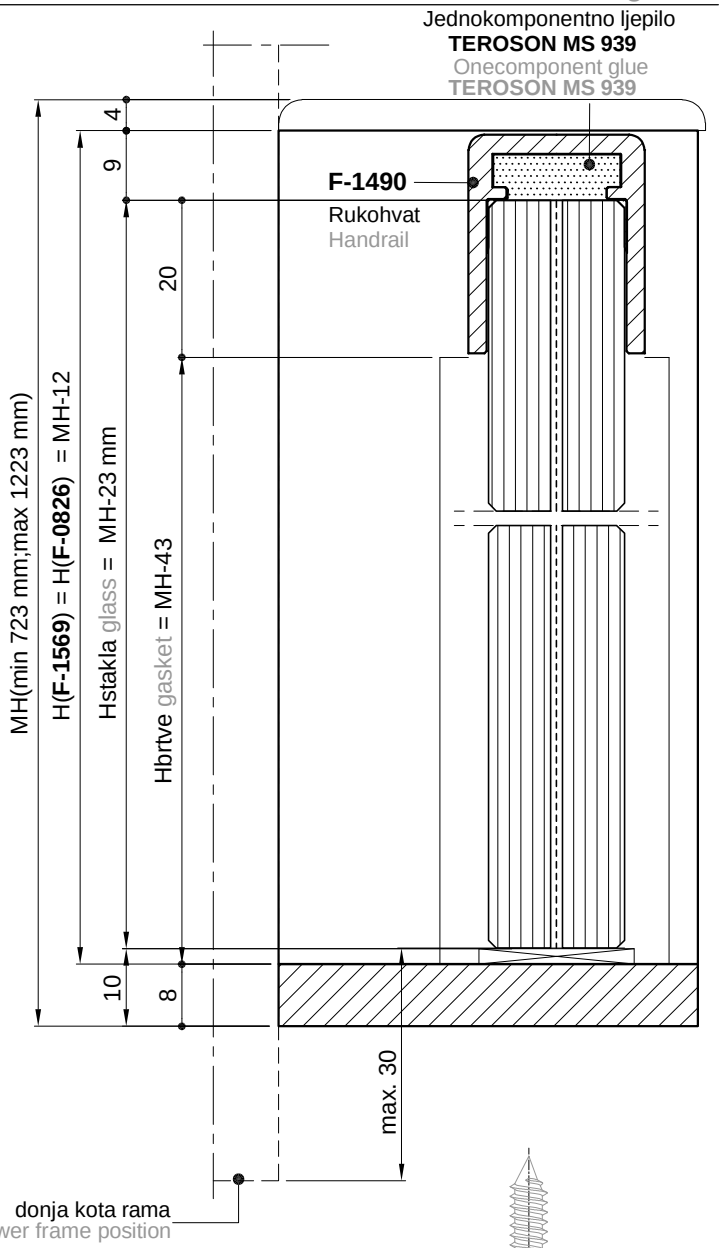

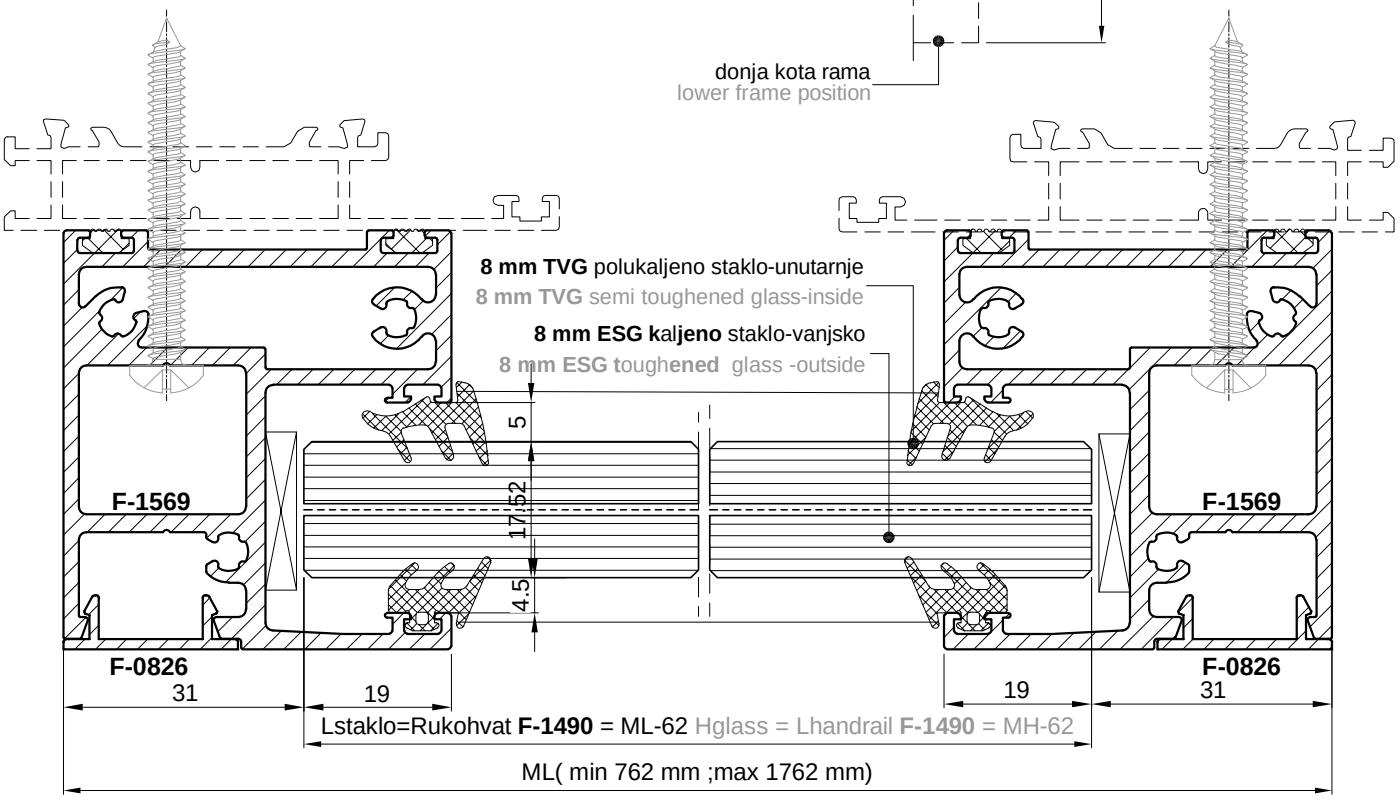

*- ovisi o profila na koji se montira
*- depends upon the mounting profile


**- ovisi o visina balkona
**- depends upon balcony height


***- ne prodaje FEAL
***- not sold by FEAL

Francuski balkon s rukohvatom **F-1437** - staklo 1010.4
French balcony with a handrail **F-1497** glass 1010.4

762 mm < ML < 2462 mm
721 mm < MH < 1221 mm

naziv/kod name/code	mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles			
F-1569	MH-12	2	90-90
F-0826	MH-12	2	90-90
F-1437	ML-62	1	90-90
Brtve Gaskets			
318.001	MH-41	2	90-90
328.002	MH-41	2	90-90
340.055	MH-12	4	90-90
Staklo Glass			
1010.4 polukaljeno 10 mm + 4 PVB 1,52 mm + kaljeno 10 mm semi toughened 10 mm + 4 PVB 1,52 mm + toughened 10 mm	ML-62 x MH-21	1	
Elementi Elements			
373.054		2	
391.148		1	
391.149		1	
433.134		6	
433.042		2	
433.04x*		x**	
PVC podmetač 20x4 mm spacer 20x4 mm***		4	
PVC podmetač 20x20x2 mm spacer 20x20x2 mm***		2	

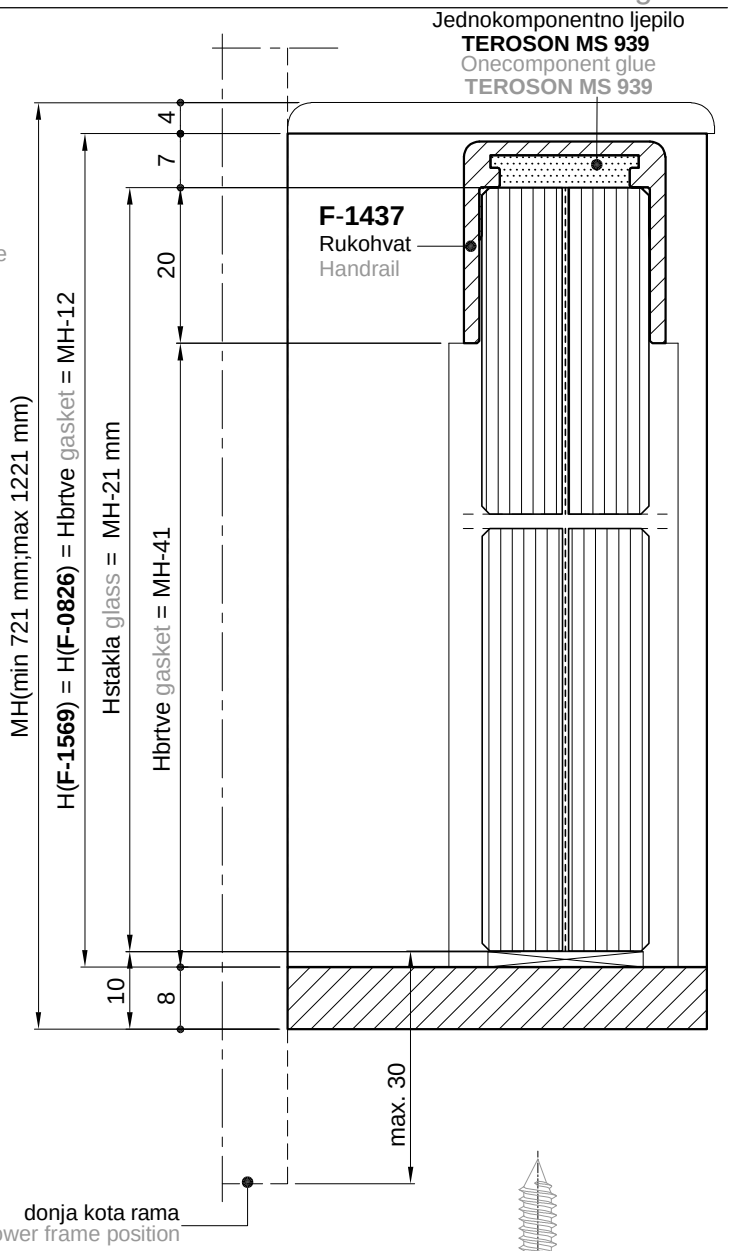

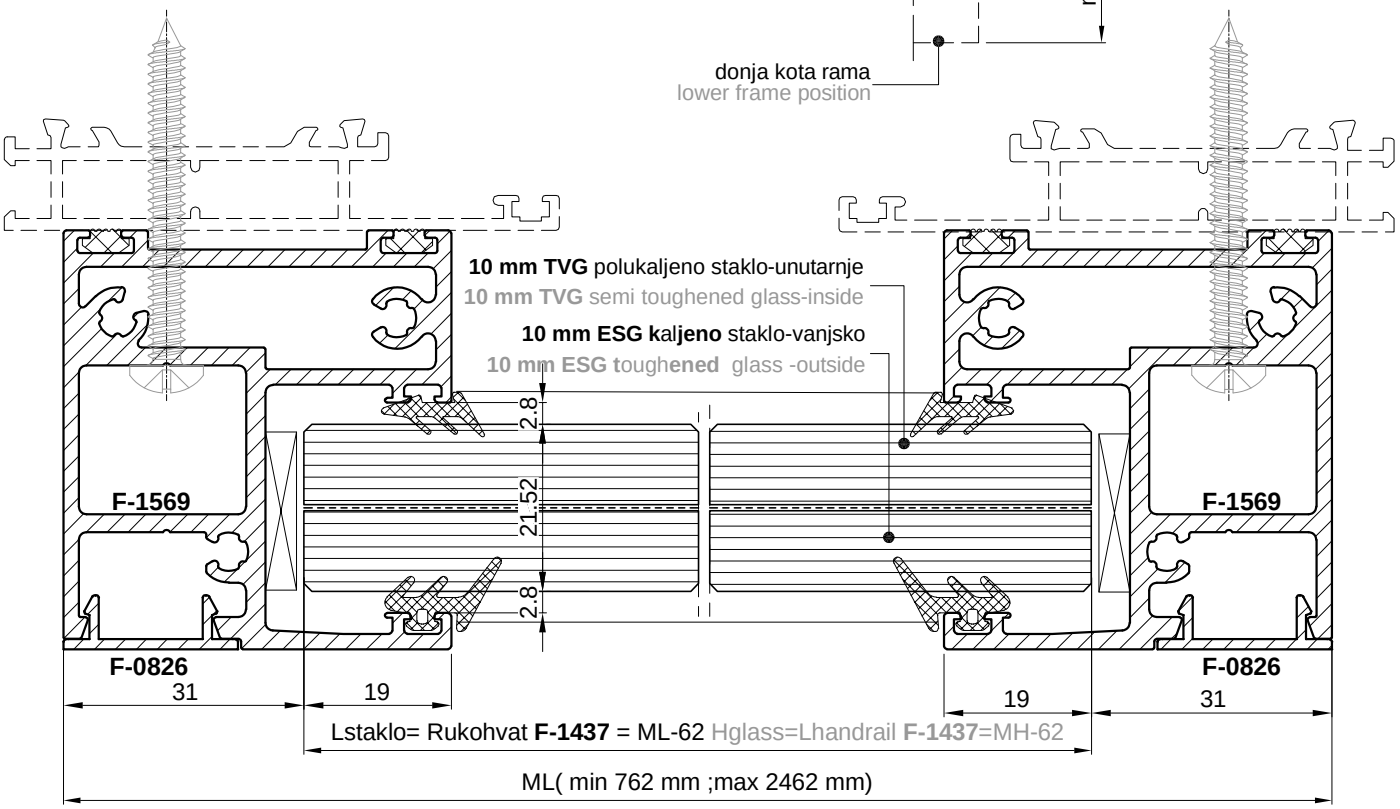

*- ovisi o profila na koji se montira
*- depends upon the mounting profile

**- ovisi o visina balkona
**- depends upon balcony height

***- ne prodaje FEAL
***- not sold by FEAL

FEAL

Skenirajte QR kod i registrirajte se na partner.feal.ba

Scan the QR code and register on partner.feal.ba

50 FK

Knjiga B / *Book B*
Travanj 2026 / April 2026

FEAL d.o.o.
Trnska cesta 146
88220 Široki Brijeg
Bosna i Hercegovina
Tel. +387 39 704-269; 705-807; 705-636
Fax. +387 39 704-358
info@feal.ba
www.feal.ba