
FEAL

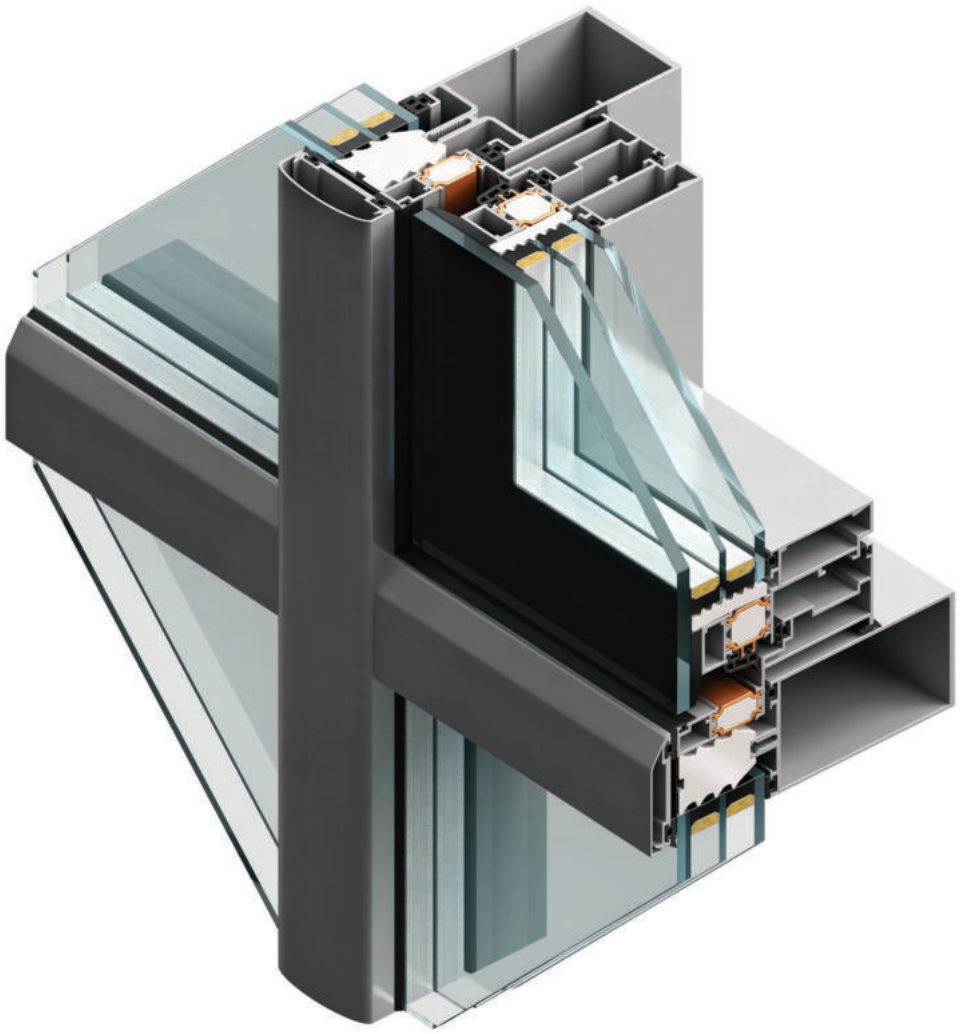

60 K

AL. FASADA







AL. FACADE







Knjiga B / *Book B*






SADRŽAJ
CONTENT






06	VEZNI ELEMENTI	502.06.000
06	CONNECTION ELEMENTS	502.06.000
07	PVC ELEMENTI	502.07.000
07	PVC ELEMENTS	502.07.000
08	MEHANIZMI	502.08.000
08	MECHANISMS	502.08.000
09	BRTVILA	502.09.000
09	GASKETS	502.09.000
10	DODACI	502.10.000
10	ACCESSORIES	502.10.000
11	OBRADA I MONTAŽA	502.11.000
11	PROCESSING AND MONTAGE	502.11.000
12	REZNE LISTE	502.12.000
12	CUTTING LISTS	502.12.000







Vezni elementi
Connection elements


Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
720.001		- Klizač okomice za vodoravnicu FMV 60/88 - Mullion slider for transom FMV 60/88	Al.	
720.002		- Klizač okomice za vodoravnicu FMV 60/41 - Mullion slider for transom FMV 60/41	Al.	
720.003		- Klizač okomice za vodoravnicu FMV 60/114 - Mullion slider for transom FMV 60/114	Al.	
720.004		- Klizač okomice za vodoravnicu FMV 60/156 - Mullion slider for transom FMV 60/156	Al.	
720.005		- Klizač okomice za pomoćnu vodoravnicu FMP 60/88 - Mullion slider for auxiliary transom FMP 60/88	Al.	
720.006		- Klizač okomice za pomoćnu vodoravnicu FMP 60/200 i vodoravnicu FMV 60/198 - Mullion slider for auxiliary transom FMP 60/200 and transom 60/198	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
721.001		- Klizač za vodoravnicu FMV 60/88 - Slider for transom FMV 60/88	Al.	
721.002		- Klizač za vodoravnicu FMV 60/41 - Slider for transom FMV 60/41	Al.	
721.003		- Klizač za vodoravnicu MV 60/114 - Slider for transom FMV 60/114	Al.	
721.004		- Klizač za vodoravnicu FMV 60/156 - Slider for transom FMV 60/156	Al.	
721.005		- Klizač za pomoćnu vodoravnicu FMP 60/88 za gumeni odstojnik DG 1C - Slider for auxiliary transom FMP 60/88 for dilatation rubber DG 1C	Al.	
721.006		- Klizač za pomoćnu vodoravnicu FMP 60/200 za gumeni odstojnik DG 1D - Slider for auxiliary transom FMP 60/200 for dilatation rubber DG 1D	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
721.007		- Klizač za vodoravnicu FMV 60/198 - Slider for transom FMV 60/198	Al.	
721.008		- Klizač za vodoravnicu FMV 60/88 za ravnu gumu DG 2 - Slider for transom FMV 60/88 for flat dilatation rubber DG 2	Al.	
721.009		- Klizač za vodoravnicu FMV 60/114 za ravnu gumu DG 2A - Slider for transom FMV 60/114 for flat dilatation rubber DG 2A	Al.	
721.010		- Klizač za vodoravnicu FMV 60/156 za ravnu gumu DG 2B - Slider for transom FMV 60/156 for flat dilatation rubber DG 2B	Al.	
721.011		- Klizač za vodoravnicu FMV 60/198 za ravnu gumu DG 2C - Slider for transom FMV 60/198 for flat dilatation rubber DG 2C	Al.	


Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
722.001		- Klizač pod kutem za vodoravnicu FMV 60/88 - Angled slider for transom FMV 60/88	Al.	
722.002		- Klizač pod kutem za vodoravnicu FMV 60/114 - Angled slider for transom FMV 60/114	Al.	
722.003		- Klizač pod kutem za vodoravnicu FMV 60/156 - Angled slider for transom FMV 60/156	Al.	
722.004		- Klizač pod kutem za vodoravnicu FMV 60/198 - Angled slider for transom FMV 60/198	Al.	
722.005		- Klizač pod kutem za pom.vodoravnicu FMP 60/200 - Angled slider for auxiliary transom FMP 60/200	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
723.001		- Klizač za vodoravnicu FMV 60/88 (obrada na nulu) - Slider for transom FMV 60/88 (without dilatation rubber)	Al.	
723.002		- Klizač za vodoravnicu FMV 60/114 (obrada na nulu) - Slider for transom FMV 60/114 (without dilatation rubber)		
723.003		- Klizač za vodoravnicu FMV 60/156 (obrada na nulu) - Slider for transom FMV 60/156 (without dilatation rubber)	Al.	
723.004		- Klizač za pomoćnu vodoravnicu FMP 60/88 (obrada na nulu) - Slider for auxiliary transom FMP 60/88 (without dilatation rubber)	Al.	
723.005		- Klizač za pomoćnu vodoravnicu FMP 60/200 (obrada na nulu) - Slider for auxiliary transom FMP 60/200 (without dilatation rubber)	Al.	
723.006		- Klizač za vodoravnicu FMV 60/198 (obrada na nulu) - Slider for transom FMV 60/198 (without dilatation rubber)	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
723.007		- Klizač za vodoravnicu FMV 60/41 (obrada na nulu) - Slider for transom FMV 60/41 (without dilatation rubber)	Al.	




Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
724.001		- Drzač okomice i vodoravnice FMO 60/41 FMV 60/41 - Mullion and transom clip FMO 60/41 FMV 60/41	Al. Zamak	
724.002		- Kopča za fasadu 60 S+ (kut 90°) - Glass clamp for facade 60 S+ (angle 90°)	Al.	
724.003		- Kopča za fasadu 60 S+ (kut 135°) - Glass clamp for facade 60 S+ (angle 135°)	Al.	
724.004		- Kopča za strukturalnu fasadu - Glass clamp for structural facade	Al.	
724.005		- Kopča za strukturalnu fasadu - Glass clamp for structural facade	Al.	
724.006		- Kopča za fasadu 60 S+ (VS-60-04) - Glass clamp for facade 60 S+ (VS-60-04)	Al.	






Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
724.007		- Kopča za fasadu 60 S+ (VS-60-04/A) - Glass clamp for facade 60 S+ (VS-60-04/A)	Al. Zamak	
724.017		- Kopča za fasadu strukturalnu fasadu - trostruko staklo - Glass clamp for structural facade - triple pane glass	Al.	
724.018		- Kopča za fasadu strukturalnu fasadu (trostruko staklo) - Glass clamp for structural (triple pane glass)	Al.	
724.023		- Kopča za strukturalnu fasadu - za trostruko staklo - dvostrana- Staklo 59 mm - Glass clamp for structural facade - triple pane glass - glazing 59 mm	Al	
724.024		- Kopča za strukturalnu fasadu - za trostruko staklo - jednostrana- Staklo 59 mm - Glass clamp for structural facade - triple pane glass - one-sided - glazing 59 mm	Al	
724.025		- Nastavak za kopče 724.002 i 724.003 za strukturalnu fasadu - za trostruko staklo - Extension for glass clamp 724.002 and 724.003 for structural facade - for triple pane glass		




Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
724.026		- Nastavak za kopču 724.002 za fasadu 60 S+ -za trostruko staklo - Extension for glass clamp 724.002 for 60 S+ - for triple pane glass		







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.025	 l=53mm	- Kutna spojnica 16,L=53 - Corner bracket 16, L=53	Al.	
725.026	 l=53mm M8x13	- Kutna spojnica 16,L=53(V) - Corner bracket 16, L=53(V)	Al.	
725.027	 l=6.3 mm	- Kutna spojnica 16,L=6.3 - Corner bracket 16, L=6.3	Al.	
725.028	 l=7,3mm	- Kutna spojnica 16, L=7.3 - Corner bracket 16, L=7.3	Al.	
725.029	 l=40mm M8x13	- Kutna spojnica 16,L=40 (V) - Corner bracket 16, L=40 (V)	Al.	
725.030	 l=44mm M8x13	- Kutna spojnica 16,L=44 - Corner bracket 16, L=44	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.031	 l=7,8mm	- Kutna spojnica 16,L=7.8 - Corner bracket 16, L=7.8	Al.	
725.032	 l=6mm	- Kutna spojnica 16,L=6 - Corner bracket 16, L=6	Al.	
725.033	 l=16,3mm	- Kutna spojnica 16,L=16.3 - Corner bracket 16, L=16.3	Al.	
725.034	 l=42,4mm	- Kutna spojnica 16,L=42.4 - Corner bracket 16, L=43.2	Al.	
725.035	 l=42,4mm M8x13	- Kutna spojnica 16,L=42.4 (V) - Corner bracket 16, L=42.4 (V)	Al.	
710.452	 l=7mm	- Kutna spojnica 16, L=7 - Corner bracket 16, L=7	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.469		- Kutna spojnica 16, L=28.5 (V) - Corner bracket 16, L=28.5 (V)	Al.	
710.462		- Kutna spojnica 16,L=28.4 - Corner bracket 16, L=28.4	Al.	
710.469		- Kutna spojnica 16,L=28.5 (V) - Corner bracket 16, L=28.5 (V)	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.118	 l=42mm	- Kutna spojnica 12.5,L=42 - Corner bracket 12.5, L=42	Al.	
725.119	 l=42mm M8x13	- Kutna spojnica 12.5,L=42 - Corner bracket 12.5, L=42	Al.	
725.121	 l=8,5mm	- Kutna spojnica 12.5,L=8.5 - Corner bracket 12.5, L=8.5	Al.	
725.122	 l=56,3mm	- Kutna spojnica 16,L=40 (V) - Corner bracket 16, L=40 (V)	Al.	
725.123	 l=56,3mm M8x13	- Kutna spojnica 12.5,L=56.3 (V) - Corner bracket 12.5, L=56.3 (V)	Al.	






Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.442		- Kutna spojnica 12.5,L=7.3 - Corner bracket 12.5, L=7.3	Al.	
710.507		- Kutna spojnica 14.6, L=7.9 - Corner bracket 14.6, L=7.9	Al.	
710.436		- Kutna spojnica 19.6,L=17.3 - Corner bracket 19.6,L=17.3	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.210	 l=12,5mm	- Kutna spojnica 8,L=12.5 - Corner bracket 8,L=12.5	Al.	
725.211	 l=18mm	- Kutna spojnica 8,L=18 - Corner bracket 8,L=18	Al.	
725.212	 l=16 mm	- Kutna spojnica 8,L=16 - Corner bracket 8,L=16	Al.	
725.213	 l=16 mm M8x10	- Kutna spojnica 8,L=16 (V) - Corner bracket 8,L=16 (V)	Al.	
710.437	 l=3,5mm	- Kutna spojnica 8,L=3.5 - Corner bracket 8,L=3.5	Al.	
725.217	 l=39,5mm	- Kutna spojnica 8,L=39.5 - Corner bracket 8,L=39.5	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.301	 l=13,8mm	- Kutna spojnica 2,L=13.8 - Corner bracket 2,L=13.8	Al.	
710.447	 l=11,7mm vijci 431.266	- Kutna spojnica 14.6,L=11.7 - Corner bracket 14.6,L=11.7	Al.	
725.401	 l=4,4mm	- Kutna spojnica 7.5,L=4.4 - Corner bracket 7.5, L=4.4	Al.	
710.051	 l=8,2mm	- Kutna spojnica 22.2, L=8.2 - Corner bracket 22.2, L=8.2	Al.	
710.060	 l=32,4mm	- Kutna spojnica 34.6, L=32.2 - Corner bracket 34.6, L=32.2	Al.	
710.074	 l=32,4mm M8x13	- Kutna spojnica 34.6, L=32.4 (V) - Corner bracket 34.6, L=32.4 (V)	Al.	



Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
710.130	 L=36,6 mm	- Kutna spojnica 46, L=36.4 - Corner bracket 46, L=36.4	Al.	
710.131	 L=36,6 mm M8x13	- Kutna spojnica 46, L=36.4 (V) - Corner bracket 46, L=36.4 (V)	Al.	
710.140	 L=6,3 mm	- Kutna spojnica 34.6, L=6.3 - Corner bracket 34.6, L=6.3	Al.	
710.153	l=10 mm 	- Kutna spojnica 18.5,L=10 - Corner bracket 18.5,L=10	Al.	
730.001		- Kutna spojnica za komoru 4.8x2 - Stara oznaka: G112, 0365 - Corner bracket for chamber 4.8x2 - Former code: G112, 0365	Inox	
730.002		- Kutna spojnica za komoru 4.8x2 - Stara oznaka: G112/A - Corner bracket for chamfer 4.8x2 - Former code: G112/A	Inox	







Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.128		- Kutna spojnica 12.5, L=8 - Corner bracket 12.5, L=8	Al.	
725.701		- Kutna spojnica 18.5, L=23.7 (V) - Corner bracket 18.5, L=23.7 (V)	Al.	
725.702		- Kutna spojnica 18.5, L=23.7 - Corner bracket 18.5, L=23.7	Al.	
725.709		- Kutna spojnica 10, L=17 (V) - Corner bracket 10, L=17 (V)	Al.	
710.523		- Kutna spojnica 29.4, L=11.6 (V) - Corner bracket 29.4, L=11.6	Al.	
710.524		- Kutna spojnica 12.5, L=15.7 (V) - Corner bracket 12.5, L=15.7 (V)	Al.	





Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
725.710	l=17mm 	- Kutna spojnica 10,L=17 - Corner bracket 10,L=17	Al.	
725.705	l=8 mm 	- Kutna spojnica 24.6, L=8 - Corner bracket 24.6, L=8	Al.	
725.711	l=26 mm M8x10 	- Kutna spojnica 10, L=26 (V) - Corner bracket 10, L=26 (V)	Al.	
725.712	l=26 mm 	- Kutna spojnica 10, L=26 - Corner bracket 10, L=26	Al.	
725.708	l=29,3 mm 	- Kutna spojnica 7.5,L=29.3 (V) - Corner bracket 7.5, L=29.3 (V)	Al.	





Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
501.000		- Nosivi kutnik na C-vodilicu L=250 mm - Mullion anchor for C-shaped guiderail L=250 mm	Al.	
501.001		- Nosač okomice na C-vodilicu L=170 mm - Mullion anchor for C-shaped guiderail L=170 mm	Al.	
501.002		- Nosač okomice na C-vodilicu L=80 mm - Mullion anchor for C-shaped guiderail L=80 mm	Al.	
501.003		- Nosač okomice fasade na beton, L=250 mm - Mullion anchor for direct montage on concrete L=250 mm	Al.	
501.004		- Nosač okomice na beton, L=170 mm Mullion anchor for direct montage on concrete L=170 mm	Al.	
501.005		- Nosač okomice na beton, L=80 mm Mullion anchor for direct montage on concrete L=80 mm	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
501.025		- Nosač okomice fasade L=124 mm - Mullion anchor L=124 mm	Al.	
501.033		- Nosač okomice fasade L=80 mm - Mullion anchor L=80 mm	Al.	
501.026		- Gornji-donji nosač okomice FMO 60/270 - Upper-lower al. mullion anchor FMO 60/270	Al.	
501.027		- Gornji-donji nosač okomica FMO 60/202 i FMO 60/200 - Upper lower al. mullion anchor FMO 60/202 and FMO 60/202	Al.	
501.028		- Gornji-donji nosač okomice FMO 60/200-S - Upper lower al. mullion anchor FMO 60/200-S	Al.	
501.029		- Gornji-donji nosač okomice FMO 60/158 - Upper lower al. mullion anchor FMO 60/158	Al.	


Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
501.030		- Gornji-donji nosač okomice FMO 60/118 - Upper lower al. mullion anchor FMO 60/118	Al.	
501.031		- Gornji-donji nosač okomice FMO 60/88 - Upper lower al. mullion anchor FMO 60/88	Al.	


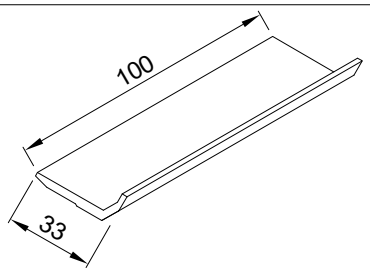
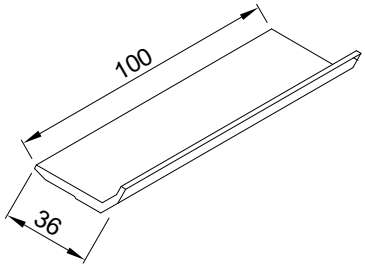
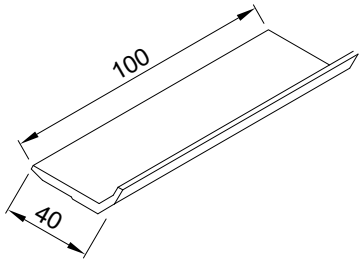
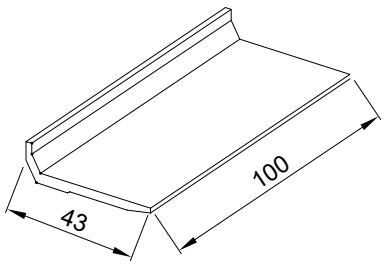

Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.005		- Držač stakla (27x100) - Glass support (27x100)	Al.	
521.102		- Držač stakla-33 mm - Glass support 33 mm	Al.	
521.103		- Držač stakla-36 mm - Glass support - 36 mm	Al.	
521.004		- Držač stakla-40mm - Glass support (DS 100/B)	Al.	
521.106		- Držač stakla-43 mm - Glass support-43 mm	Al.	
521.123		- Držač stakla-52 mm - Glass support-52 mm	Al.	





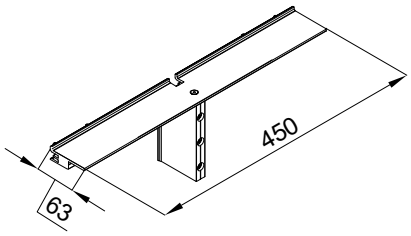
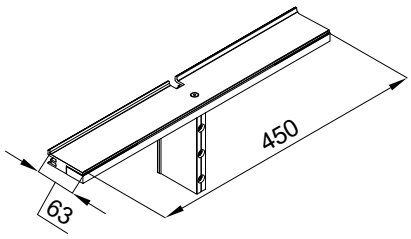
Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.063		- Držač za trostruko staklo-jednostrani-54 mm - Glass support for triple pane glass - one-sided-54 mm	Al.	
521.261		- Držač za trostruko staklo-jednostrani-63 mm - Glass support for triple pane glass-one-sided- 63 mm	Al.	
521.263		- Obostrani držač stakla s potporom u fasadi 60K i 60S-set - Doublesided glass support with a vertical support in fasade 60K and 60S - set		
521.264		- Obostrani držač stakla sa potporom i Inox polugom u fasadi 60K i 60S+-set - Doublesided glass support with a vertical support and a steel rod in facade 60K and 60S+ - set		



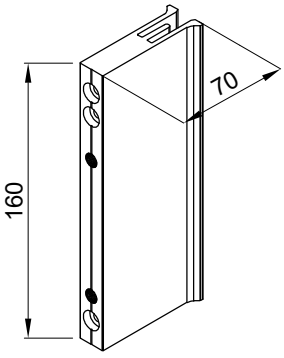
Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.235		- Držač za vanjska sjenila (50 mm x 100 mm) - Bracket for exterior shading (50 mm x100 mm)	Al	
521.236		- Držač za vanjska sjenila (50 mm x160 mm) - Bracket for exterior shading (50 mm x160 mm)	Al	
521.237		- Držač za vanjska sjenila (70 mm x100 mm) - Bracket for exterior shading (70 mm x100 mm)	Al	
521.238		- Držač za vanjska sjenila (70 mm x160 mm) - Bracket for exterior shading (70 mm x160 mm)	Al	

Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.007		- Držač vanjskog stakla (50 mm) - set - Exterior glass support (50mm) - set	Al.	
521.009		- Držač vanjskog stakla-set - Exterior glass support - set	Al.	
521.013		- Držač vanjskog stakla za strukturalnu izvedbu sa horiz. poklopnom lajsnom-set - Exterior glass support for structural facade with horizontal cover cap - set	Al.	
521.039		- Držač vanjskog fiksnog stakla - jednostrani-set - Exterior fixed field one-sided glass clamp - set	Al.	
521.040		- Držač vanjskog fiksnog stakla - dvostrani-set - Exterior fixed field two-sided glass clamp - set	Al	
521.041		- Držač vanjskog stakla-set - Exterior glass support - set	Al	


Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.061		- Dodatni držač vanjskog stakla-set - Additional exterior glass support - set	Al	

Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.101		- Podloška L=55 mm (Ø17) - Washer L=55 mm (Ø17)	Al.	
521.058		- Podloška L=40 mm (Ø13) - Washer L=40 mm (Ø13)	Al.	
111.006.01 .02 .03	 M6X9 DIN 85	- Šarka za krovni prozor - Stara oznaka: AD-100/1 - Boje: 01- bijela; 02 - siva;03 - crna - Roof window hinge - Former code: AD-100/1 - Colours: 01- white; 02- grey; 03 - black	Inox	
521.165		- Podloška L=40 mm (Ø15) - Washer L=40 mm (Ø 15)	Al.	
521.008		- Elastični držač opšava - Elastic flashing sheet clamp	Al.	
521.006		- Držač okomice i vodoravnice FMO 60/41, FMV 60/41 (KOS 100) - Connection element of mullion FMO 60/41 and transom FMV 60/41 with substructure (KOS 100)	Al.	







Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.010		- Distancer za čelični nosač za profil FOK -120/120, (Ø16/13), L=93 mm - Spacer for steel mullion anchor for profile FOK-120/120, (Ø16/13), L=93 mm	Inox	
521.011		- Distancer za al. nosivi kutnik koji s vana drži okomicu (L=64 mm Ø 16/13) - Spacer for aluminium mullion anchor that holds mullion from outside (L=64 mm Ø 16/13)	Inox	
521.017		- Distancer za aluminijski nosivi kutnik koji s vana drži okomicu (L=84 mm Ø 16/13) - Spacer for aluminium mullion anchor that holds the mullion from outside L=84 mm Ø 16/13	Inox	
521.020		- Distancer za čelični kutnik (Distancer L=73 mm Ø16/13) - Spacer for steel mullion anchor (Spacer L=73 mm Ø16/13)	Inox	
521.164		- Distancer nosač fasade- L=89.5 mm Ø14/11 - Spacer for mullion anchor L=89.5 mm Ø14/11	- Inox	
521.167		- Distancer za nosač fasade - L=60 mm Ø14/11 - Spacer for mullion anchor - L=60 mm Ø14/11	- Inox	






Oznaka Code	Izgled presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
521.275		- Distancer za čelični nosač fasade - L=74 mm Ø14/11 - Spacer for steel mullion anchor - L=74 mm Ø14/11	- Inox	
391.148.01 .02 .03		- Nosiva pločica francuskog balkona, lijeva - Boje: 01- bijela; 02 - siva;03 - crna - French balcony aluminium glass support, left	Al	
391.149.01 .02 .03		- Nosiva pločica francuskog balkona, desna - Boje: 01- bijela; 02 - siva;03 - crna - French balcony aluminium glass support, left	Al	




PVC elementi
PVC elements






Oznaka Code	Opis Description	Izgled View	Materijal Material	Oznaka proizvođača Manufacturer code
370.026	Podmetač za staklo 100 x 20 x 1 mm Glazing packer 100 x 20 x 1 mm		PVC	BO 5120001
370.027	Podmetač za staklo 100 x 30 x 1 mm Glazing packer 100 x 30 x 1 mm			BO 5120031
370.028	Podmetač za staklo 100 x 40 x 1 mm Glazing packer 100 x 40 x 1 mm			BO 5120051
370.029	Podmetač za staklo 100 x 50 x 1 mm Glazing packer 100 x 50 x 1 mm			BO 5120111
370.030	Podmetač za staklo 100 x 20 x 2 mm Glazing packer 100 x 20 x 1 mm			BO 5120002
370.031	Podmetač za staklo 100 x 30 x 2 mm Glazing packer 100 x 30 x 1 mm			BO 5120032
370.032	Podmetač za staklo 100 x 40 x 2 mm Glazing packer 100 x 40 x 1 mm			BO 5120052
370.033	Podmetač za staklo 100 x 50 x 2 mm Glazing packer 100 x 50 x 1 mm			BO 5120112
370.034	Podmetač za staklo 100 x 20 x 3 mm Glazing packer 100 x 20 x 3 mm			BO 5120003
370.035	Podmetač za staklo 100 x 24 x 3 mm Glazing packer 100 x 24 x 3 mm			BO 5120013
370.037	Podmetač za staklo 100 x 30 x 3 mm Glazing packer 100 x 30 x 3 mm			BO 5120033
370.038	Podmetač za staklo 100 x 40 x 3 mm Glazing packer 100 x 40 x 3 mm			BO 5120053
370.039	Podmetač za staklo 100 x 30 x 4 mm Glazing packer 100 x 30 x 4 mm			BO 5120034
370.040	Podmetač za staklo 100 x 50 x 4 mm Glazing packer 100 x 50 x 4 mm			BO 5120114
370.041	Podmetač za staklo 100 x 30 x 5 mm Glazing packer 100 x 30 x 5 mm			BO 5120035
370.043	Podmetač za staklo 100 x 34 x 5 mm Glazing packer 100 x 34 x 5 mm			BO 5120045
370.044	Podmetač za staklo 100 x 24 x 6 mm Glazing packer 100 x 24 x 6 mm			BO 5120016
370.045	Podmetač za staklo 100 x 30 x 6 mm Glazing packer 100 x 30 x 6 mm			BO 5120036

NAPOMENA: Navedeni podmetači stakla kompatibilni su sa staklo kitovima.
REMARK: Listed glazing packers are compatible with glass sealants.




Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
374.005		- Profil 17 mm - Profile 17 mm	PVC	
374.006		- Profil sa perom 23 mm - Profile 23 mm with feather	PVC	
374.007		- Profil 23 mm - Profile 23 mm	PVC	
374.008		- Profil 5 mm - Profile 5 mm	PVC	
374.009		- Profil 7 mm - Profile 7 mm	PVC	
370.067		- Distancer na okomici 32 mm - Spacer on mullion 32 mm	Poliamid	

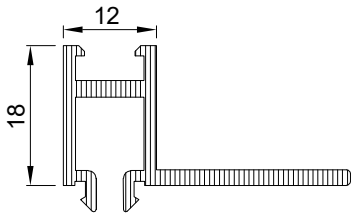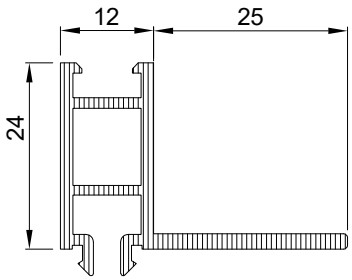
Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
374.010		- Parapetni fasadni umetak s perom 18 mm - Facade spandrel spacer with feather 18 mm	PVC	
374.011		- Parapetni fasadni umetak s perom 24 mm - Facade spandrel spacer with feather 24 mm	PVC	
374.012		- Distancer 19 mm - Spacer 19 mm	PVC	
374.013		- Distancer 15 mm - Spacer 15 mm	PVC	
373.054		- Gornji čep okomice francuskog balkona - Cover cap of french balcony profile	PVC	

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
373.012		- Umetak za profil FM 60/20 - Cover cap for profile FM 60/20	PVC	
373.004		- Umetak za profil FM 60/80 - Cover cap for profile FM 60/80	PVC	
374.071		- Parapetni fasadni umetak 18 mm - Facade spandrel insert 18 mm	PVC	


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
374.022		- Podmetač al. nosača 250 mm - Mullion anchor shim 250 mm	PVC	
374.023		- Podmetač nosača 170x120x2 - Mullion anchor shim 170 x120x2	PVC	
374.020		- Podmetač al. nosača 85 mm - Mullion anchor shim 85 mm	PVC	
374.076		- Podmetač nosača 125x90x2,4 - Mullion anchor shim 125x90x2,4	PVC	
374.077		- Distancer za nosač 80x90x2,4 - Mullion anchor shim 80x90x2,4	PVC	


Mehanizmi
Mechanisms

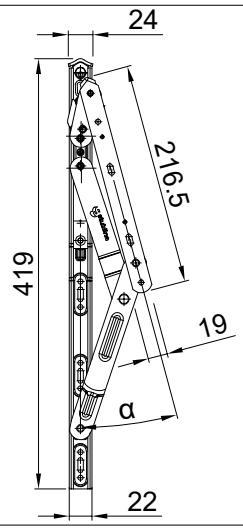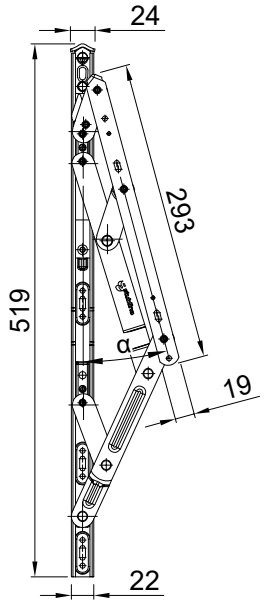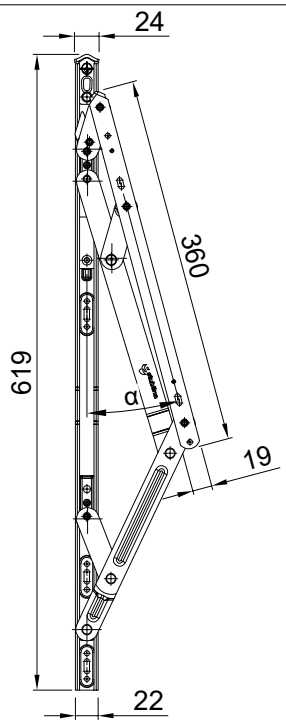Oznaka Code	Kod proizvođača Manucturer code	Makaze fasadnog ventusa Hung vent friction stays	Opis Description	Materijal Material	Proizvođač Manufacturer
134.019	F4060.05.55 PT		- Škare fasadnog ventusa - visina krila 600 mm-1200 mm-set - Facade ventus stays - sash height 600 mm-1200 mm-set	Inox	Stublina
134.020	F4060.07.55 PT		- Škare fasadnog ventusa - visina krila 1200 mm-1600 mm-set - Facade ventus stays - sash height 1200 mm-1600 mm-set	Inox	Stublina
134.021	F4060.08.55 PT		- Škare fasadnog ventusa - visina krila 1600 mm-1800 mm-set - Facade ventus stays - sash height 1600 mm-1800 mm-set	Inox	Stublina

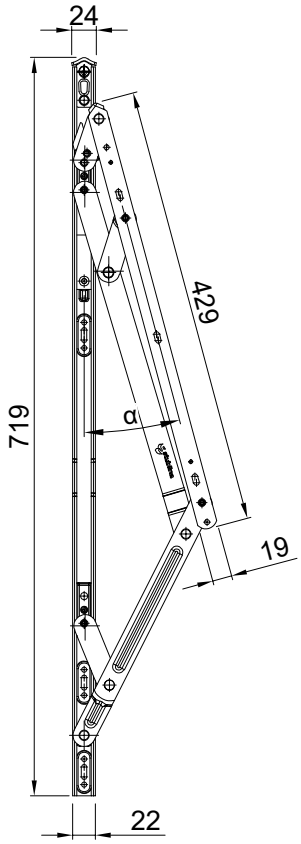Oznaka Code	Kod proizvođača Manucturer code	Makaze fasadnog ventusa Hung vent friction stays	Opis Description	Materijal Material	Proizvođač Manufacturer
134.022	F4060.09.55 PT		- Škare fasadnog ventusa - visina krila 1800 mm-2000 mm-set - Facade ventus stays - sash height 1800 mm-2000 mm-set	Inox	Stublina


- IZBOR VELIČINE MAKAZE ZA FASADNE PROFILE
- FRICTION STAYS SIZE SELECTION FOR FACADE PROFILES












Izbor makaze na osnovu visine krila (Vk) ***Stays selection based on the sash height (Vk)***								
	134.019		**134.020**		**134.021**		**134.022**	
Vk [mm] min	600		1200		1600		1800	
Vk [mm] max	1200		1600		1800		2000	
α	25°	30°	20°	25°	15°	20°	15°	20°

Okov fasadnog prozora- paralelno ručno otvaranje sa mogućnošću zaključavanja u više točaka + makaze za paralelno otvaranja
Facade opening hardware - parallel manual opening with option of locking in multiple points + parallel stay

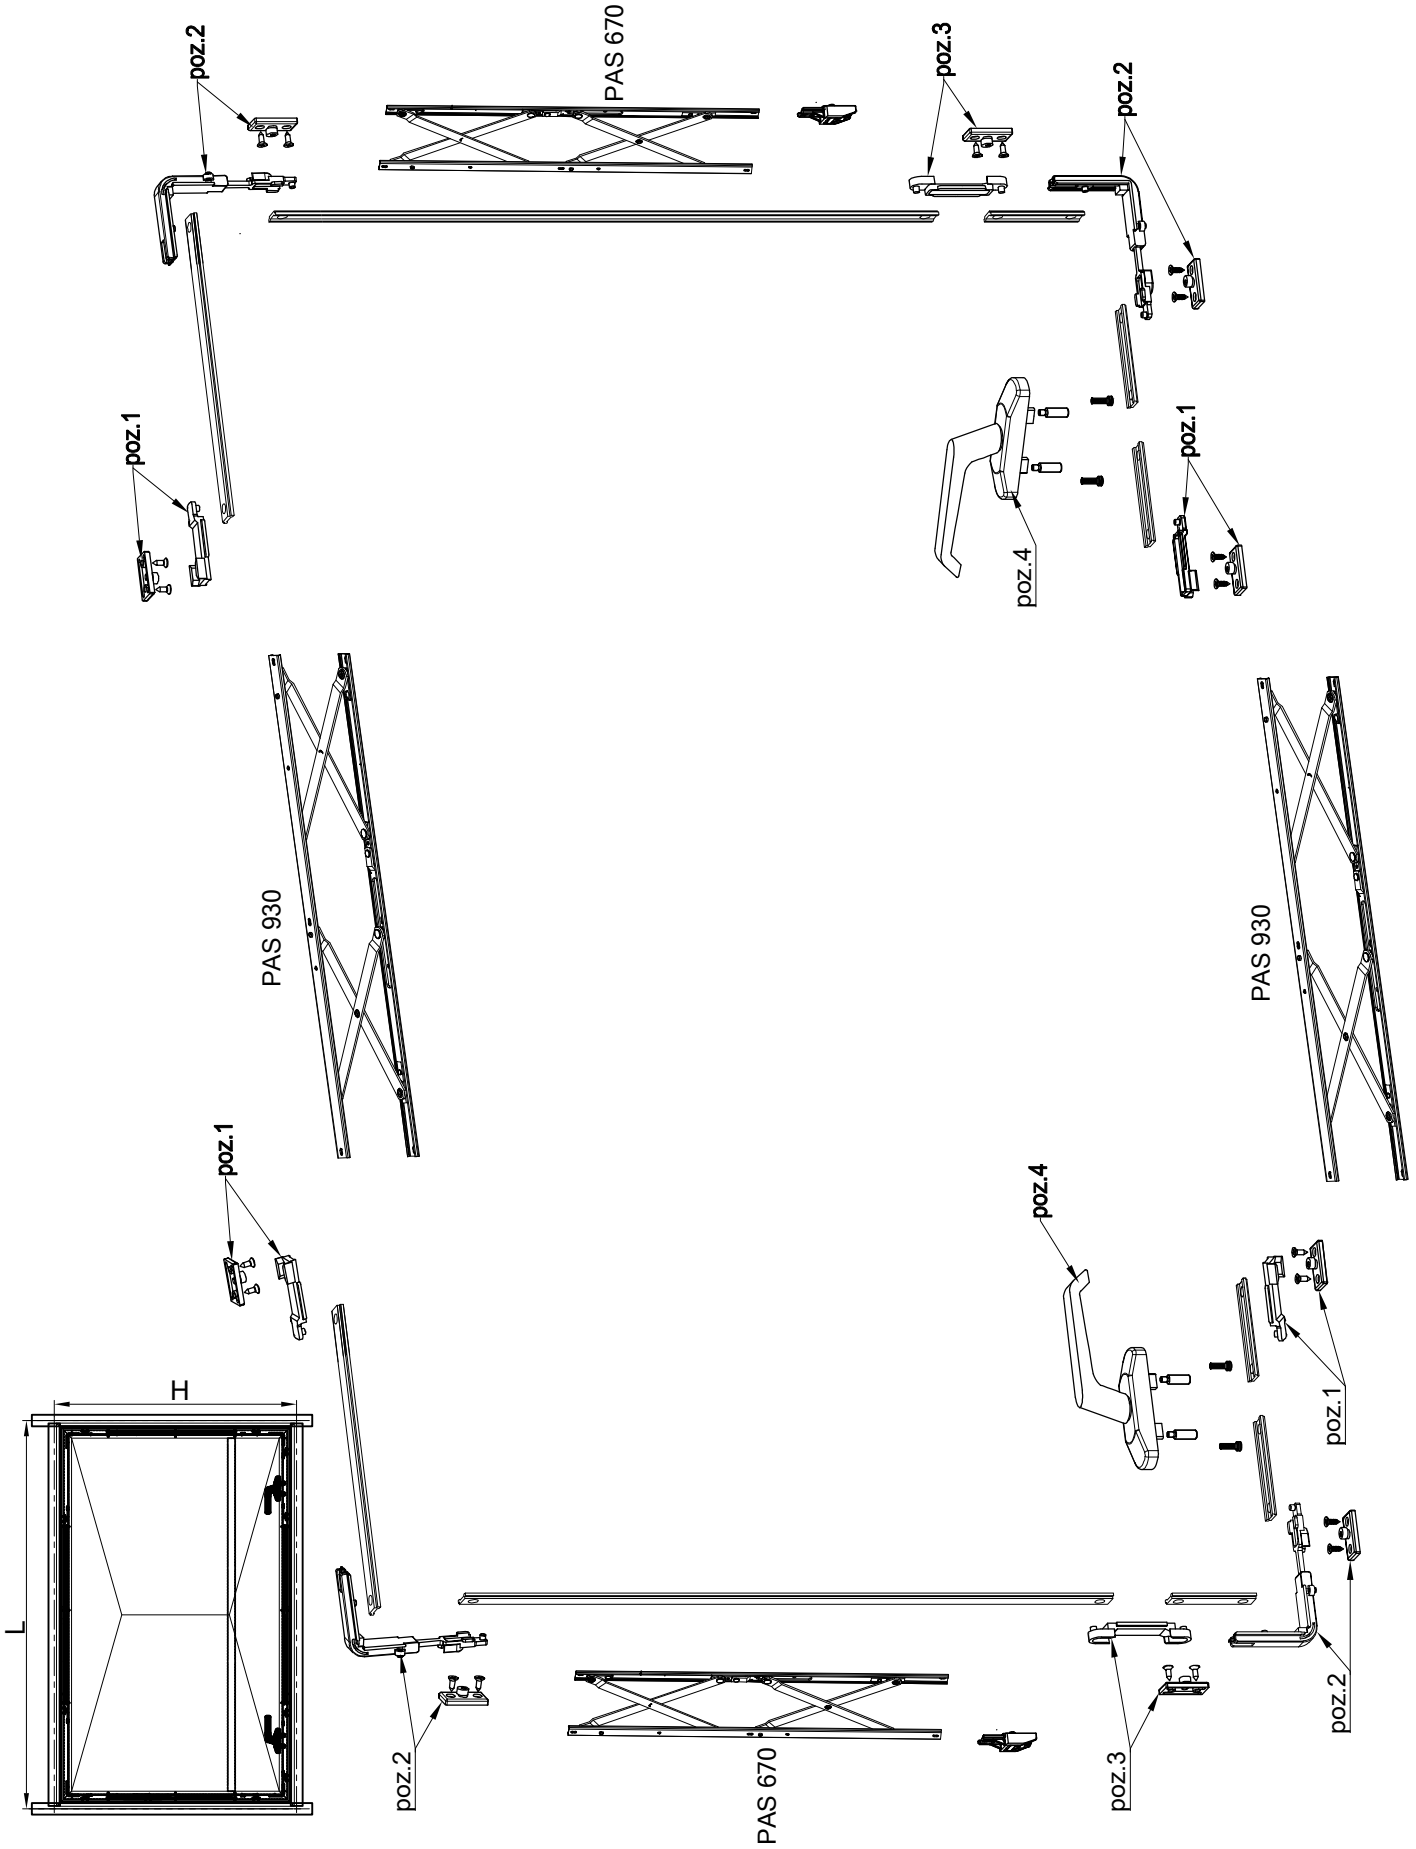


Oznaka Code	Kod proizvođača Manucturer code	Makaze paralnog otvaranja Parallel stays	Opis Description	Materijal Material	Proizvođač Manufacturer
132.005 D	6-34810-00-R-8	PAS350 	- Škare paralelnog otvaranja PAS350-desna - Paralel opening stays PAS350-right	Inox	G-U
132.005 L	6-34810-00-L-8	PAS350 	- Škare paralelnog otvaranja PAS350-lijeva - Paralel opening stays PAS350-left	Inox	G-U
132.006 D	6-34811-00-R-8	PAS450 	- Škare paralelnog otvaranja PAS450-desne - Paralel opening stays PAS450-right	Inox	G-U
132.006 L	6-34811-00-L-8	PAS450 	- Škare paralelnog otvaranja PAS450-lijeve - Paralel opening stays PAS450-left	Inox	G-U

Oznaka Code	Kod proizvođača Manucturer code	Makaze paralnog otvaranja Parallel stays	Opis Description	Materijal Material	Proizvođač Manufacturer
132.007 D	6-34812-00-R-8	PAS670 	- Škare paralelnog otvaranja PAS670-desne - Paralel opening stays PAS670-right	Inox	G-U
132.007 L	6-34812-00-L-8	PAS670 	- Škare paralelnog otvaranja PAS670-lijeve - Paralel opening stays PAS670-left	Inox	G-U
132.008 D	6-34813-00-R-8	PAS930 	- Škare paralelnog otvaranja PAS930-desne - Paralel opening stays PAS930-right	Inox	G-U
132.008 L	6-34813-00-L-8	PAS930 	- Škare paralelnog otvaranja PAS930-lijeve - Paralel opening stays PAS930-left	Inox	G-U

Dijagram nosivosti makaza G-U
Load diagram of G-U parallel stays


Diagram nosivosti
Load diagram

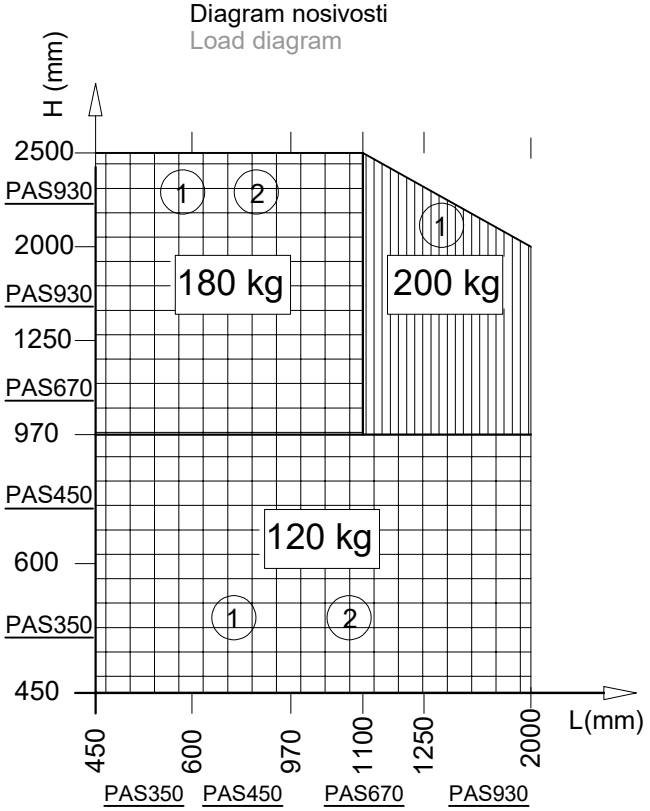


1 —— Otvaranje elektromotorom
1 —— Opened with a motor
2 —— Ručno otvaranje
2 —— Manually opened

IZBOR SHEMA ZA RUČNO PARALELNO OTVARANJE G-U
POSITIONING AND SELECTION OF PARALLEL STAYS G-U


2x HB2 graničnik staviti na 150 mm jedan sa svake strane okvira
2x HB2 spacer to be placed 150 mm from each side of the opening

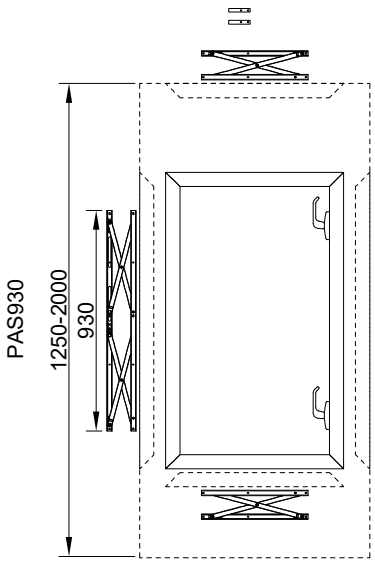



2x HB2 graničnik staviti na 150 mm jedan sa svake strane okvira
2x HB2 spacer to be placed 150 mm from each side of the opening

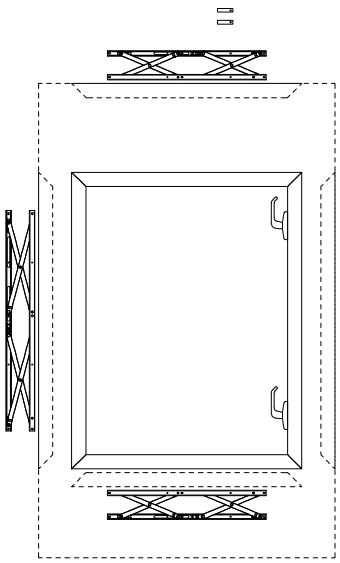


dvije ručke prema dolje
two handles downwards

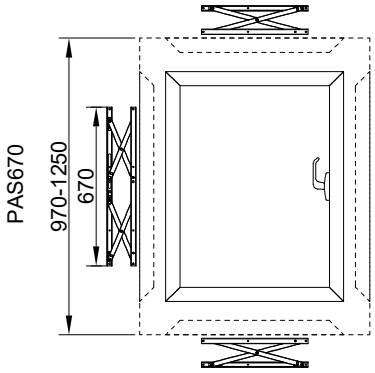


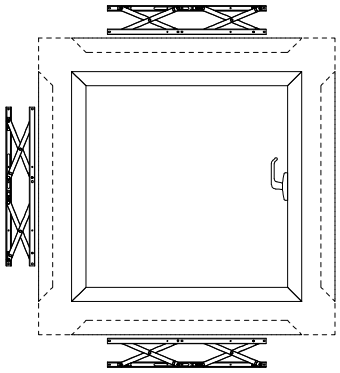

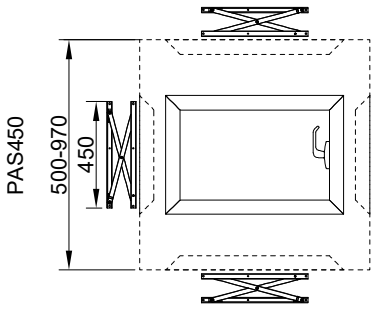




jedna ručka prema dolje
one handle downwards

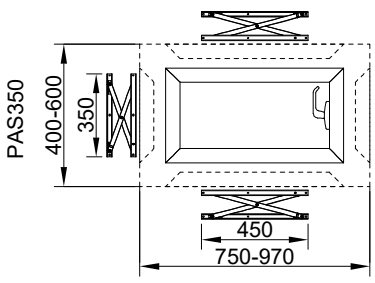


PAS450
max.težina 100 kg
PAS450
max.weight 100 kg




PAS450
max.težina 200 kg
PAS450
max.weight 200 kg





IZBOR SHEMA ZA RUČNO PARALELNO OTVARANJE-G-U
SELECTION AND POSITIONING OF G-U PARALLEL STAYS FOR PARALLEL





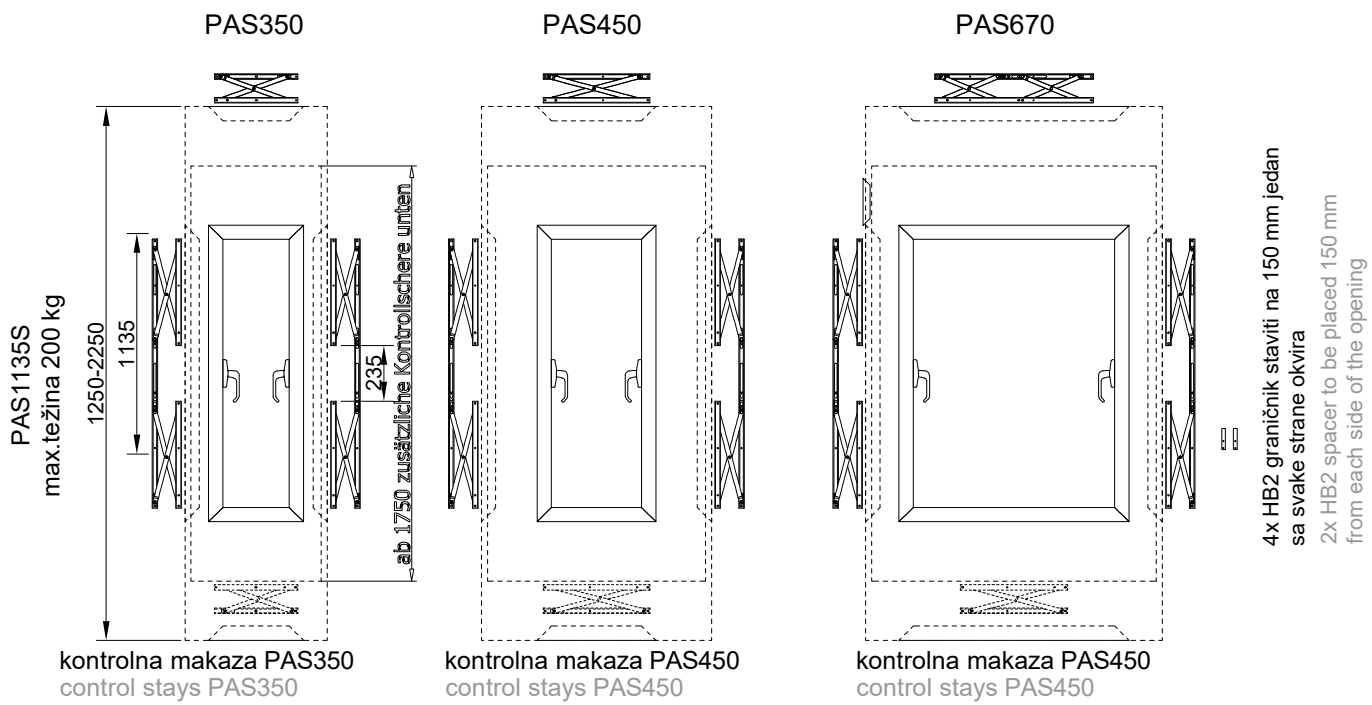




dvije ručke na bočnim stranama two handles on the sides

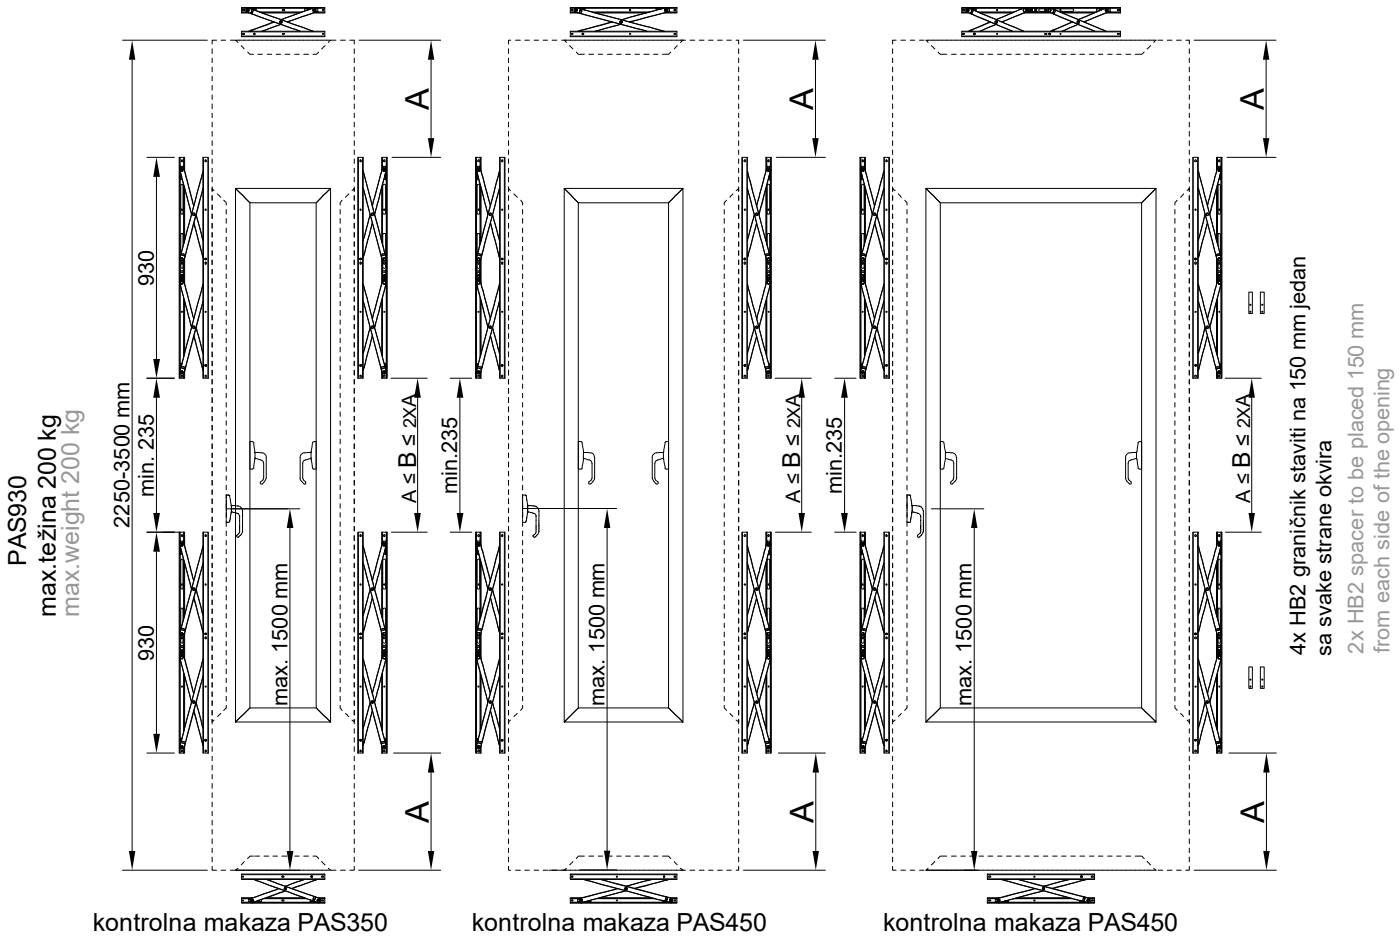








- zaključavanja ne smije prekoračiti visinu od 1500 mm - locking points must not exceed 1500 mmin in height



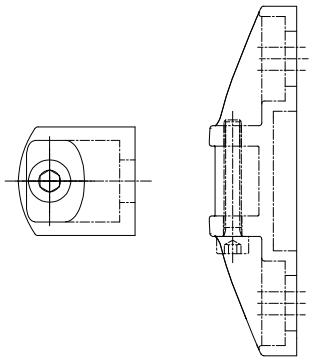


Oznaka Code	Kod proizvođača Manufacturer code	Okov motor Motor accessories	Opis Description	Materijal Material	Proizvođač Manufacturer
142.073	521620		Lančani motor za otvaranje i zatvaranje KS2 200 S12 24V R, hod 200 mm; (paralelno otvaranje) Chain motor for opening and closing KS2 200 S12 24V R; stroke length 200 mm; (parallel opening)	-	G-U
142.072	151440		F41 prihvatnik lanca motora KS2/KS4 Casement bracket F41	-	G-U
142.090	515910		Motor za zaključavanje FVUI 24V Locking motor FVUI 24V	-	G-U
142.076	524177		M-com komunikacijski modul M-com communication module	-	G-U

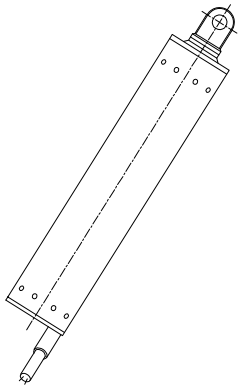

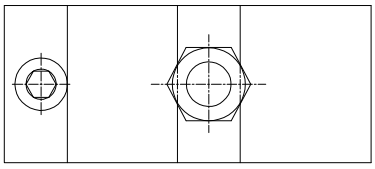

Oznaka Code	Kod proizvođača Manufacturer code	Okov motor Motor accessories	Opis Description	Materijal Material	Proizvođač Manufacturer
142.077 142.078 142.079 142.080 142.081	515210 515220 515230 515240 515250		Motor za krovnni prozor s navojnim vretenom 24V Threaded spindle motor for roof window 24V PLA8 100 S12 24V - hod 100 PLA8 200 S12 24V - hod 200 PLA8 300 S12 24V - hod 300 PLA8 400 S12 24V - hod 400 PLA8 500 S12 24V - hod 500	-	G-U
142.082	151000		Prihvatno vreteno na profilu F10.6 Profile bracket spindle F10.6	-	G-U
142.083	155800		Konzola K5 Console K5	Čelik Steel	G-U
142.084	515900		Spojni prsten B4 Coupling ring B4	Al	G-U
142.085	159900		L nosač K21K L bracket K21K	Čelik Steel	G-U







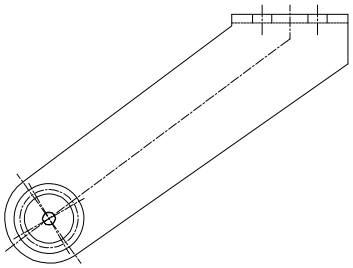
Oznaka Code	Kod proizvođača Manufacturer code	Okov motor Motor accessories	Opis Description	Materijal Material	Proizvođač Manufacturer
142.086 142.087 142.088	496231 496241 496251		Motor za krovnni prozor s navojnim vretenom 230V Threaded spindle motor for roof window 24V SP8-Z 300 S2 230V - hod 300 SP8-Z 400 S2 230V - hod 400 SP8-Z 500 S2 230V - hod 500	-	G-U
142.089	151000		Konzola K57.2 Console K57.2	Čelik Steel	G-U





Brtve
Gaskets






Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
358.012		- Brtva prema staklu - vanjska (3.5 mm) - Glass gasket - exterior (3.5mm)	EPDM	71
358.017		- Brtva prema staklu - unutarnja (13 mm) - Glass gasket - interior (13mm)	EPDM	71
358.016		- Brtva prema staklu - unutarnja (11 mm) - Glass gasket - interior (11mm)	EPDM	71
358.015		- Brtva prema staklu - unutarnja (9 mm) - Glass gasket - interior (9mm)	EPDM	71
358.014		- Brtva prema staklu - unutarnja (7 mm) - Glass gasket - interior (7mm)	EPDM	71
358.013		- Brtva prema staklu - unutarnja (5 mm) - Glass gasket - interior (5mm)	EPDM	71
358.011		- Brtva prema staklu - unutarnja (3 mm) - Glass gasket - interior (3mm)	EPDM	71

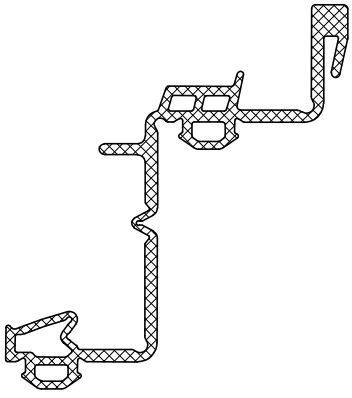Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
351.005		- Brtva prema staklu unutarnja 10.2 mm - Glass gasket interior 10.2 mm	EPDM	71
351.006		- Brtva prema staklu unutarnja 4.2 mm - Glass gasket interior 4.2 mm	EPDM	71
358.008		- Brtva prema staklu unutarnja, fasada pod kutom - Glass gasket interior, angled facade	EPDM	71
358.007		- Brtva prema staklu vanjska, fasada pod kutom - Glass facade exterior, angled facade	EPDM	71
358.019		- Brtva za fasadu 50FS - Facade 50FS gasket	Silicon	71
351.018		- Brtva u ramu strukturalne fasade - Frame gasket for structural facade	EPDM	71







Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
358.021		- Brtva u krilu strukturalne fasade - Sash gasket in structural facade	EPDM	71
328.001		- Brtva u profilu krila i rama - Sash and frame gasket	EPDM	61
354.012		- Umetak za brtvu 351.018 - Insert for gasket 351.018	EPDM	71
318.001		- Brtva prema staklu-unutarnja (3mm) - Glass gasket - interior (3mm)	EPDM	71
318.002		- Brtva prema staklu-unutarnja (4mm) - Glass gasket - interior (4mm)	EPDM	71
358.020		- Brtva za krovni prozor - Roof opening gasket	EPDM	71
328.101		- Brtva prema staklu - vanjska (skriveno krilo) - Glass gasket - exterior (hidden sash)	EPDM	61










Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
331.004		- Centralna brtva - Central gasket	EPDM	61
358.010		- Brtva za poklopnu lajsnu FM 50/12 - Cover cap gasket FM 58/12	EPDM	71
328.002		- Brtva prema staklu - vanjska (3.5 mm) - Glass gasket - exterior (3.5 mm)	EPDM	61
328.003		- Brtva prema staklu - vanjska (5 mm) - Glass gasket - exterior (5 mm)	EPDM	61
354.011		- Brtva u profilu krila - Gasket in sash profile	ELASTRON G SEBS	65
354.010		- Brtva u profilu krila - Gasket in sash profile	ELASTRON G SEBS	65
354.009		- Brtva vrata i prozora u fasadi - Door and window gasket in facade	ELASTRON G SEBS	65





Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
351.001		- Brtva u profilu rama - unutarnja - Gasket in frame profile - interior	EPDM	71
351.002		- Centralna brtva - Central gasket	EPDM	71
351.003		- Brtva u ramu fasadnog otvora - vanjska - Gasket in facade opening frame - exterior	EPDM	71
318.014		- Brtva prema staklu-unutarnja (2mm) - Glass gasket - interior (2 mm)	EPDM	70±5 ShA
318.016		- Brtva prema staklu - unutarnja (5-6 mm) - Glass gasket - interior (5-6 mm)	EPDM	
318.017		- Brtva prema staklu - unutarnja (7-8 mm) - Glass gasket - interior (7-8 mm)	EPDM	



Oznaka Code	Izgled-presjek View- cross section	Opis Description	Materijal Material	Tvrdoća Hardness (ShA)
340.055		- Odstojna brtva - Distancing gasket	ELASTRON	
351.029		- Vanjska brtva za lajsnu polustrukturalne fasade - Exterior gasket for cover cap of semistructural glazing	EPDM	71
355.002		- Brtva na okomici prema vodoravnici 60 mm - Mullion-transom connection gasket 60 mm	EPDM	
354.014		- Brtva za odvod kondenzata 5 mm - Gasket for condesation drainage 5 mm	TPE	71
311.003		- Brtva prema staklu-unutarnja (3-4 mm) - Glass gasket - interior (3-4 mm)	EPDM	71



Dodaci
Accessories







Oznaka Code	Izgled-presjek View-cross section	Opis Descripton
430.001	 M 1:2	fischer FBN 6/5
430.013	 M 1:2	fischer FBN II 10/30
430.020	 M 1:2	fischer FBN II 12/30
430.170		Tipla pvc SX5 X25
430.200		HS 50/30 M16
431.117	 M 1:2	M12x110 DIN 933
431.231	 M 1:2	M12x80 DIN 931
431.233	 M 1:2	M12x90 DIN 931
431.234	 M 1:2	M12x100 DIN 931





Oznaka Code	Izgled-presjek View-cross section	Opis Descripton
431.235	 M 1:2	M12x110 DIN 931
431.236	 M 1:2	M12x120 DIN 931
431.215	 M 1:2	- Vijak M10x80 DIN 931
431.219	 M 1:2	Vijak M10x110 DIN 931
431.218	 M 1:2	M10x100 DIN 931
431.265		M8x10 tip Feal M8x10 Feal type
431.266		M8x13 tip Feal M8x13 Feal type
431.301		M3x4 DIN 914
432.016		- Matica M12 - DIN 985 - Nut M12 - DIN 985
432.015		- Matica M10 - DIN 985 - Nut M10 - DIN 985






Oznaka Code	Izgled-presjek View-cross section	Opis Descripton
432.124		Podloška K12 DIN 9021 Washer K12 DIN 9021
432.120		Podloška K5 DIN 9021 Washer K5 DIN 9021
434.008		FN 4/8 Alu
434.014		FN 5/8 Niro
432.123		- Podloška K10 - DIN 9021 - Washer K10 - DIN 9021
432.115		- Podloška U12 - DIN 125 - Washer U12 - DIN 125







Oznaka Code	Opis Description	Izgled-presjek View-cross section	Materijal Material	Napomena Remark
433.002	3.5x9.5 DIN 7981			
433.004	3.5x16 DIN 7981			
433.006	3.5x22 DIN 7981			
433.015	3.9x9.5 DIN 7981			
433.016	3.9x13 DIN 7981			
433.017	3.9x16 DIN 7981			
433.019	3.9x22 DIN 7981			
433.040	4.8x9.5 DIN 7981			
433.041	4.8x13 DIN 7981			
433.042	4.8x16 DIN 7981			
433.043	4.8x19 DIN 7981			
433.044	4.8x22 DIN 7981			
433.045	4.8x25 DIN 7981			
433.046	4.8x32 DIN 7981			
433.047	4.8x38 DIN 7981			
433.048	4.8x45 DIN 7981			
433.049	4.8x50 DIN 7981			
433.050	4.8x60 DIN 7981			
433.051	4.8x70 DIN 7981			
433.077	6.3x25 DIN 7981			
433.090	3.5x9.5 DIN 7982			
433.091	3.5x13 DIN 7982			
433.092	3.5x16 DIN 7982			






Oznaka Code	Opis Description	Izgled-presjek View-cross section	Materijal Material	Napomena Remark
433.093	3.5x19 DIN 7982			
433.094	3.5x22 DIN 7982			
433.095	3.5x25 DIN 7982			
433.096	3.5x32 DIN 7982			
433.104	3.9x13 DIN 7982			
433.105	3.9x16 DIN 7982			
433.107	3.9x22 DIN 7982			
433.116	4.2x13 DIN 7982			
433.117	4.2x16 DIN 7982			
433.118	4.2x19 DIN 7982			
433.129	4.8x16 DIN 7982			
433.132	4.8x25 DIN 7982			
433.133	4.8x32 DIN 7982			
433.134	4.8x38 DIN 7982			
433.136	4.8x50 DIN 7982			
433.137	4.8x60 DIN 7982			
433.138	4.8x70 DIN 7982			
433.150	5.5x50 DIN 7982			
433.152	5.5x60 DIN 7982			
433.164	6.3x25 DIN 7982			
433.200	6.3x25 DIN 7504-K			
433.206	AW-A4-5,5x45 mm		Inox	
433.207	AW-A4-5,5x65 mm			

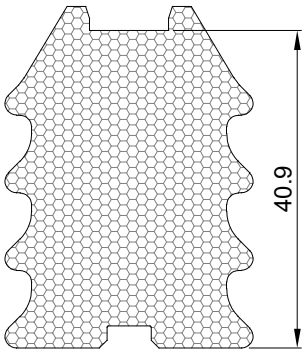Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
340.013		- Izolacijska ispuna s ljepljivom trakom (43x12) - Facade 50 FK isolation	XPE	
340.014		- Izolacijska ispuna (31x44) za fasadu 60K - Facade 60 K isolation	XPE	
348.002		- Izolacijska ispuna s ljepljivom trakom (37x8) - Facade isolation with a sticky band	PPE	
340.015		- Izolacijska ispuna (22x21) za fasadu 50FK - Facade isolation	XPE	
340.016		- Izolacijska ispuna (31x34) za fasadu 60K - Facade 60 K isolation	XPE	
340.017		- Izolacijska ispuna (22x26) za fasadu 50FK - Facade isolation	XPE	

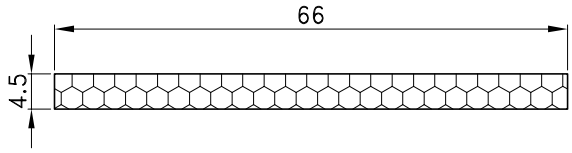
Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
340.419	 M 1:2	- Termoblok za komoru:14,8x114 Za profil: FT-0194F - Termoblock for chamber:14,8x114 For profiles: FT-0194F	XPS	
340.420		- Termoblok za komoru:5x67 Za profil: FT-0194F - Termoblock for chamber:5x67 For profiles: FT-0194F	XPS	
340.421	 M 1:2	- Termoblok za komoru:14,8x120 Za profil: FT-0196F - Termoblock for chamber:14,8x120 For profile: FT-0196F	XPS	
340.511	 M 1:2	- Termoblok za komoru:14,8x90 Za profile: FT-1800F, FT-1801F - Termoblock for chamber:14,8x90 For profiles: FT-1800F, FT-1801F	XPS	


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
365.026		- Gumeni umetak za prebacivanje kapljevina na spoju okomica-60K - Mullion joint rubber insert for drainage transfer-60K	TPE	
365.027		- Gumeni umetak za prebacivanje kapljevina na spoju okomica-60K (treći nivo) - Mullion joint rubber insert for drainage transfer-60K third level	TPE	
363.022		- Umetak za izvod kapljevina-60 K - Drainage spout - 60K	Tvrda guma	
421.006		- Butilna traka 60mm x 0,8mm (rola 10m) - Butyl tape 60mm x 0.8mm (roll 10m)		
366.018		- Kutnik centralne brtve 351.002 - Corner for central gasket 351.002	EPDM	

Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
365.015		- Gumeni odstojnik za vodoravnicu FMV 60/88 - Dilatation rubber for transom FMV 60/88	TPE	
365.016		- Gumeni odstojnik za vodoravnicu FMV 60/114 - Dilatation rubber for transom FMV 60/114	TPE	
365.017		- Gumeni odstojnik za vodoravnicu FMV 60/156 - Dilatation rubber for transom FMV 60/156	TPE	
365.018		- Gumeni odstojnik za pomoćnu vodoravnicu FMP 60/88 - Dilatation rubber for auxiliary transom FMP 60/88	TPE	
365.019		- Gumeni odstojnik za pomoćnu vodoravnicu FMP 60/200 - Dilatation rubber for auxiliary transom FMP 60/200	TPE	
365.020		- Gumeni odstojnik za vodoravnicu FMV 60/198 - Dilatation rubber for transom FMV 60/198	TPE	


Oznaka Code	Izgled-presjek View-cross section	Opis Description	Materijal Material	Napomena Remark
365.021		- Ravni gumeni odstojnik za vodoravnicu FMV 60/88 - Flat dilatation rubber for transom FMV 60/88	TPE	
365.022		- Ravni gumeni odstojnik za vodoravnicu FMV 60/114 - Flat dilatation rubber for transom FMV 60/114	TPE	
365.023		- Ravni gumeni odstojnik za vodoravnicu FMV 60/156 - Flat dilatation rubber for transom FMV 60/156	TPE	
365.024		- Ravni gumeni odstojnik za vodoravnicu FMV 60/198 - Flat dilatation rubber for transom FMV 60/198	TPE	
365.025		- Ravni gumeni odstojnik za vodoravnicu FMV 60/41 - Flat dilatation rubber for transom FMV 60/41	TPE	


Obrada i montaža
Processing and montage

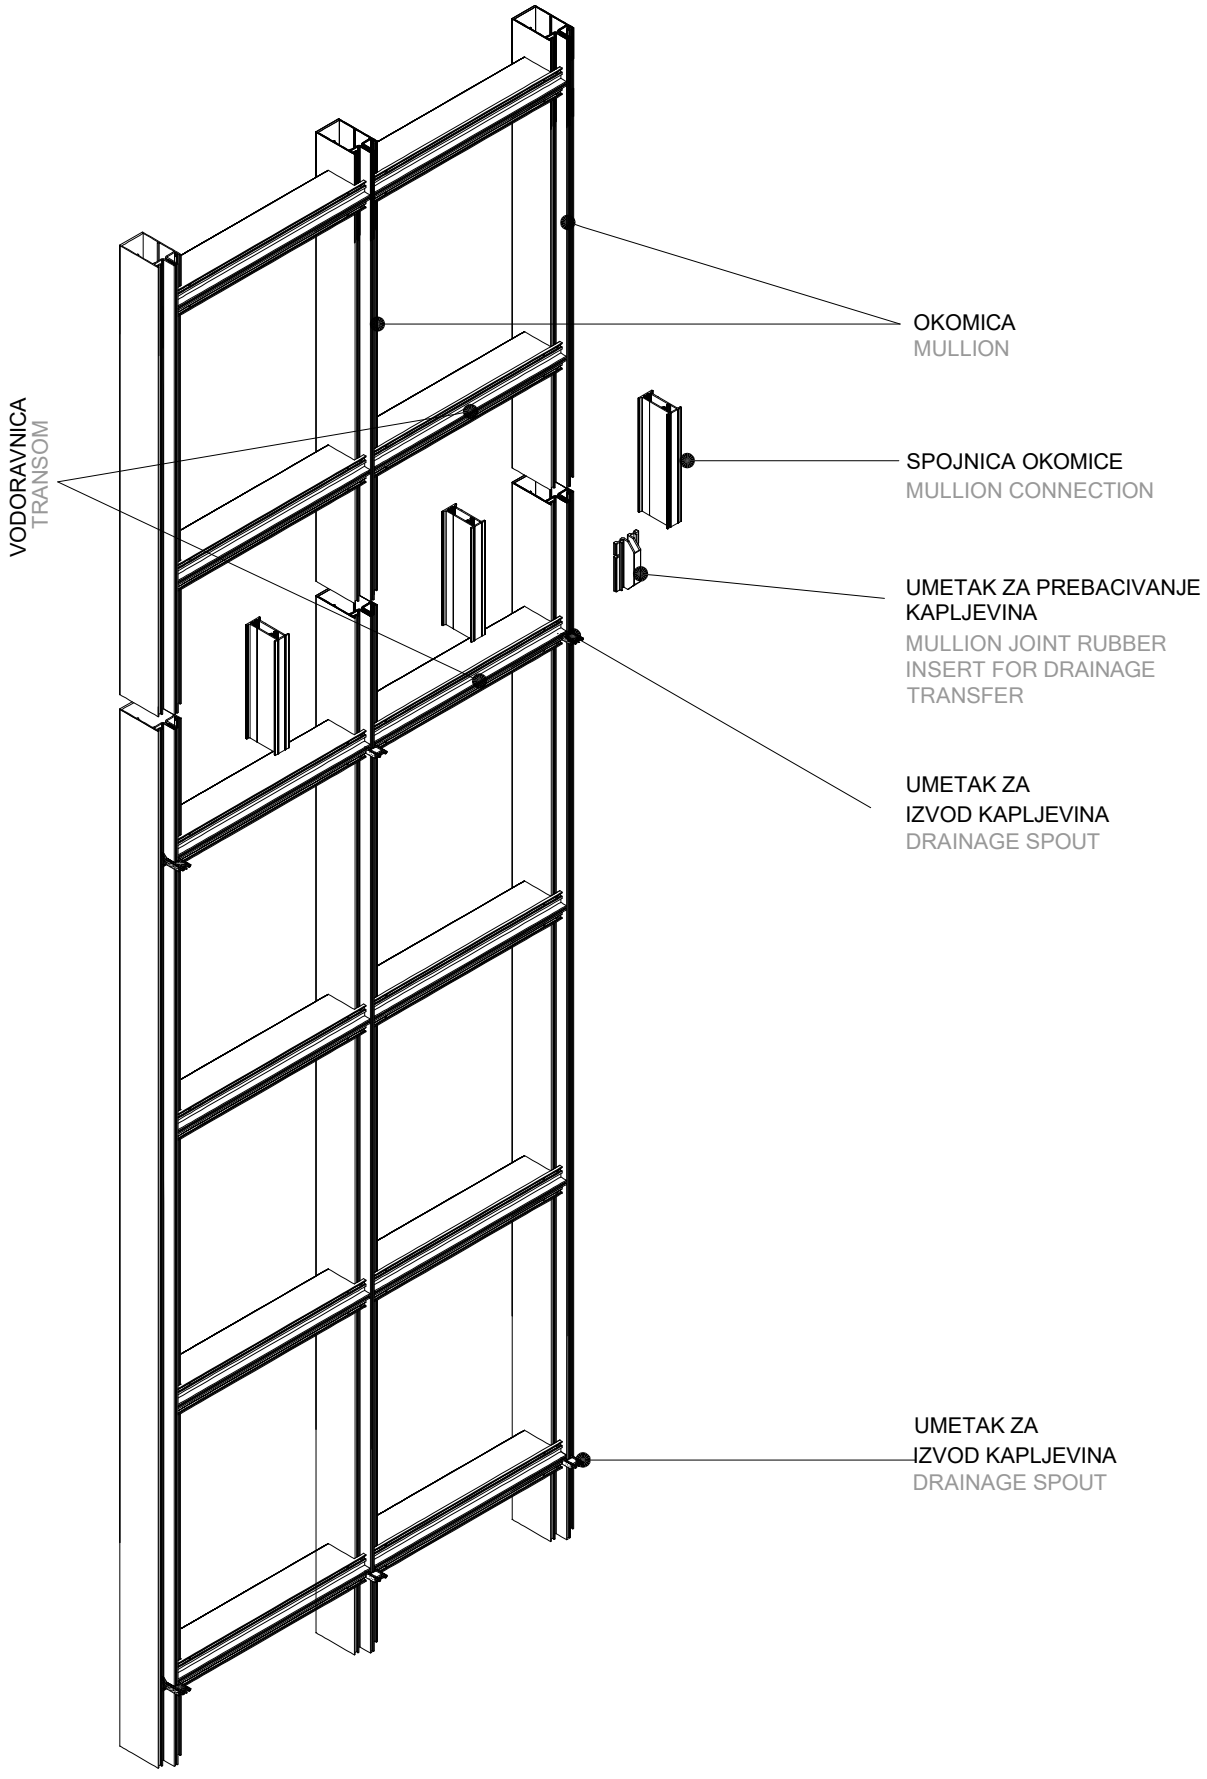
OKOMICA
MULLION
VODORAVNICA
TRANSOM
SPOJNICA OKOMICE
MULLION CONNECTION
UMETAK ZA PREBACIVANJE KAPLJEVINA
MULLION JOINT RUBBER INSERT FOR DRAINAGE TRANSFER
UMETAK ZA IZVOD KAPLJEVINA
DRAINAGE SPOUT
UMETAK ZA IZVOD KAPLJEVINA
DRAINAGE SPOUT

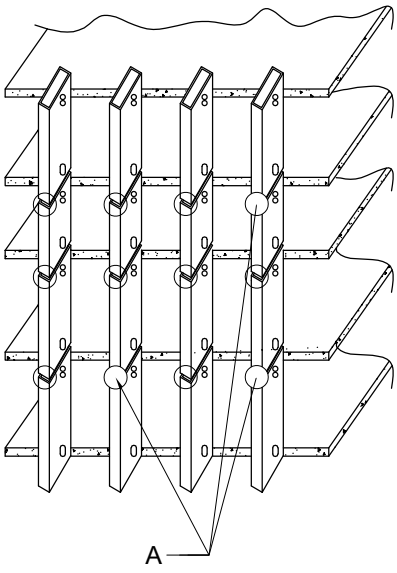


IZGLED A
VIEW A

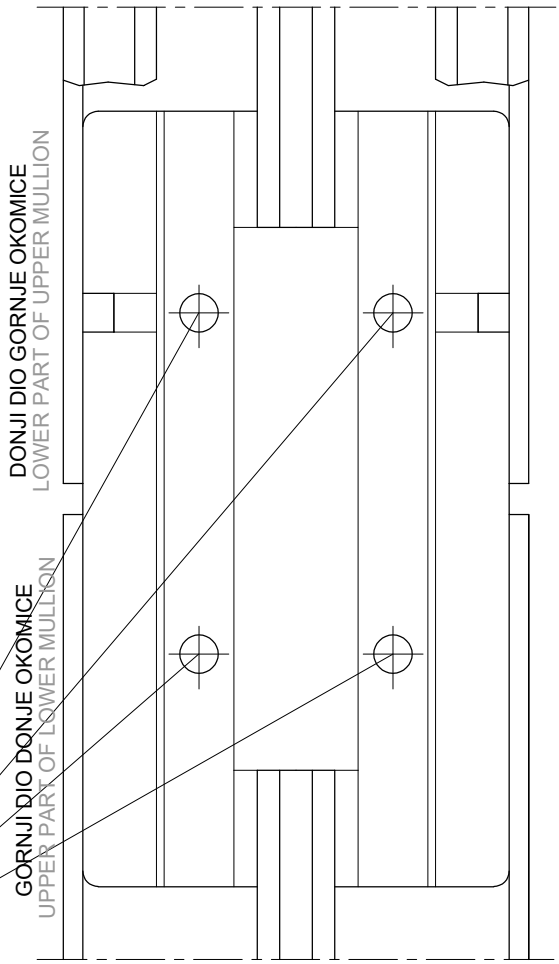


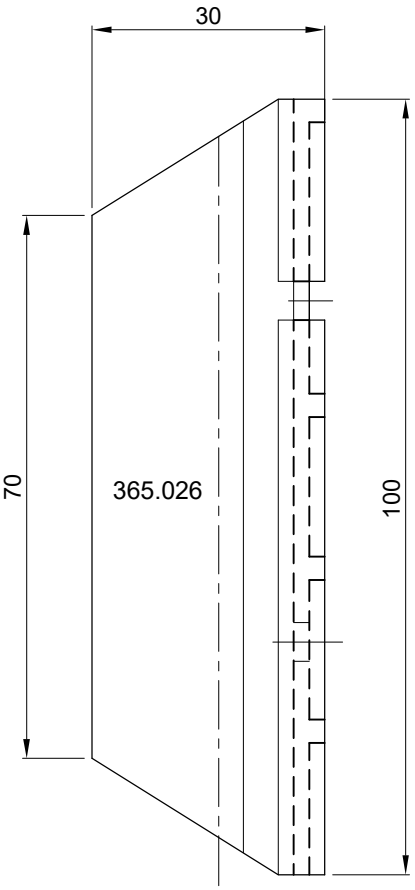



prostor izmedu gume i aluminija
ispuniti tiokolom (silikon za
spajanje gume i aluminija)


space between rubber and aluminium
must be filled with Thiokol
(sealant for rubber and aluminiumn connections)

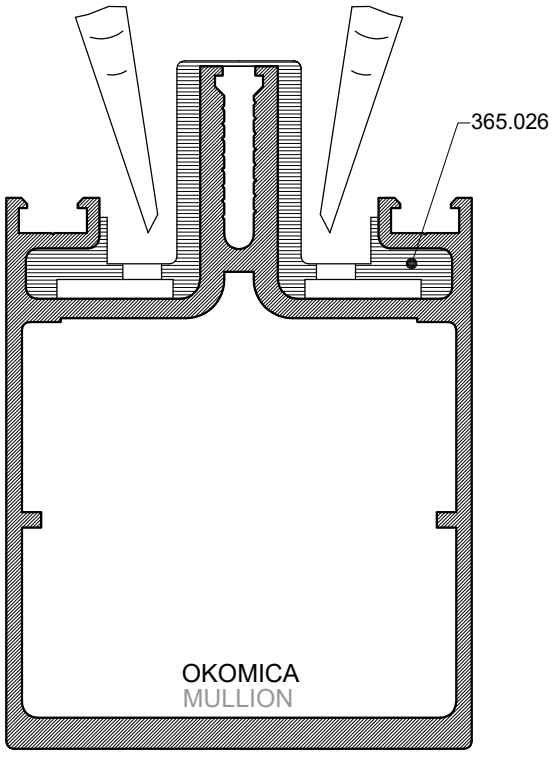

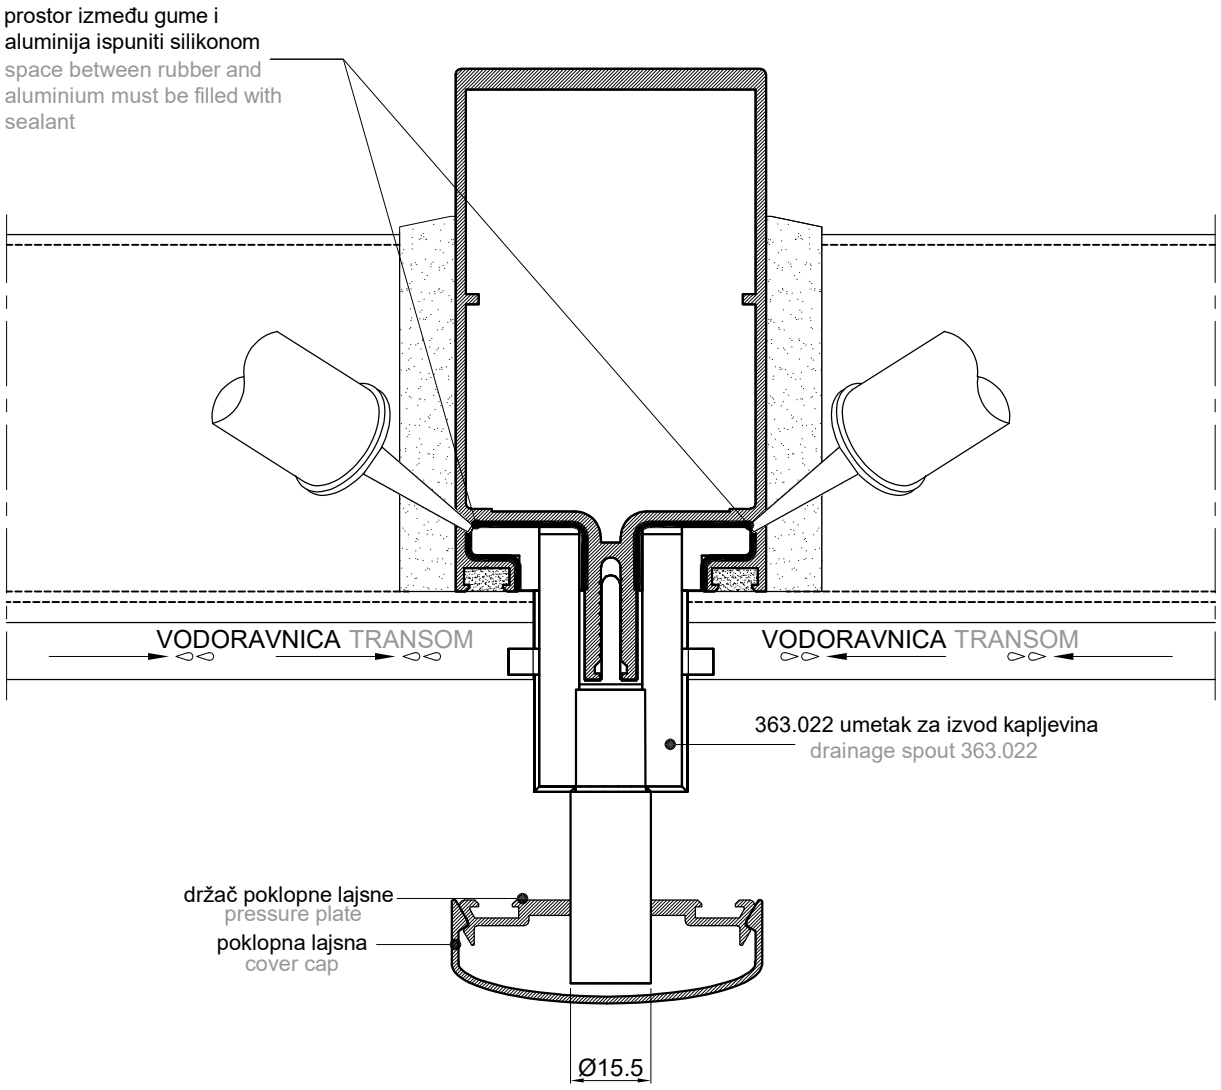
prostor između gume i aluminija ispuniti silikonom
space between rubber and aluminium must be filled with sealant
VODORAVNICA TRANSOM
VODORAVNICA TRANSOM
363.022 umetak za izvod kapljevina
drainage spout 363.022
držač poklopne lajsne
pressure plate
poklopna lajsna
cover cap
Ø15.5

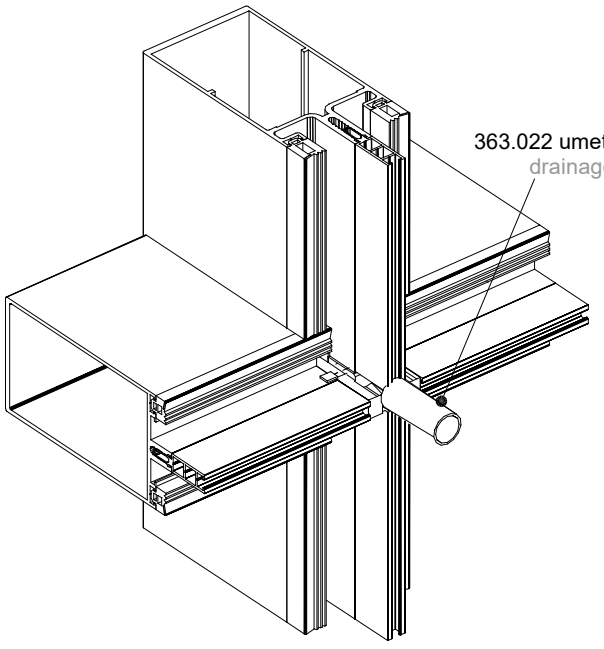

363.022 umetak za izvlačenje kapljevina
drainage spout 363.022

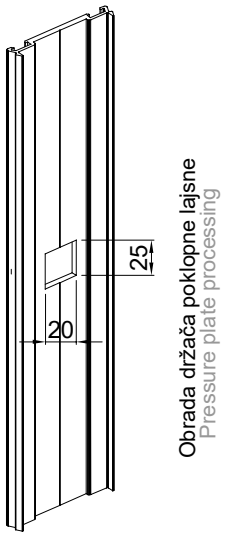
25
20
Obrada držača poklopne lajsne
Pressure plate processing

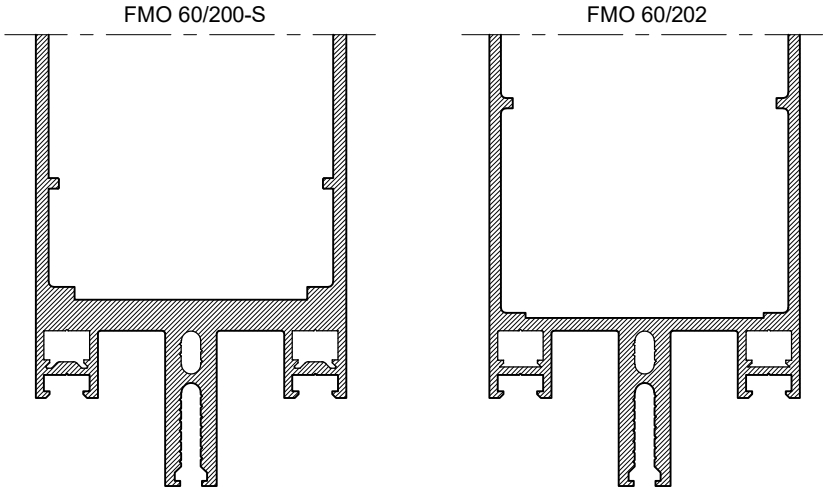



Pri ugradnji umetka za izvod kapljevina 363.022 u profilima:
1. FMO 60/202;
2. FMO 60/200-S
potrebno je skratiti umetak.

In case of installation of drain spout 363.022 in mullions:
1. FMO 60/202;
2. FMO 60/200-S
it is necessary to cut the spout.

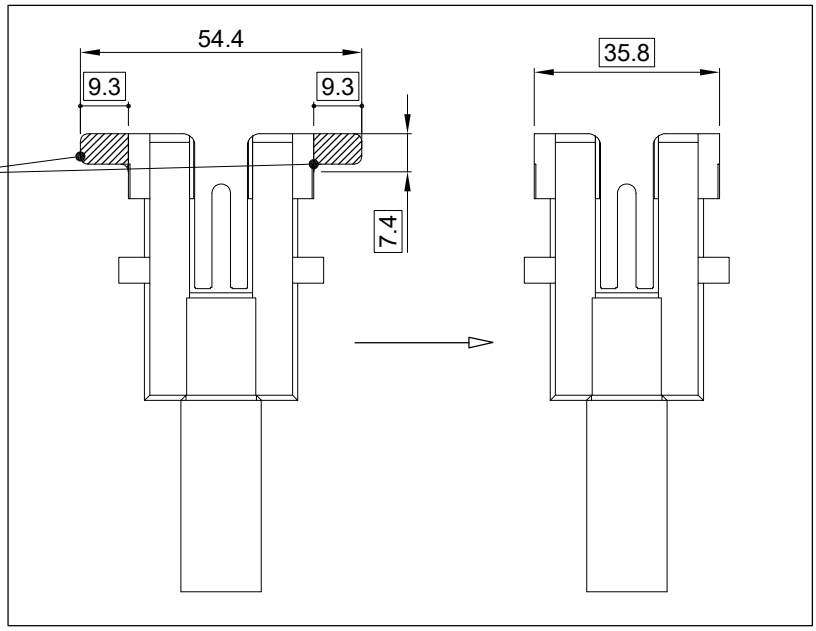



Odrezati naznačene djelove umetka
Cut the marked parts of the spout

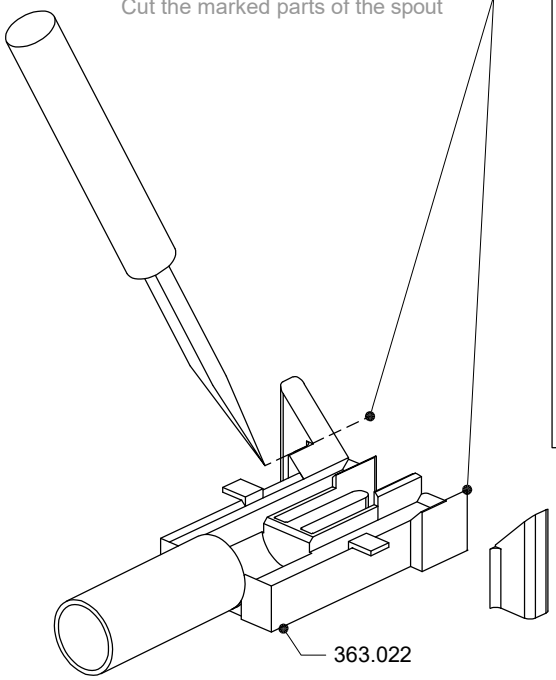


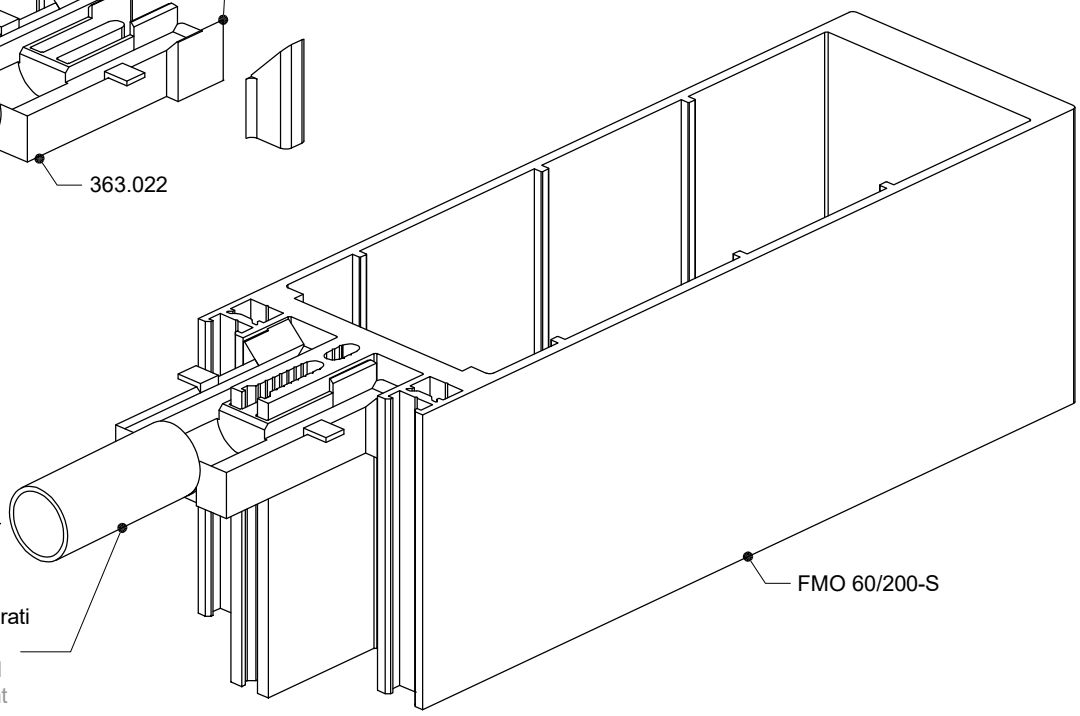



Odrezani umetak pozicionirati u okomicu i silikonirati
Cutted spout put in wanted position and fill with sealant

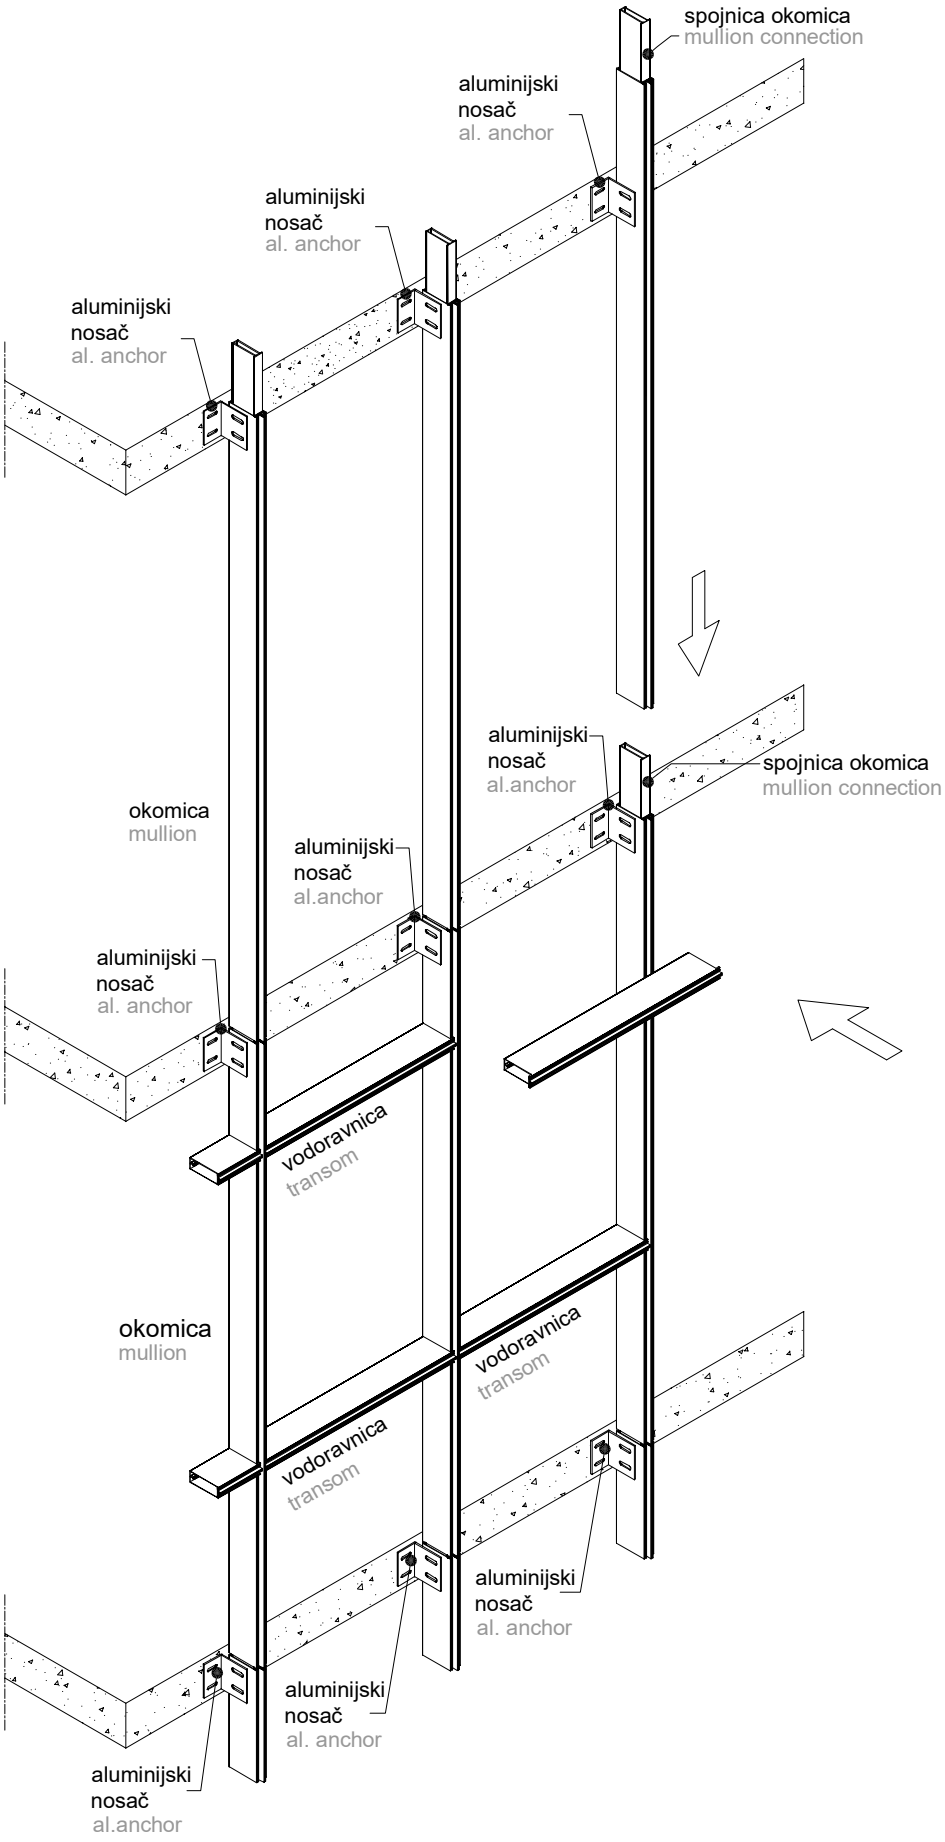
spojnica okomica
mullion connection
aluminijski nosač
al. anchor
aluminijski nosač
al. anchor
aluminijski nosač
al. anchor
aluminijski nosač
al.anchor
spojnica okomica
mullion connection
okomica
mullion
aluminijski nosač
al.anchor
aluminijski nosač
al. anchor
vodoravnica
transom
okomica
mullion
vodoravnica
transom
vodoravnica
transom
aluminijski nosač
al. anchor
aluminijski nosač
al. anchor
aluminijski nosač
al.anchor

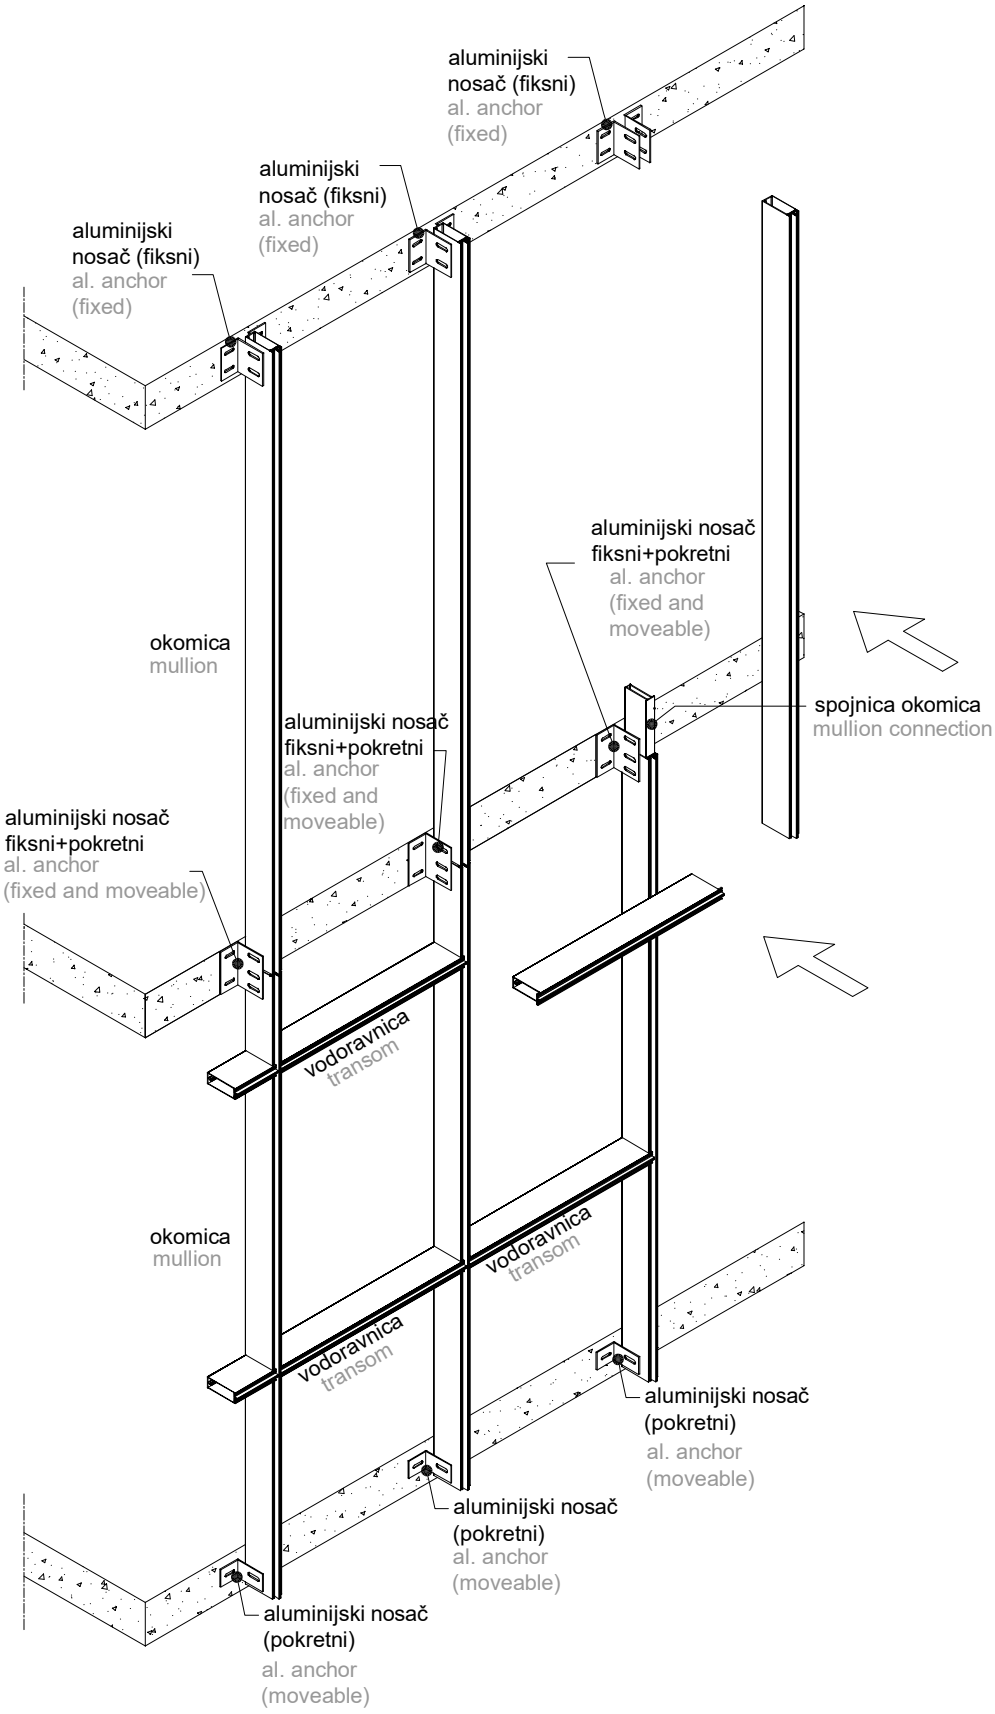

aluminijski nosač (fiksni)
al. anchor (fixed)
aluminijski nosač (fiksni)
al. anchor (fixed)
aluminijski nosač (fiksni)
al. anchor (fixed)
aluminijski nosač fiksni+pokretni
al. anchor (fixed and moveable)
okomica
mullion
spojnica okomica
mullion connection
aluminijski nosač fiksni+pokretni
al. anchor (fixed and moveable)
aluminijski nosač fiksni+pokretni
al. anchor (fixed and moveable)
vodoravnica
transom
okomica
mullion
vodoravnica
transom
vodoravnica
transom
aluminijski nosač (pokretni)
al. anchor (moveable)
aluminijski nosač (pokretni)
al. anchor (moveable)
aluminijski nosač (pokretni)
al. anchor (moveable)

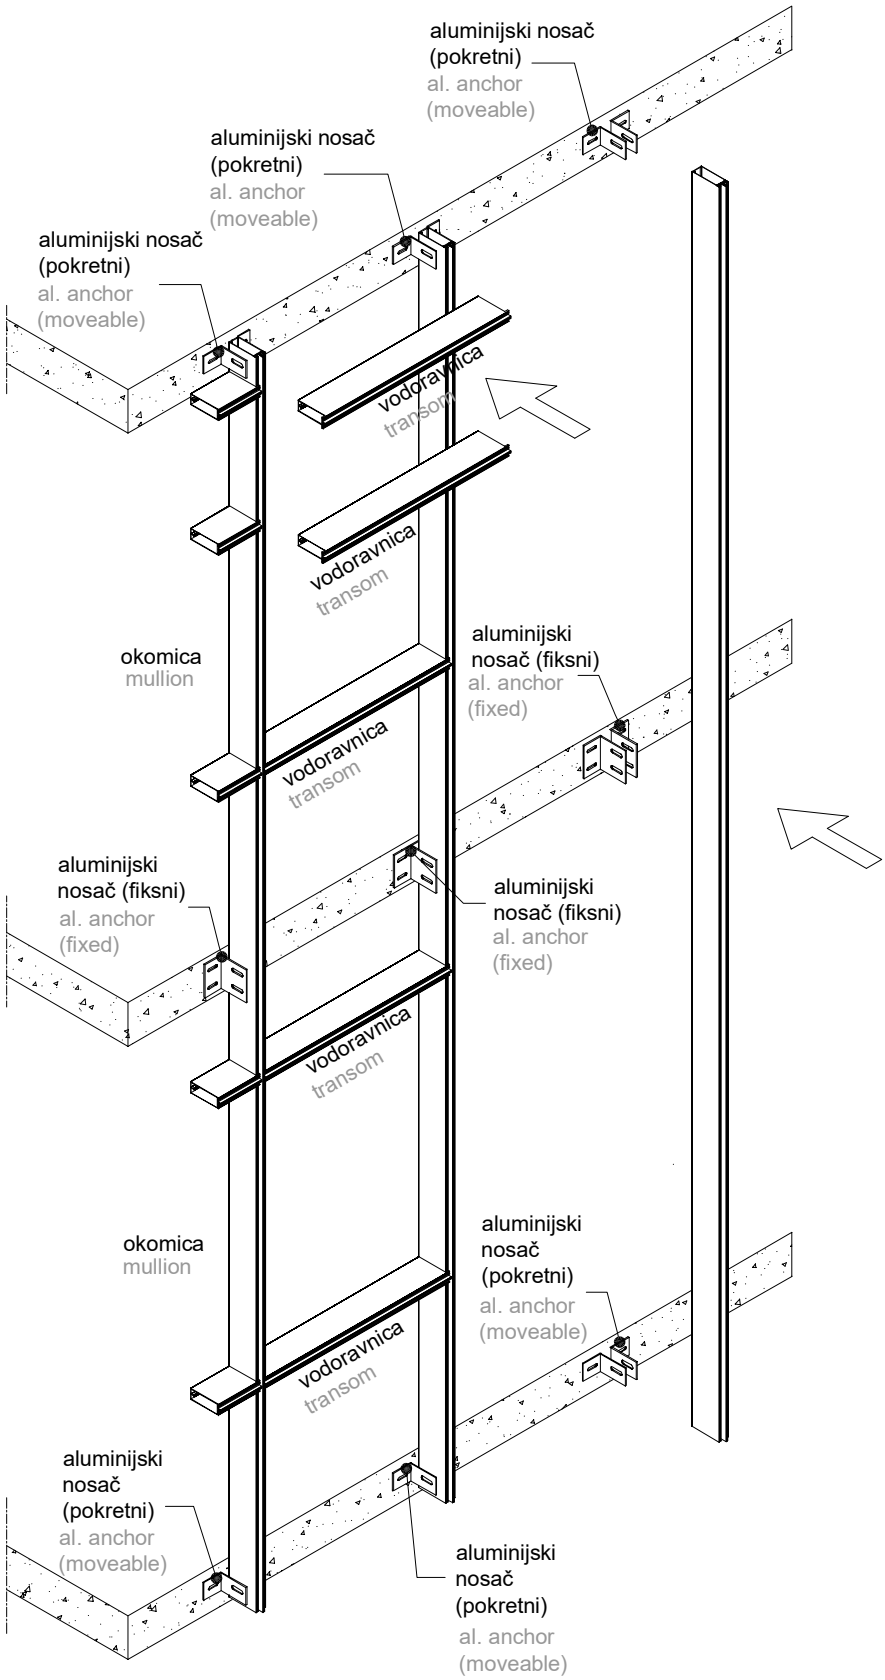

aluminijski nosač (pokretni)
al. anchor (moveable)
aluminijski nosač (pokretni)
al. anchor (moveable)
aluminijski nosač (pokretni)
al. anchor (moveable)
vodoravnica
transom
vodoravnica
transom
okomica
mullion
aluminijski nosač (fiksni)
al. anchor (fixed)
vodoravnica
transom
aluminijski nosač (fiksni)
al. anchor (fixed)
aluminijski nosač (fiksni)
al. anchor (fixed)
vodoravnica
transom
okomica
mullion
aluminijski nosač (pokretni)
al. anchor (moveable)
vodoravnica
transom
aluminijski nosač (pokretni)
al. anchor (moveable)
aluminijski nosač (pokretni)
al. anchor (moveable)

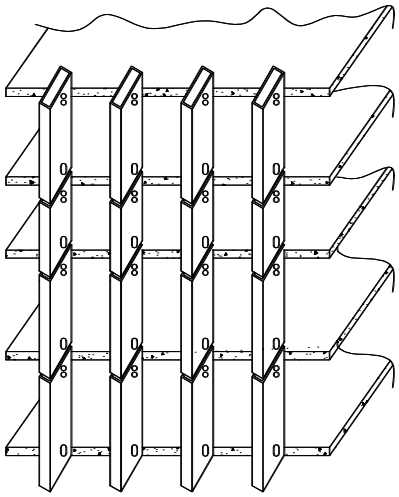

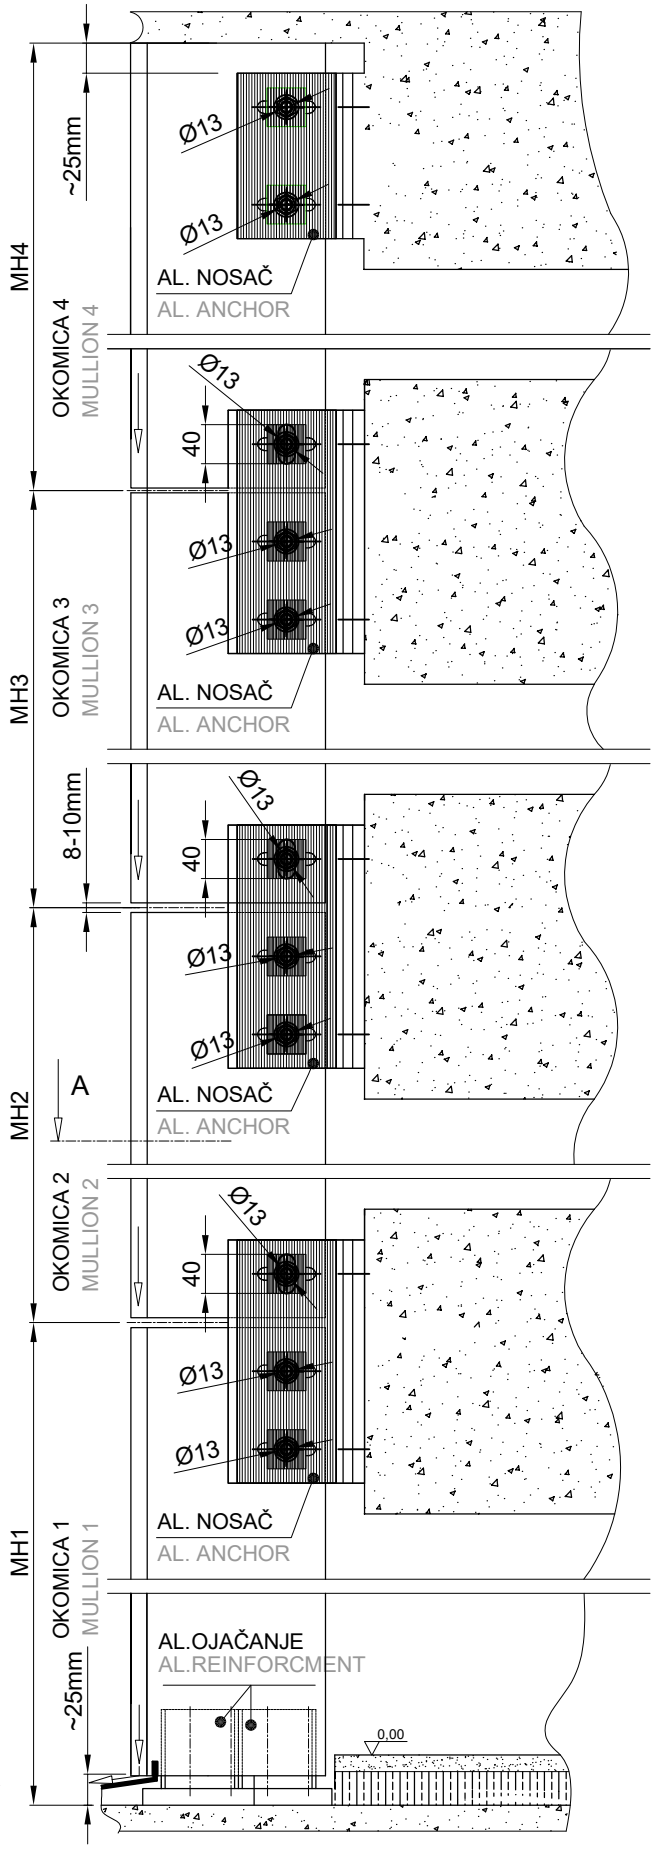
MH4
~25mm
Ø13
Ø13
AL. NOSAČ
AL. ANCHOR
OKOMICA 4
MULLION 4
MH3
OKOMICA 3
MULLION 3
40
Ø13
Ø13
Ø13
AL. NOSAČ
AL. ANCHOR
8-10mm
MH2
A
OKOMICA 2
MULLION 2
MH1
OKOMICA 1
MULLION 1
~25mm
AL.OJAČANJE
AL.REINFORCMENT
0,00
moguće kapljevine izvesti van fasade
rain water to be led outside the facade


PRESJEK A-A
CROSS SECTION A-A

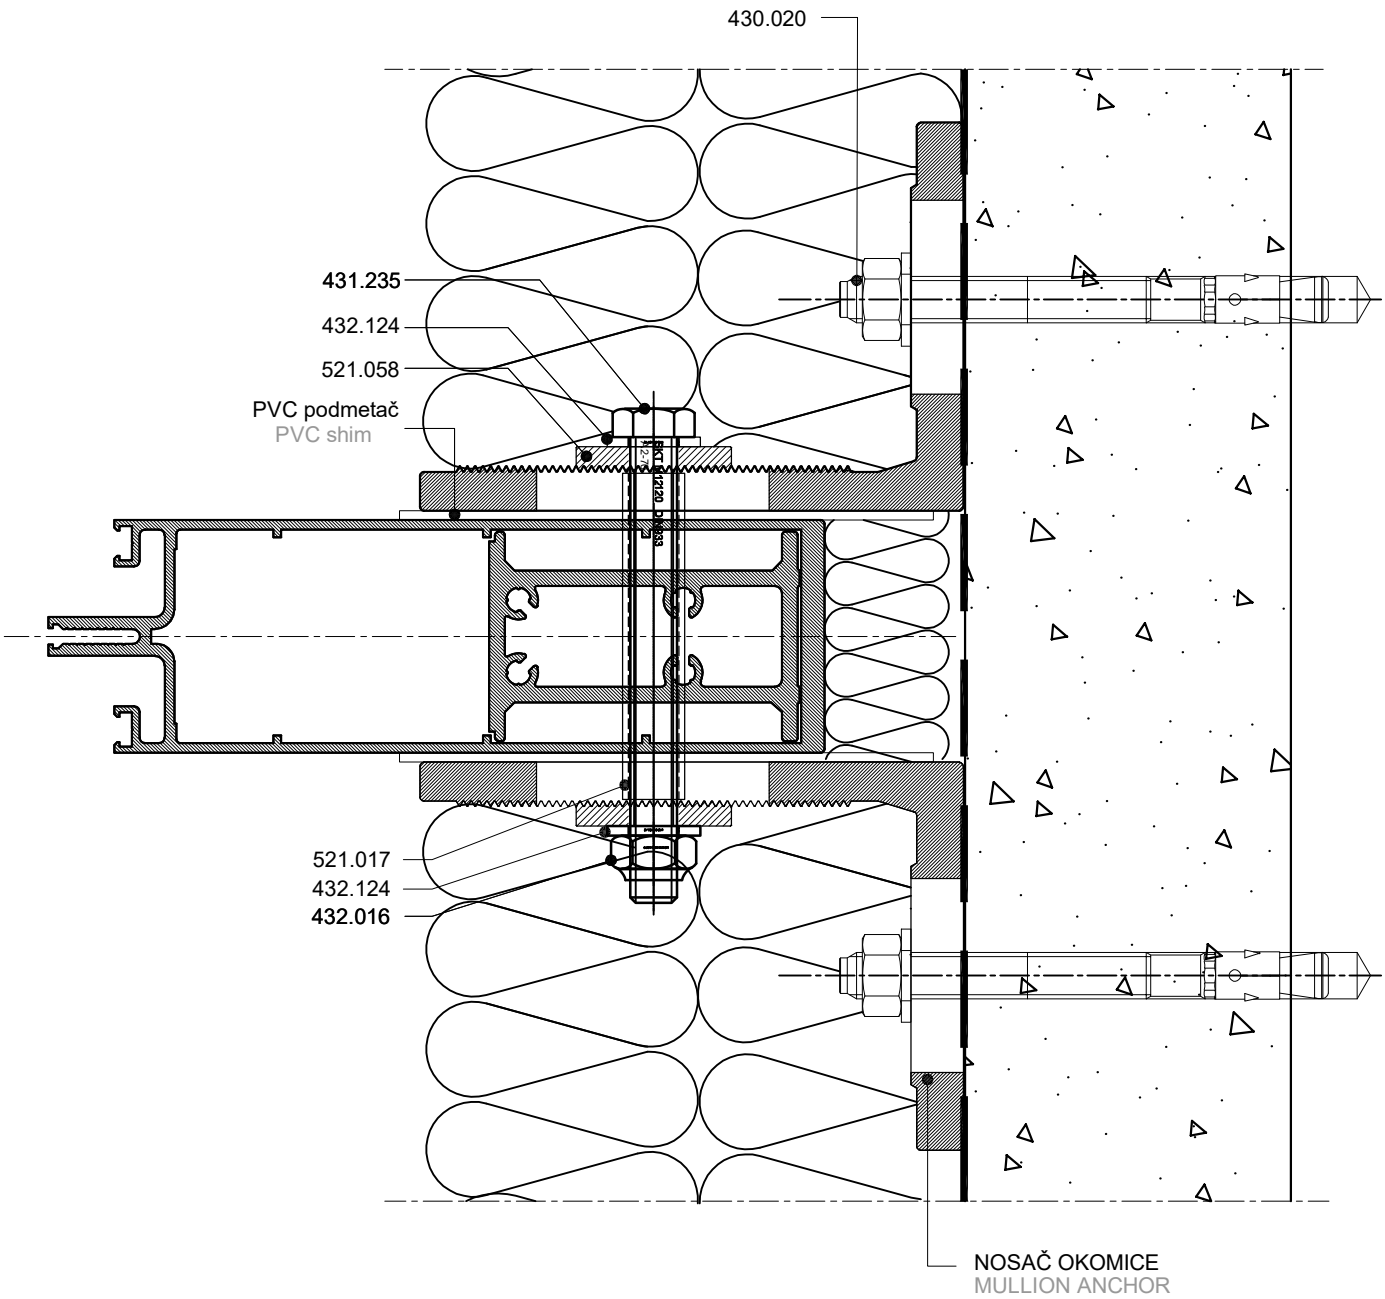


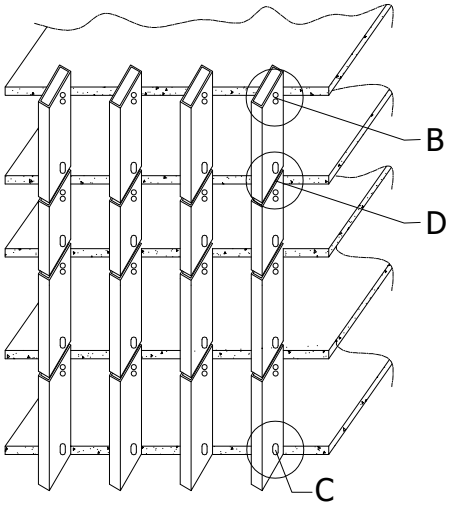


FASADA NA DVA OSLONCA
FACADE WITH TWO SUPPORTS

FIKSNI OSLONAC -B-
FIXED SUPPORT -B-
POKRETNI I FIKSNI OSLONAC -D-
MOVEABLE AND FIXED SUPPORT -D-
POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

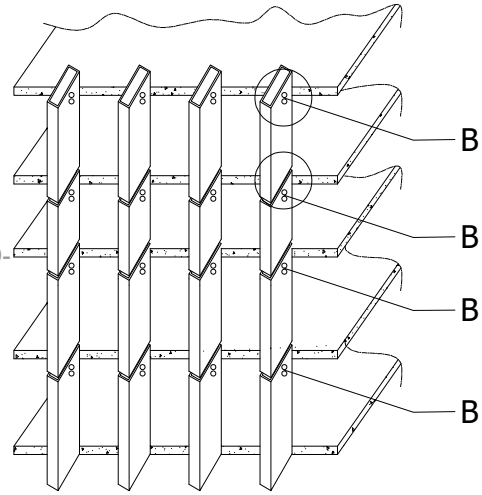


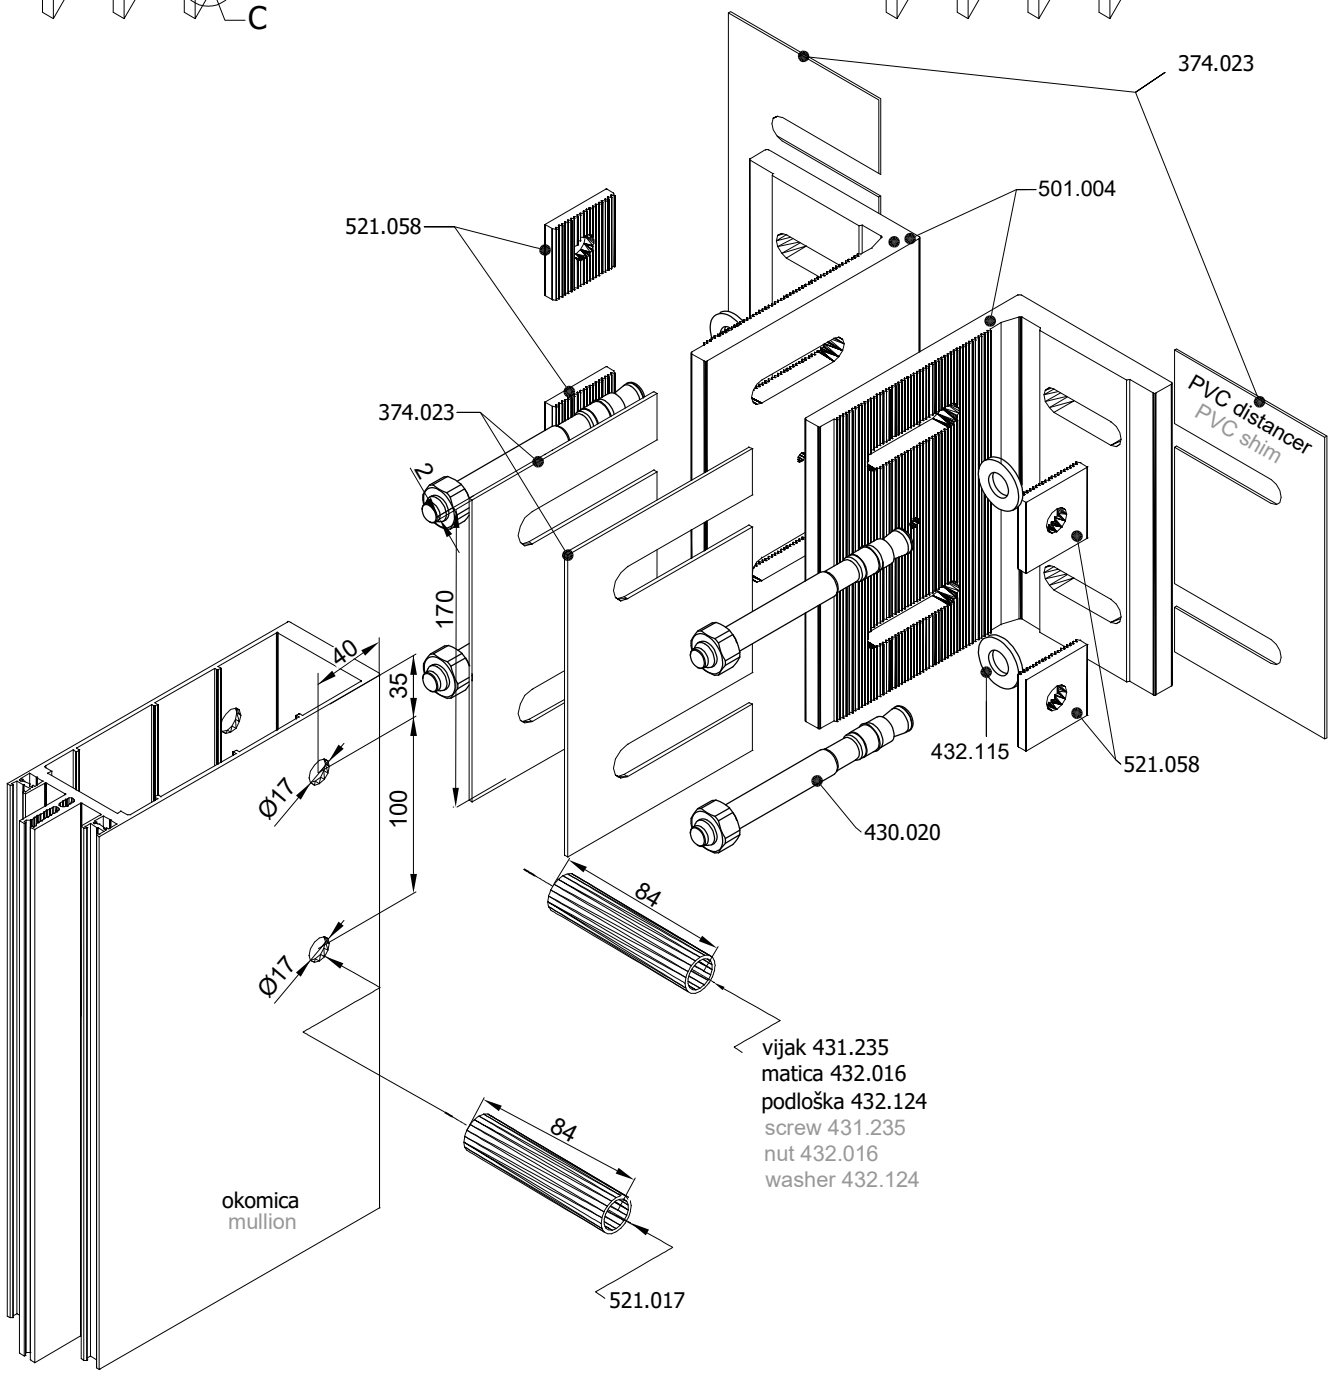


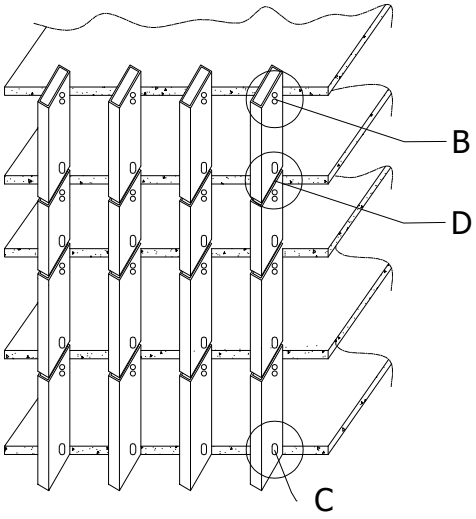

FASADA NA DVA OSLONCA
FACADE WITH TWO SUPPORTS

FIKSNI OSLONAC -B-
FIXED SUPPORT -B-
POKRETNI I FIKSNI OSLONAC -D-
MOVEABLE AND FIXED SUPPORT -D-
POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

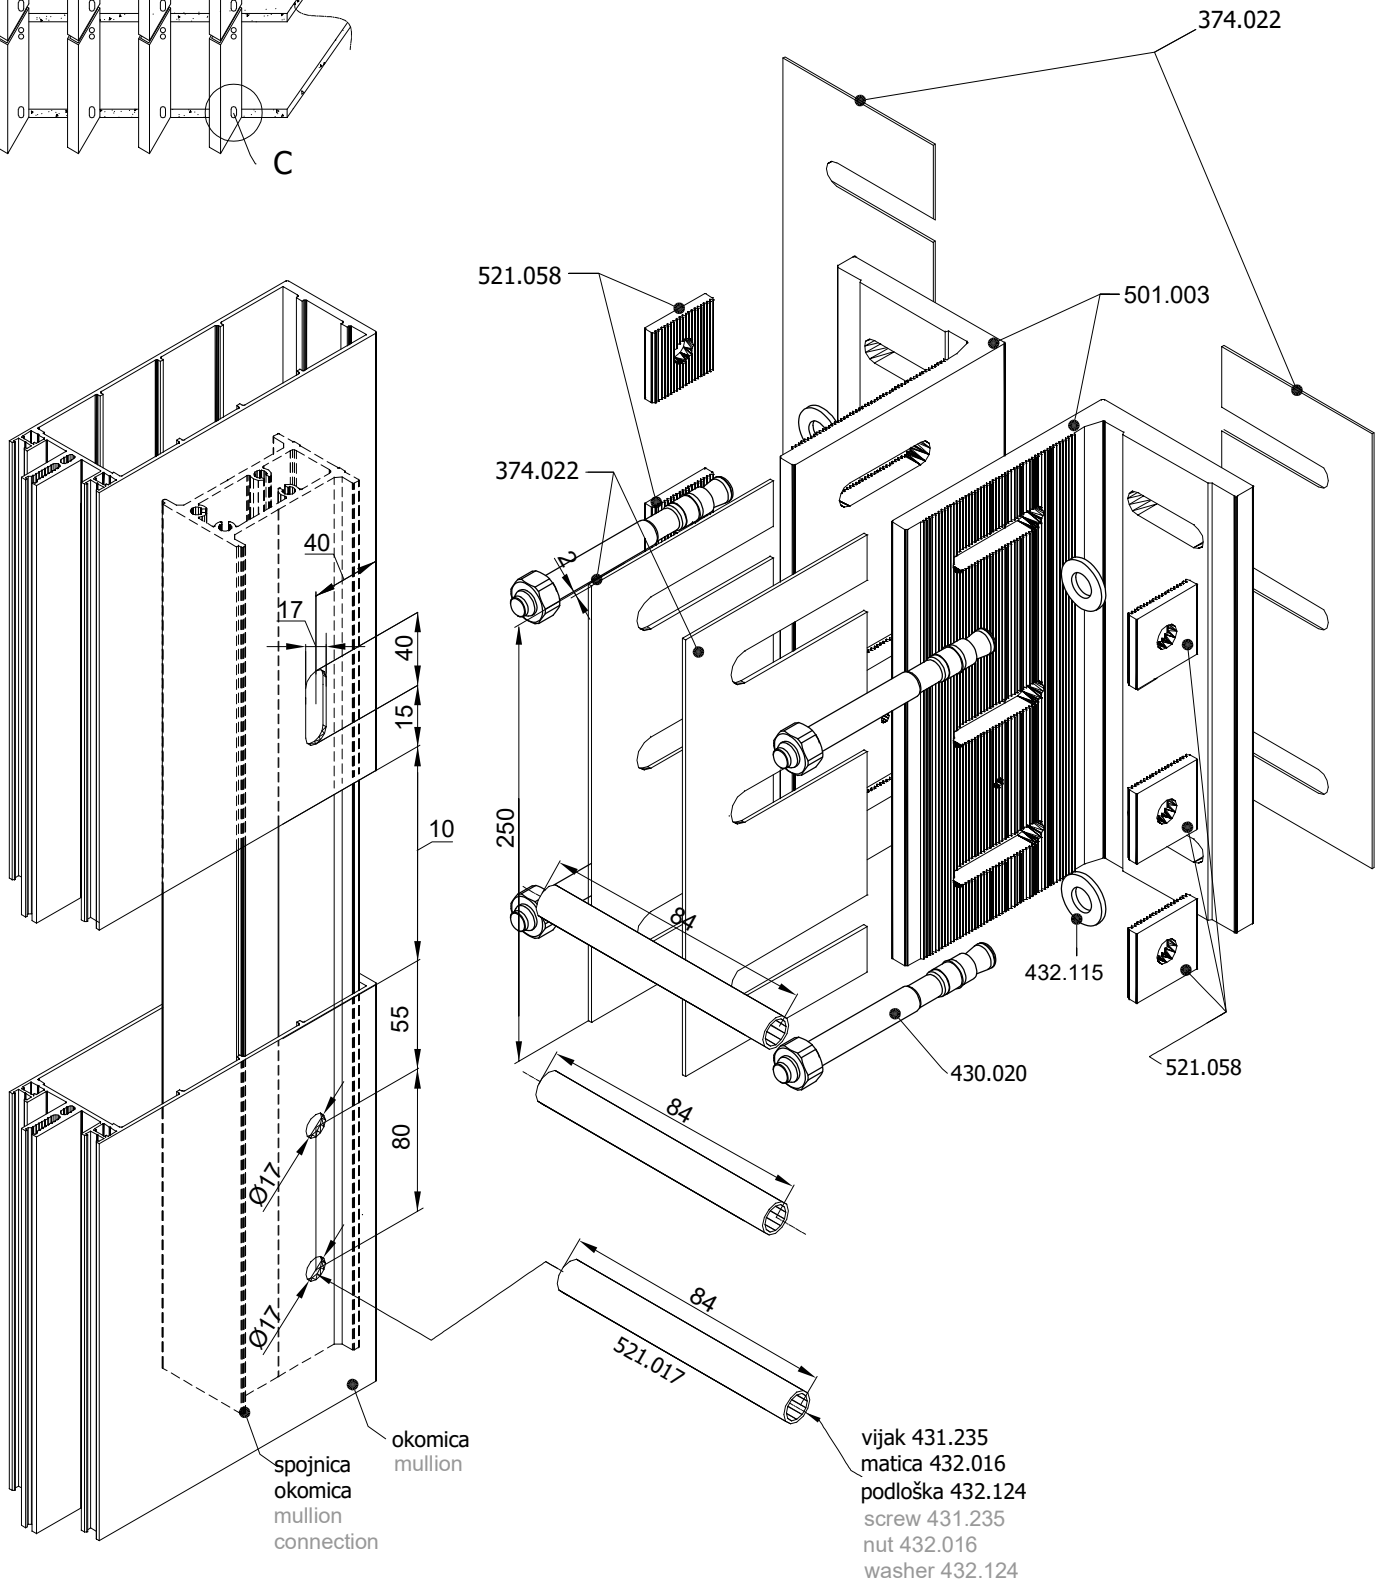

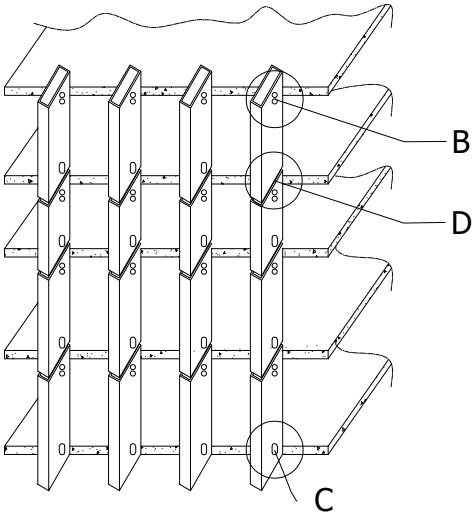



FASADA NA DVA OSLONCA
FACADE WITH TWO SUPPORTS

FIKSNI OSLONAC -B-
FIXED SUPPORT -B-

POKRETNI I FIKSNI OSLONAC -D-
MOVEABLE AND FIXED SUPPORT -D-


POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

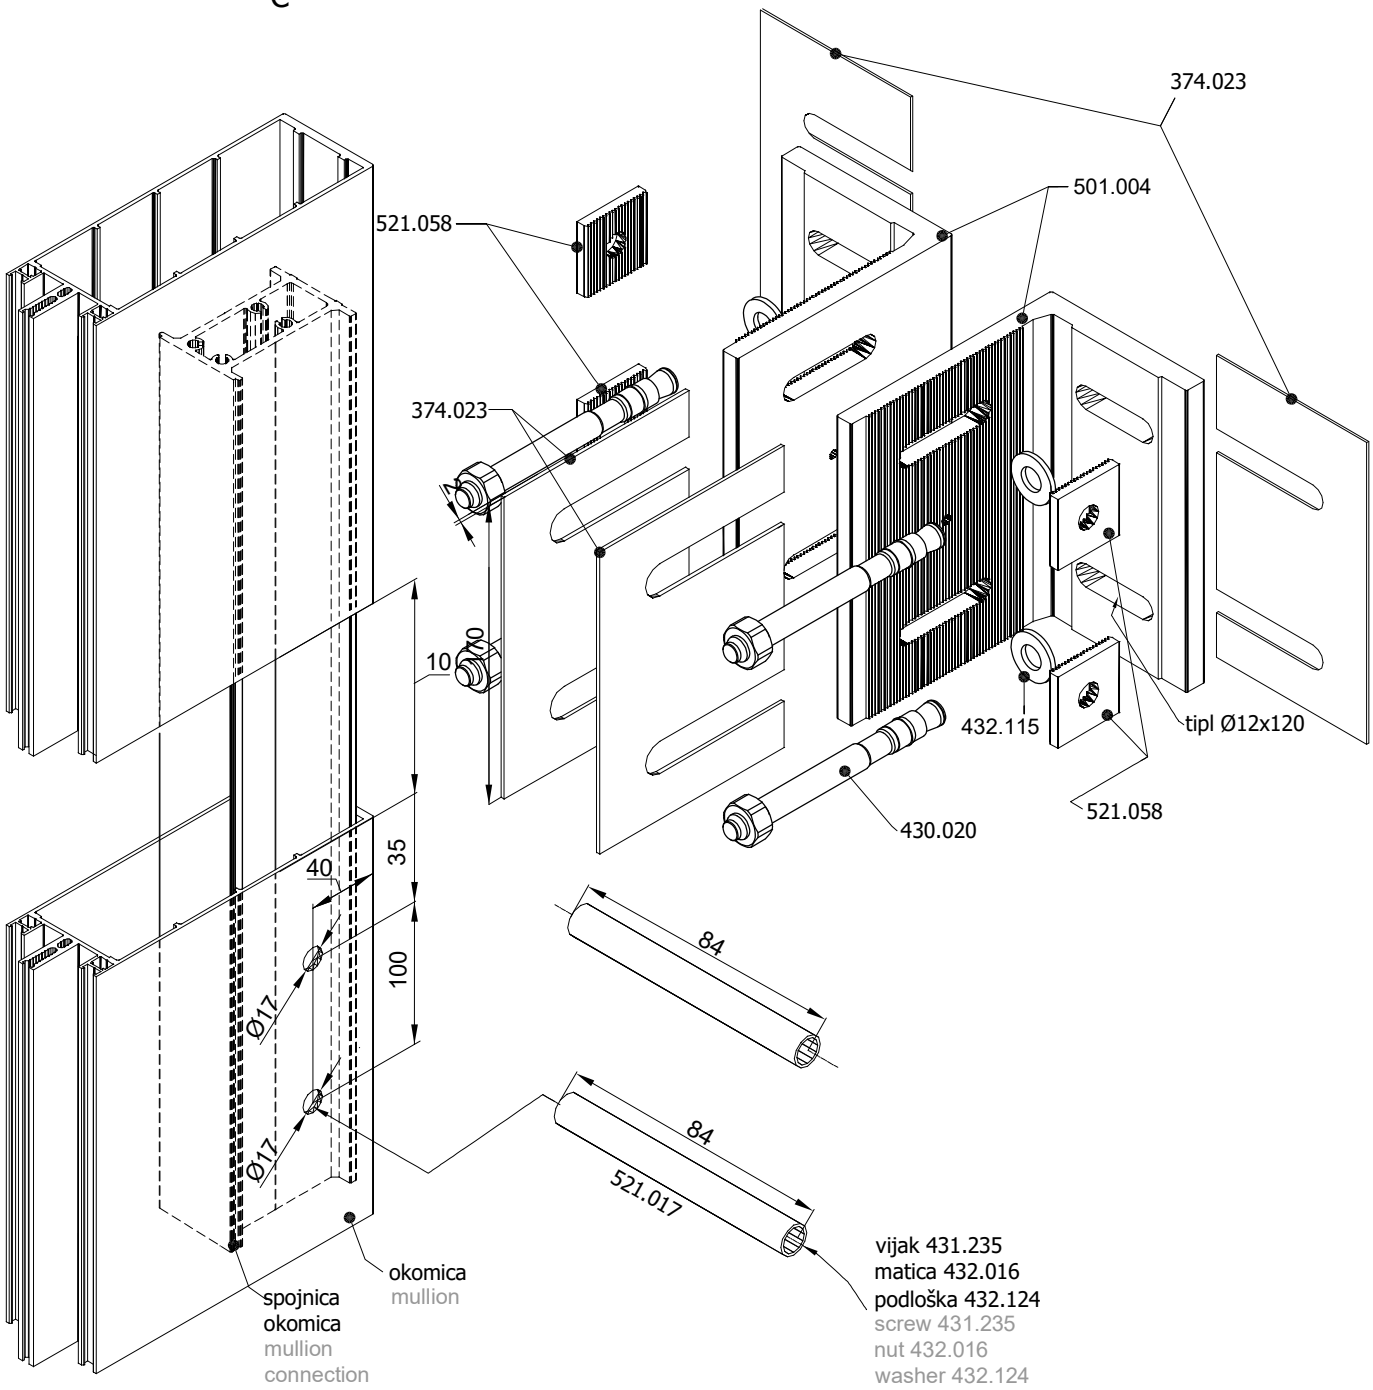


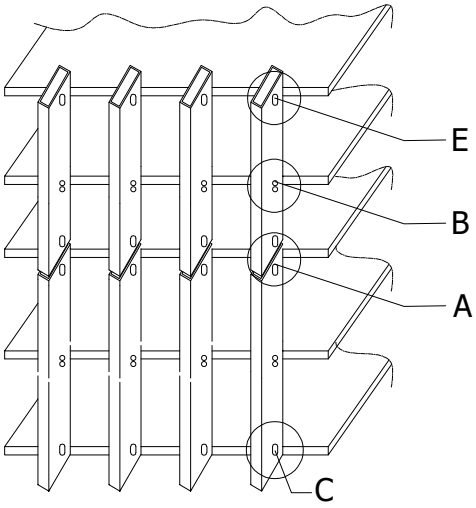

FASADA NA TRI OSLONCA
FACADE WITH THREE SUPPORTS

POKRETNI OSLONAC -E-
MOVEABLE SUPPORT -E-
POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-
FIKSNI OSLONAC -B-
FIXED SUPPORT -B-
POKRETNI OSLONAC -A-
MOVEABLE SUPPORT -A-

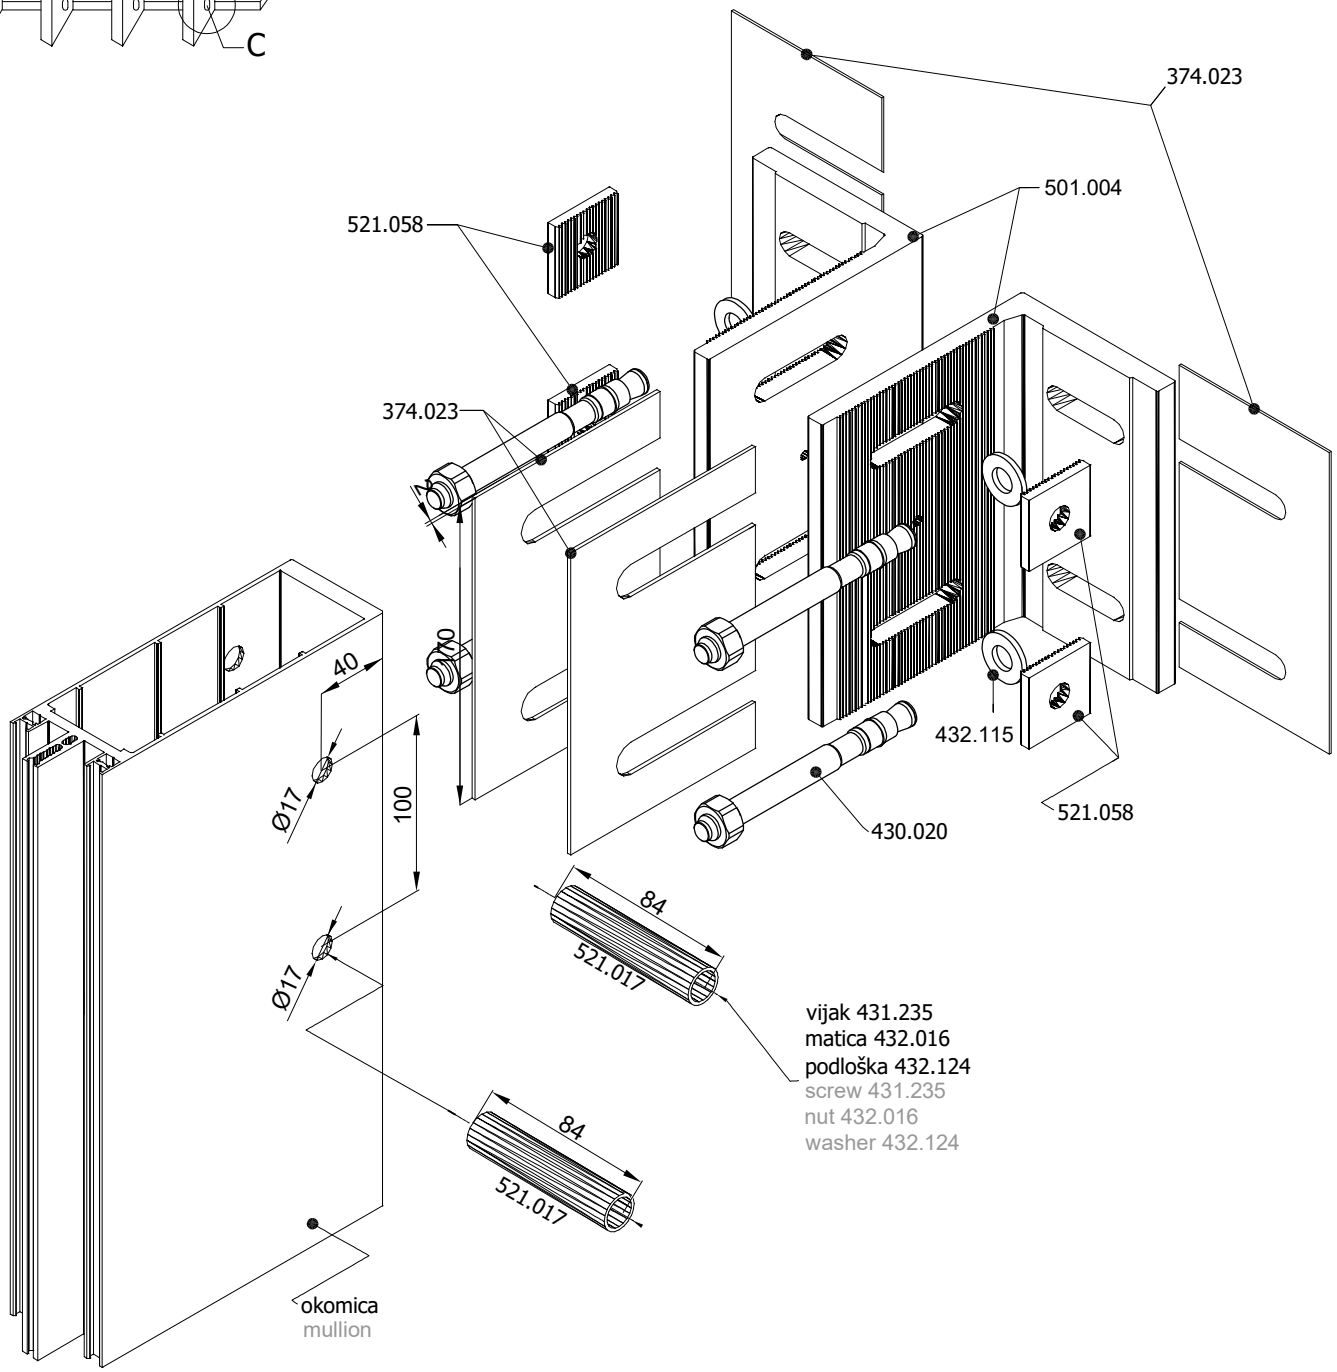

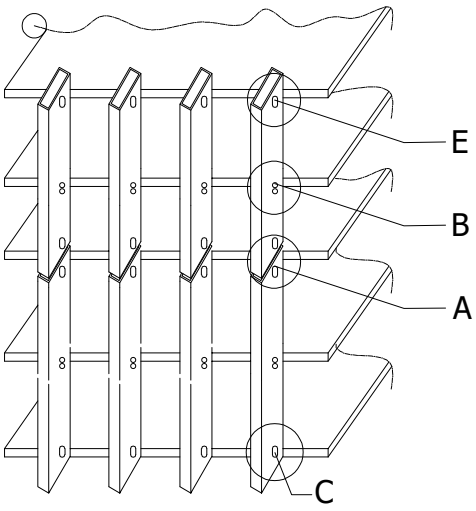


FASADA NA TRI OSLONCA
FACADE WITH THREE SUPPORTS


POKRETNI OSLONAC -E-
MOVEABLE SUPPORT -E-

POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

FIKSNI OSLONAC -B-
FIXED SUPPORT -B-

POKRETNI OSLONAC -A-
MOVEABLE SUPPORT -A-

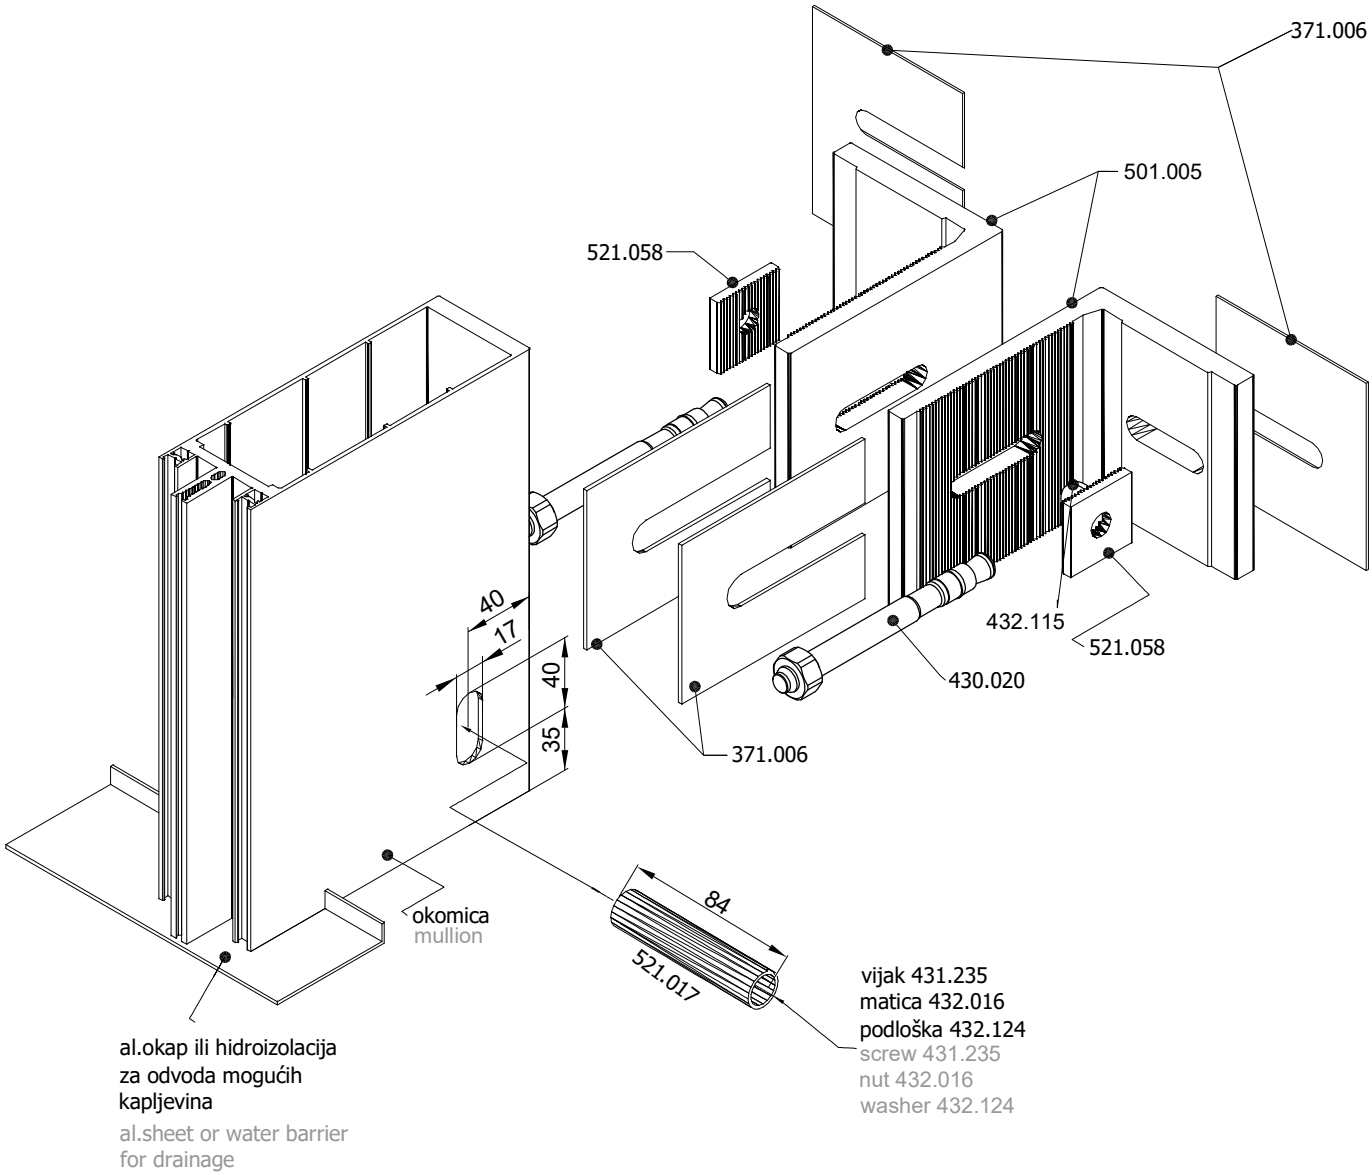

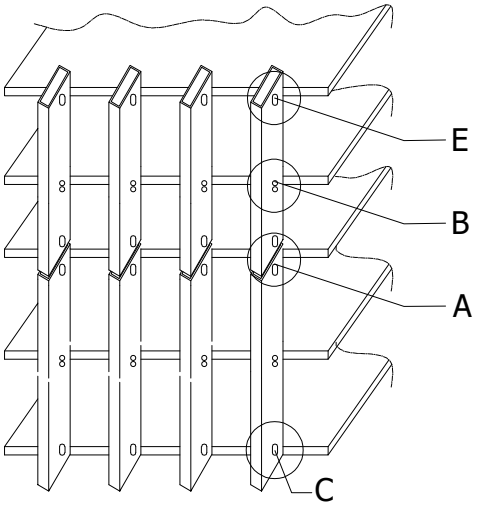


FASADA NA TRI OSLONCA
FACADE WITH THREE SUPPORTS


POKRETNI OSLONAC -E-
MOVEABLE SUPPORT -E-


POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

FIKSNI OSLONAC -B-
FIXED SUPPORT -B-


POKRETNI OSLONAC -A-
MOVEABLE SUPPORT -A-

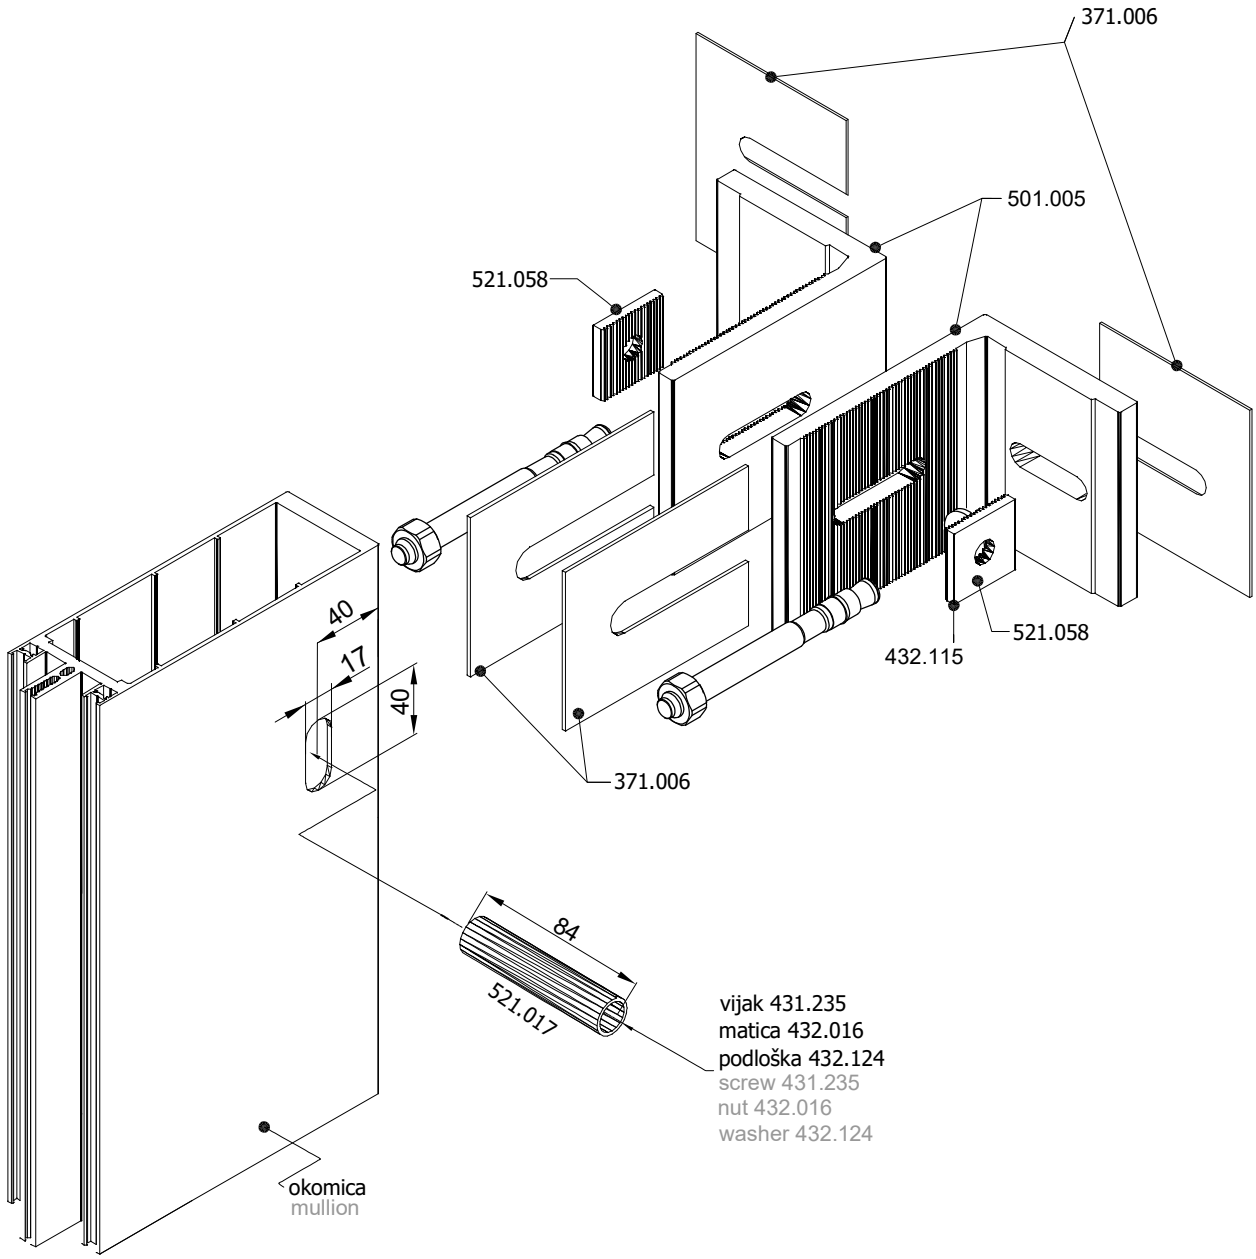


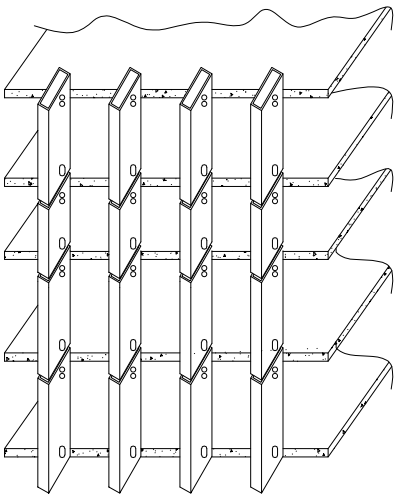


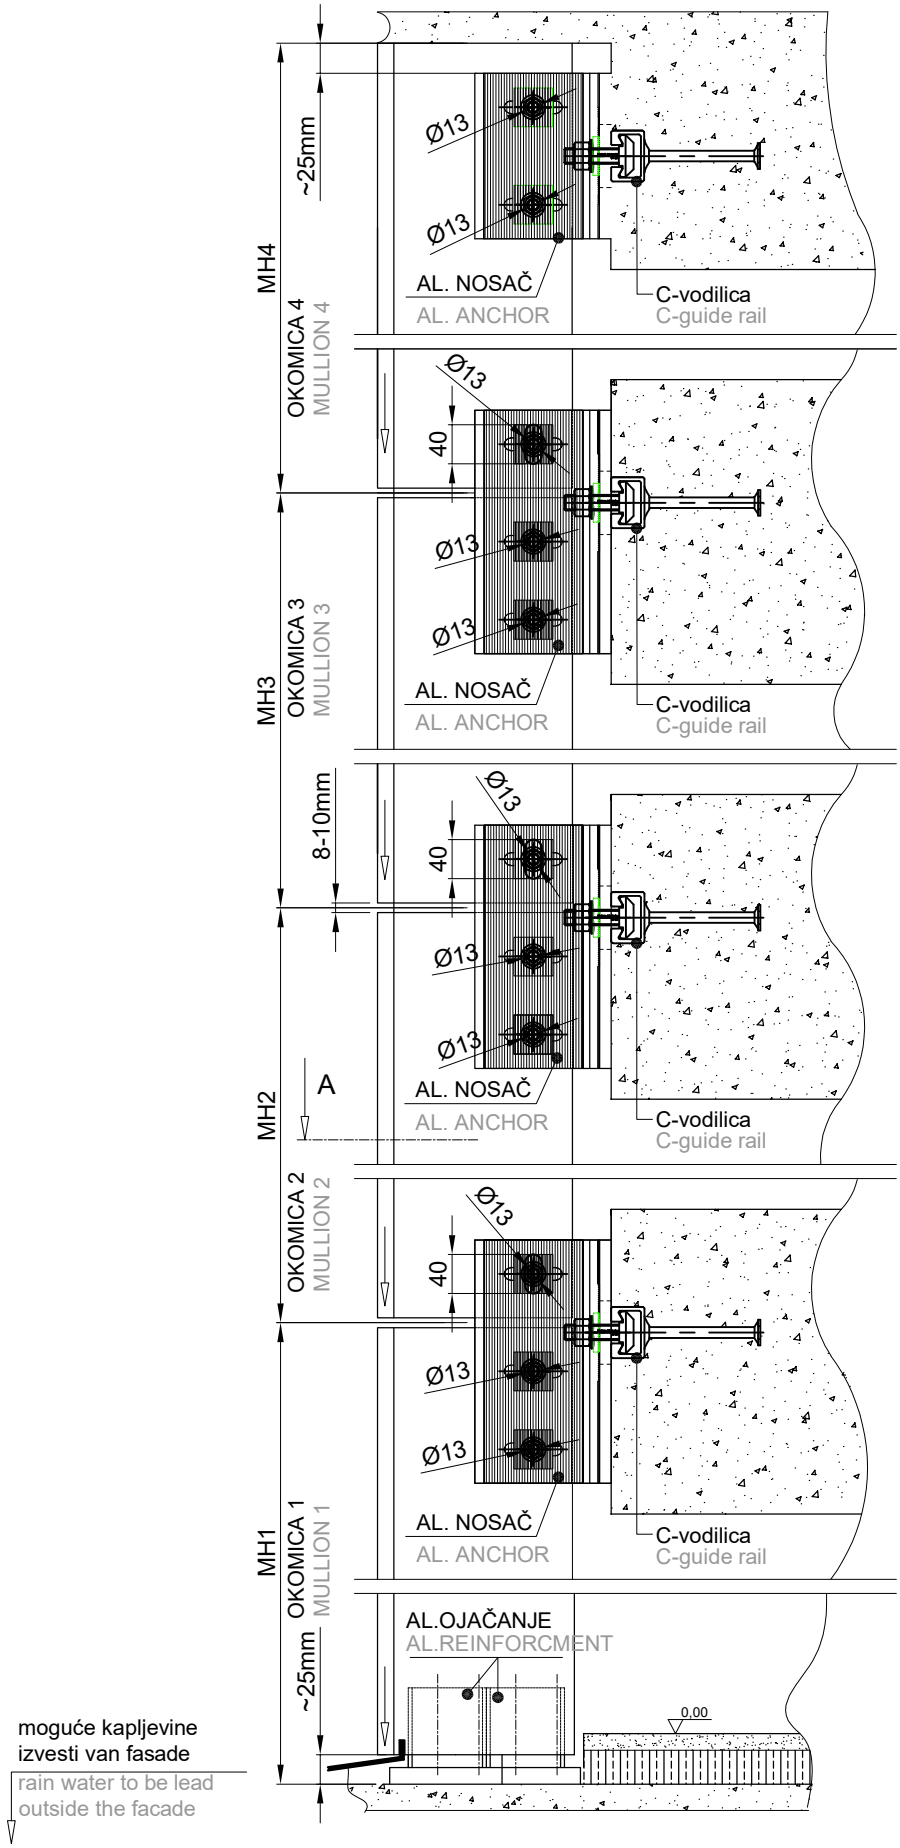
MH4
OKOMICA 4
MULLION 4
~25mm
Ø13
Ø13
AL. NOSAČ
AL. ANCHOR
C-vodilica
C-guide rail
MH3
OKOMICA 3
MULLION 3
40
Ø13
Ø13
Ø13
AL. NOSAČ
AL. ANCHOR
C-vodilica
C-guide rail
8-10mm
MH2
A
OKOMICA 2
MULLION 2
40
Ø13
Ø13
Ø13
AL. NOSAČ
AL. ANCHOR
C-vodilica
C-guide rail
MH1
OKOMICA 1
MULLION 1
40
Ø13
Ø13
Ø13
AL. NOSAČ
AL. ANCHOR
C-vodilica
C-guide rail
~25mm
AL.OJAČANJE
AL.REINFORCMENT
0,00
moguće kapljevine
izvesti van fasade
rain water to be lead
outside the facade

PRESJEK A-A
CROSS SECTION A-A

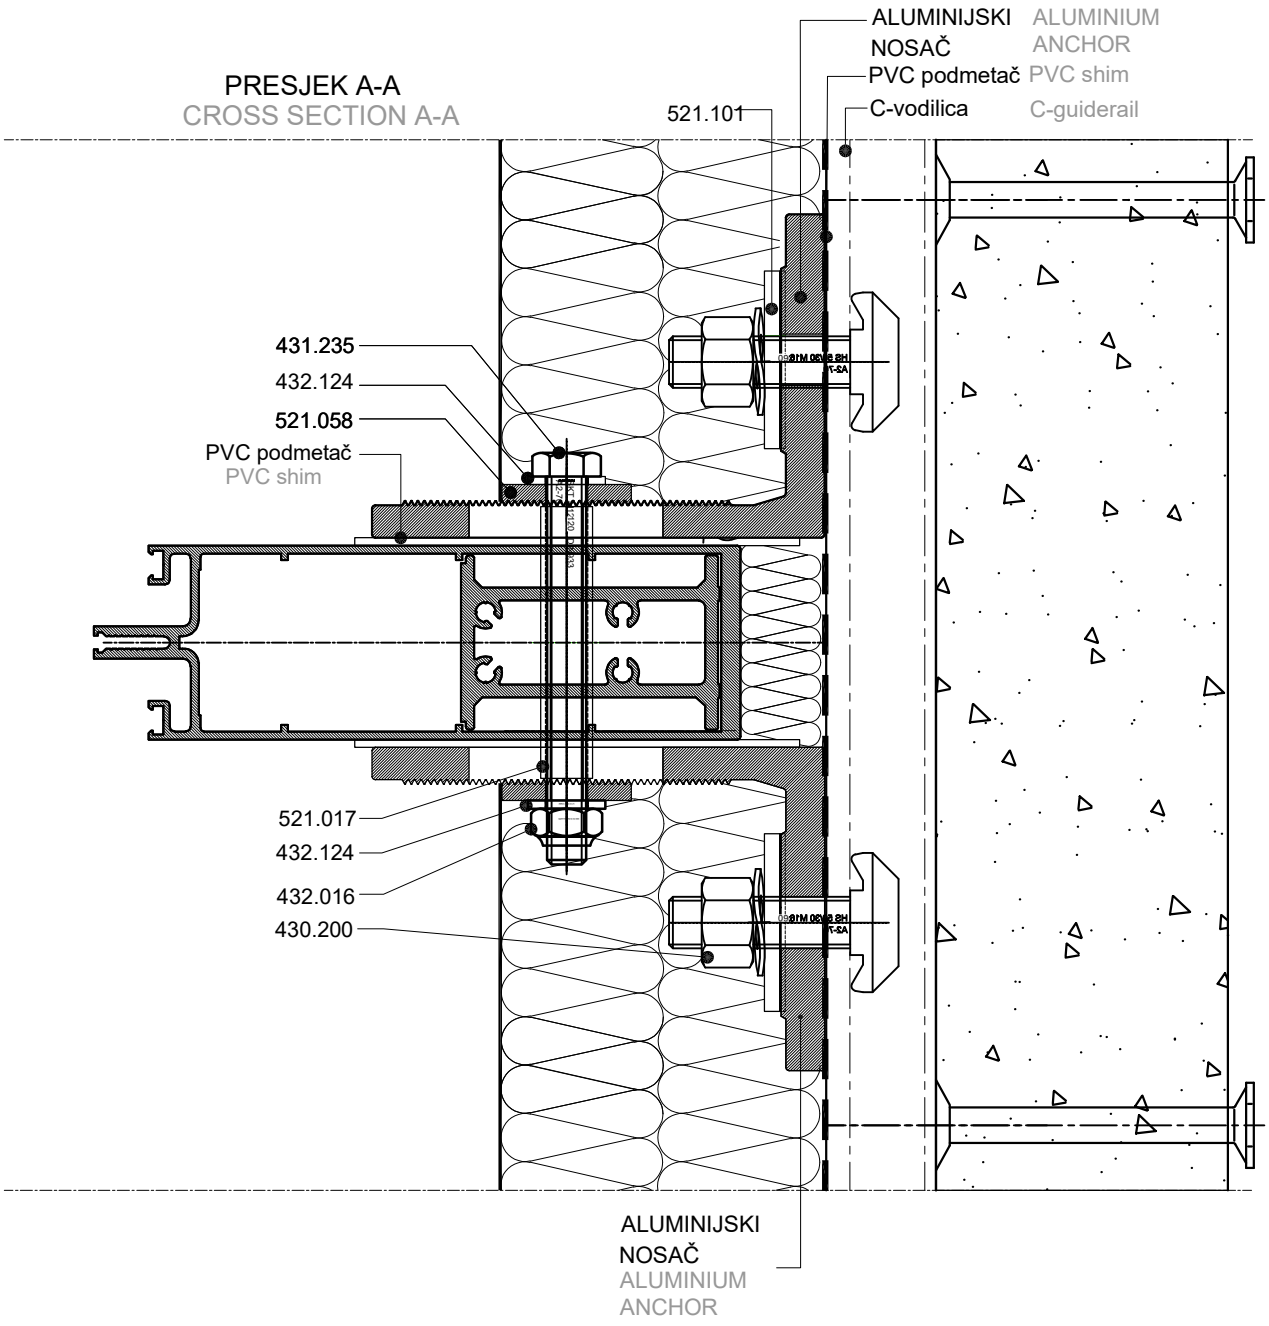

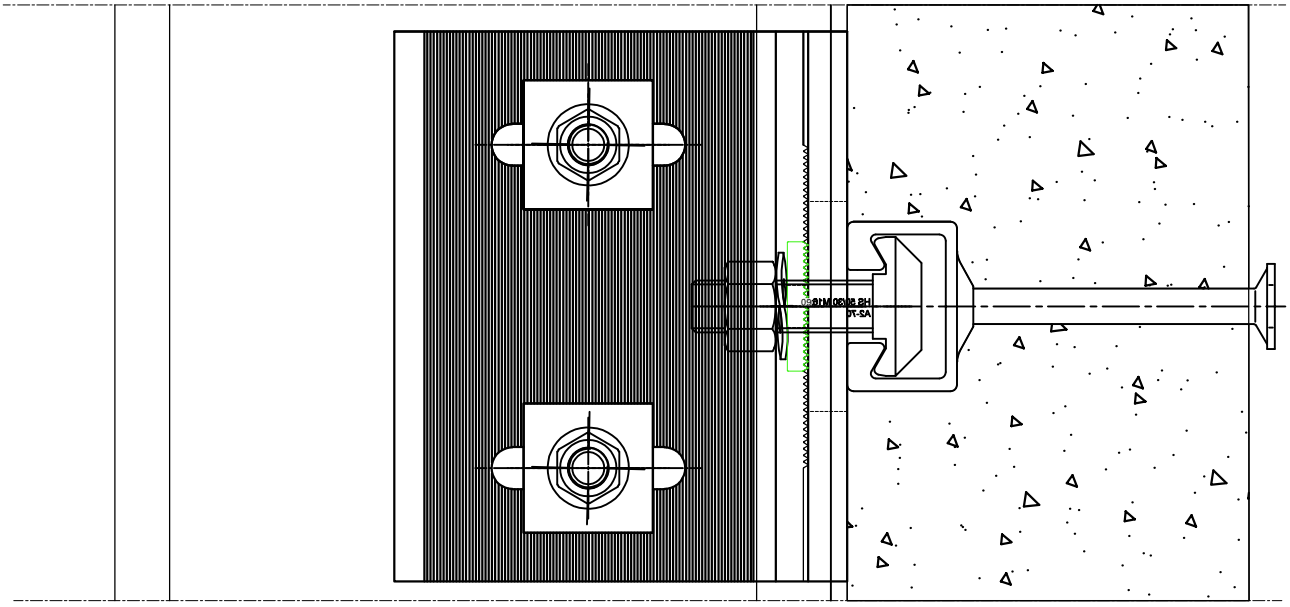

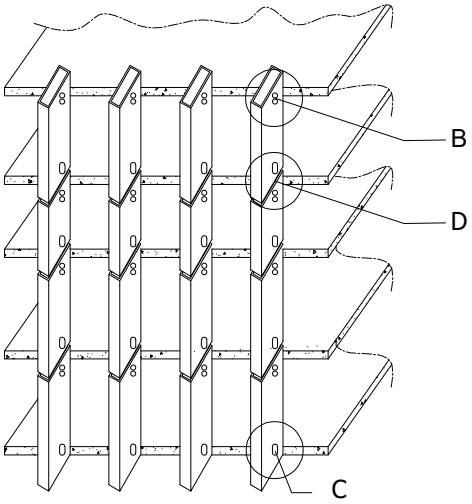



FASADA NA DVA OSLONCA
FACADE WI TH TWO SUPPORTS

FIKSNI OSLONAC -B-
FIXED SUPPORT -B-

POKRETNI I FIKSNI OSLONAC -D-
MOVEABLE AND FIXED SUPPORT -D-

POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

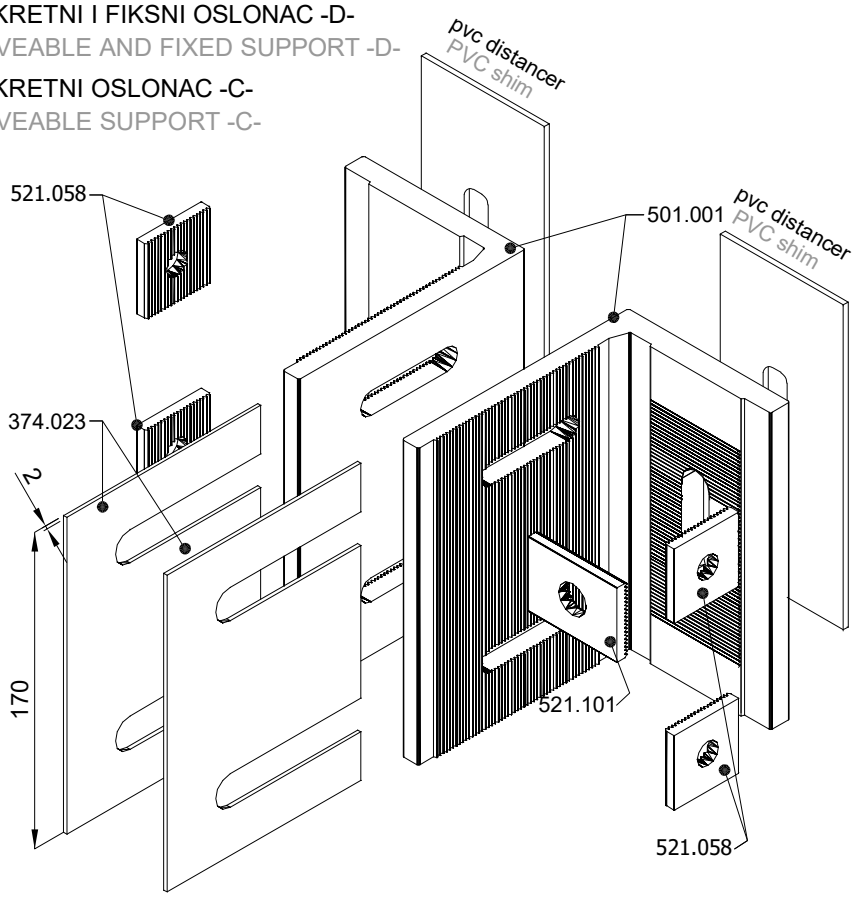

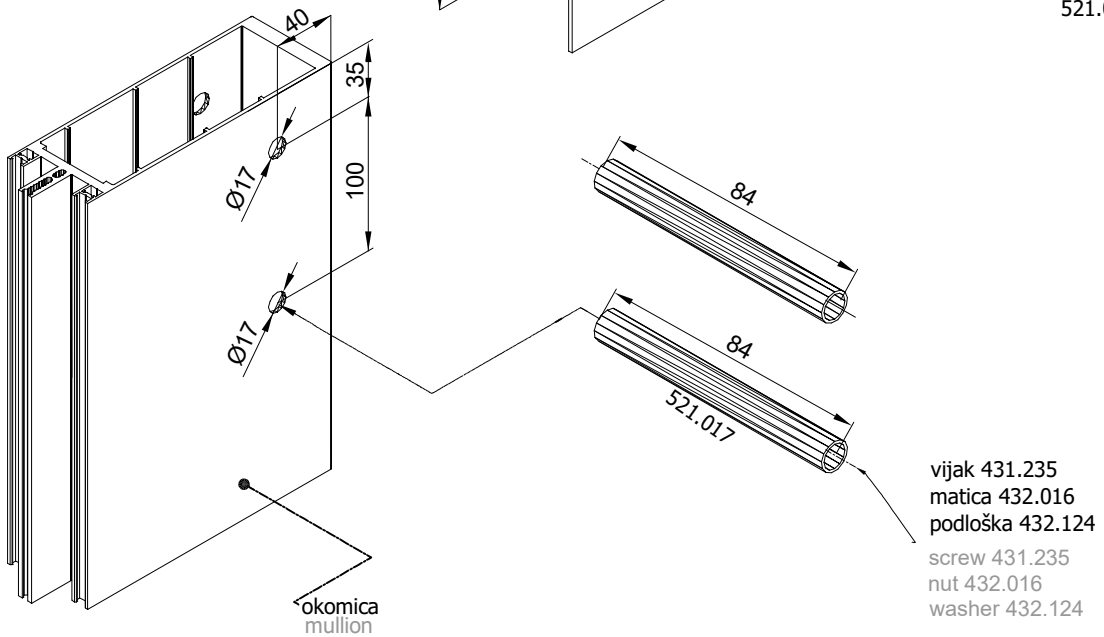


vijak 431.235
matica 432.016
podloška 432.124
screw 431.235
nut 432.016
washer 432.124


FASADA NA DVA OSLONCA
FACADE WI TH TWO SUPPORTS


FIKSNI OSLONAC -B-
FIXED SUPPORT -B-


POKRETNI I FIKSNI OSLONAC -D-
MOVEABLE AND FIXED SUPPORT -D-

POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

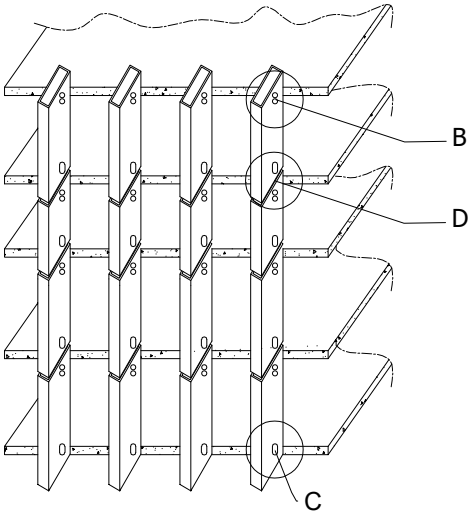

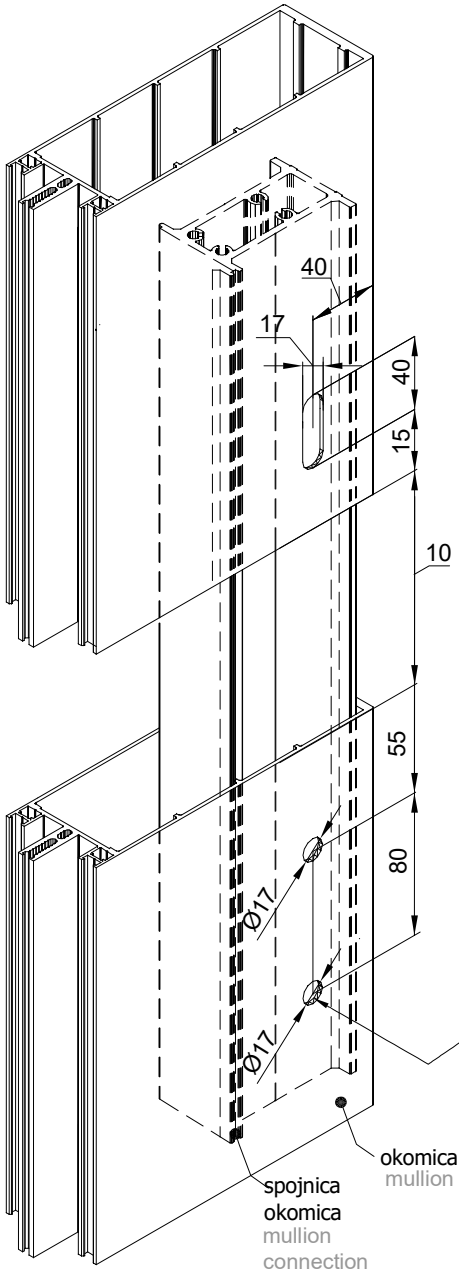

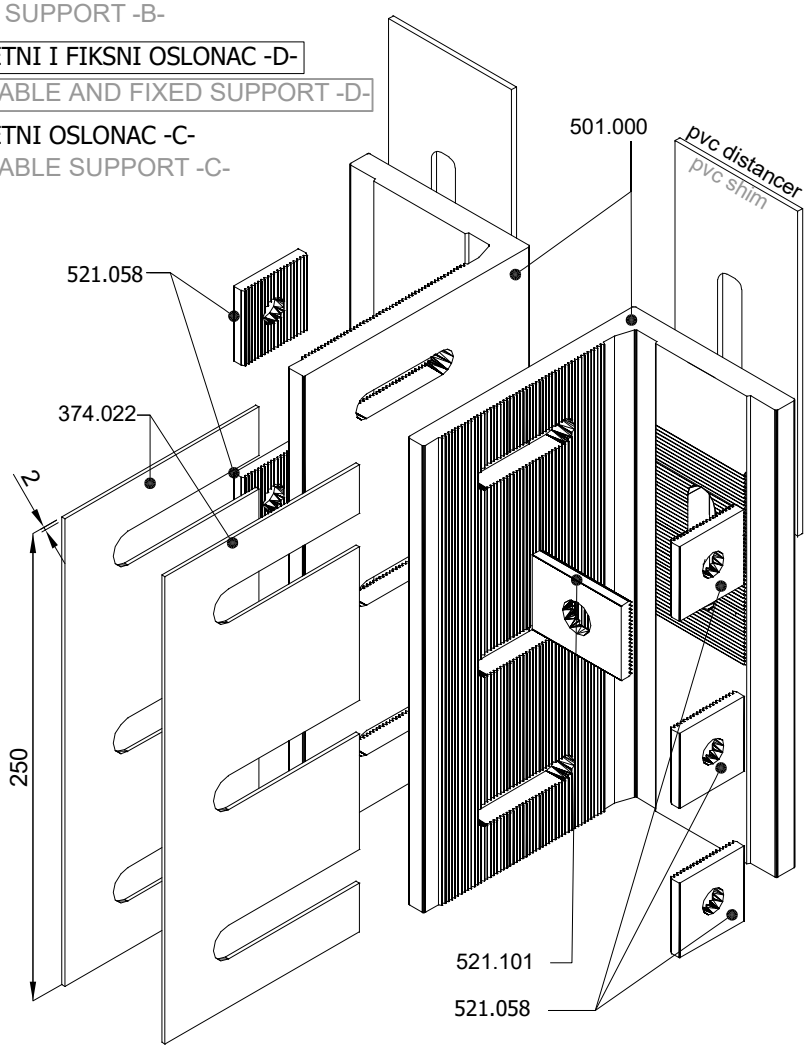

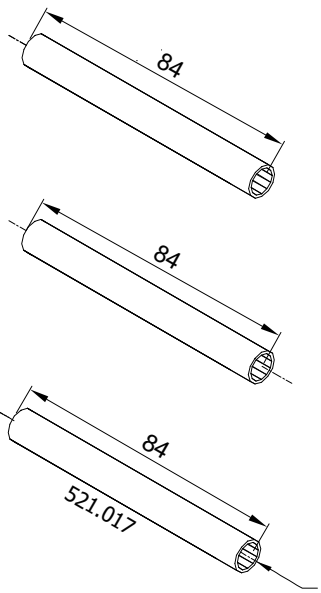


vijak 431.235
matica 432.016
podloška 432.124
screw 431.235
nut 432.016
washer 432.124


FASADA NA DVA OSLONCA
FACADE WI TH TWO SUPPORTS


FIKSNI OSLONAC -B-
FIXED SUPPORT -B-


POKRETNI I FIKSNI OSLONAC -D-
MOVEABLE AND FIXED SUPPORT -D-


POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

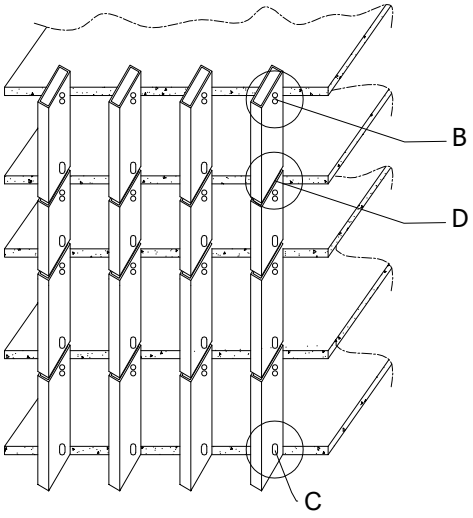

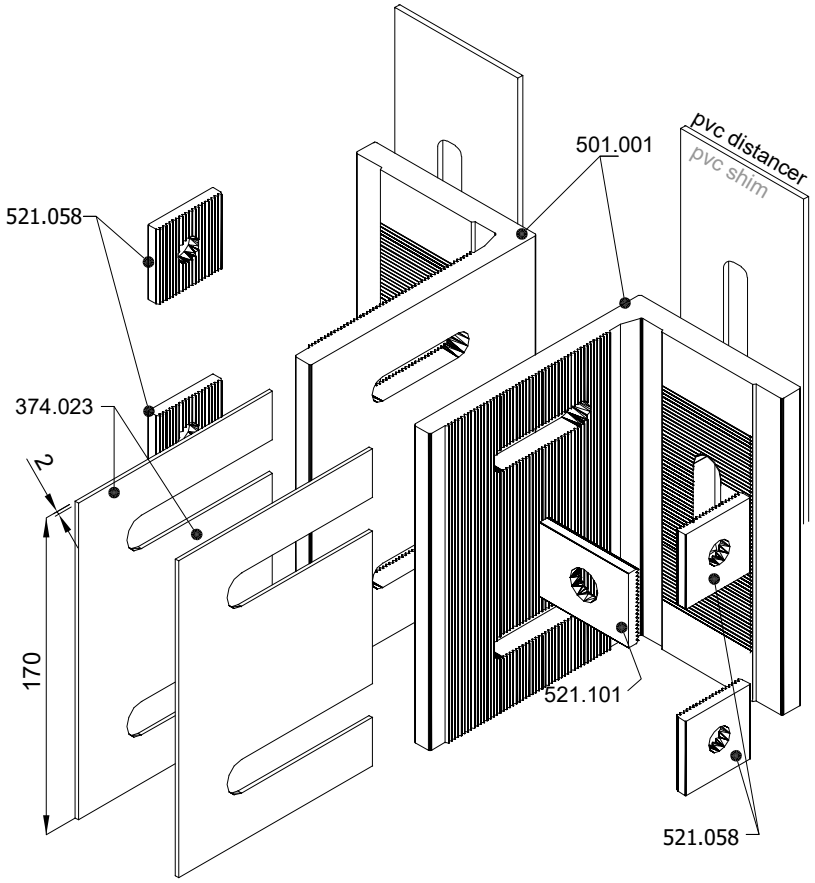

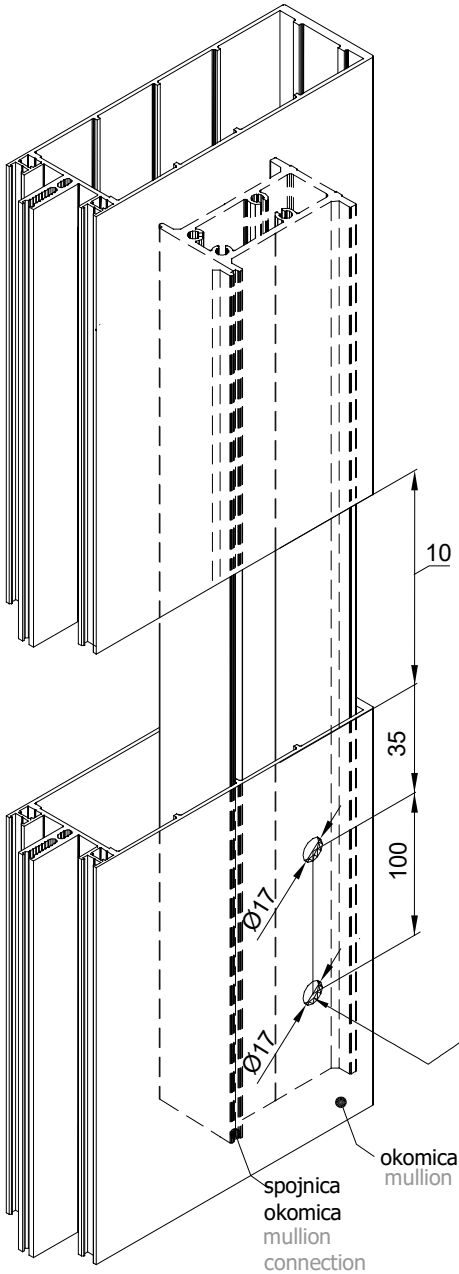








vijak 431.235
matica 432.016
podloška 432.124
screw 431.235
nut 432.016
washer 432.124

FASADA NA TRI OSLONCA
FACADE WI TH THREE SUPPORTS

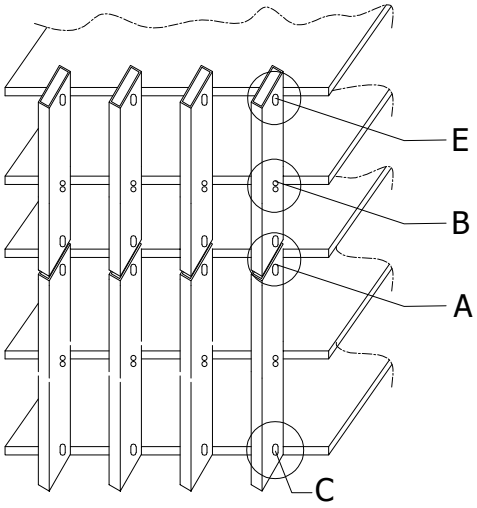


POKRETNI OSLONAC -E-
MOVEABLE SUPPORT -E-
POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-
FIKSNI OSLONAC -B-
FIXED SUPPORT -B-
POKRETNI OSLONAC -A-
MOVEABLE SUPPORT -A-

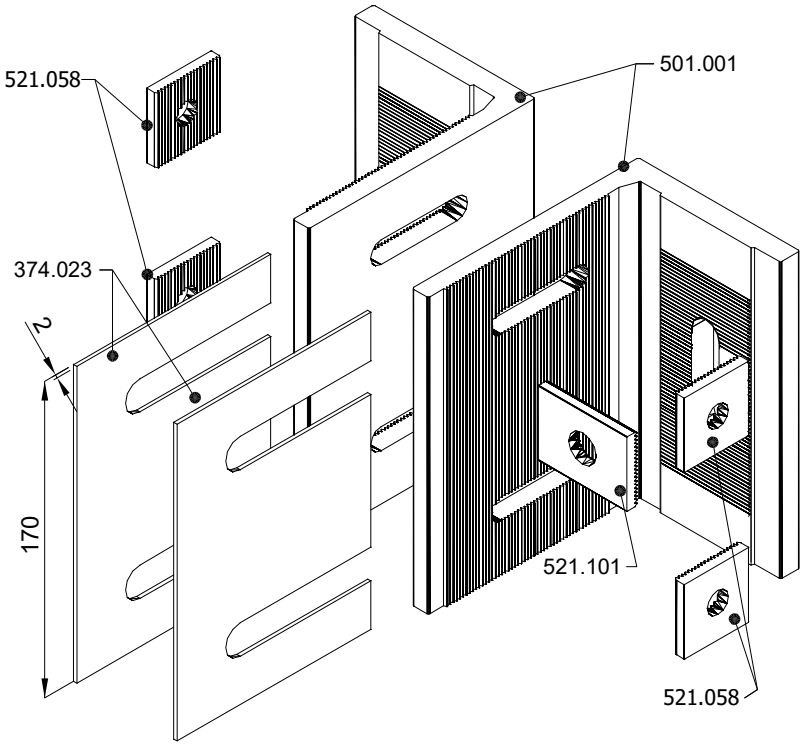

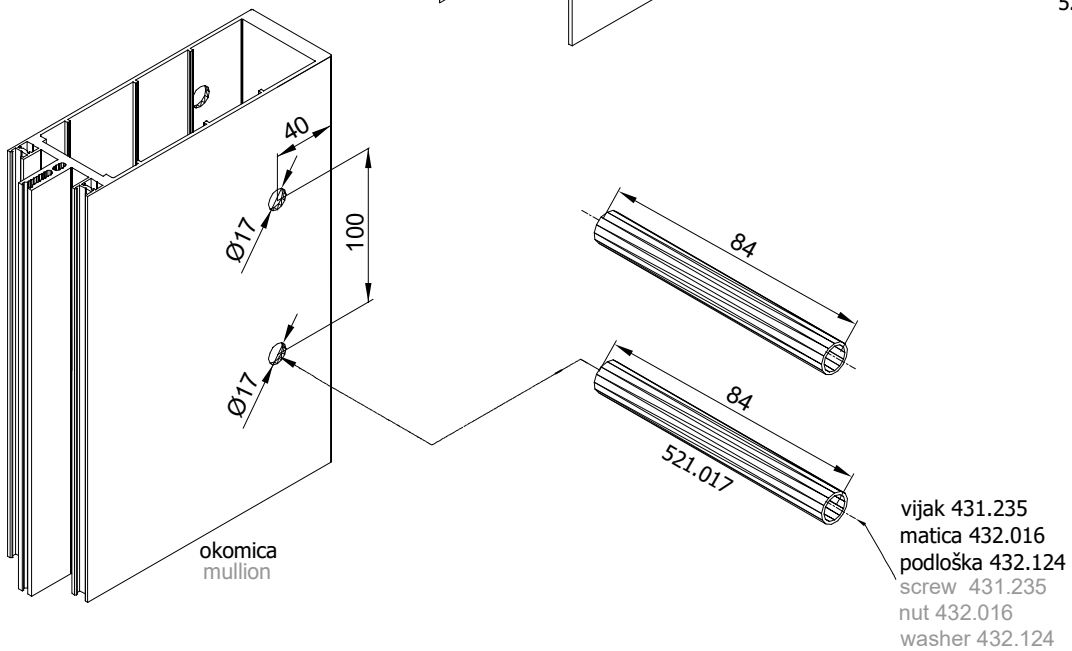

vijak 431.235
matica 432.016
podloška 432.124
screw 431.235
nut 432.016
washer 432.124

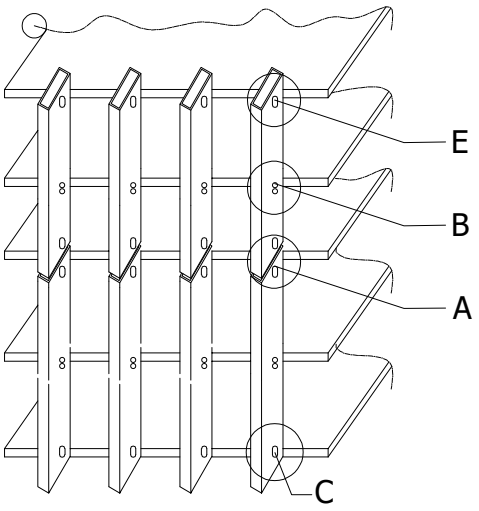


FASADA NA TRI OSLONCA
FACADE WI TH THREE SUPPORTS


POKRETNI OSLONAC -E-
MOVEABLE SUPPORT -E-

POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

FIKSNI OSLONAC -B-
FIXED SUPPORT -B-

POKRETNI OSLONAC -A-
MOVEABLE SUPPORT -A-

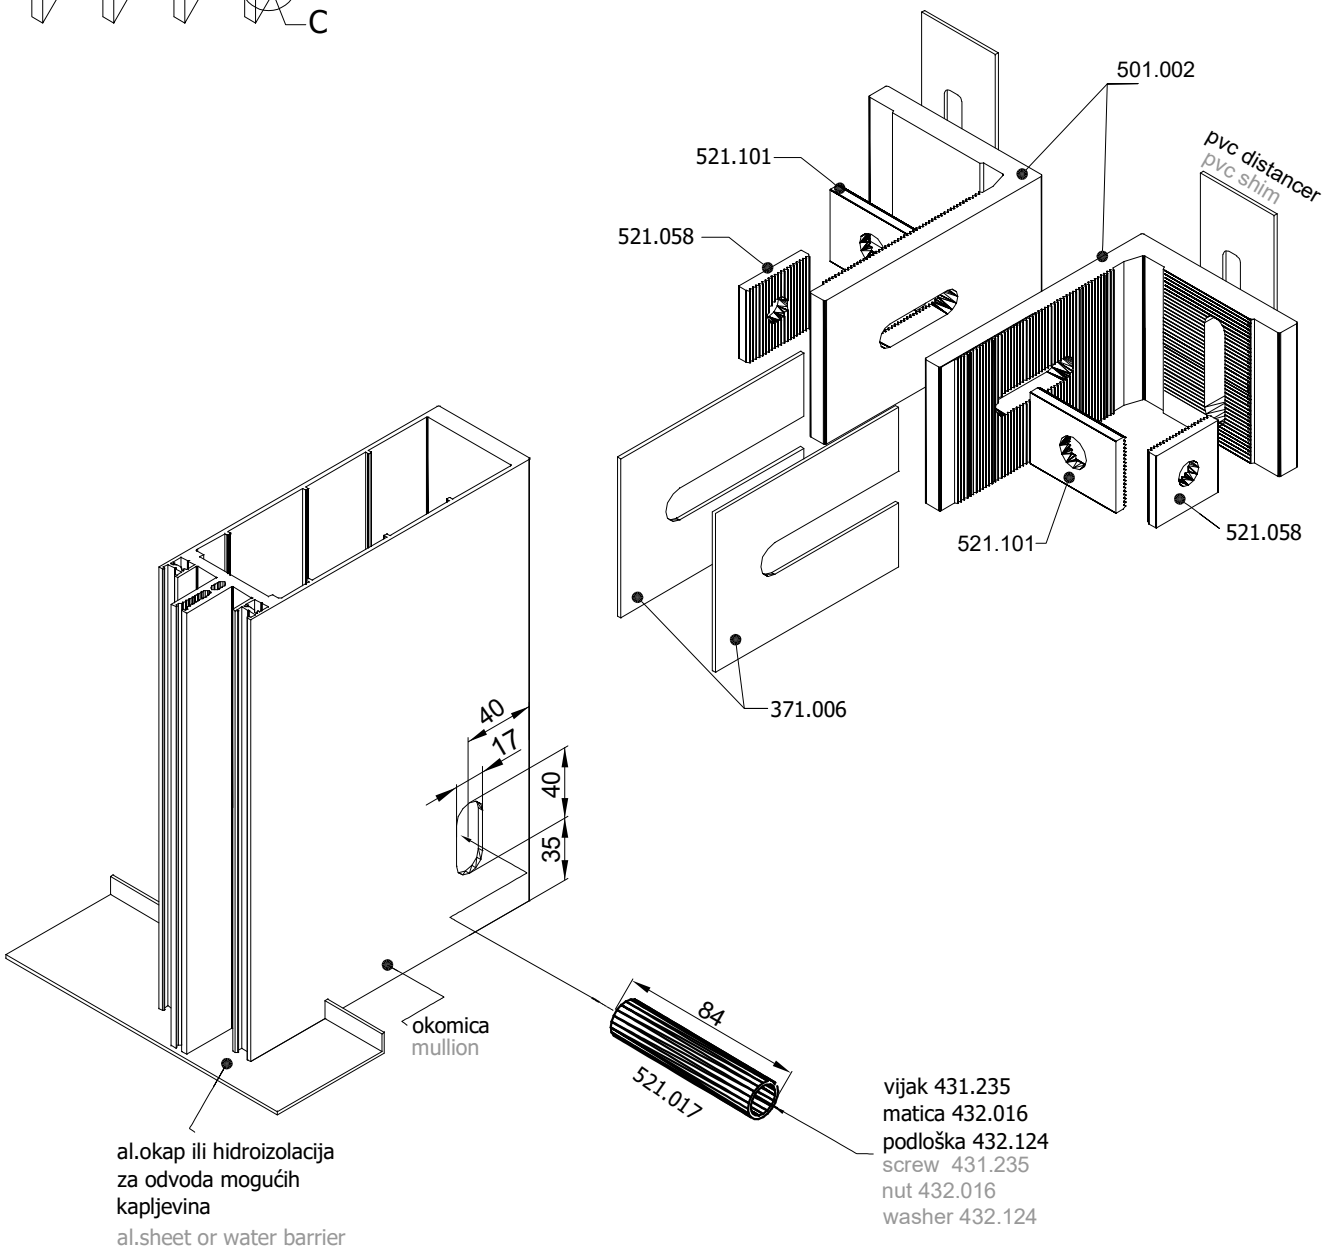

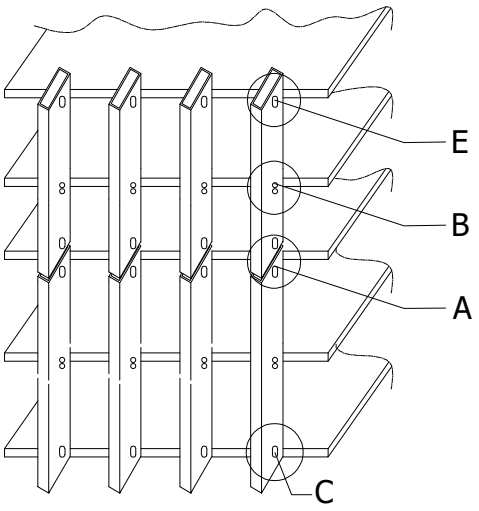


FASADA NA TRI OSLONCA
FACADE WI TH THREE SUPPORTS

POKRETNI OSLONAC -E-
MOVEABLE SUPPORT -E-


POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-


FIKSNI OSLONAC -B-
FIXED SUPPORT -B-

POKRETNI OSLONAC -A-
MOVEABLE SUPPORT -A-

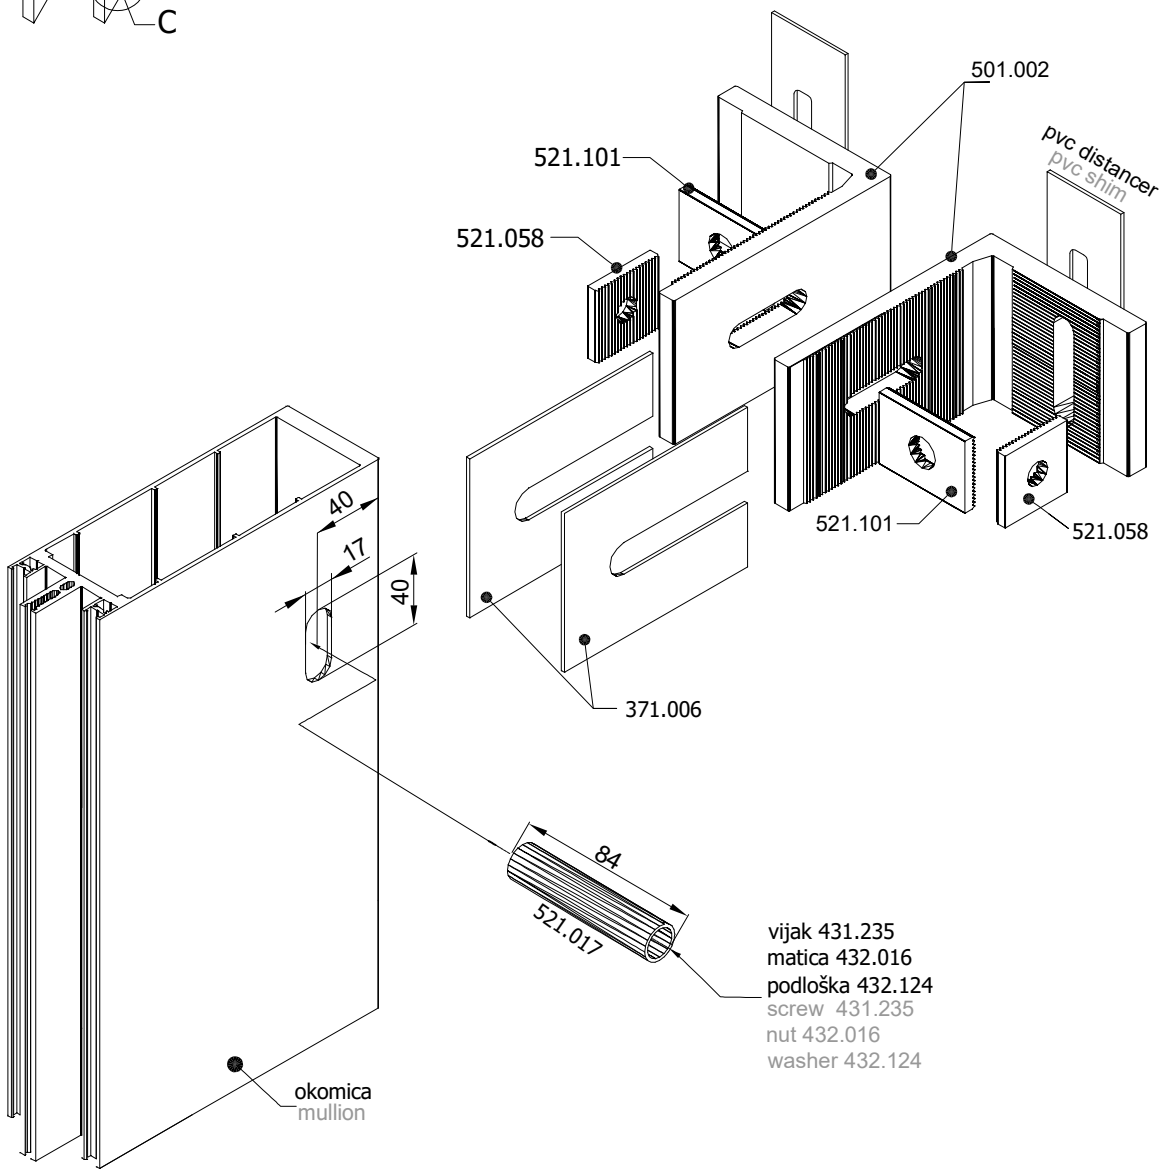

PRESJEK A-A
CROSS SECTION A-A

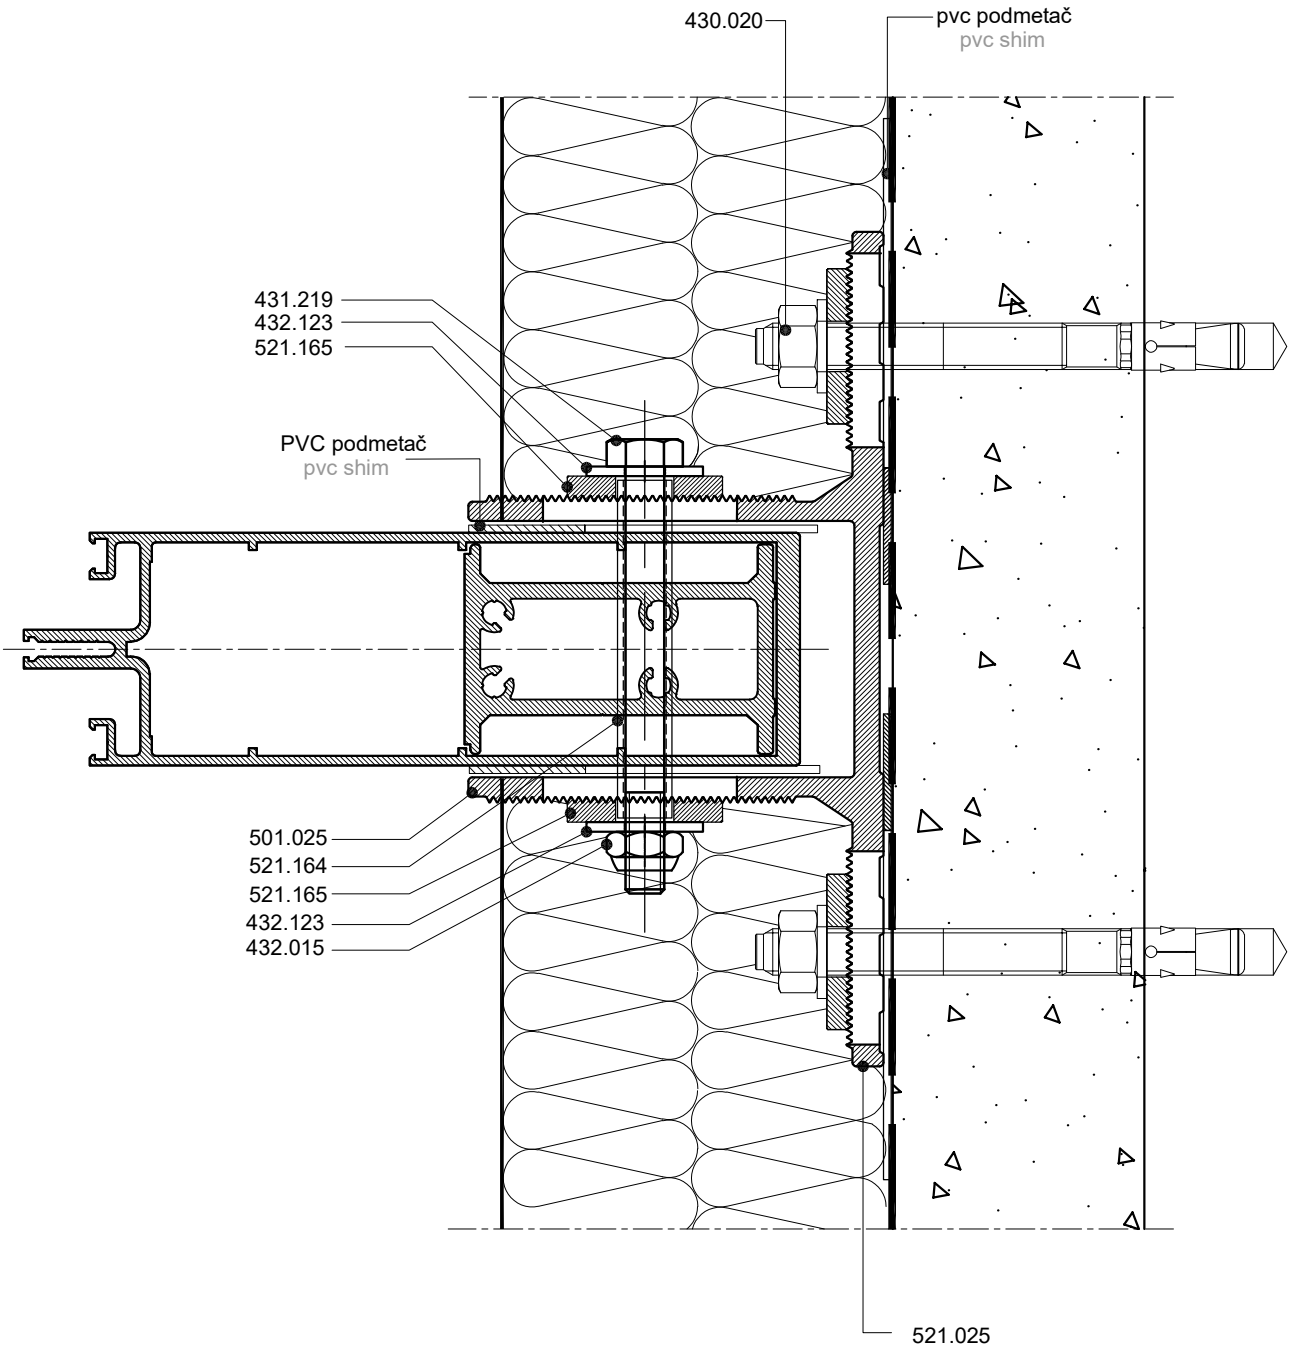

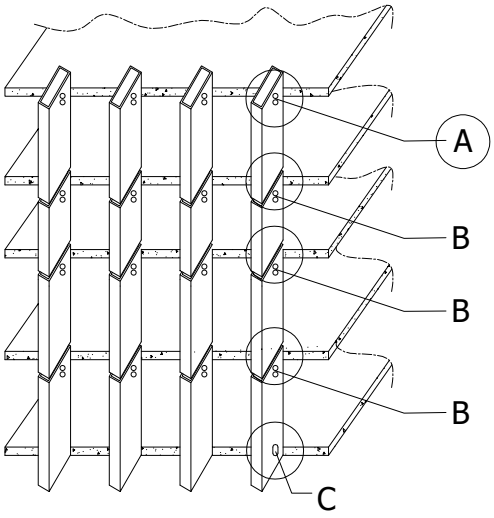



FASADA NA DVA OSLONCA
FACADE WITH TWO SUPPORTS

FIKSNI OSLONAC -A-
FIXED SUPPORT -A-

FIKSNI OSLONAC -B-
FIXED SUPPORT -B-

POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

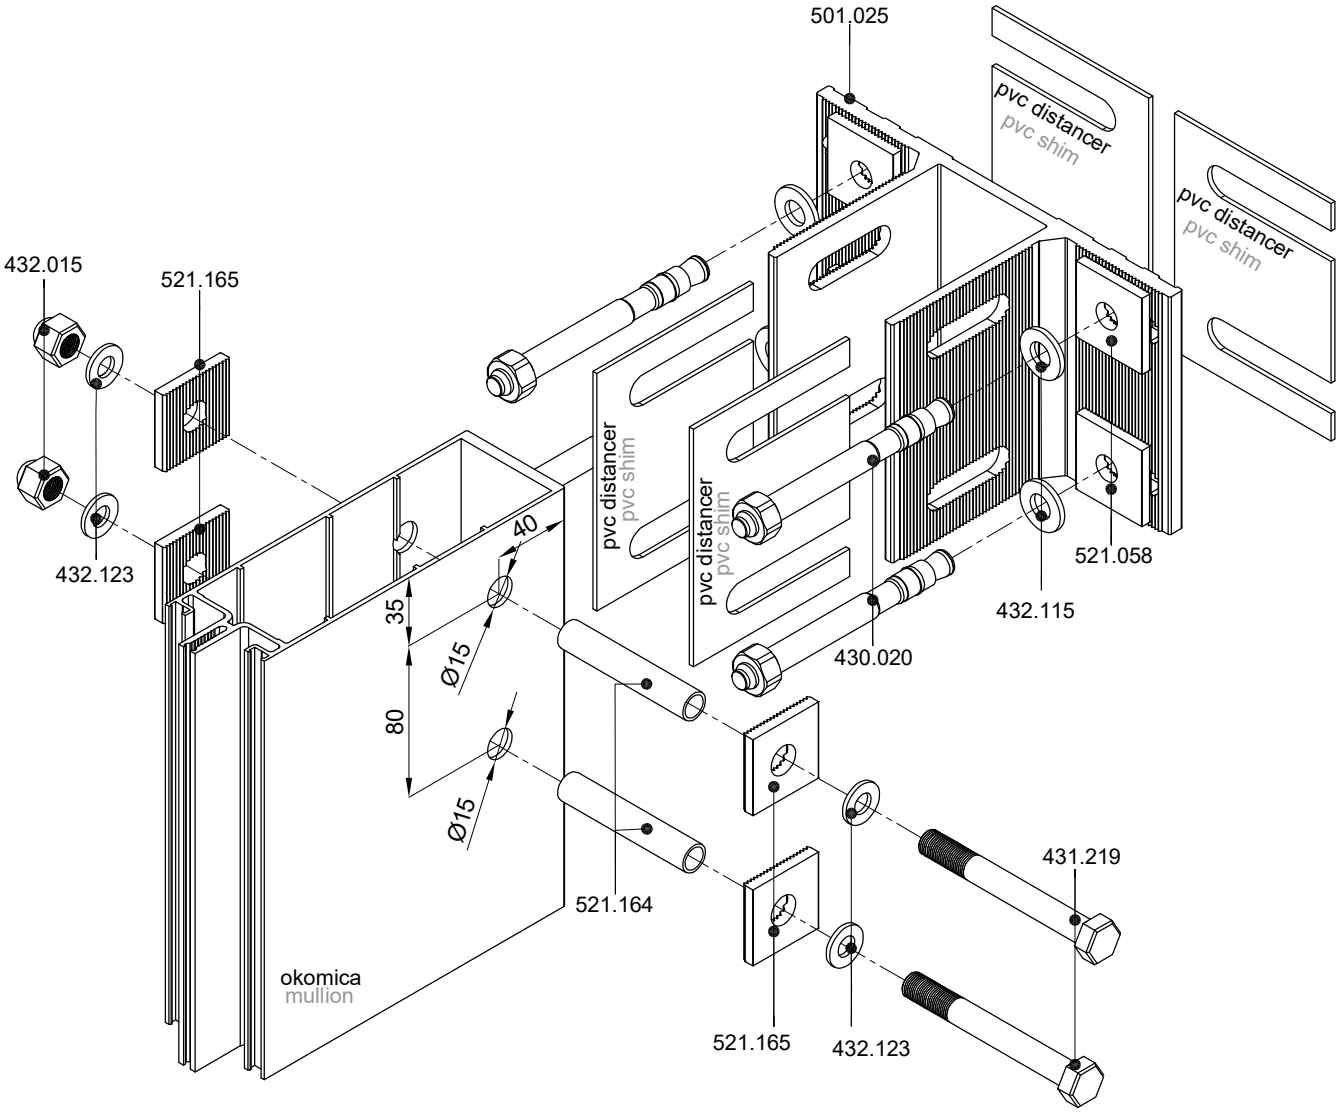

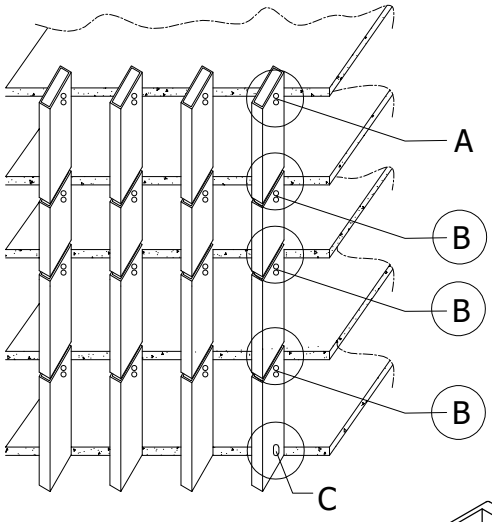



FASADA NA DVA OSLONCA
FACADE WITH TWO SUPPORTS

FIKSNI OSLONAC -A-
FIXED SUPPORT -A-

FIKSNI OSLONAC -B-
FIXED SUPPORT -B-

POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

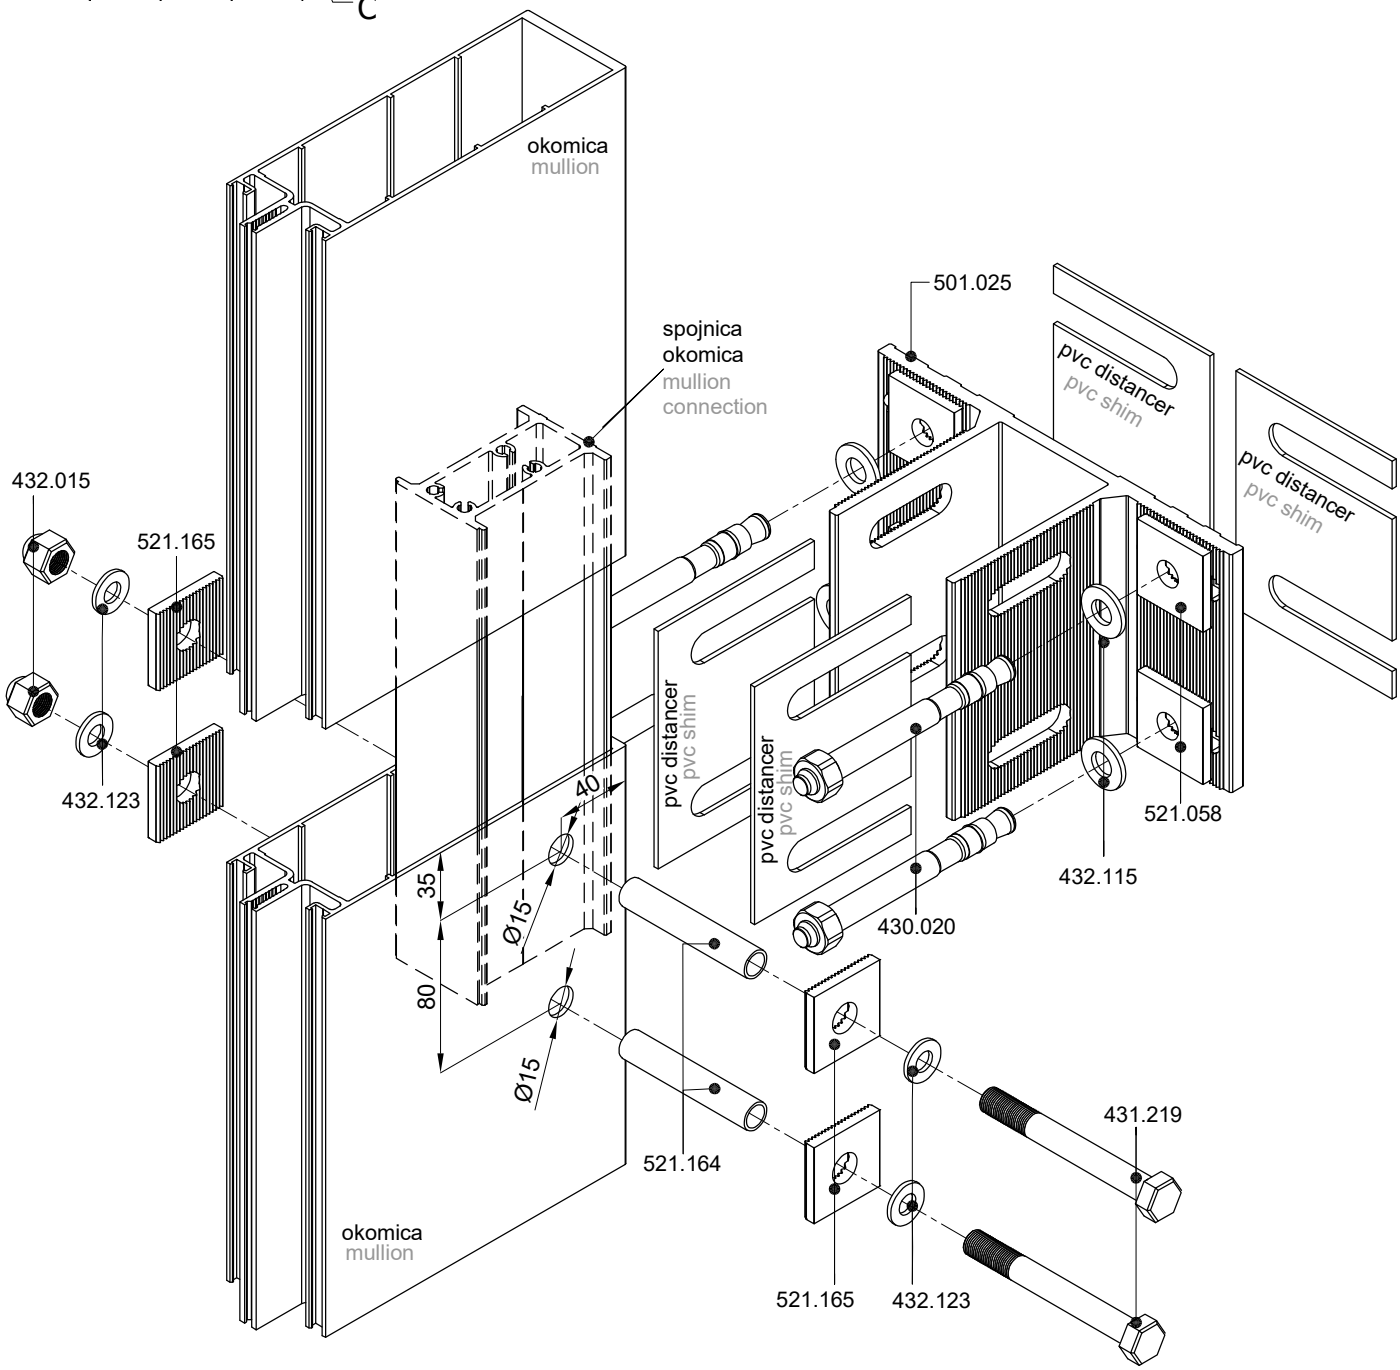

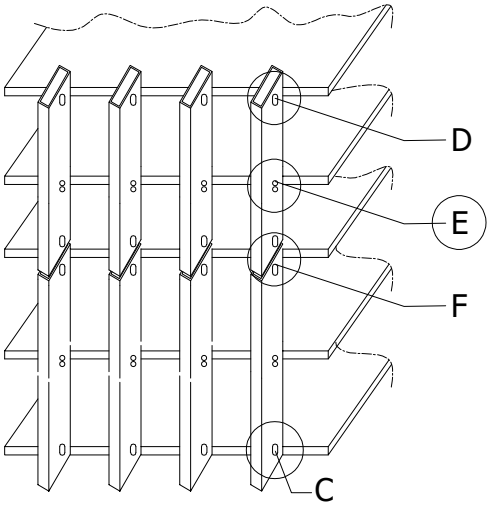

FASADA NA TRI OSLONCA
FACADE WITH THREE SUPPORTS


POKRETNI OSLONAC -D-
MOVEABLE SUPPORT -D-


FIKSNI OSLONAC -E-

FIXED SUPPORT -E-

POKRETNI OSLONAC -F-
MOVEABLE SUPPORT -F-

POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

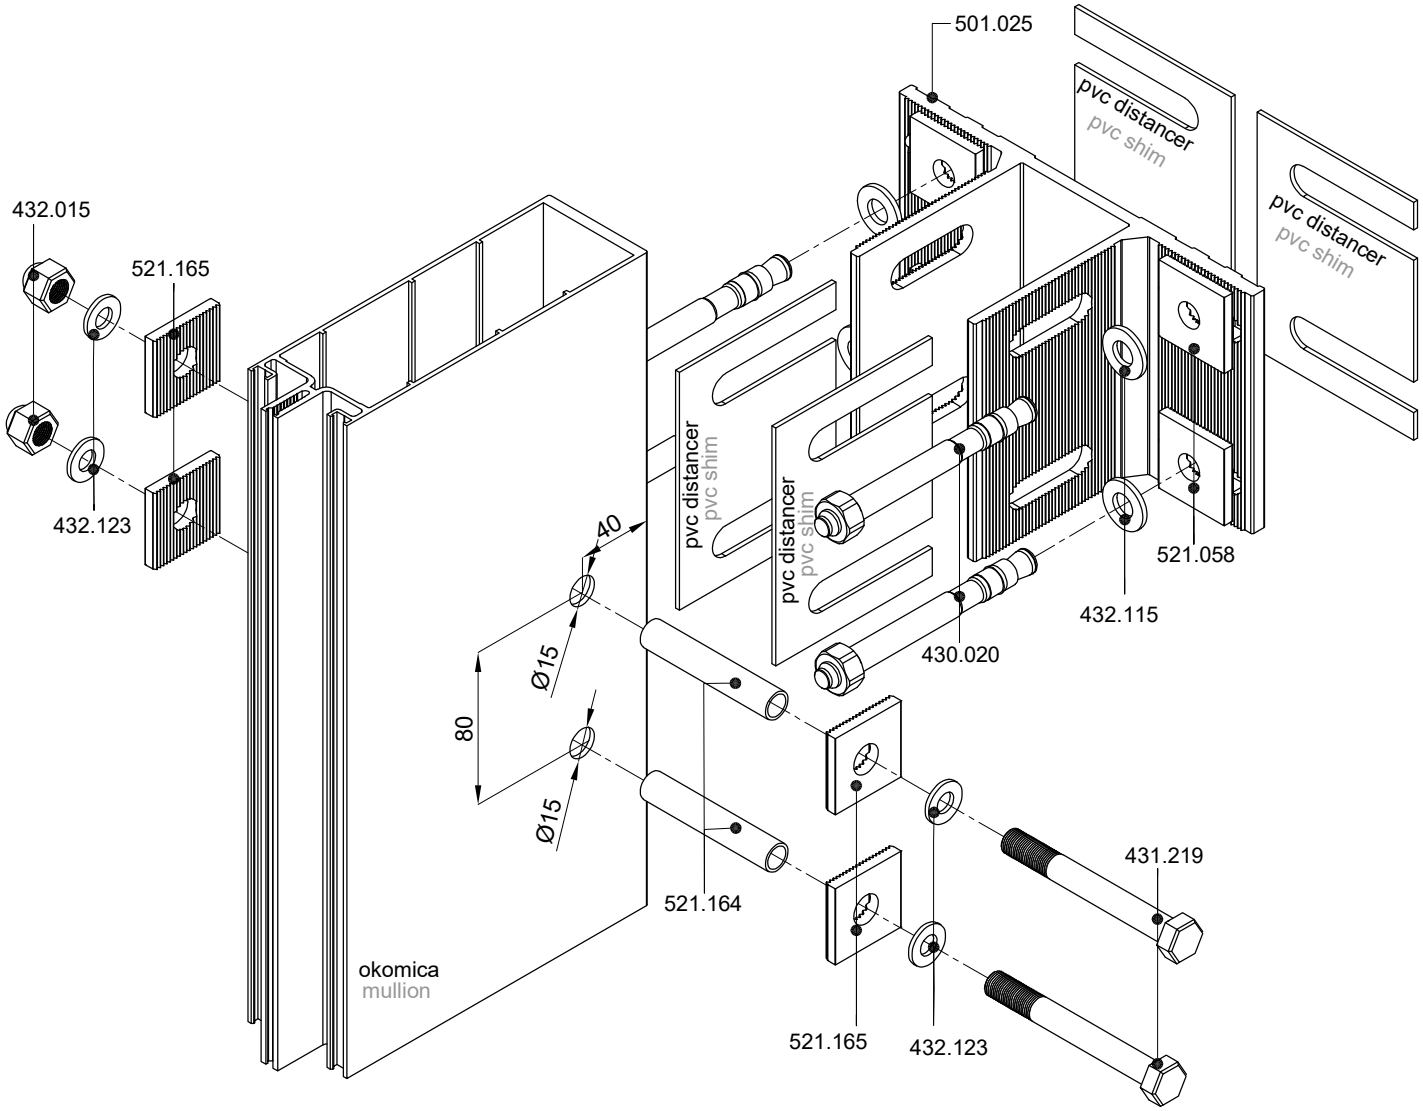

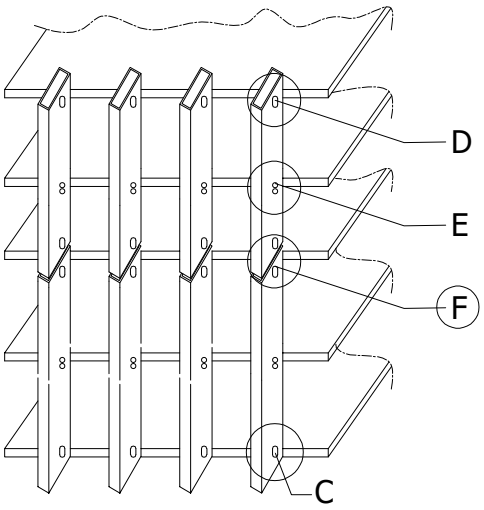


FASADA NA TRI OSLONCA
FACADE WITH THREE SUPPORTS


POKRETNI OSLONAC -D-
MOVEABLE SUPPORT -D-

FIKSNI OSLONAC -E-
FIXED SUPPORT -E-

POKRETNI OSLONAC -F-
MOVEABLE SUPPORT -F-

POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

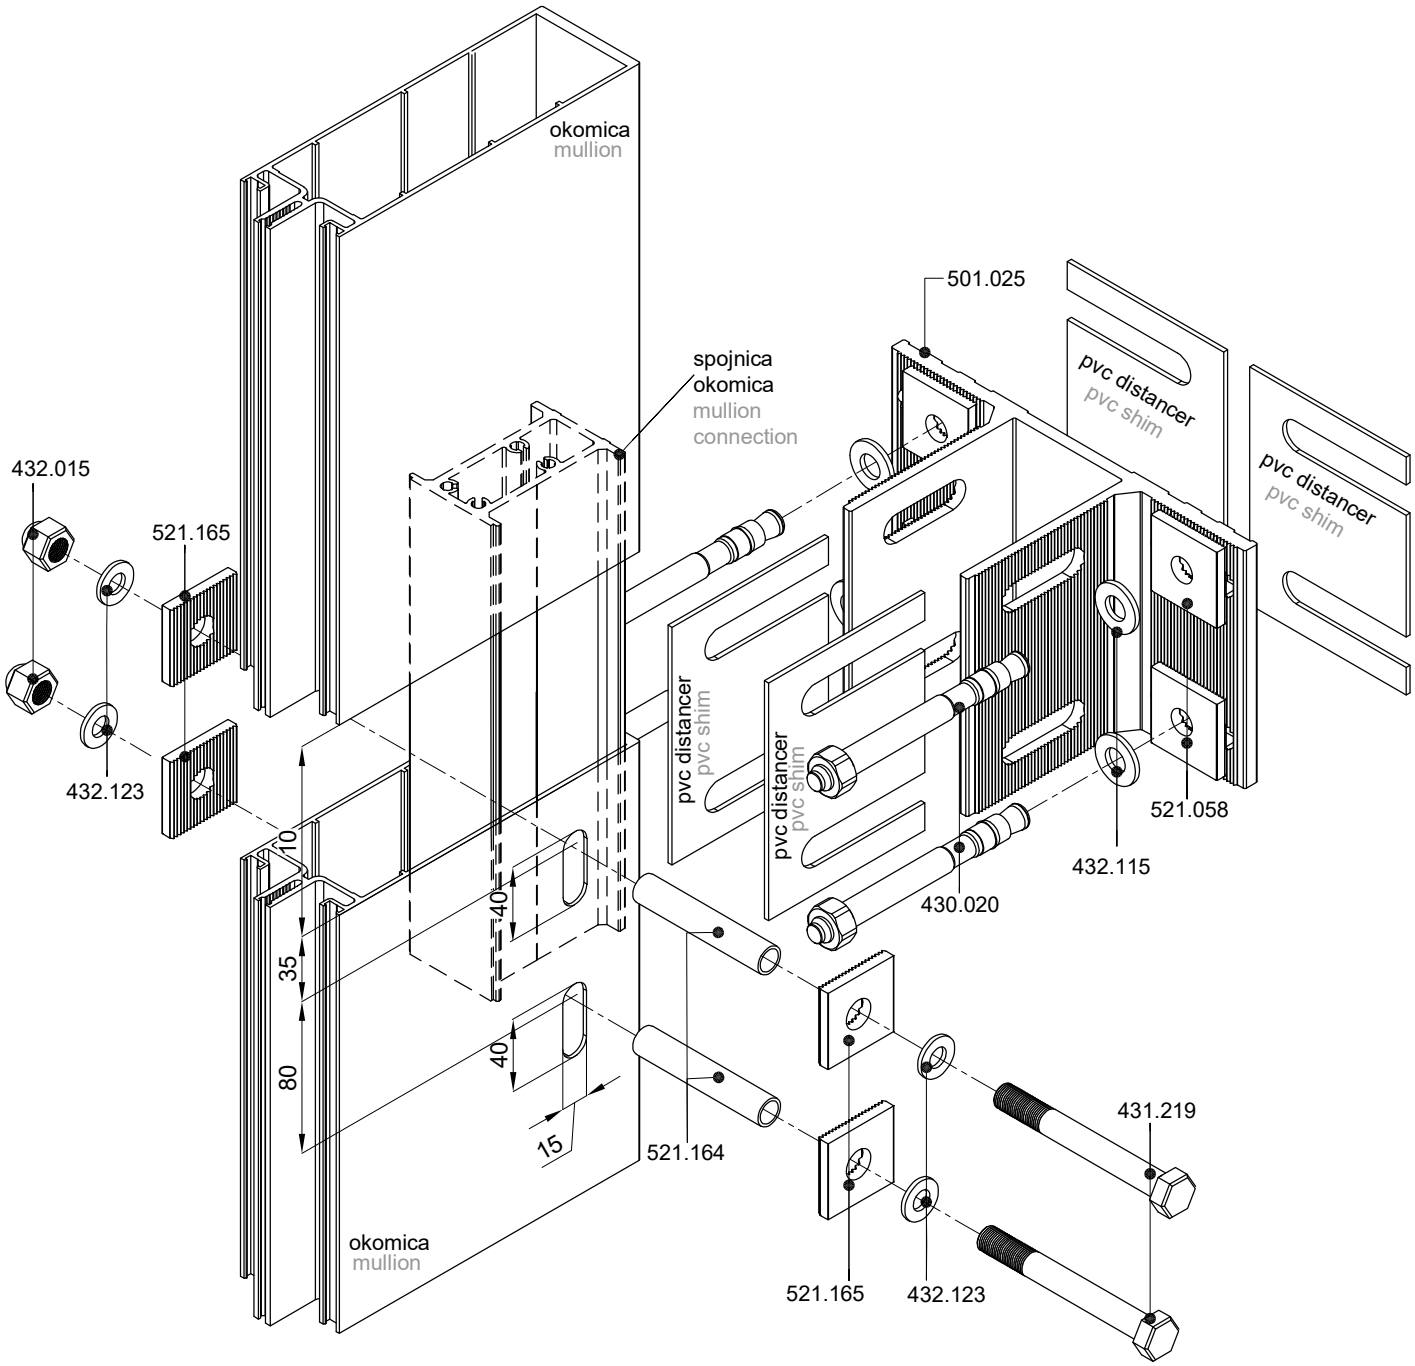

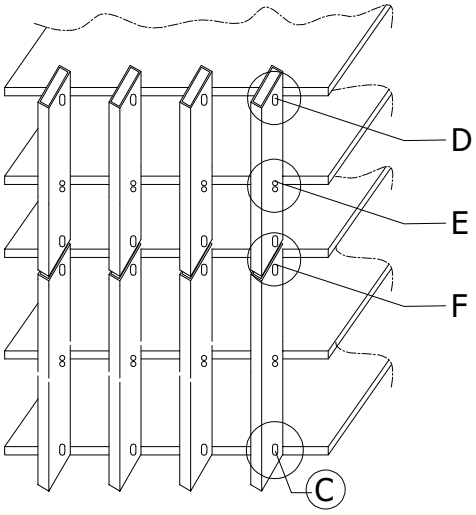


FASADA NA TRI OSLONCA
FACADE WITH THREE SUPPORTS


POKRETNI OSLONAC -D-
MOVEABLE SUPPORT -D-

FIKSNI OSLONAC -E-
FIXED SUPPORT -E-

POKRETNI OSLONAC -F-
MOVEABLE SUPPORT -F-


POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

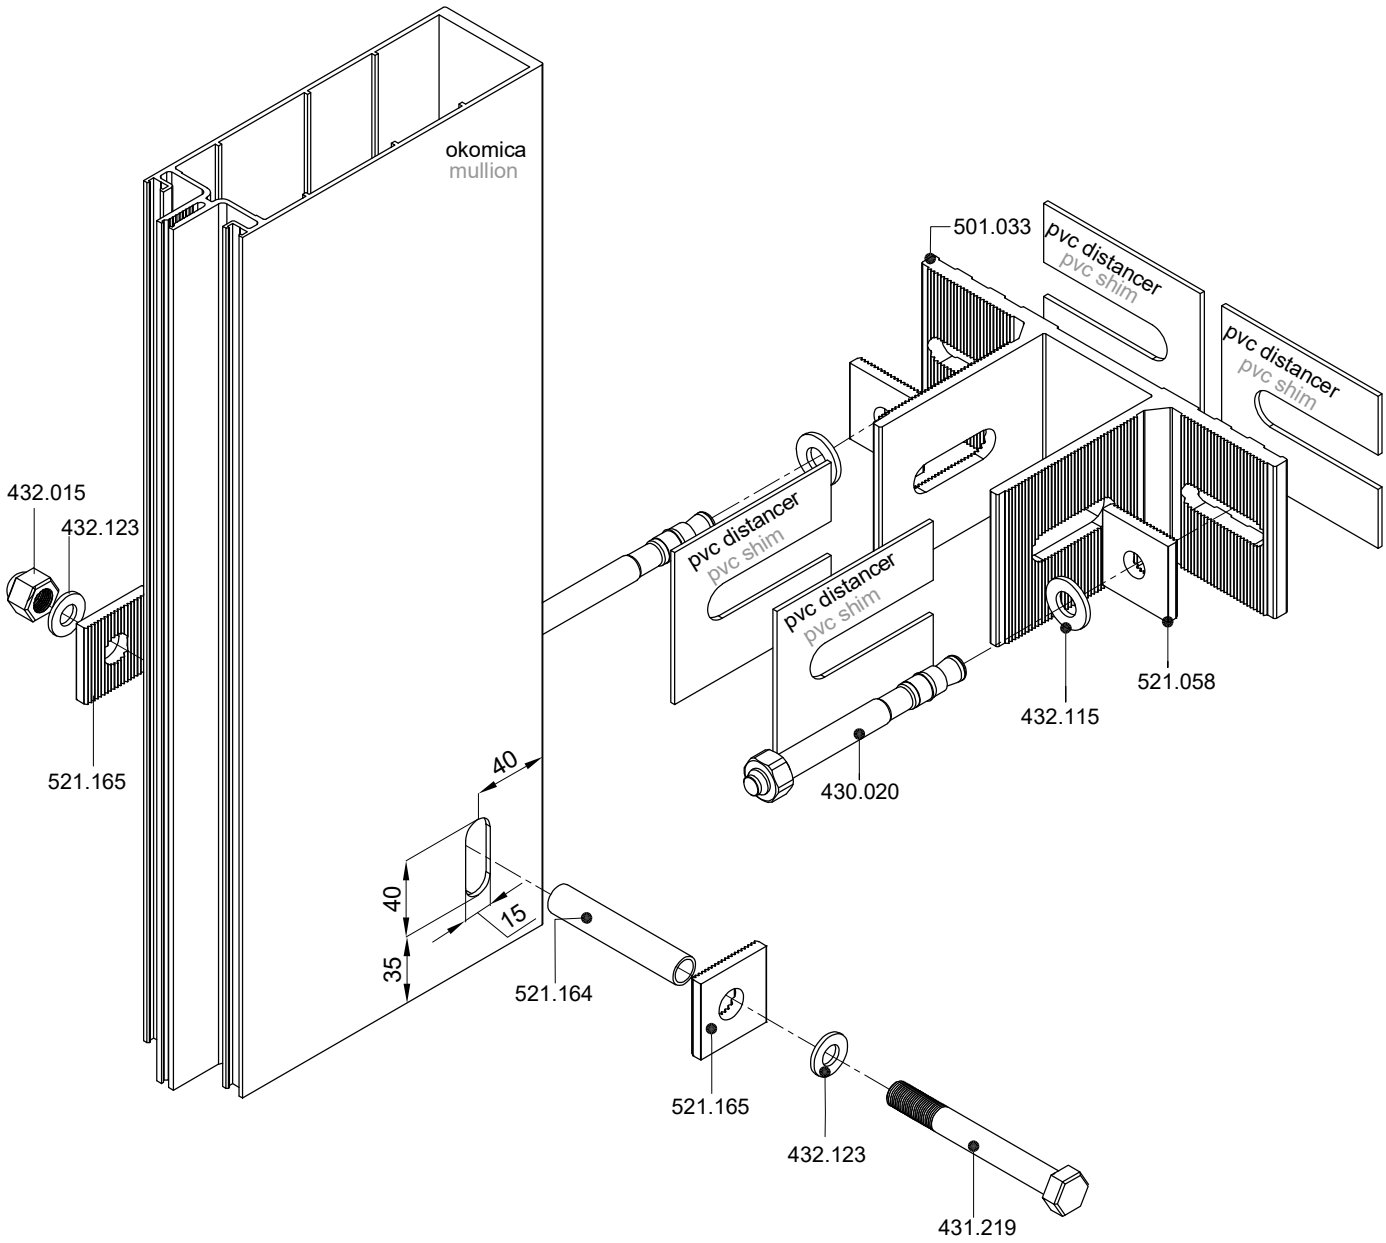


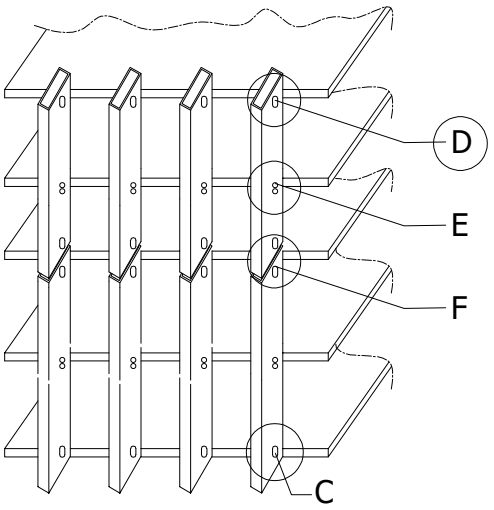



FASADA NA TRI OSLONCA
FACADE WITH THREE SUPPORTS

POKRETNI OSLONAC -D-
MOVEABLE SUPPORT -D-
FIKSNI OSLONAC -E-
FIXED SUPPORT -E-
POKRETNI OSLONAC -F-
MOVEABLE SUPPORT -F-
POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-

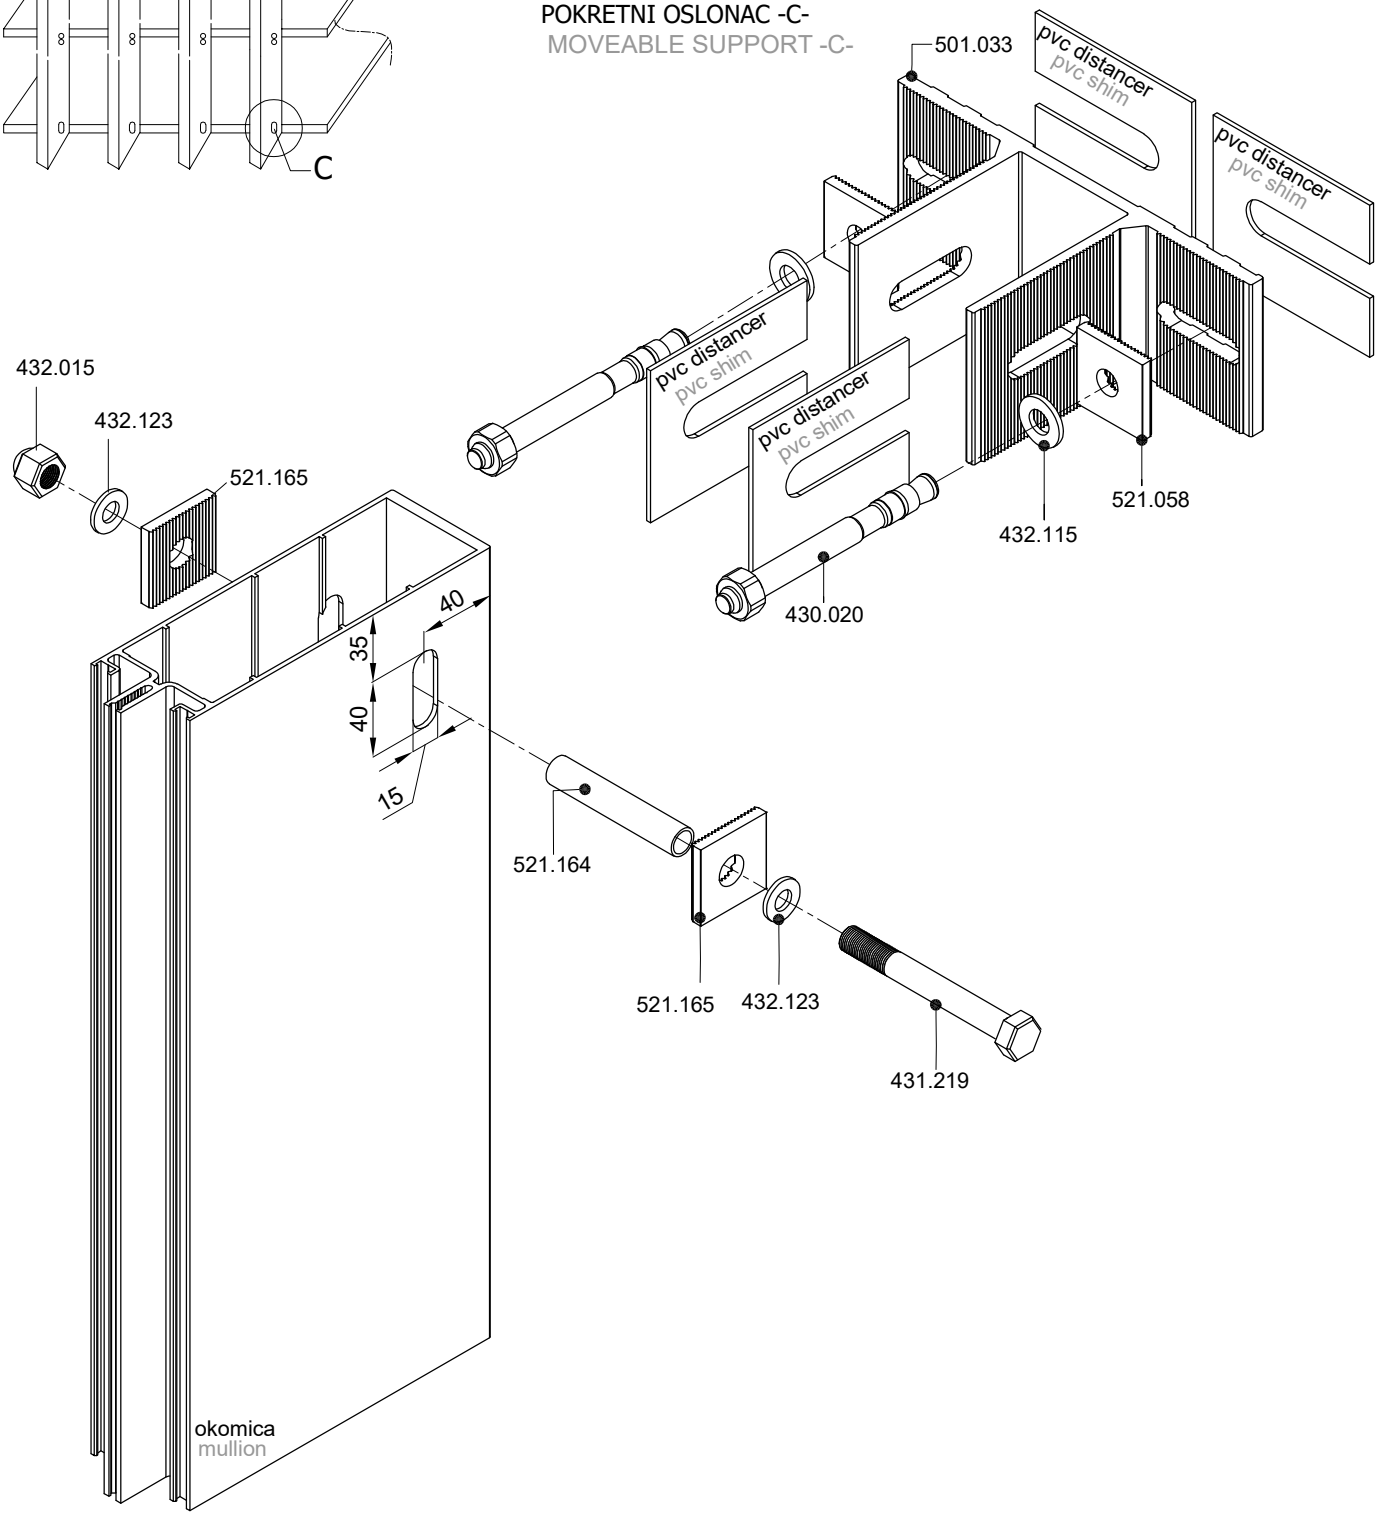

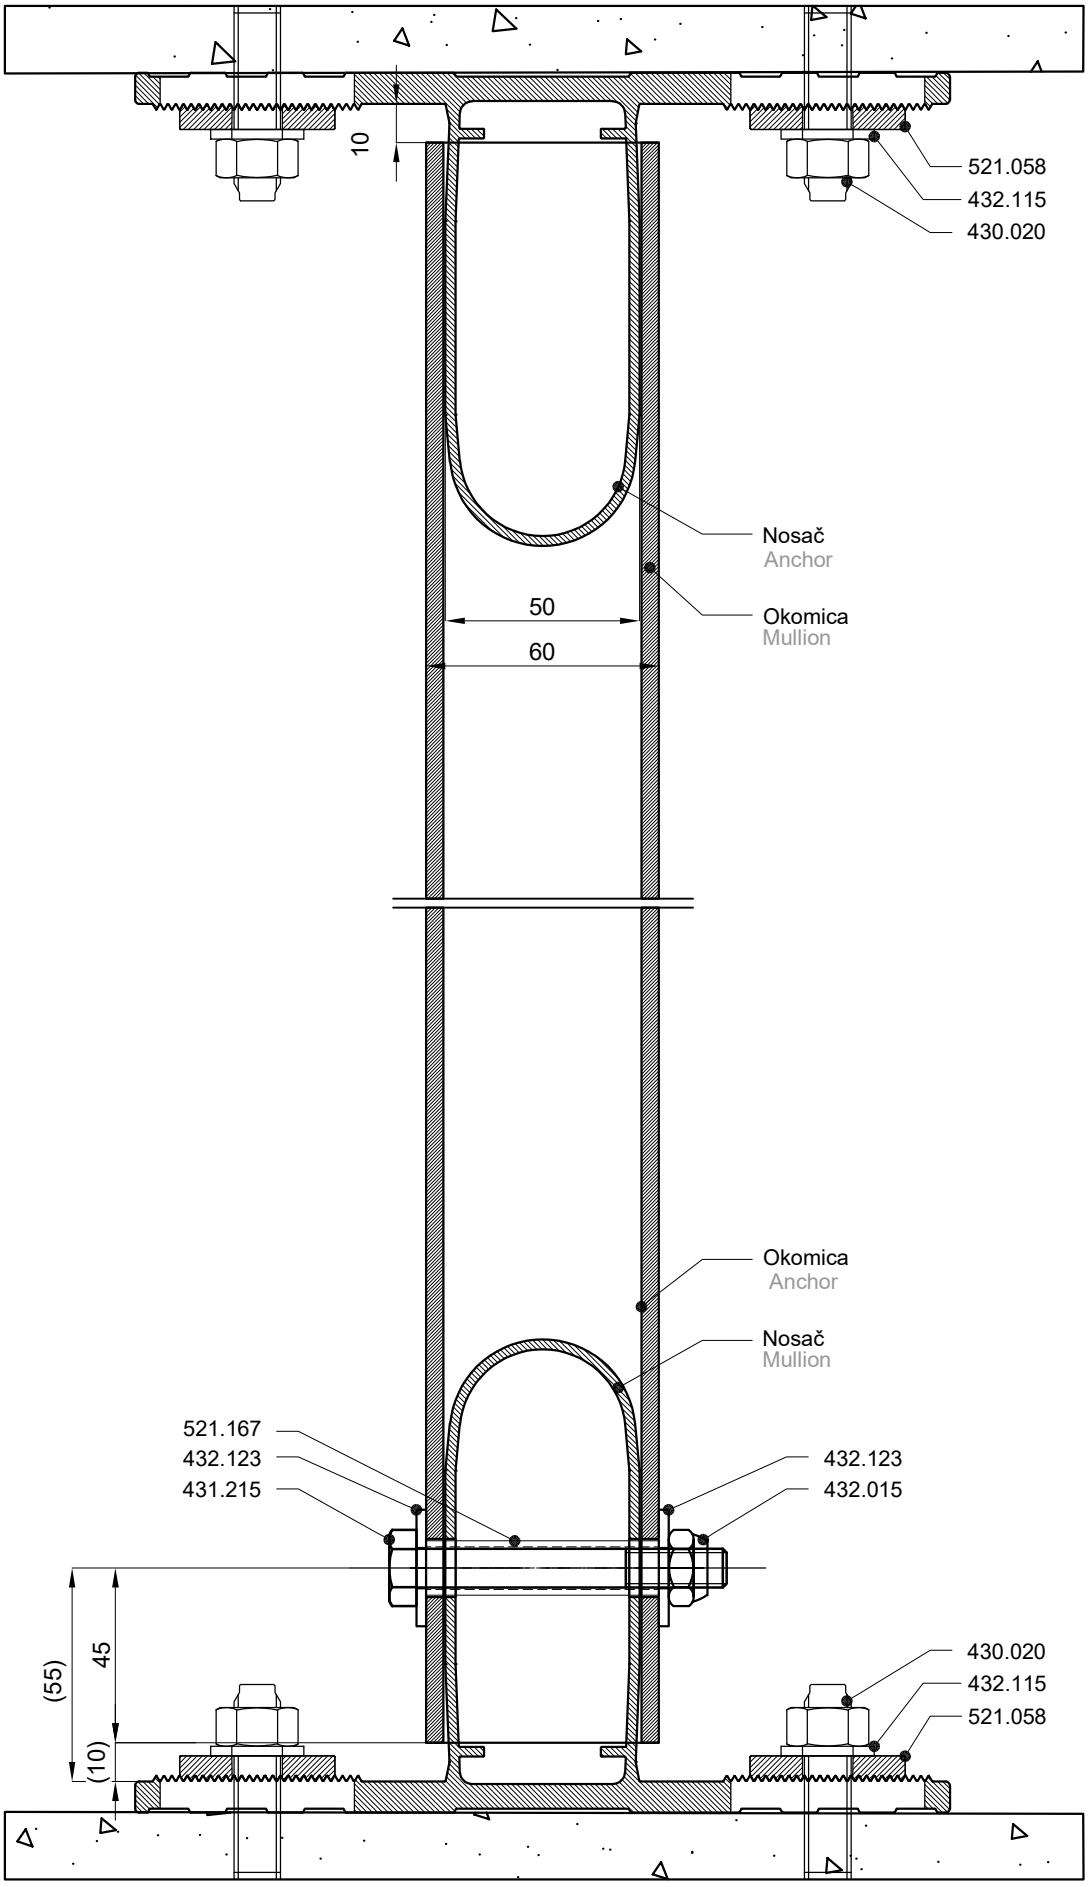
10
521.058
432.115
430.020
Nosač
Anchor
Okomica
Mullion
50
60
Okomica
Anchor
Nosač
Mullion
521.167
432.123
431.215
432.123
432.015
(55)
45
(10)
430.020
432.115
521.058

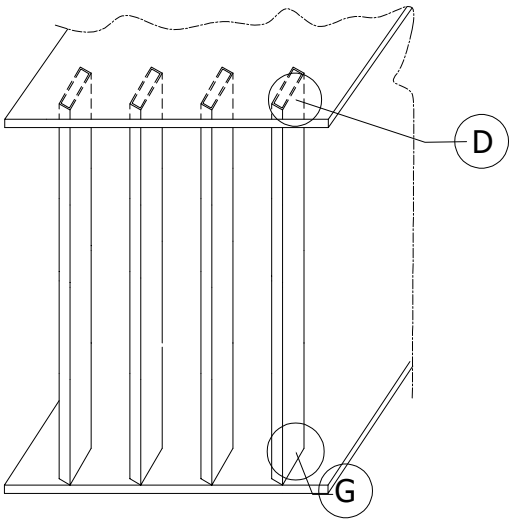


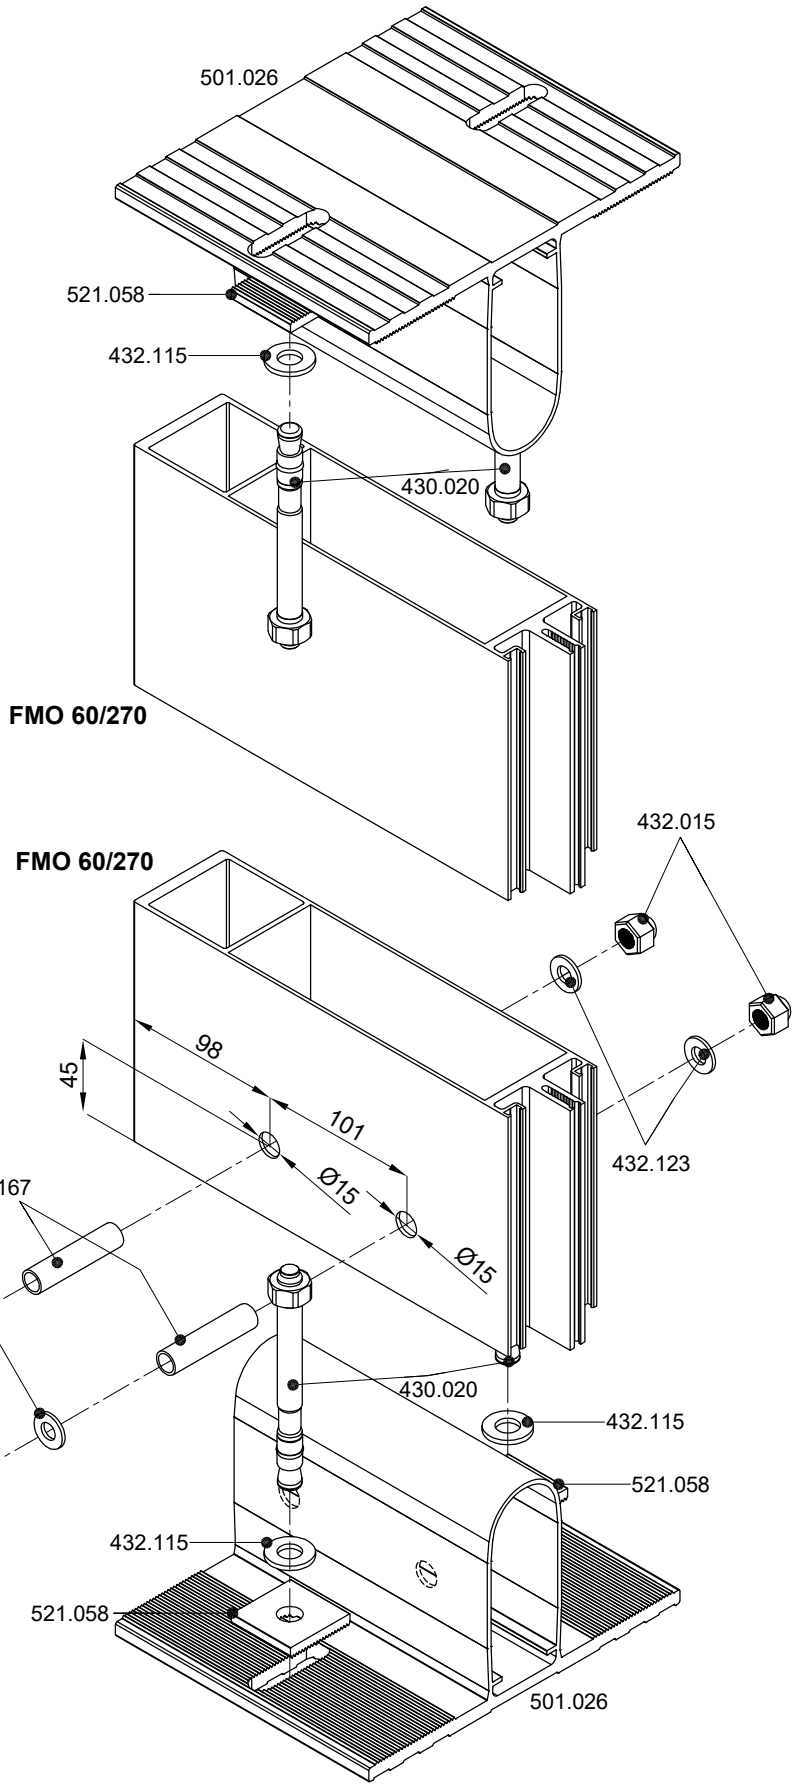

FASADA NA DVA OSLONCA
FACADE WI TH TWO SUPPORTS


POKRETNI OSLONAC -D-
MOVEABLE SUPPORT -D-
FIKSNI OSLONAC -G-
FIXED SUPPORT -G-

Rupe na okomici se buše u radionici,
dok se rupe na nosaču buše na gradilištu.
Holes on the mullion are drilled in the workshop,
while the holes on the anchor are drilled on the site

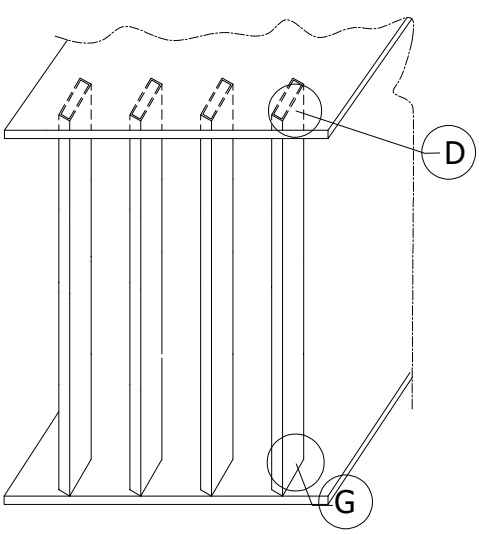

Rupe na okomici se buše u radionici,
dok se rupe na nosaču buše na gradilištu.
Holes on the mullion are drilled in the workshop,
while the holes on the anchor are drilled on the site


* Nosač 501.027 odgovara i okomici FMO 60/ 200 i okomici FMO 60/ 202
* Anchor 501.027 goes with mullion FMO 60/ 200 as well as mullion FMO 60/ 202

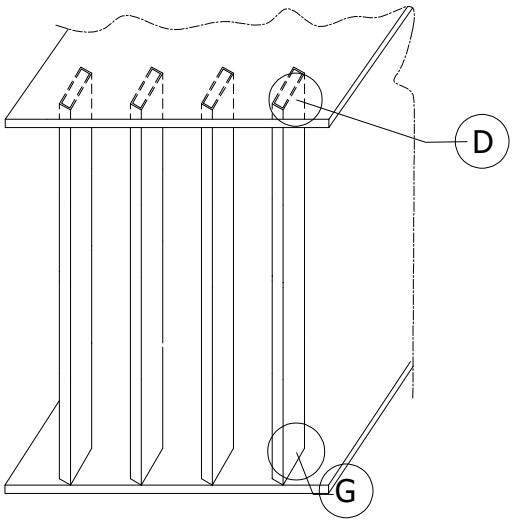


FASADA NA DVA OSLONCA
FACADE WI TH TWO SUPPORTS

POKRETNI OSLONAC -D-
MOVEABLE SUPPORT -D-
FIKSNI OSLONAC -G-
FIXED SUPPORT -G-


Rupe na okomici se buše u radionici,
dok se rupe na nosaču buše na gradilištu.
Holes on the mullion are drilled in the workshop,
while the holes on the anchor are drilled on the site

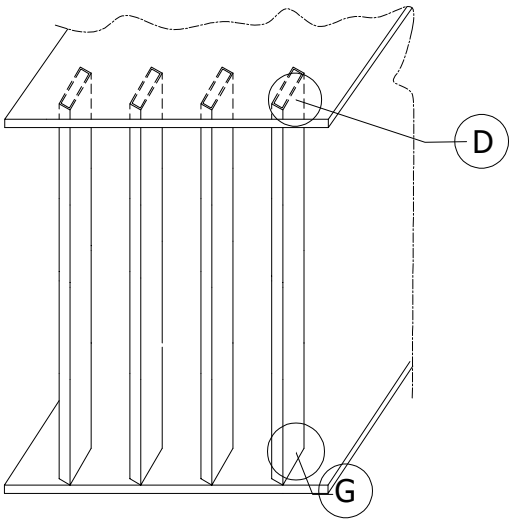

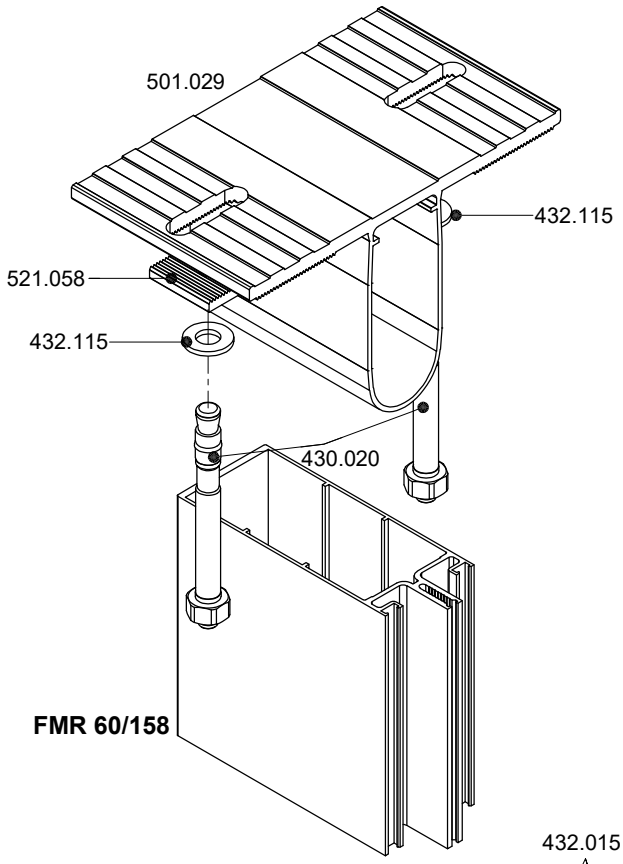



FASADA NA DVA OSLONCA
FACADE WI TH TWO SUPPORTS

POKRETNI OSLONAC -D-
MOVEABLE SUPPORT -D-
FIKSNI OSLONAC -G-
FIXED SUPPORT -G-

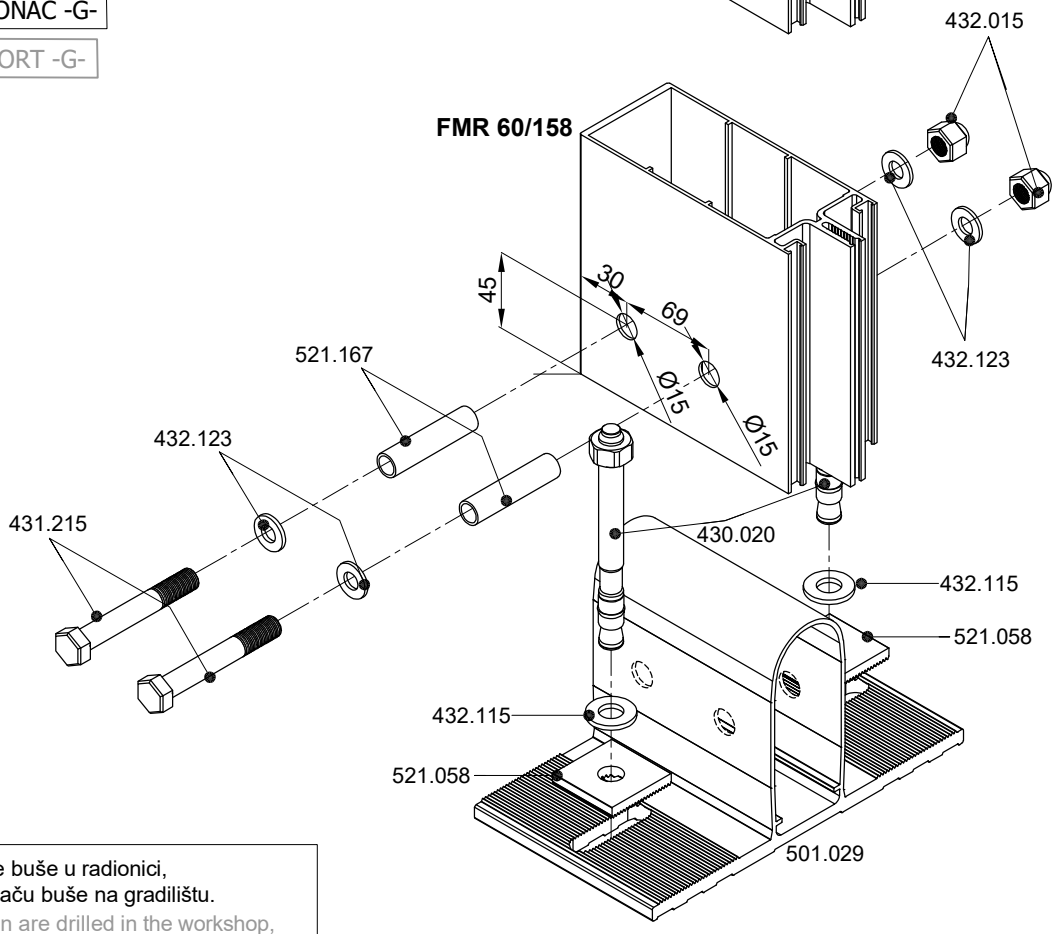


Rupe na okomici se buše u radionici,
dok se rupe na nosaču buše na gradilištu.
Holes on the mullion are drilled in the workshop,
while the holes on the anchor are drilled on the site

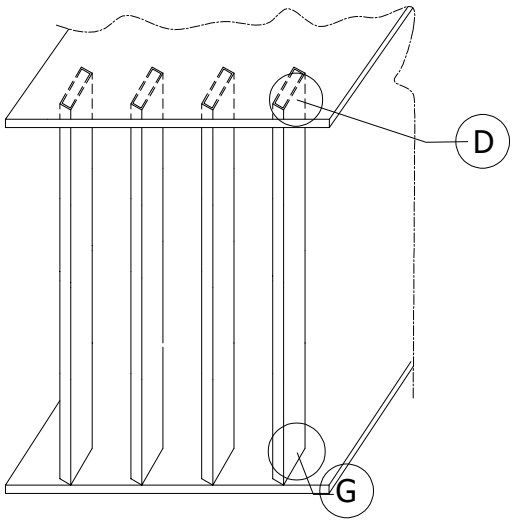

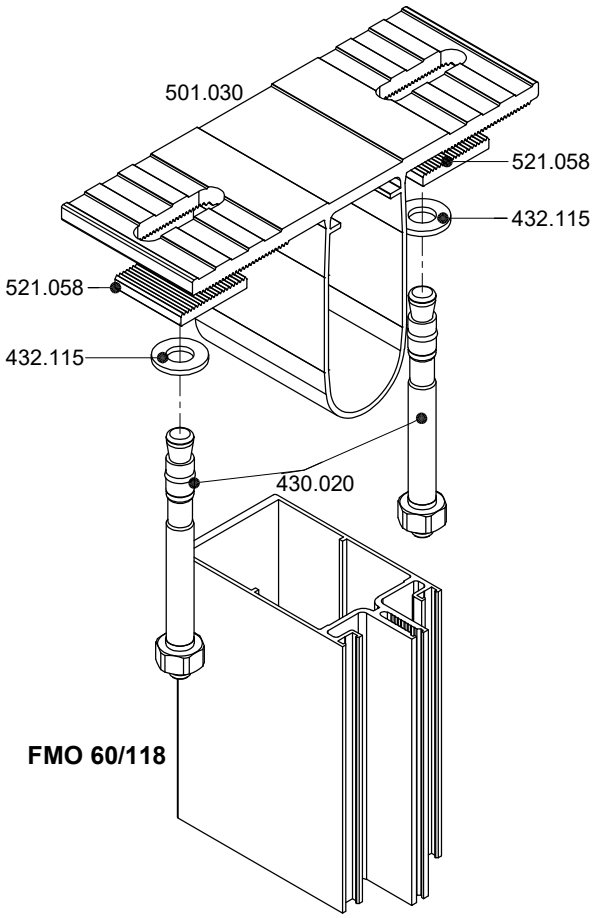



FASADA NA DVA OSLONCA
FACADE WI TH TWO SUPPORTS

POKRETNI OSLONAC -D-
MOVEABLE SUPPORT -D-
FIKSNI OSLONAC -G-
FIXED SUPPORT -G-

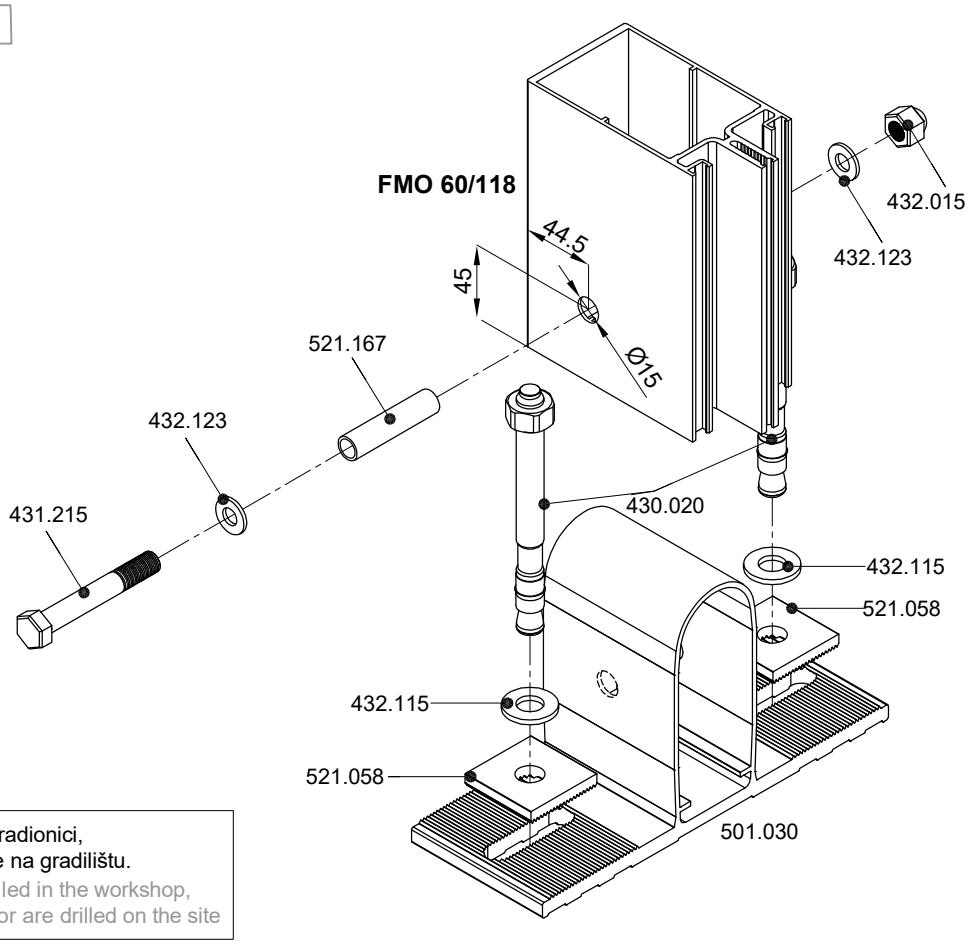


Rupe na okomici se buše u radionici,
dok se rupe na nosaču buše na gradilištu.
Holes on the mullion are drilled in the workshop,
while the holes on the anchor are drilled on the site

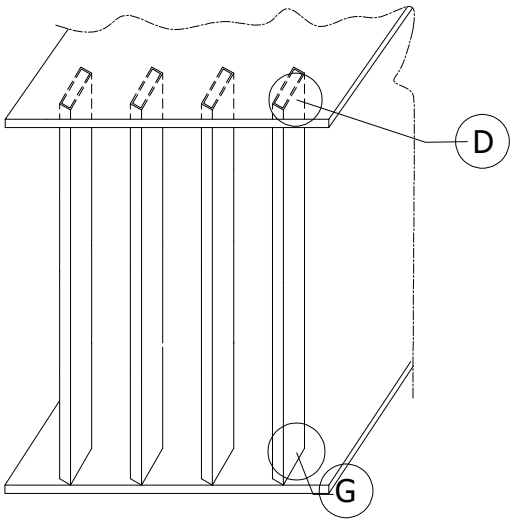

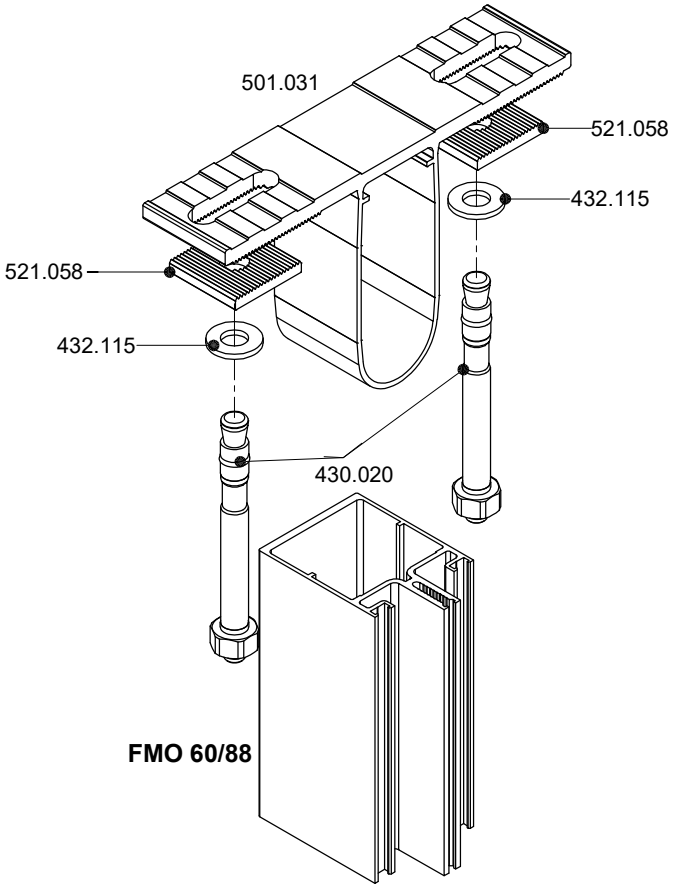



FASADA NA DVA OSLONCA
FACADE WI TH TWO SUPPORTS

POKRETNI OSLONAC -D-
MOVEABLE SUPPORT -D-
FIKSNI OSLONAC -G-
FIXED SUPPORT -G-

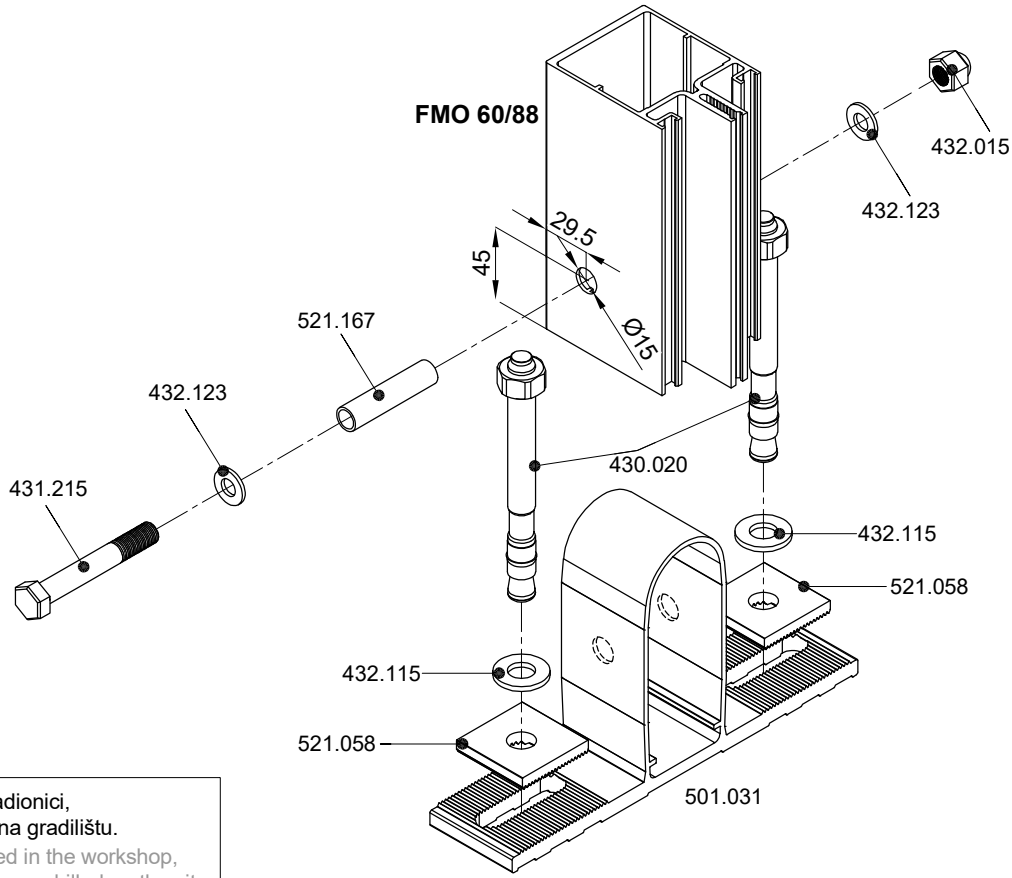

Rupe na okomici se buše u radionici,
dok se rupe na nosaču buše na gradilištu.
Holes on the mullion are drilled in the workshop,
while the holes on the anchor are drilled on the site

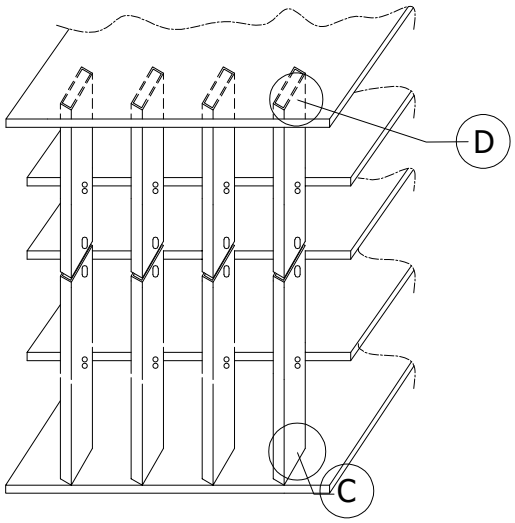


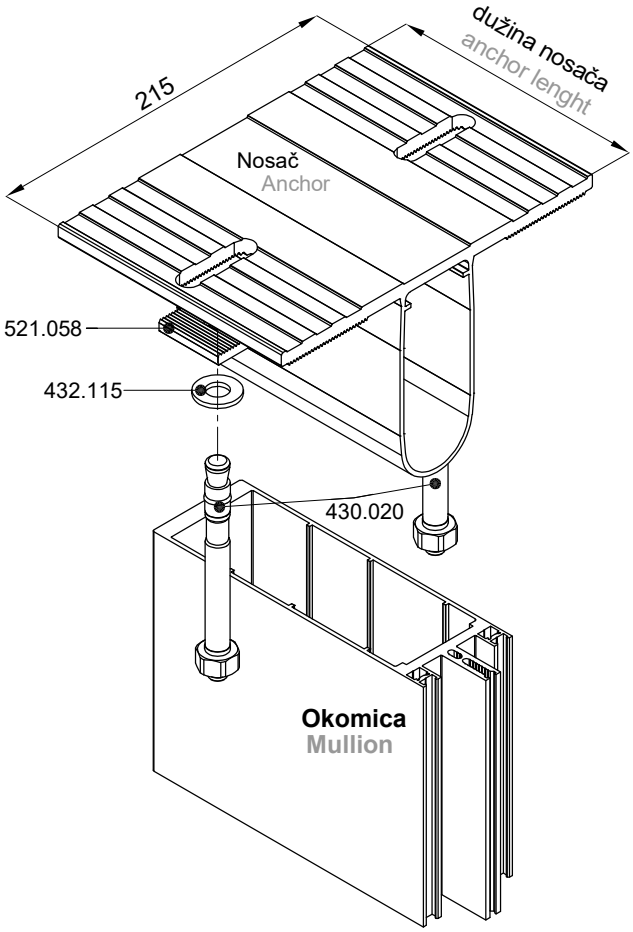



FASADA NA TRI OSLONCA
FACADE WI TH THREE SUPPORTS


POKRETNI OSLONAC -D-
MOVEABLE SUPPORT -D-
POKRETNI OSLONAC -C-
MOVEABLE SUPPORT -C-


Okomica Mullion	**Nosač** Anchor	**Dužina nosača** Anchor length
FMO 60/270	501.026	171 mm
FMO 60/200	501.027	159 mm
FMO 60/202	501.027	159 mm
FMO 60/200-S	501.028	171 mm
FMR 60/158	501.029	119.5 mm
FMO 60/118	501.030	79.5 mm
FMO 60/88	501.031	50 mm

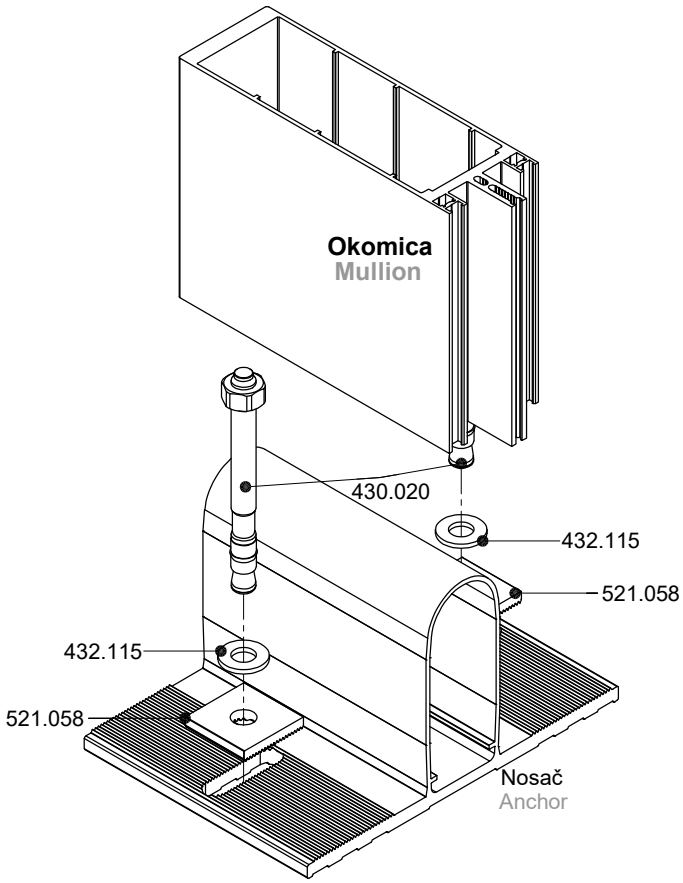


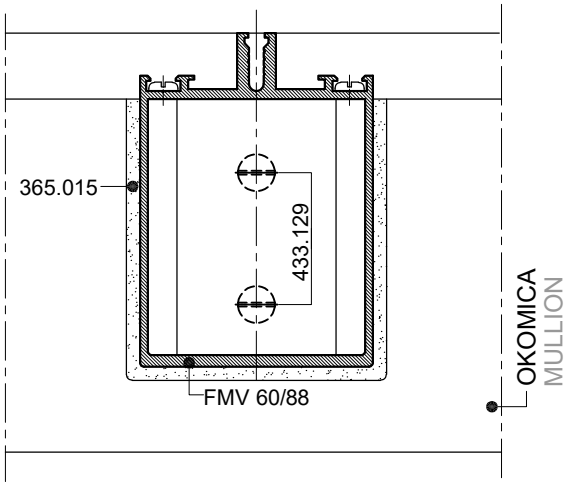

365.015
433.129
FMV 60/88
OKOMICA
MULLION

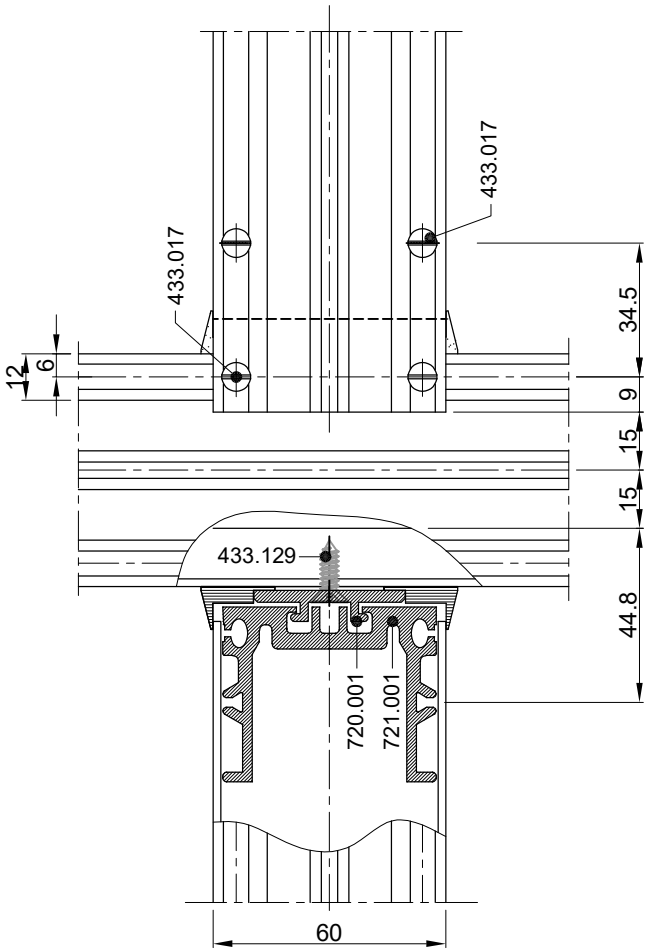
433.017
433.017
433.129
720.001
721.001
12
6
34.5
9
15
15
44.8
60

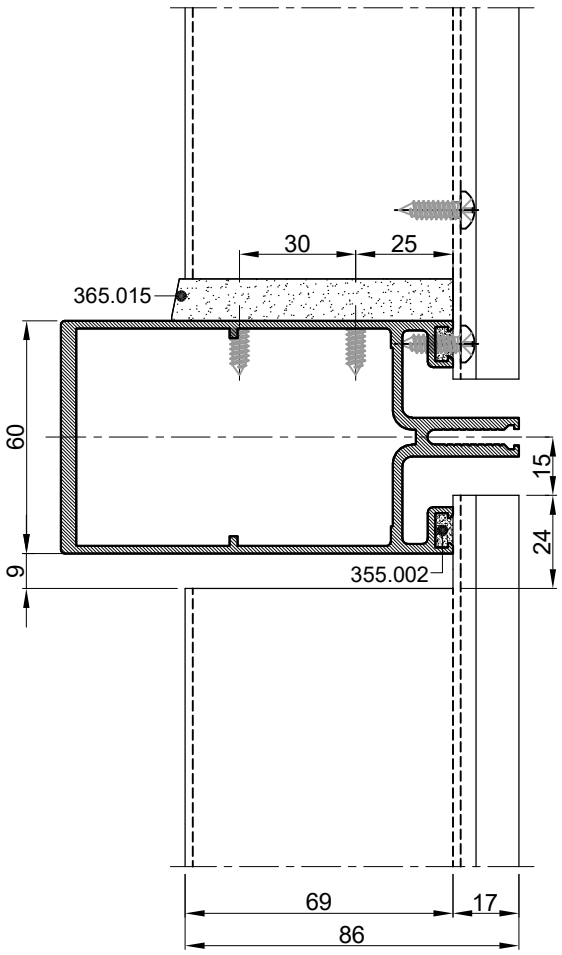

30
25
365.015
60
9
355.002
15
24
69
17
86

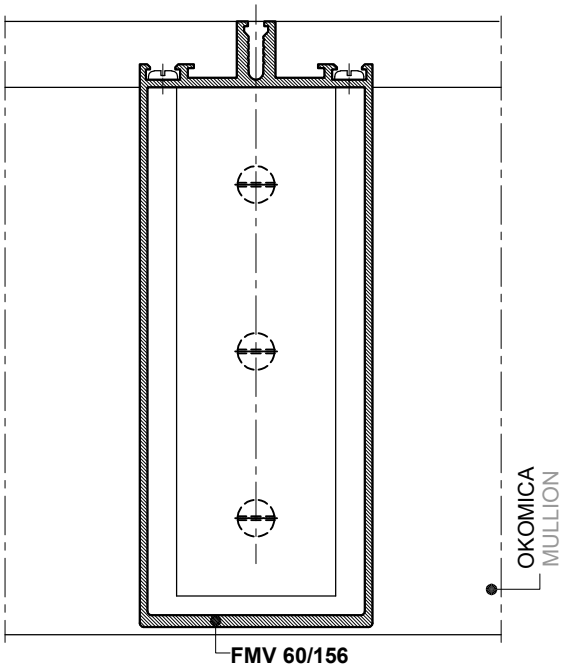
OKOMICA
MULLION
FMV 60/156

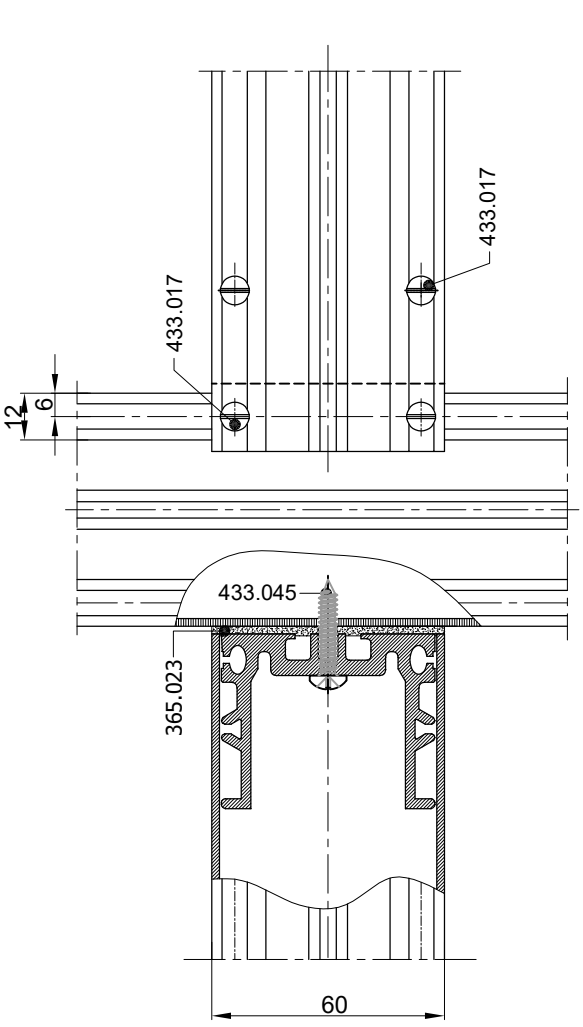

433.017
433.017
12
6
433.045
365.023
60

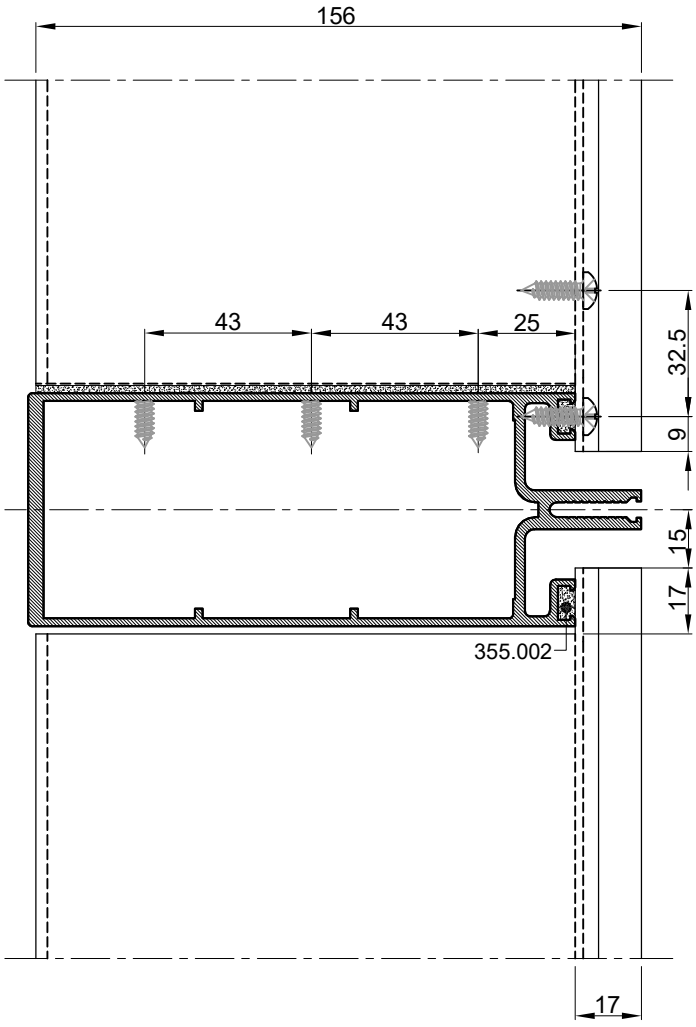
156
43
43
25
32.5
9
15
17
355.002
17


SPOJNICA OKOMICE I VODORAVNICE POD KUTEM
ANGLED MULLION-TRANSOM CONNECTION

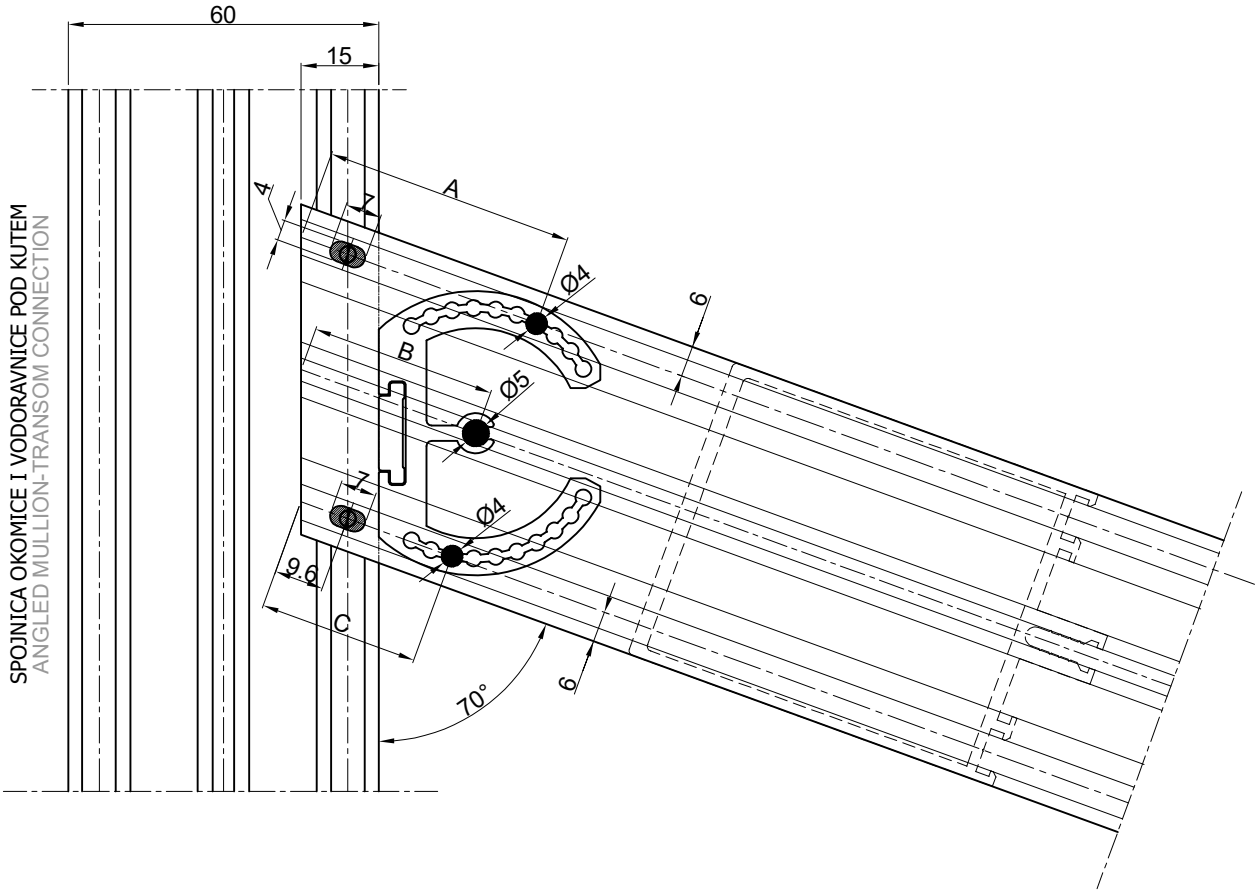


α°	A (mm)	B (mm)	C (mm)
85	33.5	33.9	29.3
80	42.3	34.3	33.9
75	43.1	35.0	26.0
70	48.5	36.0	31.0
65	45.9	37.3	27.8
60	56.7	39.0	28.9
55	59.7	41.2	26.1
50	63.8	44.1	27.8
45	73.8	48.1	30.2

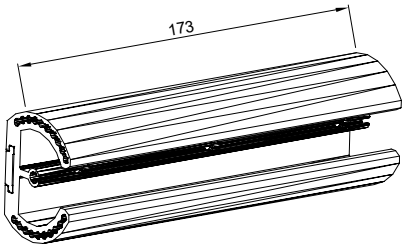


722.004
(za FMV 60/198)
(for FMV 60/198)



722.002
(za FMV 60/114)
(for FMV 60/114)




722.003
(za FMV 60/156)
(for FMV 60/156)




722.001
(za FMV 60/88)
(for FMV 60/88)

Spojnica okomica
SB-065/M
Mullion connection
SB-065/M





Primjer pilanja spojnice okomice
Example of sawing of the mullion connection

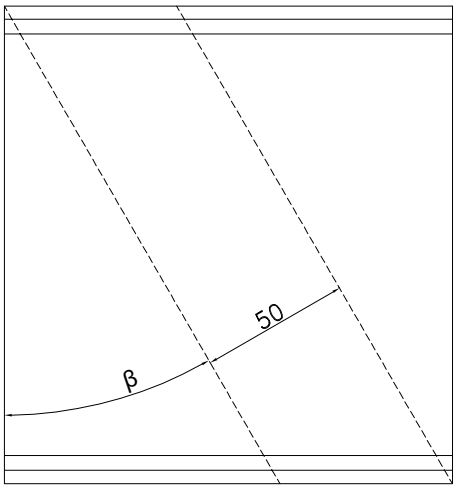


Nagib profila FMO 60/88 Mullion angle FMO 60/88	α°	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85
Kut pilanja Sawing angle	β°	45	42.5	40	37.5	35	32.5	30	27.5	25	22.5	20	17.5	15	12.5	10	7.5	5	2.5

β°=90°-(90°+α°)/2

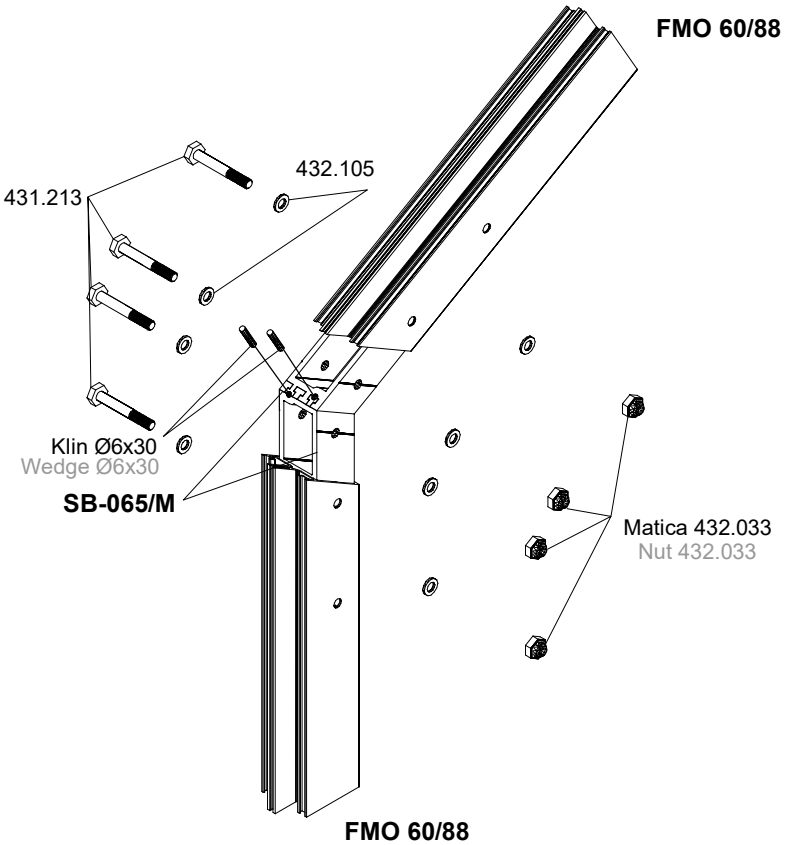


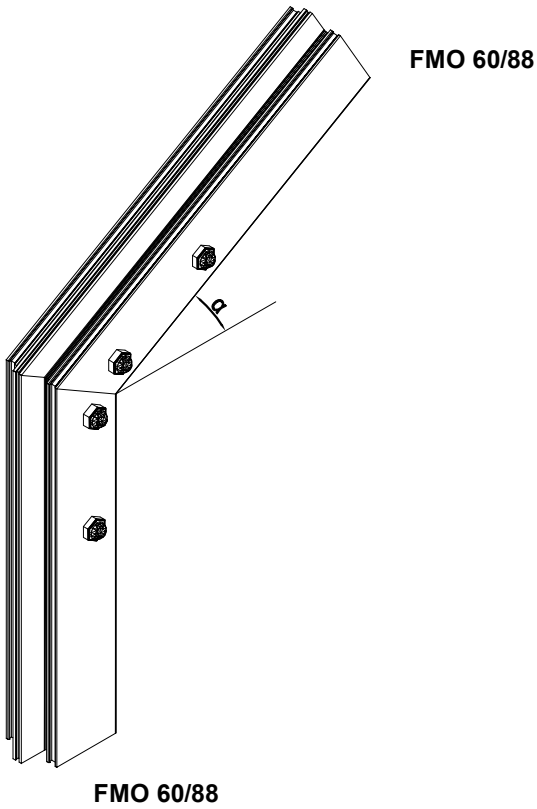

Spojnica okomica
SB-065/M





Primjer pilanja spojnice okomice
Example of sawing of the mullion connection

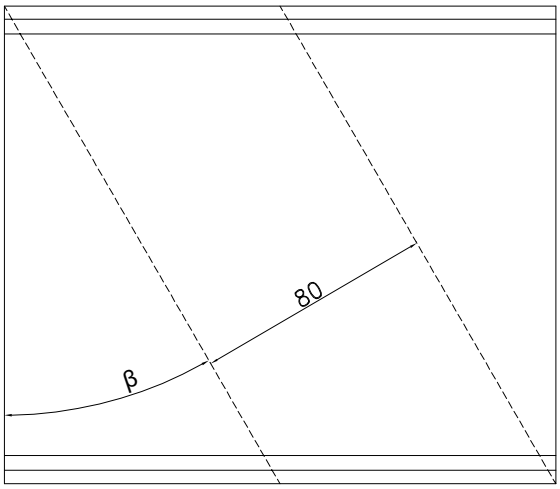


Nagib profila FMO 60/118 Mullion angle FMO 60/118	α°	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85
Kut pilanja Sawing angle	β°	45	42.5	40	37.5	35	32.5	30	27.5	25	22.5	20	17.5	15	12.5	10	7.5	5	2.5

β°=90°-(90°+α°)/2

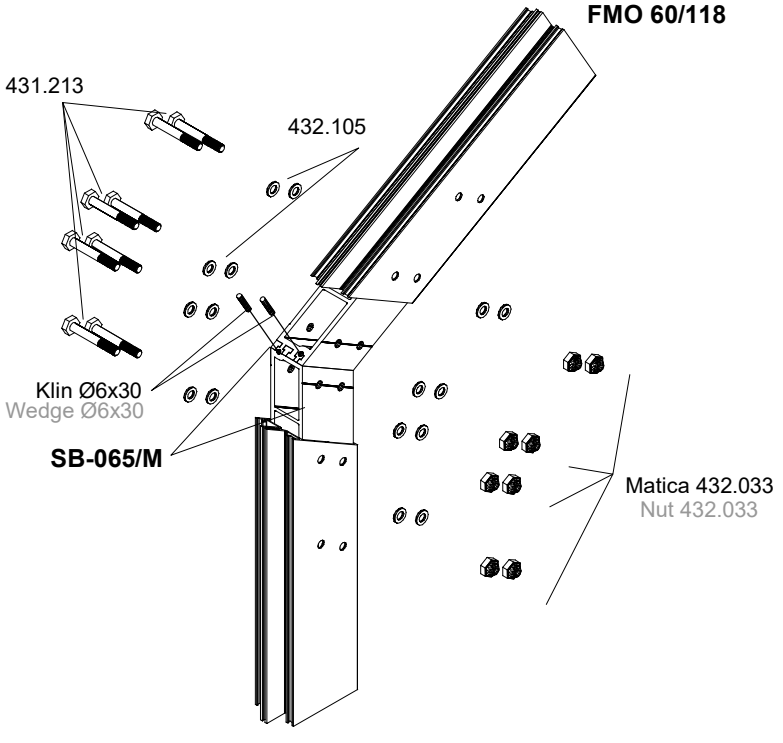


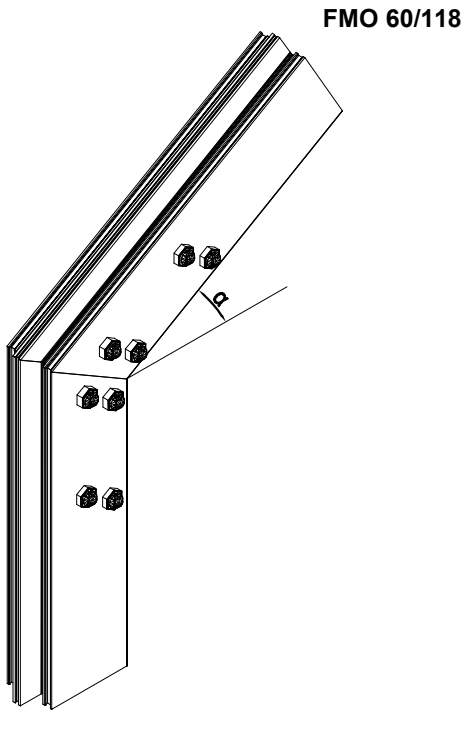

Spojnica okomica
SB-065/M





Primjer pilanja spojnice okomice
Example of sawing of the mullion connection

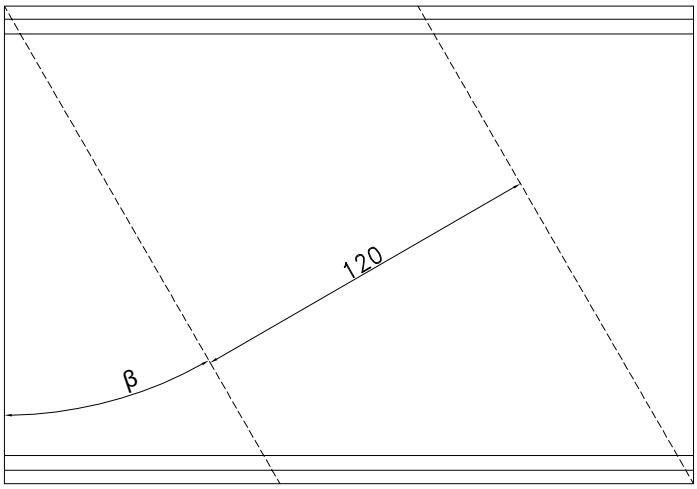


Nagib profila FMO 60/158 Mullion angle FMO 60/158	α°	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85
Kut pilanja Sawing angle	β°	45	42.5	40	37.5	35	32.5	30	27.5	25	22.5	20	17.5	15	12.5	10	7.5	5	2.5

β°=90°-(90°+α°)/2

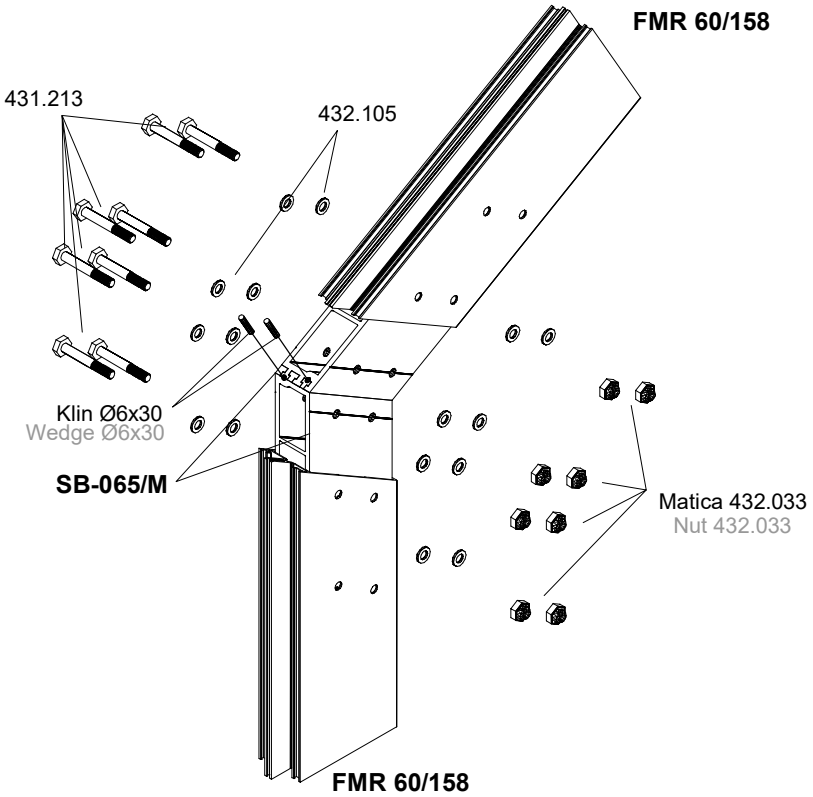


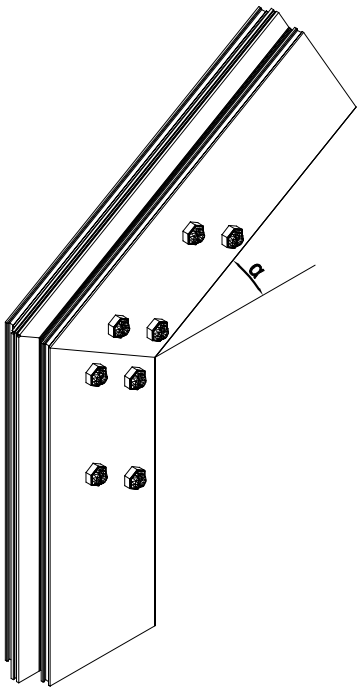

Spojnica okomica
SB-065/M





Primjer pilanja spojnice okomice
Example of sawing of the mullion connection

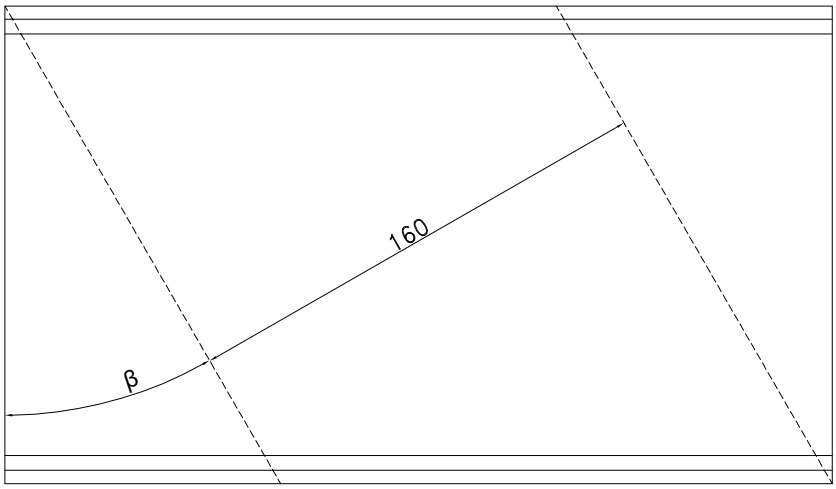



Nagib profila FMO 60/200 Mullion angle FMO 60/200	α°	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85
Kut pilanja Sawing angle	β°	45	42.5	40	37.5	35	32.5	30	27.5	25	22.5	20	17.5	15	12.5	10	7.5	5	2.5

β°=90°-(90°+α°)/2

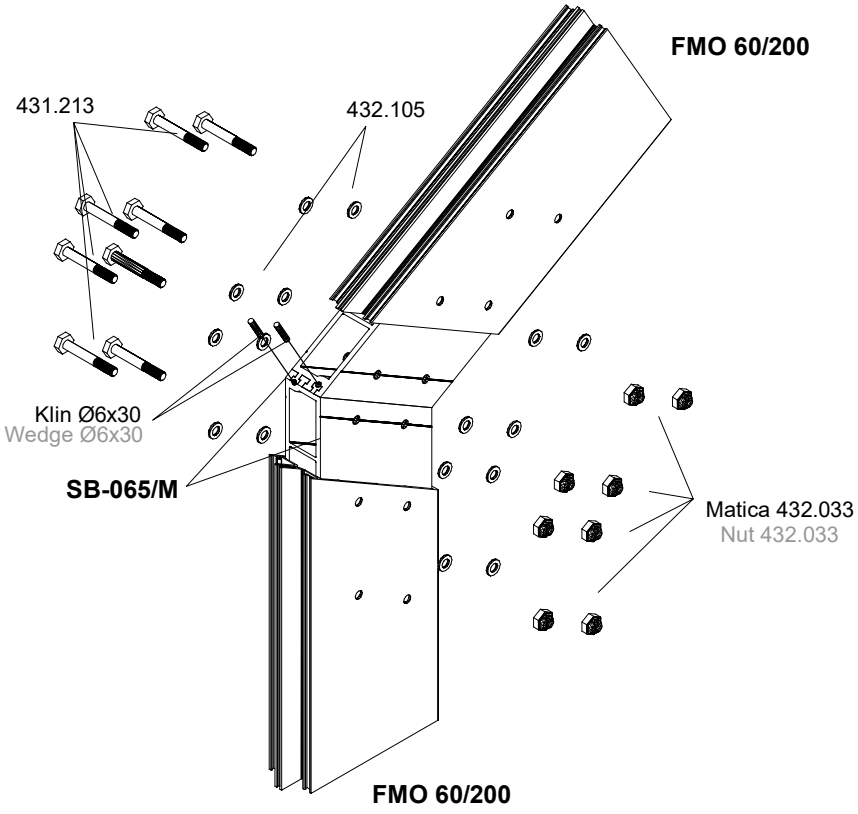


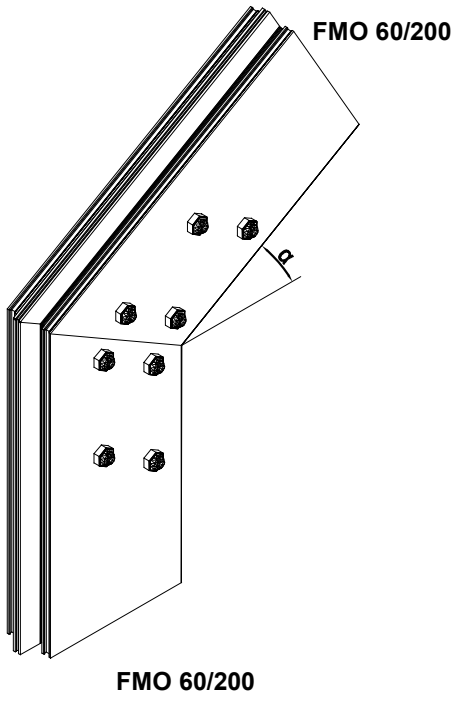


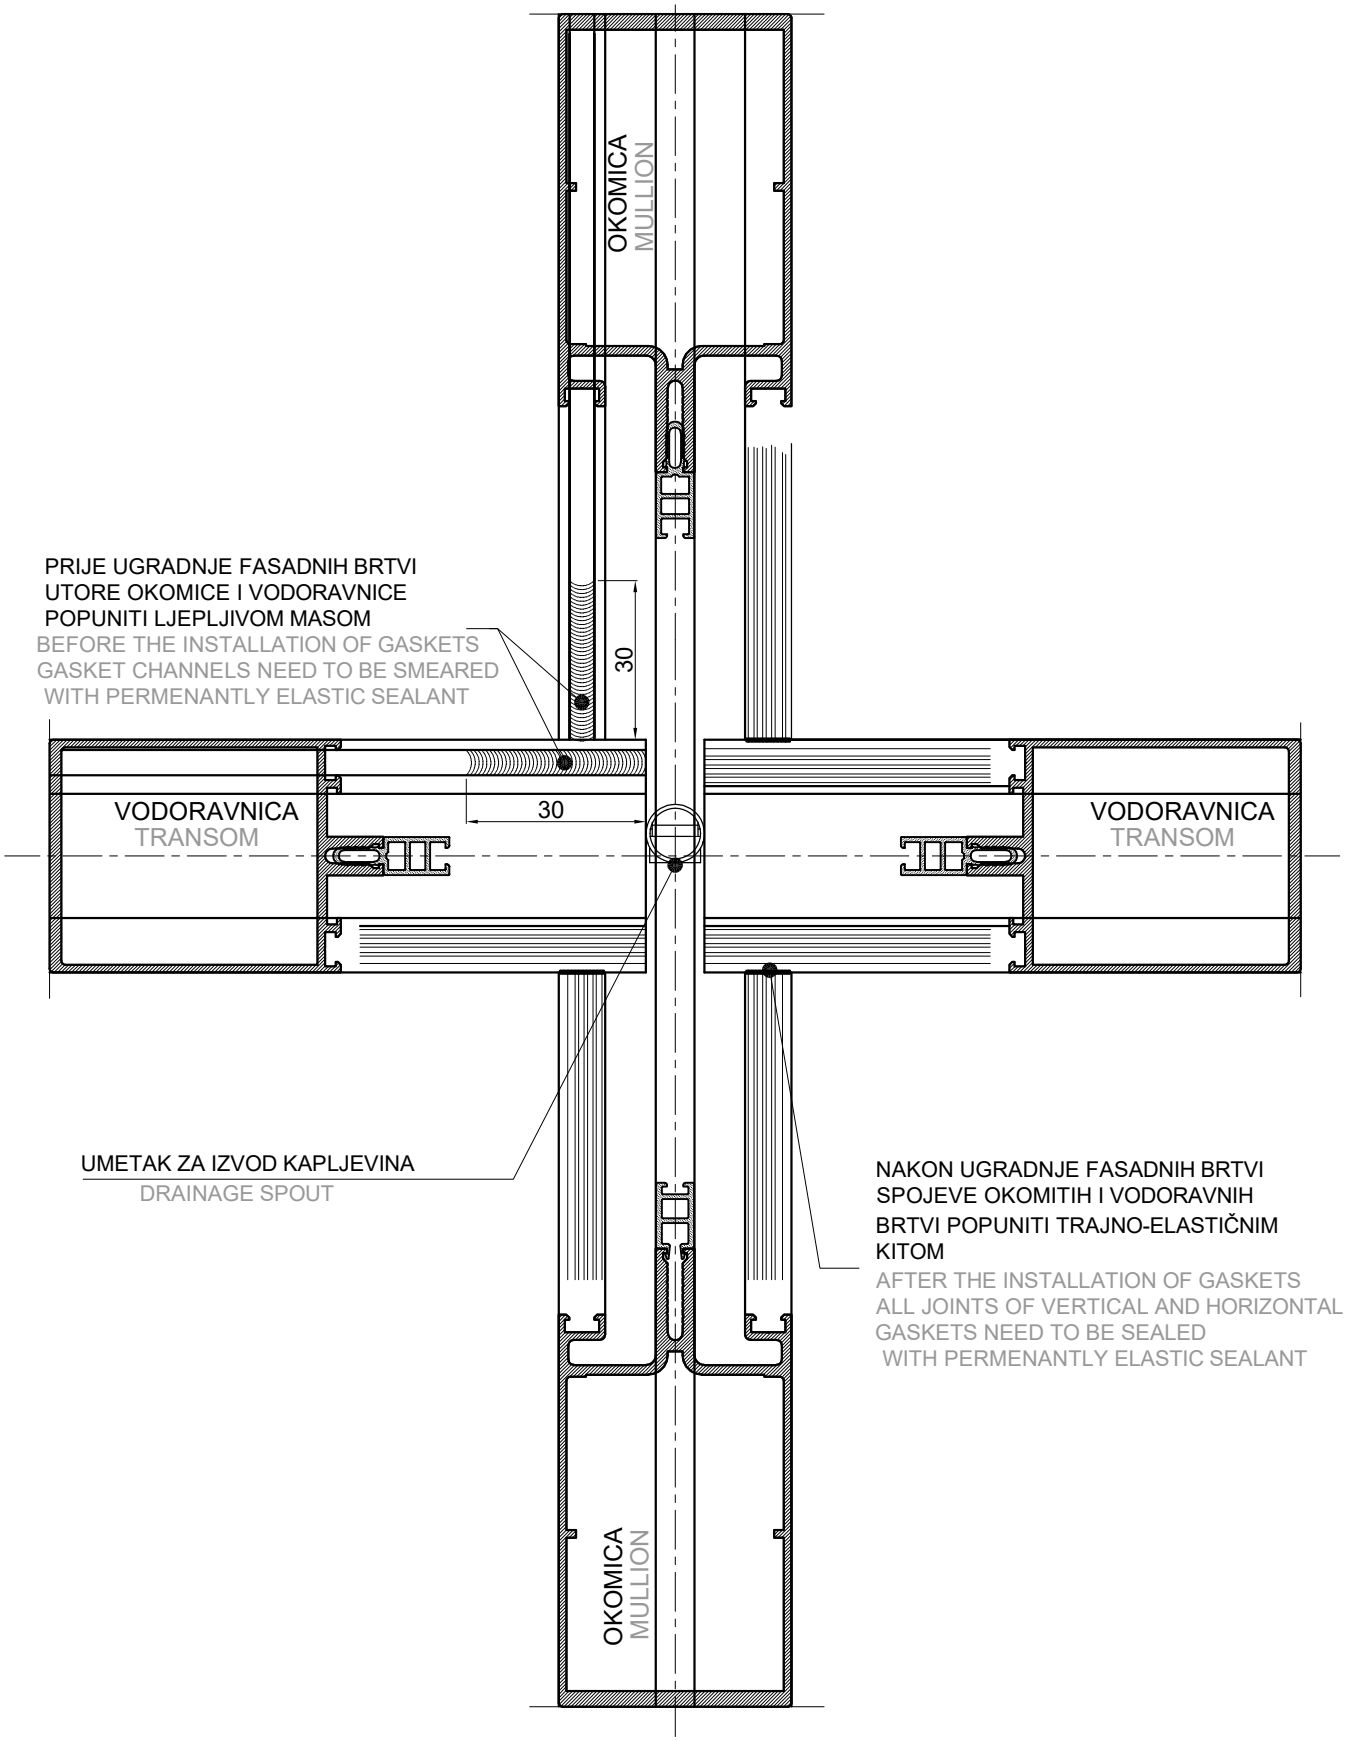
OKOMICA
MULLION
PRIJE UGRADNJE FASADNIH BRTVI UTORE OKOMICE I VODORAVNICE POPUNITI LJEPLJIVOM MASOM
BEFORE THE INSTALLATION OF GASKETS GASKET CHANNELS NEED TO BE SMEARED WITH PERMENANTLY ELASTIC SEALANT
30
30
VODORAVNICA
TRANSOM
VODORAVNICA
TRANSOM
UMETAK ZA IZVOD KAPLJEVINA
DRAINAGE SPOUT
NAKON UGRADNJE FASADNIH BRTVI SPOJEVE OKOMITIH I VODORAVNIH BRTVI POPUNITI TRAJNO-ELASTIČNIM KITOM
AFTER THE INSTALLATION OF GASKETS ALL JOINTS OF VERTICAL AND HORIZONTAL GASKETS NEED TO BE SEALED WITH PERMENANTLY ELASTIC SEALANT
OKOMICA
MULLION

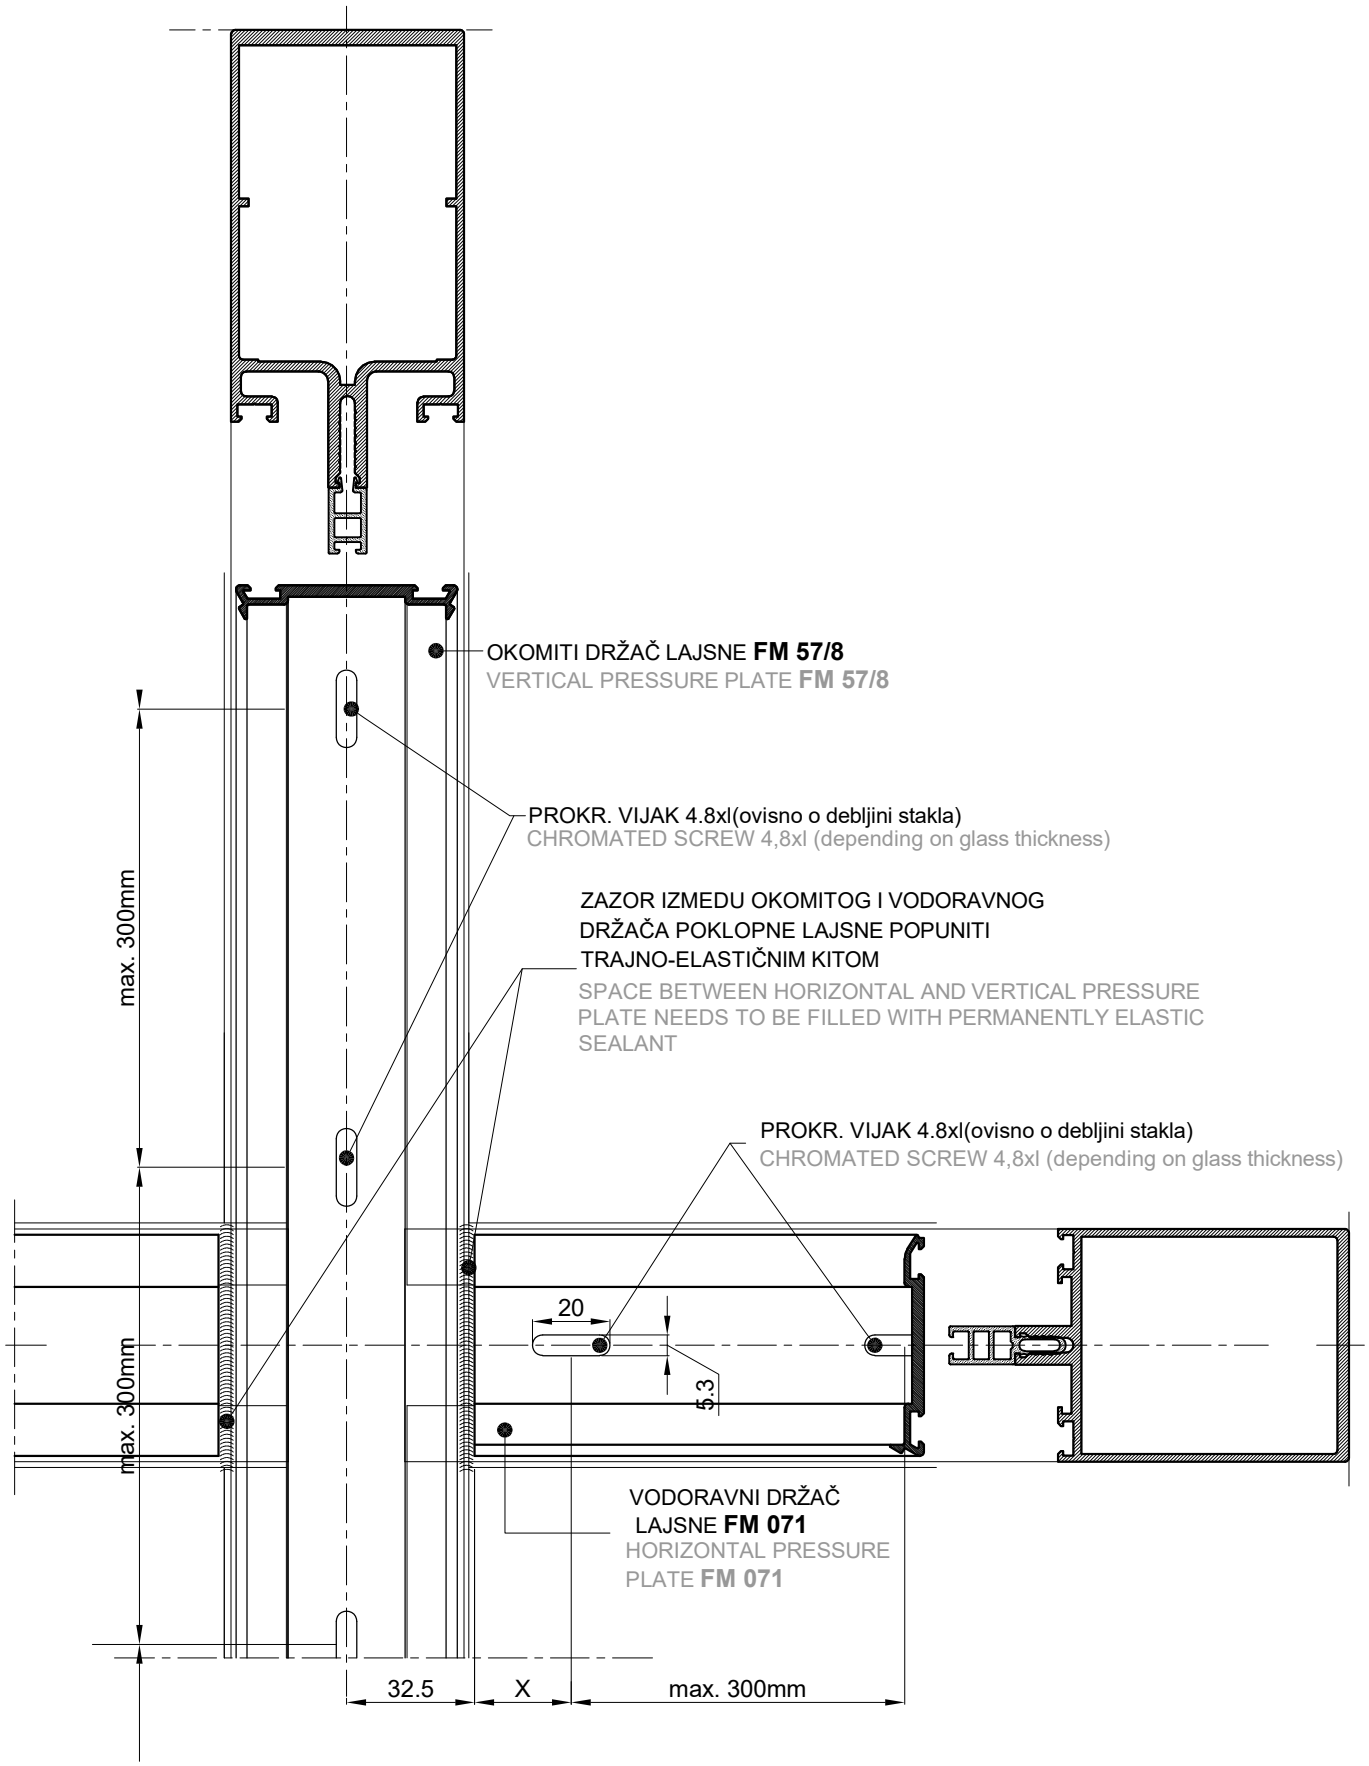
OKOMITI DRŽAČ LAJSNE **FM 57/8**
VERTICAL PRESSURE PLATE **FM 57/8**
PROKR. VIJAK 4.8xl(ovisno o debljini stakla)
CHROMATED SCREW 4,8xl (depending on glass thickness)
ZAZOR IZMEDU OKOMITOG I VODORAVNOG DRŽAČA POKLOPNE LAJSNE POPUNITI TRAJNO-ELASTIČNIM KITOM
SPACE BETWEEN HORIZONTAL AND VERTICAL PRESSURE PLATE NEEDS TO BE FILLED WITH PERMANENTLY ELASTIC SEALANT
PROKR. VIJAK 4.8xl(ovisno o debljini stakla)
CHROMATED SCREW 4,8xl (depending on glass thickness)
max. 300mm
max. 300mm
20
5.3
VODORAVNI DRŽAČ LAJSNE **FM 071**
HORIZONTAL PRESSURE PLATE **FM 071**
32.5
X
max. 300mm


- Montaža francuskog balkona
- French balcony installation

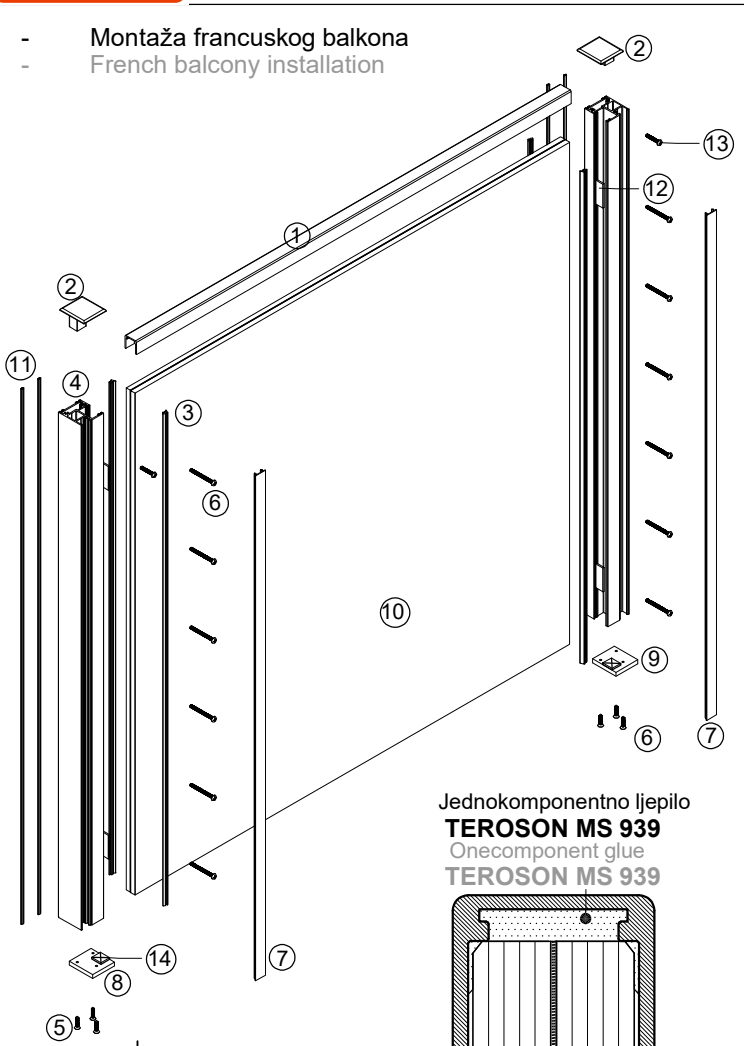

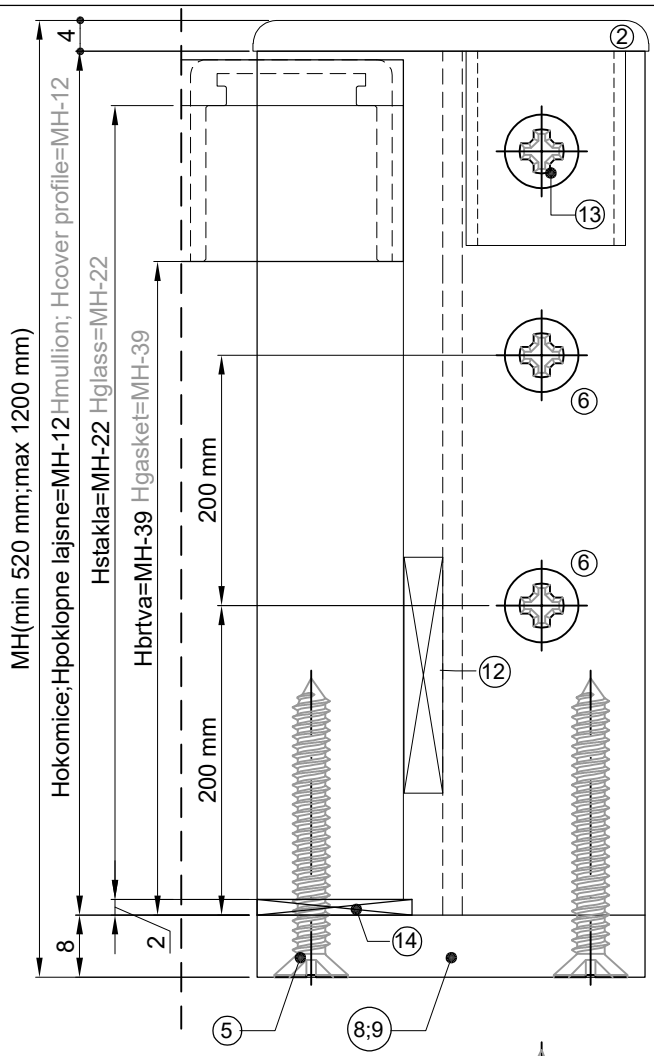

Jednokomponentno ljepilo
TEROSON MS 939
Onecomponent glue
TEROSON MS 939

F-1437
Rukohvat
Handrail

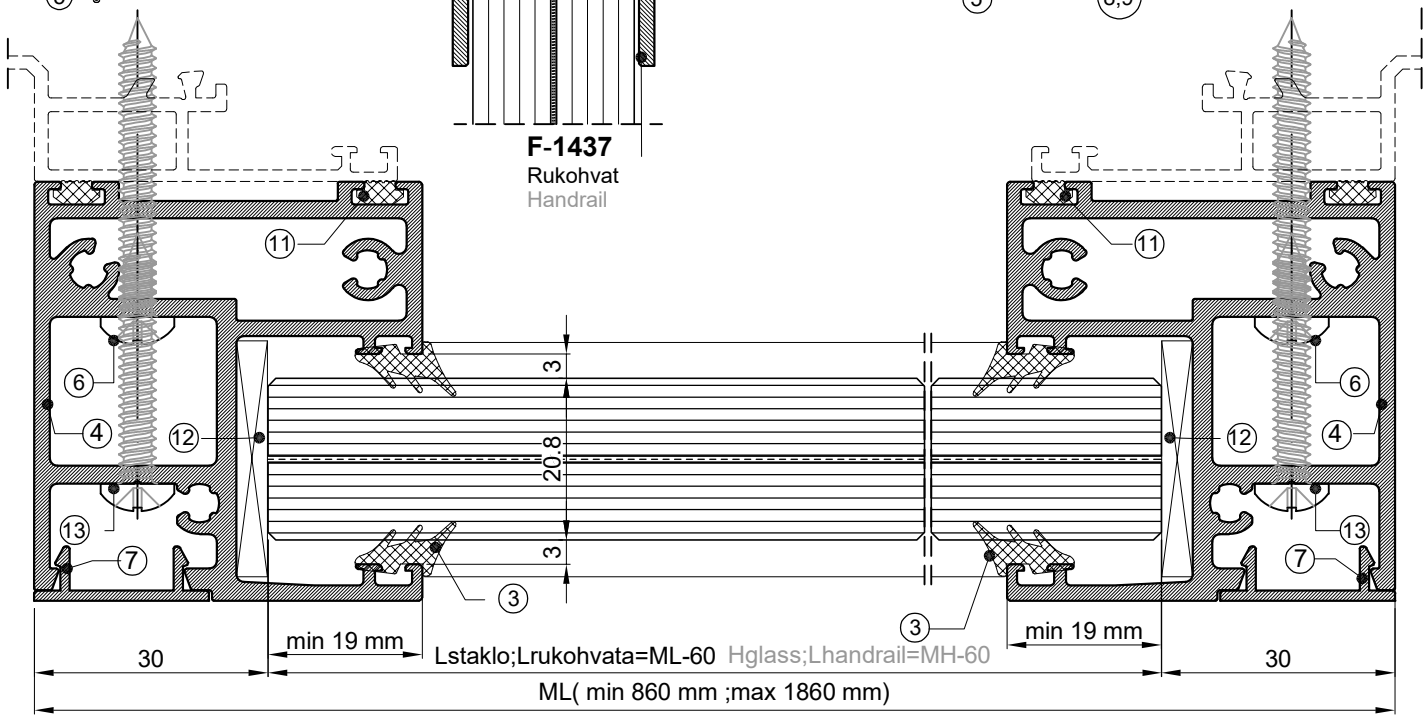


1 - profil rukohvata F-1437
1 - handrail profile F-1437
2 - PVC čep 373.054
2 - PVC cover cap 373.054
3 - brtva 311.002
3 - gasket 311.002
4 - profil okomice F-1569
4 - french balcony profile F-1569


5 - 433.134 (6 komada)
5 - 433.134 (6 pieces)
6 - 433.048 (svakih 200 mm)
6 - 433.048 (every 200 mm)
7 - poklopna lajsna F-0826
7 - cover profile F-0826
8 - nosiva pločica lijeva 391.148
8 - glass support left 391.148

9 - nosiva pločica desna 391.149
9 - glass support right 391.149
10 - staklo 10.10.2 Kaljeno lamistal
10 - glass 10.10.2 toughened laminated
11 - brtva 340.055
11 - gasket 340.055
12 - PVC distancer 100x30x5 mm
12 - PVC packer 100x30x5 mm


13 - 433.046 (za PVC čep)
13 - 433.046 (for PVC cover cap)
14 - PVC distancer 20x20x2*
14 - PVC packer 20x20x2*


Nosač stakla za veća opterećenja s potpornjom na okomici
Doublesided glass support for greater loads with a vertical support

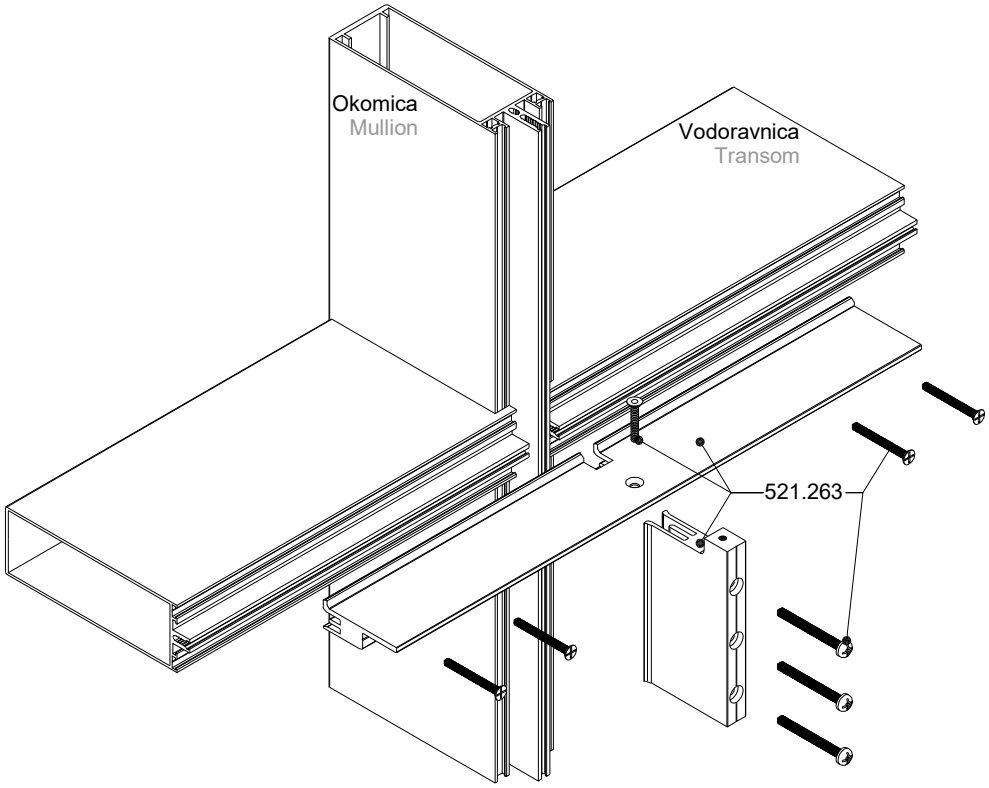

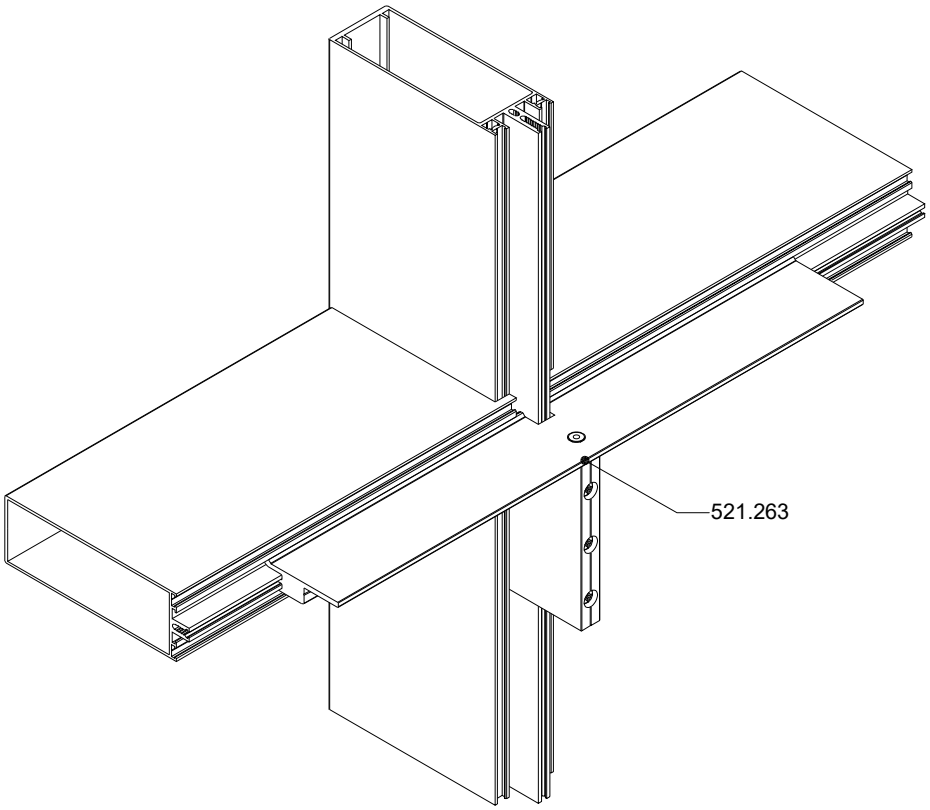



Nosač stakla za veća opterećenja s potpornjom na okomici s inox polugom
Doublesided glass support for greater loads with a vertical support and a stainless steel rod

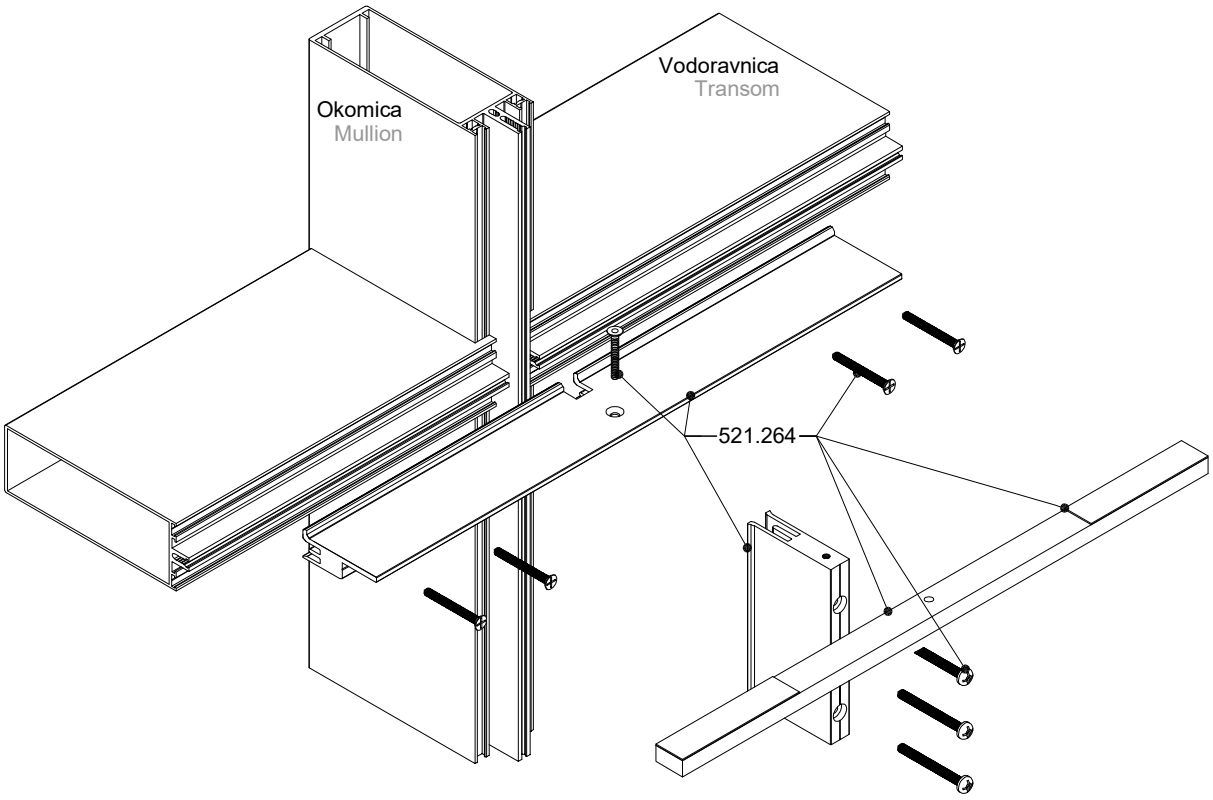

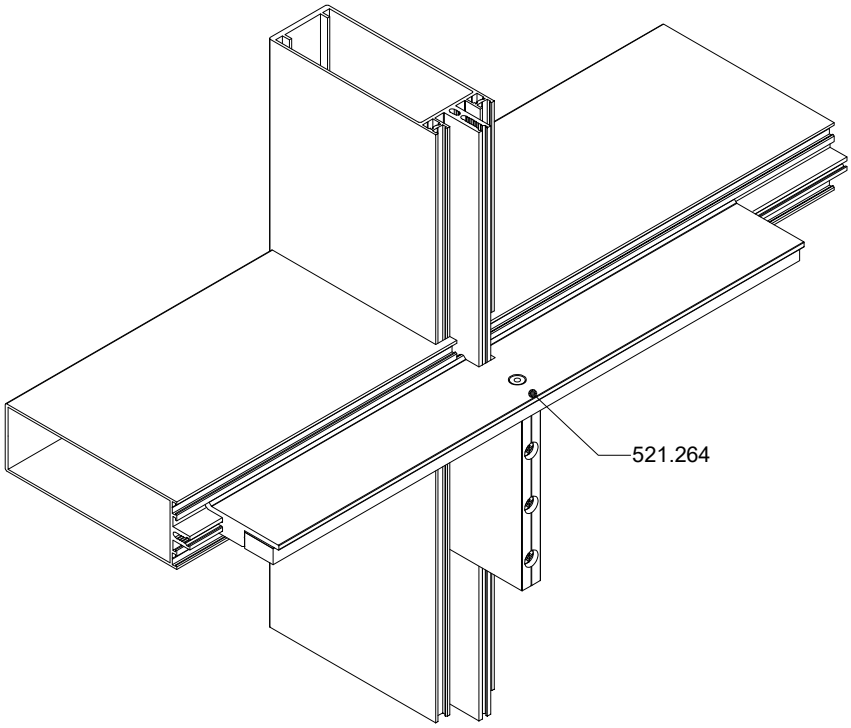



- Obrada okomice **FMO 60/270** za vodoravnicu **FMV 60/198** (gumeni odstojnik s obrubom)
- Processing of mullion **FMO 60/270** for transom **FMV 60/198** (rimmed dilatation rubber)

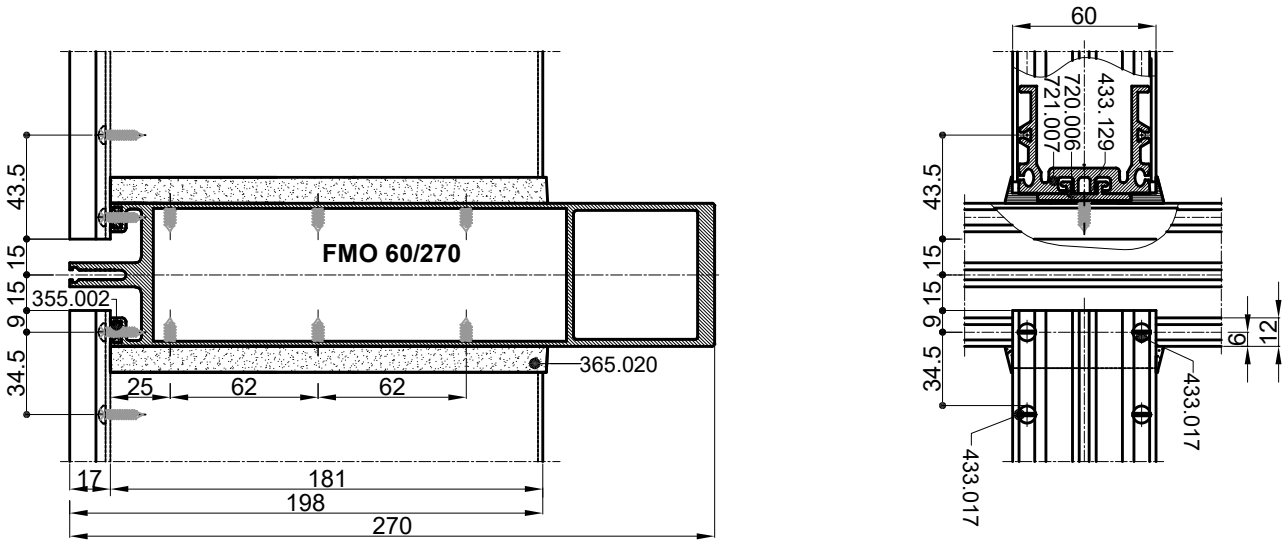

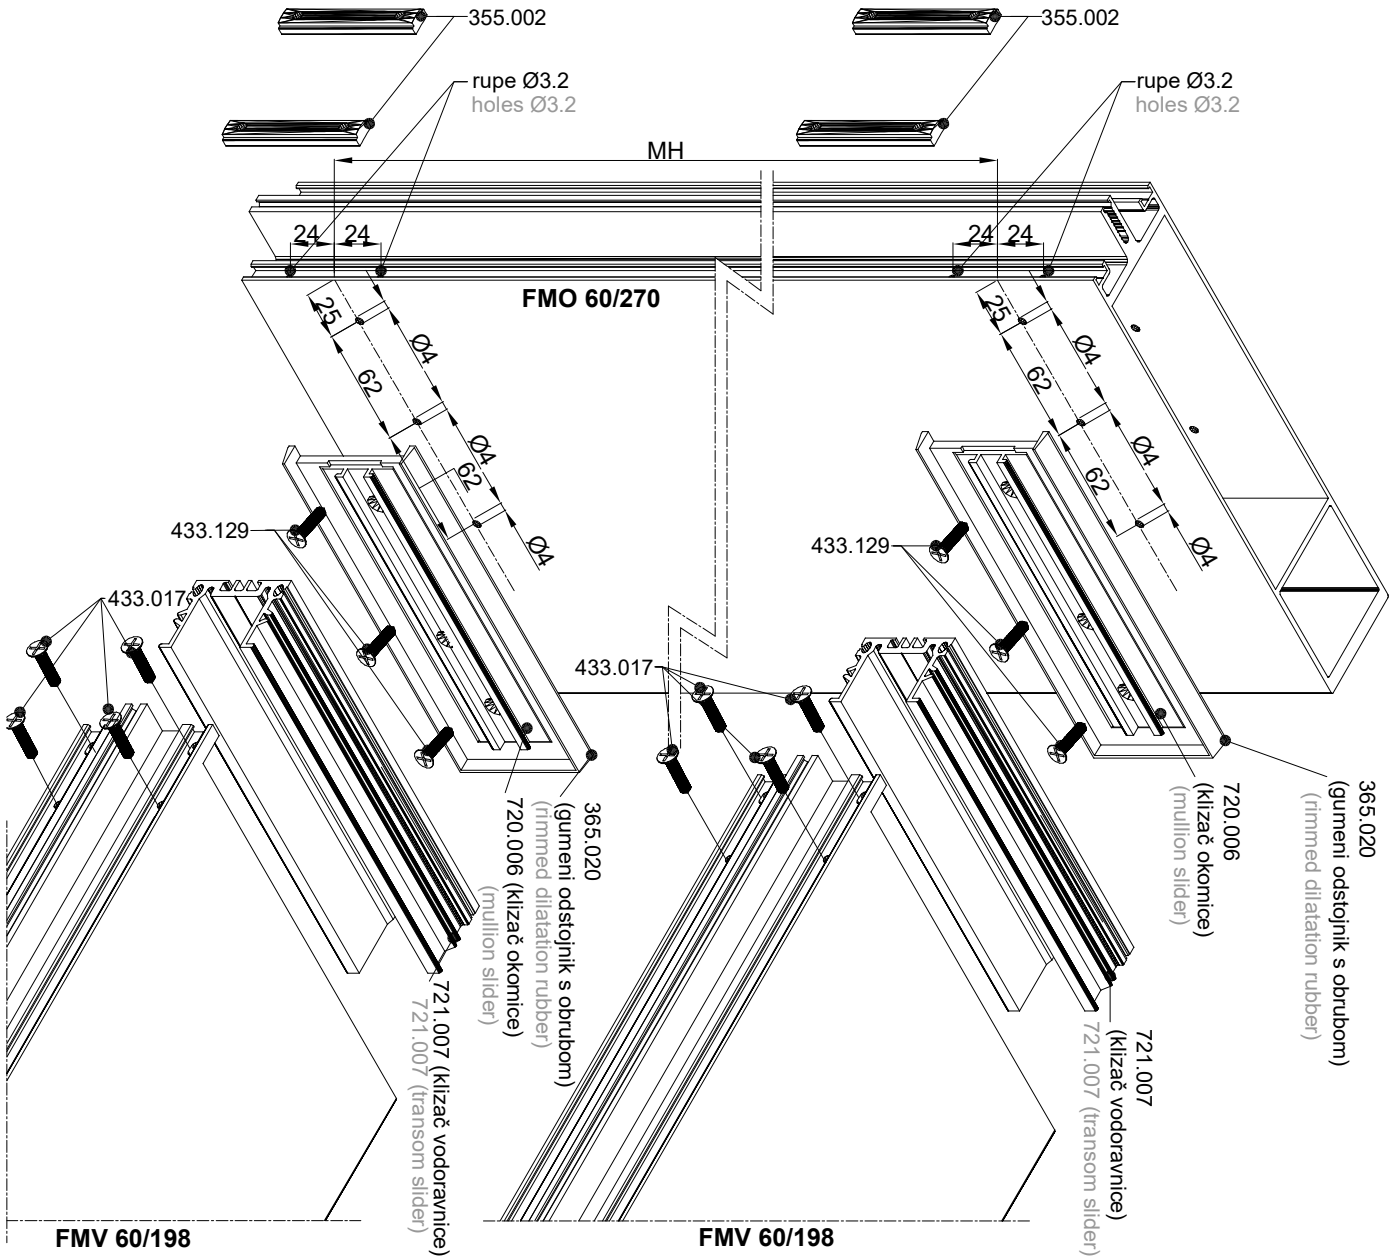


- Obrada okomice **FMO 60/200** za vodoravnicu **FMV 60/198** (gumeni odstojnik s obrubom)
- Processing of mullion **FMO 60/200** for transom **FMV 60/198** (rimmed dilatation rubber)

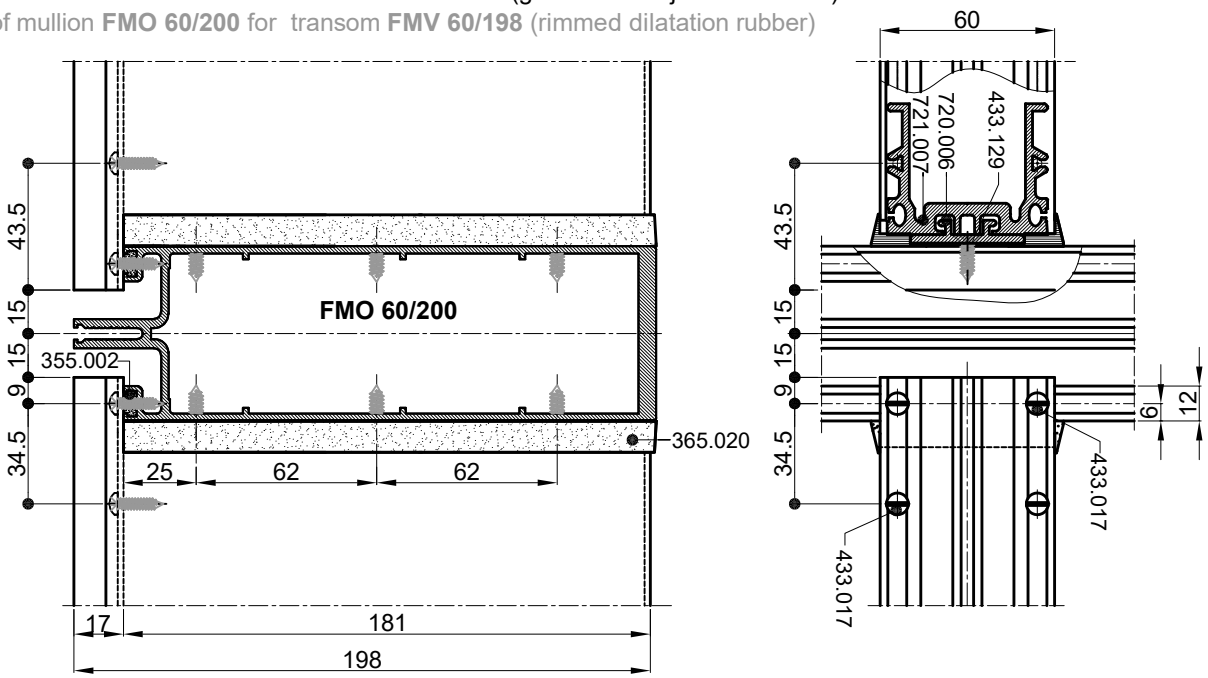


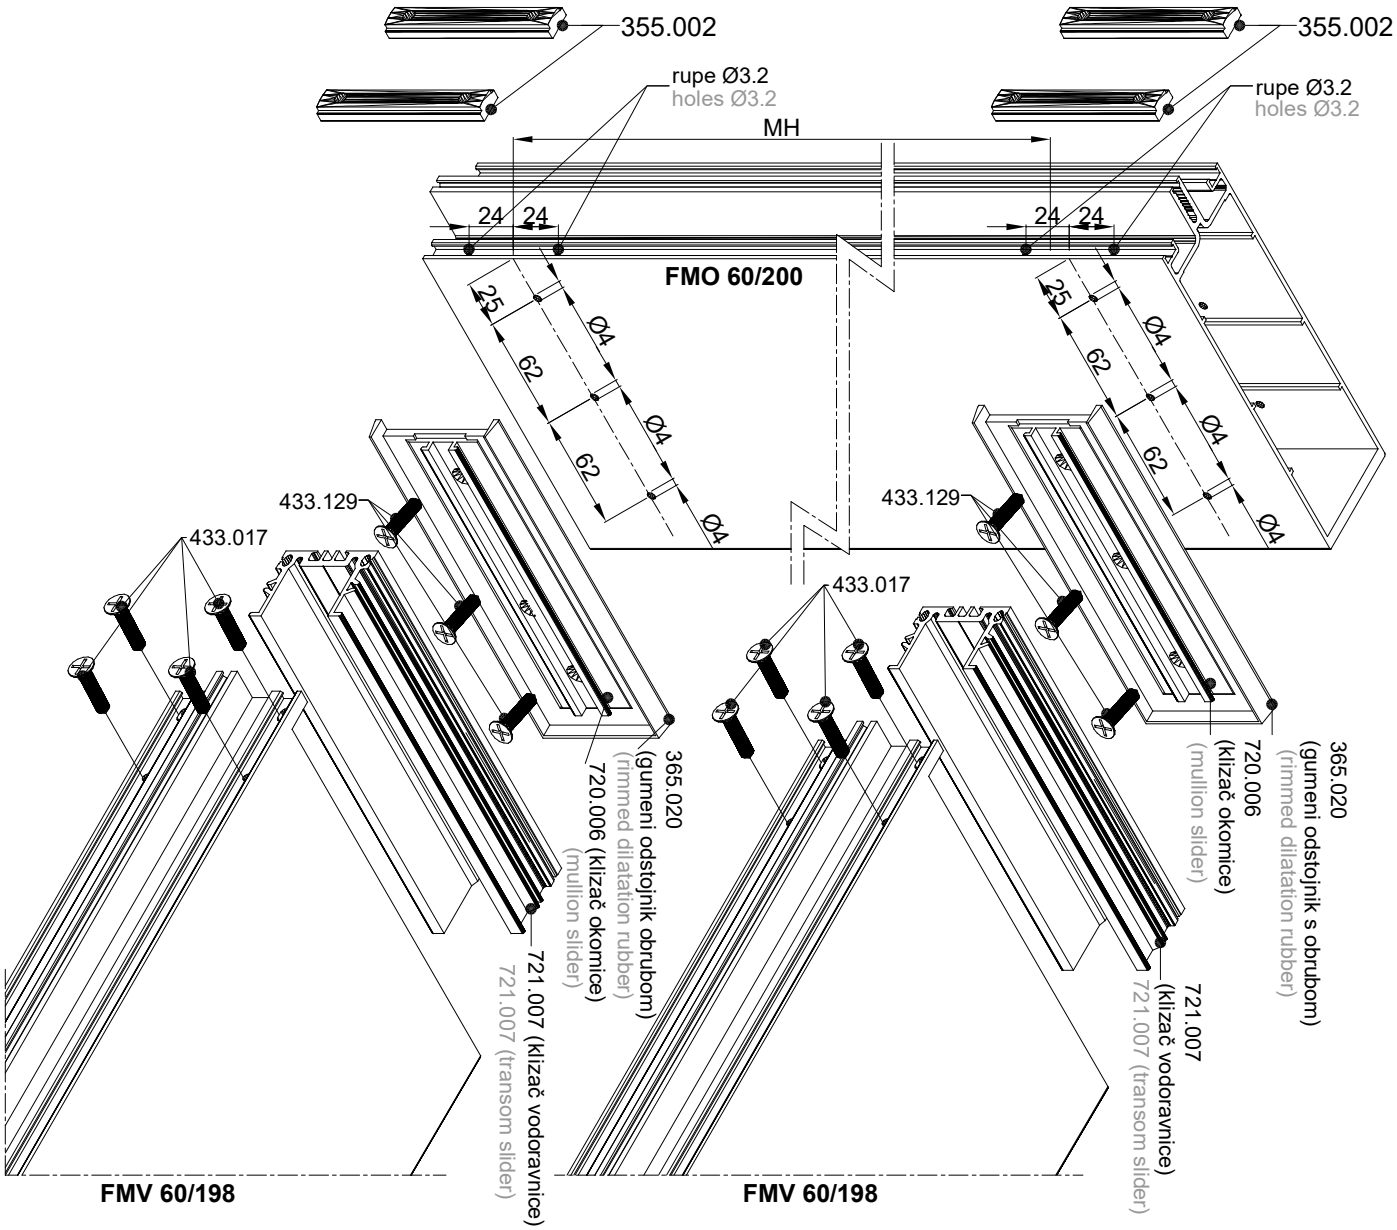


- Obrada okomice **FMR 60/158** za vodoravnicu **FMV 60/156** (gumeni odstojnik s obrubom)
- Processing of mullion **FMR 60/158** for transom **FMV 60/156** (rimmed dilatation rubber)

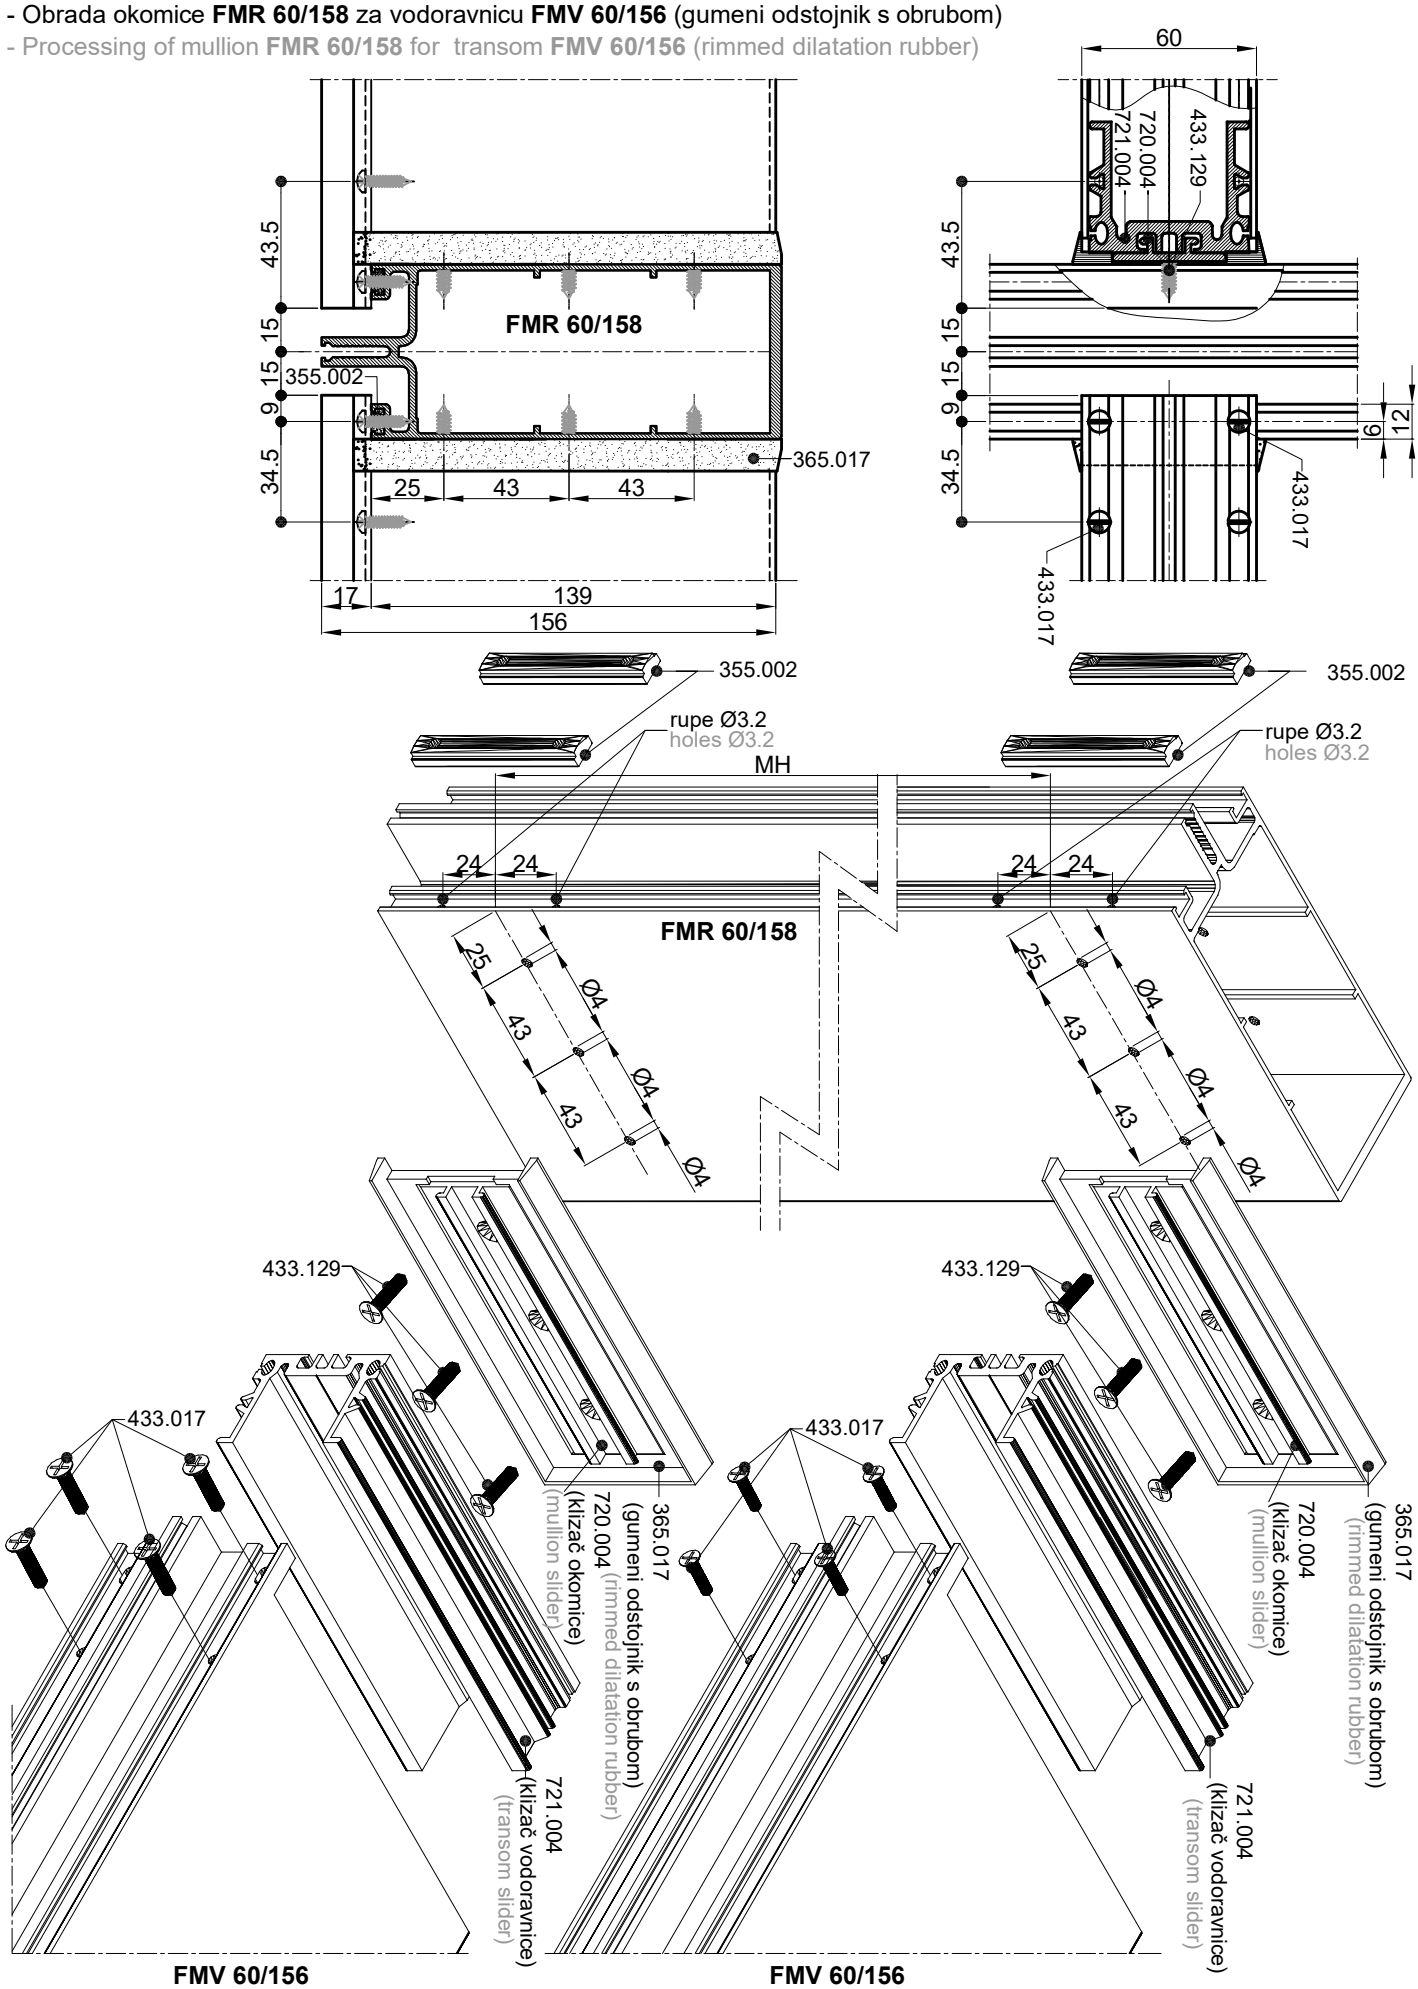


- Obrada okomice **FMO 60/118** za vodoravnicu **FMV 60/114** (gumeni odstojnik s obrubom)
- Processing of mullion **FMO 60/118** for transom **FMV 60/114** (rimmed dilatation rubber)

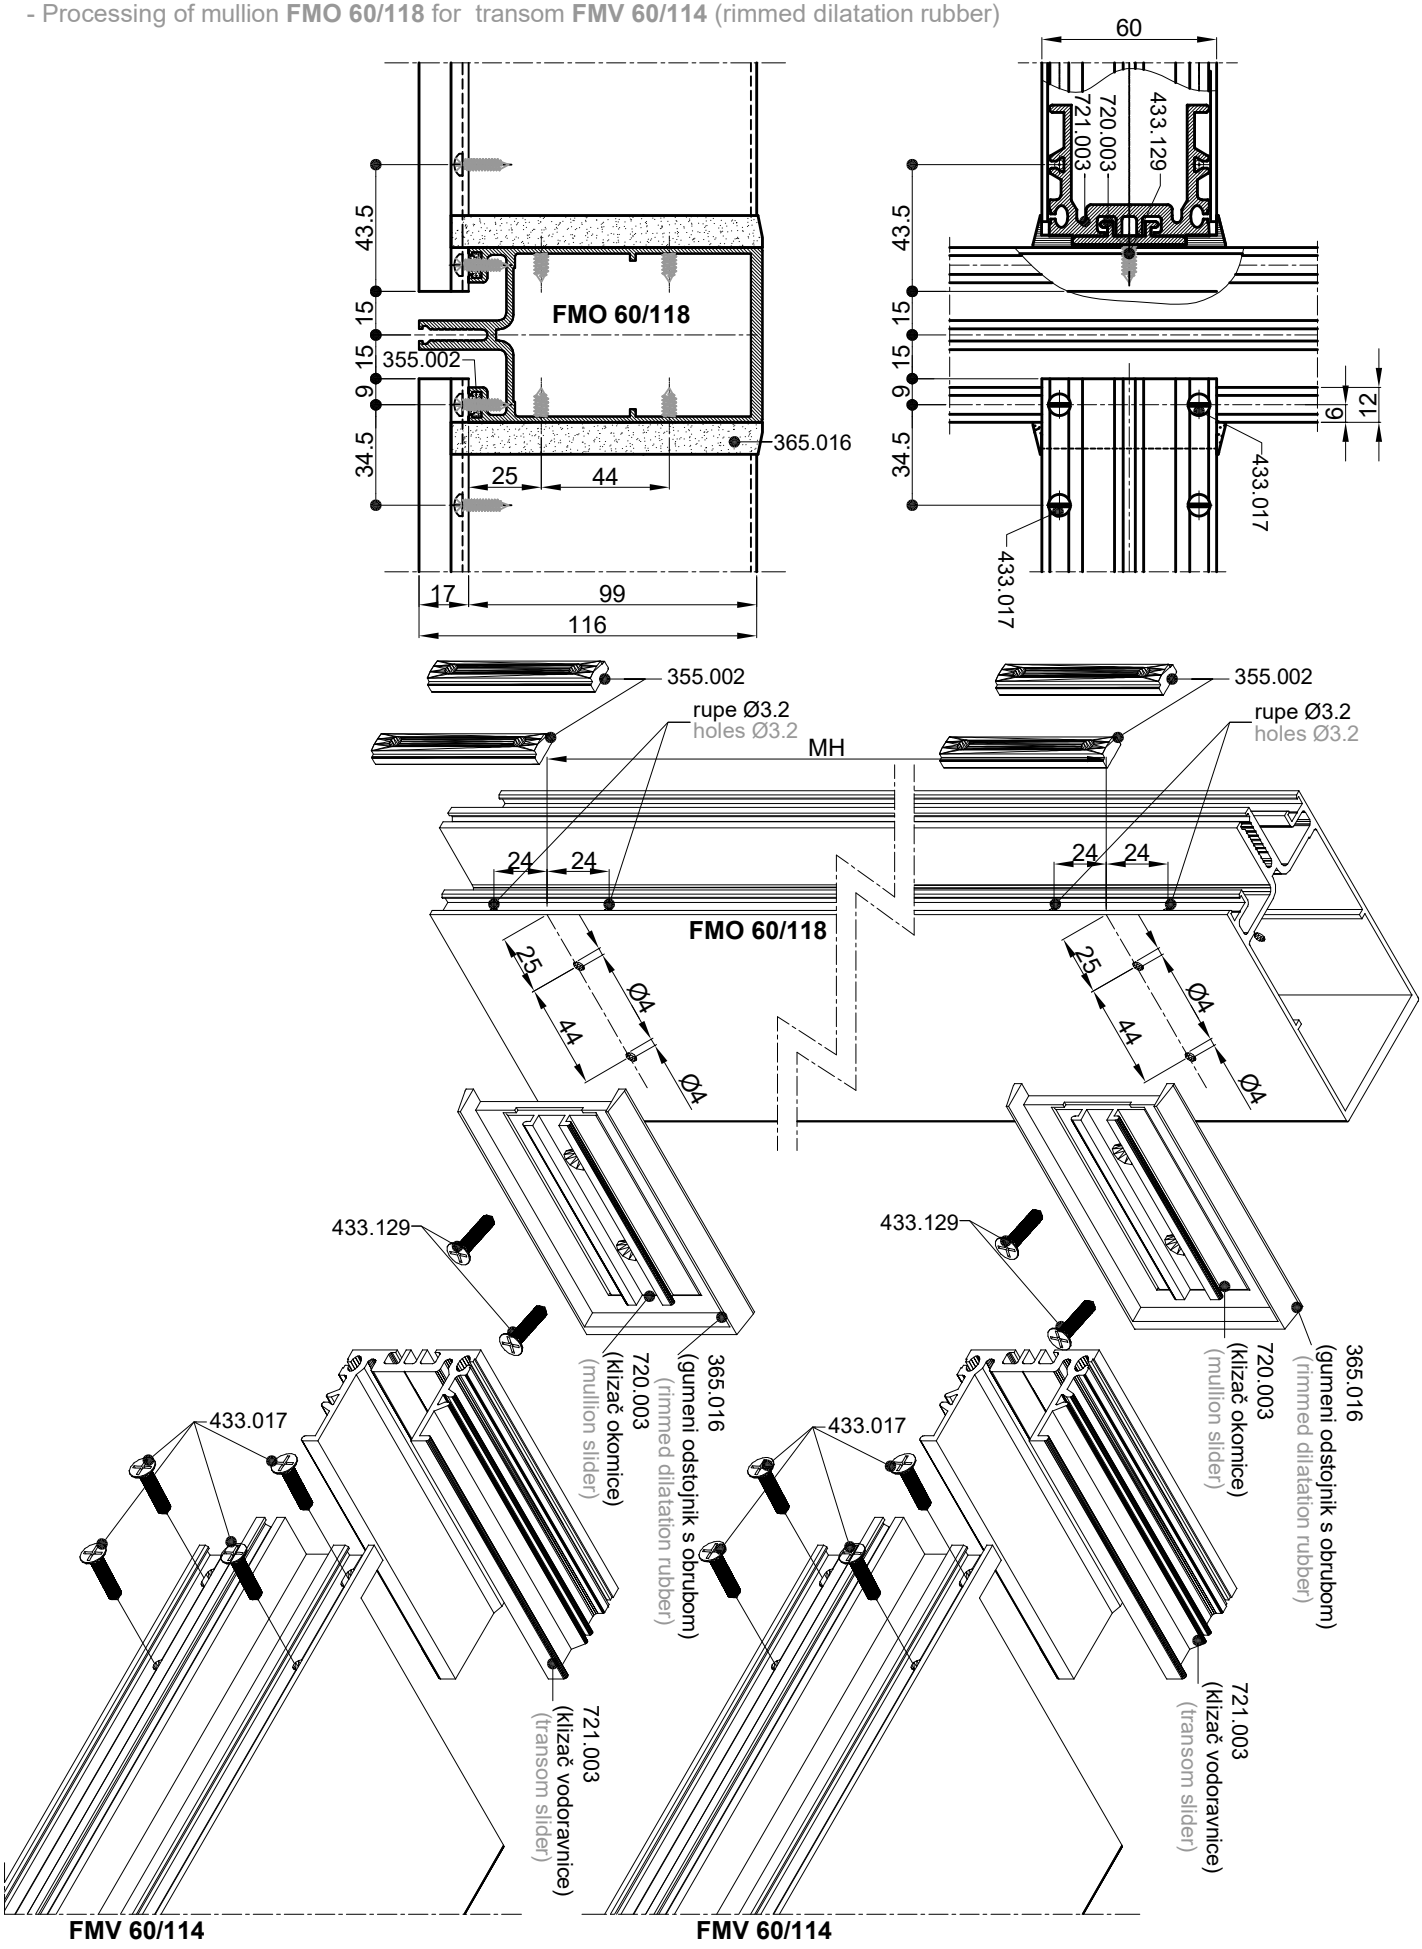


- Obrada okomice **FMO 60/88** za vodoravnicu **FMV 60/88** (gumeni odstojnik s obrubom)
- Processing of mullion **FMO 60/88** for transom **FMV 60/88** (rimmed dilatation rubber)

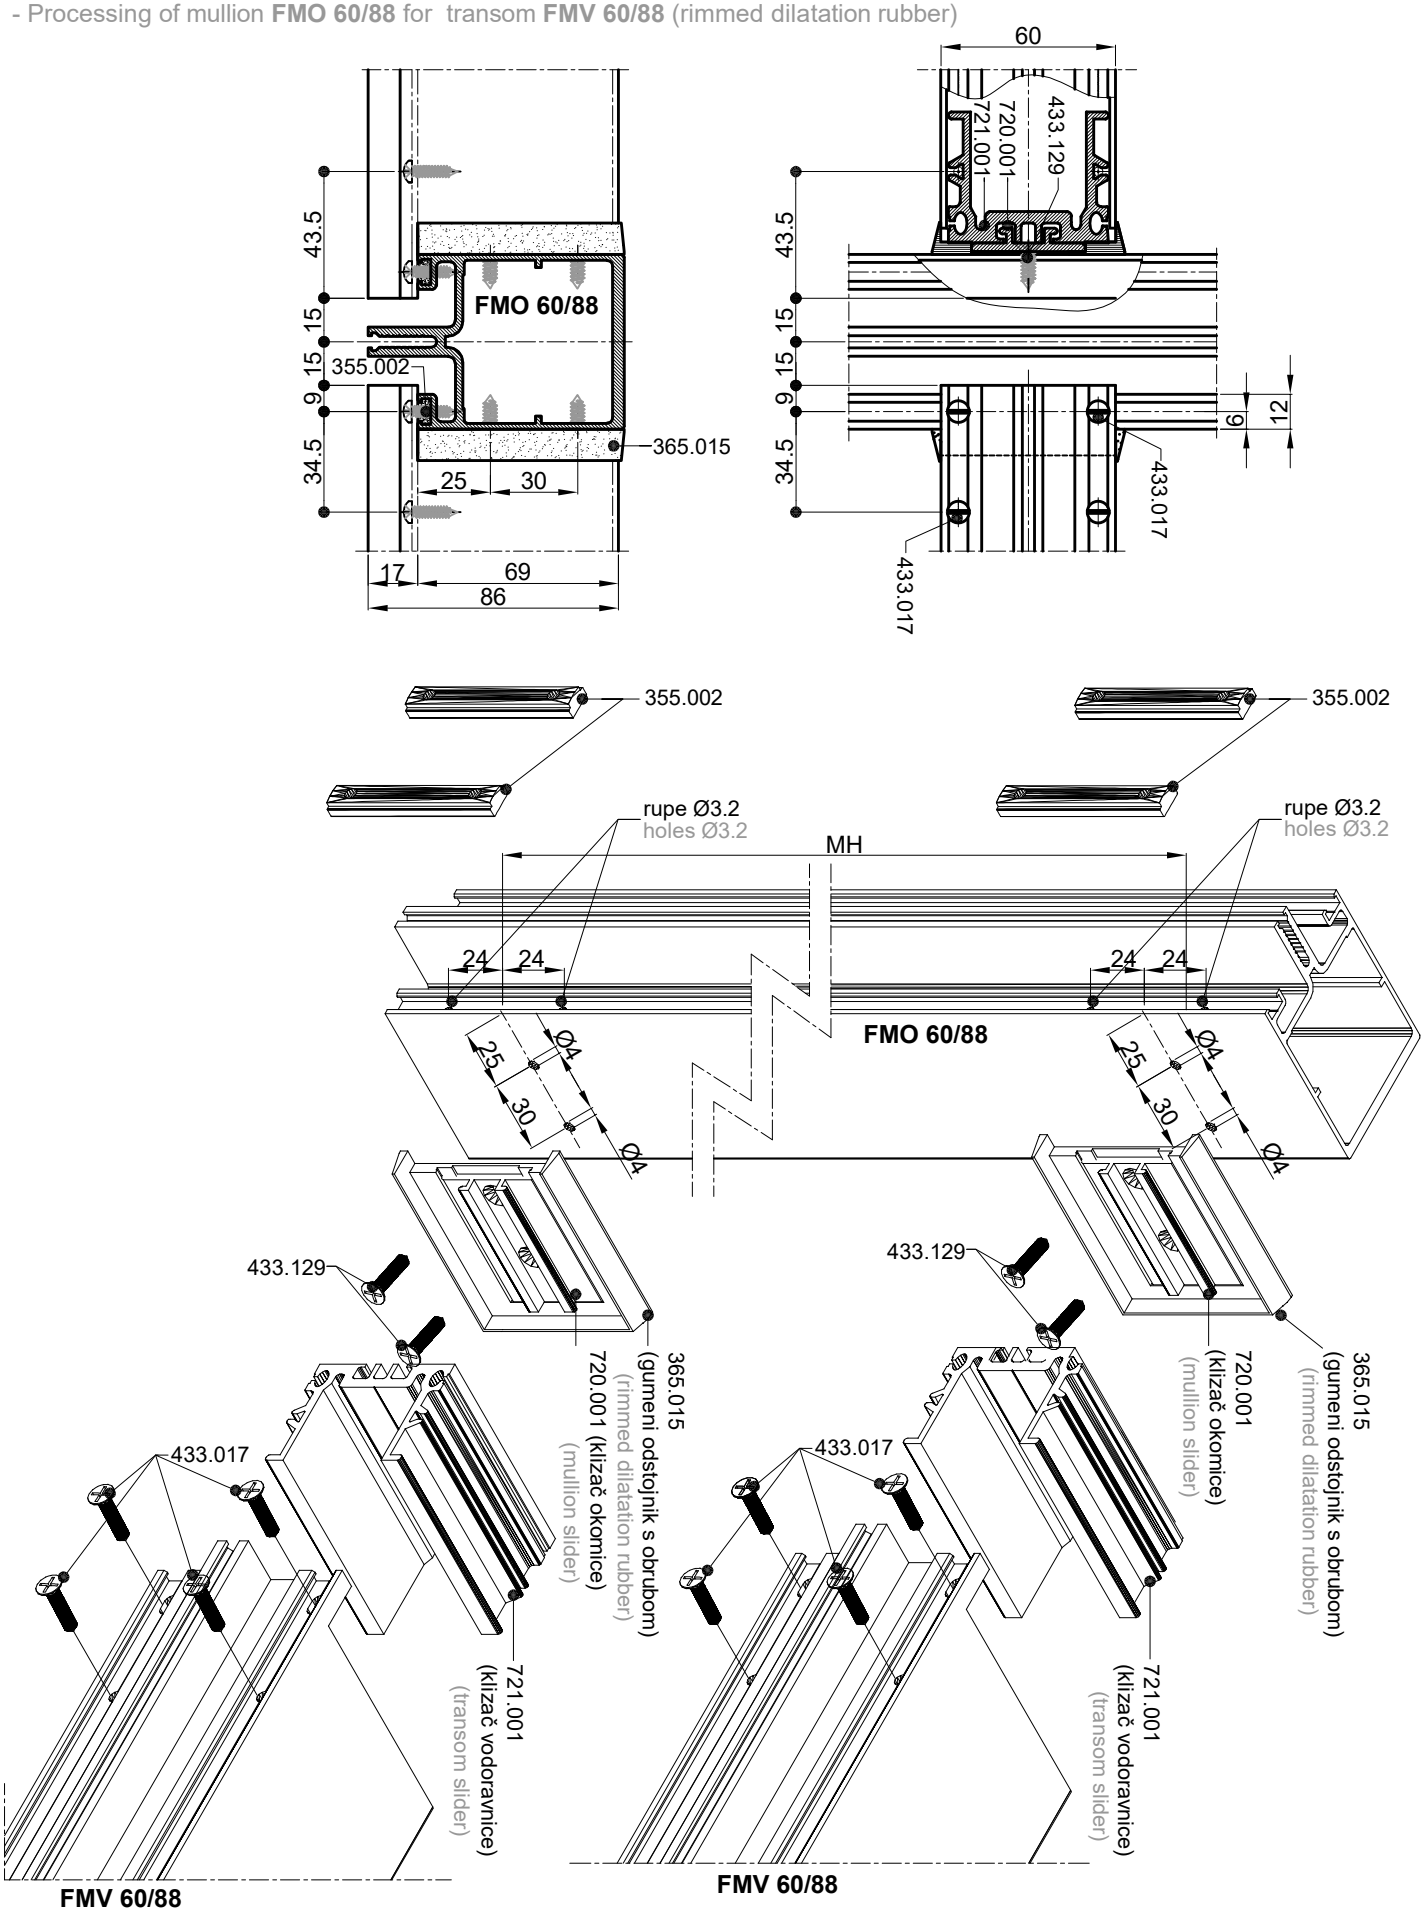


- Obrada okomice **FMO 60/270** za vodoravnicu **FMV 60/198** (ravni gumeni odstojnik)
- Processing of mullion **FMO 60/270** for transom **FMV 60/198** (flat dilatation rubber)

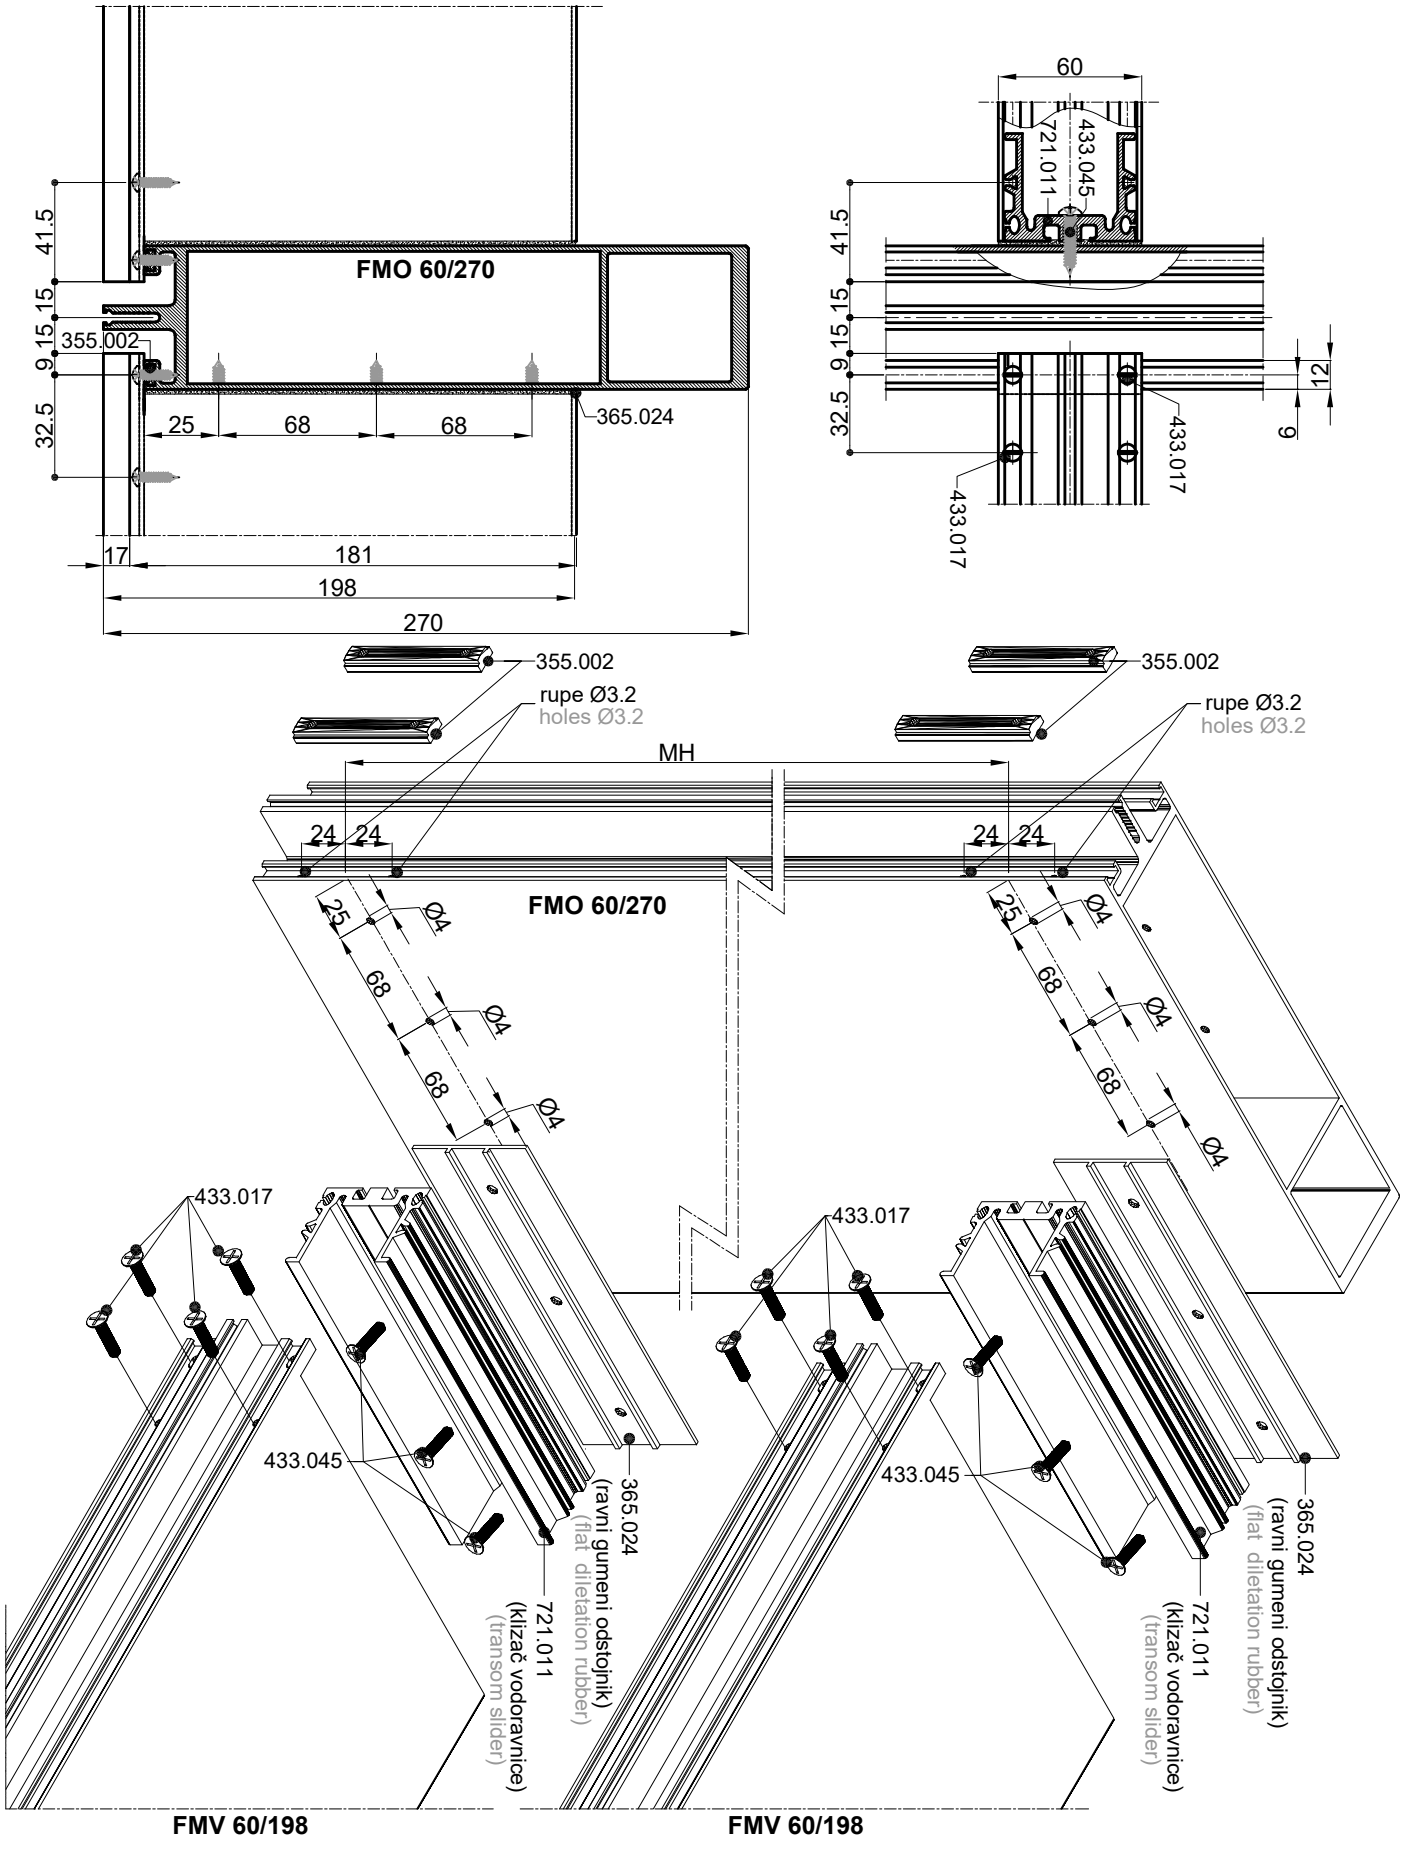



- Obrada okomice **FMO 60/200** za vodoravnicu F**MV 60/198** (ravni gumeni odstojnik)
- Processing of mullion **FMO 60/200** for transom **FMV 60/198** (flat dilatation rubber)

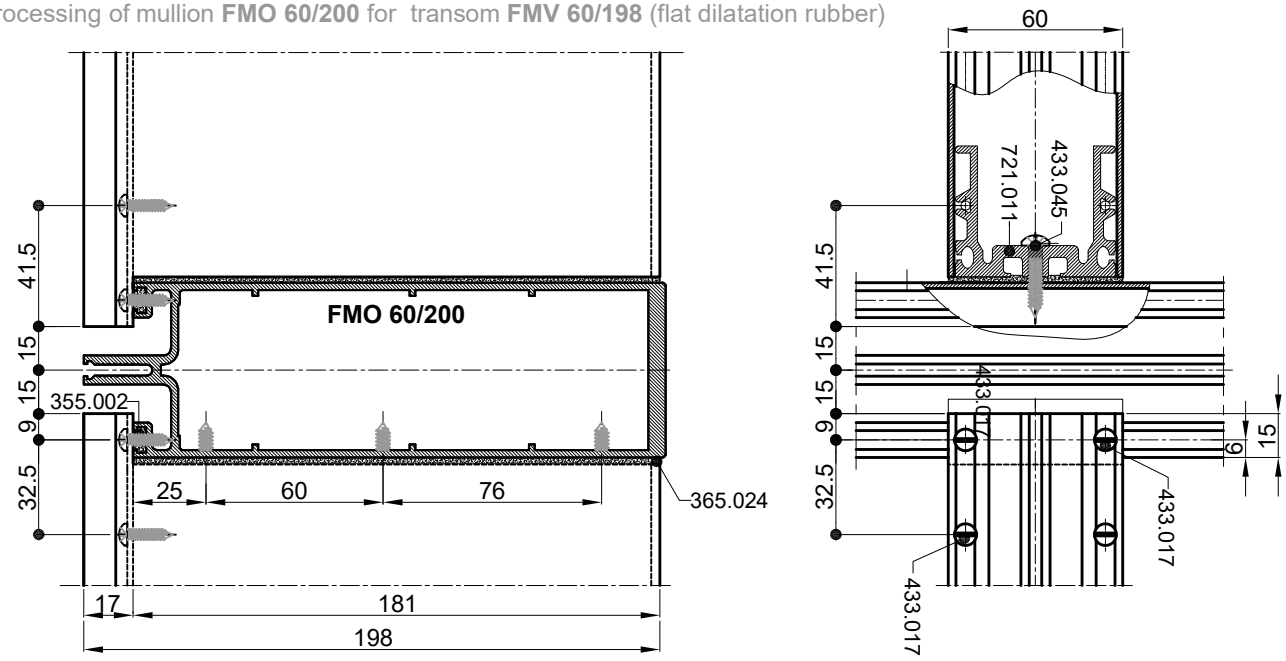

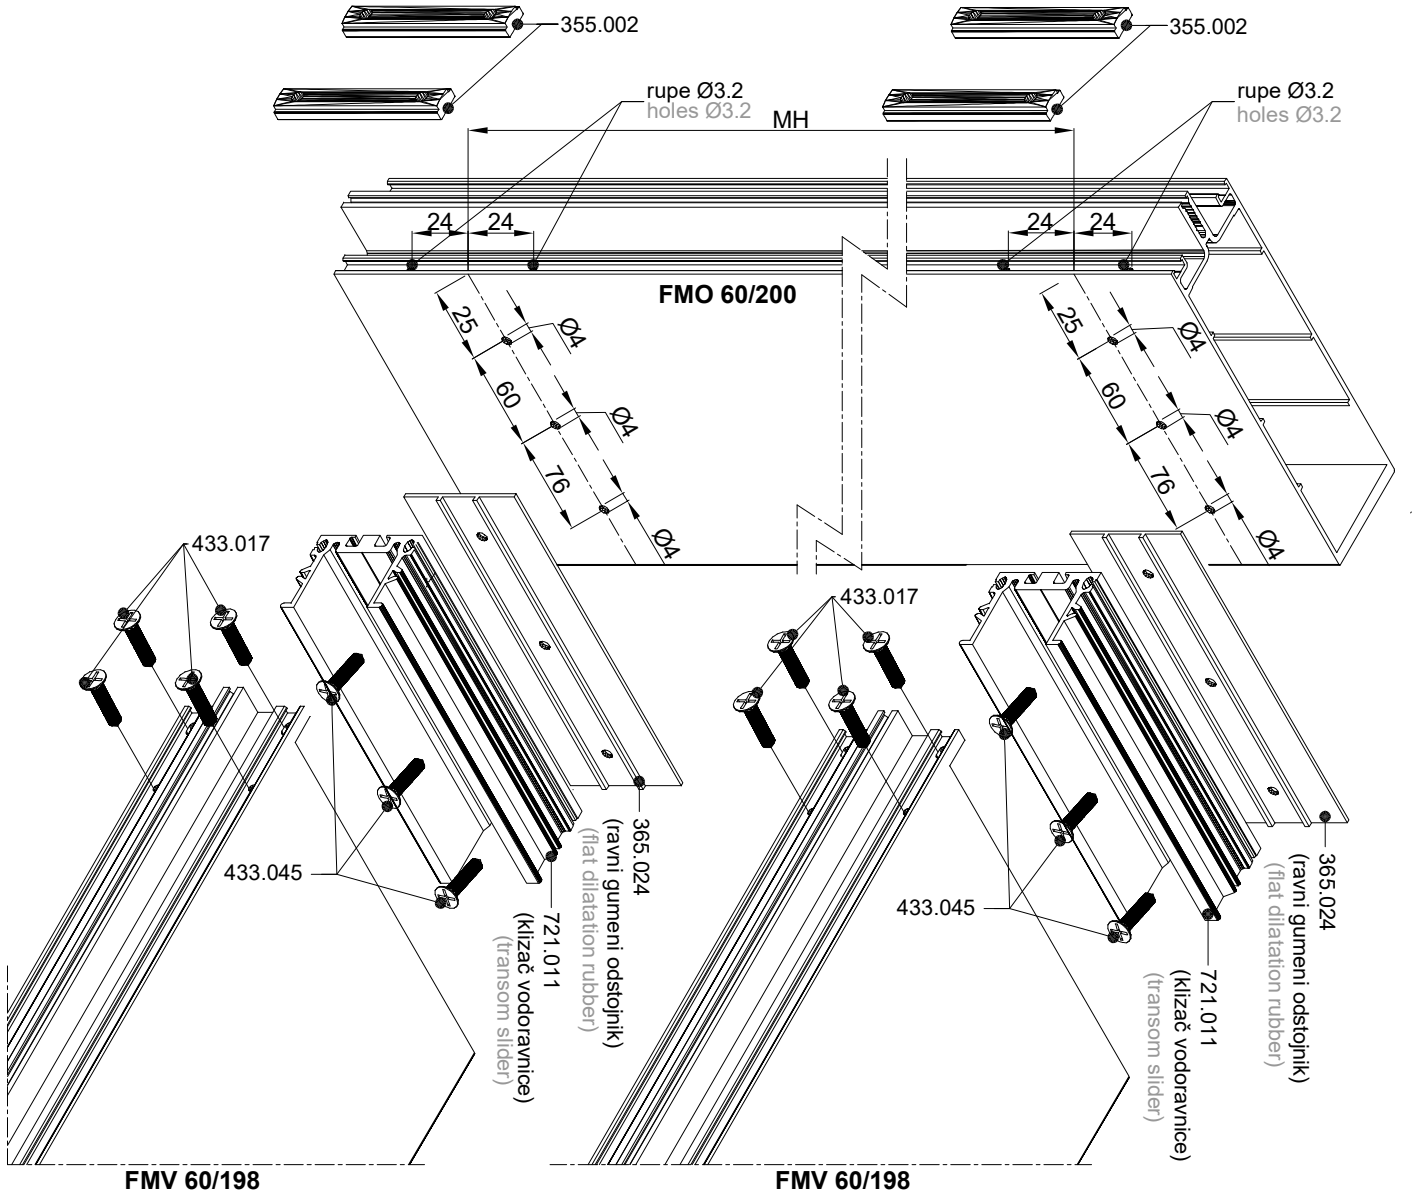



- Obrada okomice **FMR 60/158** za vodoravnicu **FMV 60/156** (ravni gumeni odstojnik)
- Processing of mullion **FMR 60/158** for transom **FMV 60/156** (flat dilatation rubber)

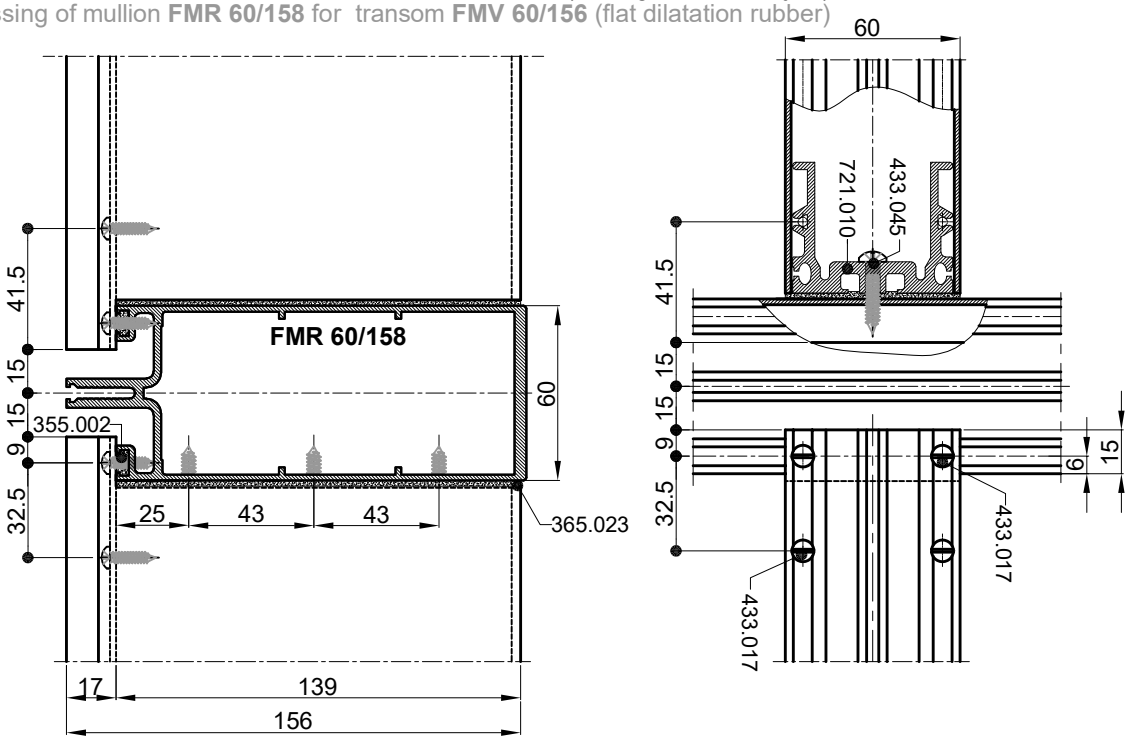


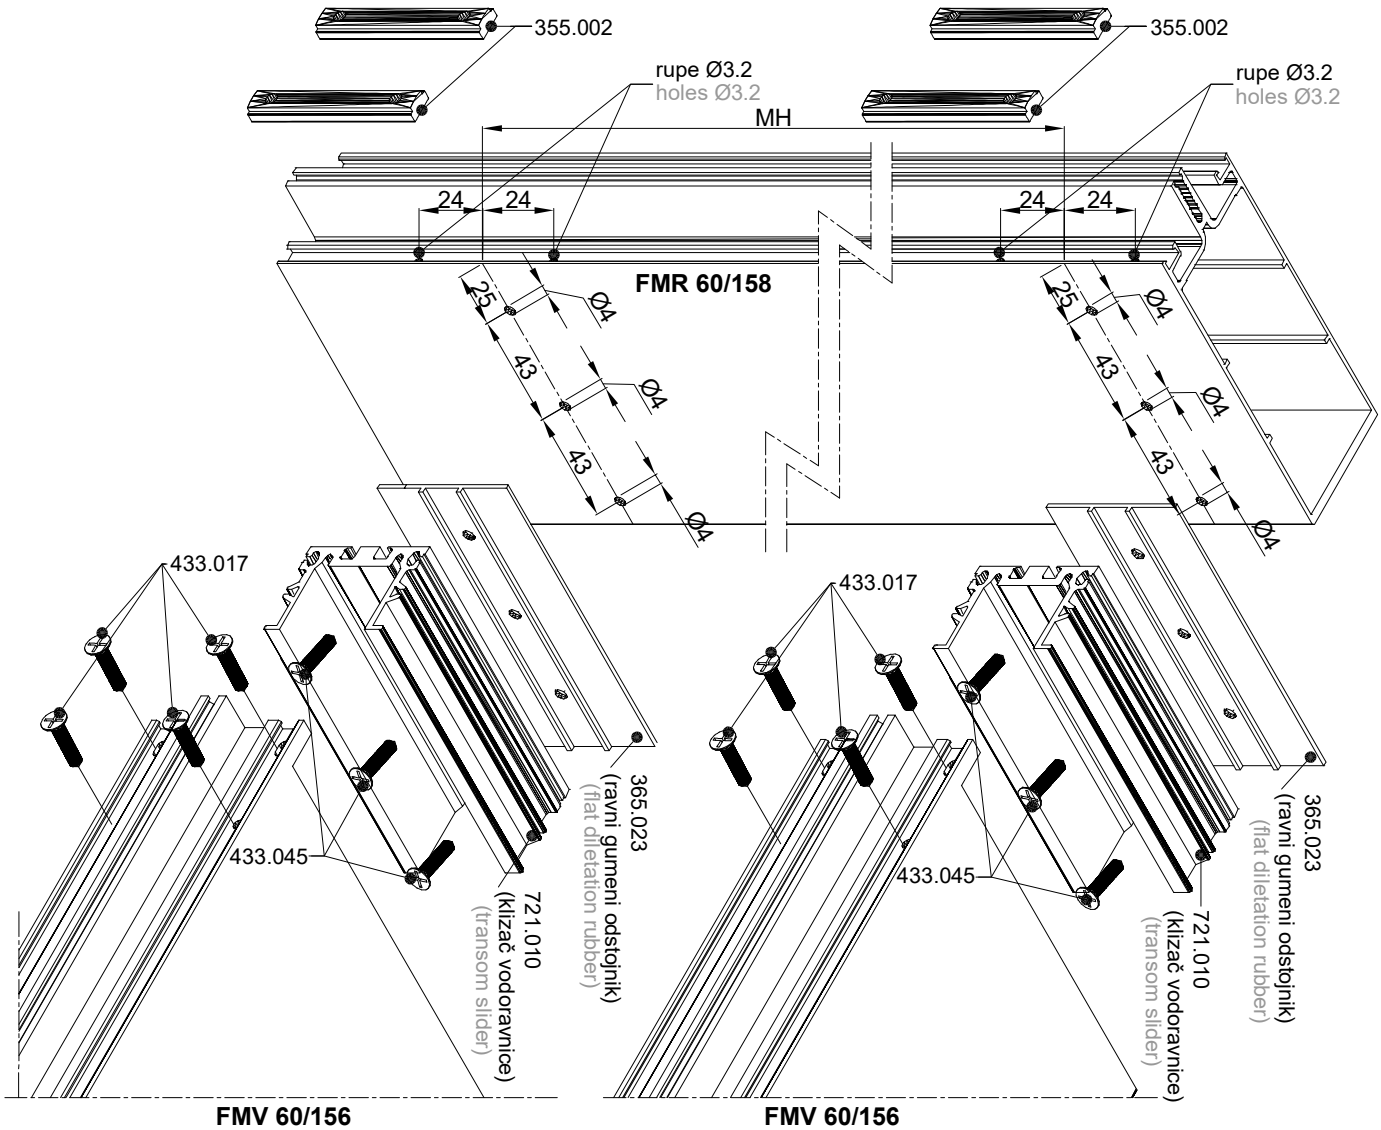

- Obrada okomice **FMO 60/118** za vodoravnicu **FMV 60/114** (ravni gumeni odstojnik)
- Processing of mullion **FMO 60/118** for transom **FMV 60/114** (flat dilatation rubber)

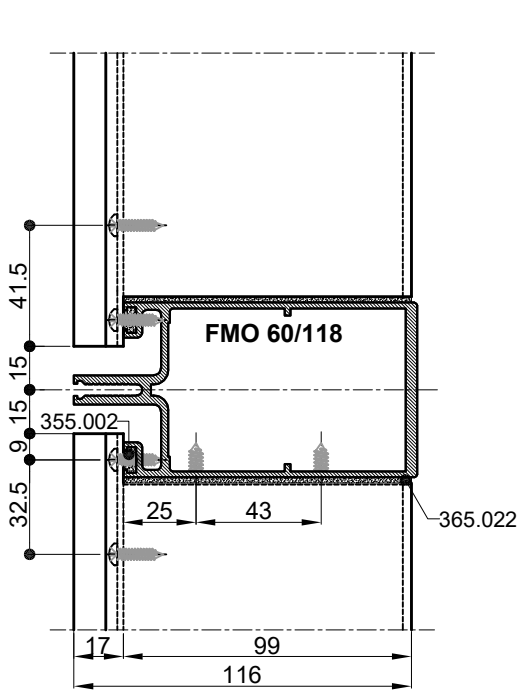


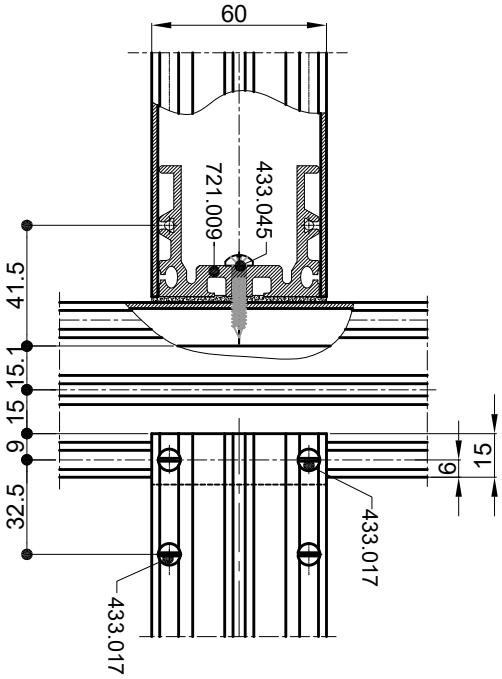


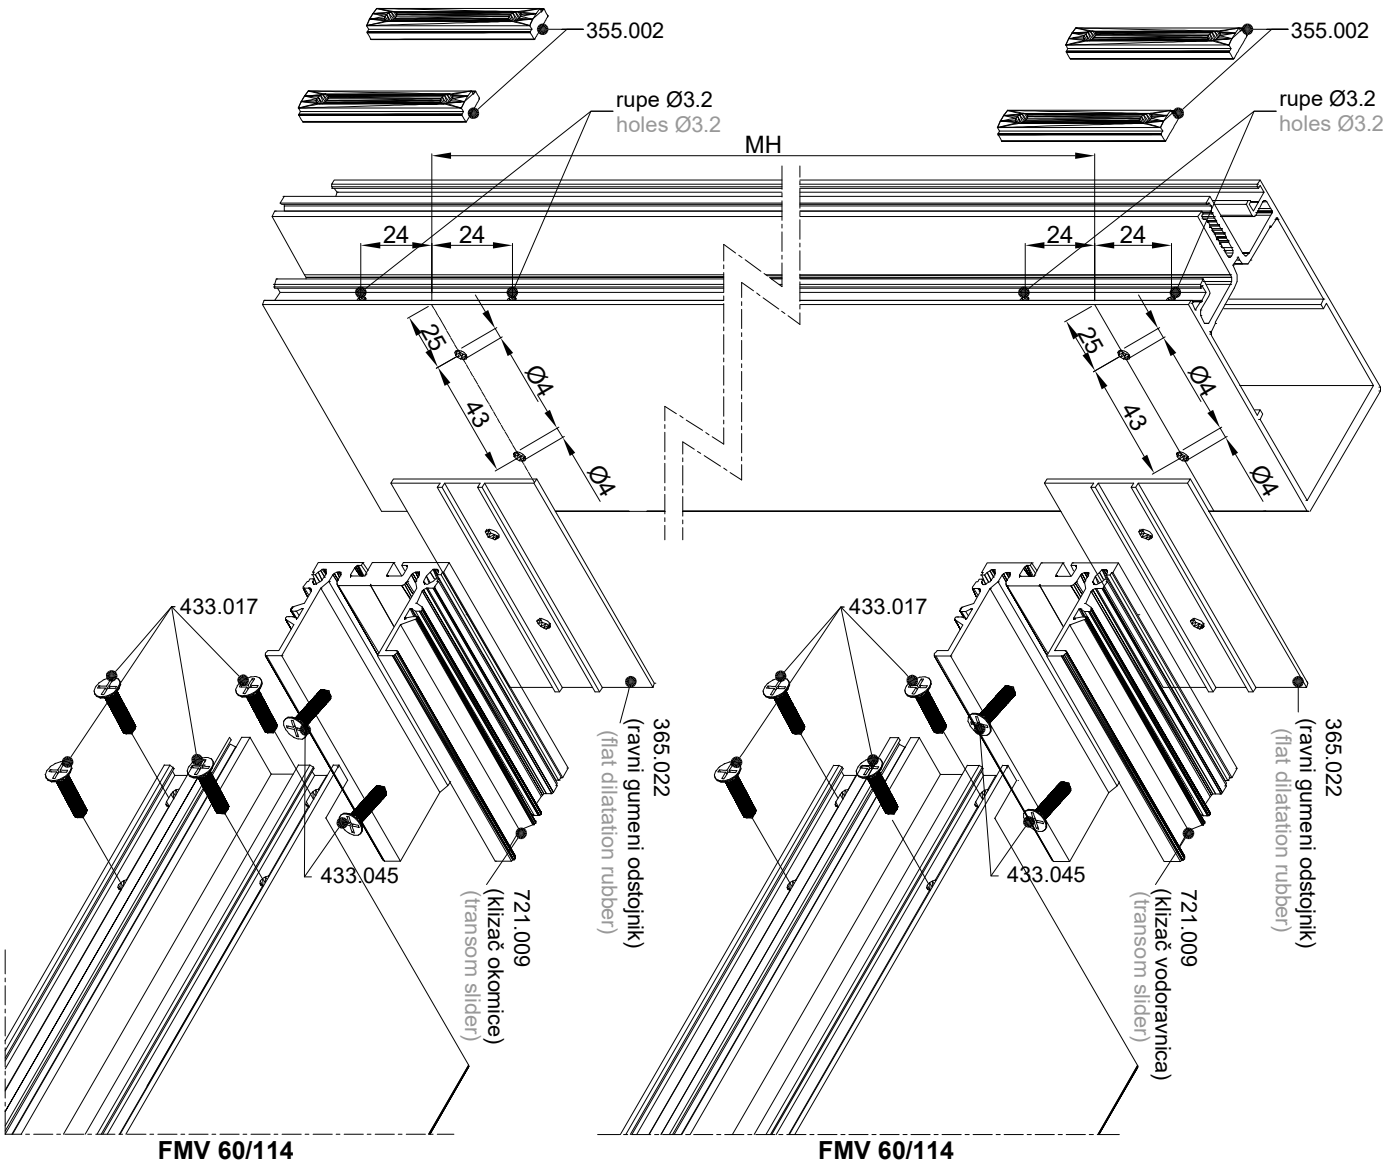


FMV 60/114 **FMV 60/114**


- Obrada okomice **FMO 60/88** za vodoravnicu **FMV 60/88** (ravni gumeni odstojnik)
- Processing of mullion **FMO 60/88** for transom **FMV 60/88** (flat dilatation rubber)

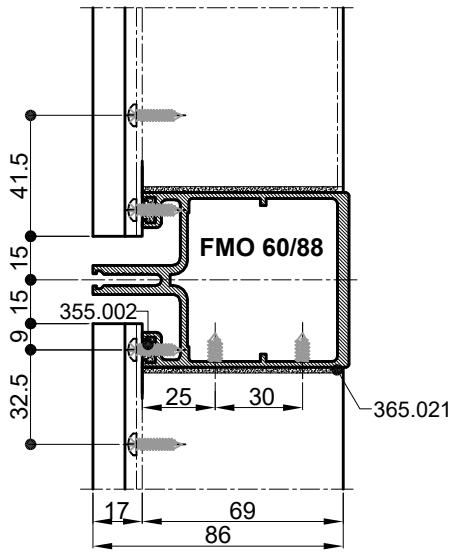


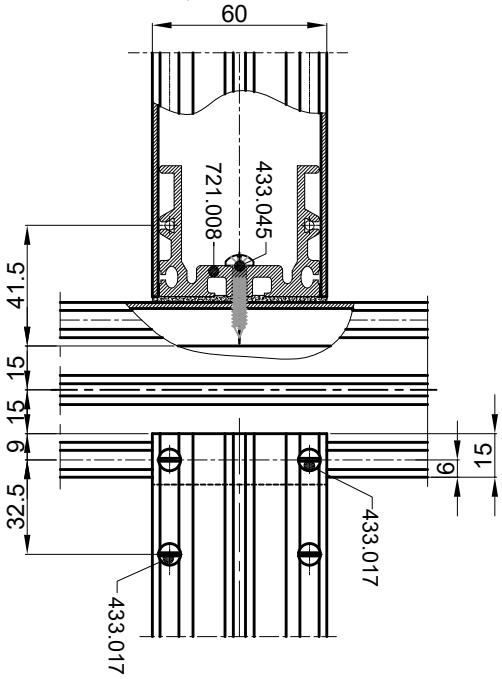

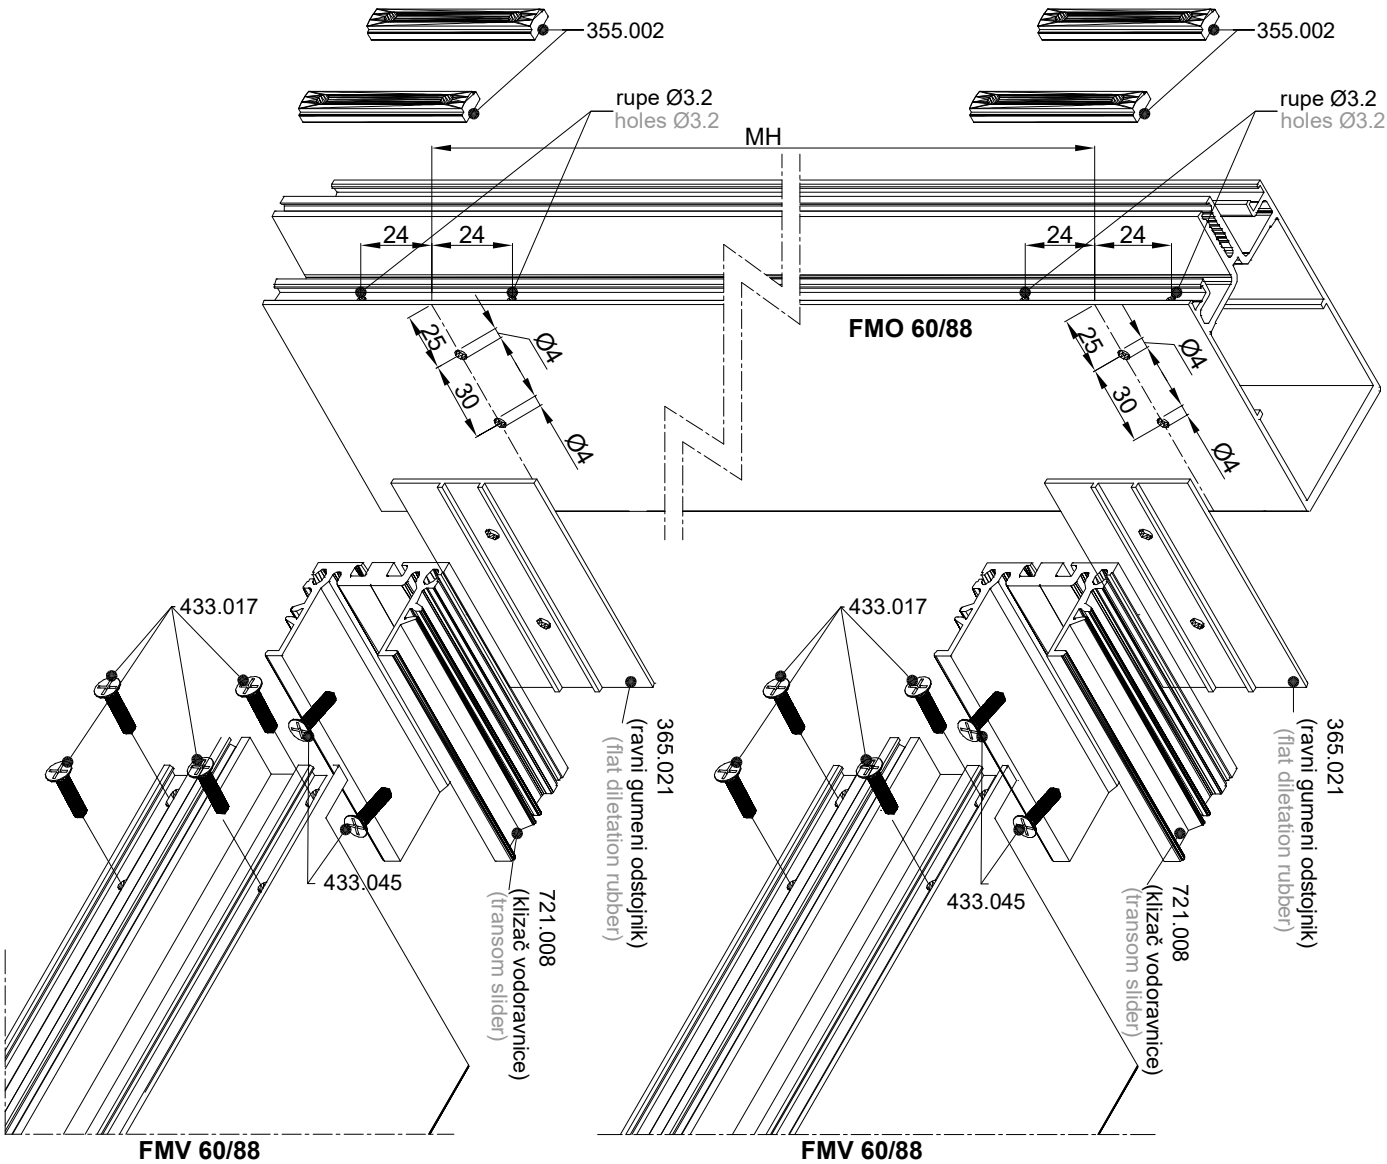



- Obrada okomice **FMO 60/270** za vodoravnicu **FMV 60/198** (na nulu)
- Processing of mullion **FMO 60/270** for transom **FMV 60/198** (without dilatation rubber)

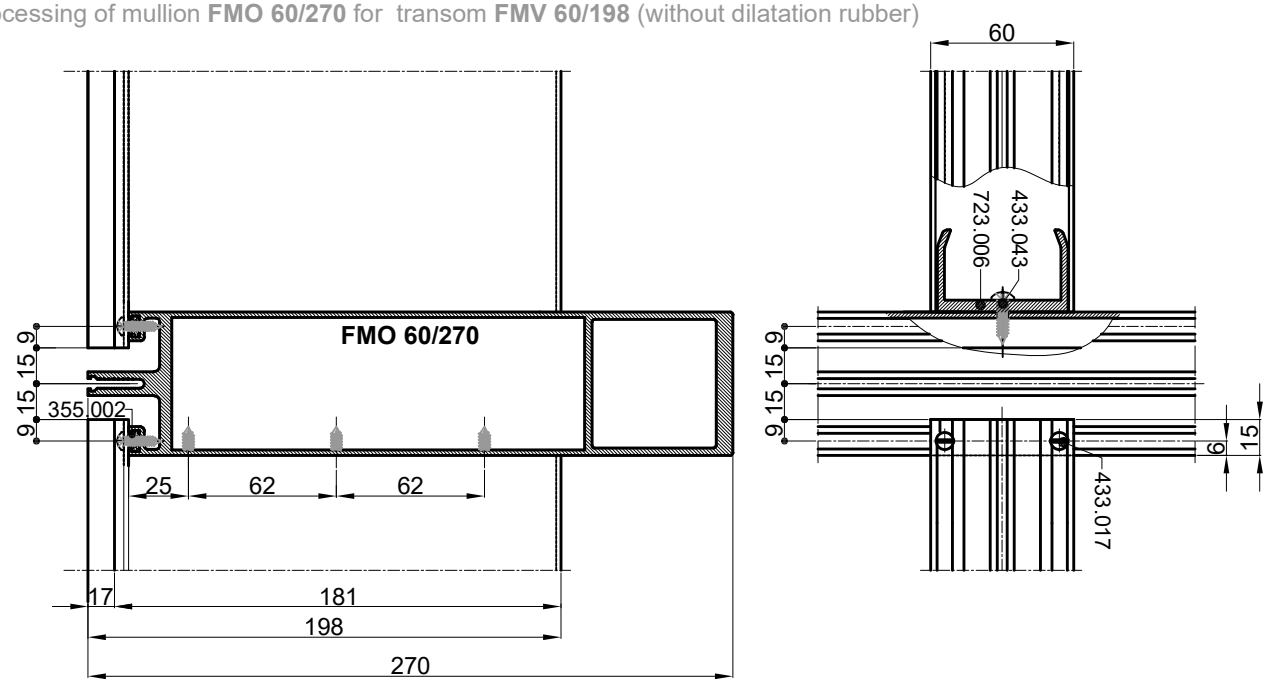

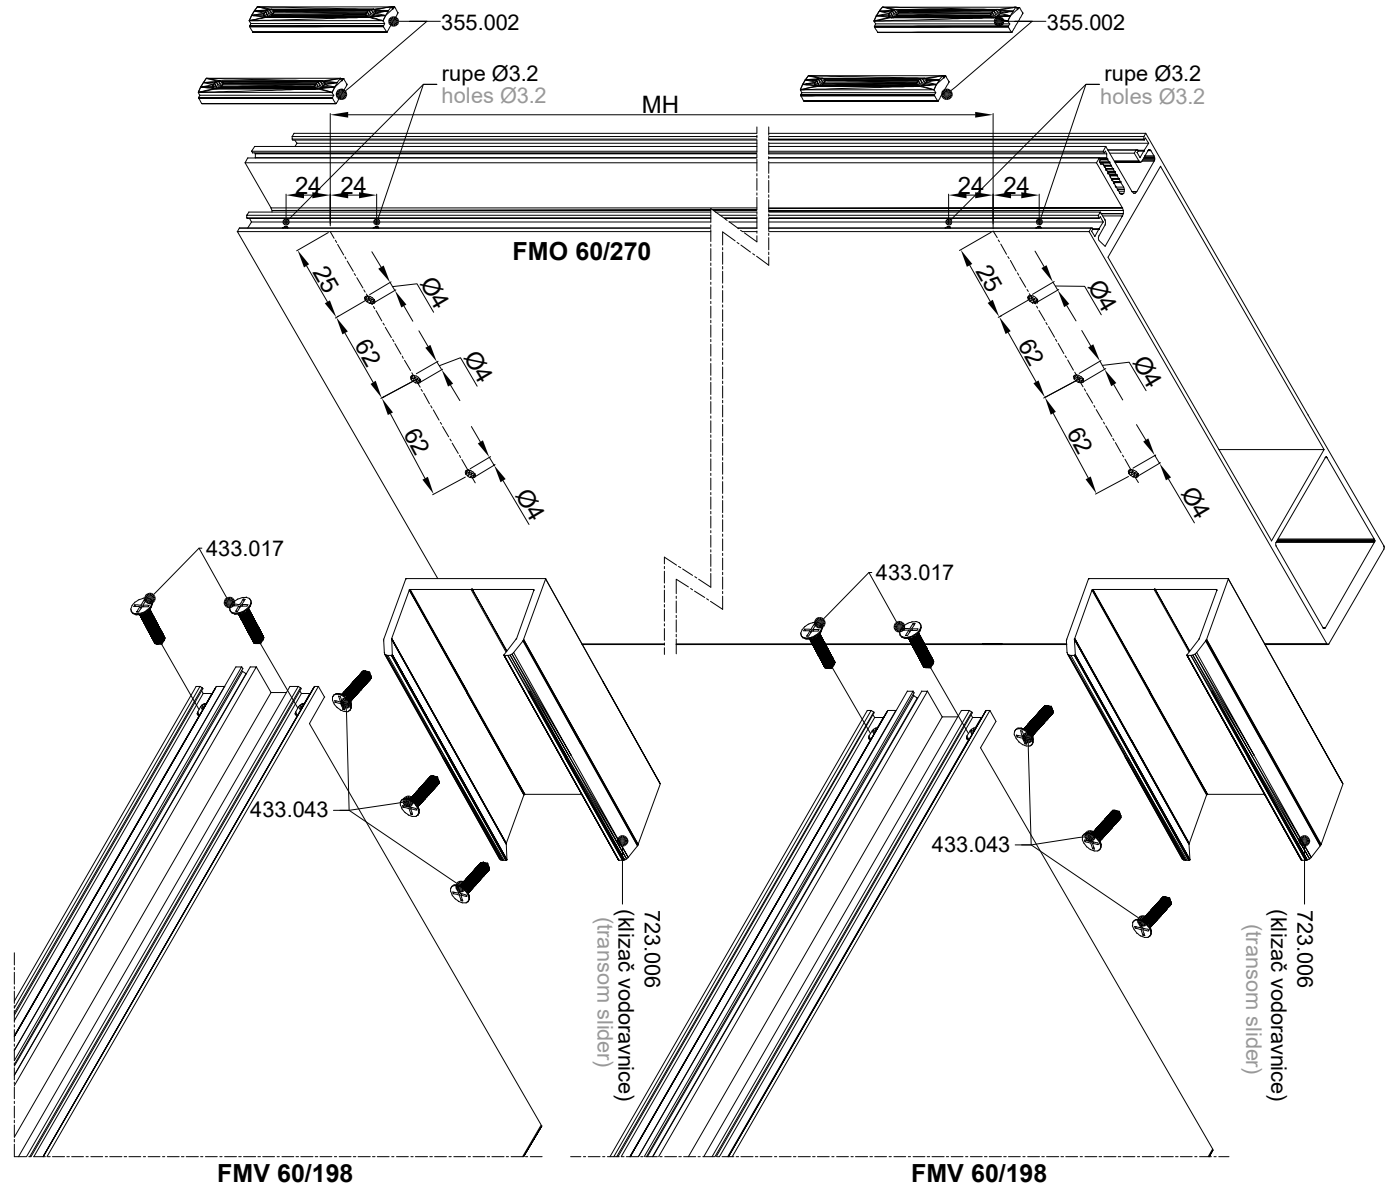


- Obrada okomice **FMO 60/200** za vodoravnicu **FMV 60/198** (na nulu)
- Processing of mullion **FMO 60/200** for transom **FMV 60/198** (without dilatation rubber)

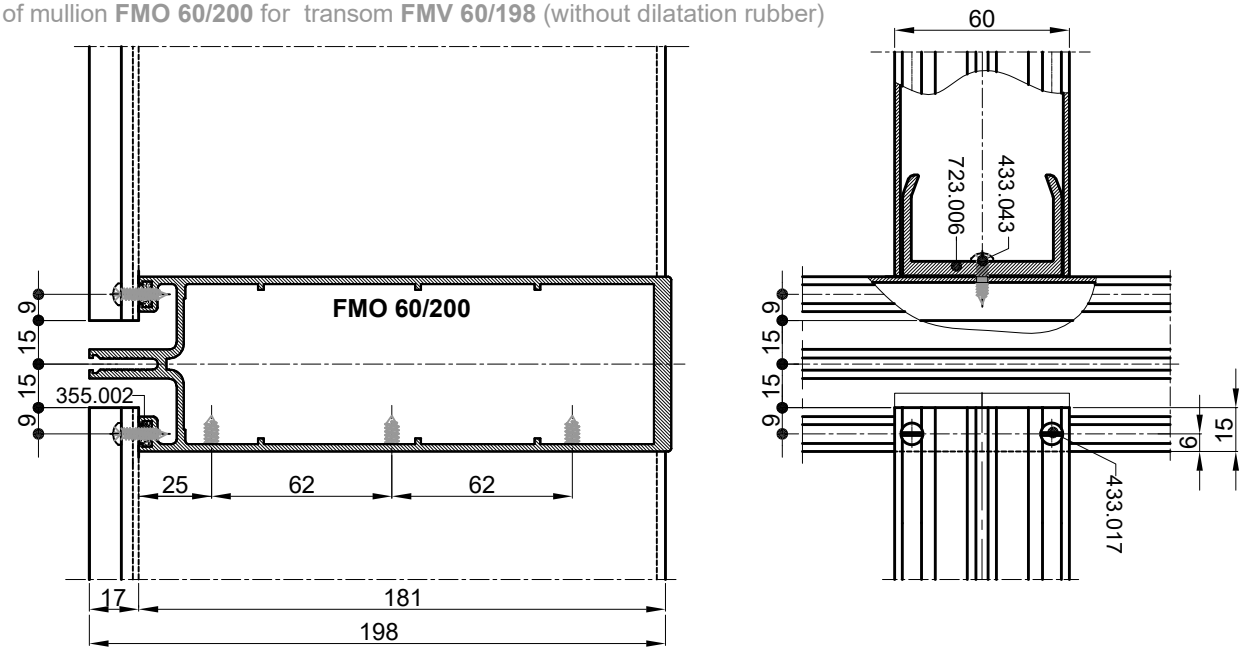


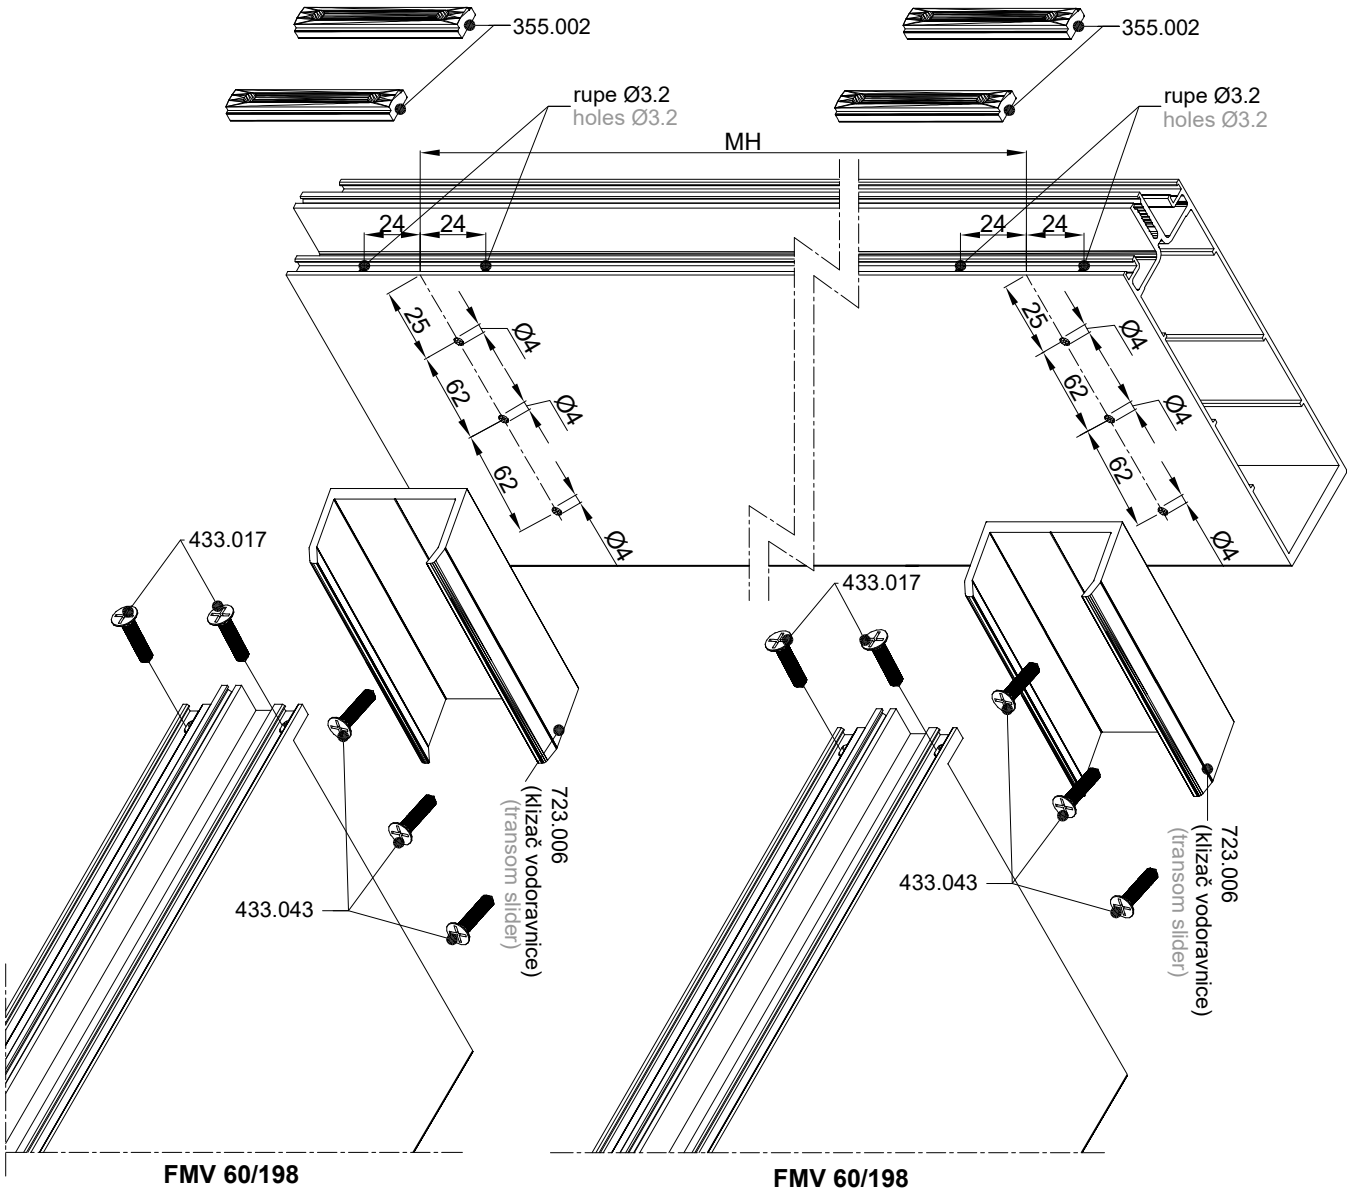


- Obrada okomice **FMR 60/158** za vodoravnicu **FMV 60/156** (na nulu)
- Processing of mullion **FMR 60/158** for transom **FMV 60/156** (without dilatation rubber)

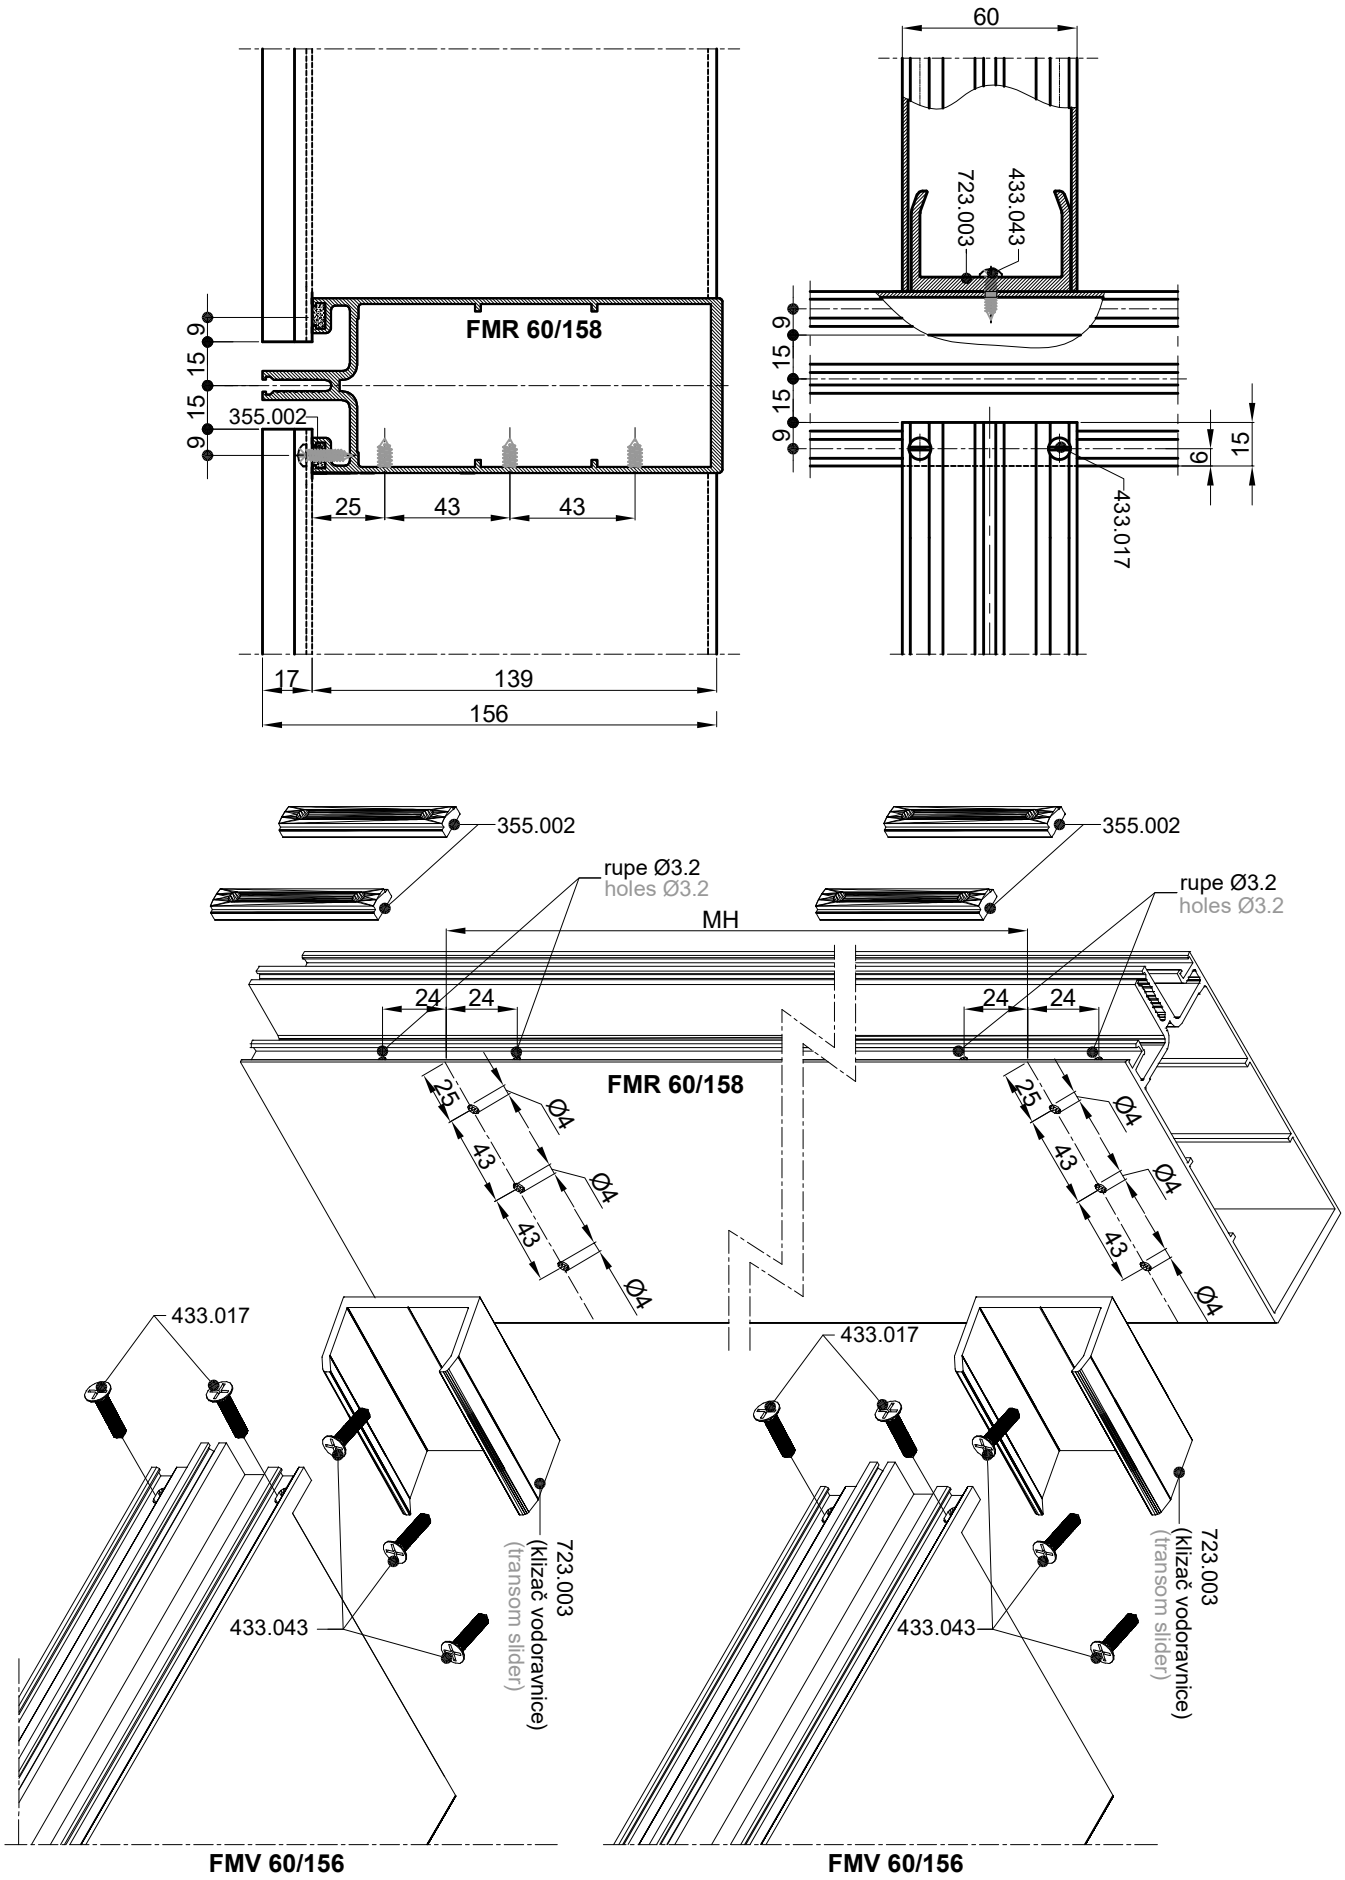


- Obrada okomice **FMO 60/118** za vodoravnicu **FMV 60/114** (na nulu)
- Processing of mullion **FMO 60/118** for transom **FMV 60/114** (without dilatation rubber)

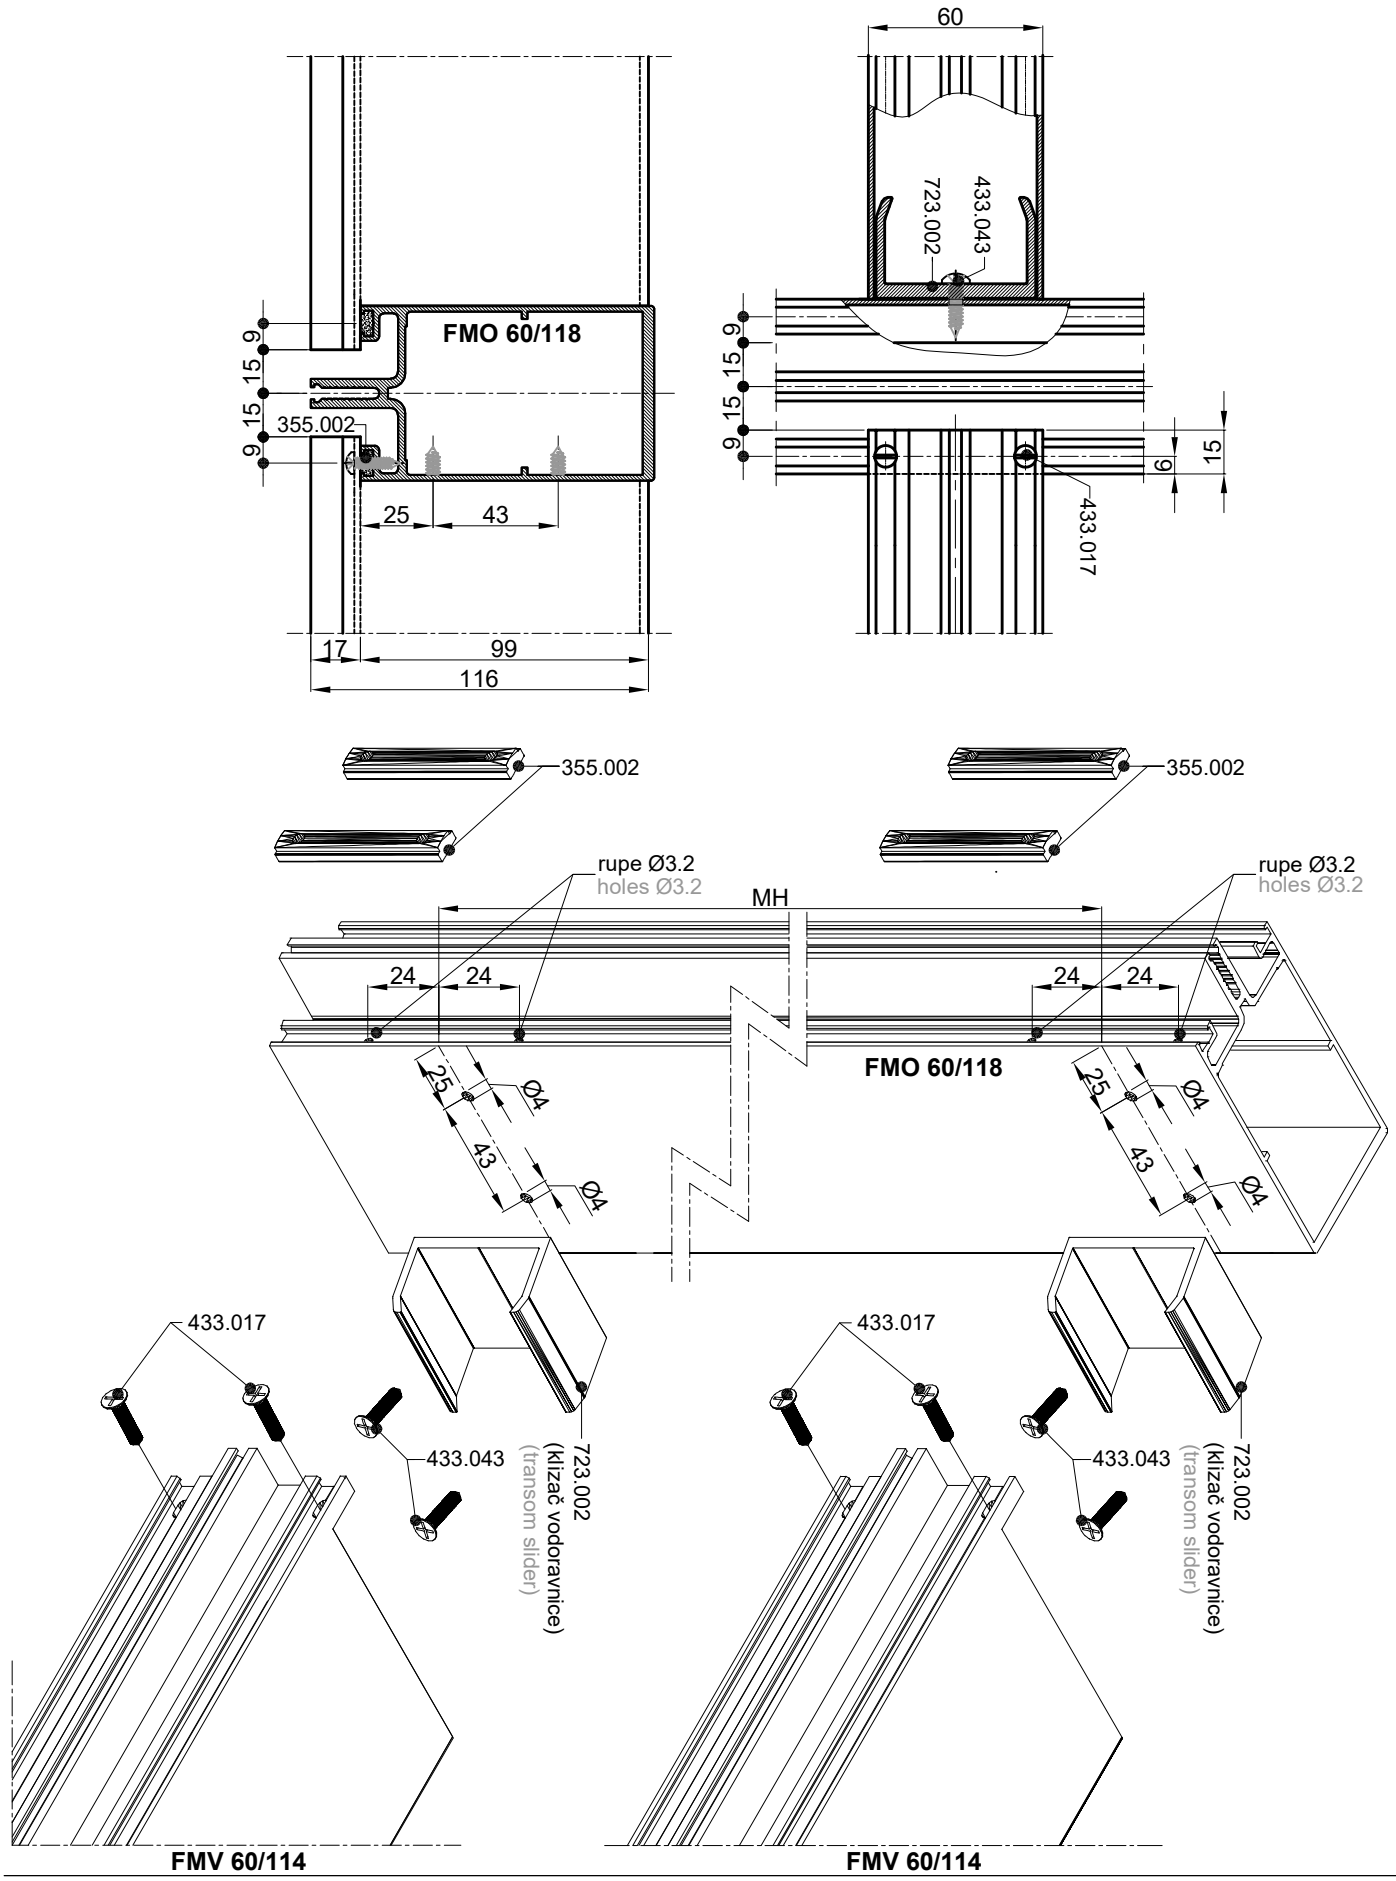


- Obrada okomice **FMO 60/88** za vodoravnicu **FMV 60/88** (na nulu)
- Processing of mullion **FMO 60/88** for transom **FMV 60/88** (without dilatation rubber)

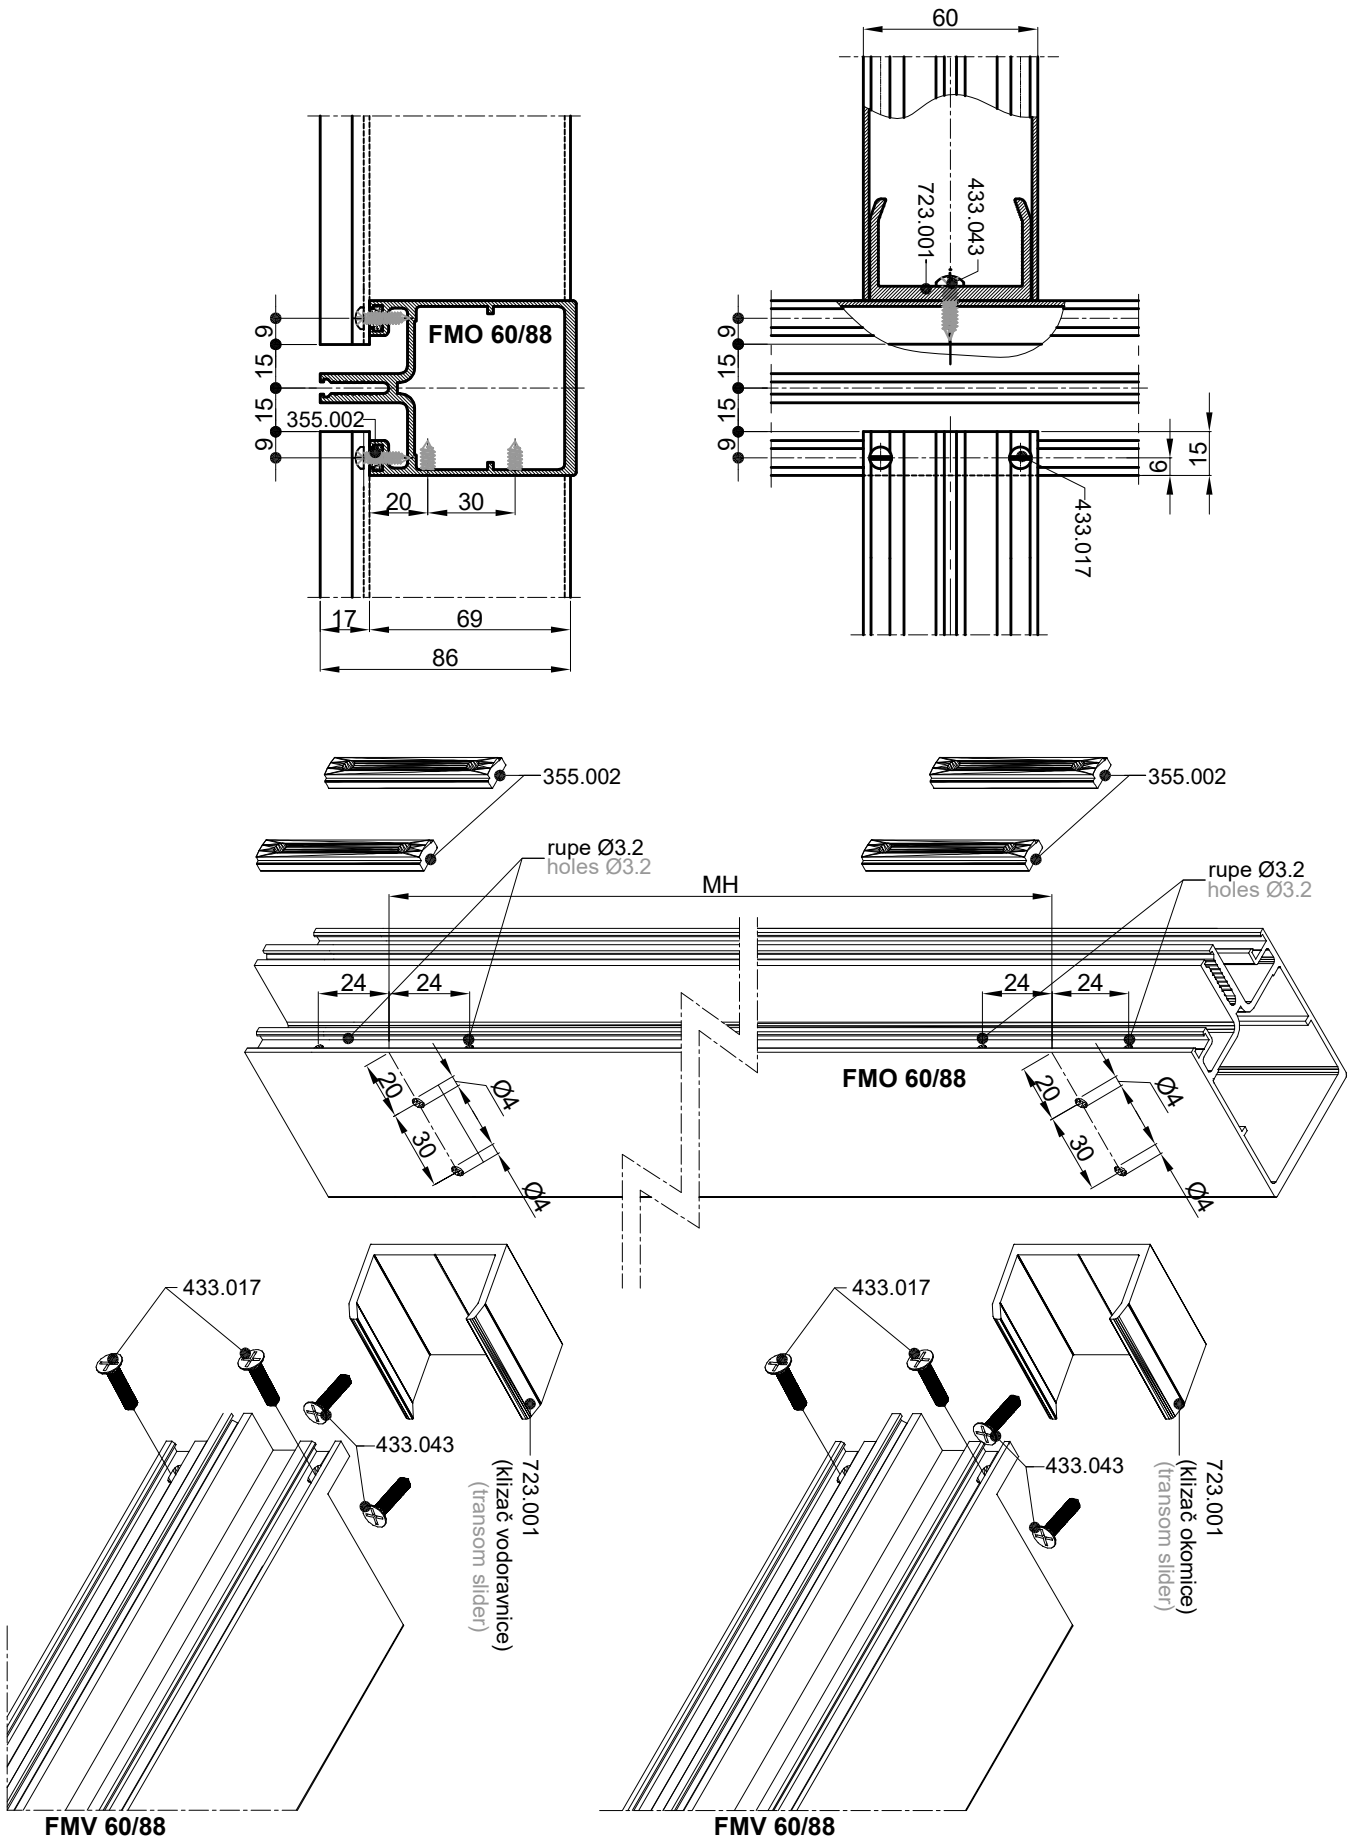


- Obrada okomice **FMO 60/41** za vodoravnicu **FMV 60/41** (ravni gumeni odstojnik)
- Processing of mullion **FMO 60/41** for transom **FMV 60/41** (flat dilatation rubber)

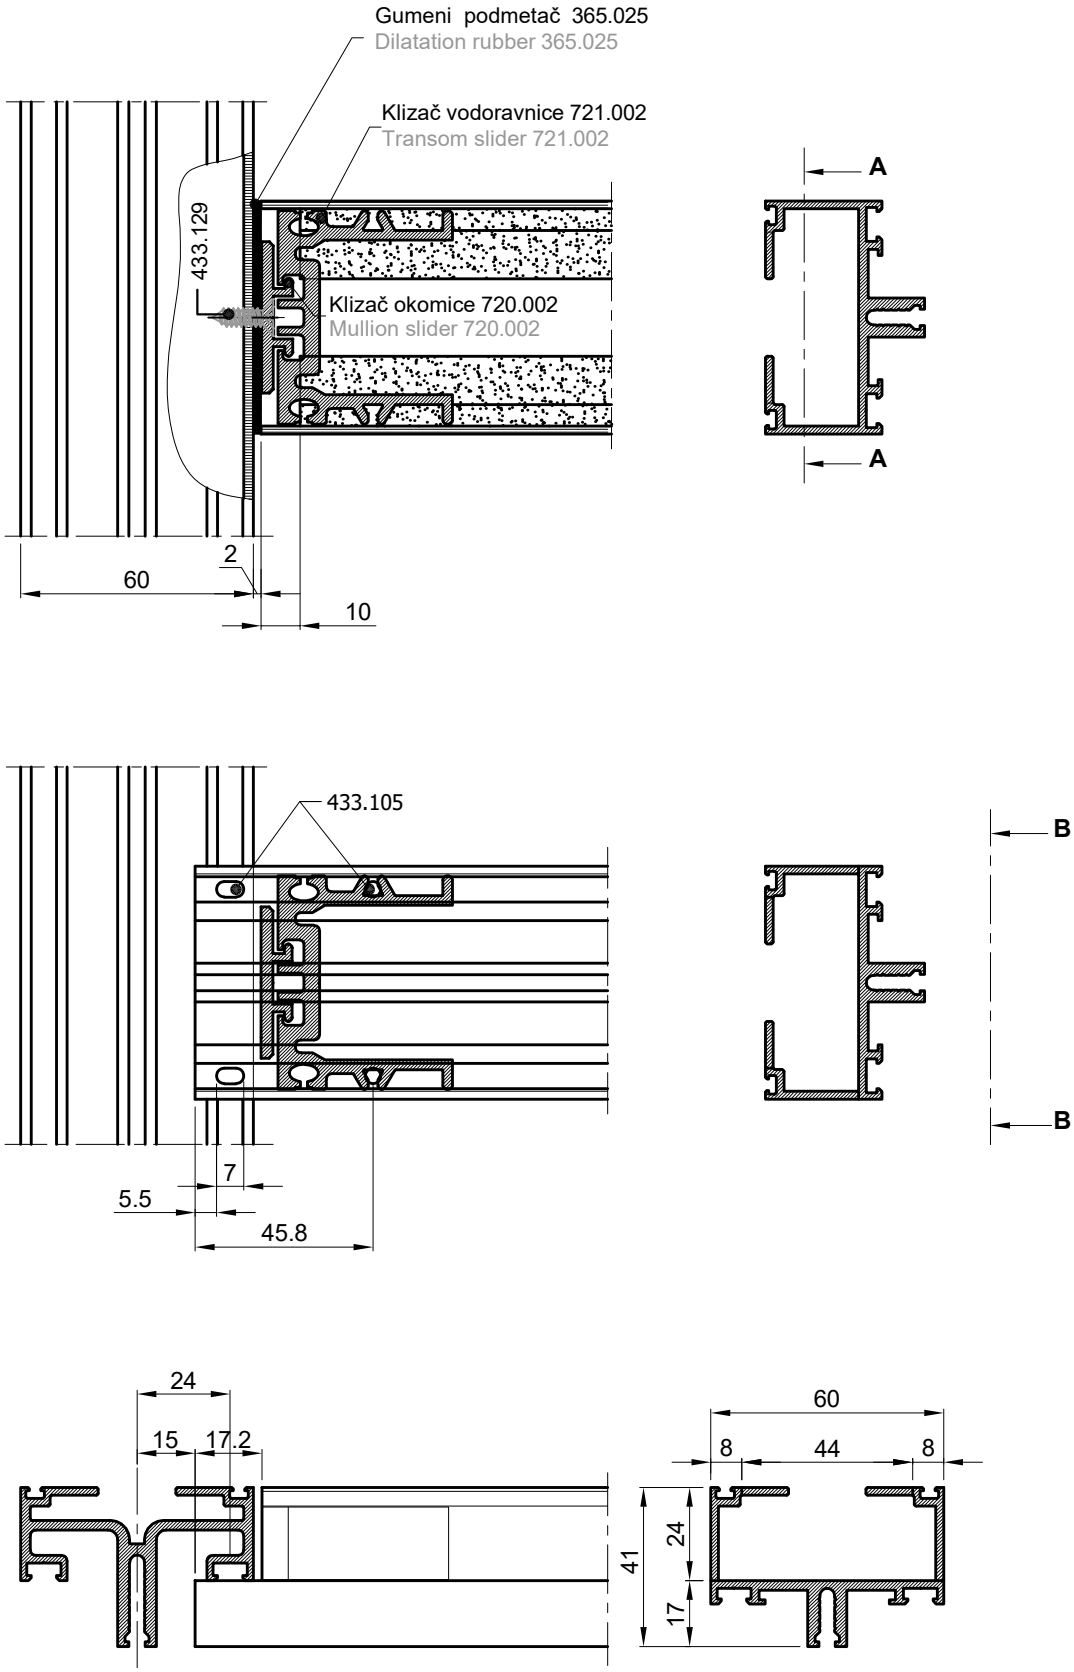


- Obrada vodoravnice **FMV 60/88** za okomicu **FMO 60/88** (gumeni odstojnik s obrubom)
- Processing of transom **FMV 60/88** for mullion **FMO 60/88** (rimmed diletation rubber)

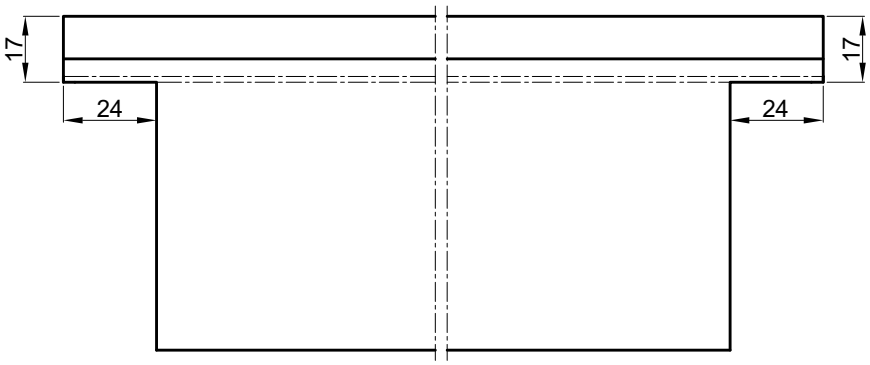




PRESJEK B-B
CROSS SECTION B-B

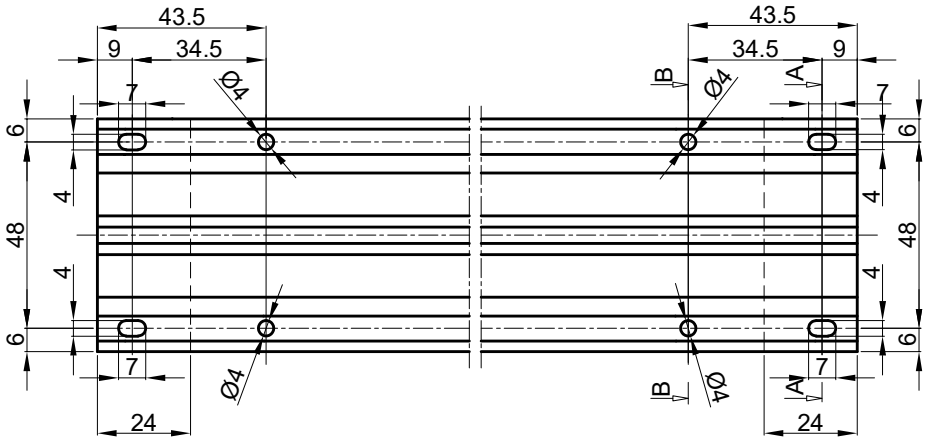





PRESJEK A-A
CROSS SECTION A-A

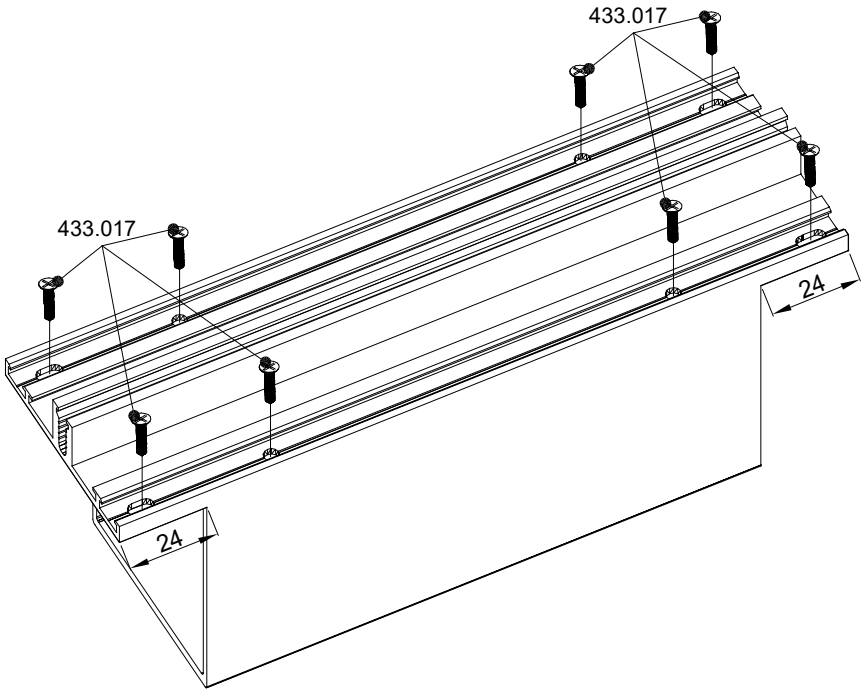


- Obrada vodoravnice **FMV 60/114** za okomicu **FMO 60/118** (gumeni odstojnik s obrubom)
- Processing of transom **FMV 60/114** for mullion **FMO 60/18** (rimmed diletation rubber)

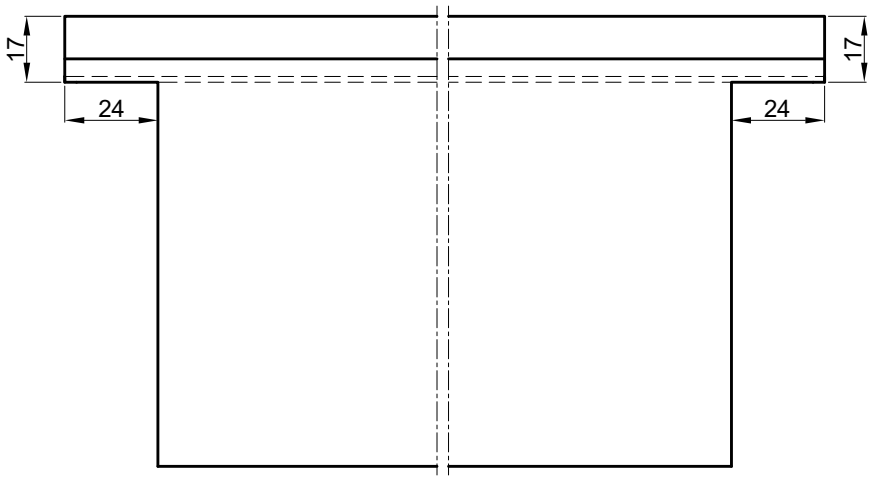

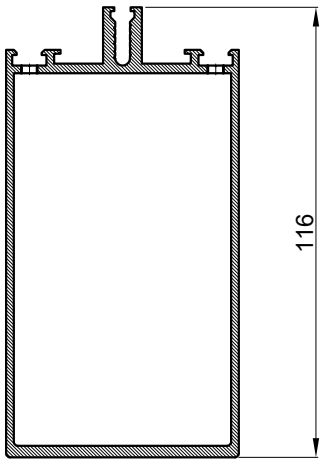


PRESJEK B-B
CROSS SECTION B-B

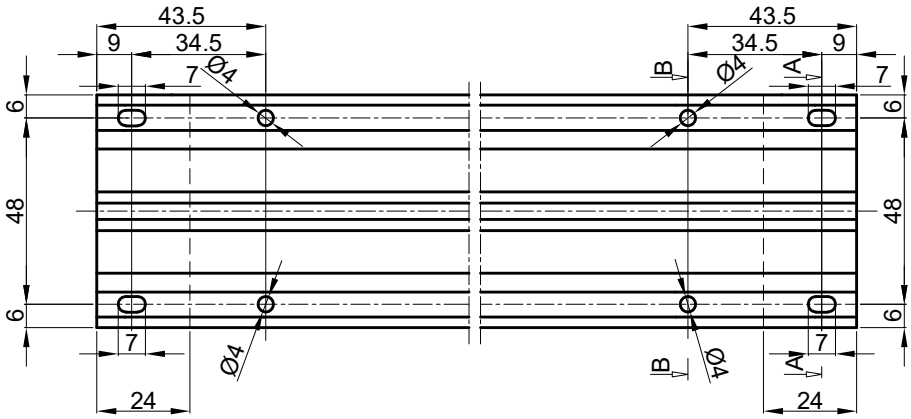





PRESJEK A-A
CROSS SECTION A-A

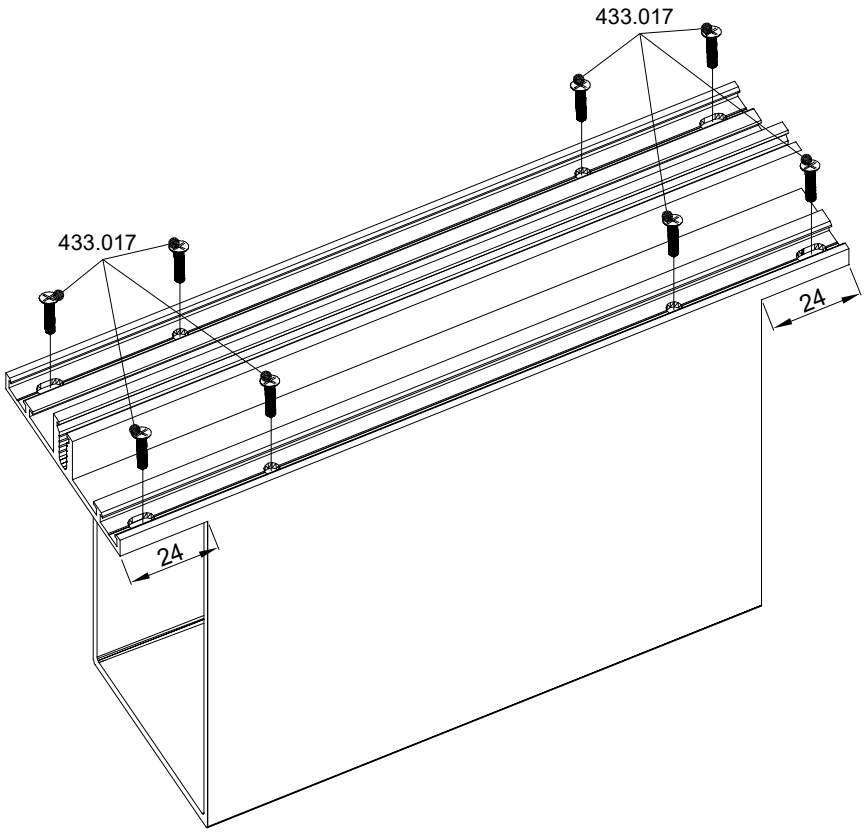


- Obrada vodoravnice FMV 60/156 za okomicu **FMR 60/158** (gumeni odstojnik s obrubom)
- Processing of transom **FMV 60/156** for mullion **FMR 60/158** (rimmed diletation rubber)

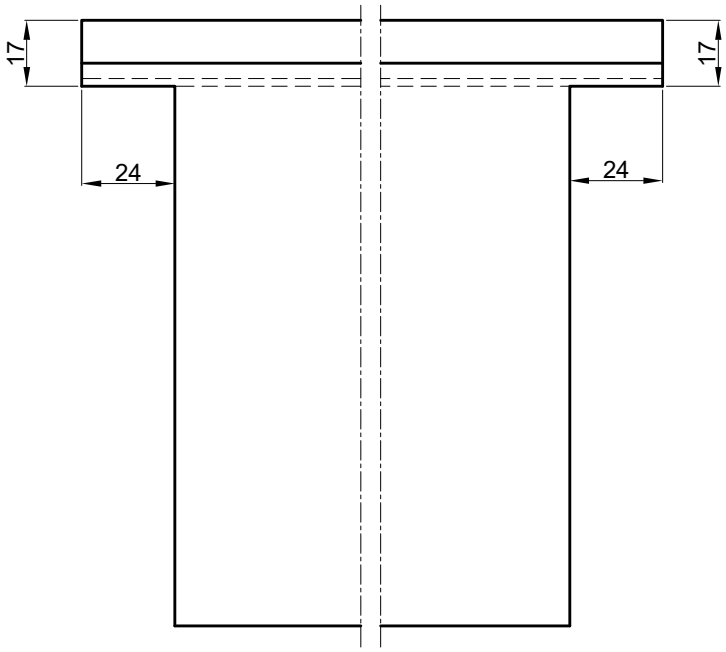

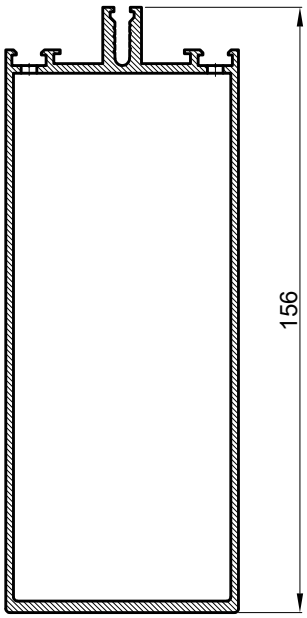


PRESJEK B-B
CROSS SECTION B-B

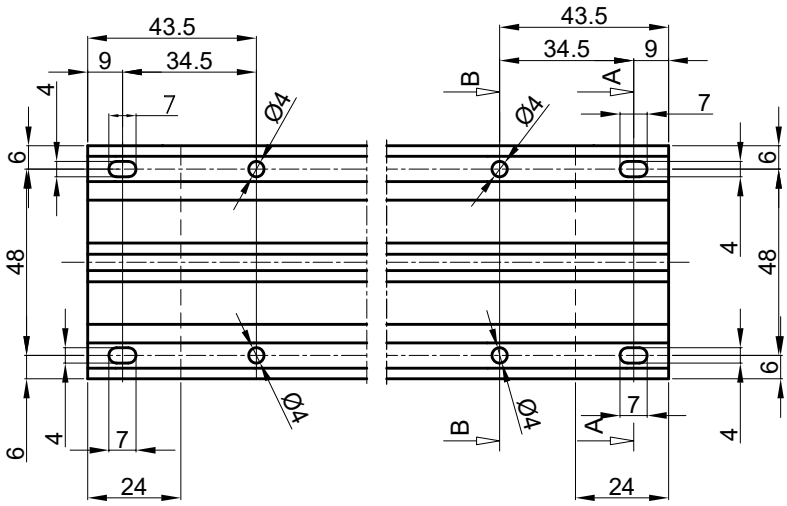





PRESJEK A-A
CROSS SECTION A-A

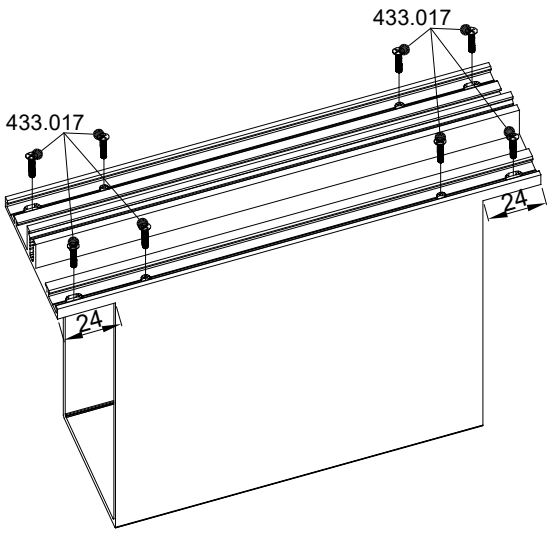


- Obrada vodoravnice **FMV 60/198** za okomicu **FMO 60/200** (gumeni odstojnik s obrubom)
- Processing of transom **FMV 60/198** for mullion **FMO 60/200** (rimmed diletation rubber)

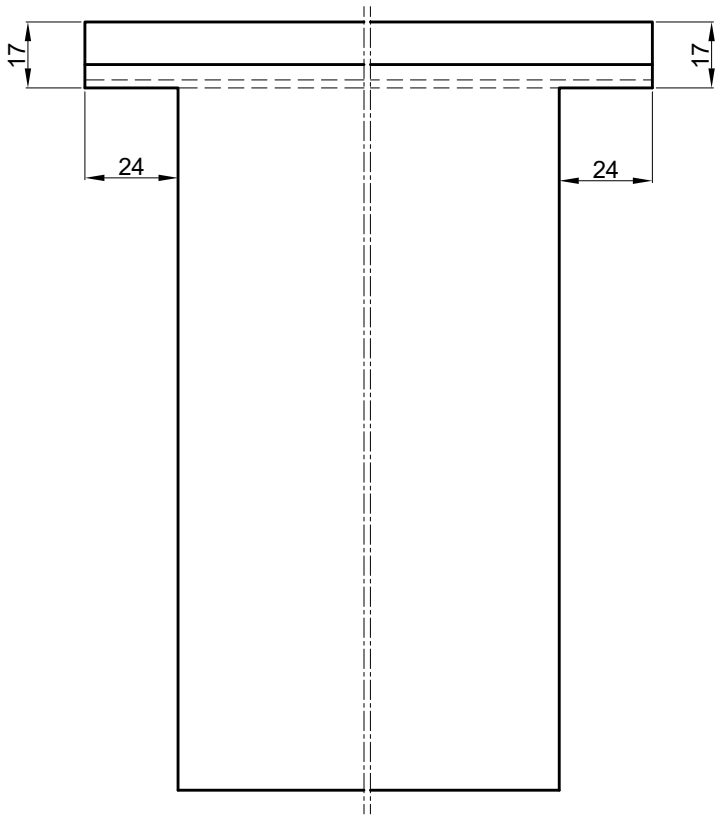

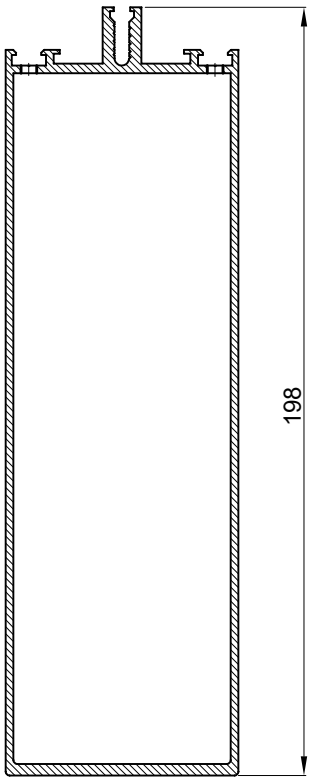


PRESJEK B-B
CROSS SECTION B-B

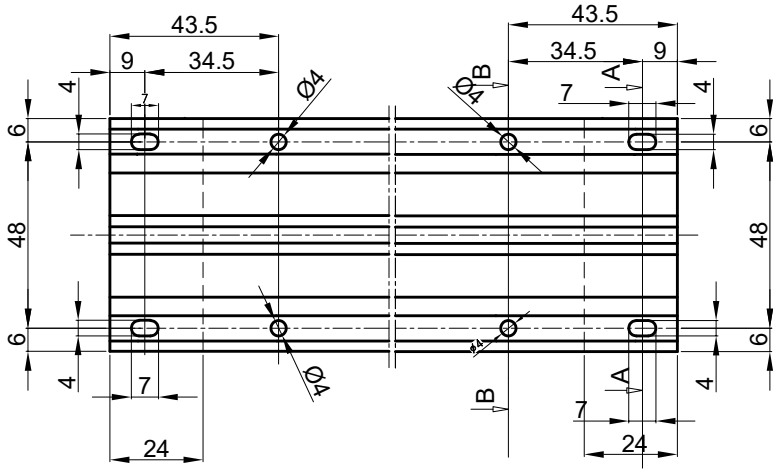





PRESJEK A-A
CROSS SECTION A-A

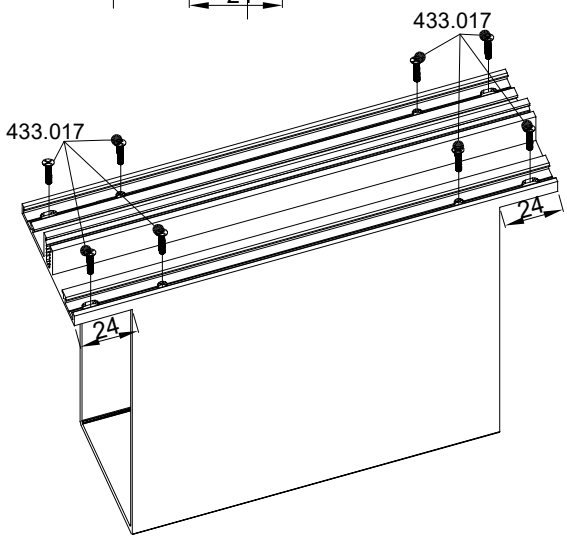


- Obrada vodoravnice **FMV 60/88** za okomicu **FMO 60/88** (ravni gumeni odstojnik)
- Processing of transom **FMV 60/88** for mullion **FMO 60/88** (flat diletation rubber)

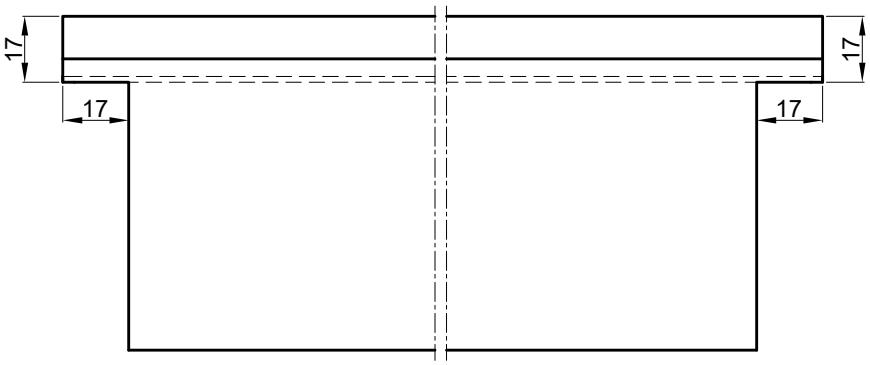




PRESJEK B-B
CROSS SECTION B-B

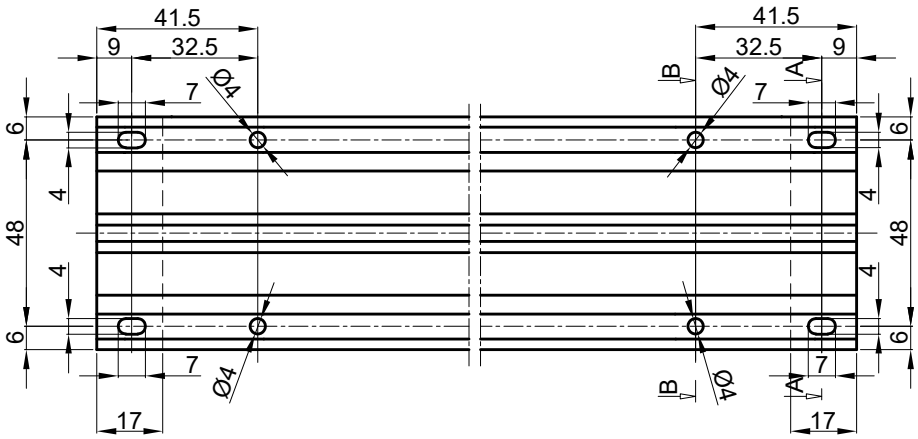





PRESJEK A-A
CROSS SECTION A-A

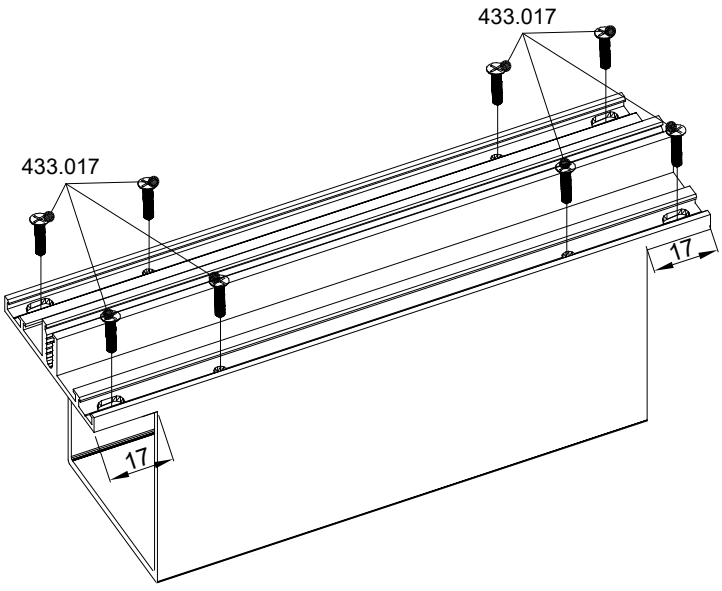


- Obrada vodoravnice **FMV 60/114** za okomicu **FMO 60/118** (ravni gumeni odstojnik)
- Processing of transom **FMV 60/114** for mullion **FMO 60/118** (flat diletation rubber)

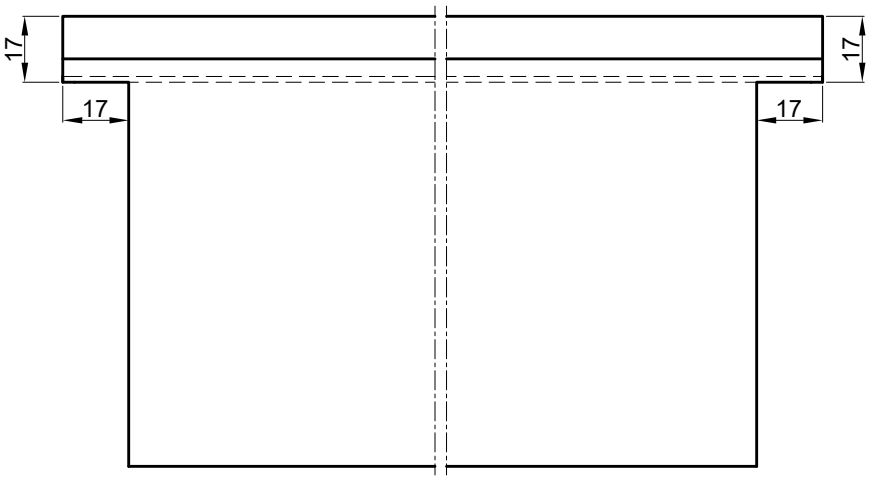

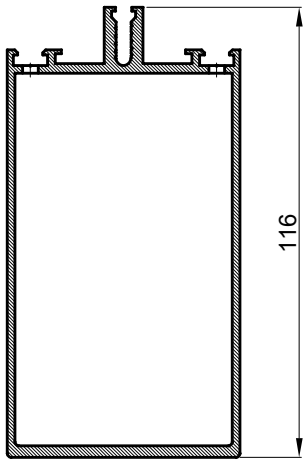


PRESJEK B-B
CROSS SECTION B-B

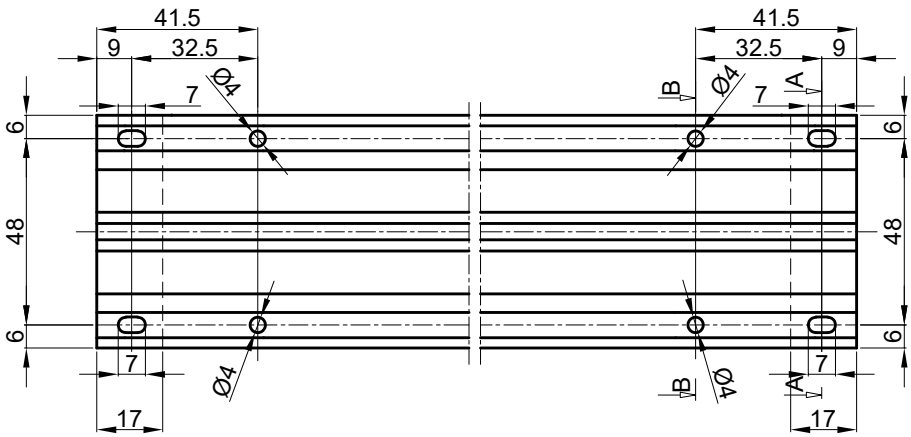





PRESJEK A-A
CROSS SECTION A-A

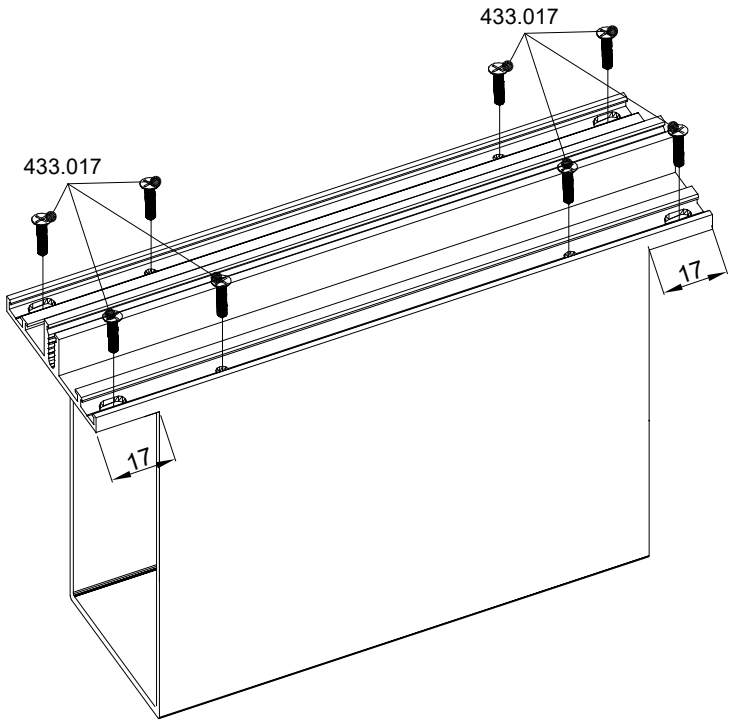


- Obrada vodoravnice **FMV 60/156** za okomicu **FMR 60/158** (ravni gumeni odstojnik)
- Processing of transom **FMV 60/156** for mullion **FMR 60/158** (flat diletation rubber)

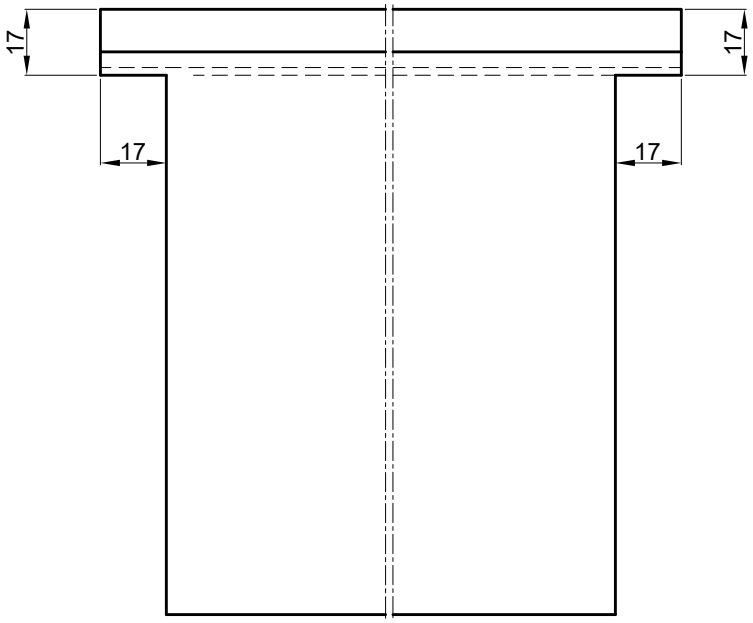

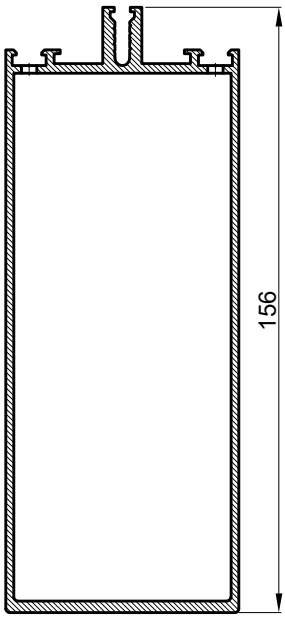


PRESJEK B-B
CROSS SECTION B-B

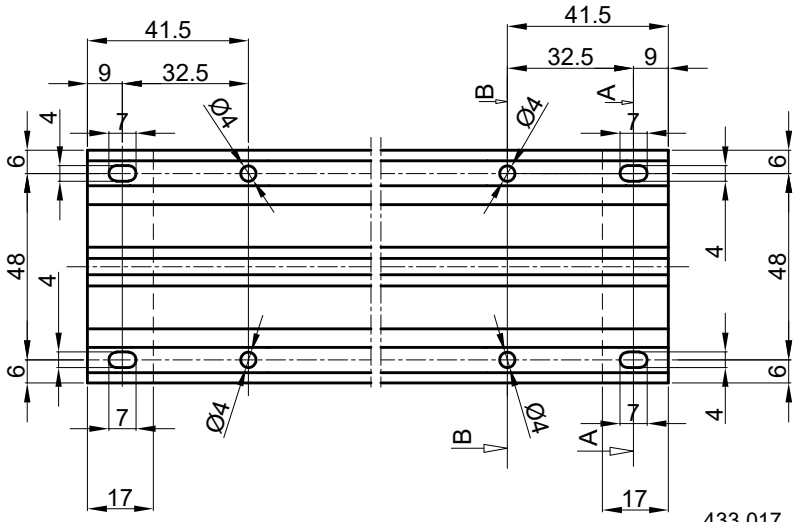





PRESJEK A-A
CROSS SECTION A-A

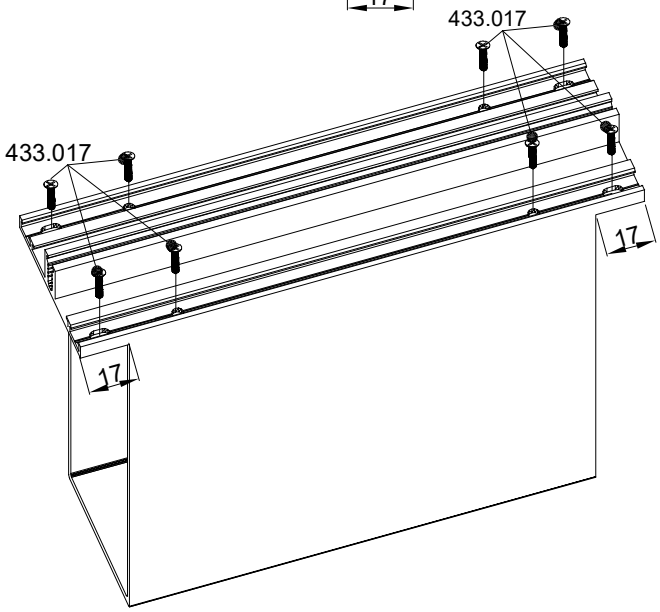



- Obrada vodoravnice **FMV 60/198** za okomicu **FMO 60/200** (ravni gumeni odstojnik)
- Processing of transom **FMV 60/198** for mullion **FMO 60/200**(flat diletation rubber)

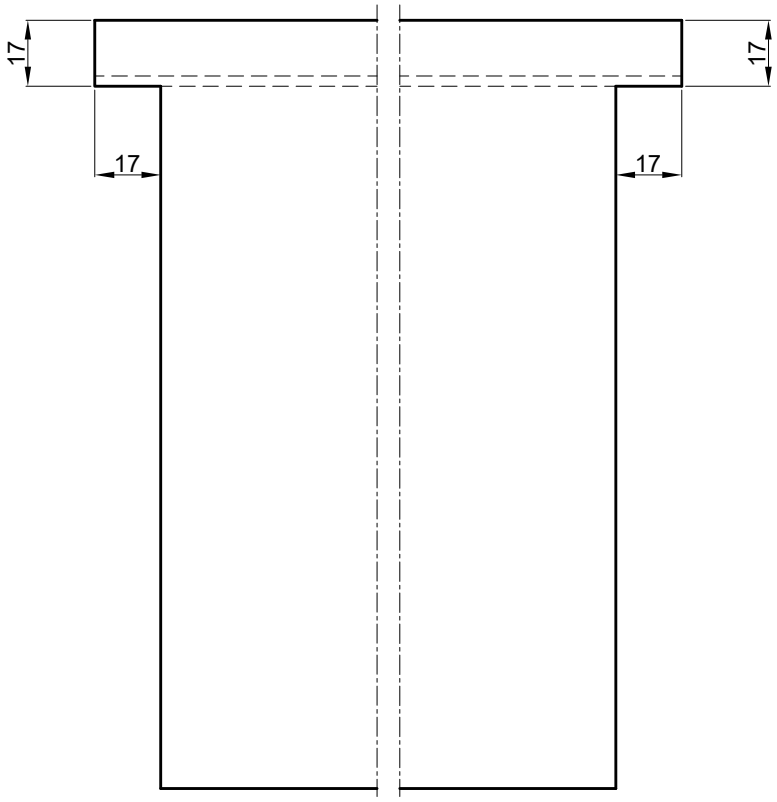

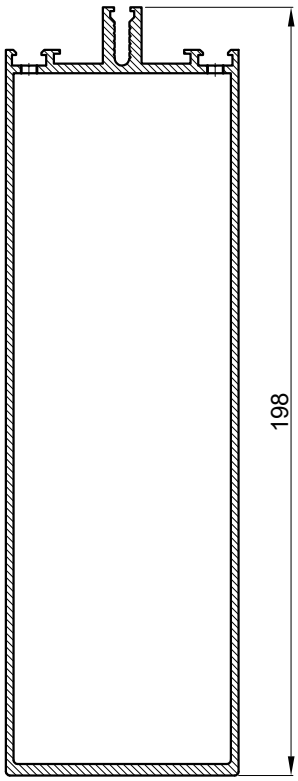


PRESJEK B-B
CROSS SECTION B-B

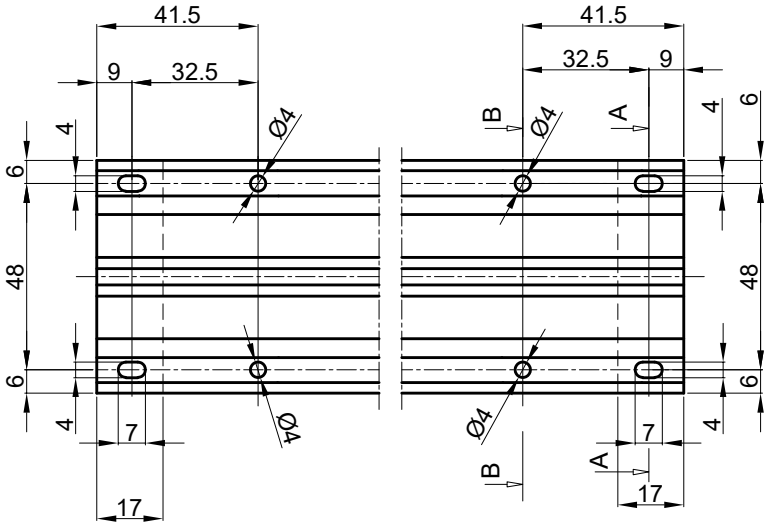





PRESJEK A-A
CROSS SECTION A-A

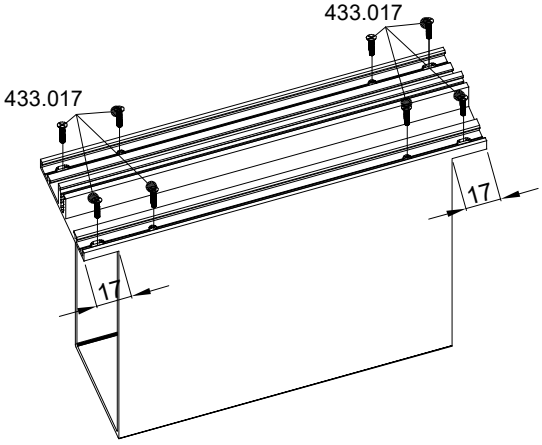


- Obrada vodoravnice **FMV 60/88** za okomicu **FMO 60/88** (na nulu)
- Processing of transom **FMV 60/88** for mullion **FMO 60/88** (without diletation rubber)

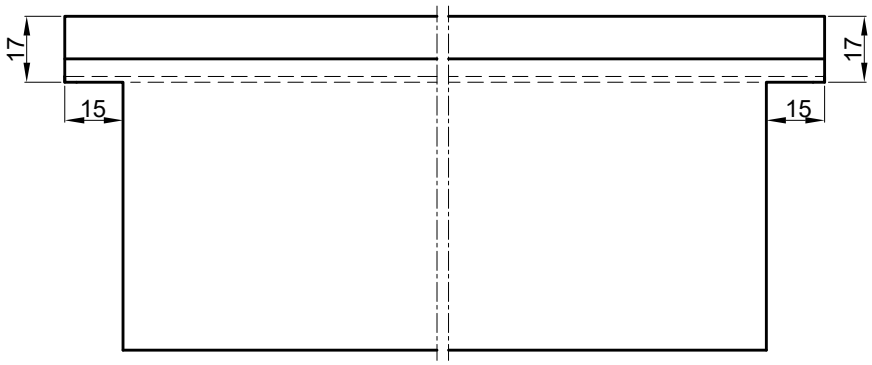




PRESJEK B-B
CROSS SECTION B-B

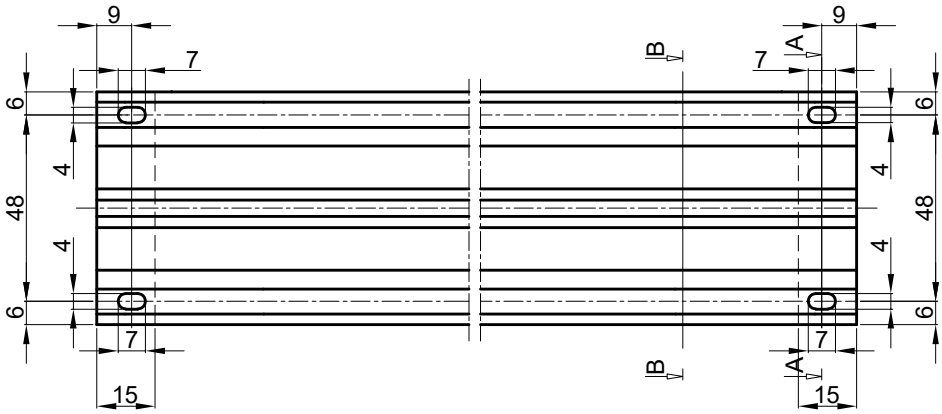





PRESJEK A-A
CROSS SECTION A-A

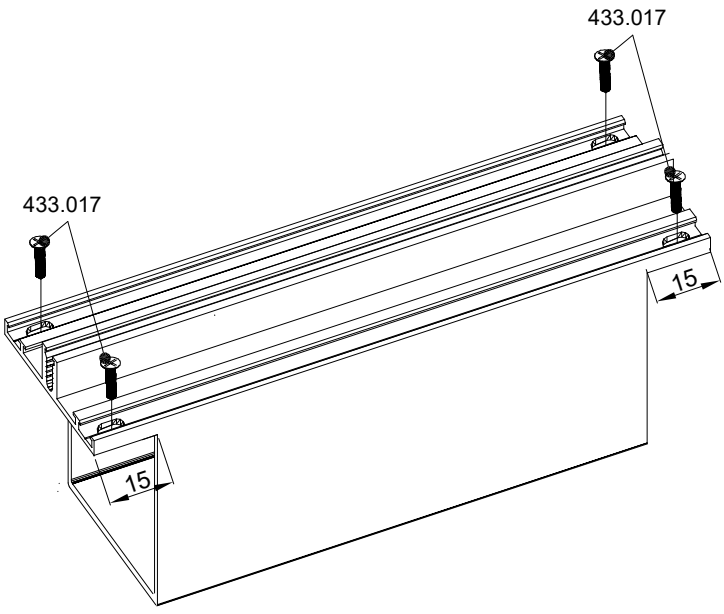


- Obrada vodoravnice **FMV 60/114** za okomicu **FMO 60/118** (na nulu)
- Processing of transom **FMV 60/114** for mullion **FMO 60/118** (without diletation rubber)

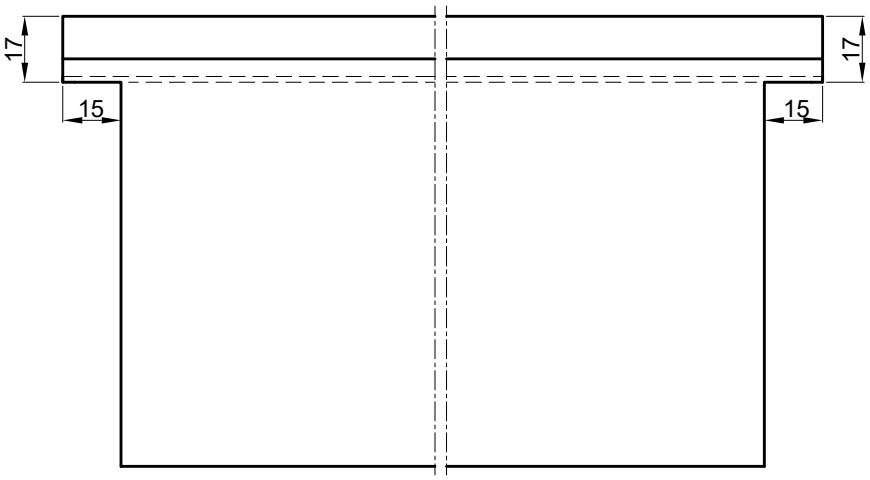

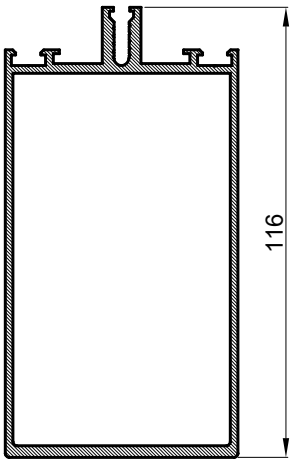


PRESJEK B-B
CROSS SECTION B-B

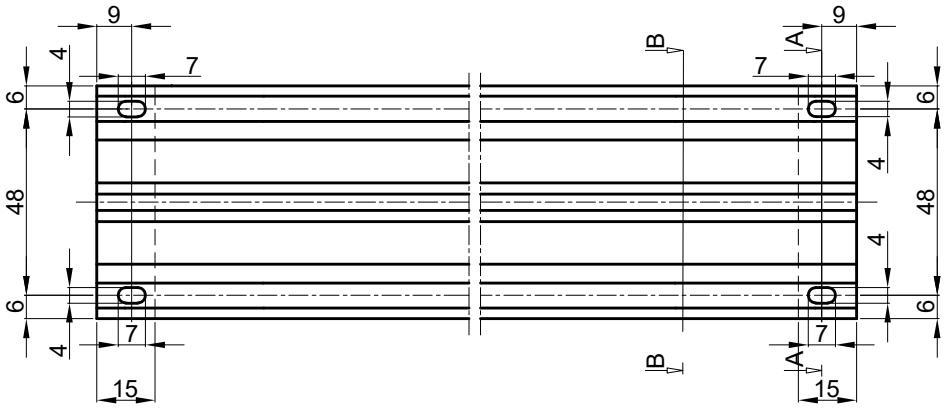





PRESJEK A-A
CROSS SECTION A-A

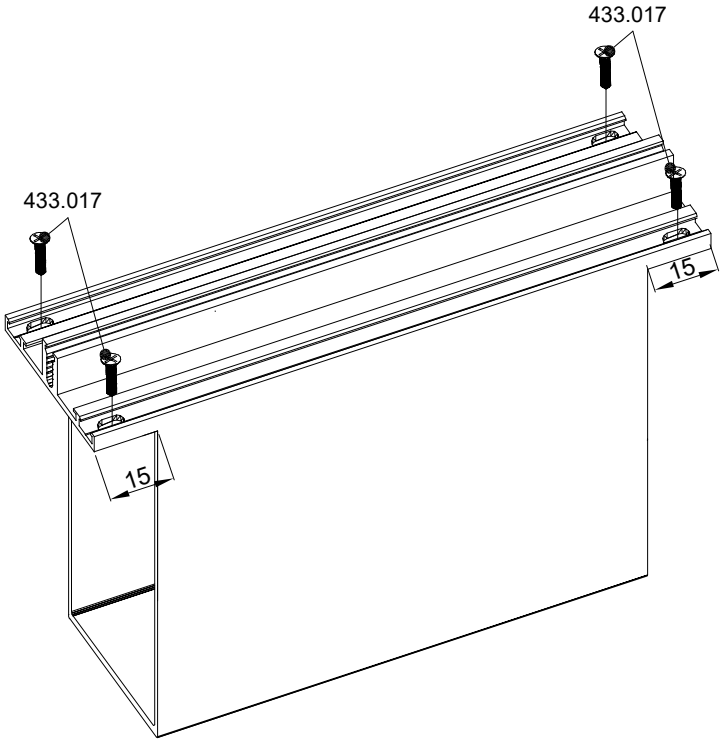


- Obrada vodoravnice **FMV 60/156** za okomicu **FMR 60/158** (na nulu)
- Processing of transom **FMV 60/156** for mullion **FMR 60/158** (without diletation rubber)

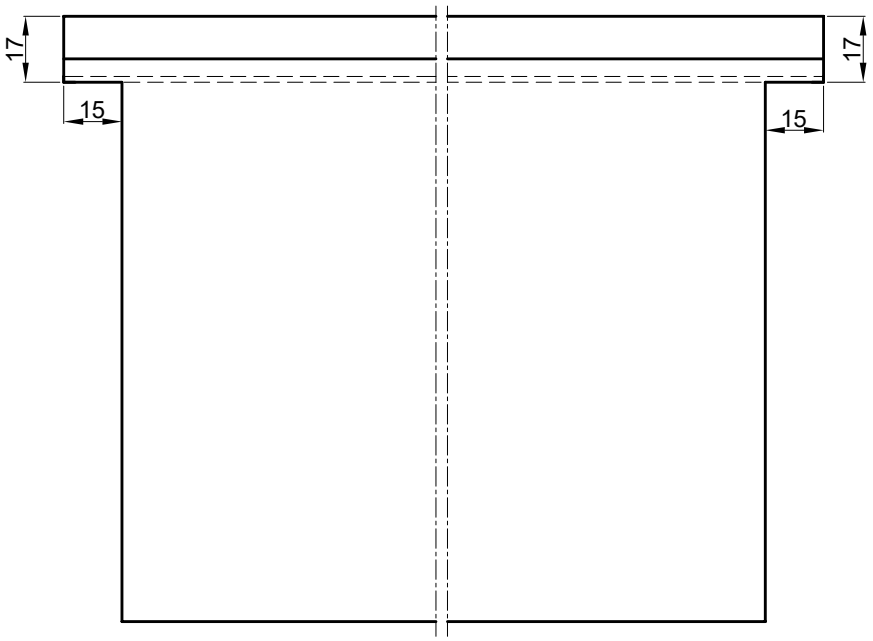

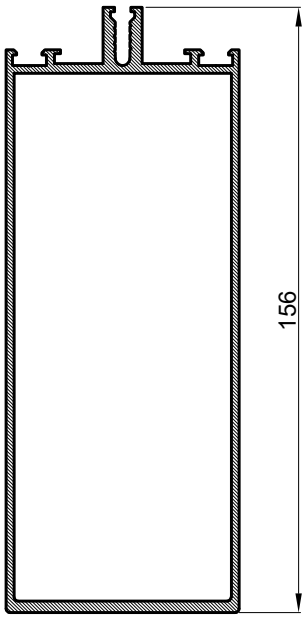


PRESJEK B-B
CROSS SECTION B-B

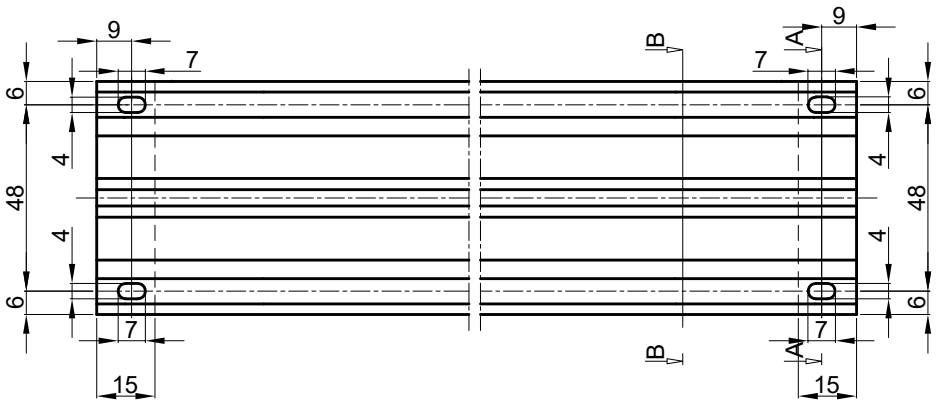





PRESJEK A-A
CROSS SECTION A-A

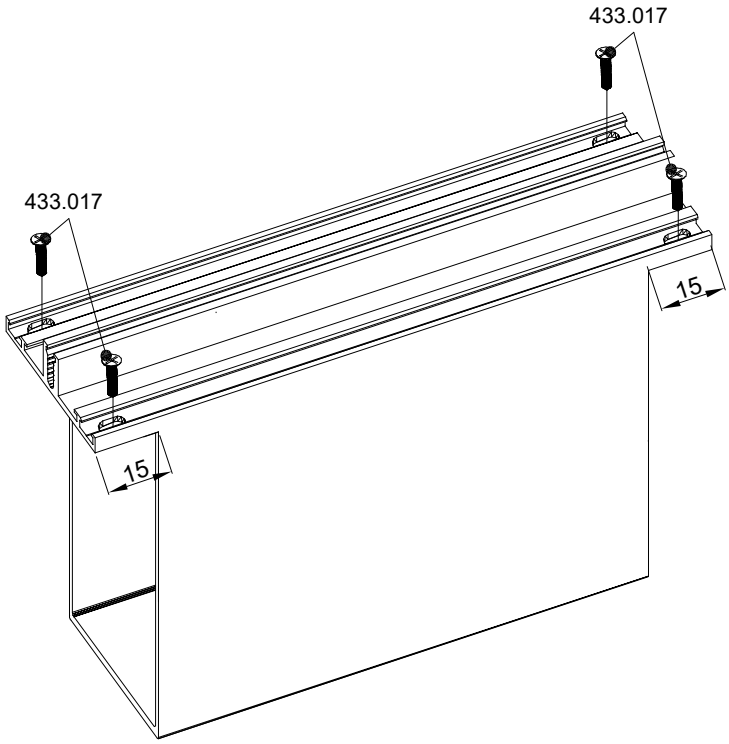

- Obrada vodoravnice **FMV 60/198** za okomicu **FMO 60/200** (na nulu)
- Processing of transom **FMV 60/198** for mullion **FMO 60/200** (without diletation rubber)

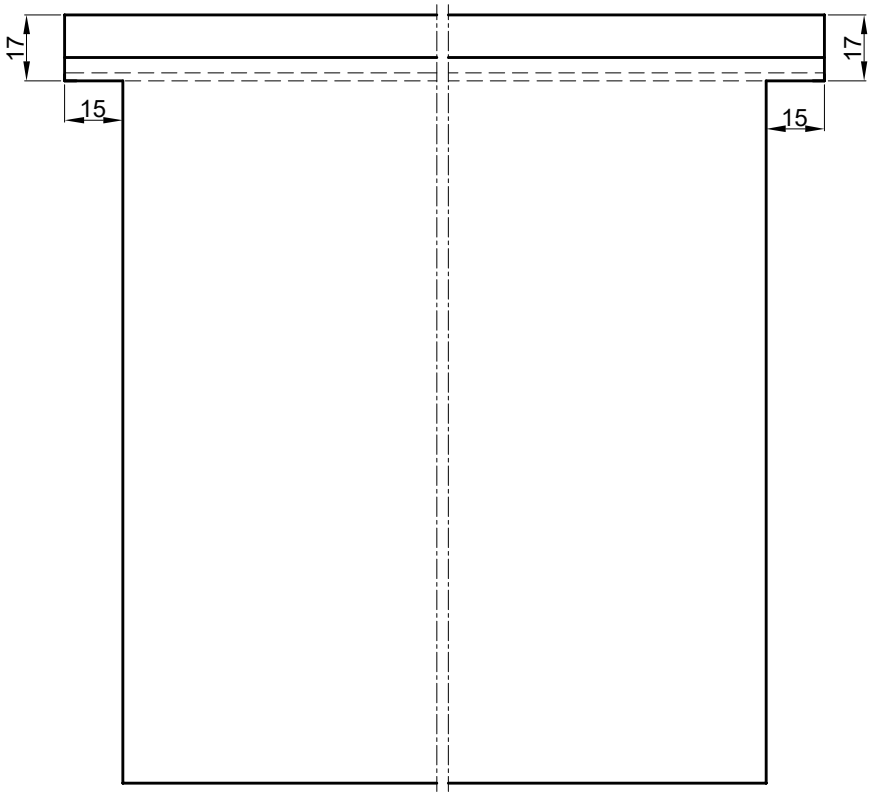


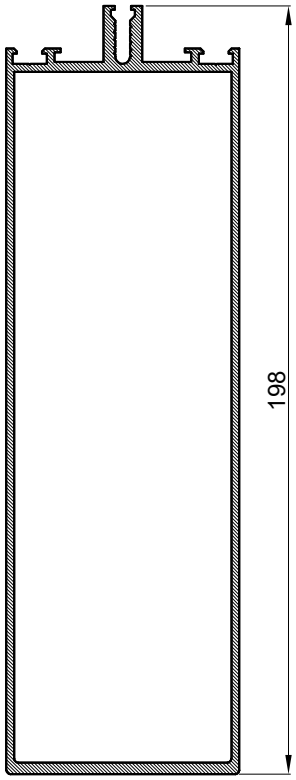



PRESJEK B-B
CROSS SECTION B-B




PRESJEK A-A
CROSS SECTION A-A

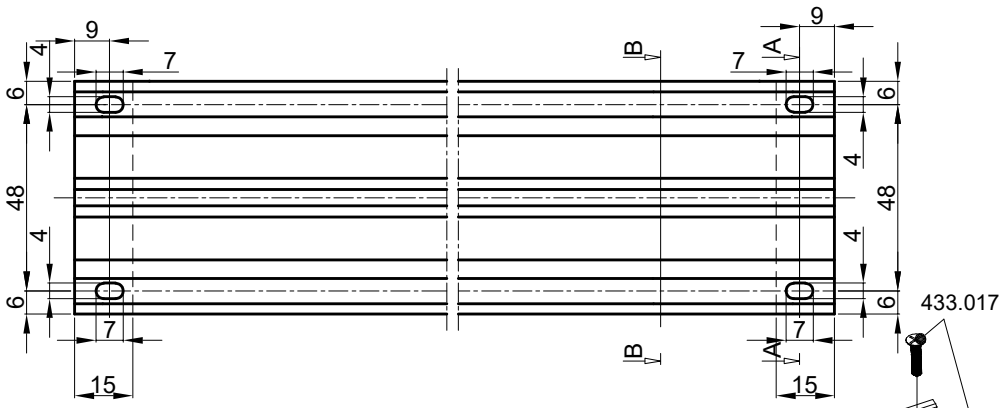

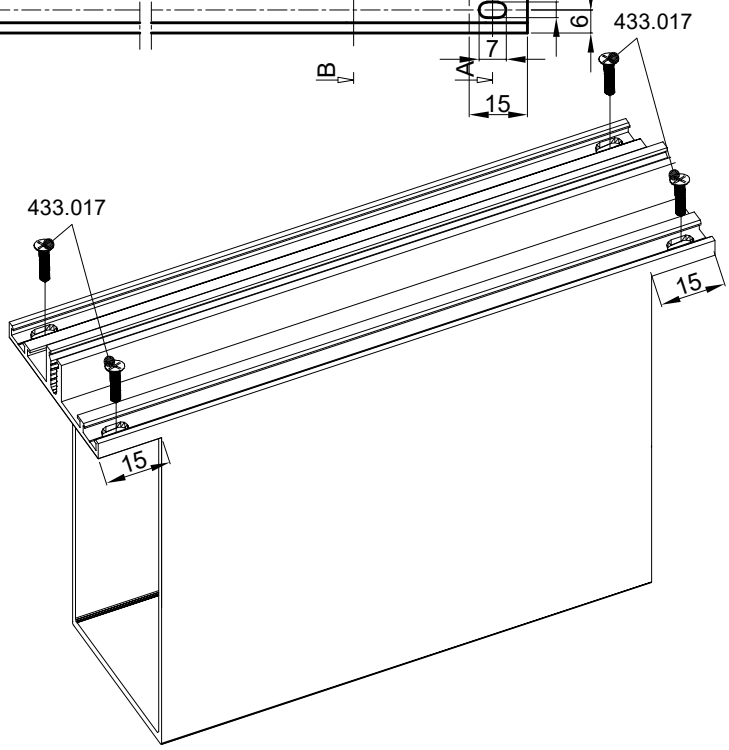

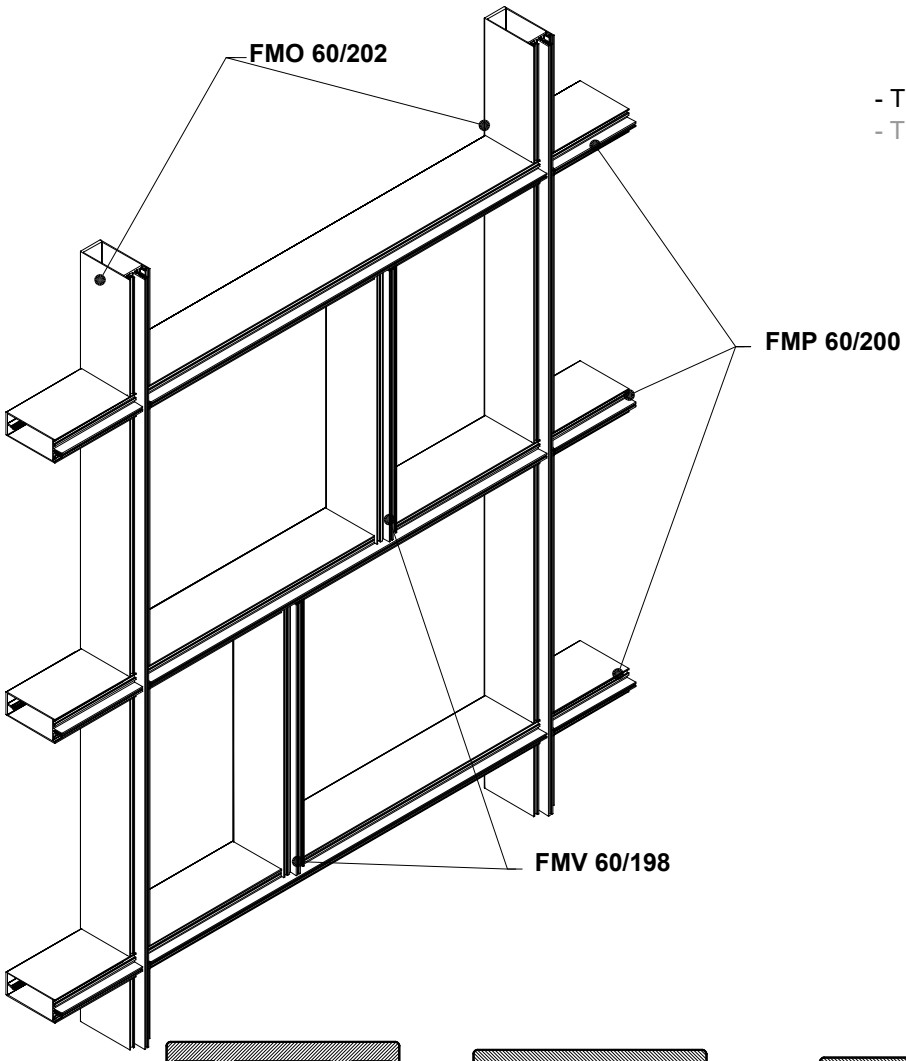



- Treći nivo
- Third level

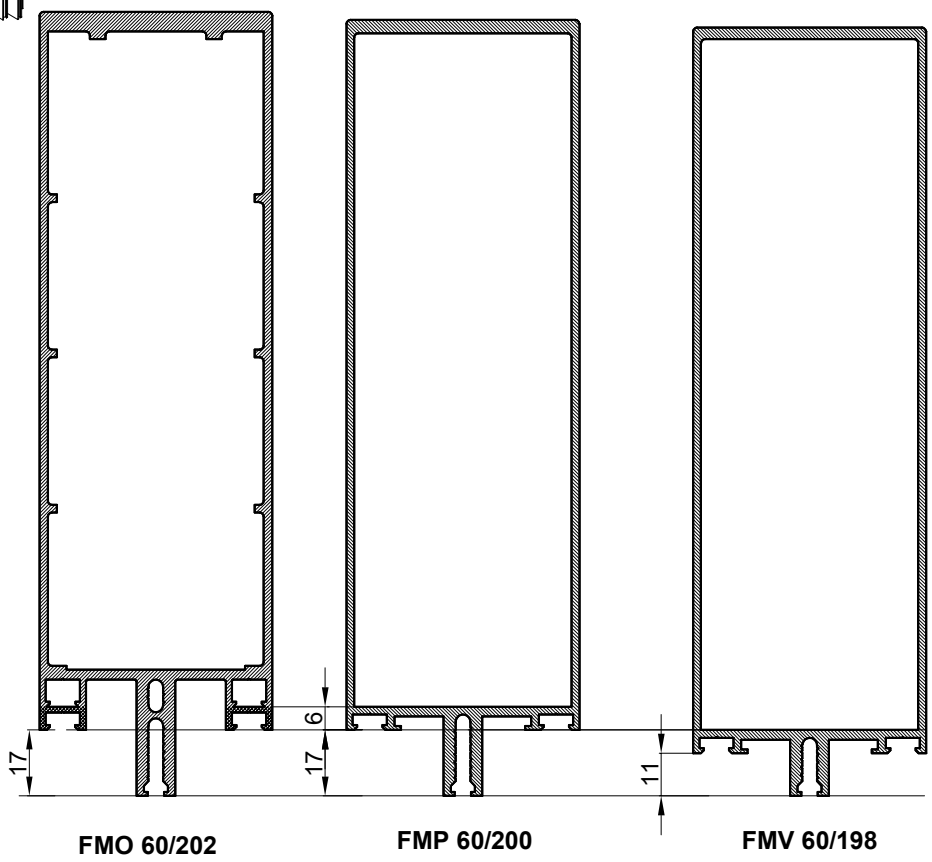

Obrada okomice **FMO 60/202** za prihvat pomoćne vodoravnice **FMP 60/200** treći nivo (gumeni odstojnik s obrubom)


Processing of mullion **FMO 60/202** for auxiliary transom **FMP 60/200** third level (rimmed dilatation rubber)

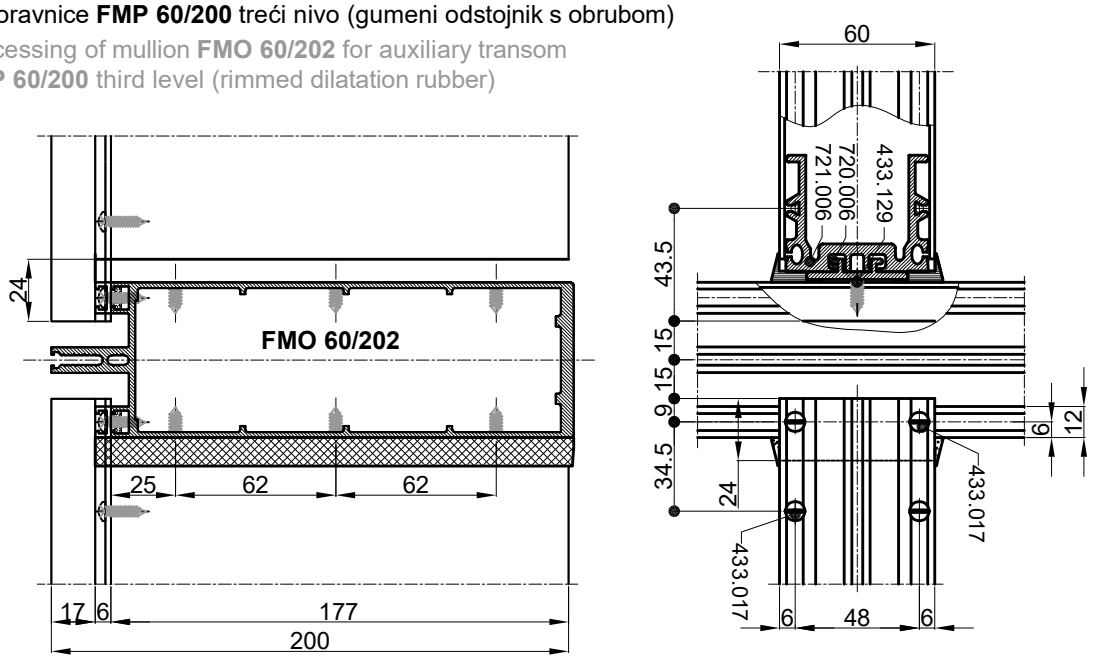


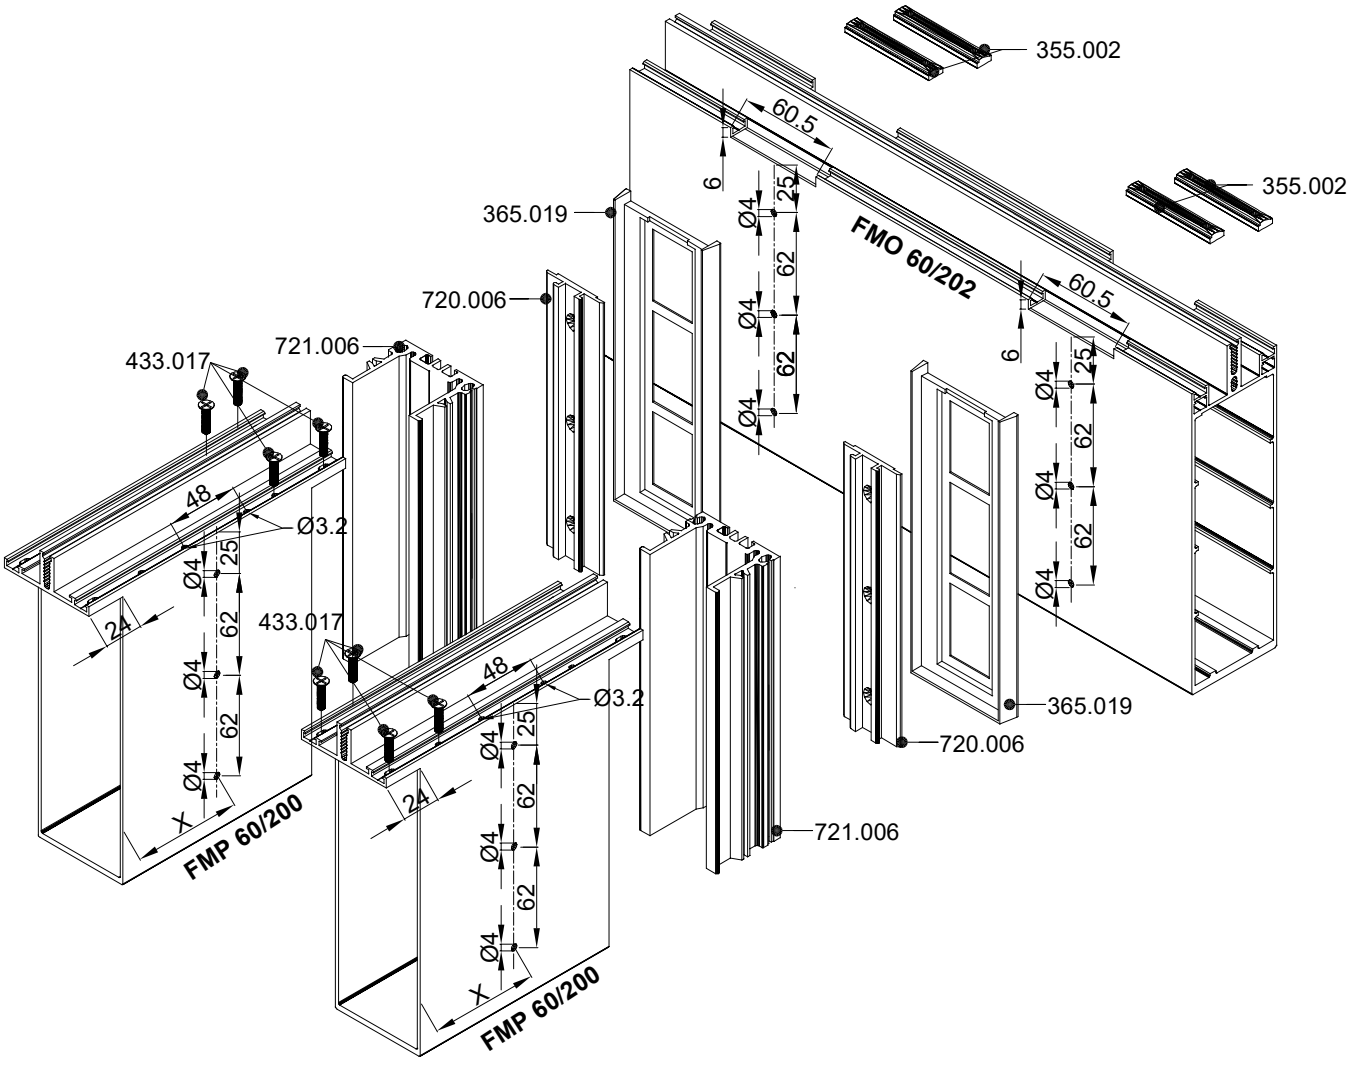


Obrada pomoćne vodoravnice **FMP 60/200** za prihvat pomoćne okomice **FMV 60/198** treći nivo (gumeni odstojnik s obrubom)

Processing of mullion **FMP 60/200** for auxiliary transom **FMV 60/198** third level (rimmed dilatation rubber)

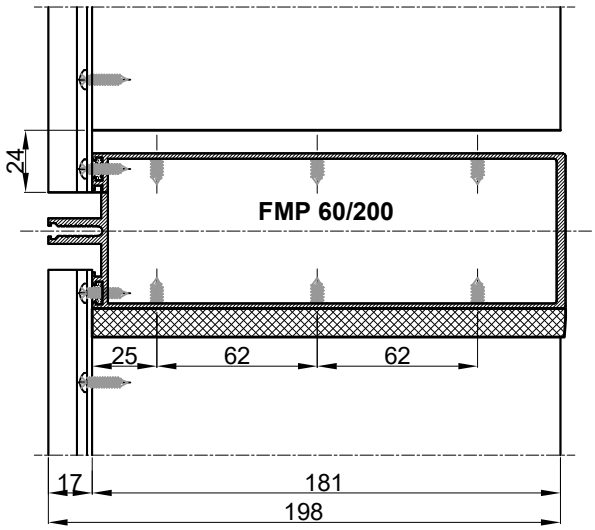


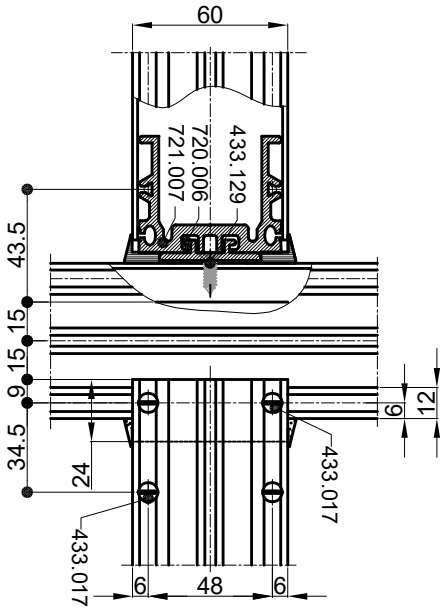


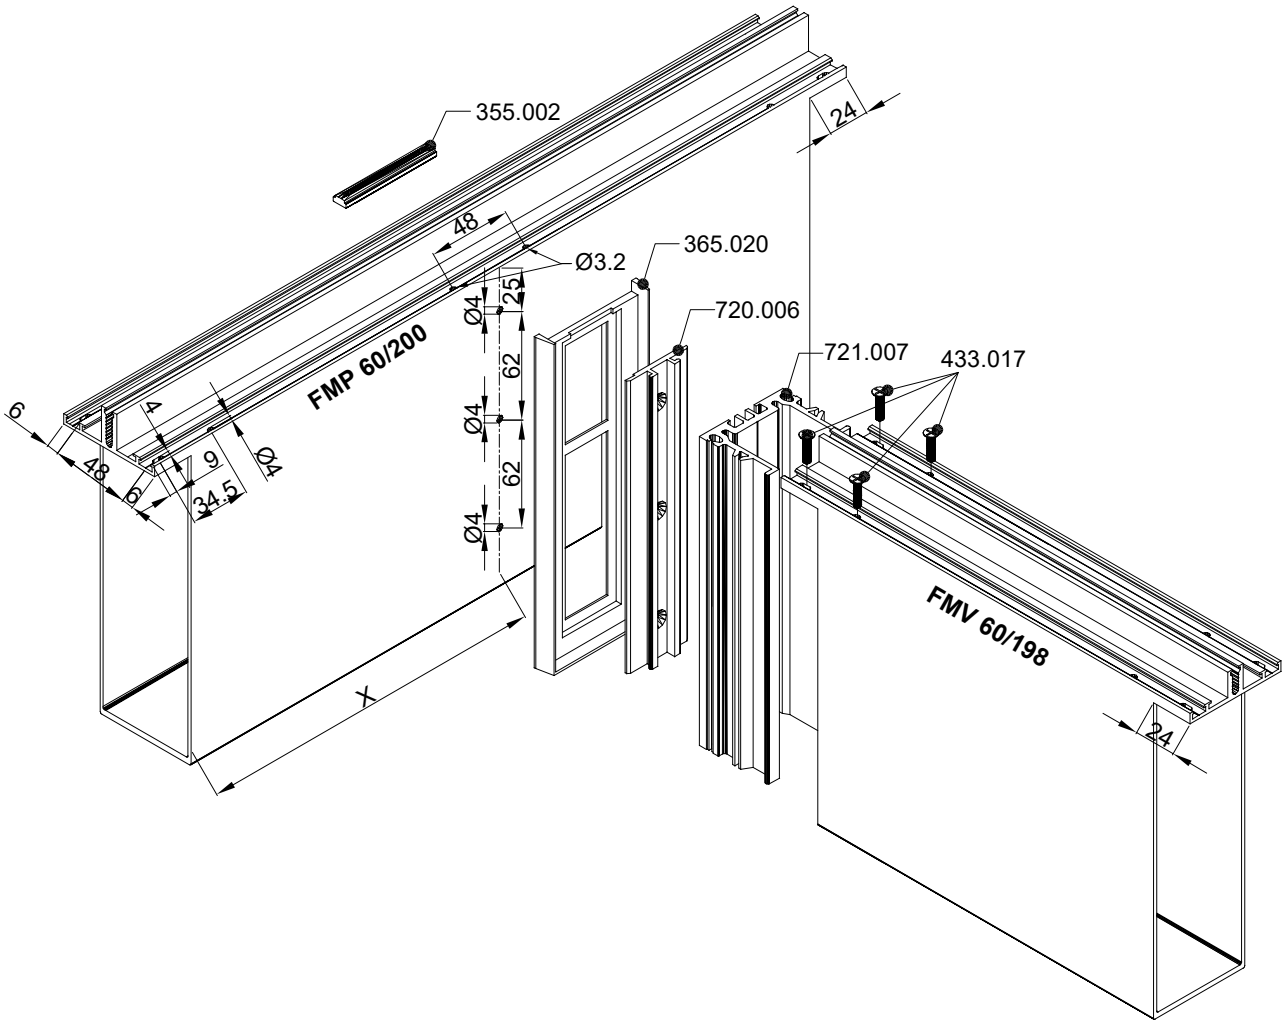

Obrada okomice **FMO 60/202** za prihvat pomoćne vodoravnice **FMP 60/200** treći nivo (obrada na nulu)


Processing of mullion **FMO 60/202** for auxiliary transom **FMP 60/200** third level (without dilatation rubber)

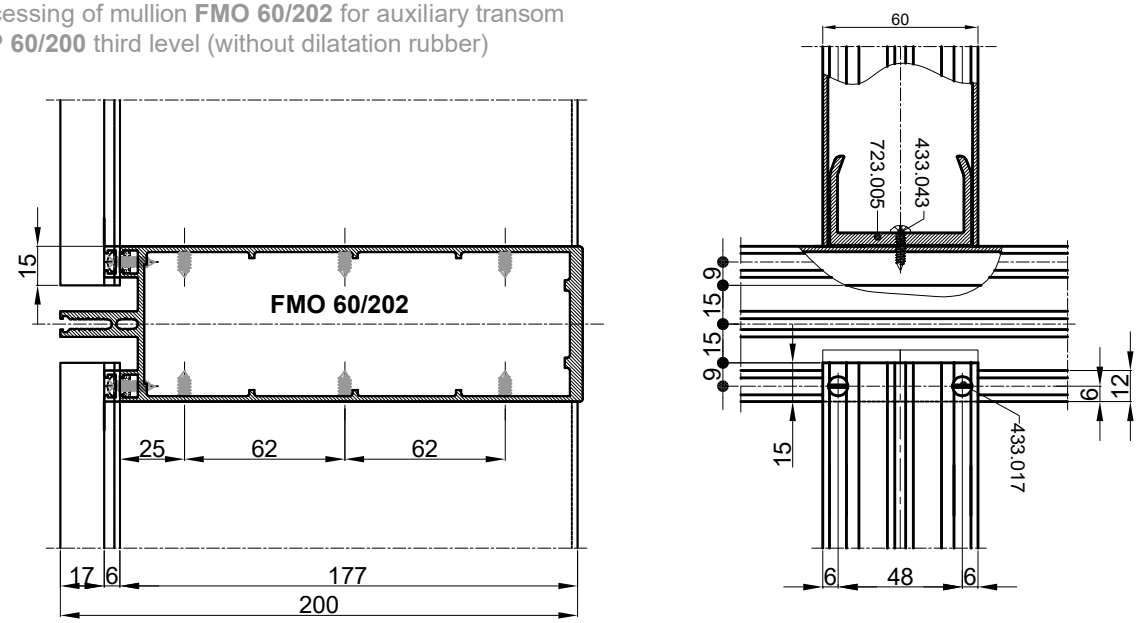


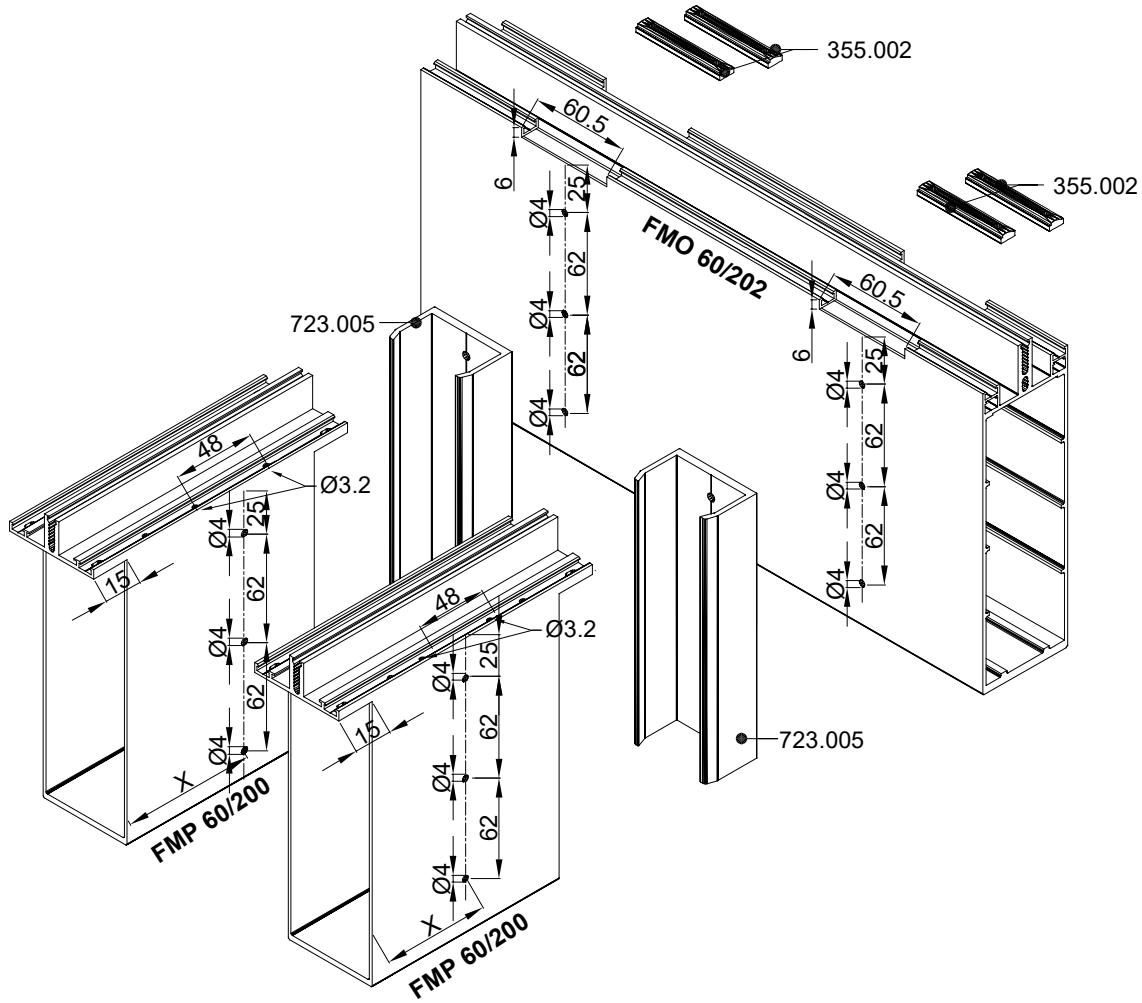


Obrada pomoćne vodoravnice **FMP 60/200** za prihvat pomoćne okomice **FMV 60/198** treći nivo (obrada na nulu)

Processing of mullion **FMP 60/200** for auxiliary transom **FMV 60/198** third level (without dilatation rubber)

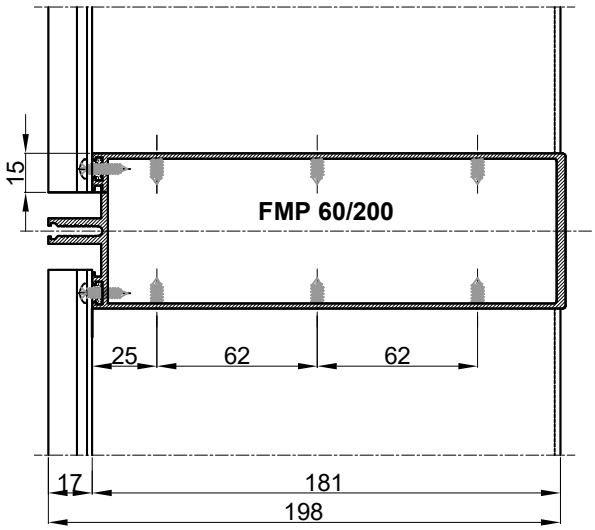


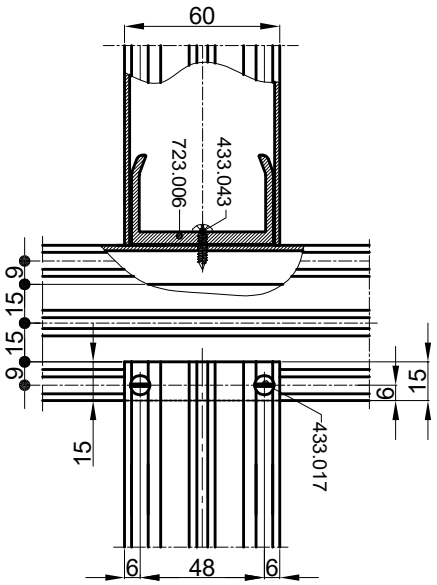

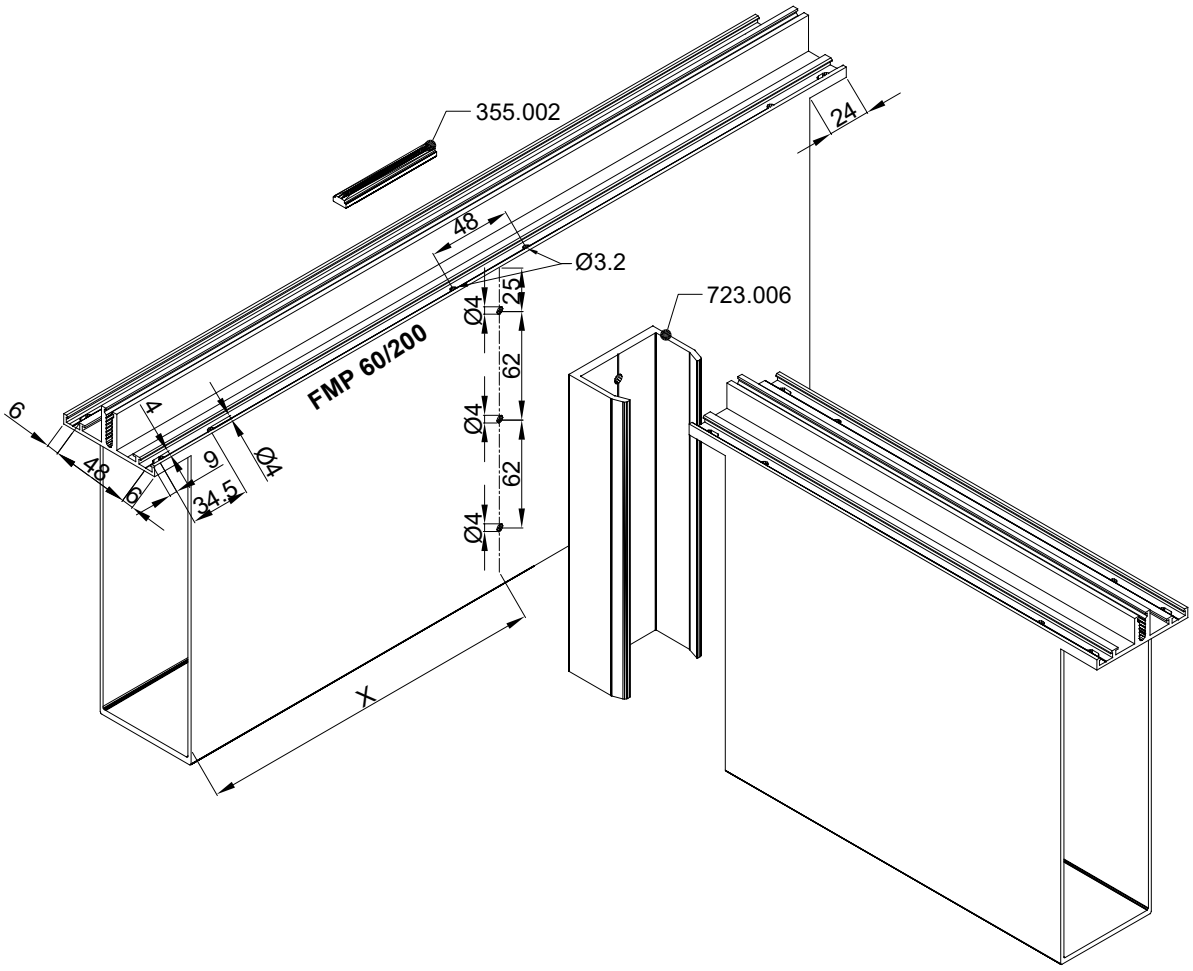

- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

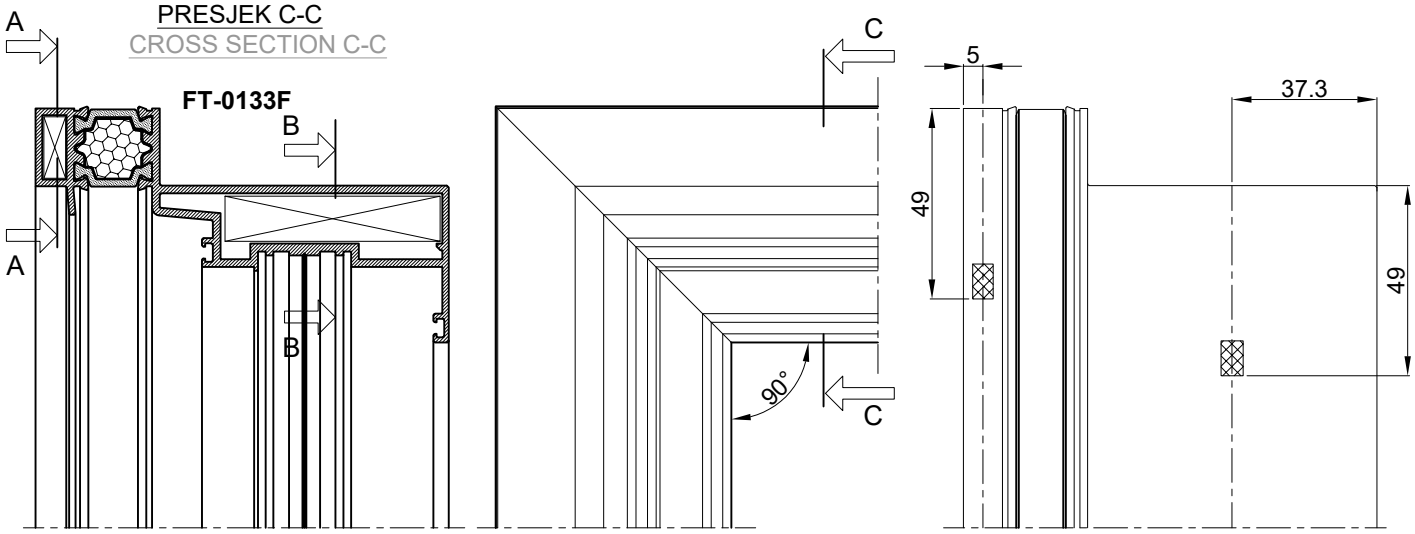

FT-0133F


PRESJEK A-A
CROSS SECTION A-A


725.027
(l=6,3mm)

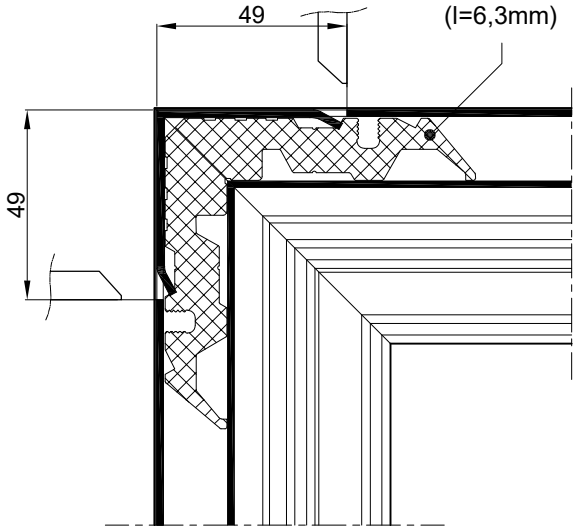

PRESJEK B-B
CROSS SECTION B-B

725.122
(l=56.5 mm)

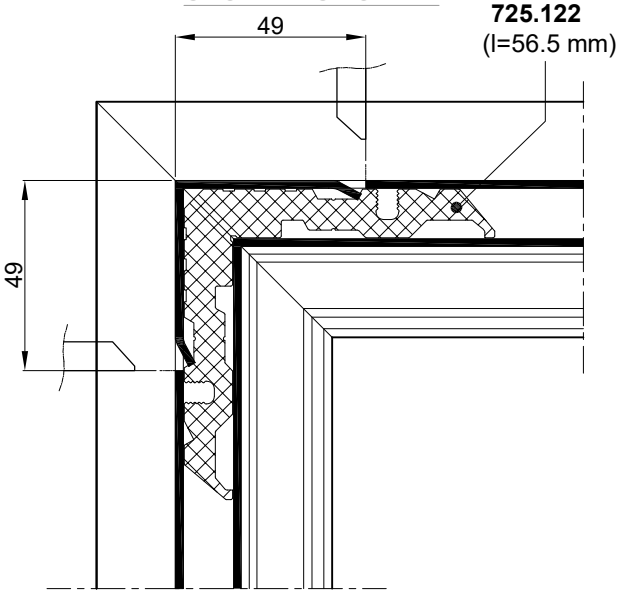

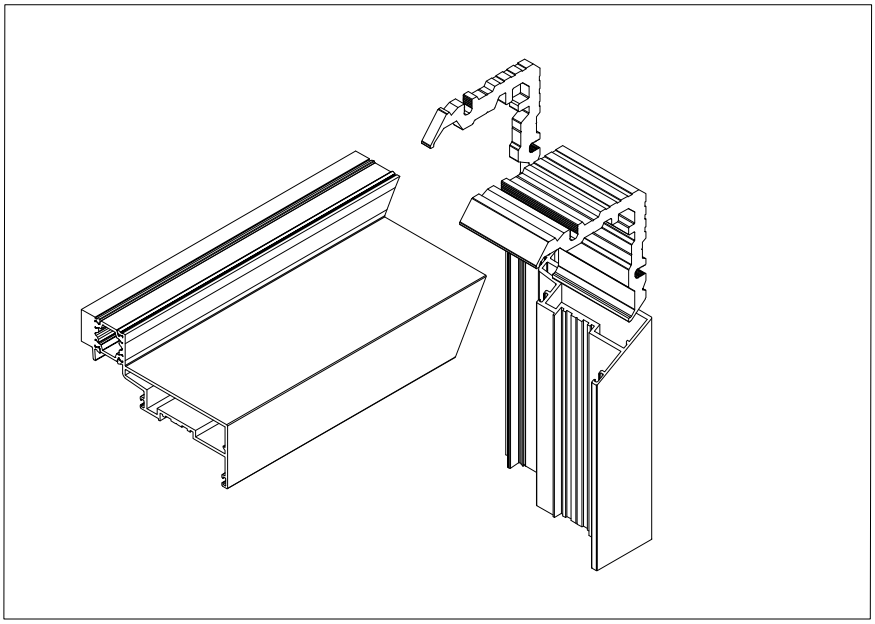


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

FT-0133F

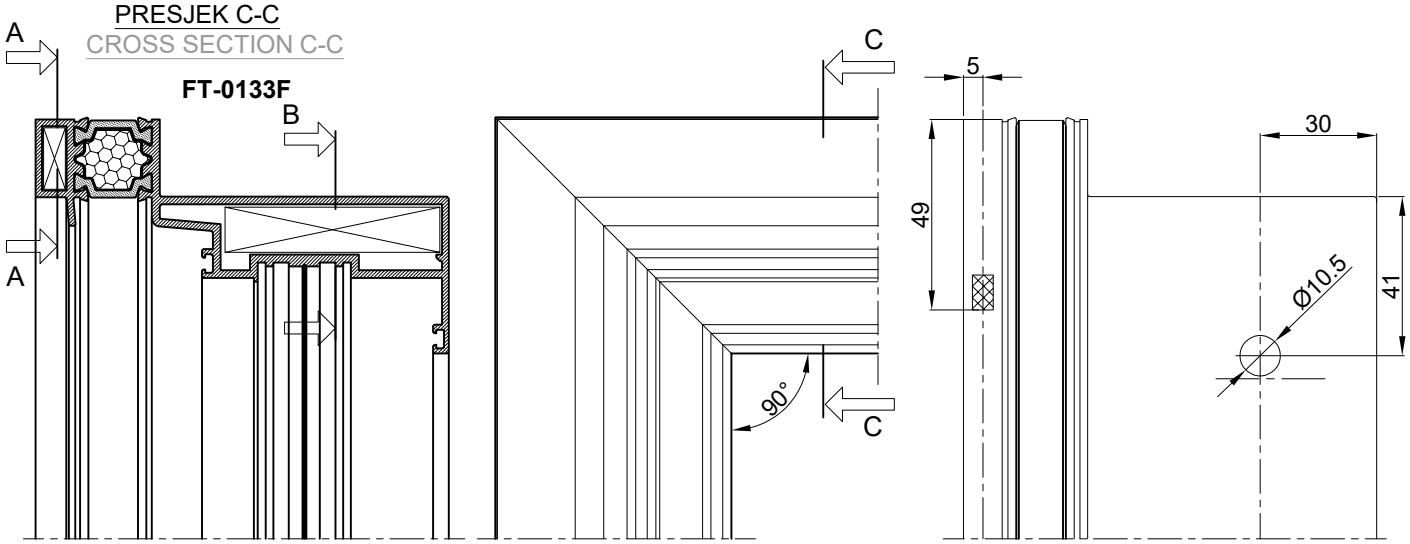


PRESJEK A-A
CROSS SECTION A-A


725.027
(l=6,3mm)

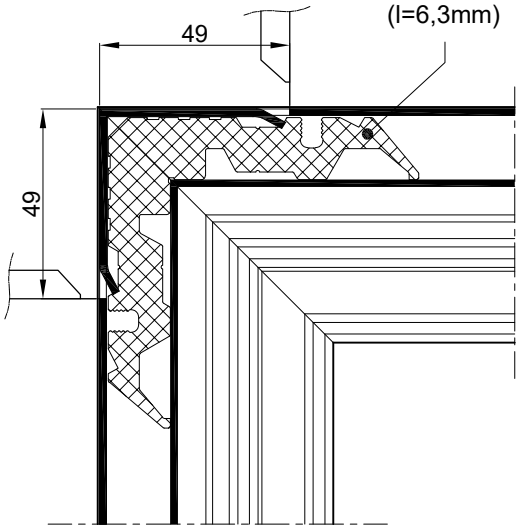

PRESJEK B-B
CROSS SECTION B-B

725.123
(l=56.3 mm)

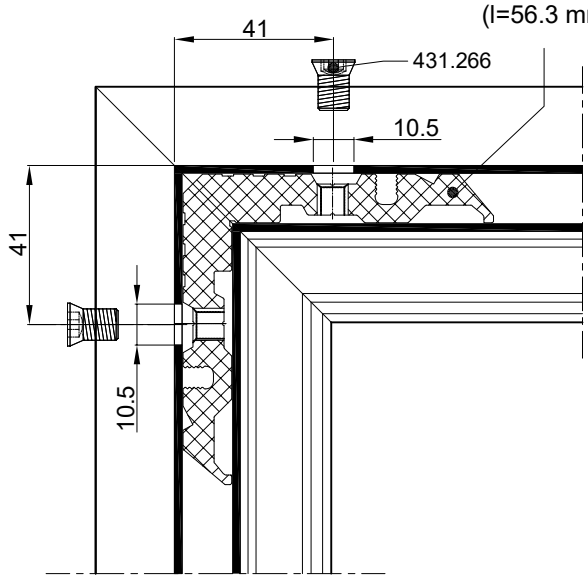


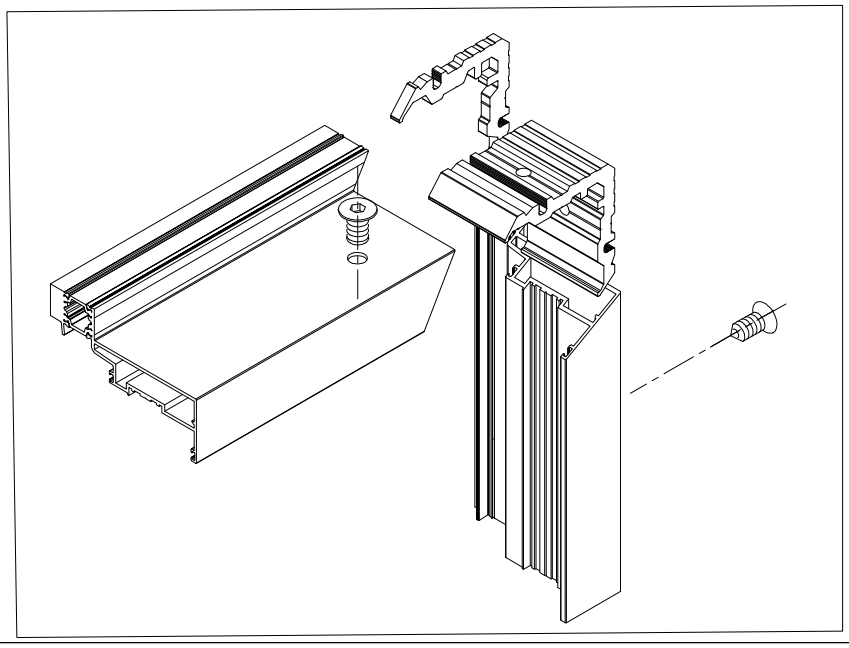



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

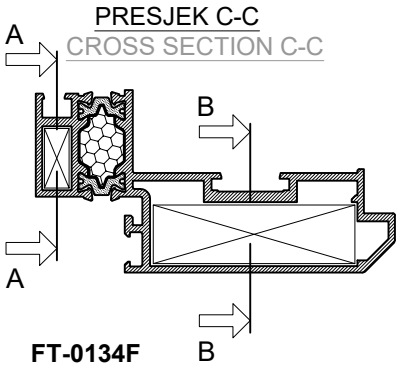

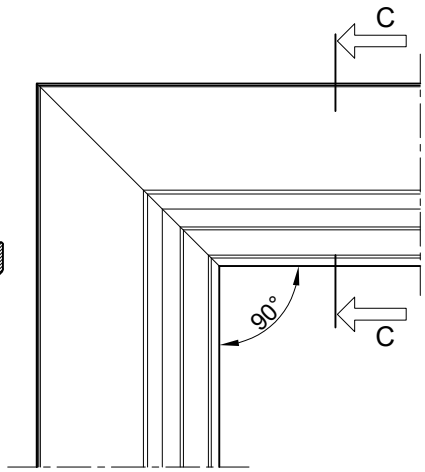


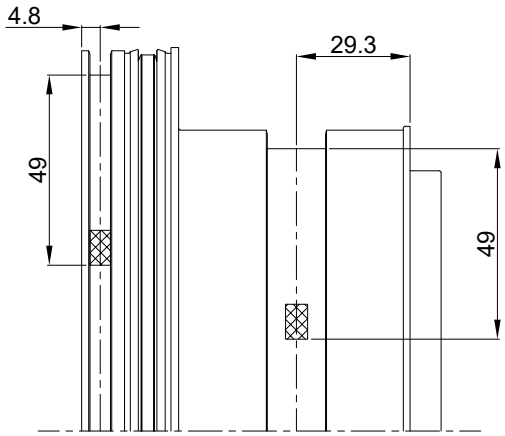


PRESJEK A-A
CROSS SECTION A-A

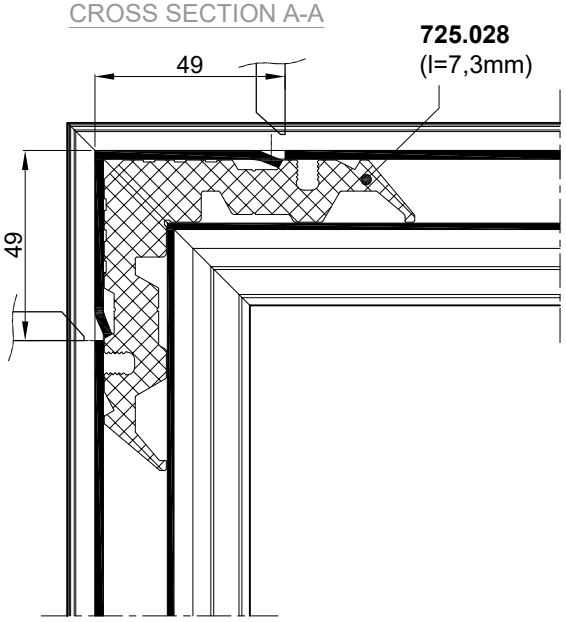


PRESJEK B-B
CROSS SECTION B-B

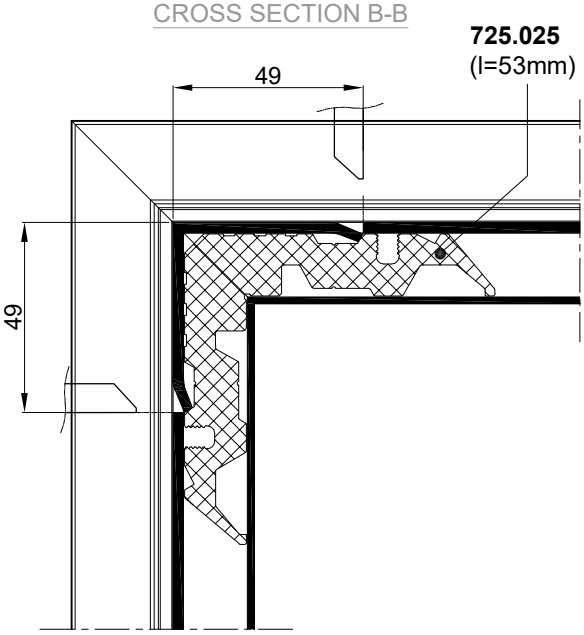


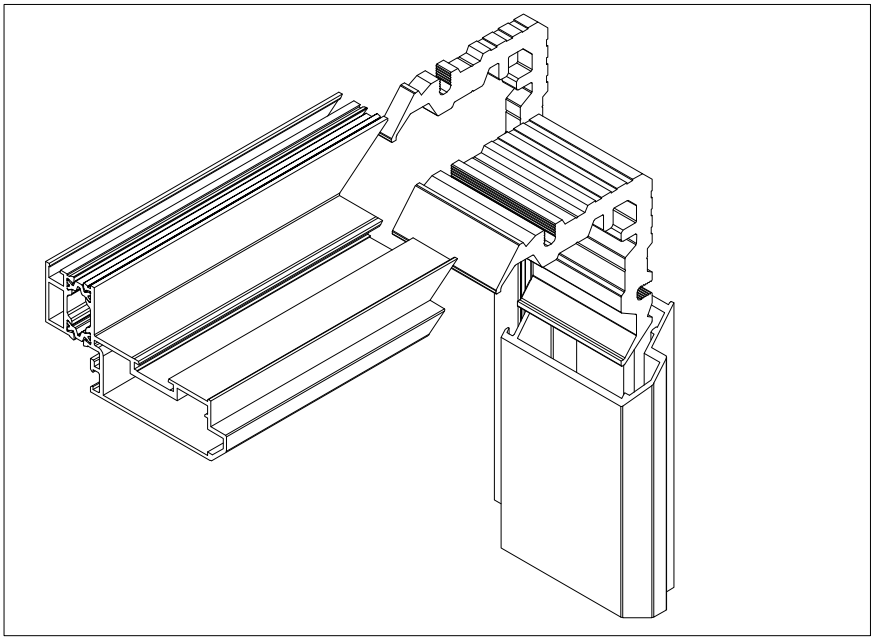



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

- VIJČANA VEZA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

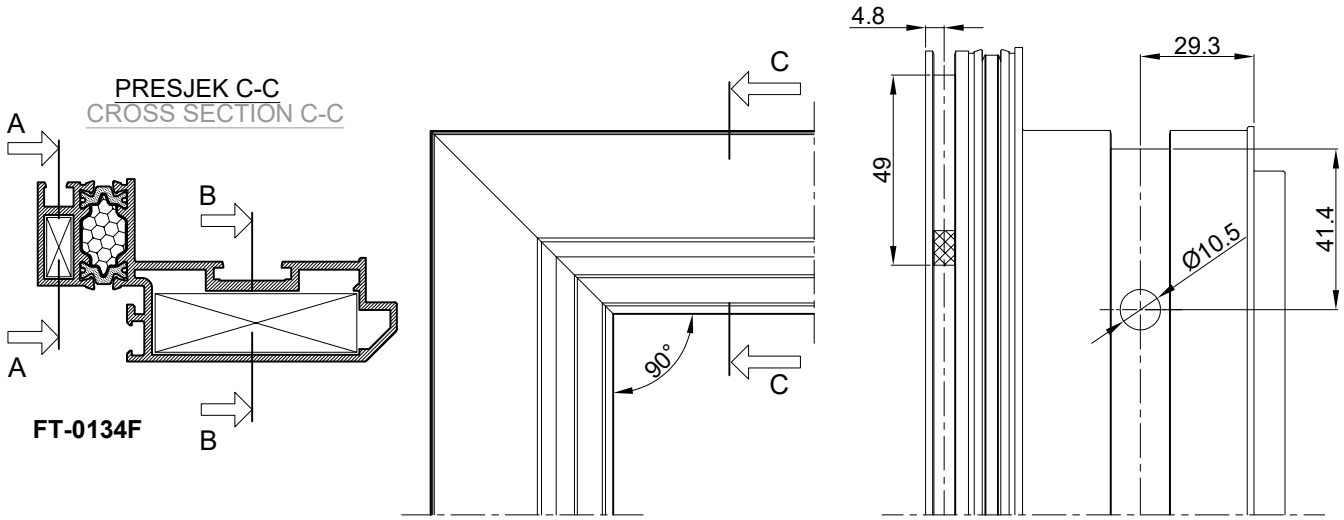

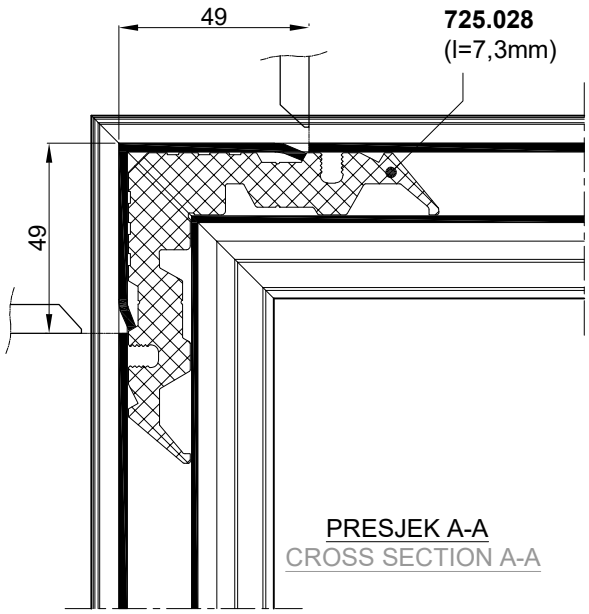

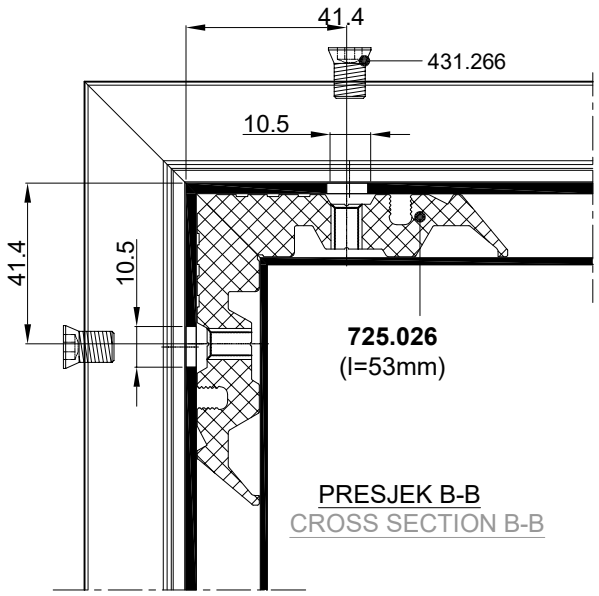


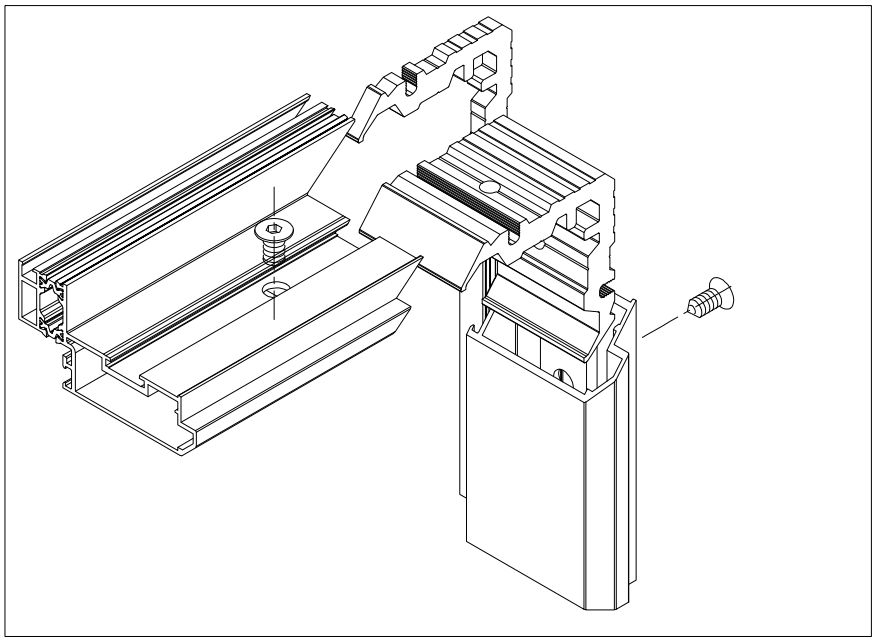


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

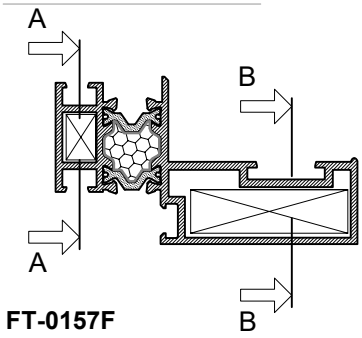


FT-0157F

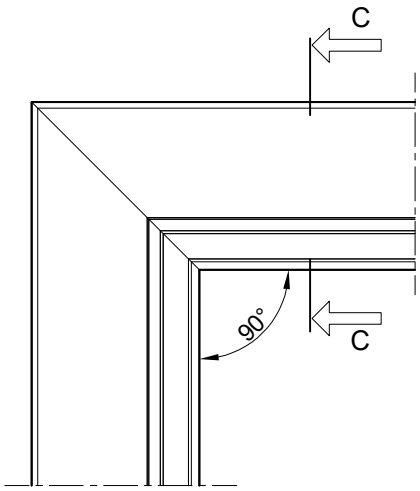

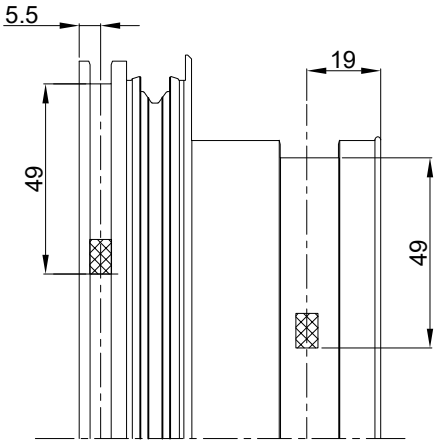


PRESJEK A-A
CROSS SECTION A-A

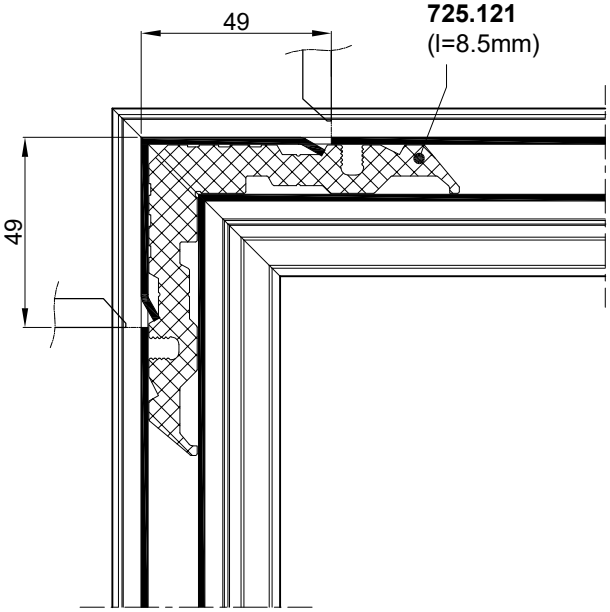


725.121
(l=8.5mm)

PRESJEK B-B
CROSS SECTION B-B

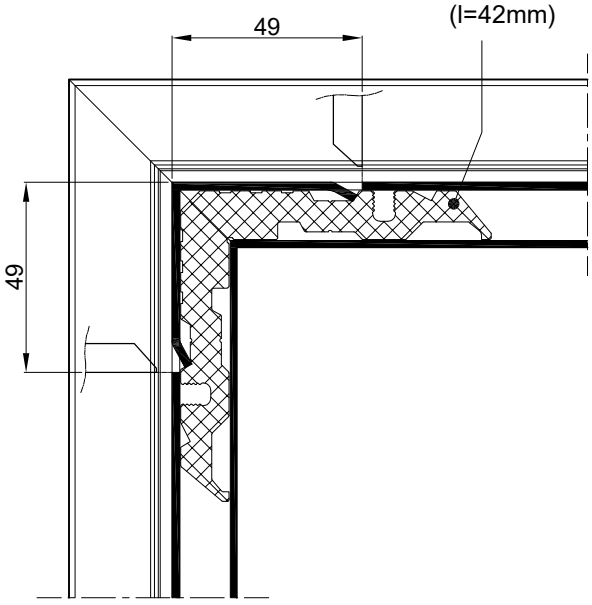

725.118
(l=42mm)

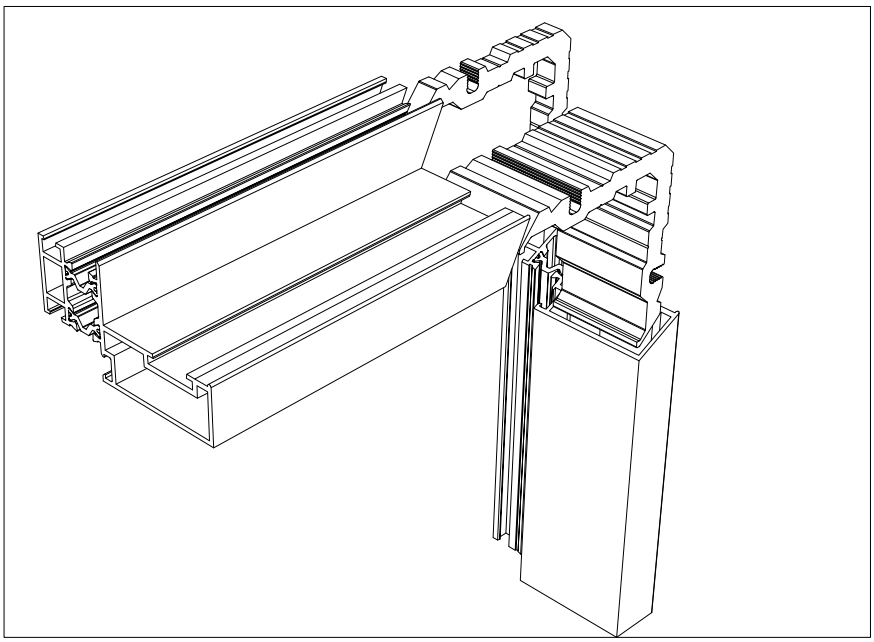


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C



FT-0157F

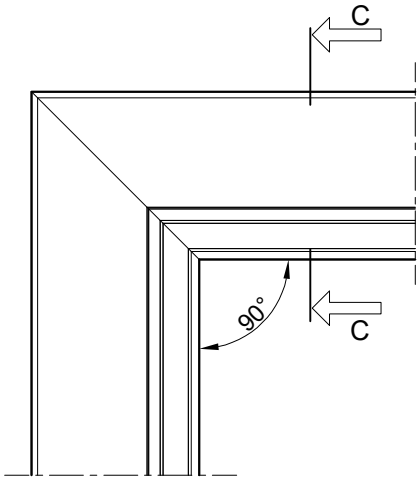


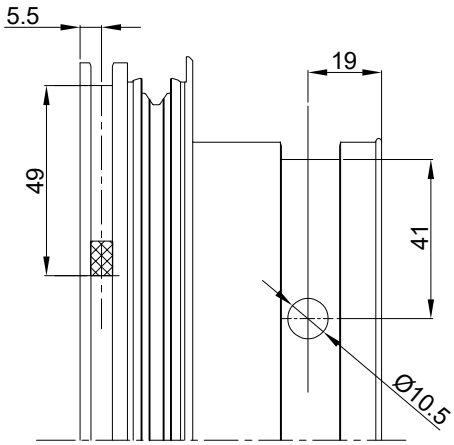

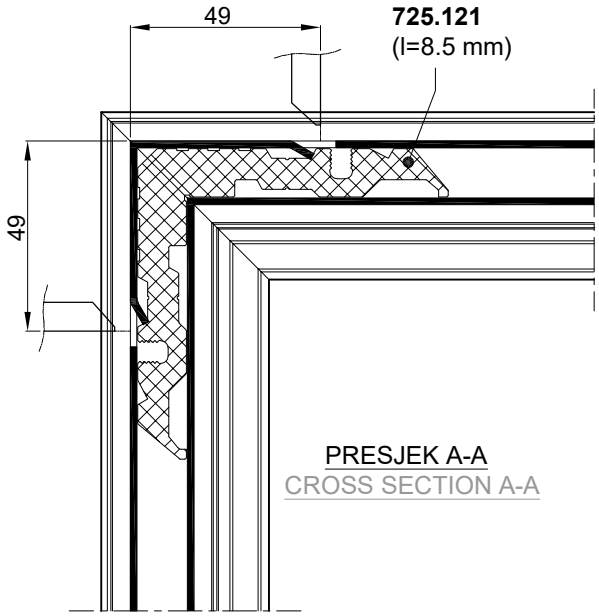


725.121
(l=8.5 mm)

PRESJEK A-A
CROSS SECTION A-A

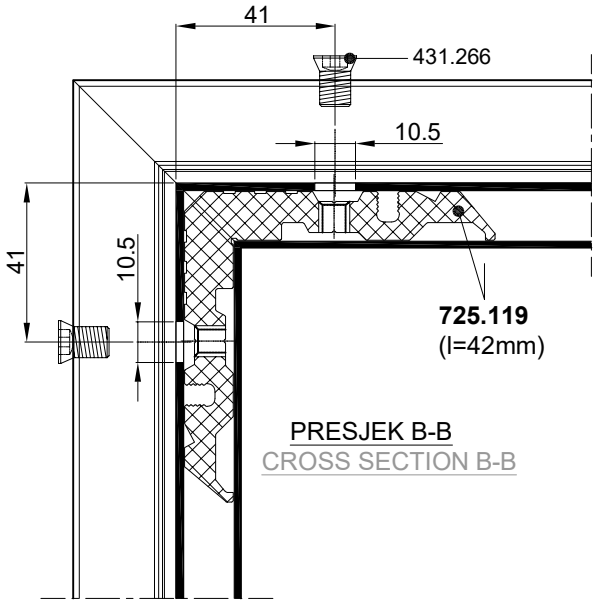

725.119
(l=42mm)


PRESJEK B-B
CROSS SECTION B-B

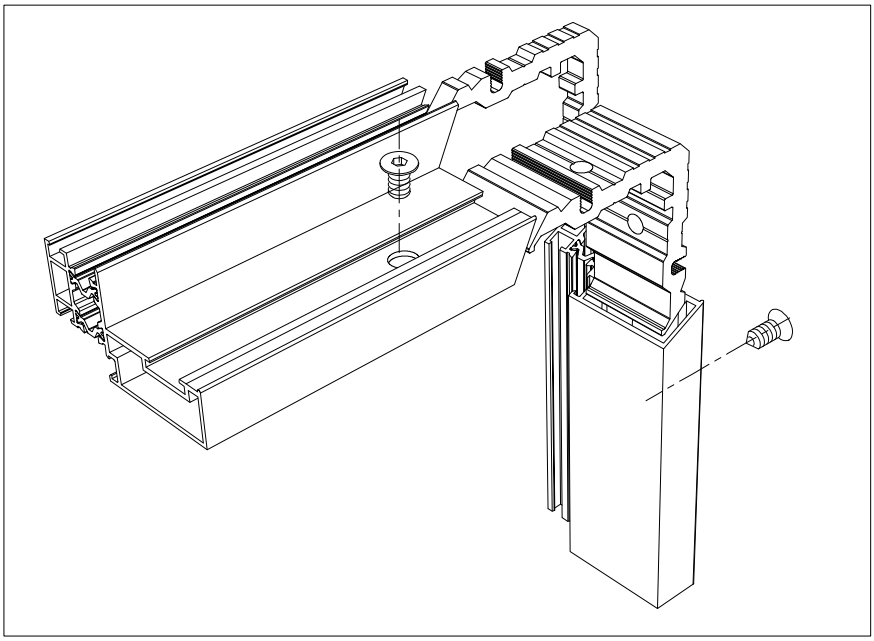



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

- UPREŠAVANJE STJENKE PROFILA PREMA KUTNIKU
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

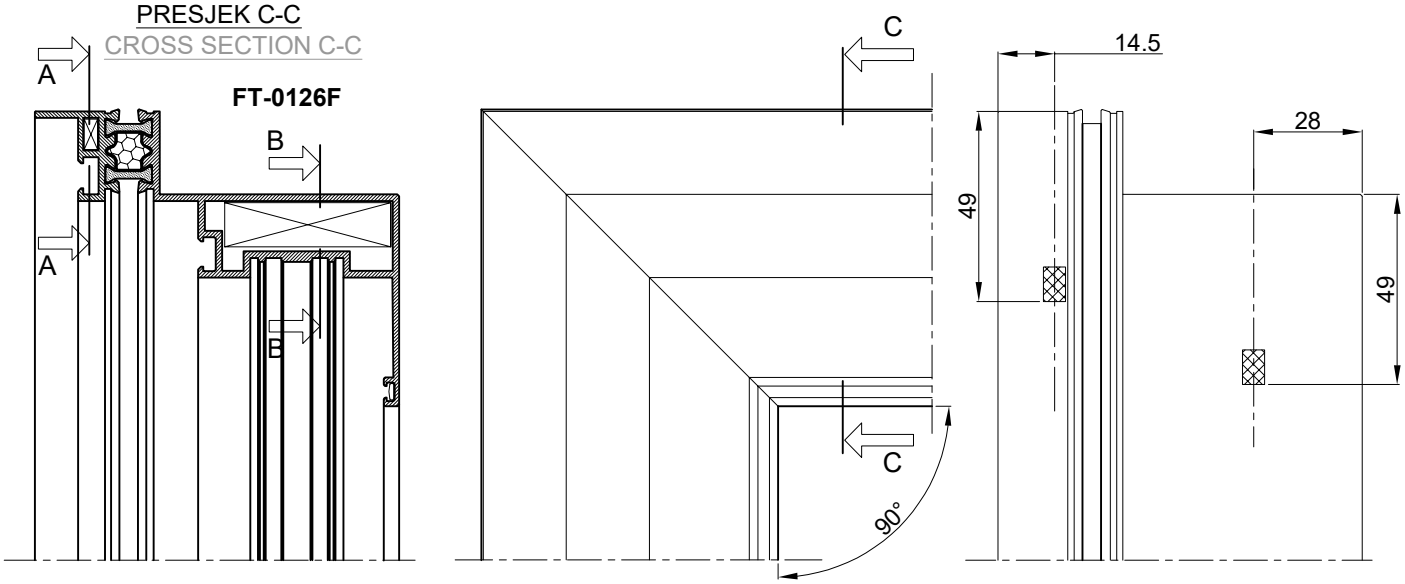


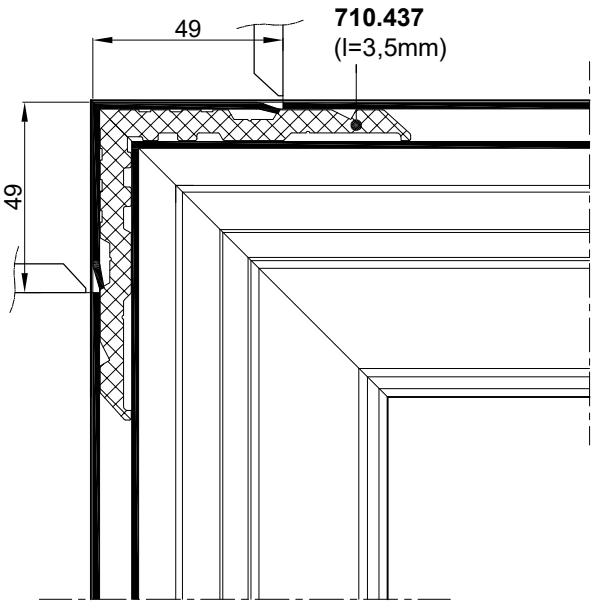

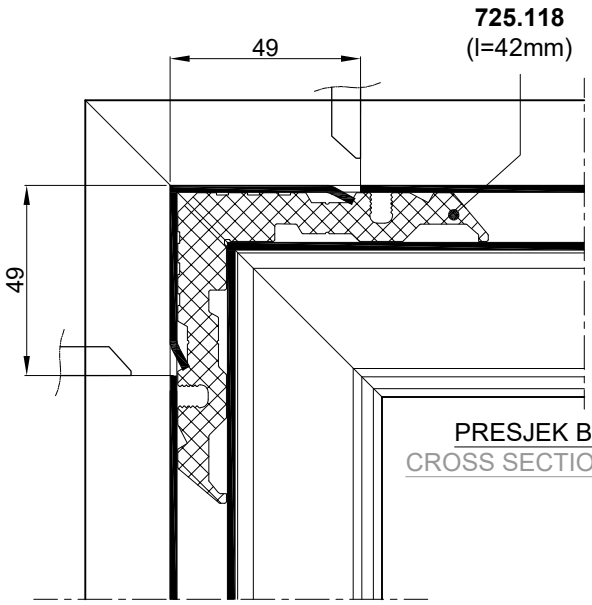

PRESJEK B-B
CROSS SECTION B-B


PRESJEK A-A
CROSS SECTION A-A

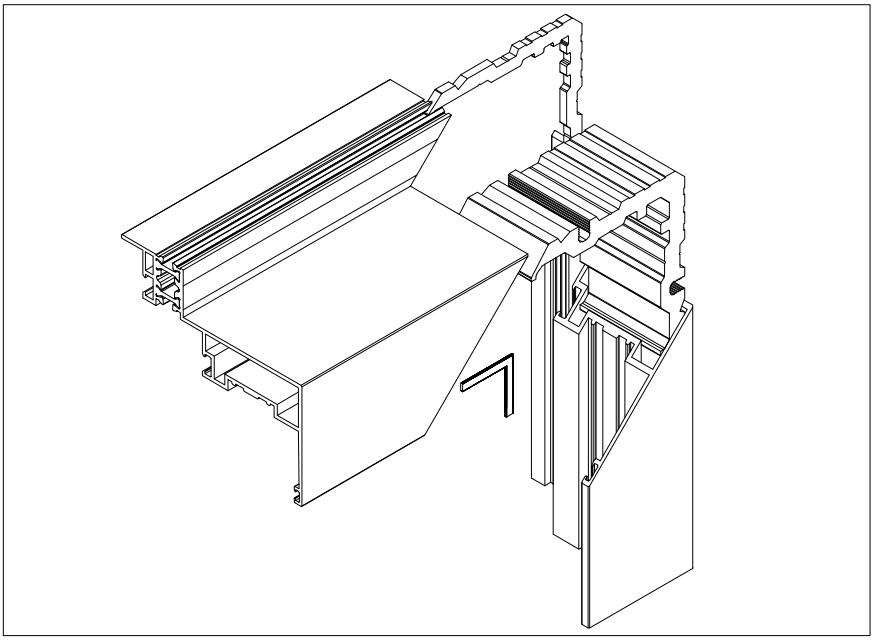


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE PREMA KUTNIKU
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

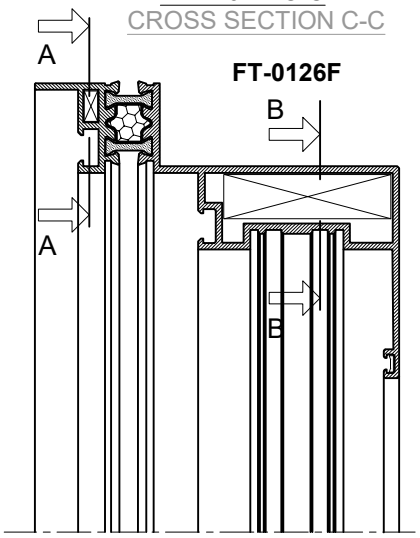


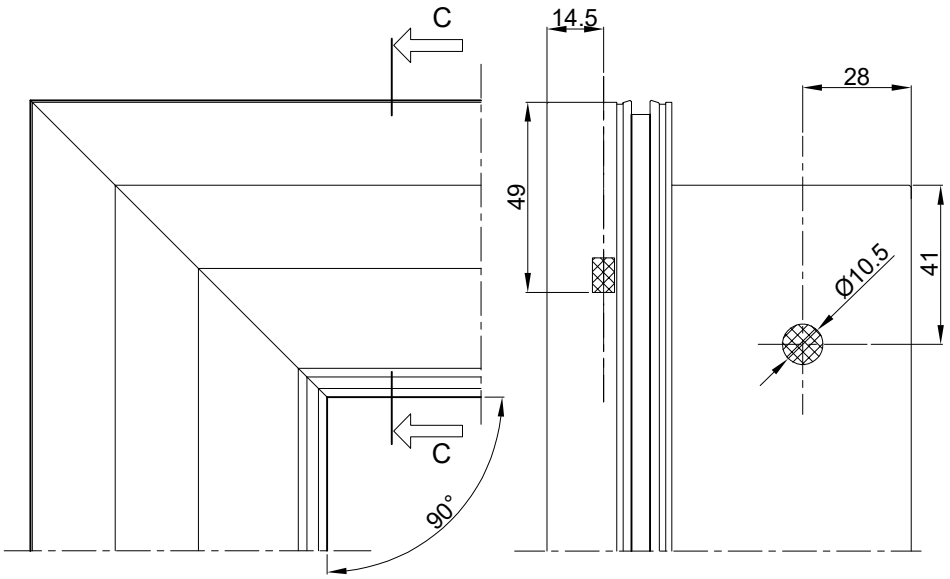


PRESJEK A-A

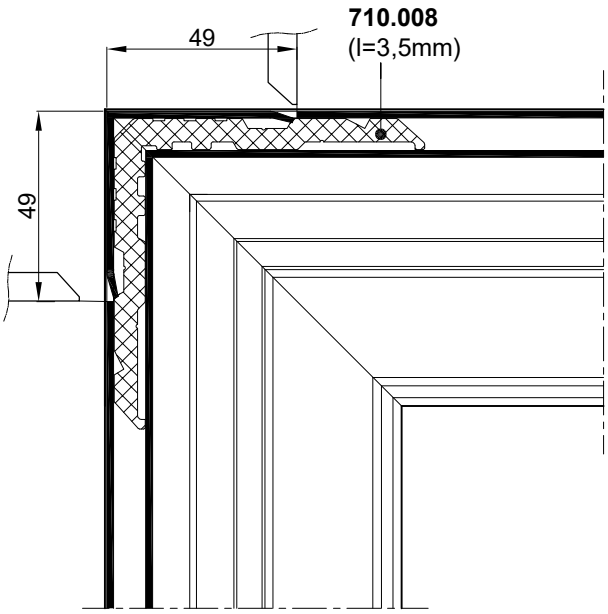

PRESJEK B-B
CROSS SECTION B-B

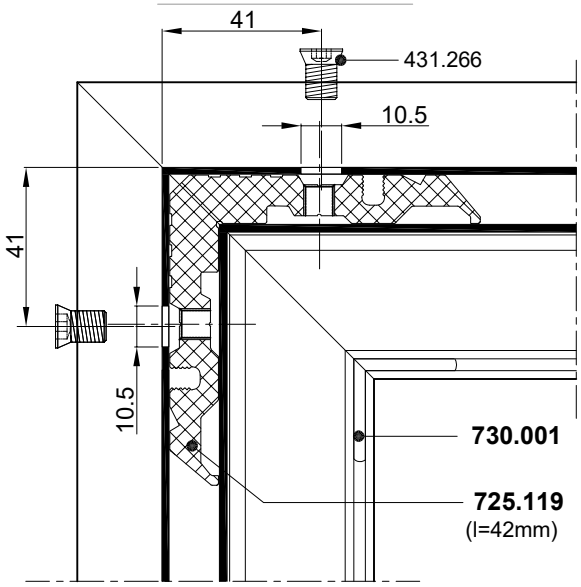


PRESJEK A-A
CROSS SECTION A-A

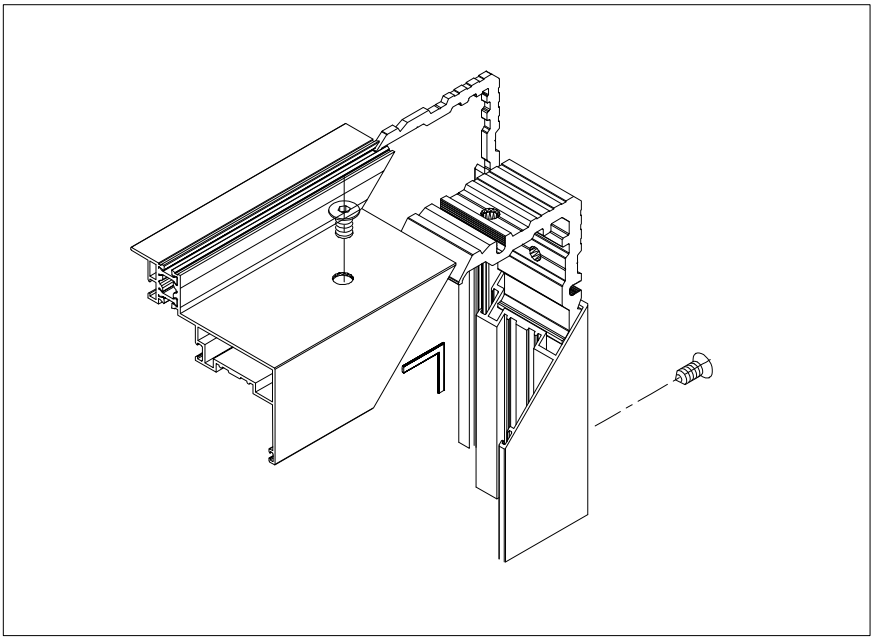


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

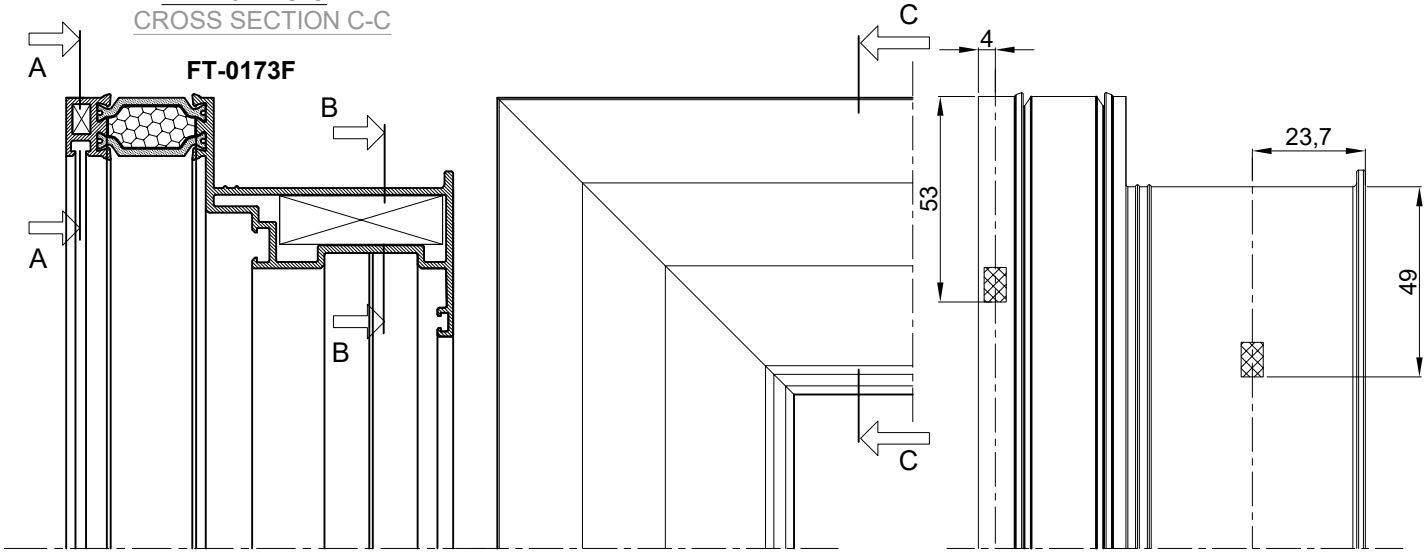


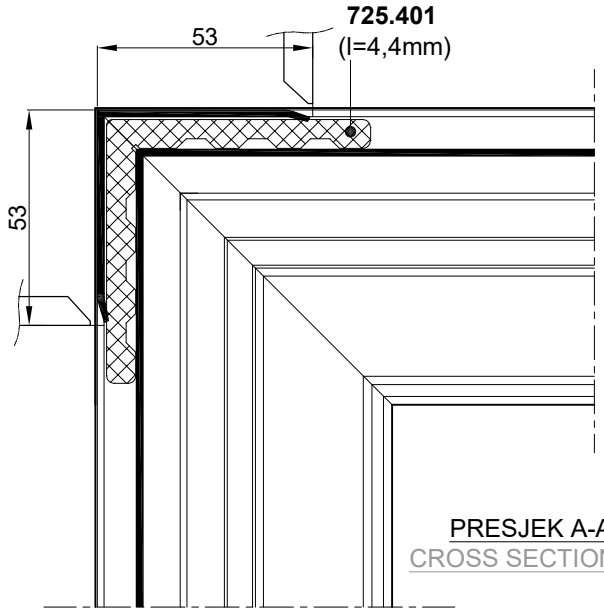

PRESJEK A-A
CROSS SECTION A-A

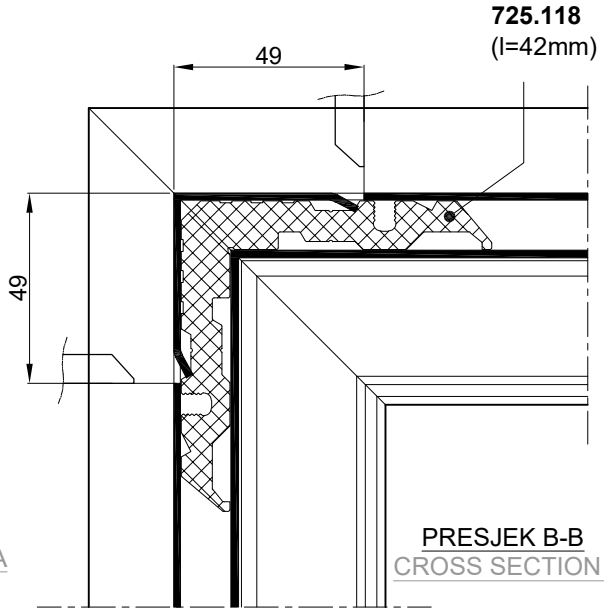


PRESJEK B-B
CROSS SECTION B-B

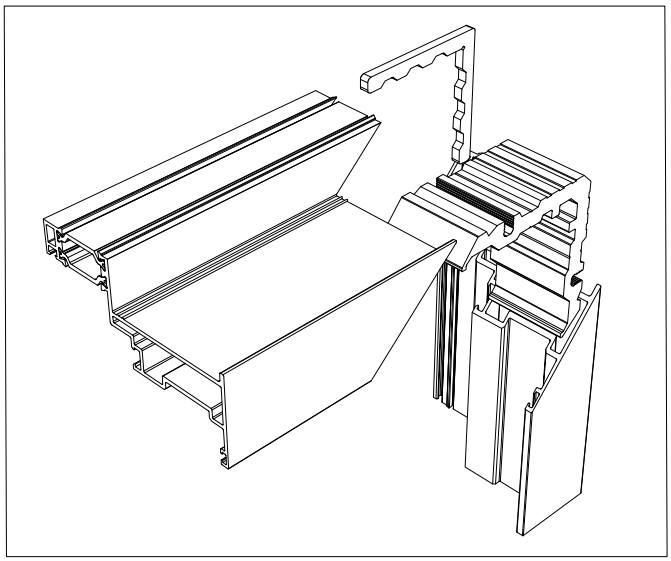


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

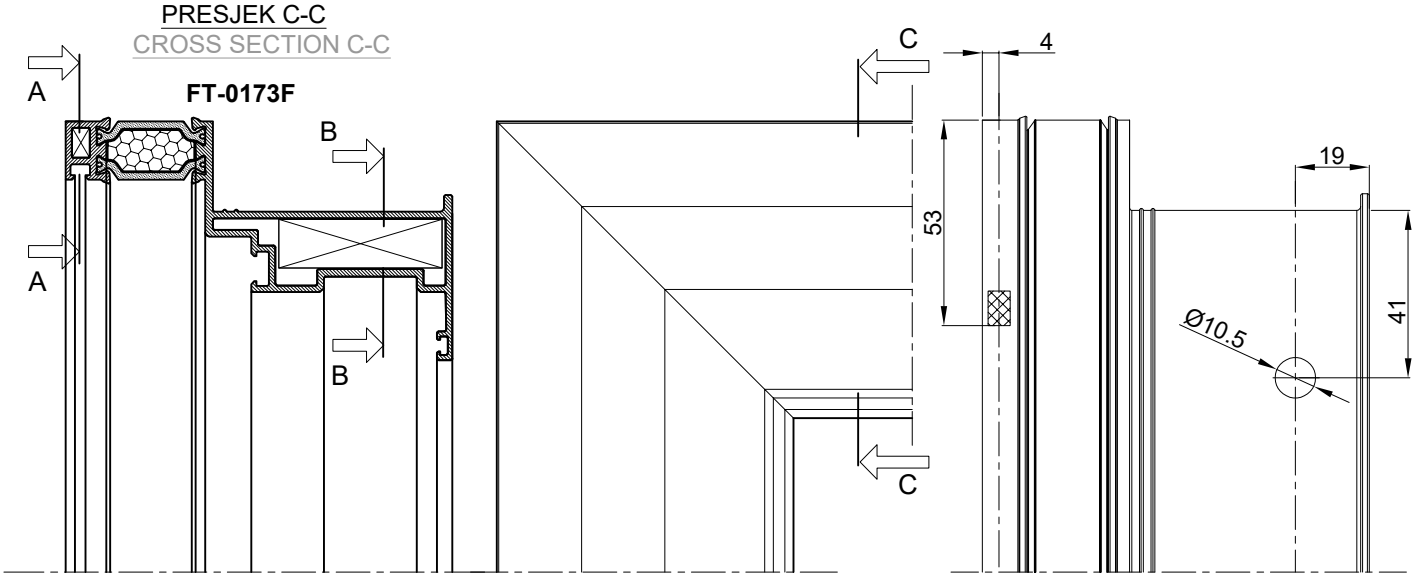


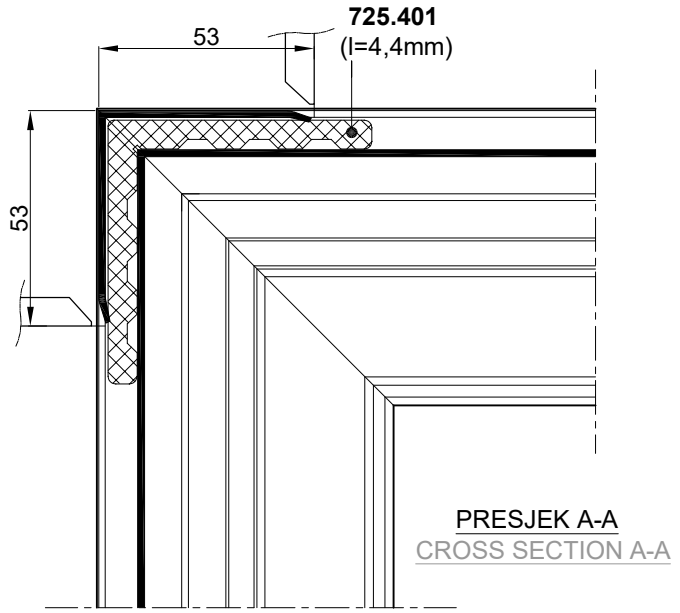

PRESJEK A-A
CROSS SECTION A-A

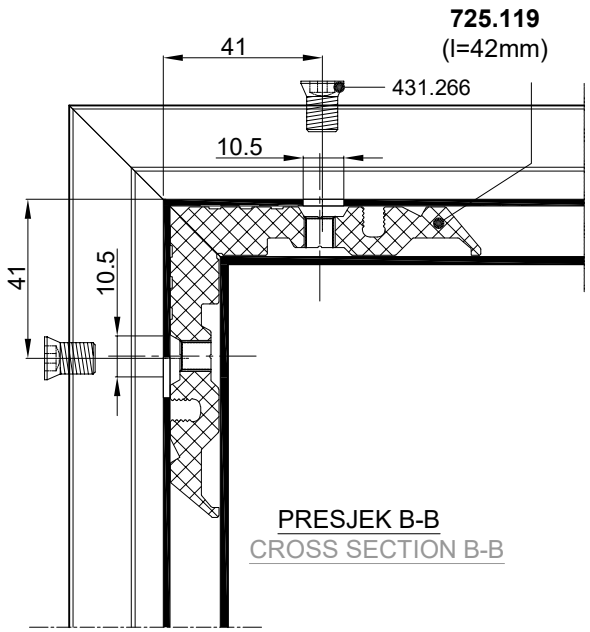

PRESJEK B-B
CROSS SECTION B-B

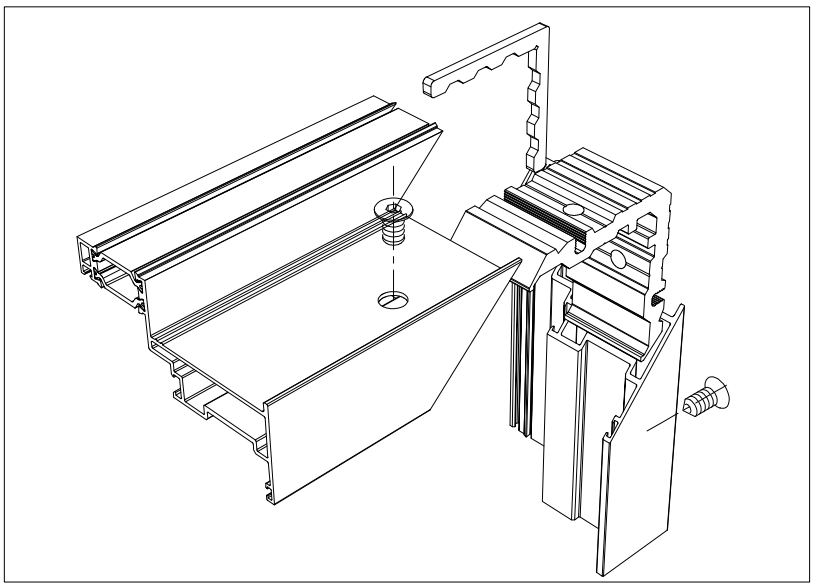



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

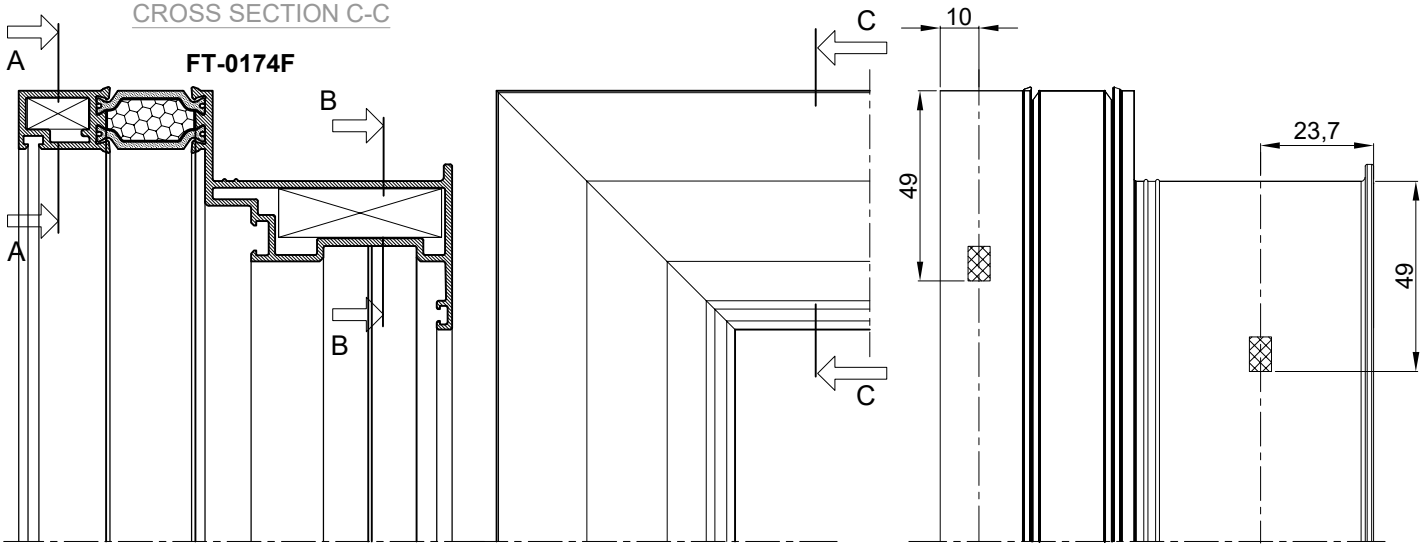


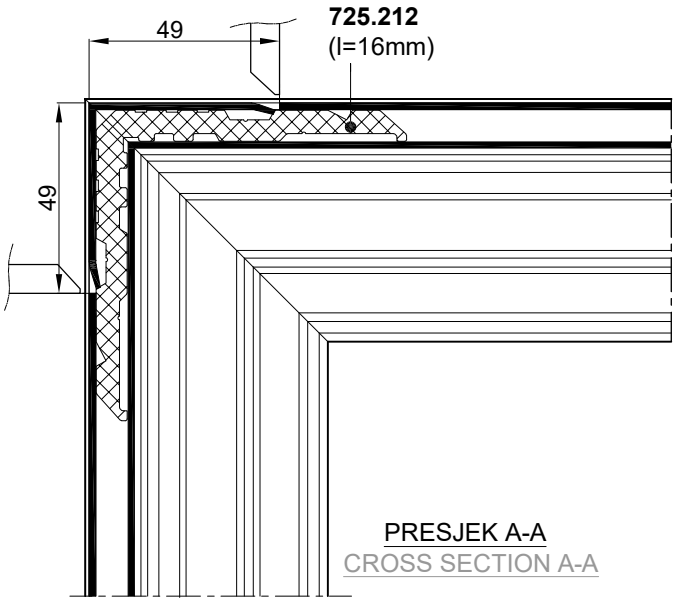

PRESJEK A-A
CROSS SECTION A-A

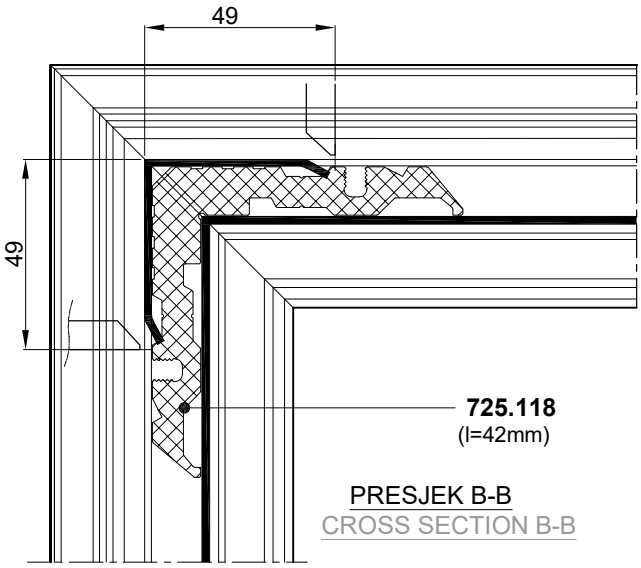


PRESJEK B-B
CROSS SECTION B-B

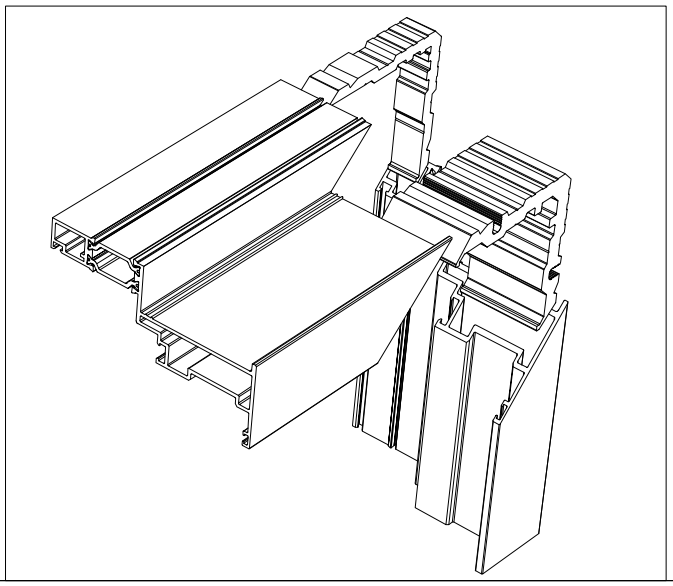


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION

PRESJEK C-C
CROSS SECTION C-C

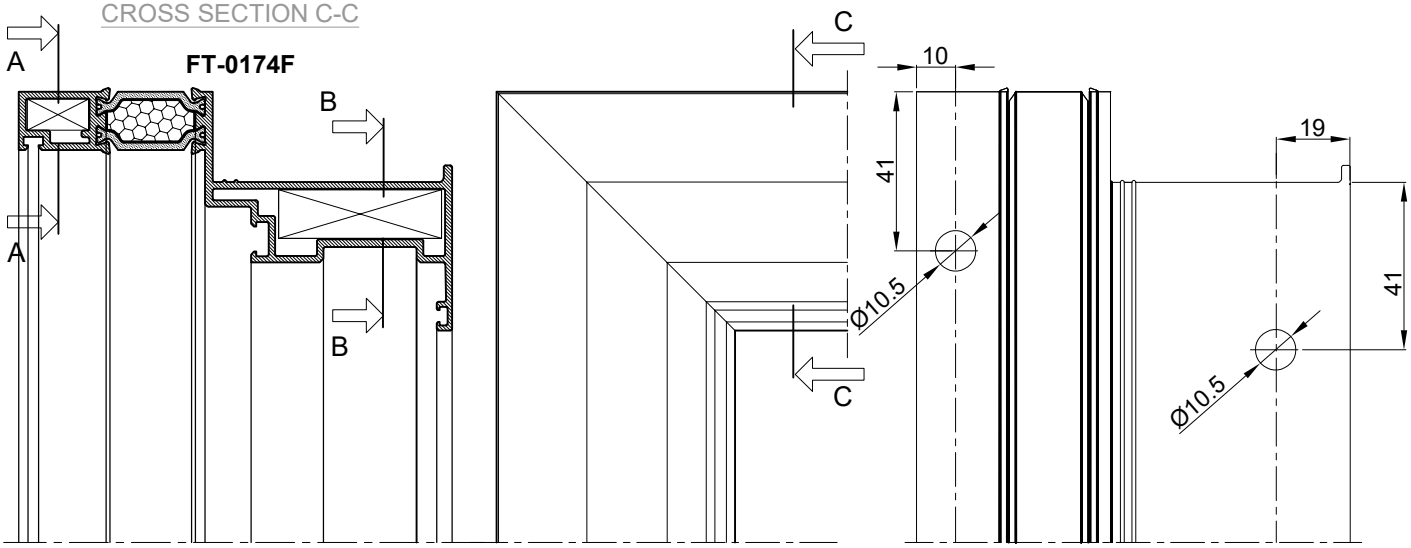


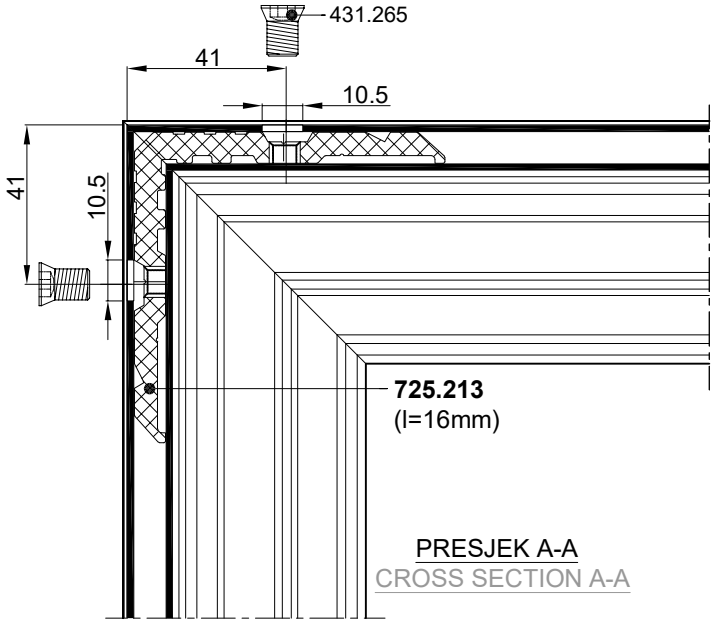

PRESJEK A-A
CROSS SECTION A-A

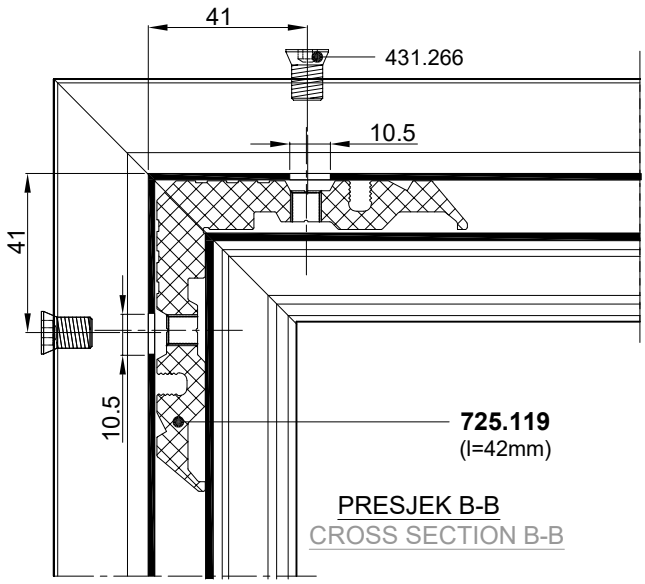


PRESJEK B-B
CROSS SECTION B-B

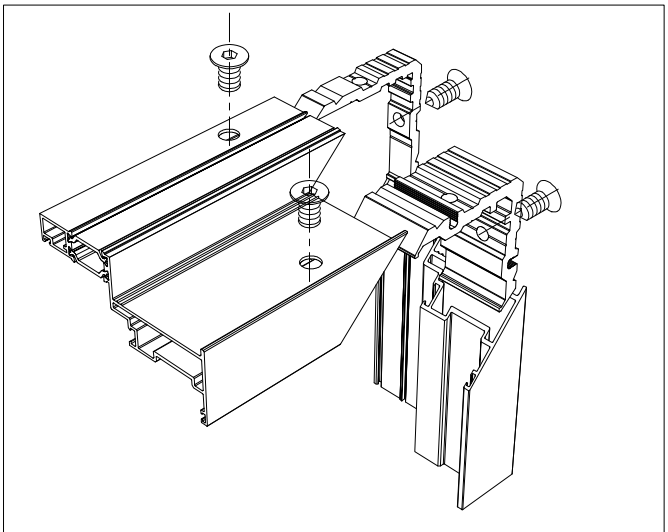


1. VIJČANA VEZA
1. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA PREMA KUTNIKU
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

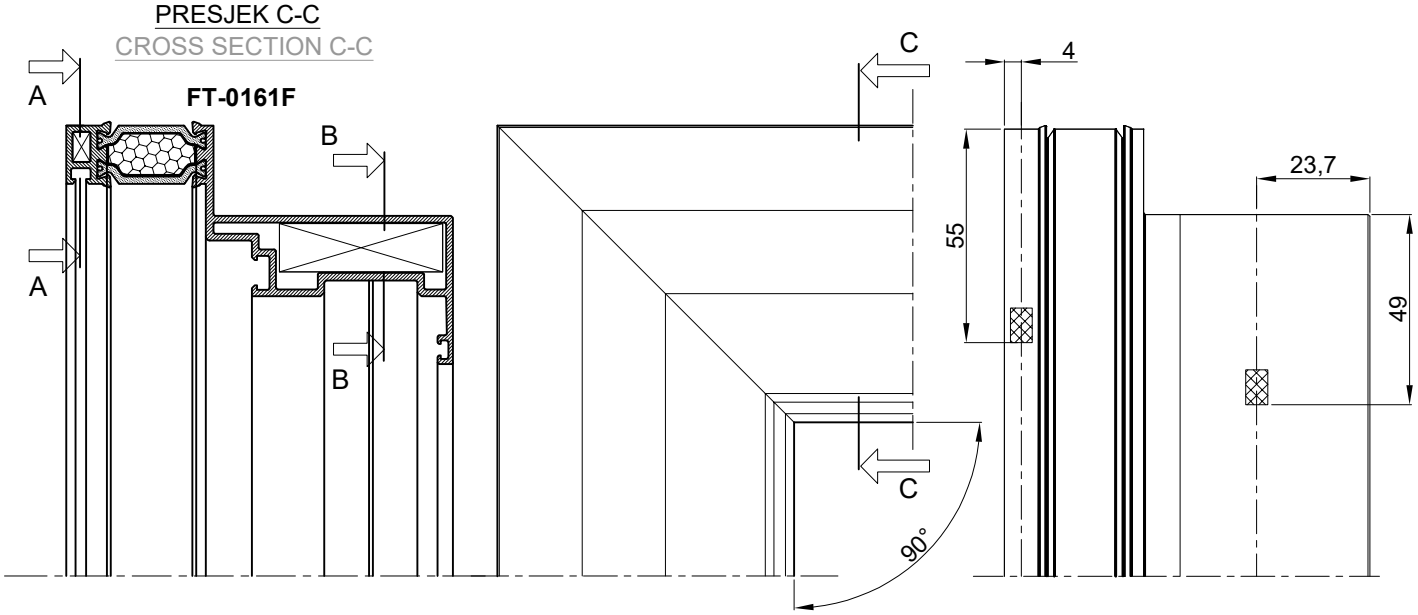


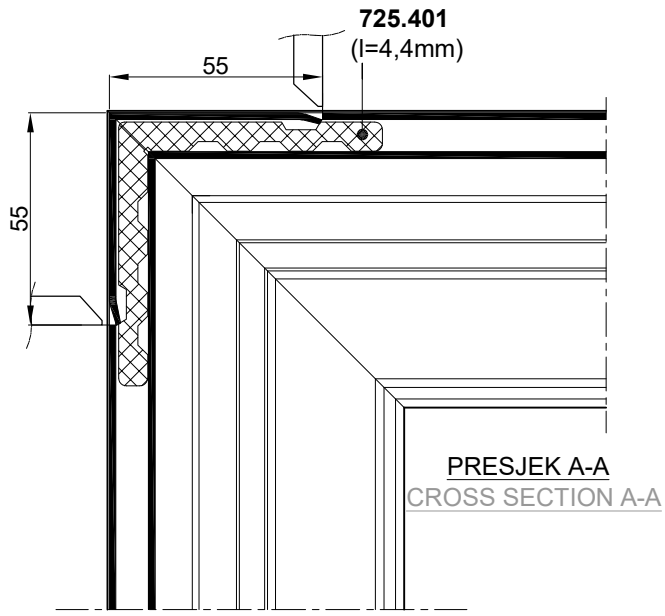

PRESJEK A-A
CROSS SECTION A-A

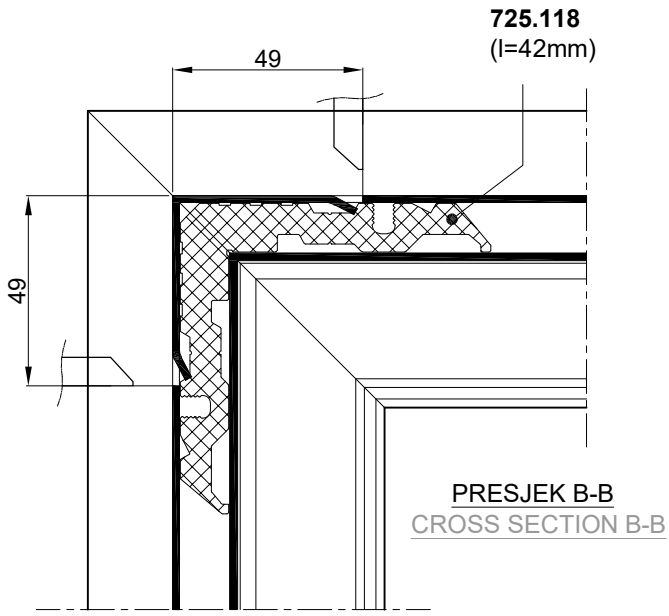


PRESJEK B-B
CROSS SECTION B-B

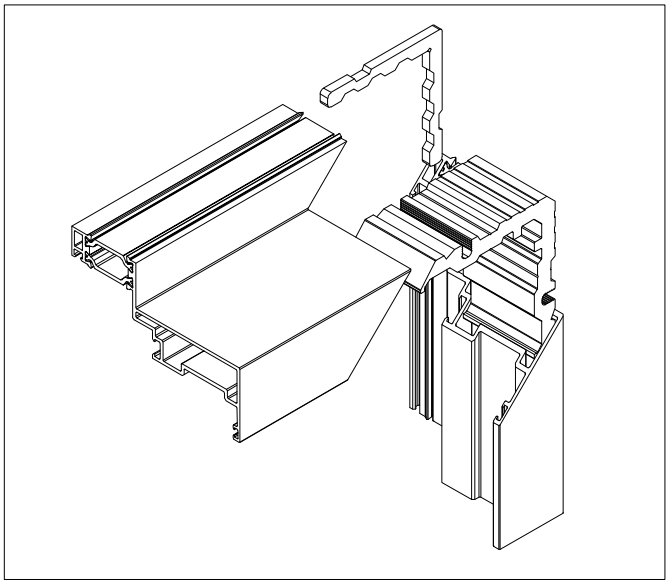


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE PREMA KUTNIKU
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

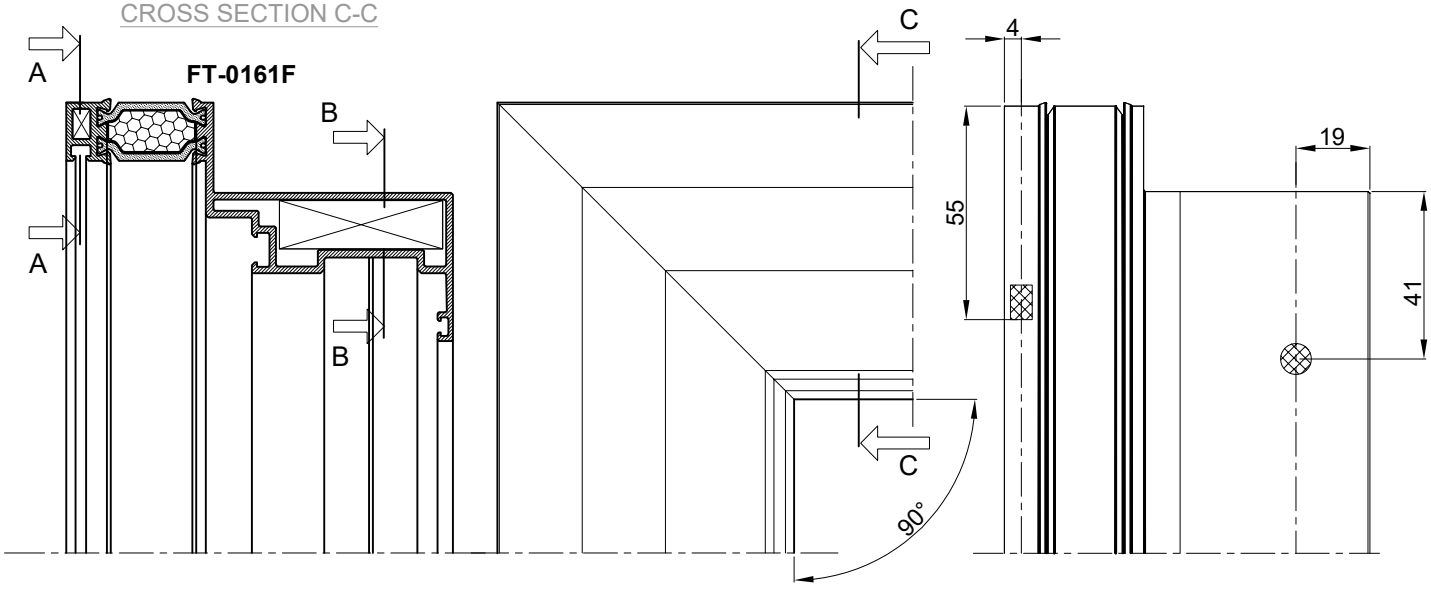


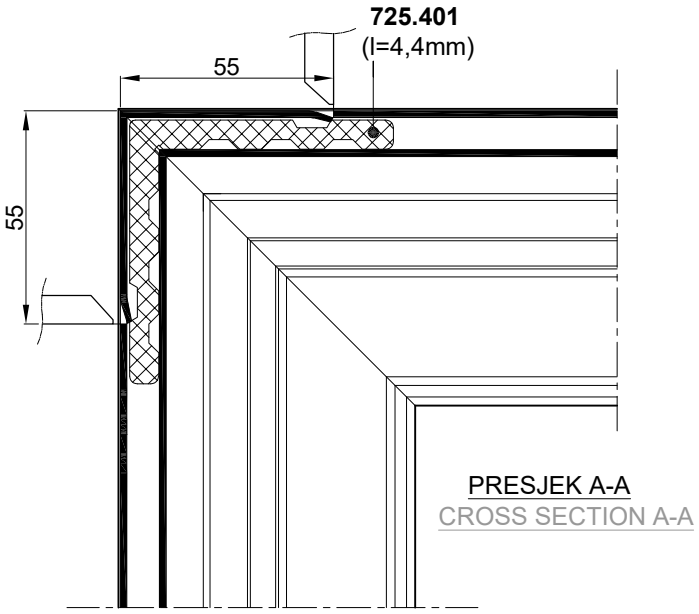

PRESJEK A-A
CROSS SECTION A-A

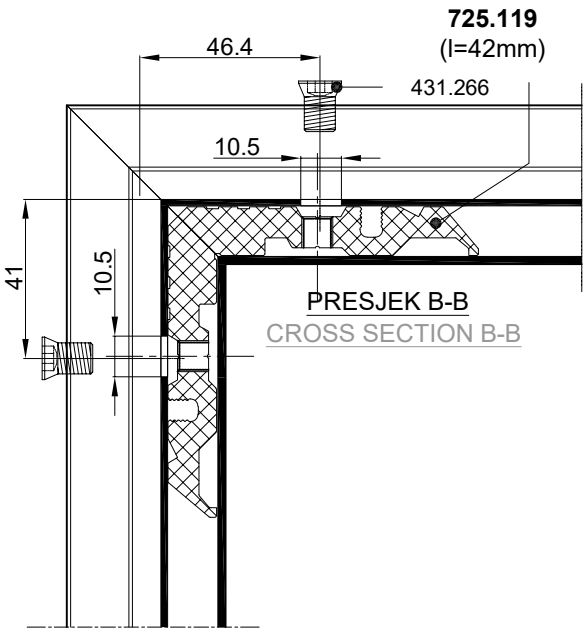


PRESJEK B-B
CROSS SECTION B-B

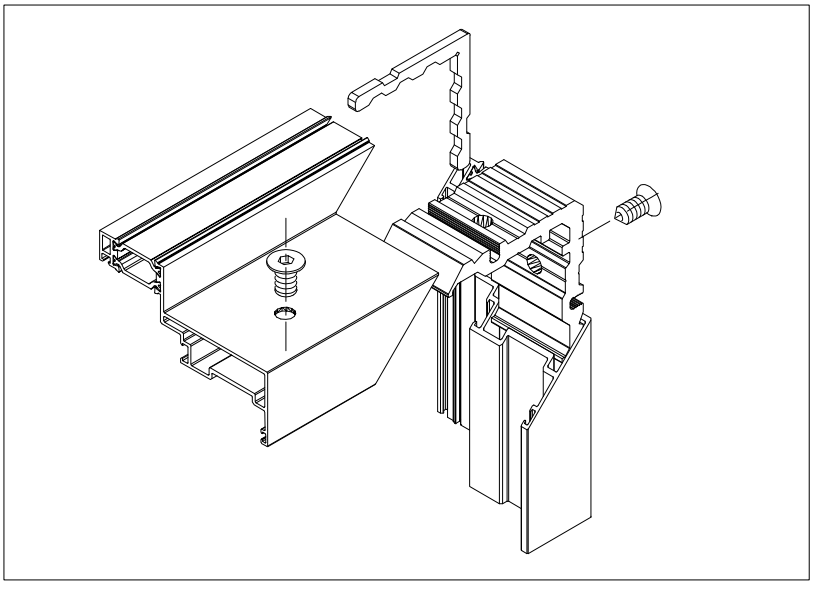


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA PREMA KUTNIKU
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

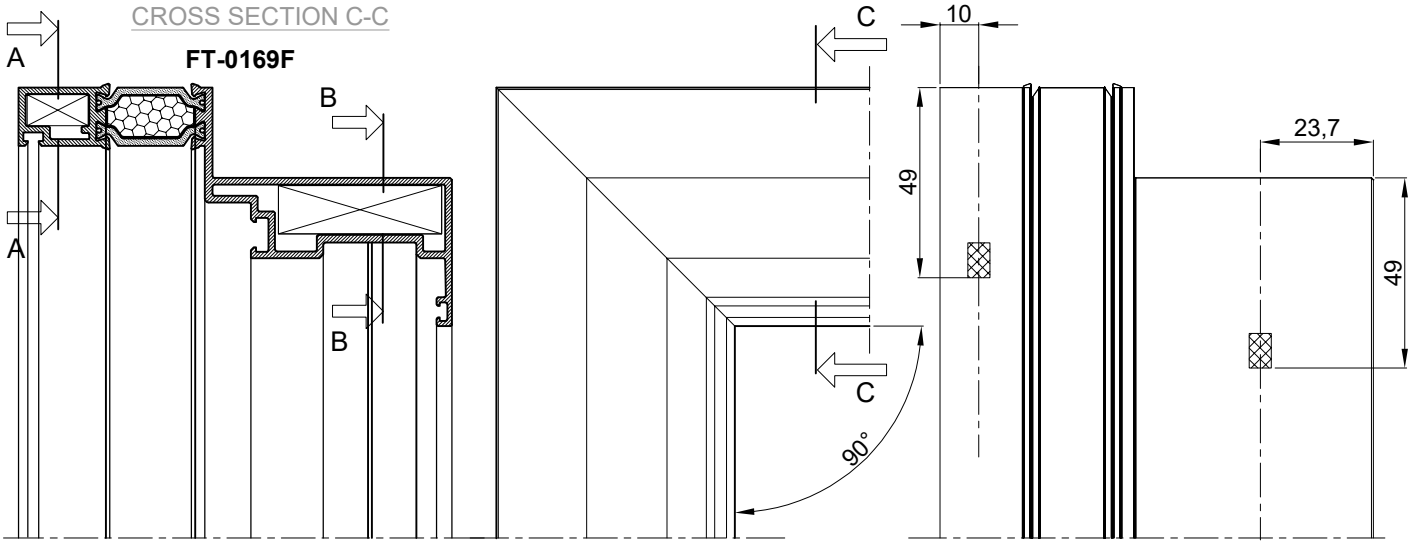


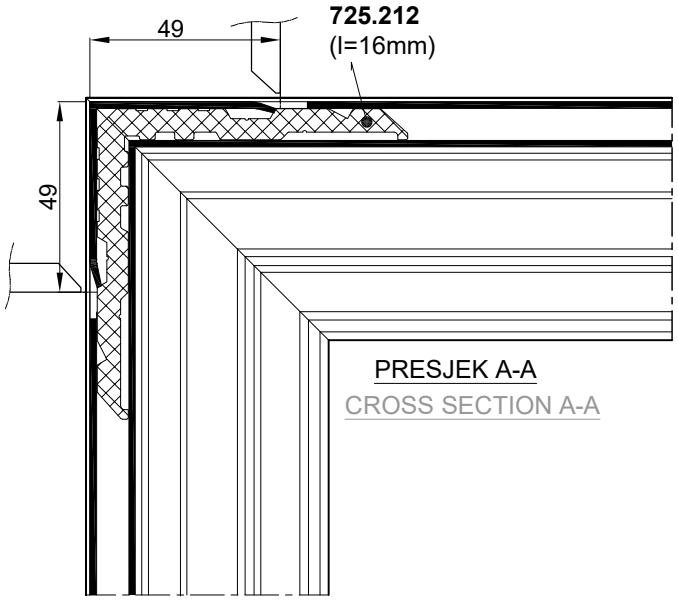

PRESJEK A-A
CROSS SECTION A-A

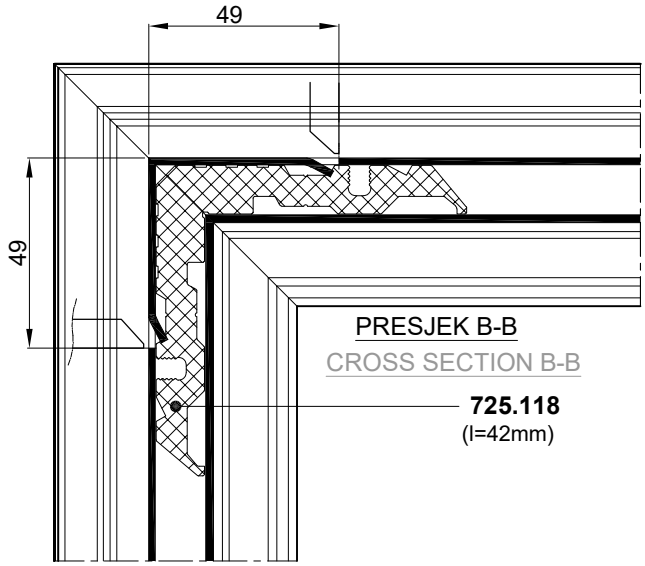


PRESJEK B-B
CROSS SECTION B-B

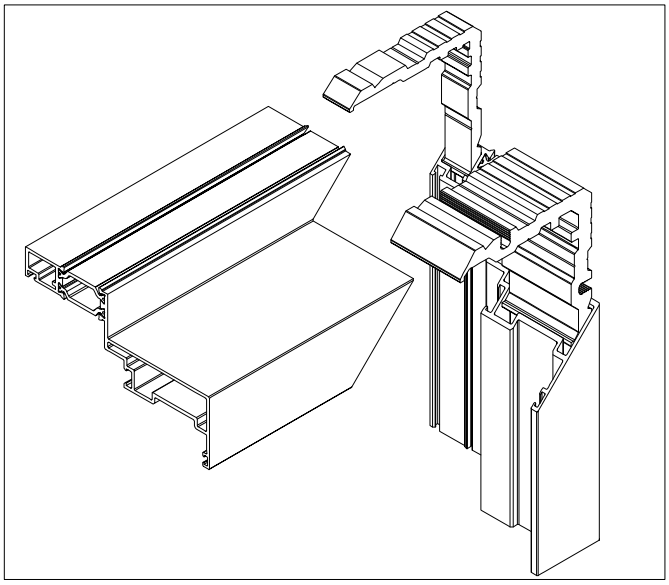


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION

PRESJEK C-C
CROSS SECTION C-C

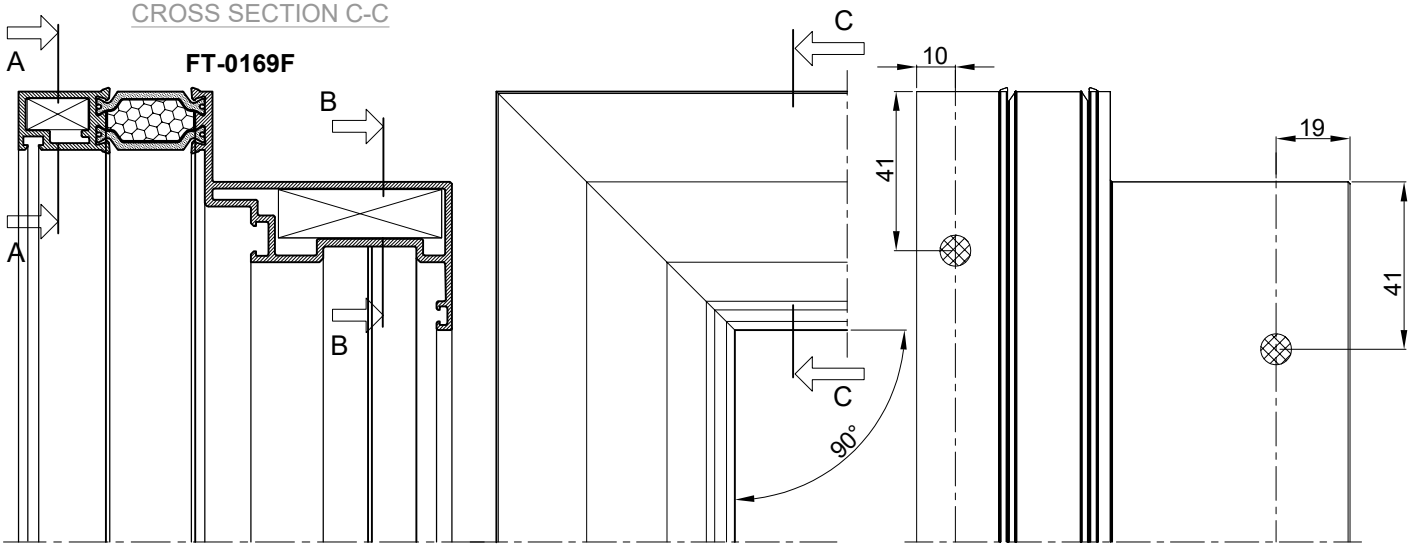


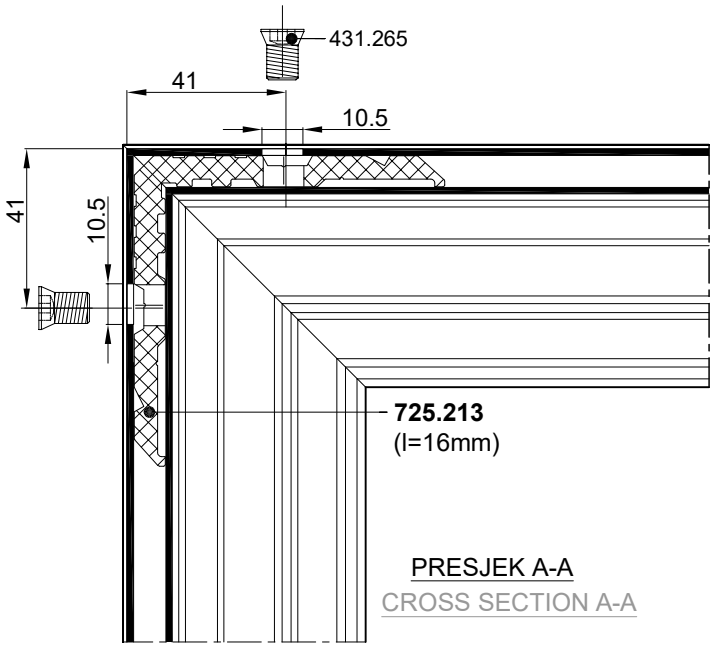

PRESJEK A-A
CROSS SECTION A-A

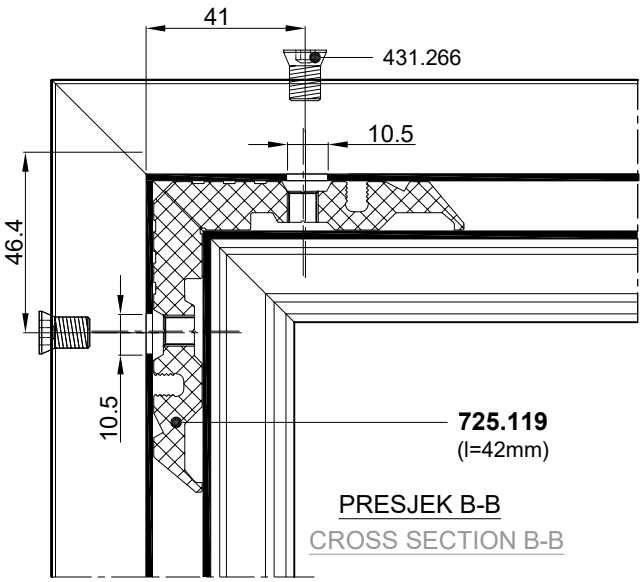

PRESJEK B-B
CROSS SECTION B-B

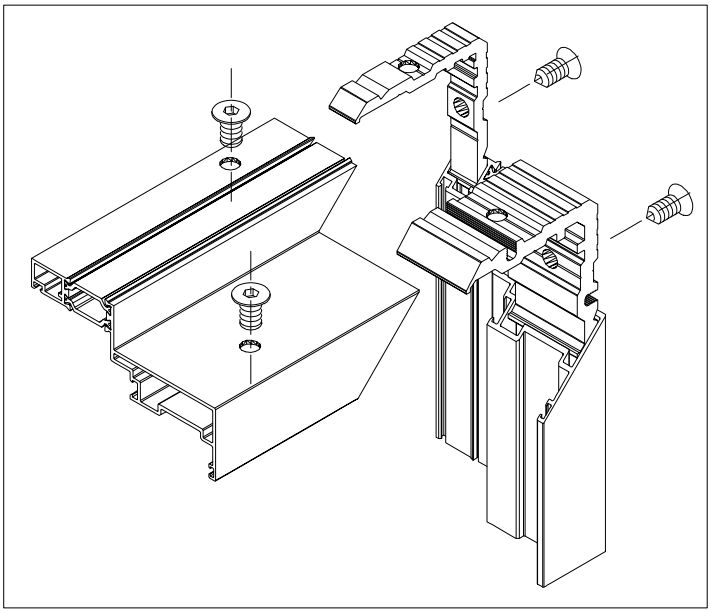


1. VIJČANA VEZA
1. SCREW CONNECTION

- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C


FT-0162F

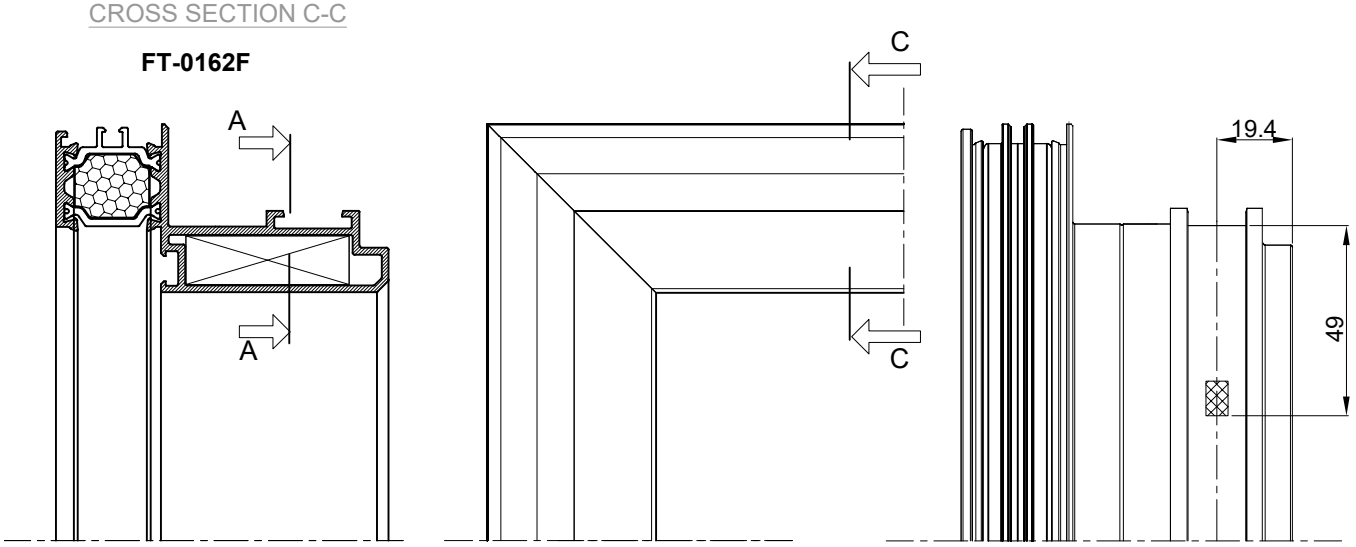

PRESJEK A-A
CROSS SECTION A-A

725.118
(l=42mm)

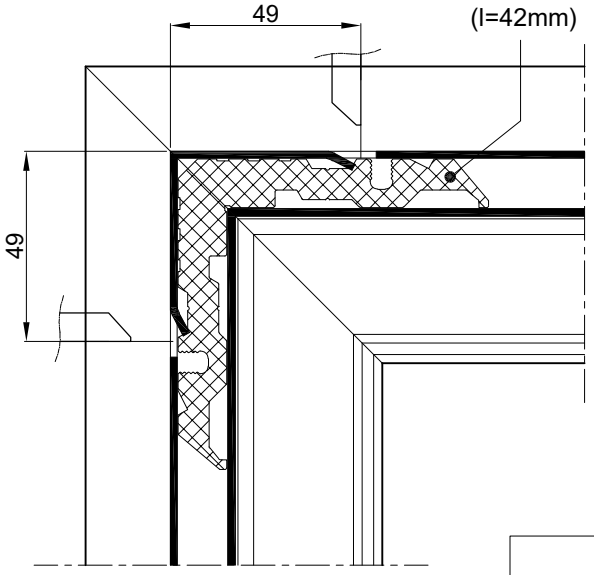

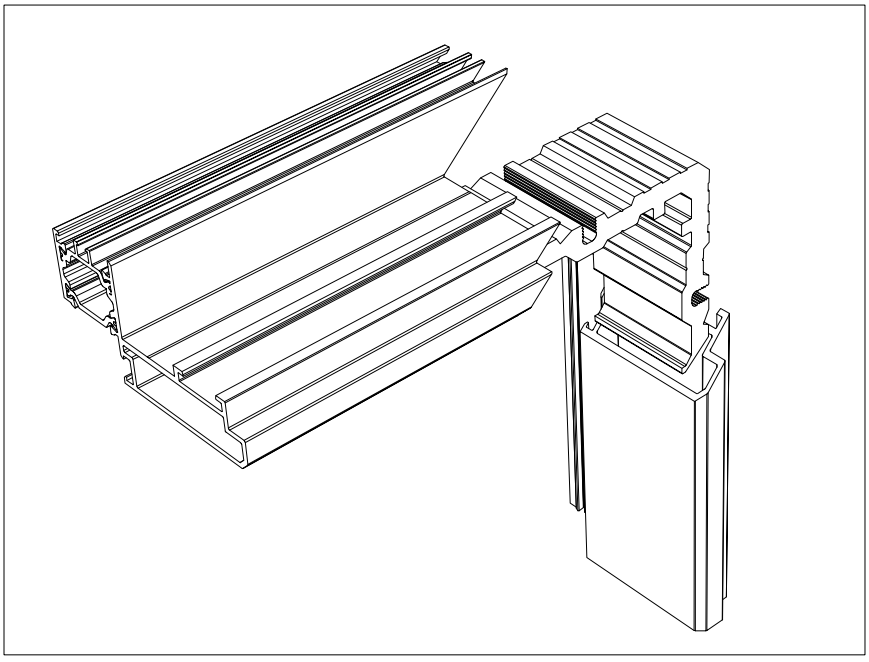


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

FT-0162F

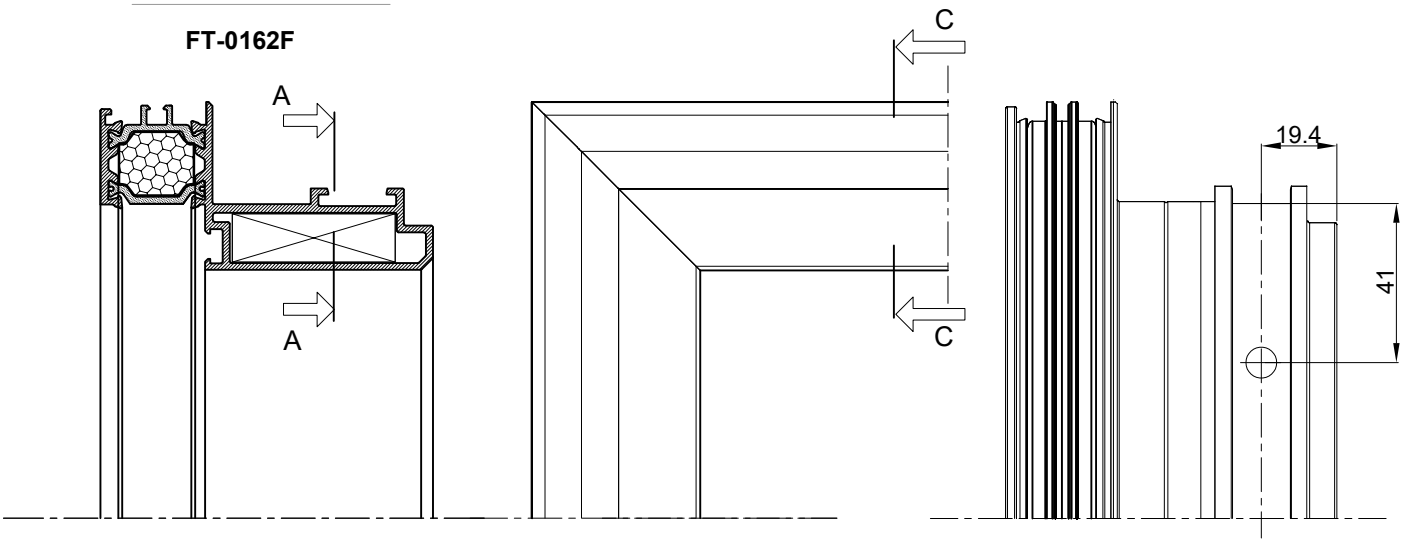

PRESJEK A-A
CROSS SECTION A-A

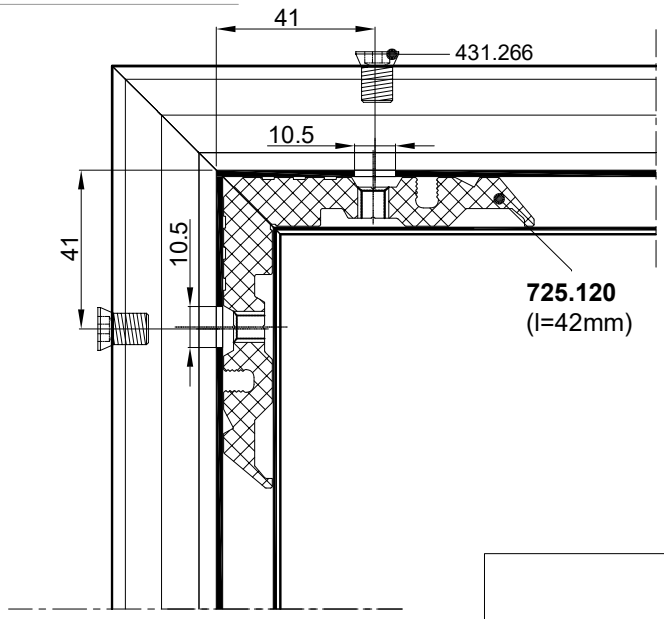

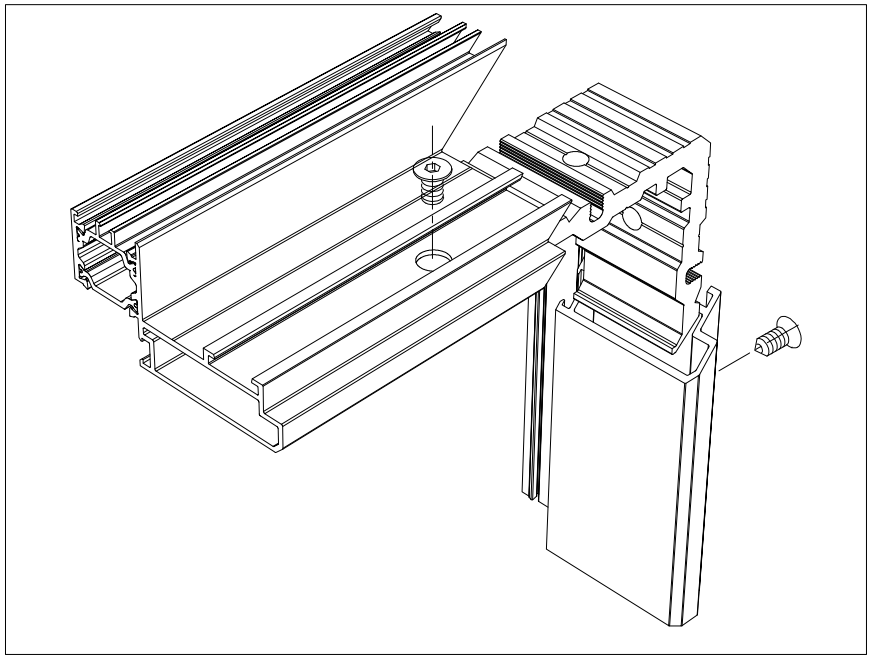



1. VIJČANA VEZA
1. SCREW CONNECTION

- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

FT-0164F

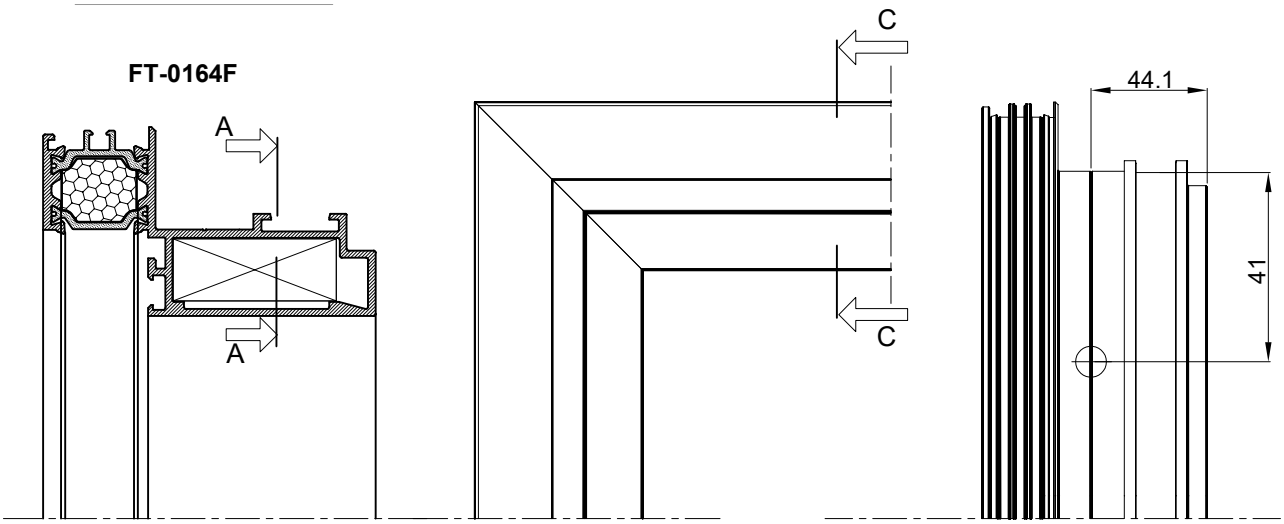

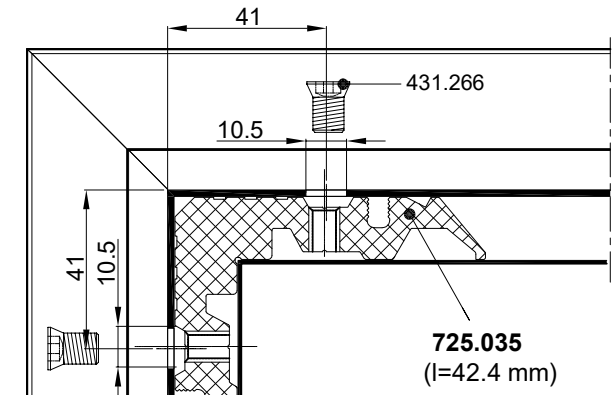

PRESJEK A-A
CROSS SECTION A-A

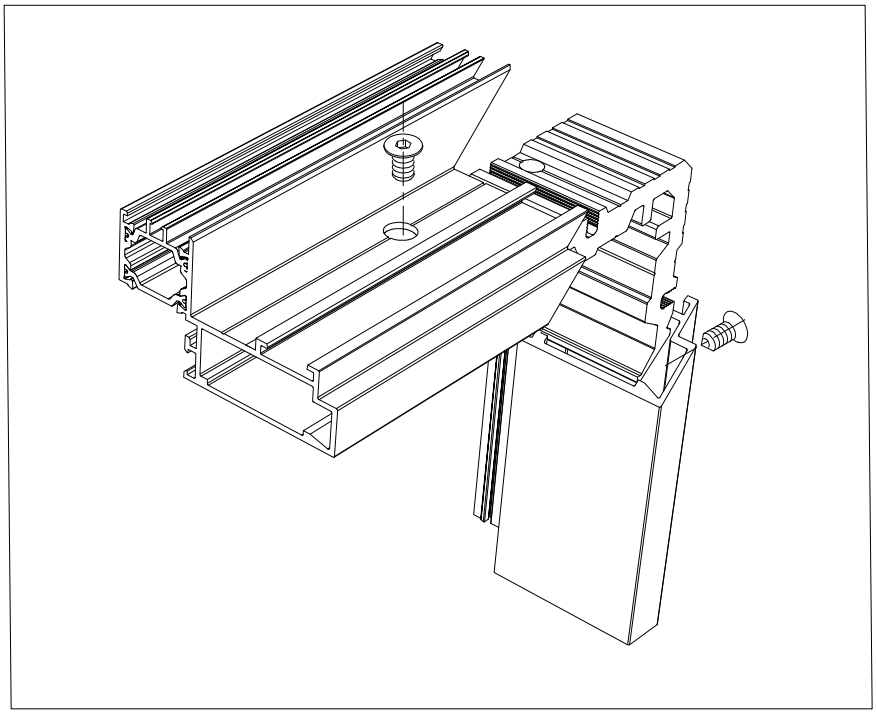


1. VIJČANA VEZA
1. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA PREMA KUTNIKU
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

FT-0164F

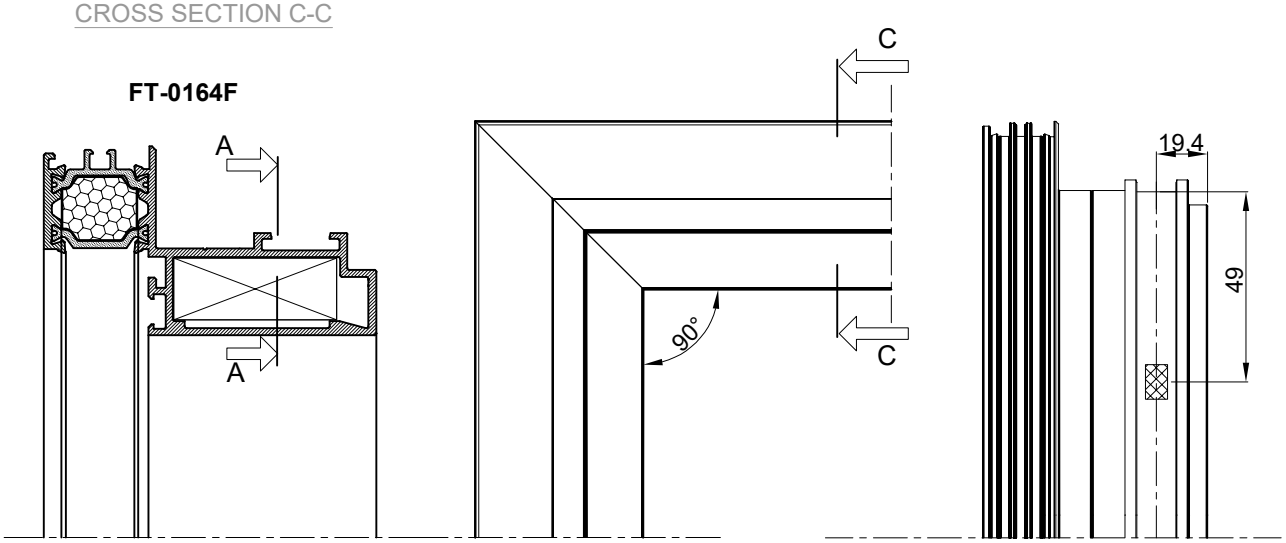

PRESJEK A-A
CROSS SECTION A-A

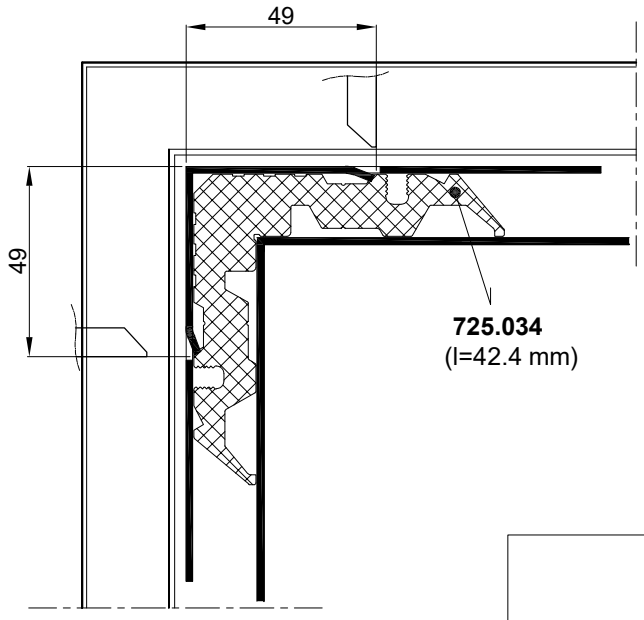

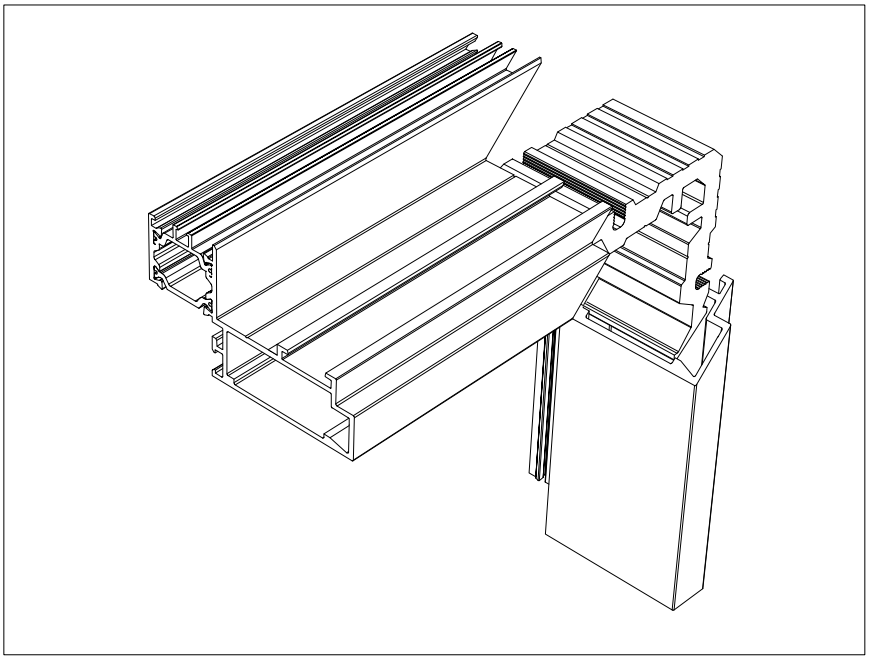



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

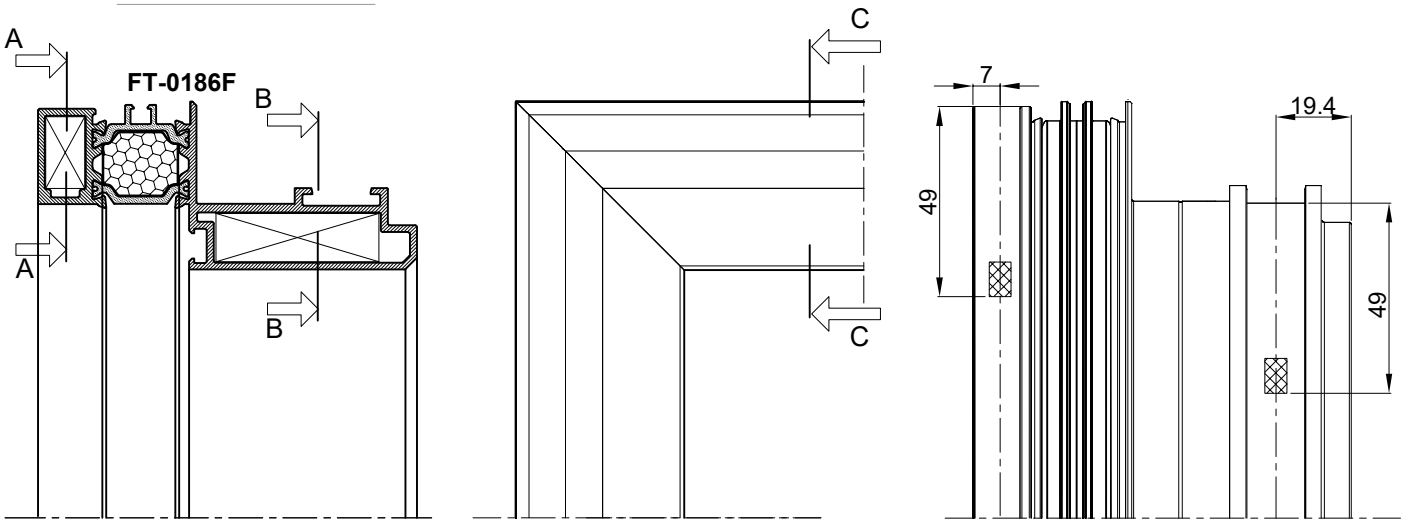


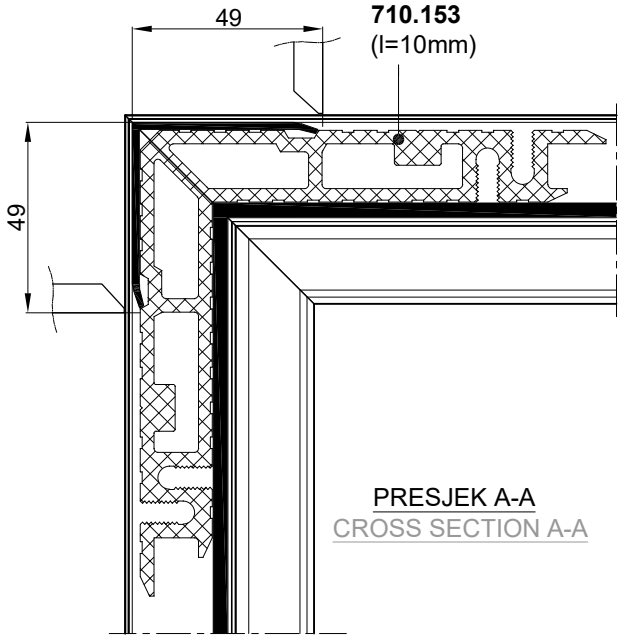

PRESJEK A-A
CROSS SECTION A-A

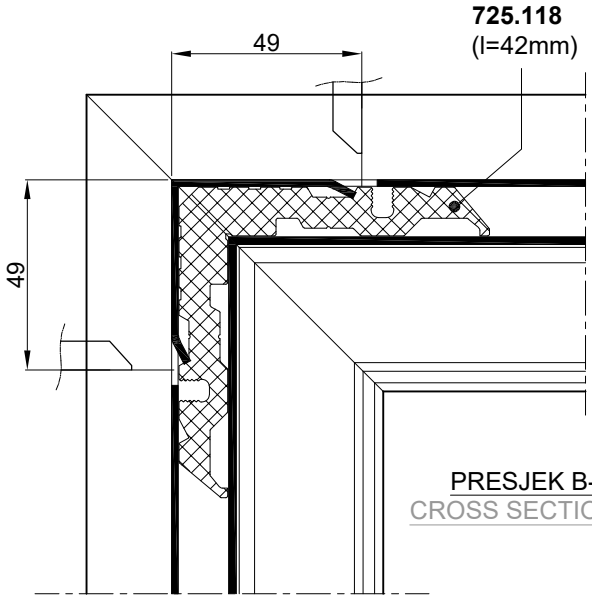


PRESJEK B-B
CROSS SECTION B-B

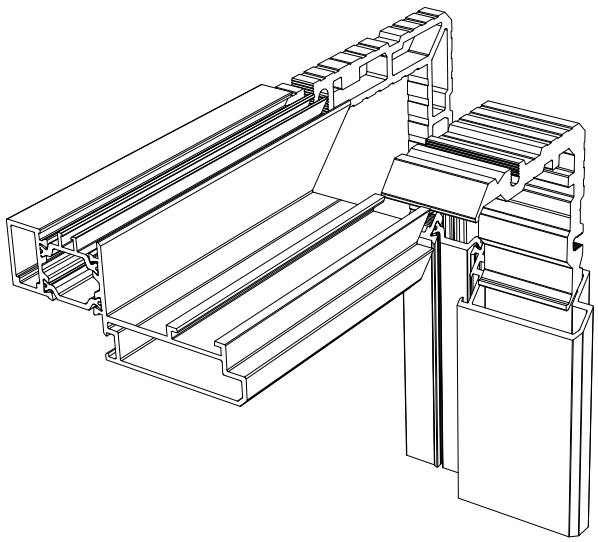


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

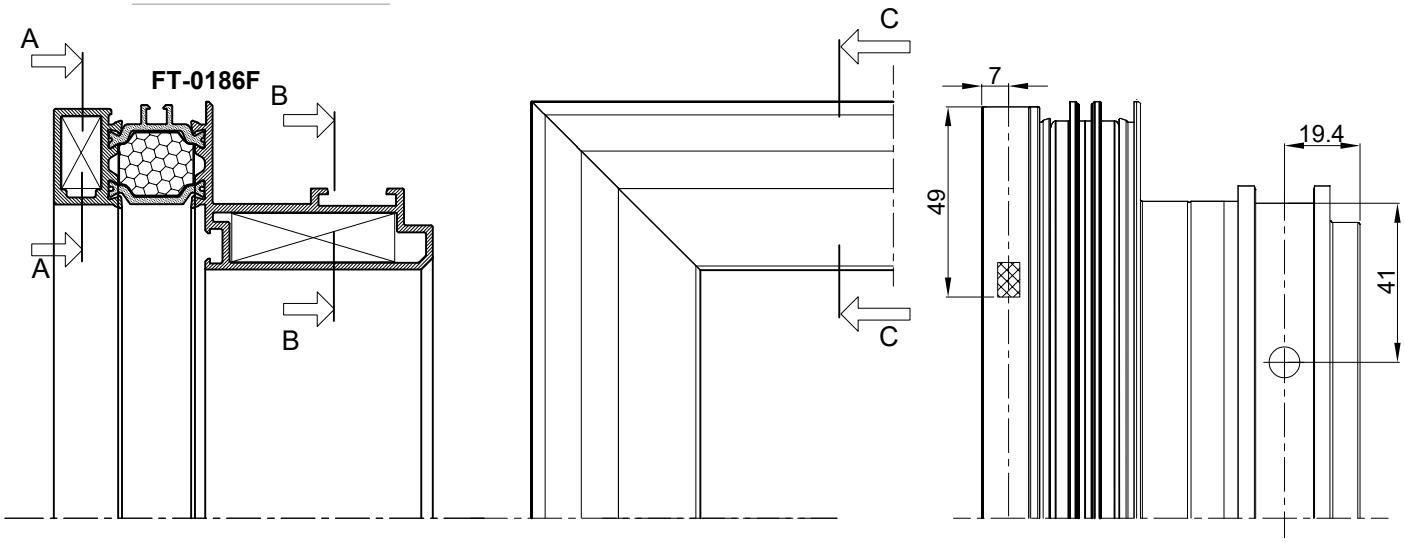


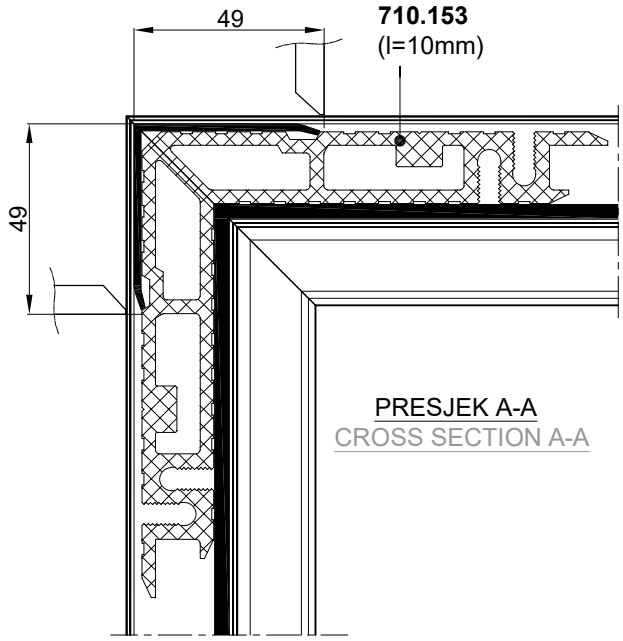

PRESJEK A-A
CROSS SECTION A-A

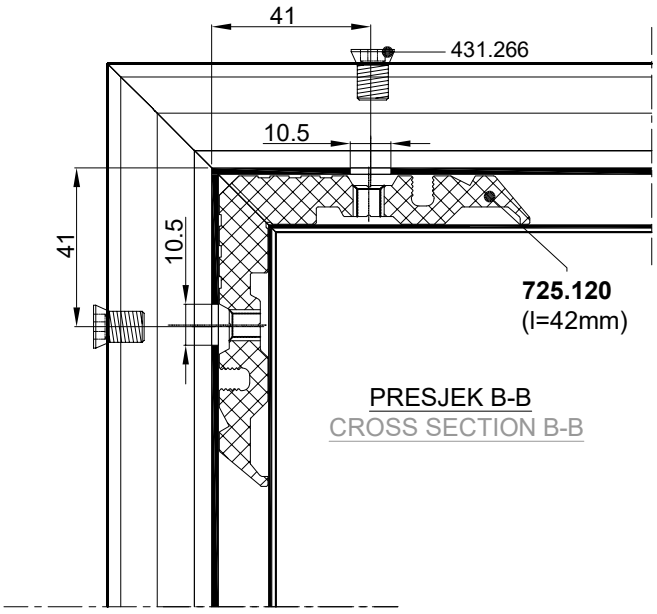

PRESJEK B-B
CROSS SECTION B-B

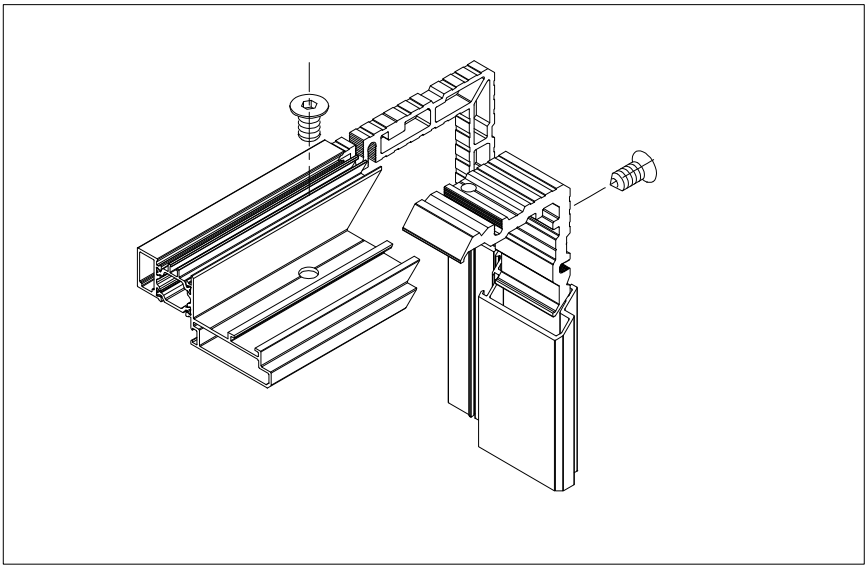


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

FT-0170F

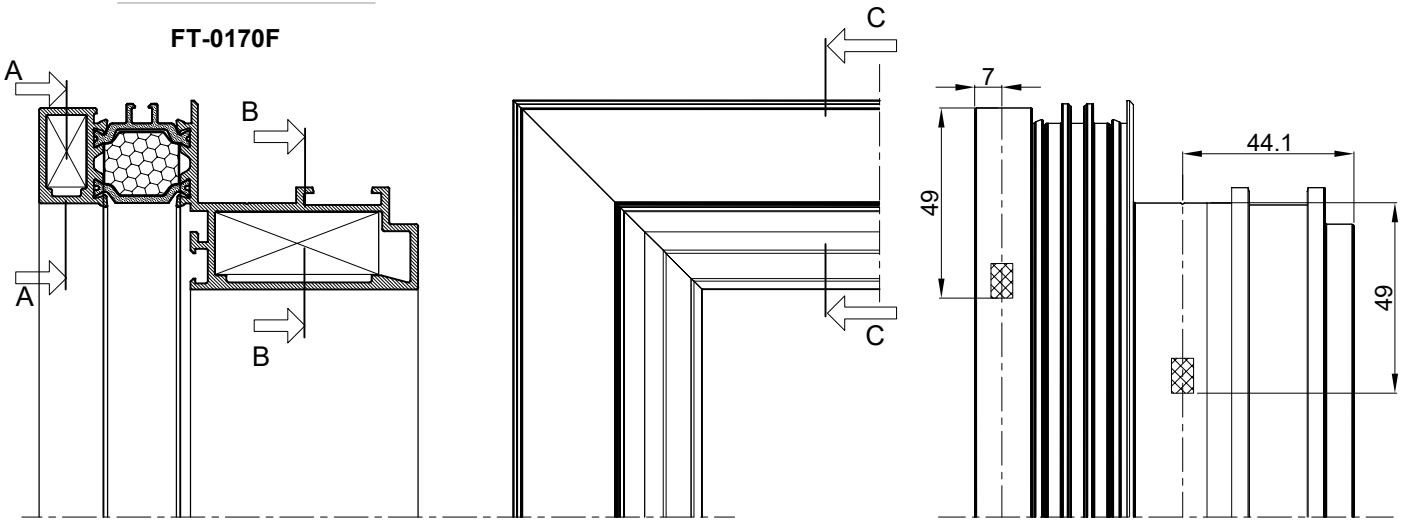


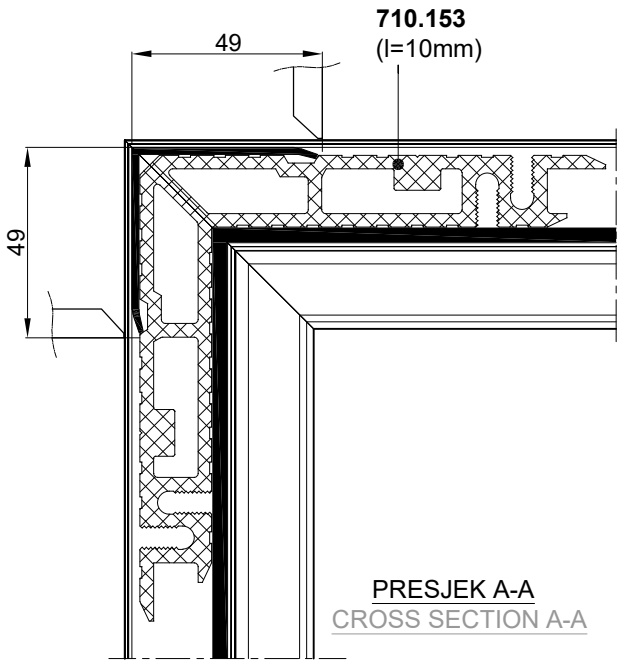

PRESJEK A-A
CROSS SECTION A-A

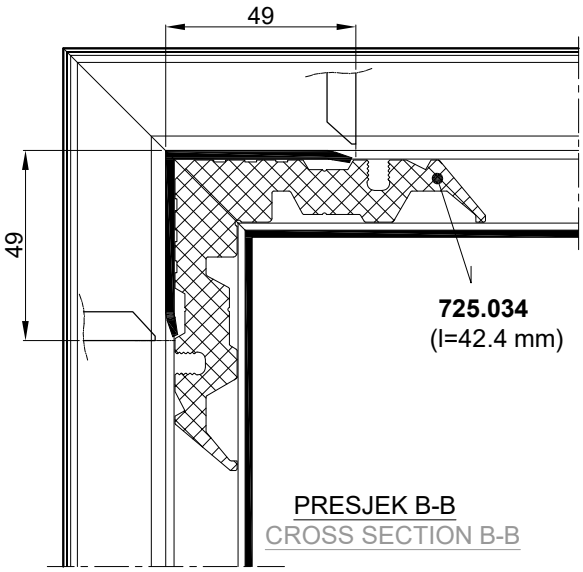

PRESJEK B-B
CROSS SECTION B-B

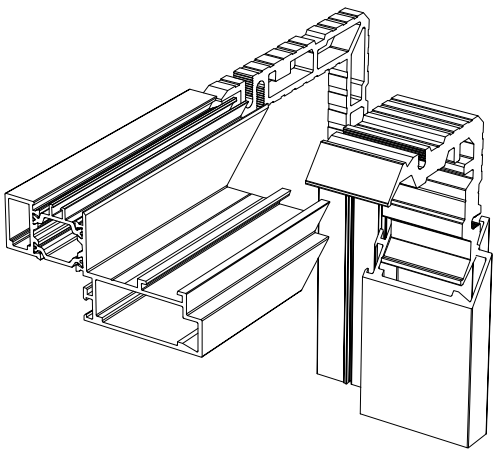



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

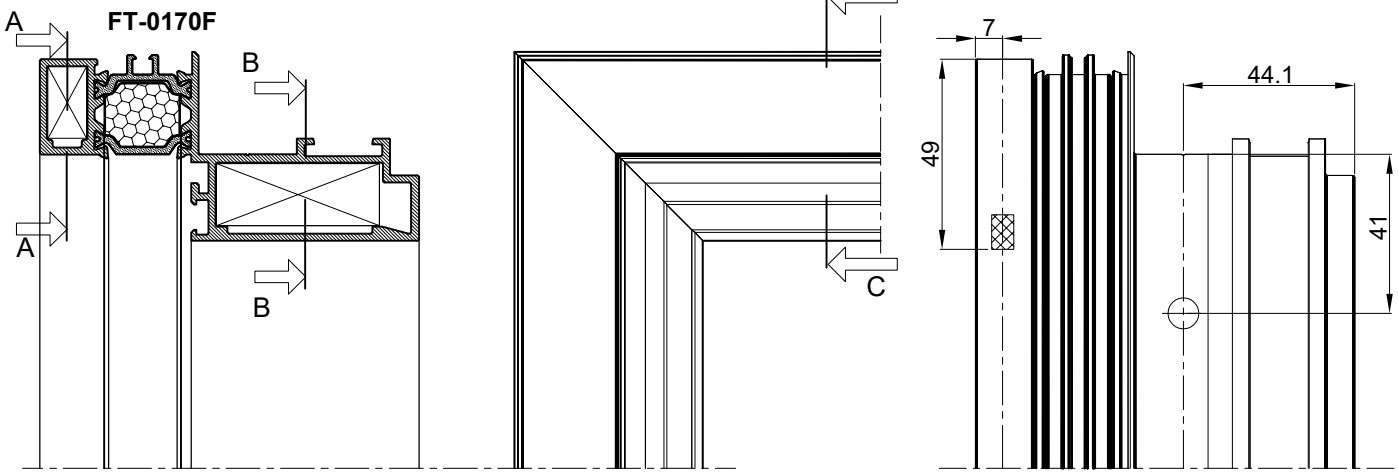


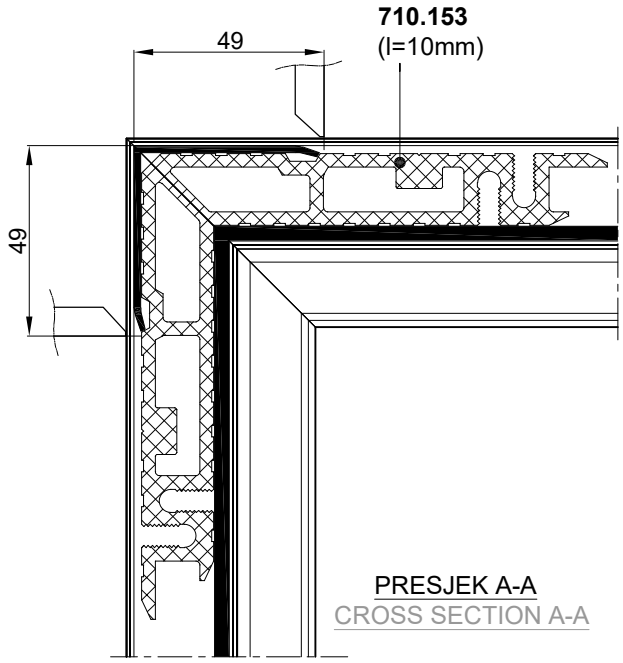

PRESJEK A-A
CROSS SECTION A-A

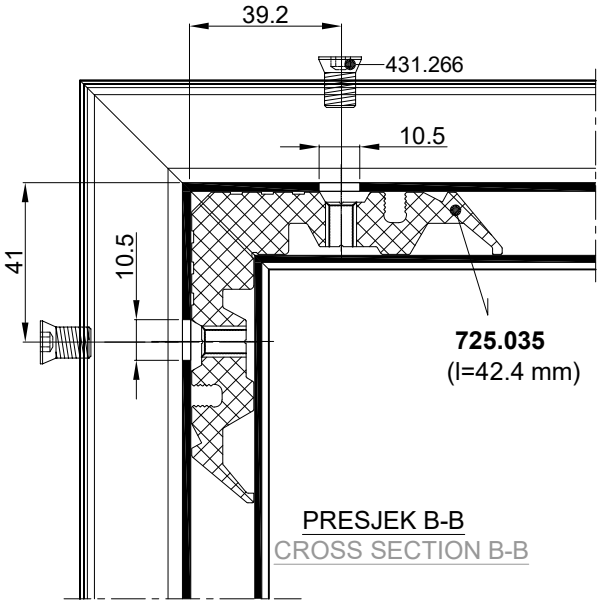

PRESJEK B-B
CROSS SECTION B-B

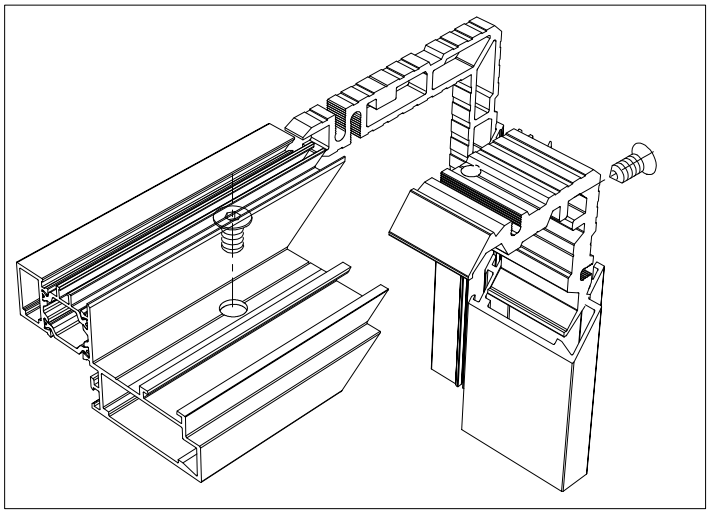


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

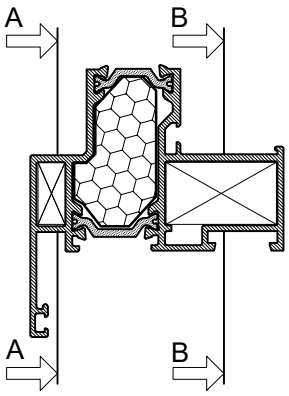


FT-0261F

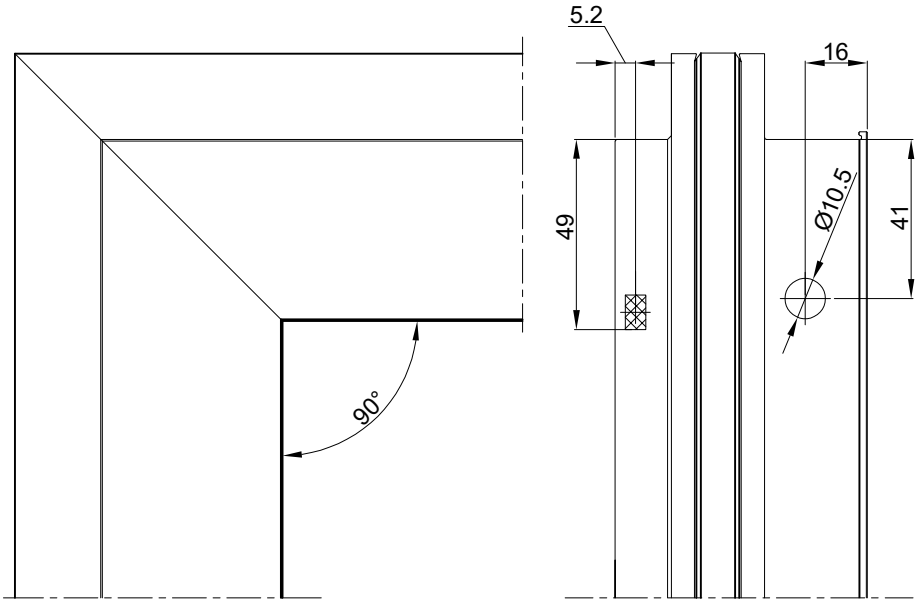


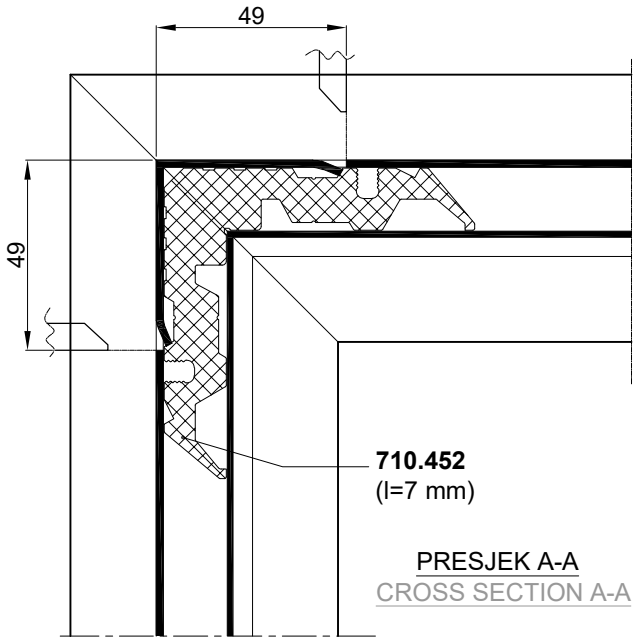

PRESJEK A-A
CROSS SECTION A-A

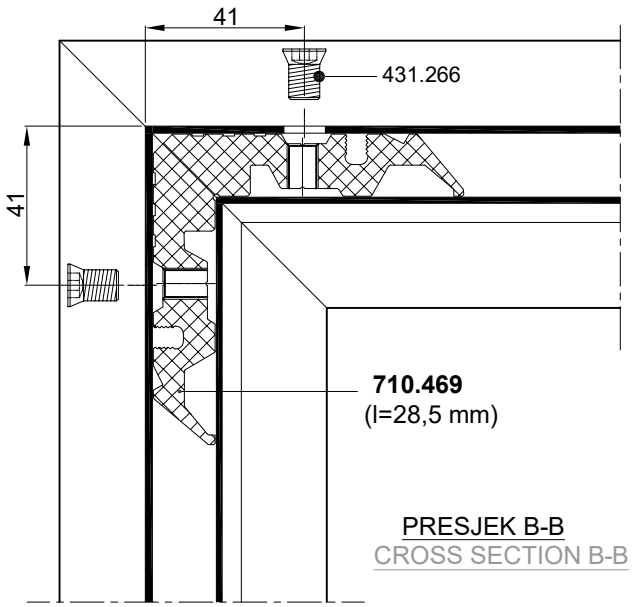

PRESJEK B-B
CROSS SECTION B-B

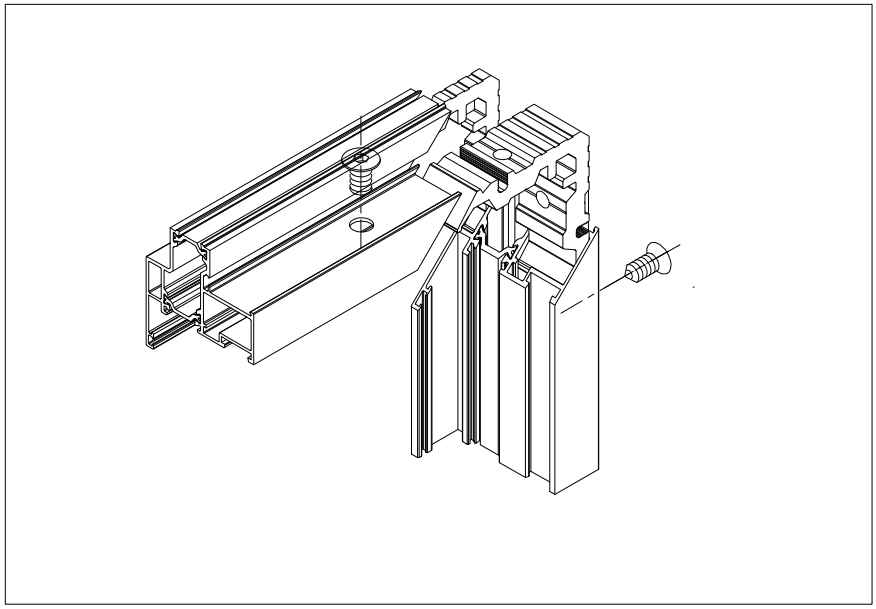


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

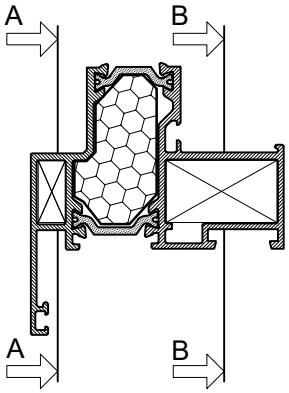


FT-0261F

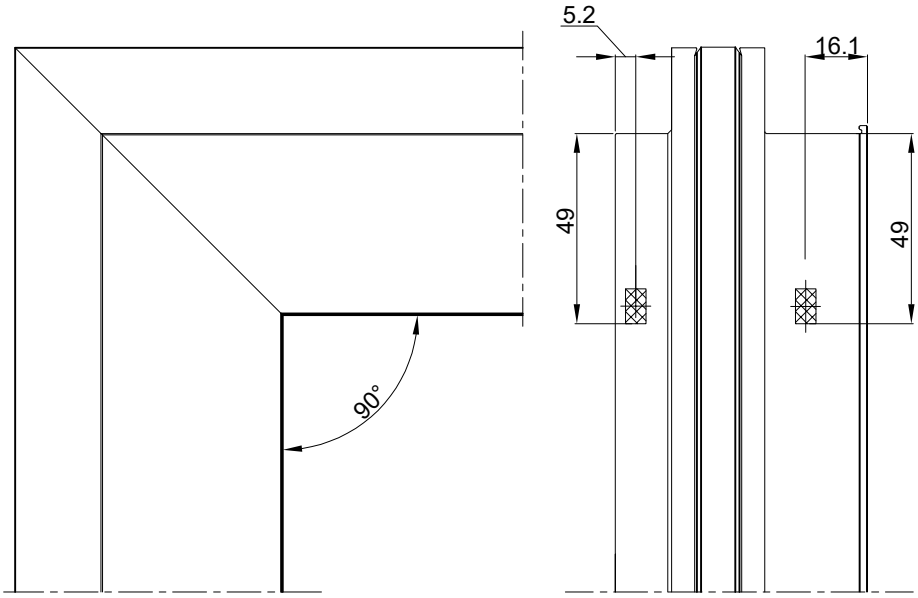

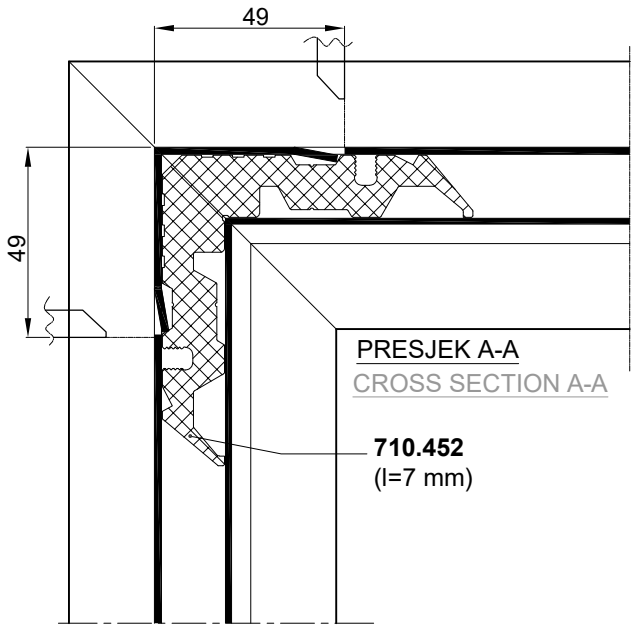


PRESJEK A-A
CROSS SECTION A-A

710.452
(l=7 mm)

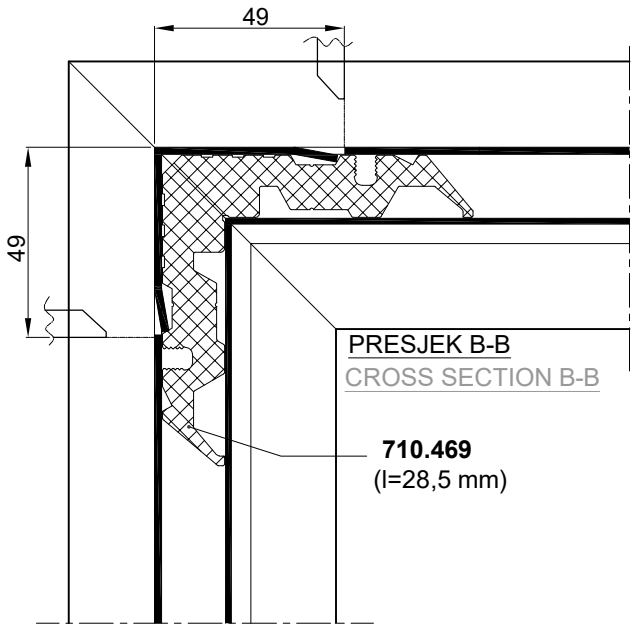


PRESJEK B-B
CROSS SECTION B-B

710.469
(l=28,5 mm)

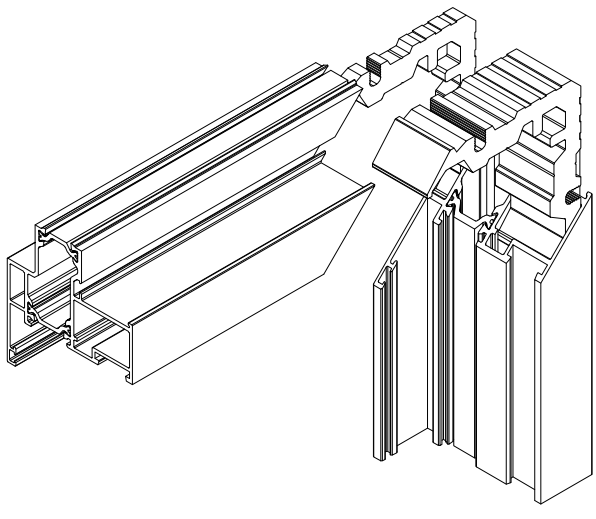



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

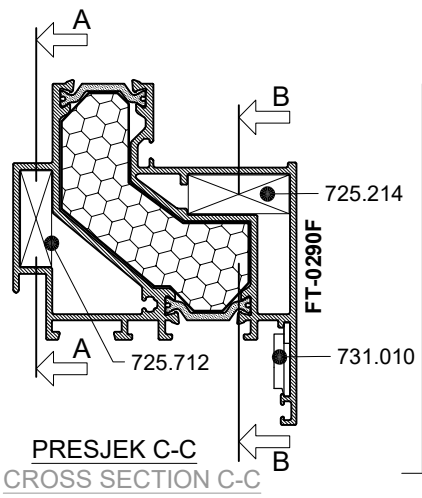


PRESJEK C-C
CROSS SECTION C-C

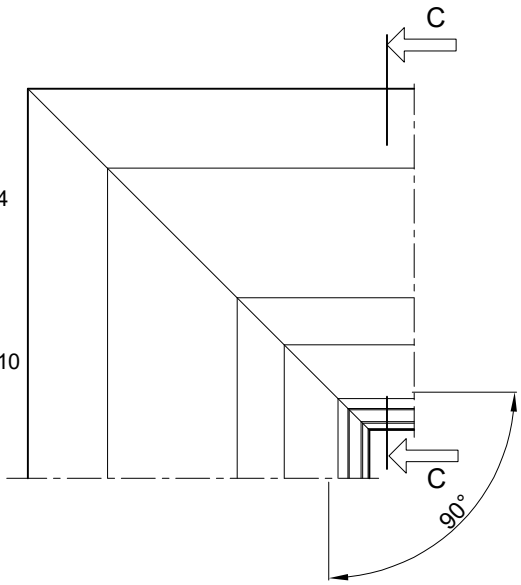

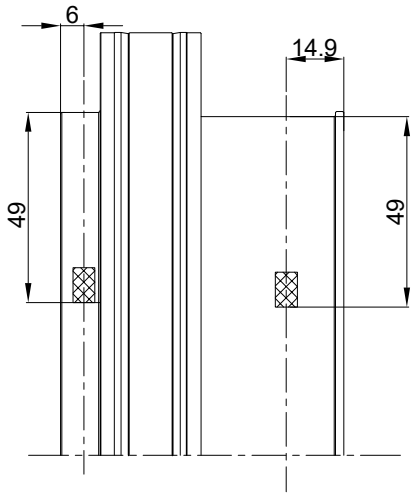


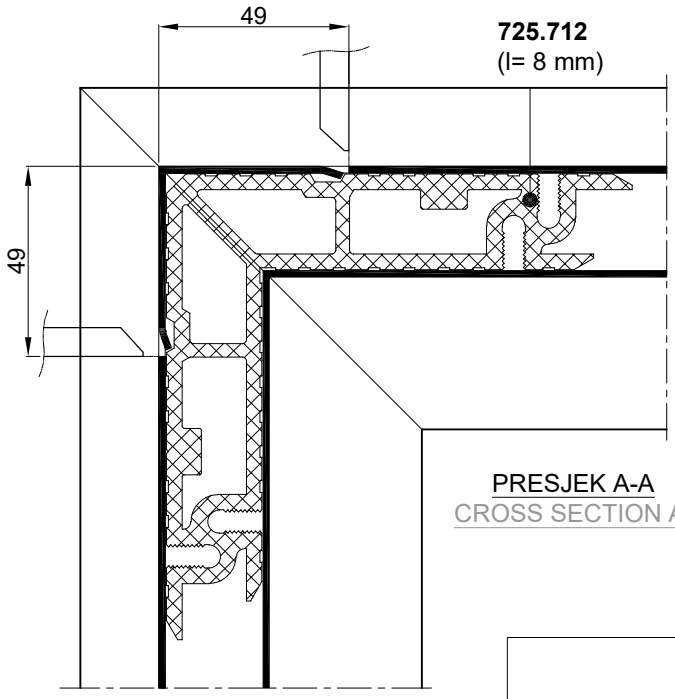

PRESJEK A-A
CROSS SECTION A-A

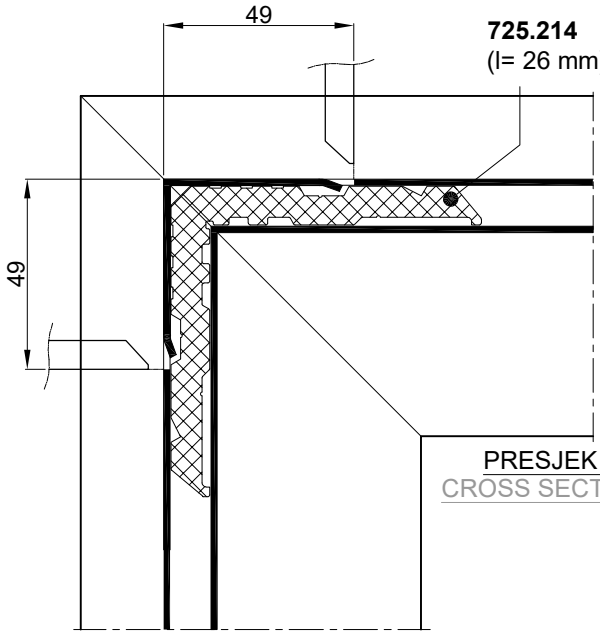


PRESJEK B-B
CROSS SECTION B

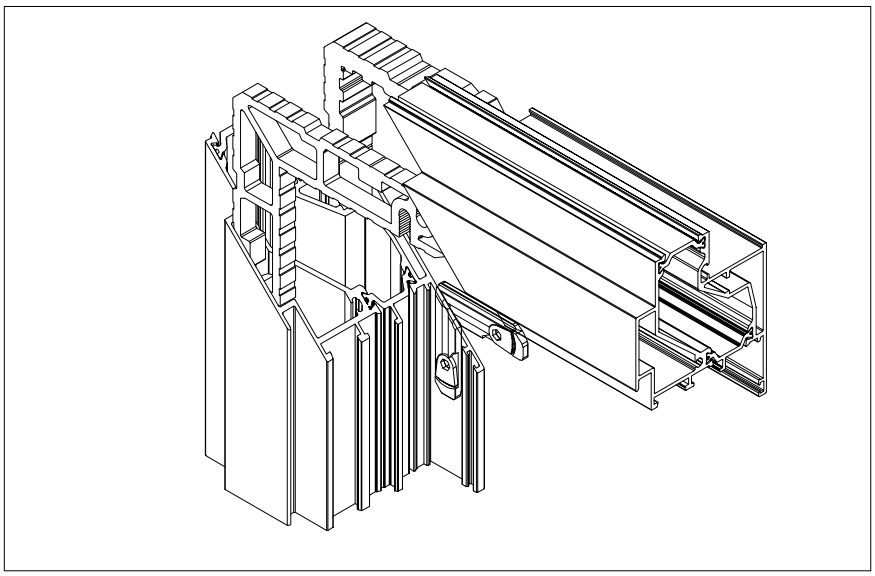


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

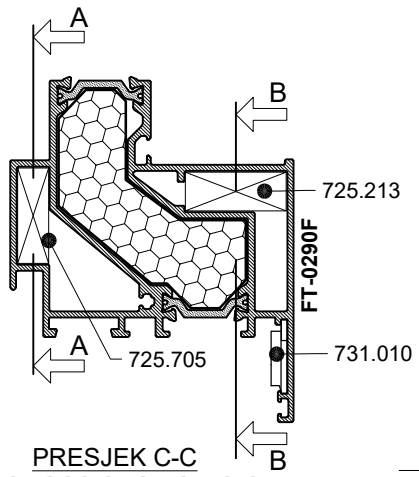


PRESJEK C-C
CROSS SECTION C-C

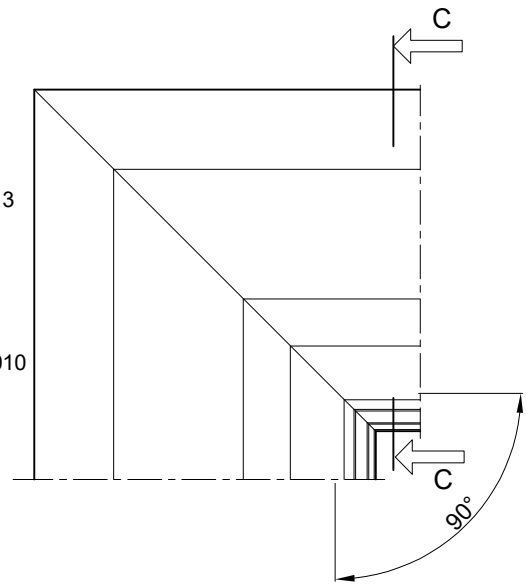

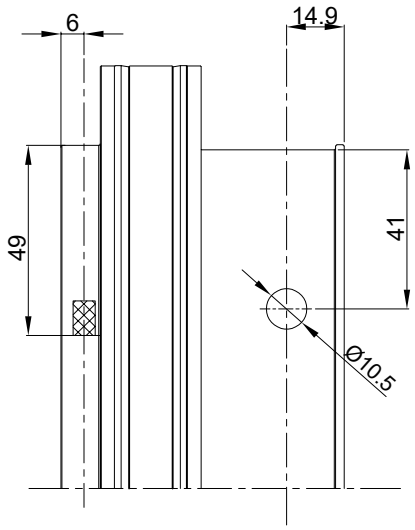


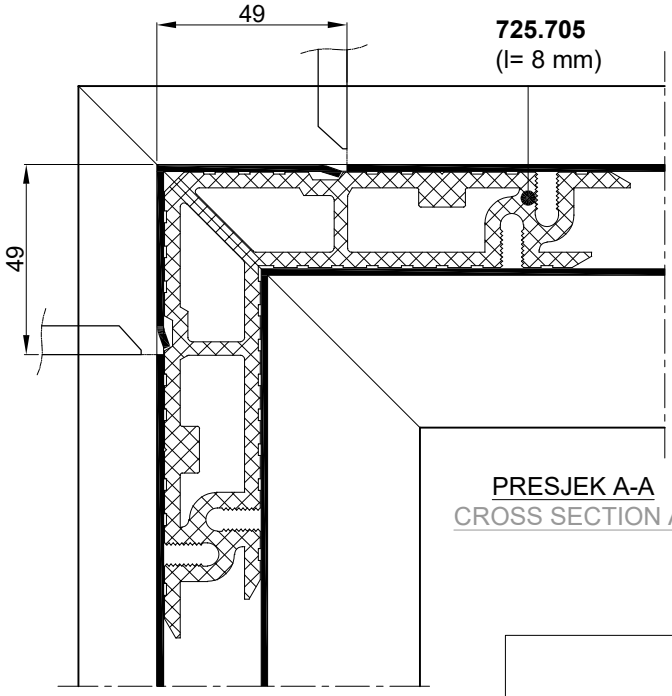

PRESJEK A-A
CROSS SECTION A-A

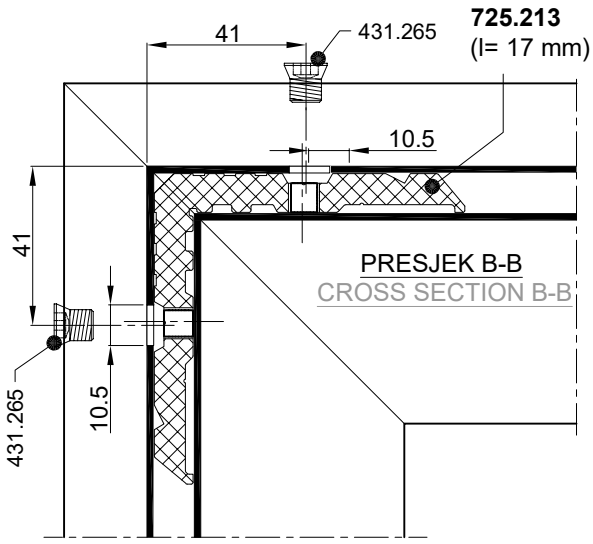


PRESJEK B-B
CROSS SECTION B-B

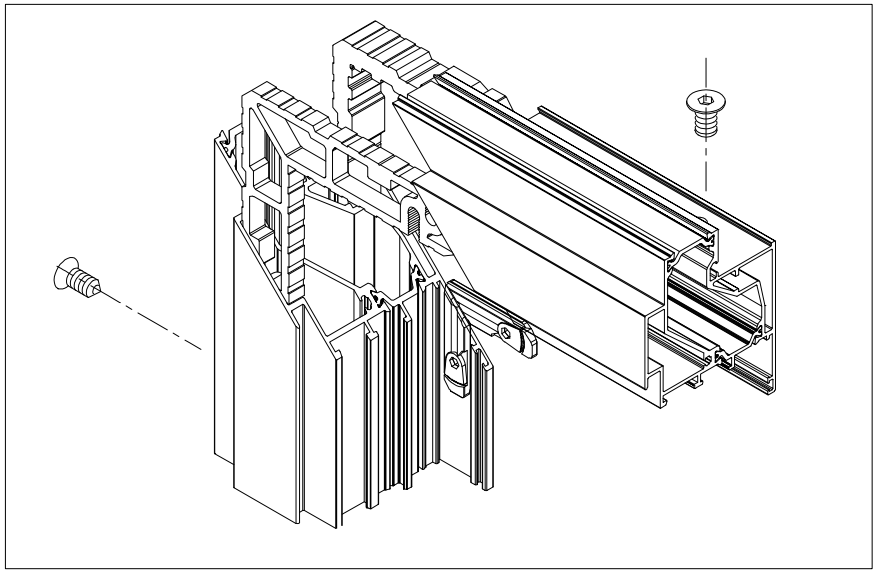


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

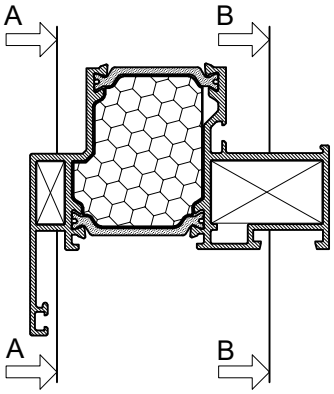


FT-0261HF

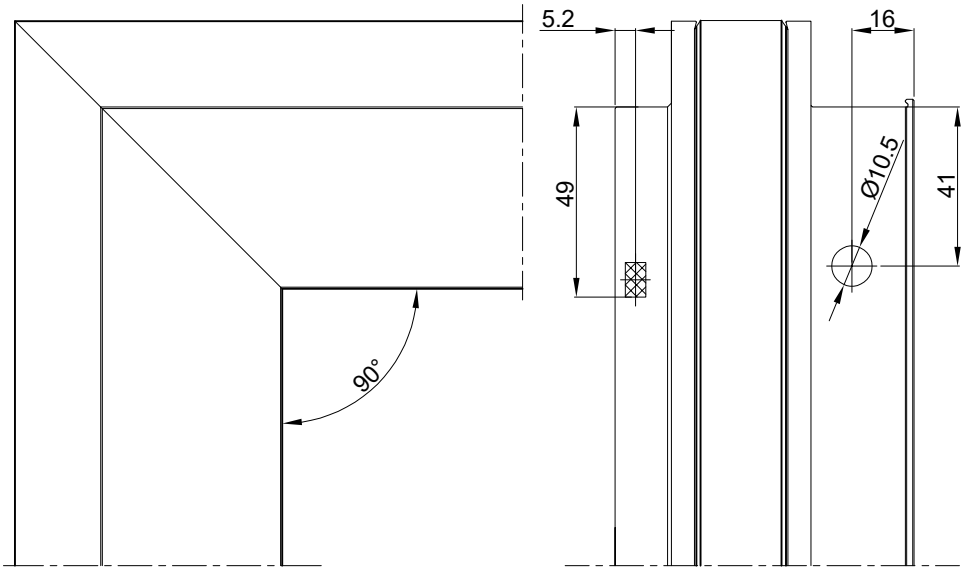


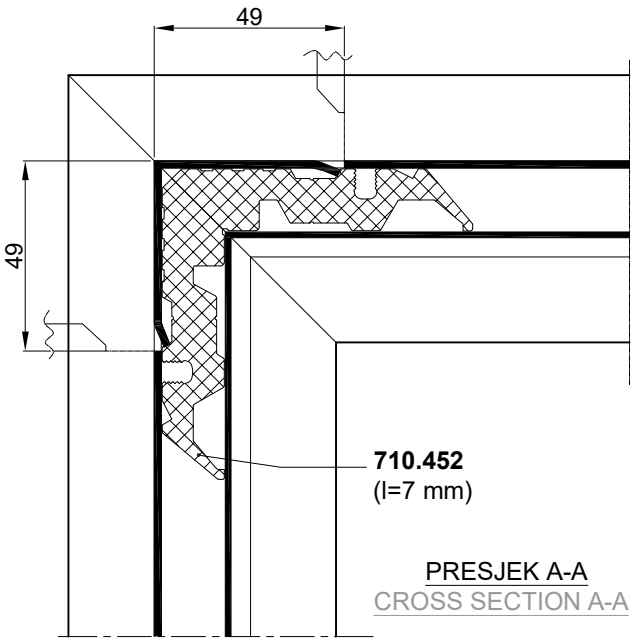

PRESJEK A-A
CROSS SECTION A-A

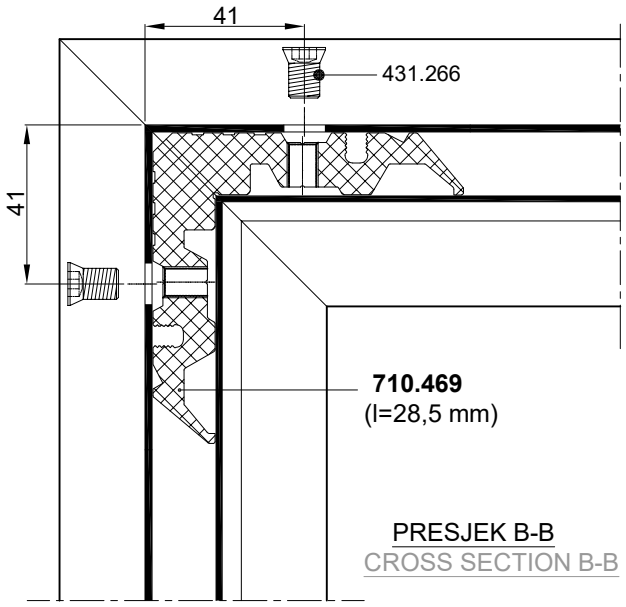

PRESJEK B-B
CROSS SECTION B-B

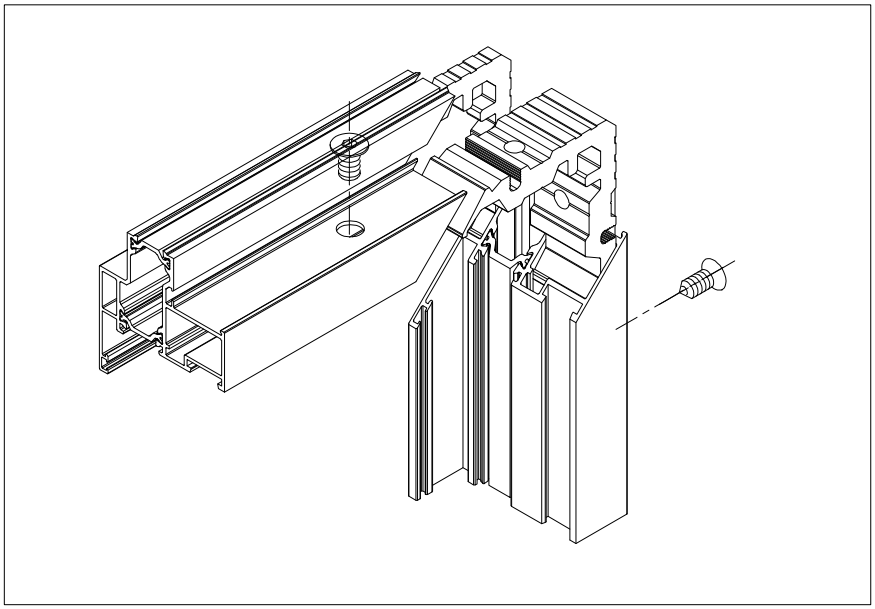


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

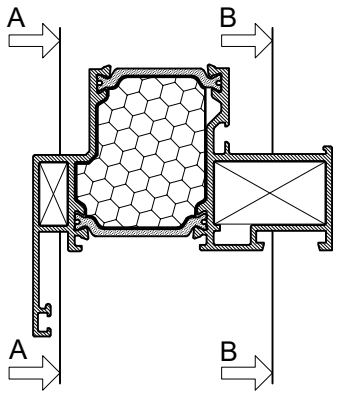


FT-0261HF

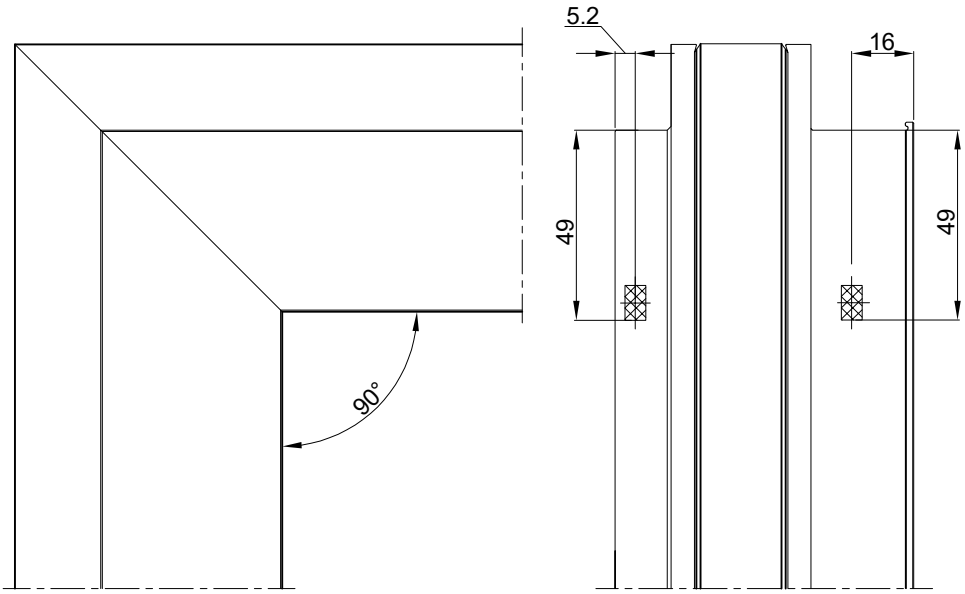

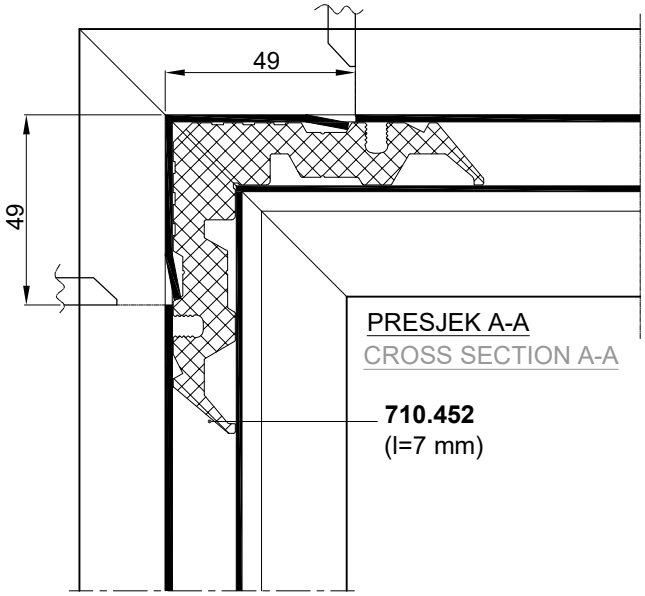


PRESJEK A-A
CROSS SECTION A-A

710.452
(l=7 mm)

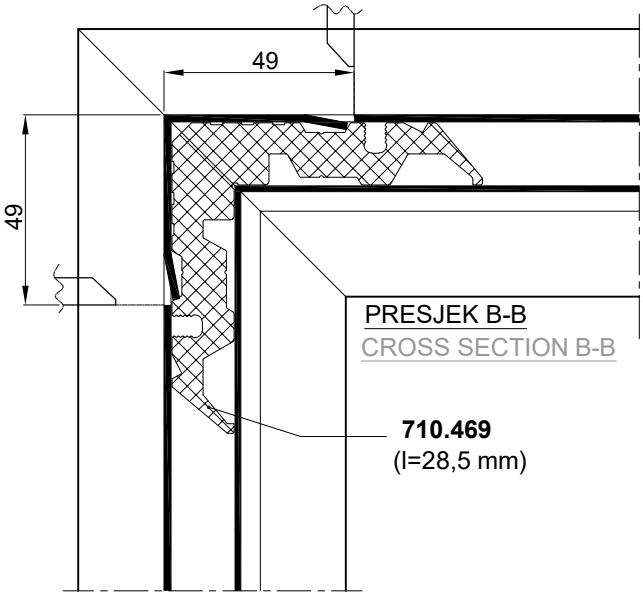

PRESJEK B-B
CROSS SECTION B-B

710.469
(l=28,5 mm)

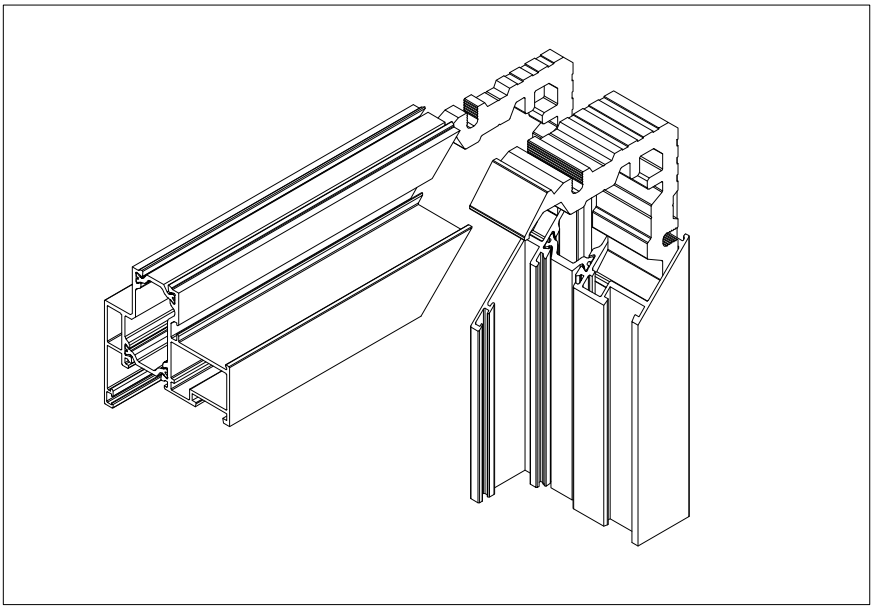



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

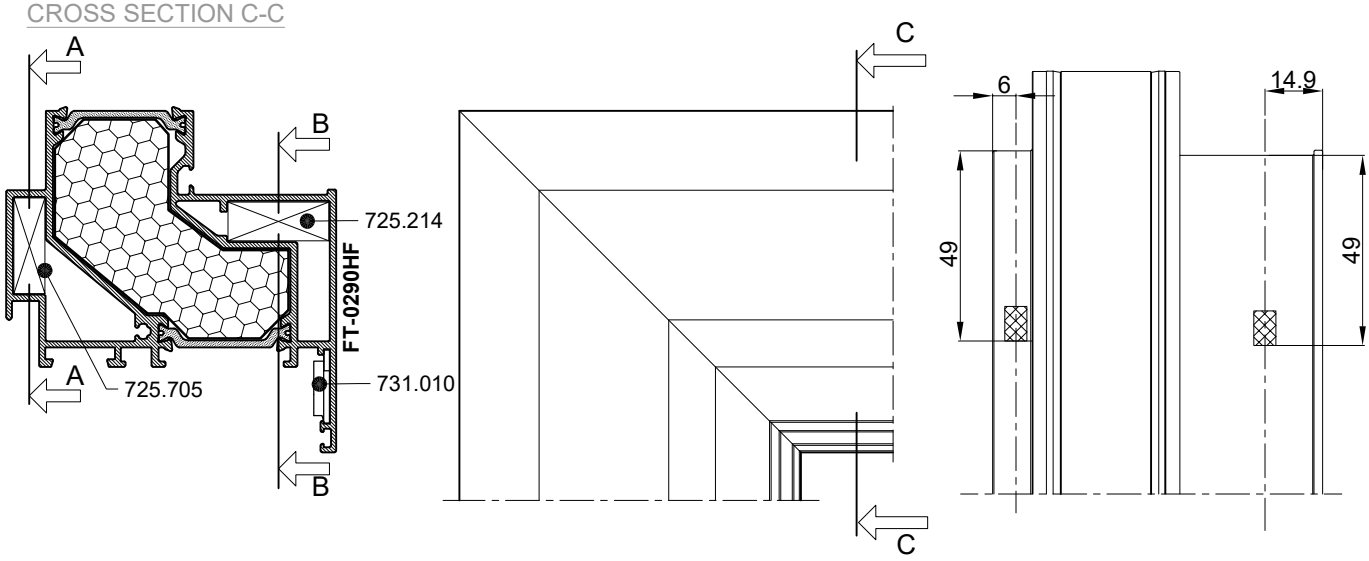


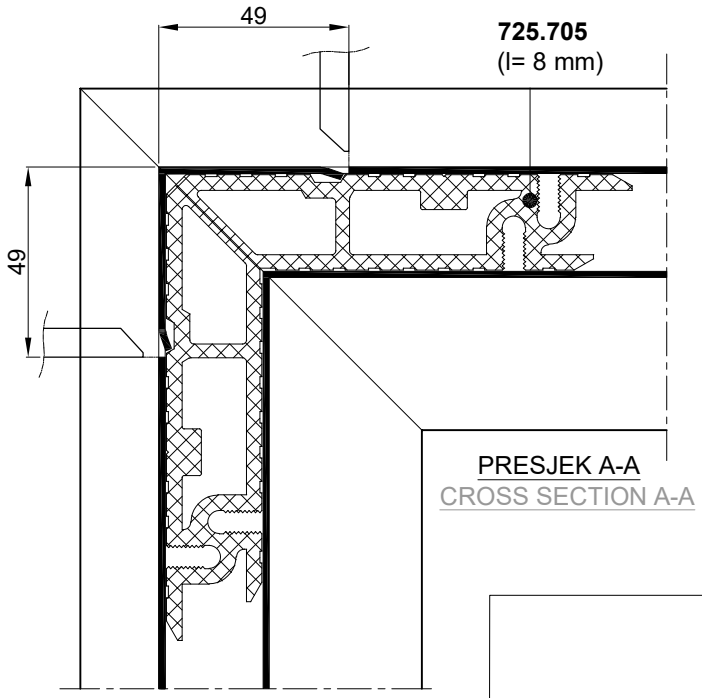

PRESJEK A-A
CROSS SECTION A-A

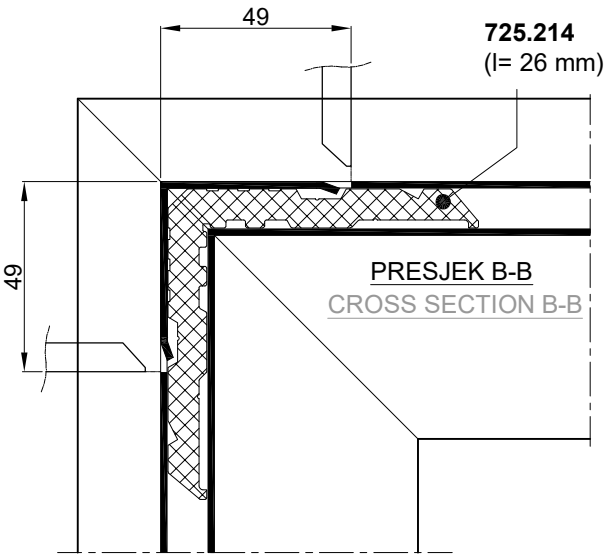

PRESJEK B-B
CROSS SECTION B-B

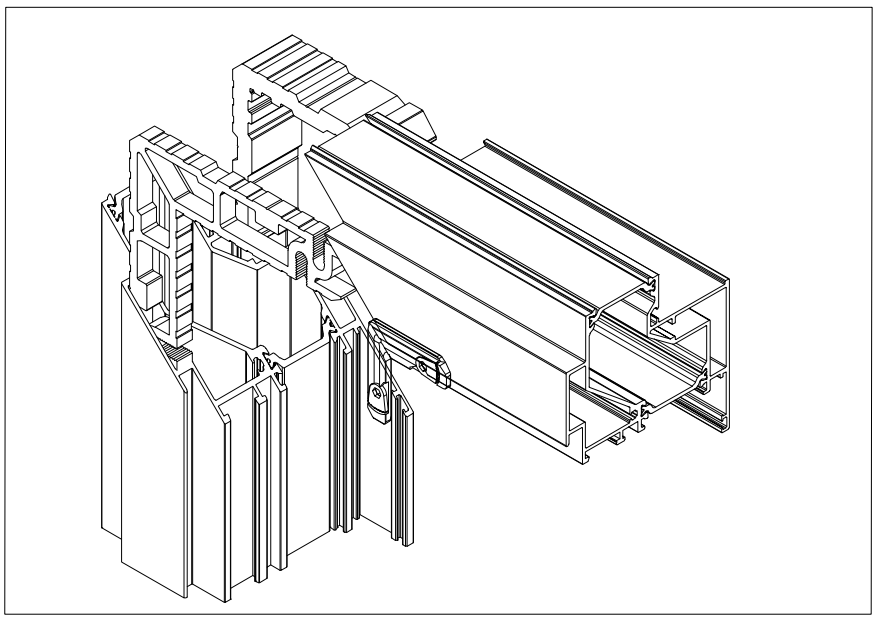



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING

- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

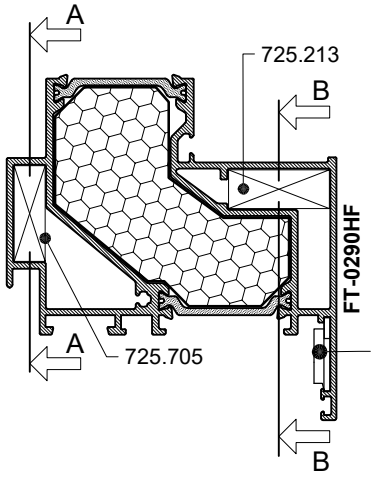

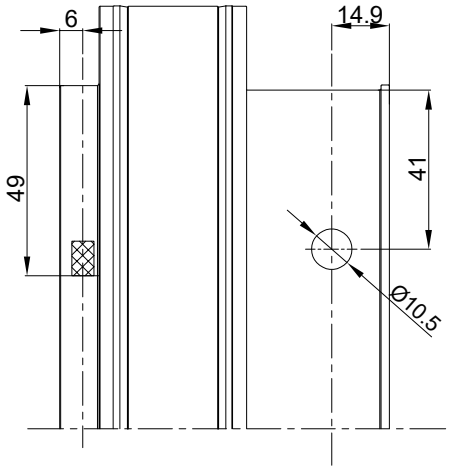


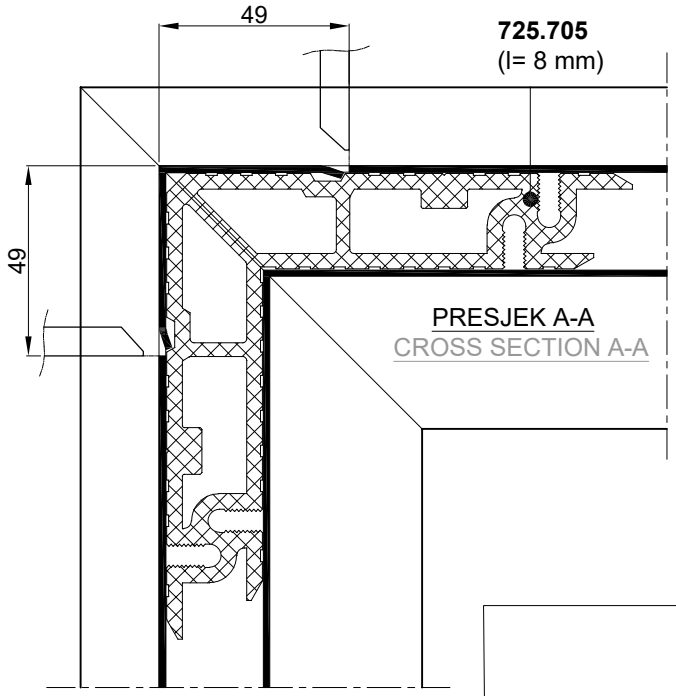

PRESJEK A-A
CROSS SECTION A-A

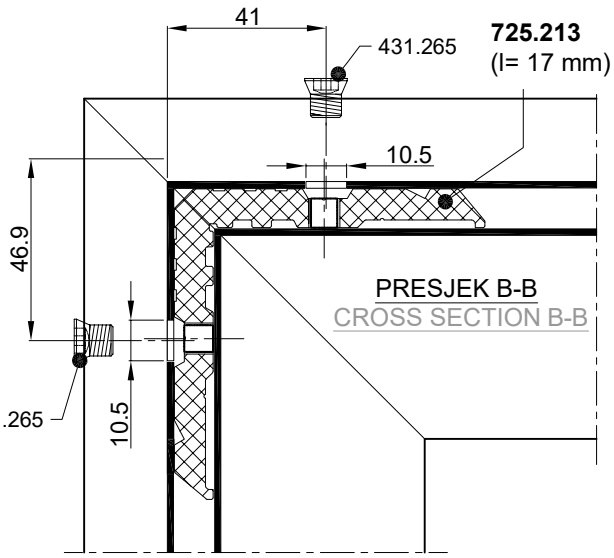


PRESJEK B-B
CROSS SECTION B-B

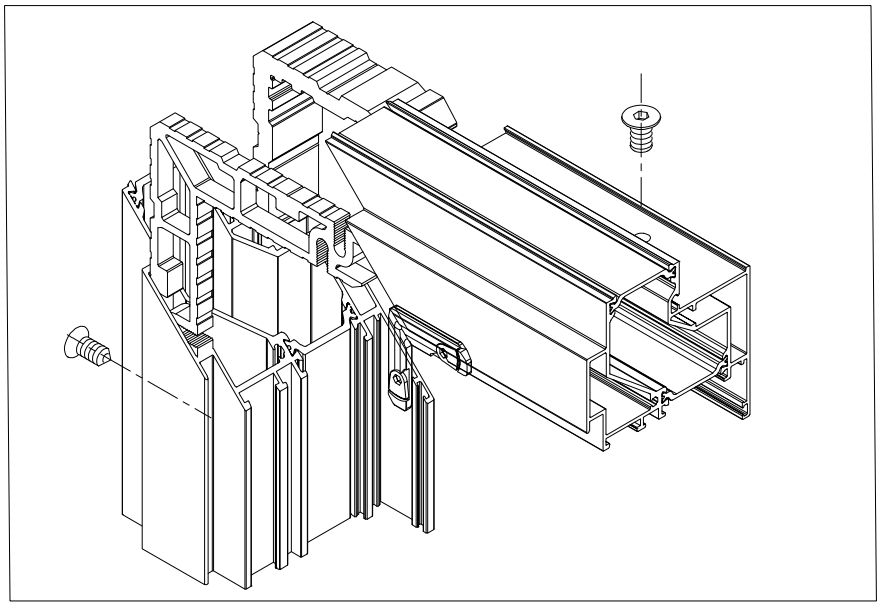


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

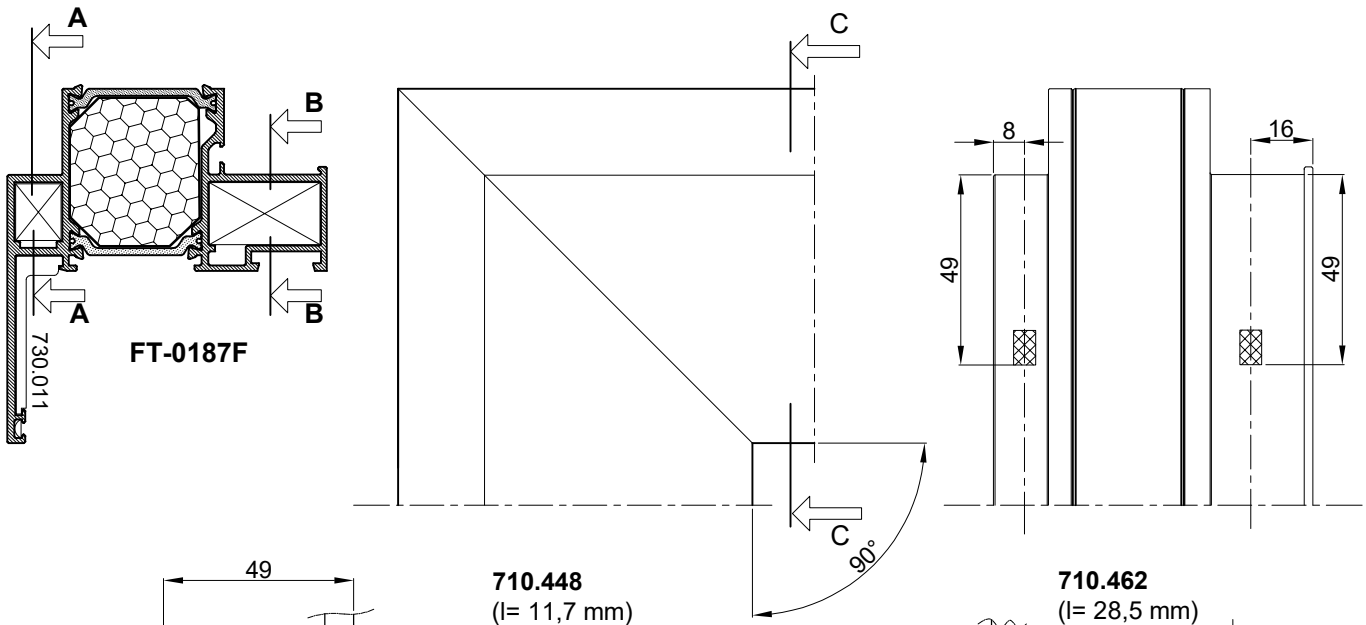


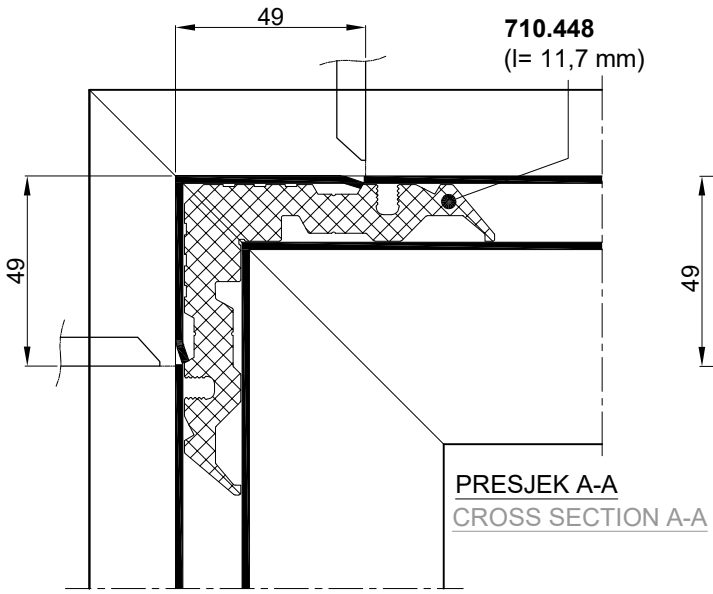

PRESJEK A-A
CROSS SECTION A-A

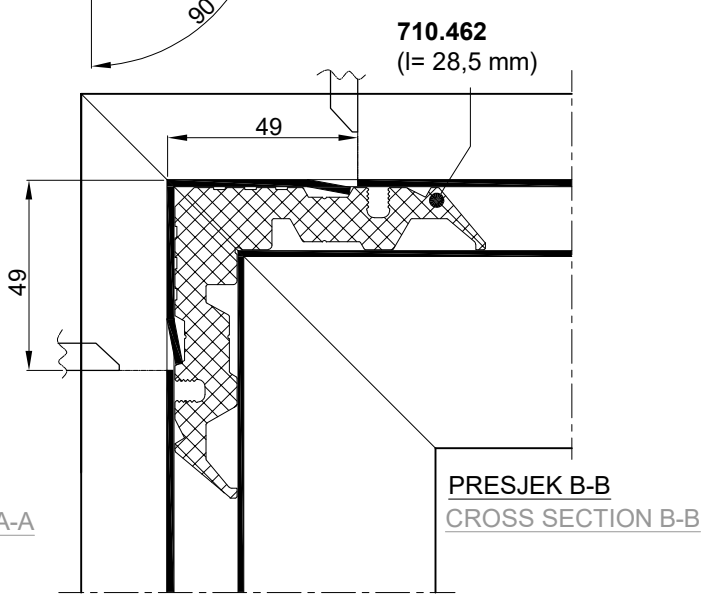

PRESJEK B-B
CROSS SECTION B-B

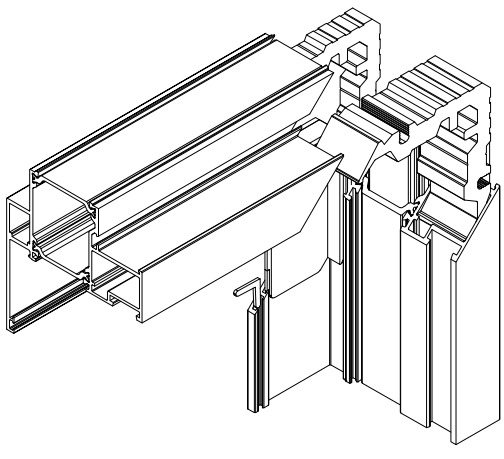



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

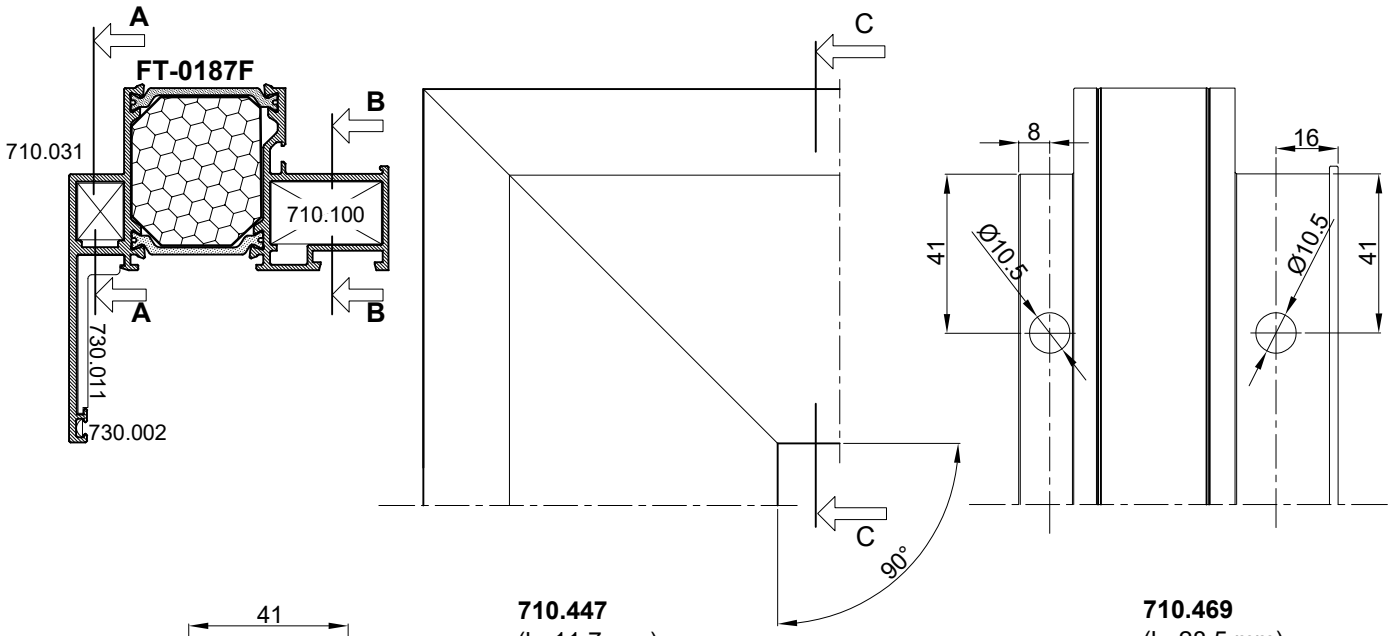

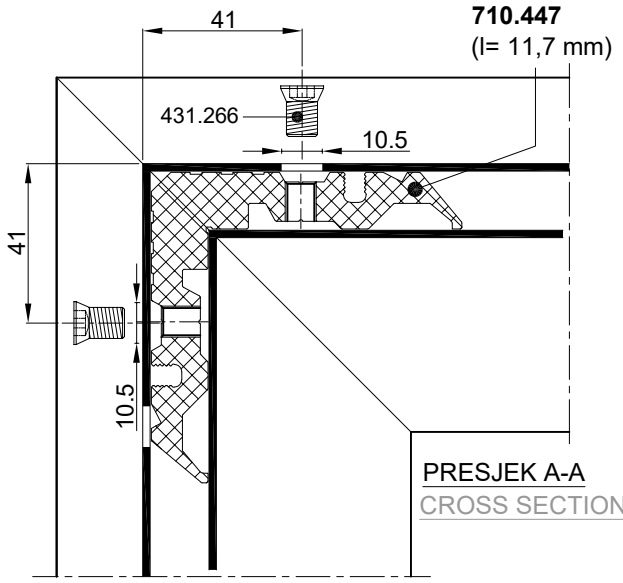


PRESJEK A-A
CROSS SECTION A-A

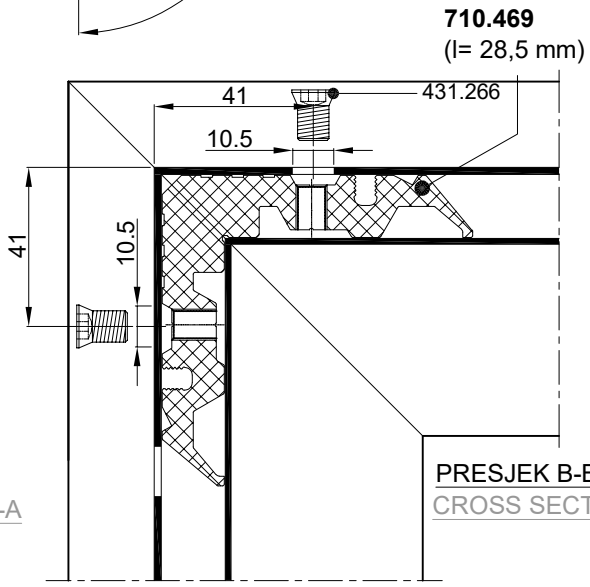


PRESJEK B-B
CROSS SECTION B-B


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

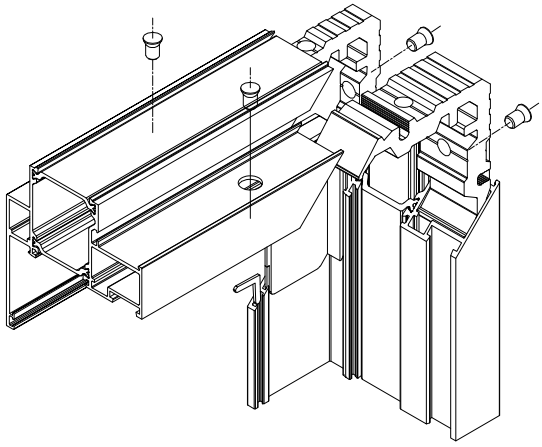


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

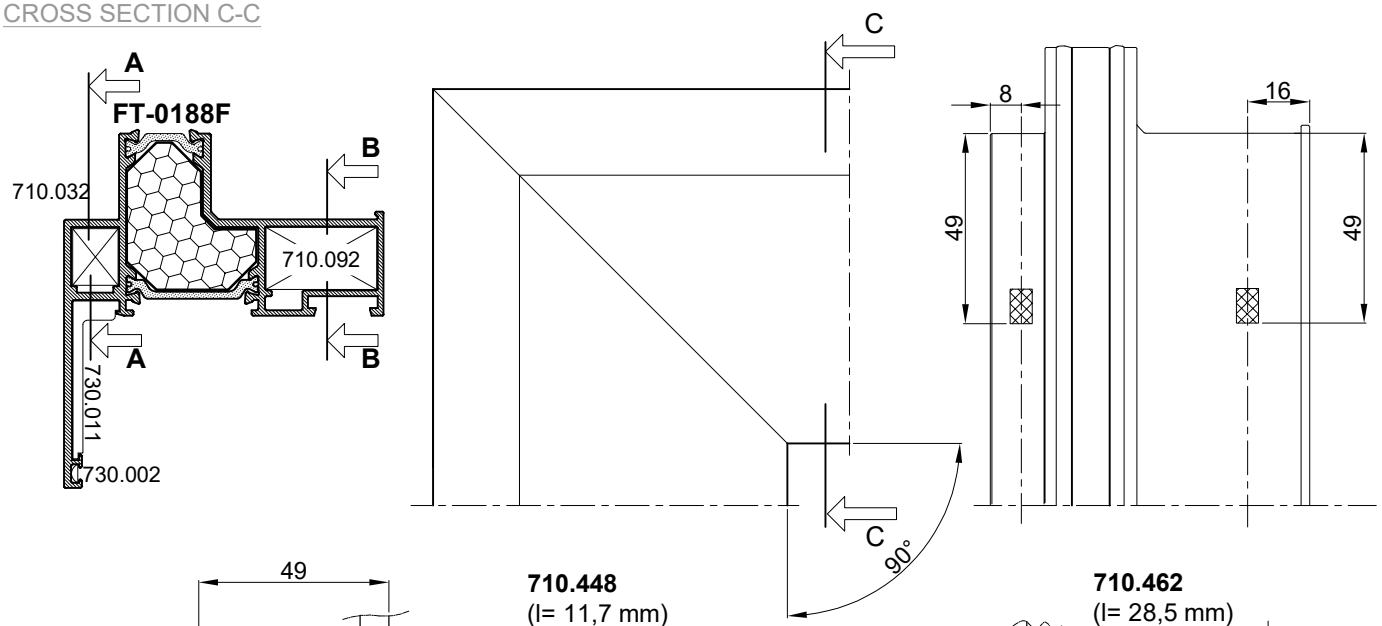


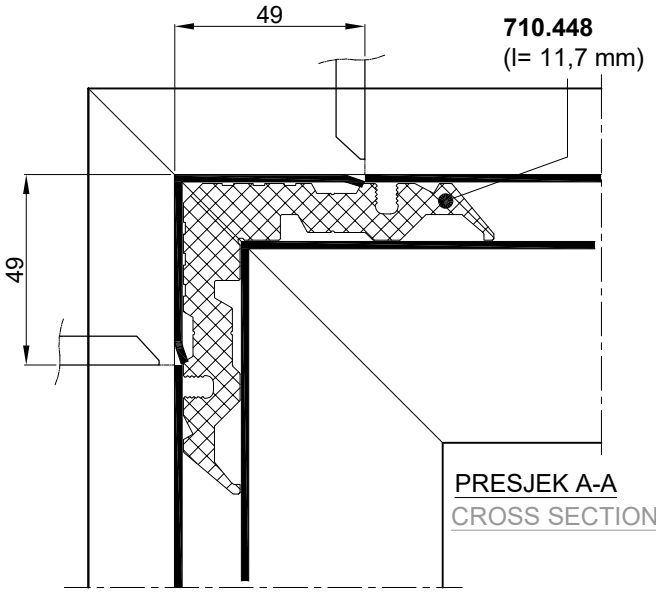

PRESJEK A-A
CROSS SECTION A-A

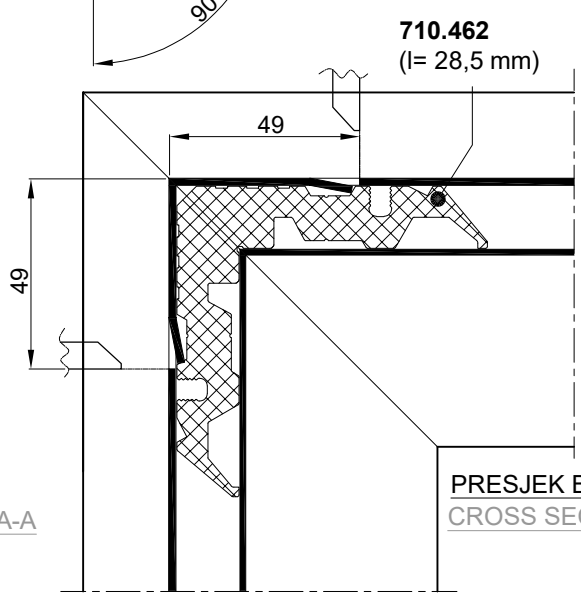

PRESJEK B-B
CROSS SECTION B-B

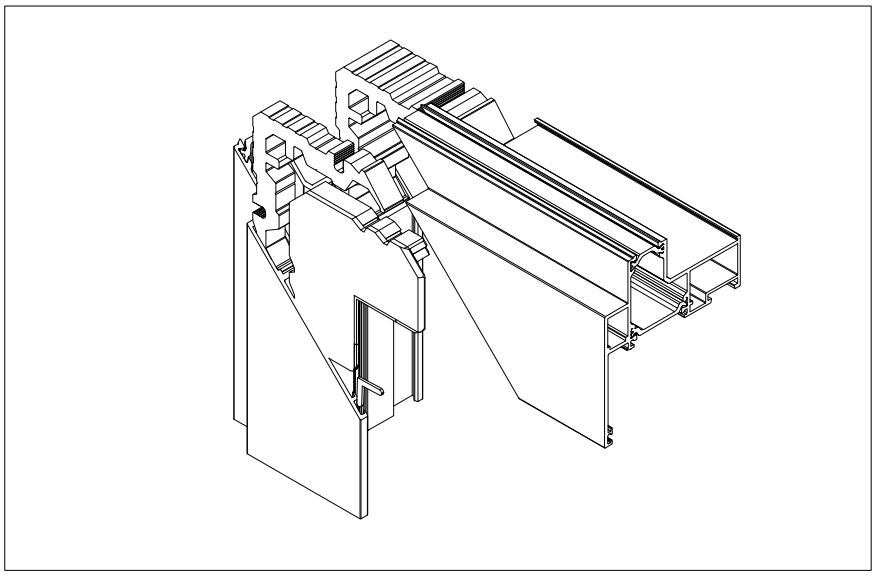



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

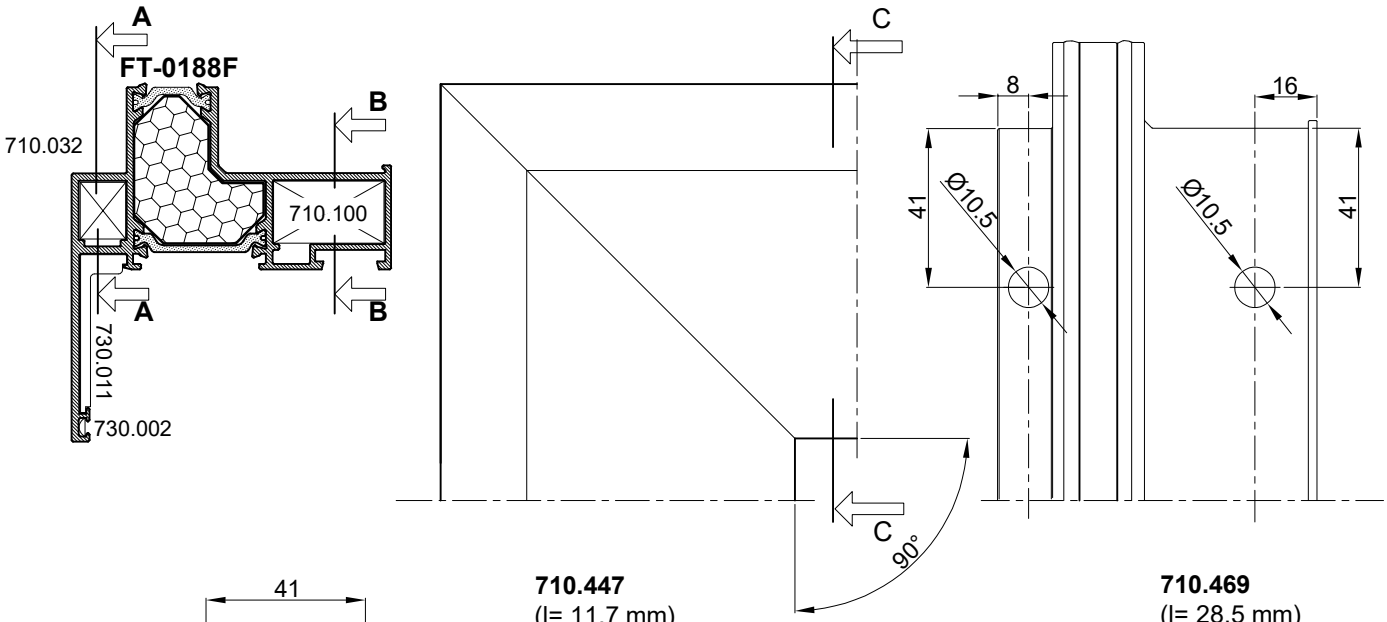

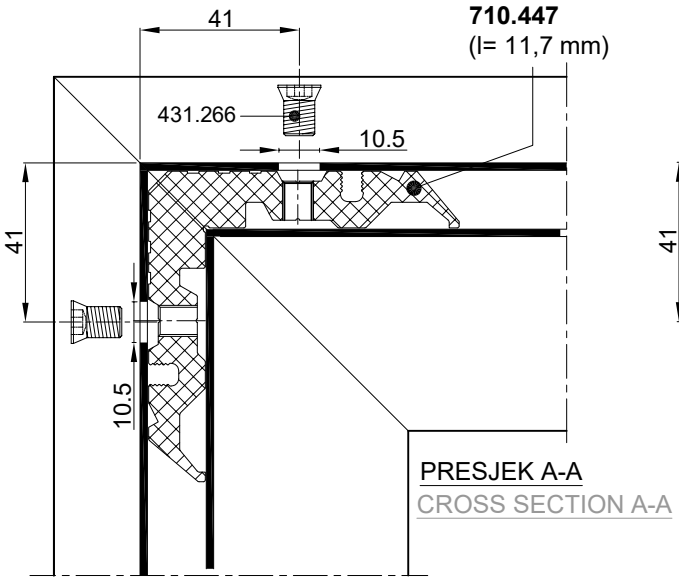


PRESJEK A-A
CROSS SECTION A-A

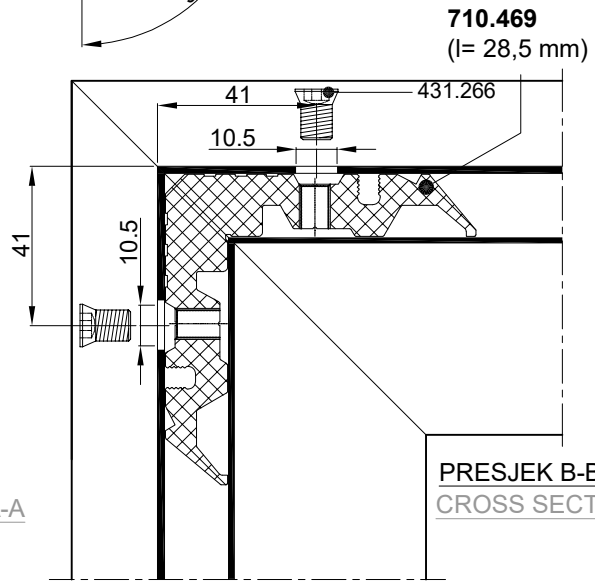

PRESJEK B-B
CROSS SECTION B-B


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

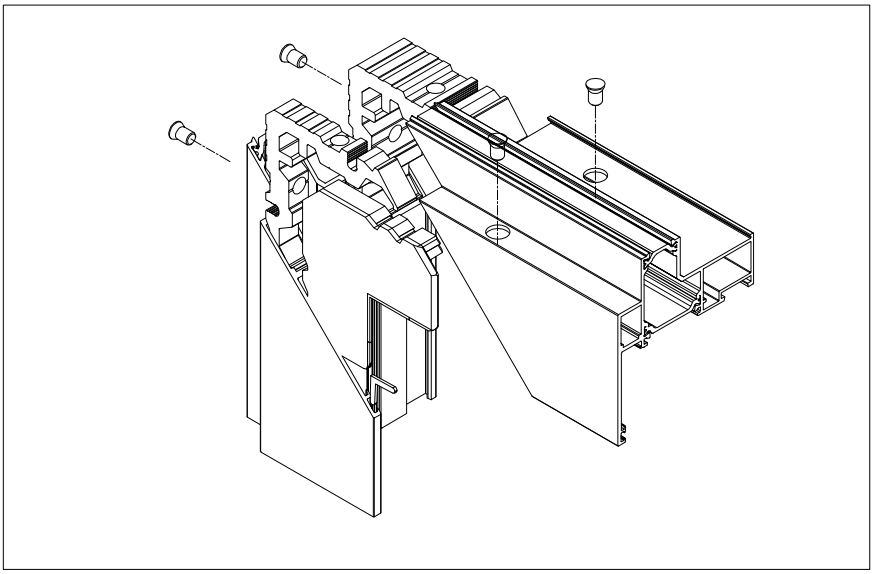



- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C




FT-0148F

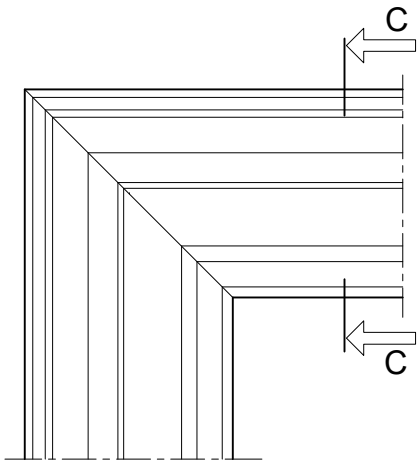

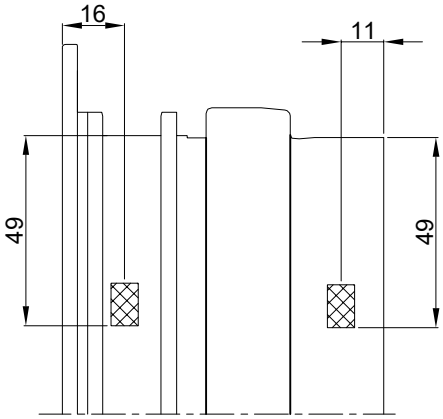


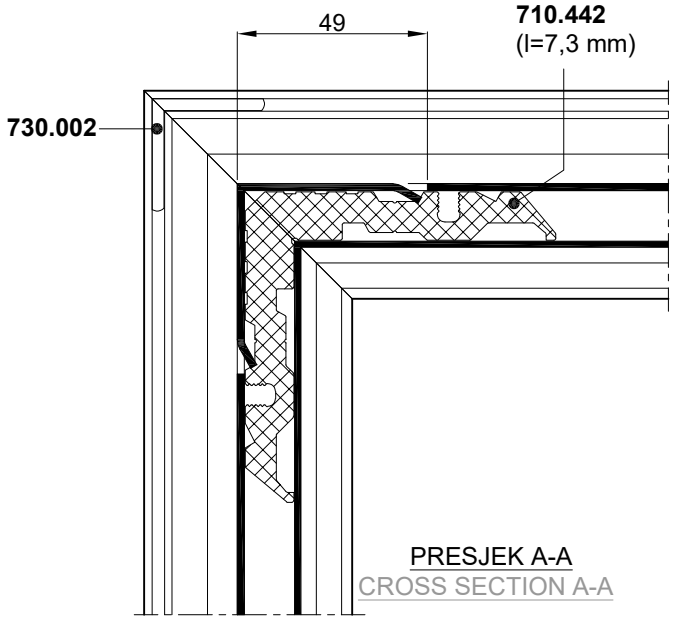

PRESJEK A-A
CROSS SECTION A-A

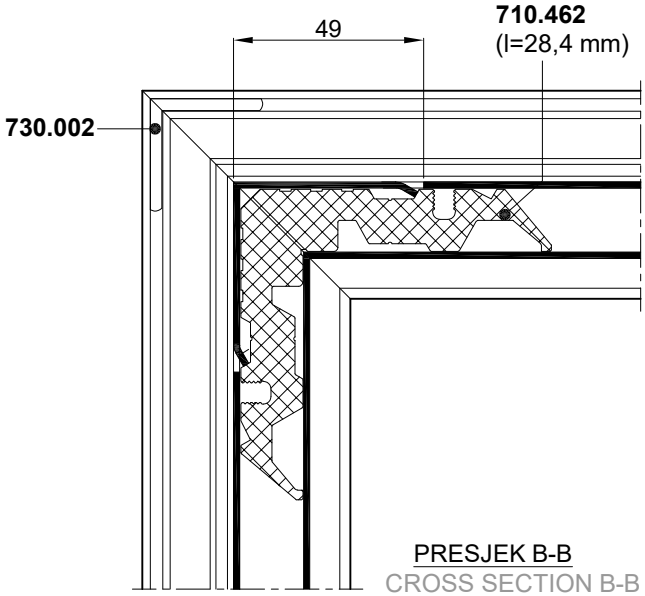

PRESJEK B-B
CROSS SECTION B-B

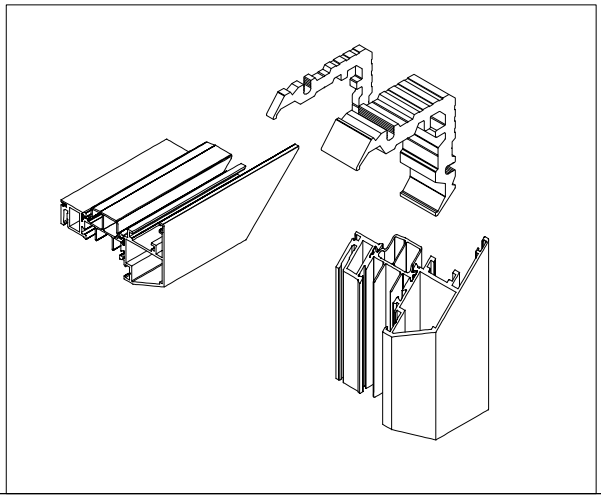


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE-


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C




FT-0148F

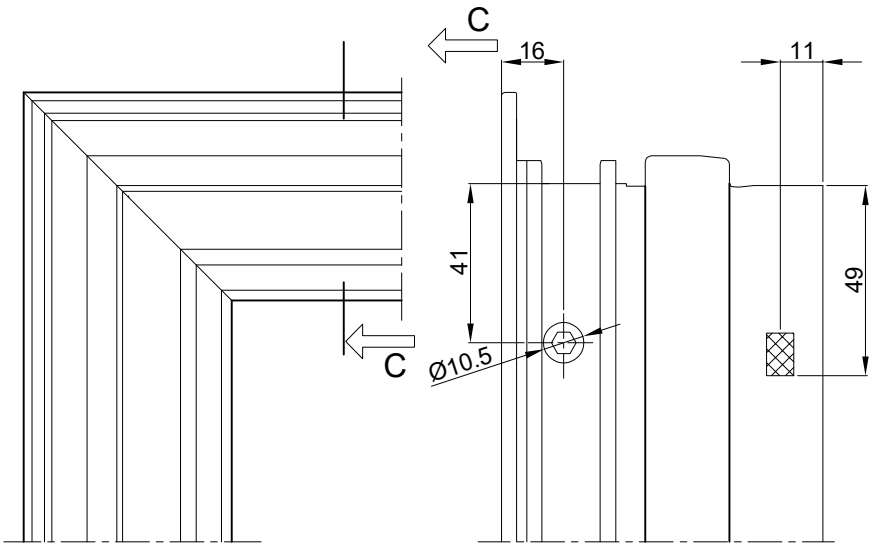


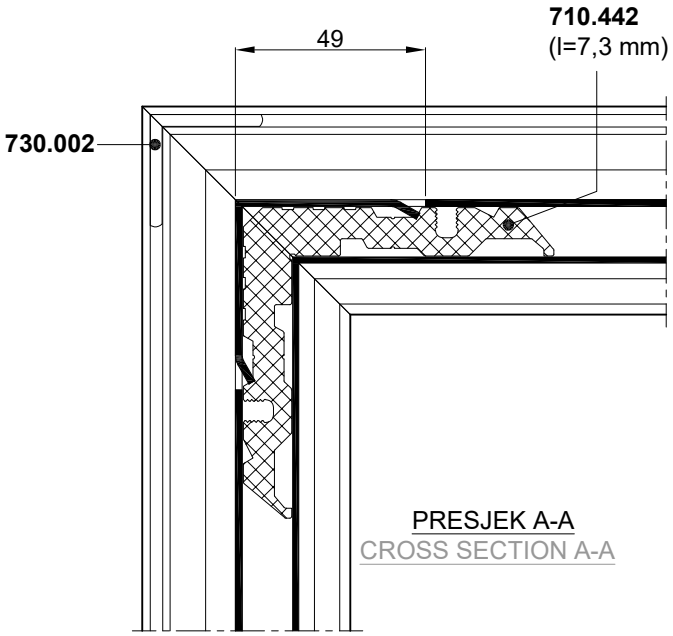

PRESJEK A-A
CROSS SECTION A-A

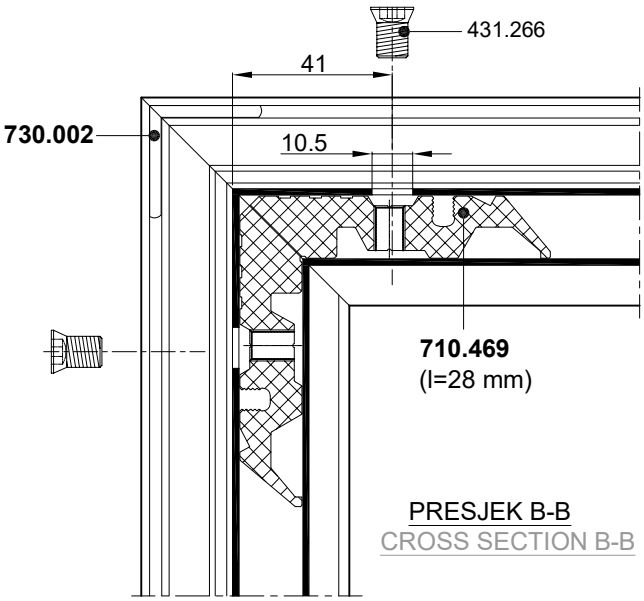

PRESJEK B-B
CROSS SECTION B-B

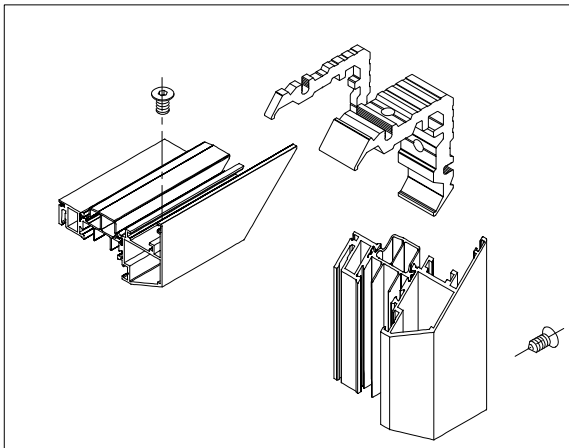



1. STROJNO UPREŠAVANJE
2. RUČNO
3. UPREŠAVANJEVIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

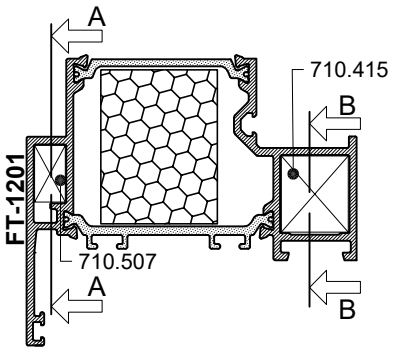


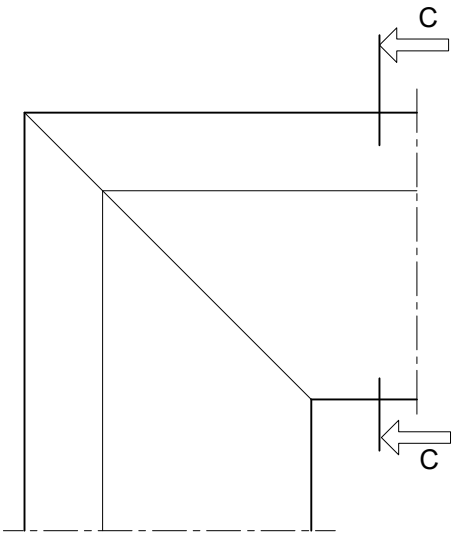

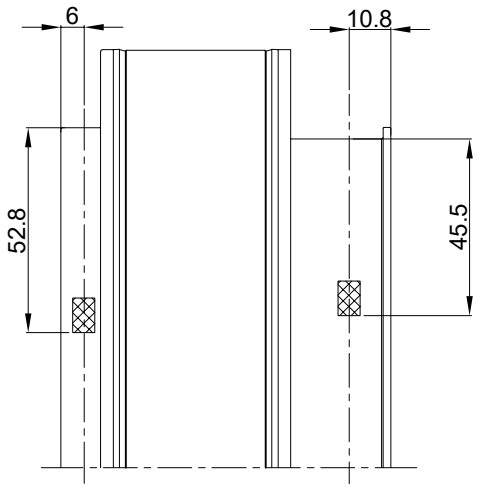


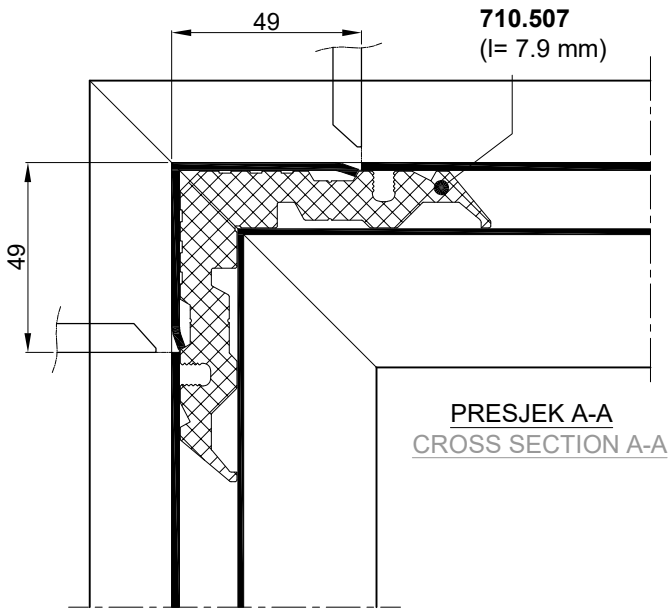

PRESJEK A-A
CROSS SECTION A-A

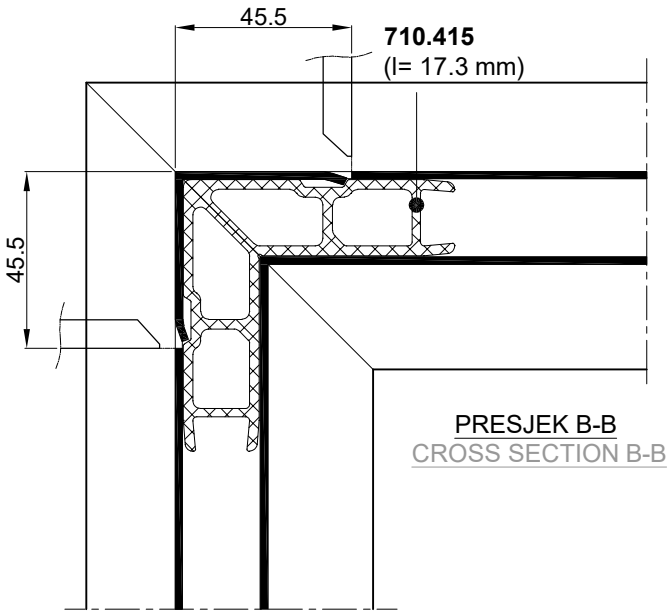

PRESJEK B-B
CROSS SECTION B-B

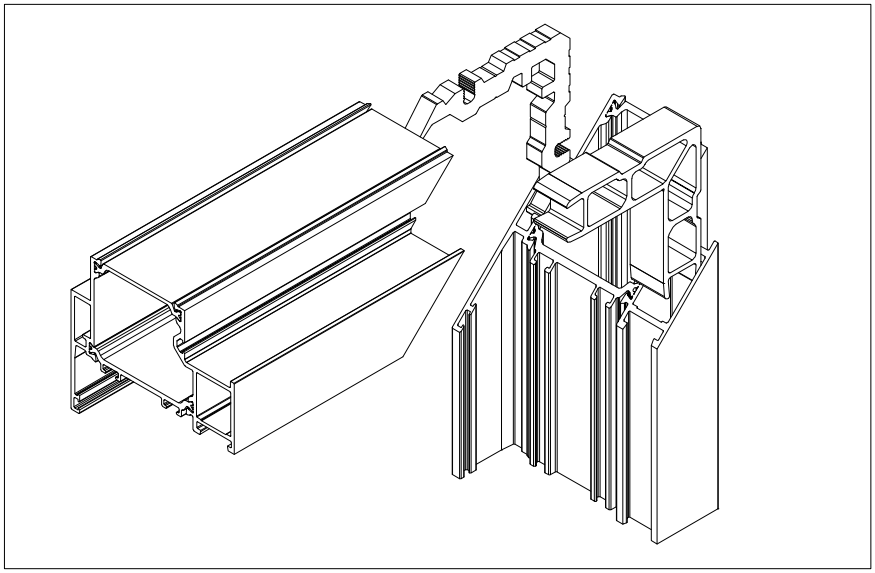


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

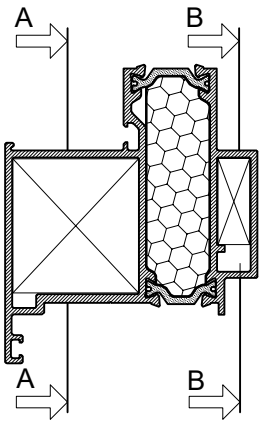


FT-0260F

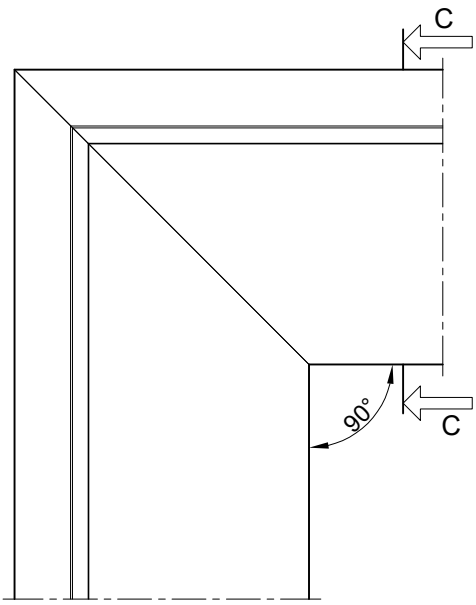

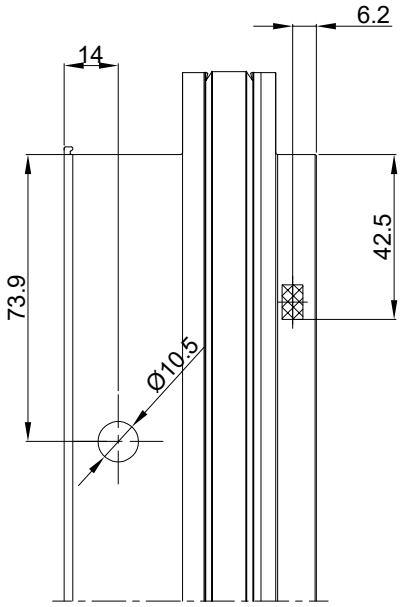


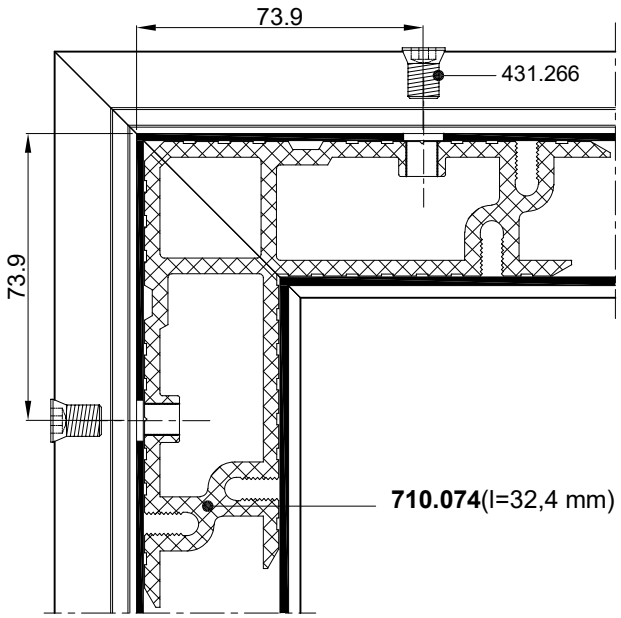

PRESJEK A-A
CROSS SECTION A-A

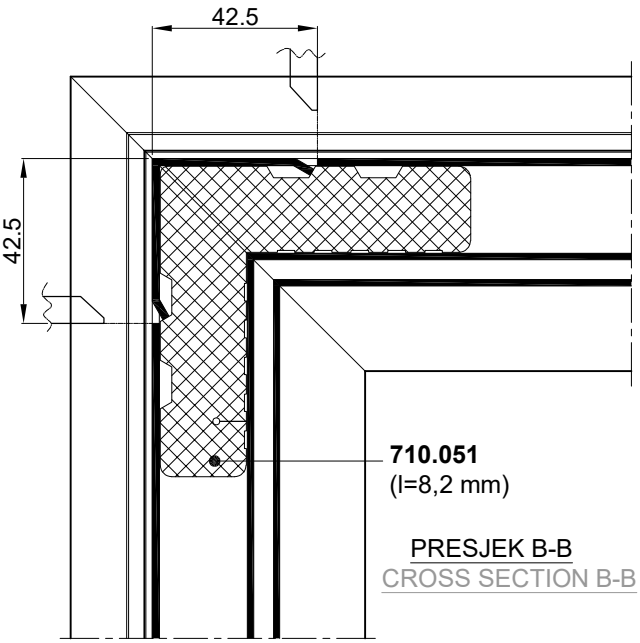

PRESJEK B-B
CROSS SECTION B-B

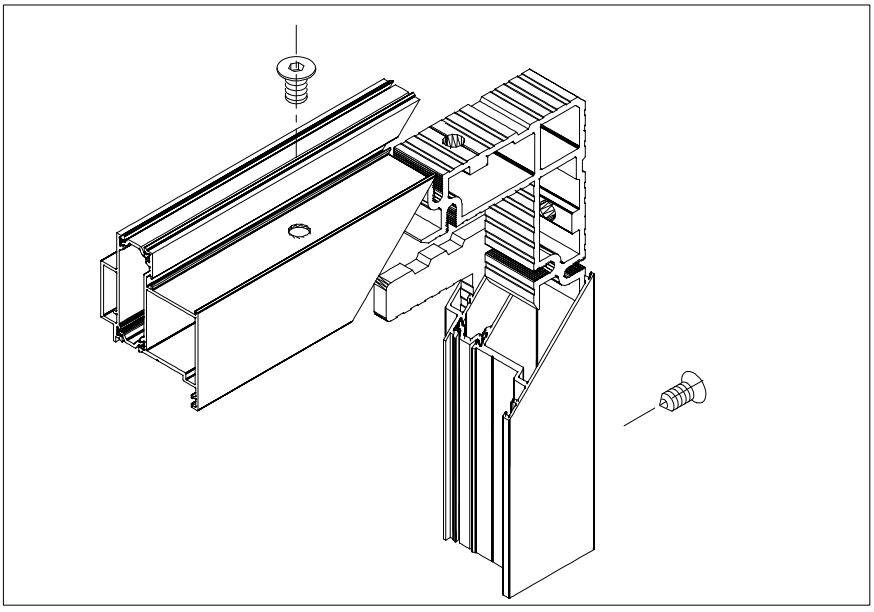


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING


PRESJEK C-C
CROSS SECTION C-C

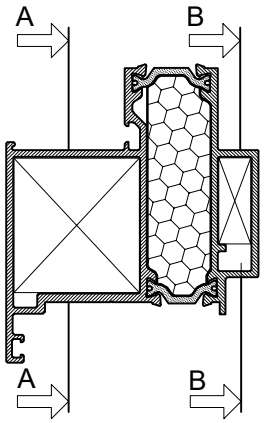

FT-0260F

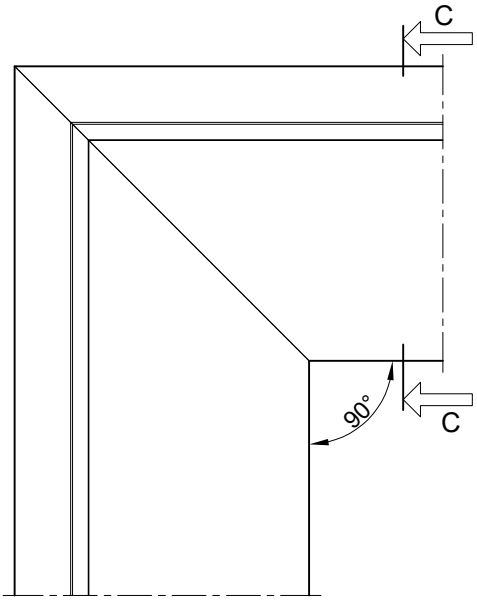


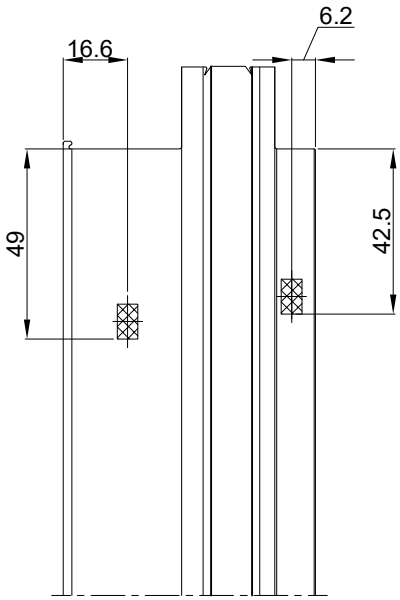

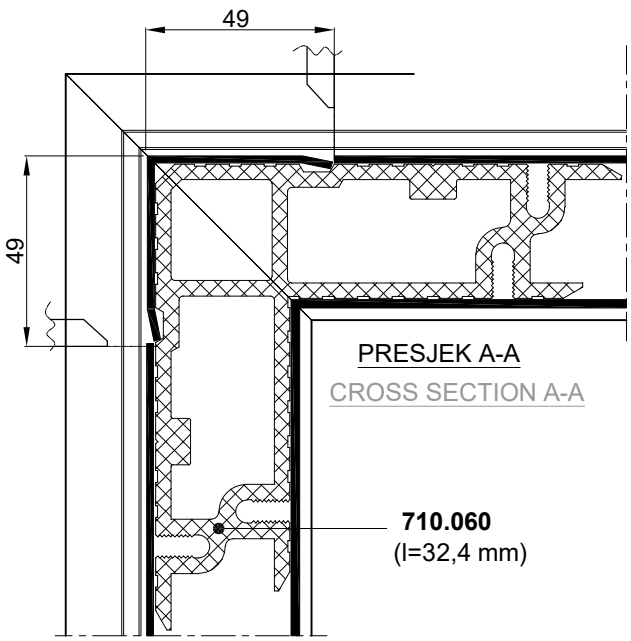


PRESJEK A-A
CROSS SECTION A-A

710.060
(l=32,4 mm)

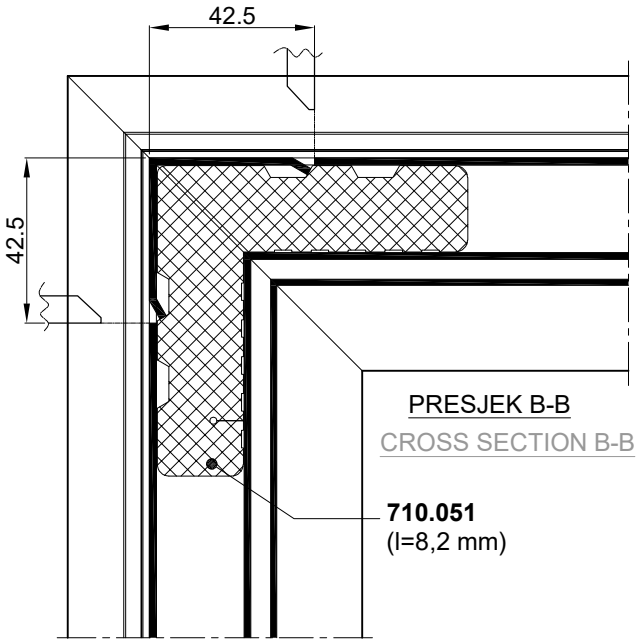


PRESJEK B-B
CROSS SECTION B-B

710.051
(l=8,2 mm)

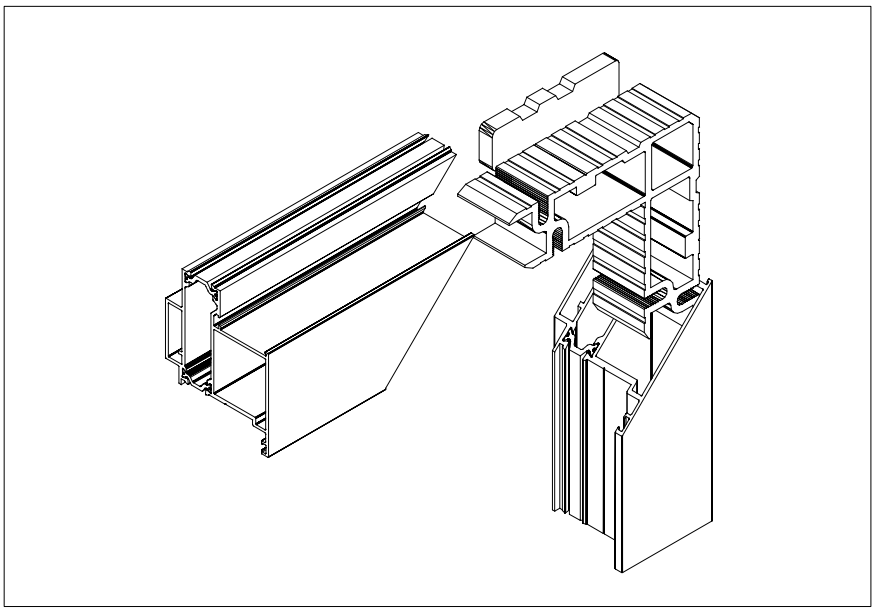



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

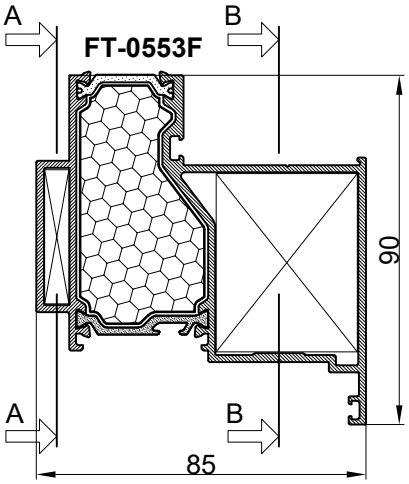


PRESJEK C-C
CROSS SECTION C-C

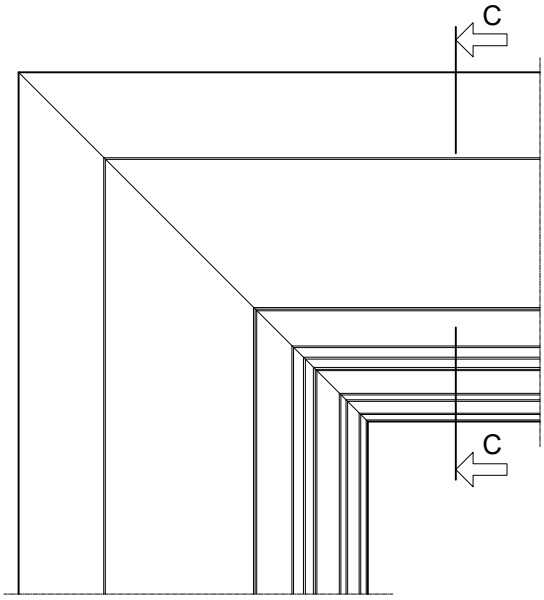

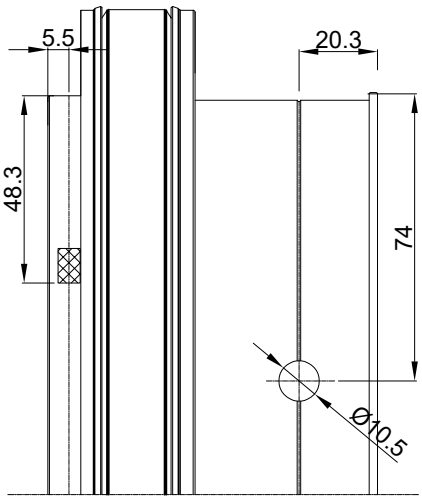


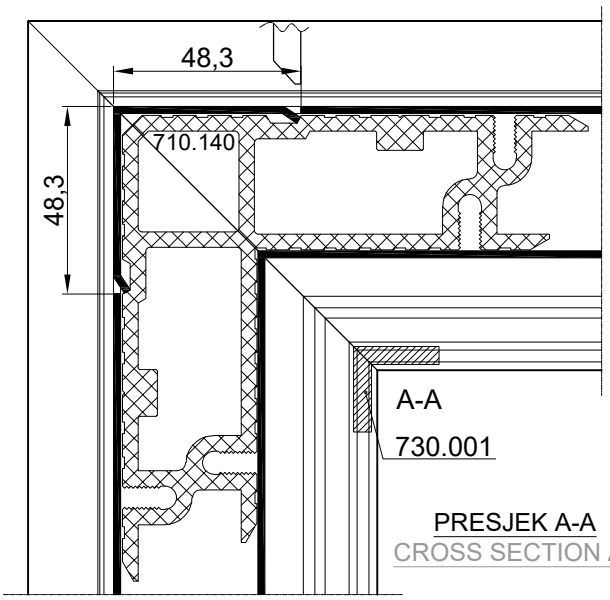

PRESJEK A-A
CROSS SECTION A-A

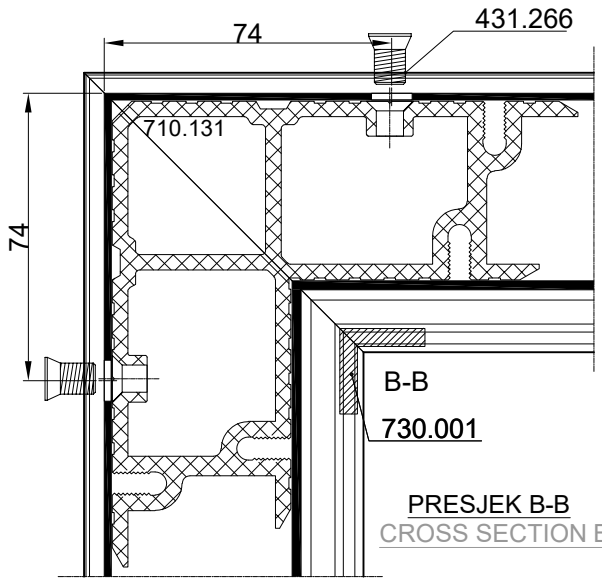


PRESJEK B-B
CROSS SECTION B-B

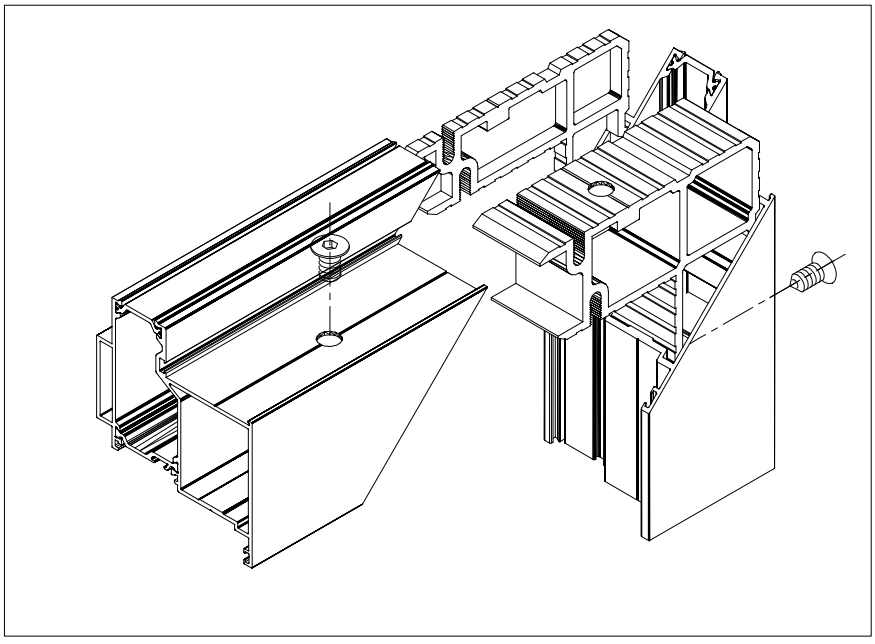



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA
1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- UPREŠAVANJE STJENKE PROFILA U KUTNIK
- ALUMINIUM PROFILE CORNER CRIMPING

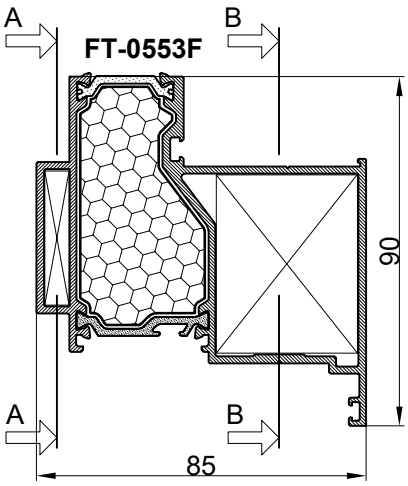


PRESJEK C-C
CROSS SECTION C-C

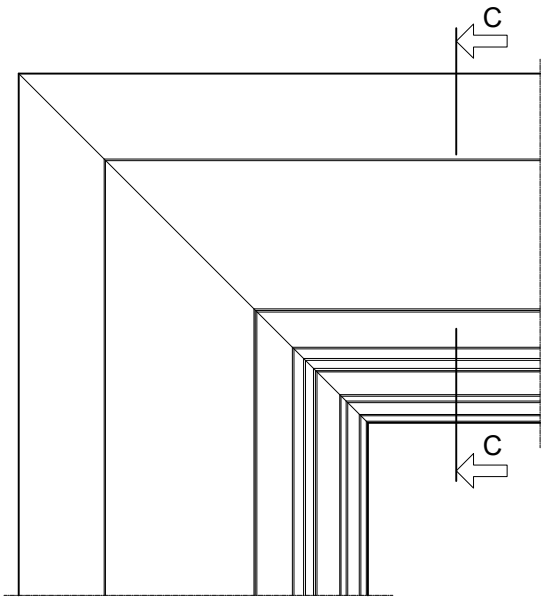

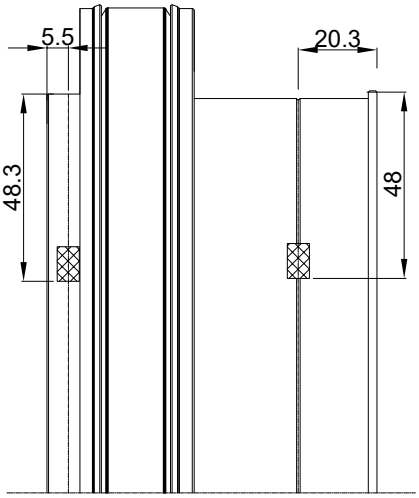


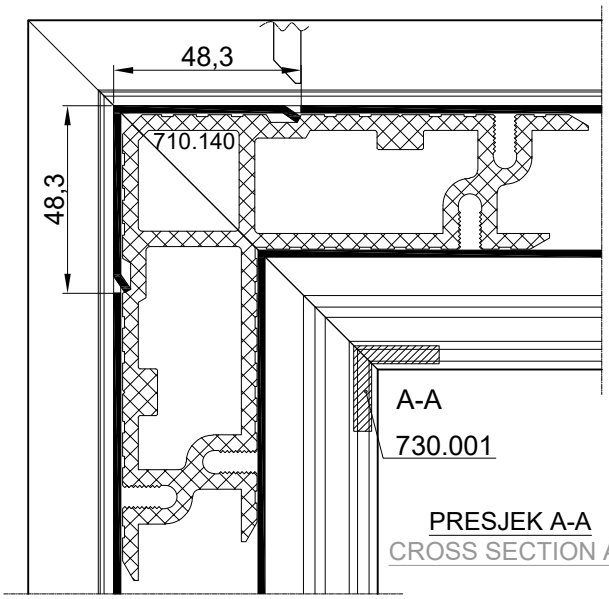

PRESJEK A-A
CROSS SECTION A-A

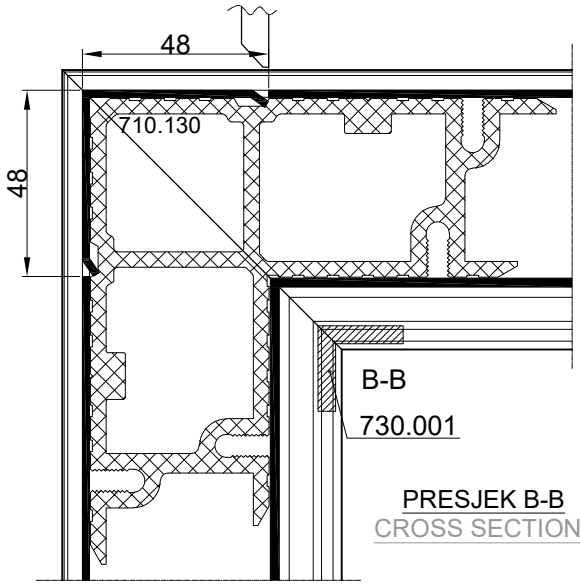


PRESJEK B-B
CROSS SECTION B-B

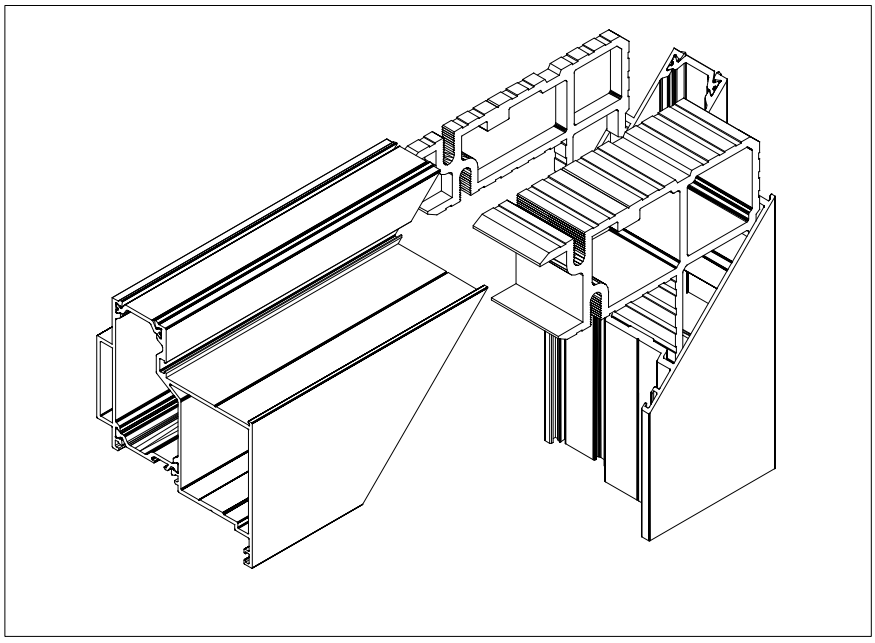


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

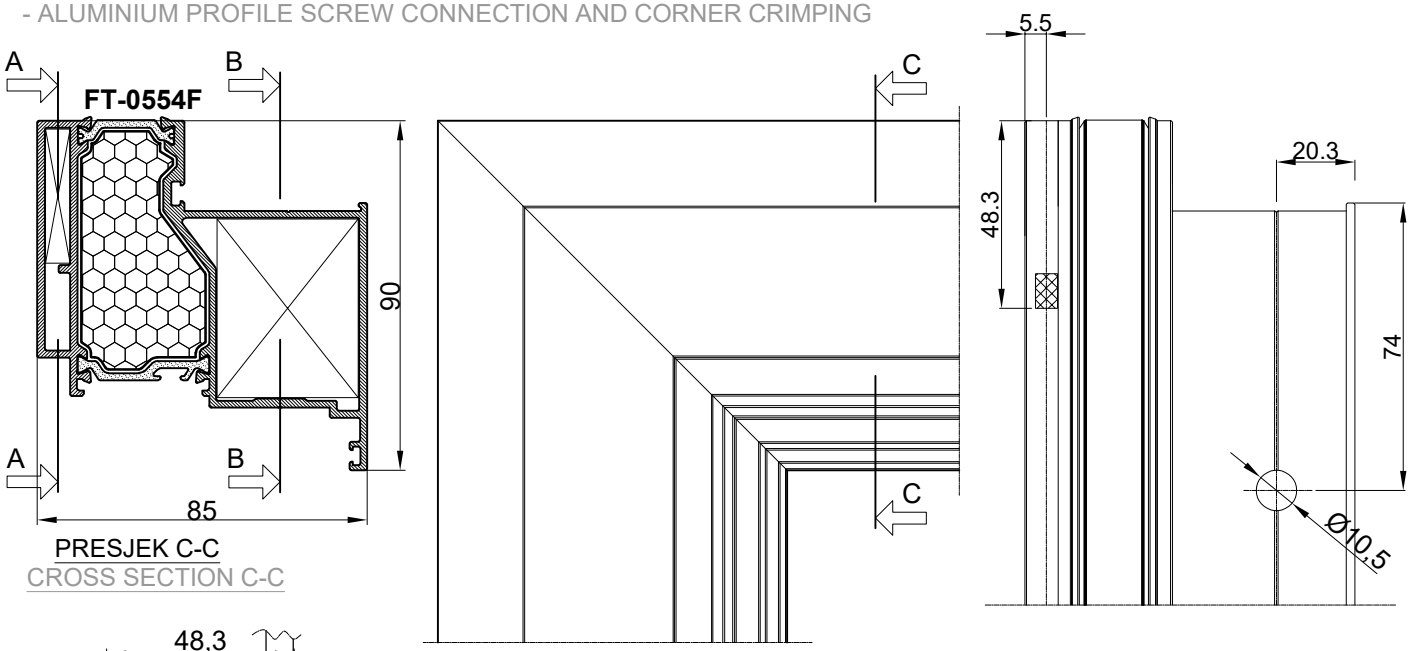


PRESJEK C-C
CROSS SECTION C-C

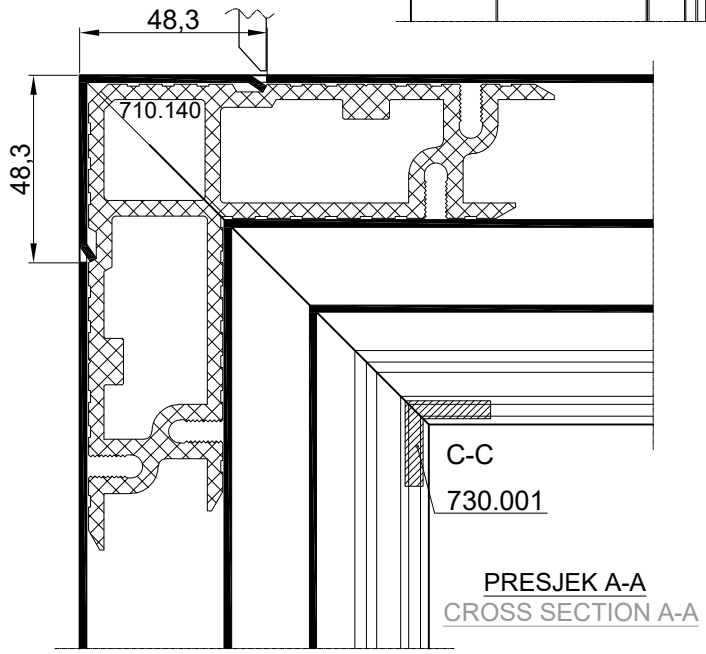

PRESJEK A-A
CROSS SECTION A-A

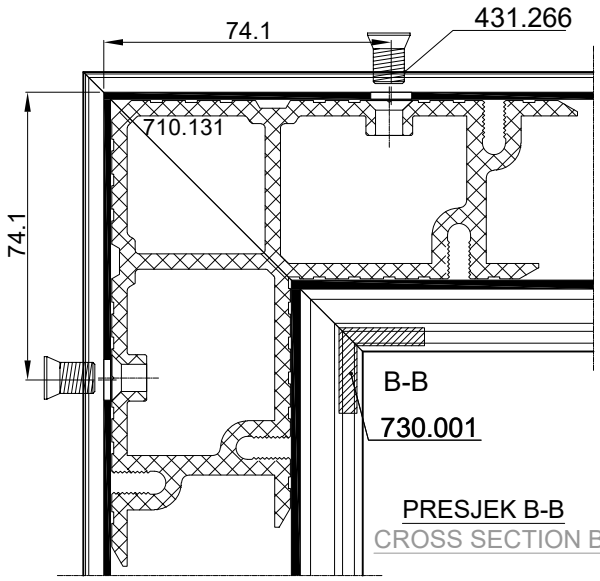


PRESJEK B-B
CROSS SECTION B-B

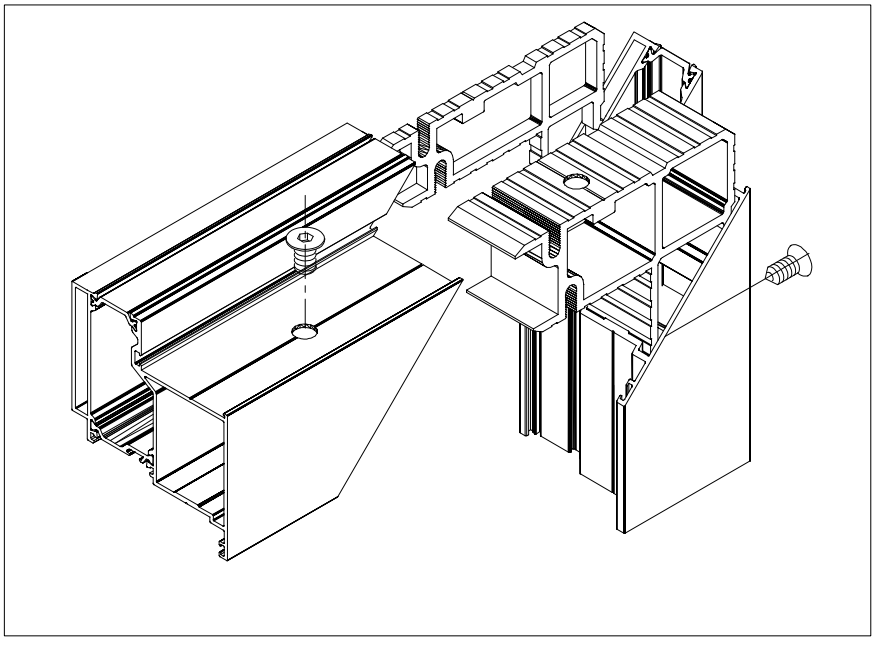


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION


- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

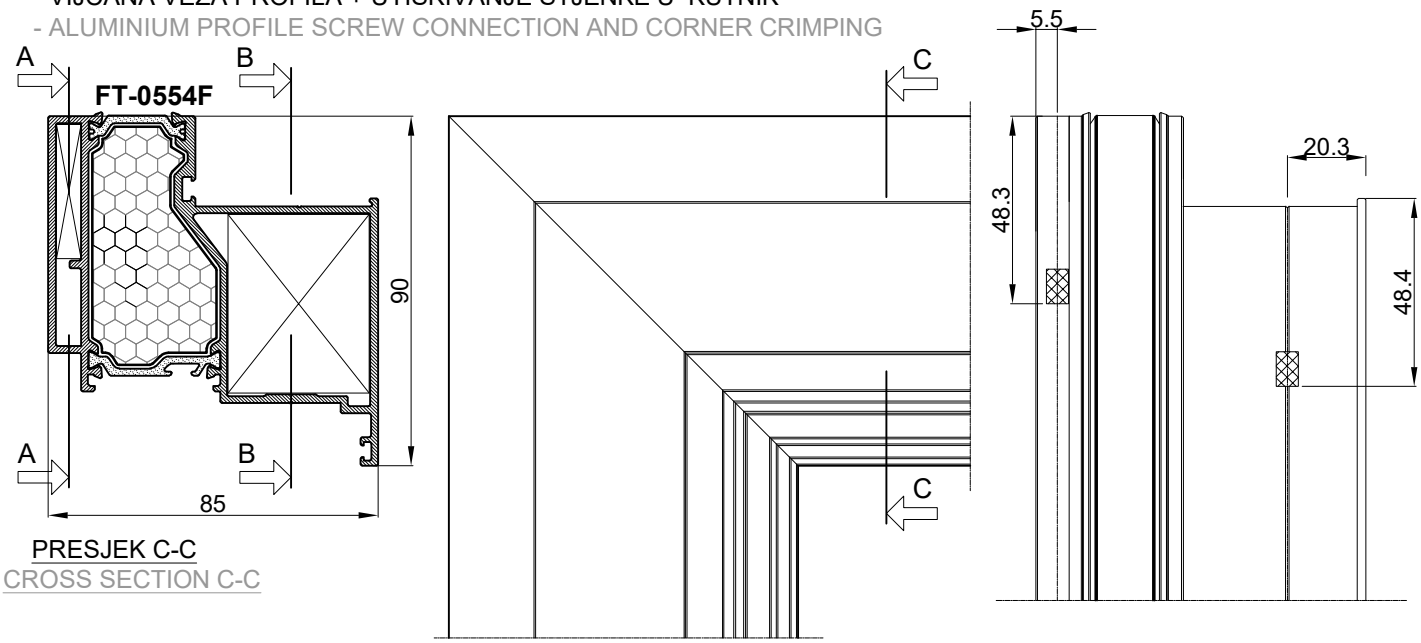


PRESJEK C-C
CROSS SECTION C-C

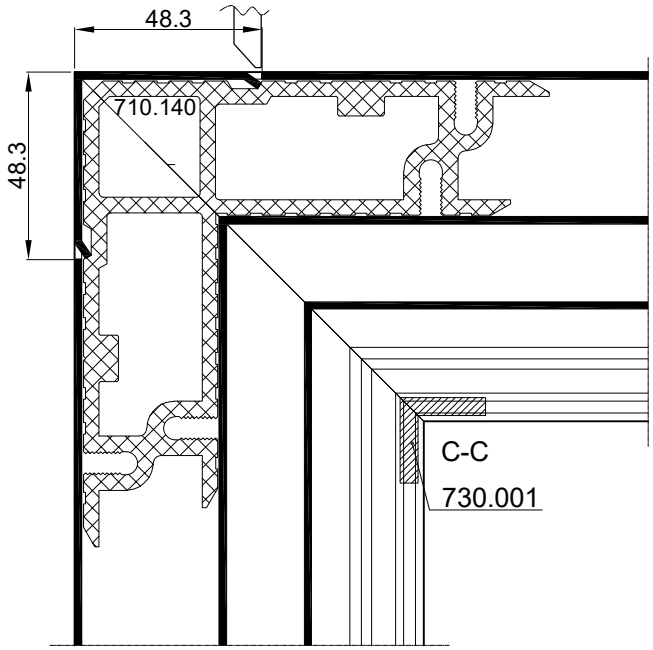

PRESJEK B-B
CROSS SECTION B-B

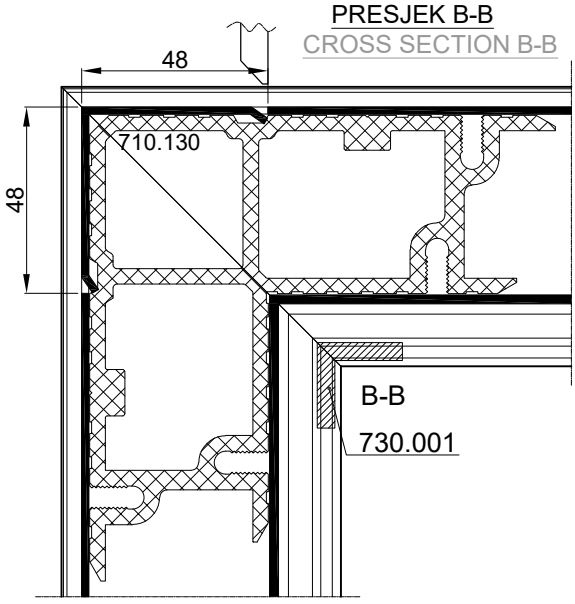

PRESJEK A-A
CROSS SECTION A-A

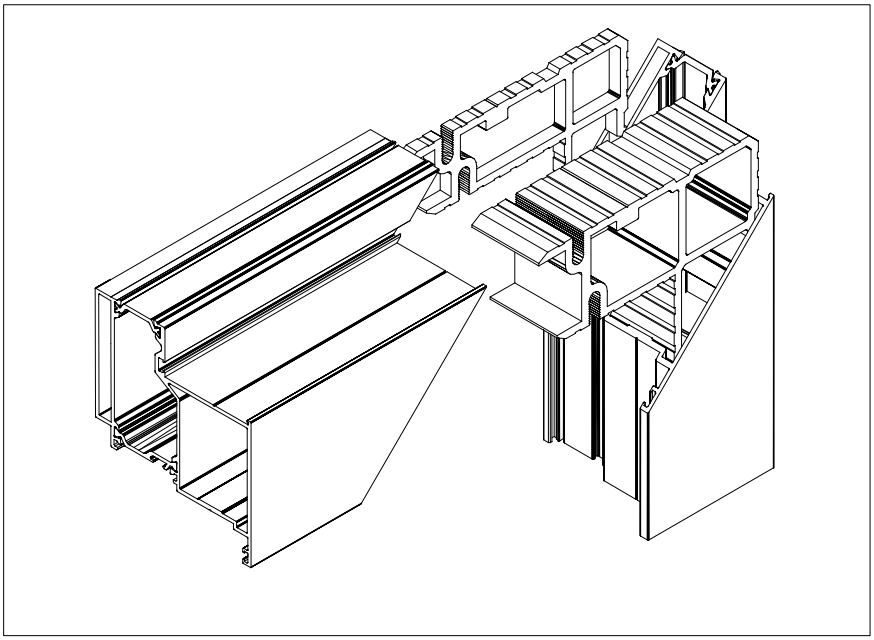


1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA


1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

- VIJČANA VEZA PROFILA + UTISKIVANJE STJENKE U KUTNIK
- ALUMINIUM PROFILE SCREW CONNECTION AND CORNER CRIMPING

PRESJEK C-C
CROSS SECTION C-C

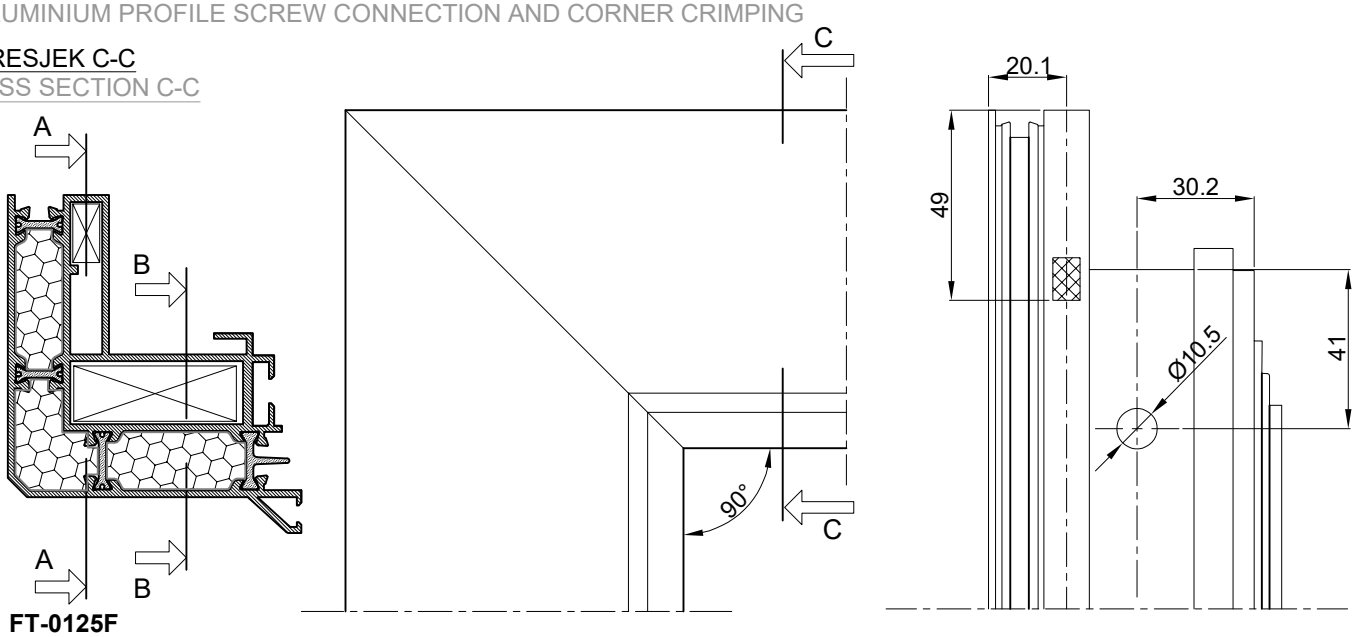


FT-0125F

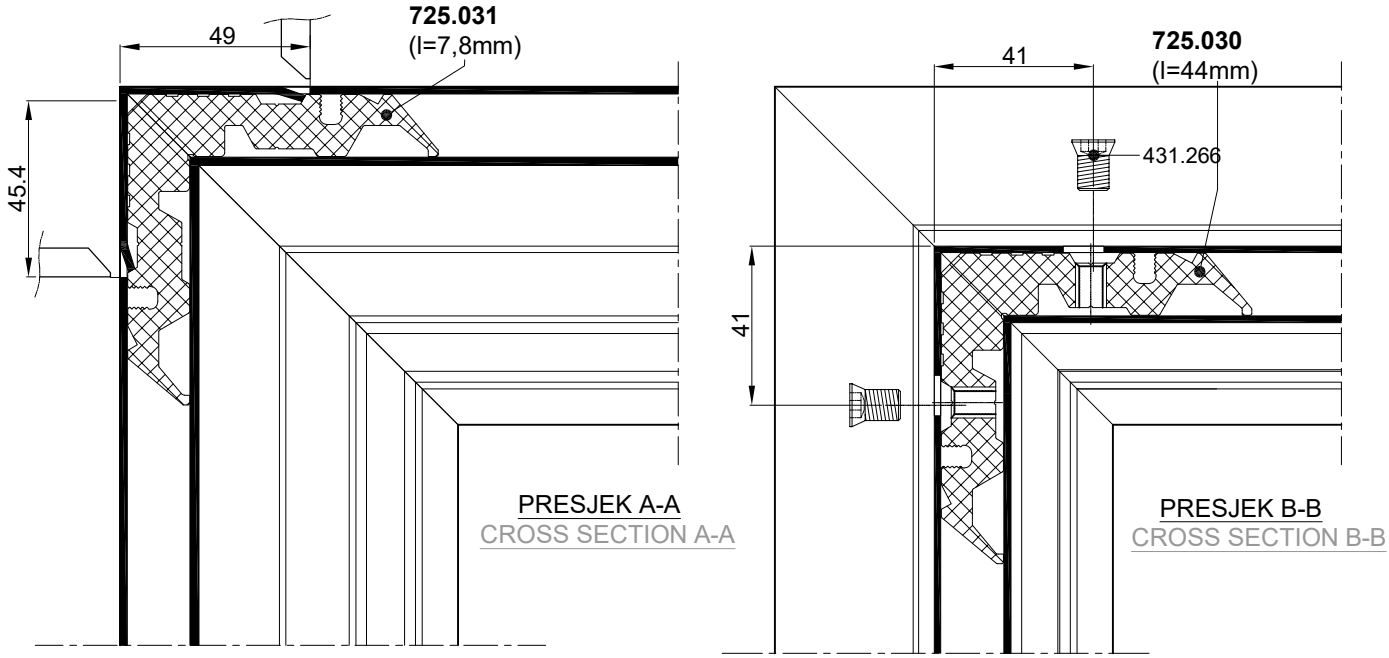


PRESJEK A-A
CROSS SECTION A-A


PRESJEK B-B
CROSS SECTION B-B

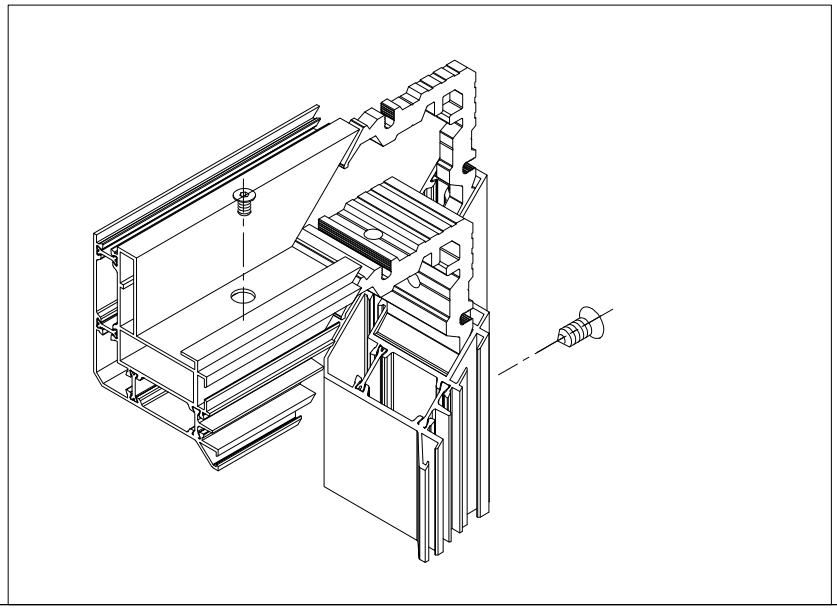



1. STROJNO UPREŠAVANJE
2. RUČNO UPREŠAVANJE
3. VIJČANA VEZA

1. MACHINE CORNER CRIMPING
2. MANUAL CORNER CRIMPING
3. SCREW CONNECTION

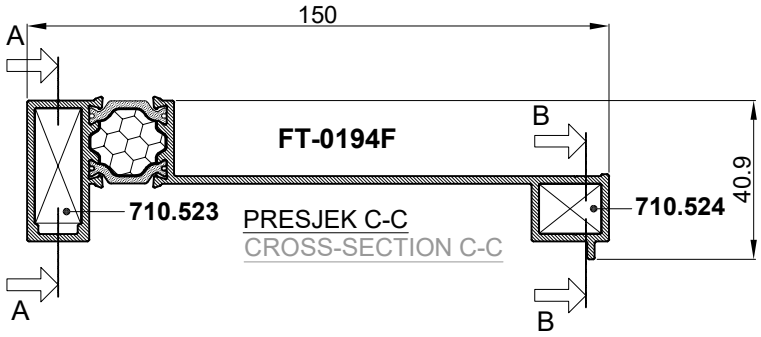


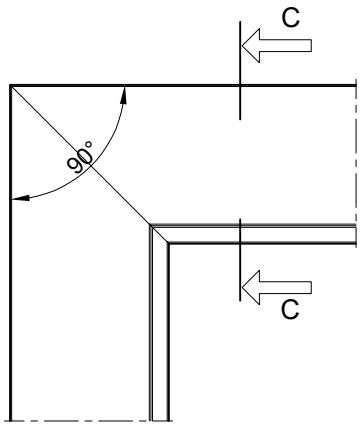


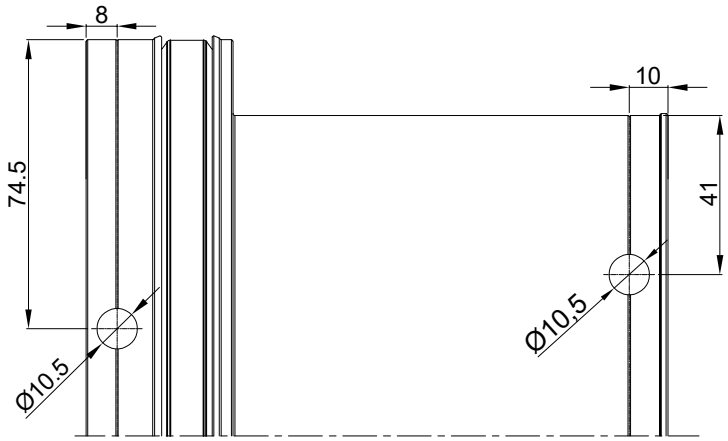


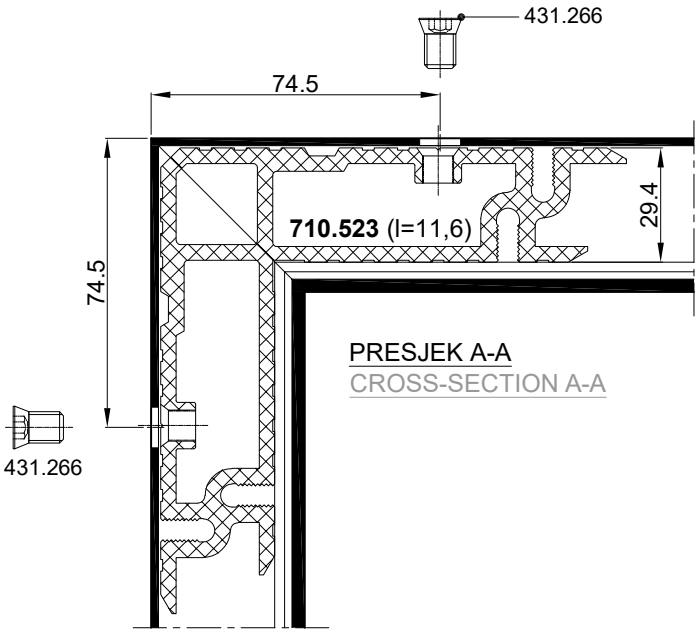


1. VIJČANA VEZA
1. SCREW CONNECTION

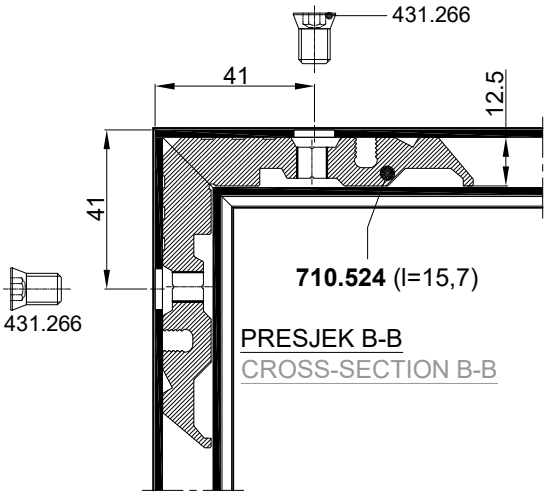


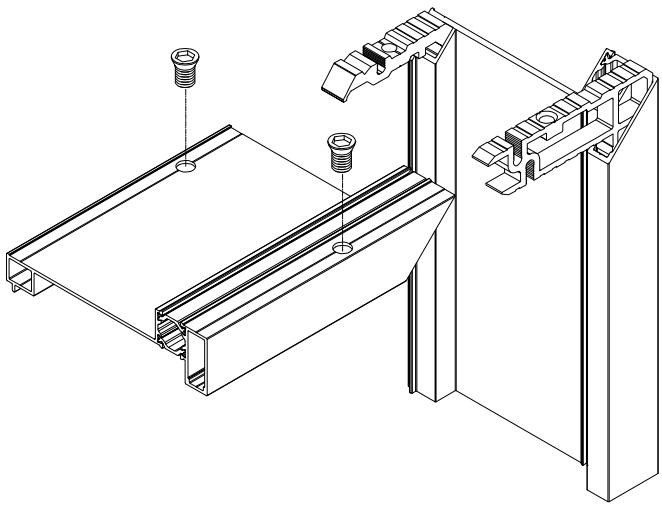


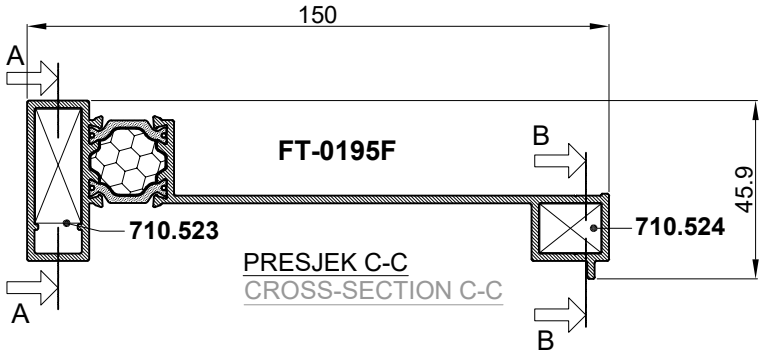

PRESJEK C-C
CROSS-SECTION C-C

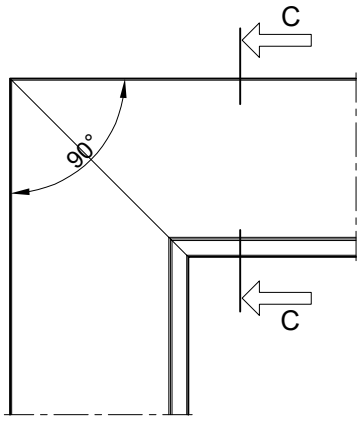


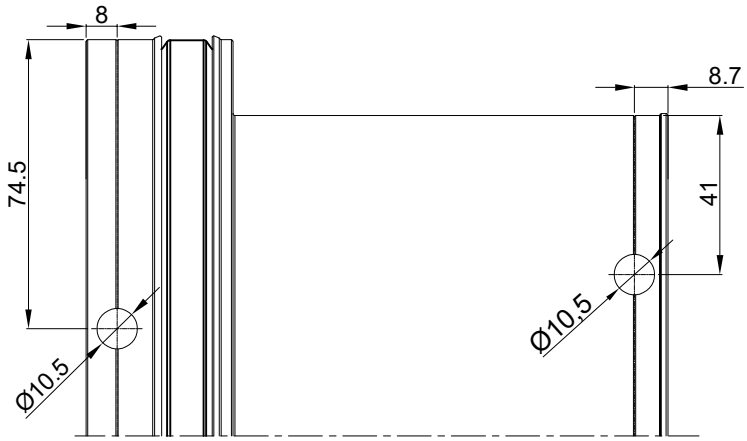


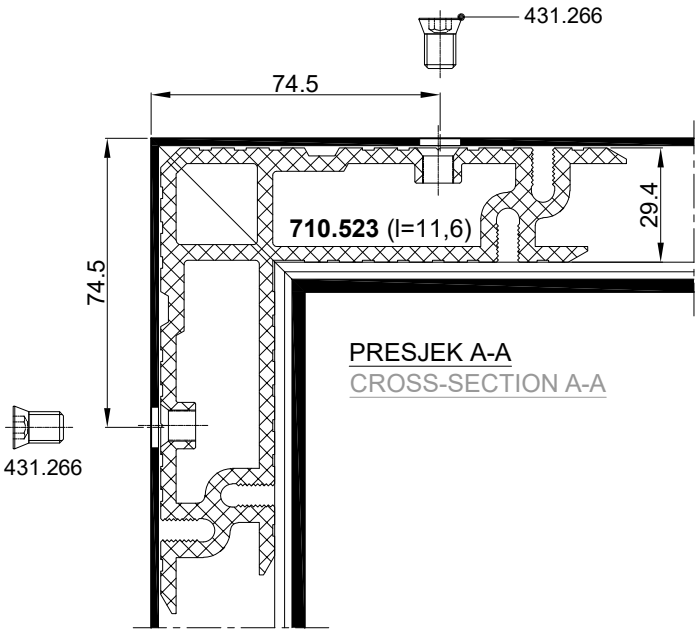


PRESJEK A-A
CROSS-SECTION A-A

1. VIJČANA VEZA
1. SCREW CONNECTION

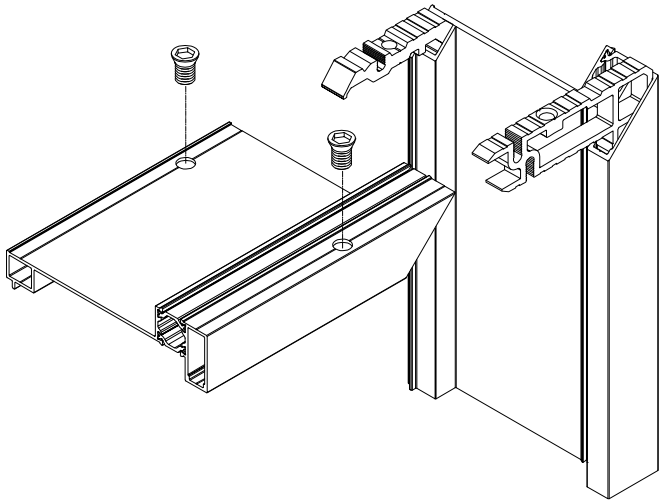


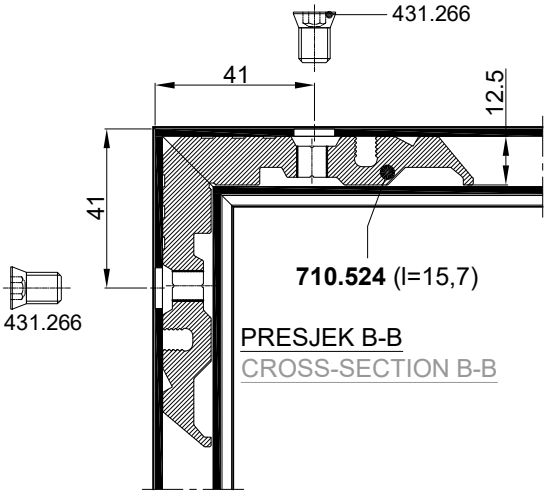


PRESJEK B-B
CROSS-SECTION B-B

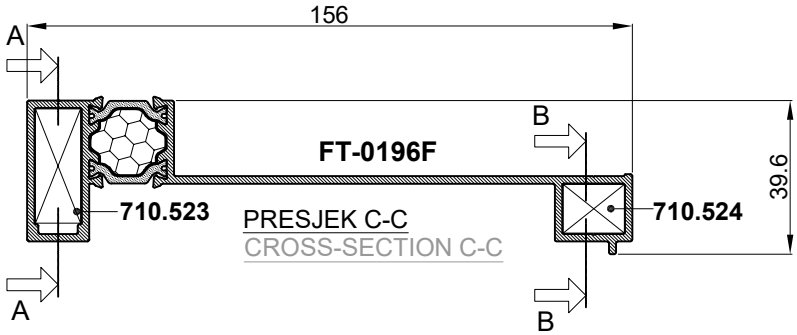


PRESJEK C-C
CROSS-SECTION C-C

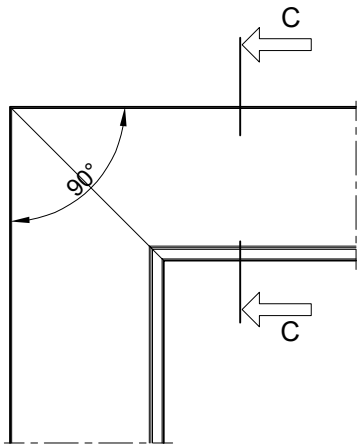


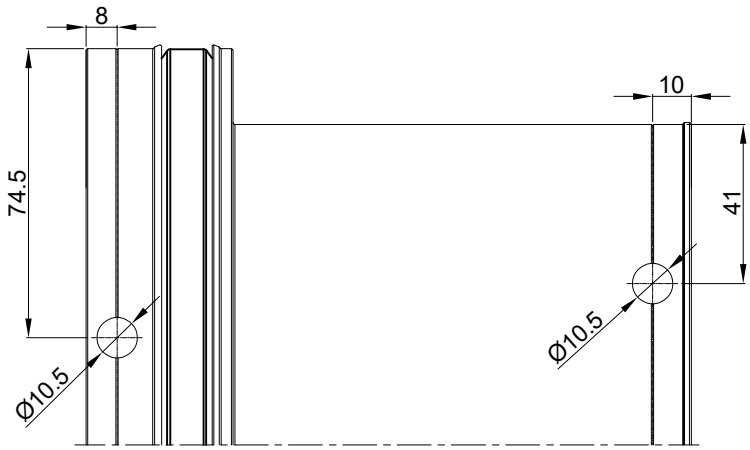


PRESJEK A-A
CROSS-SECTION A-A

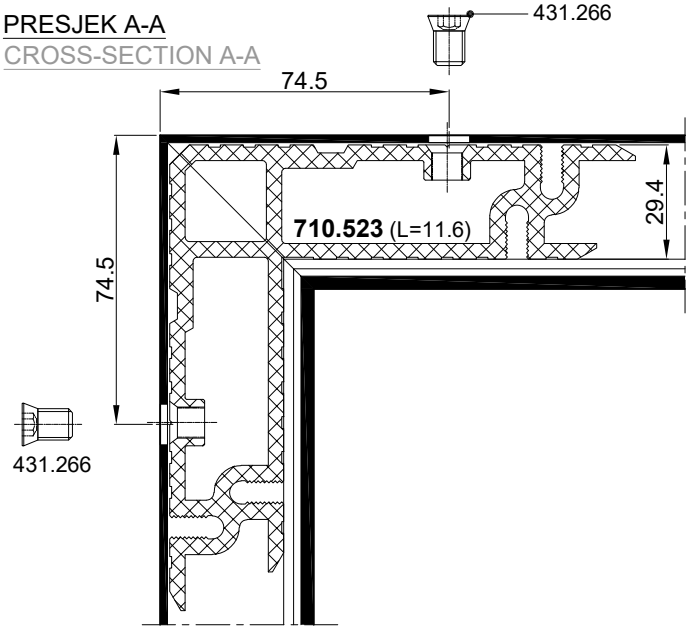



1. VIJČANA VEZA
1. SCREW CONNECTION

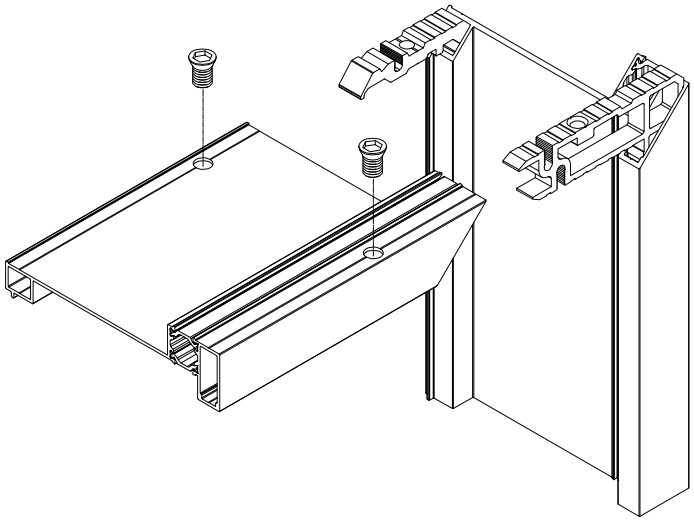


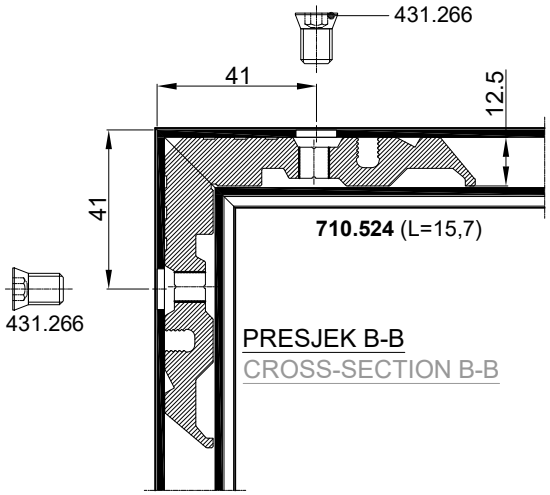


PRESJEK B-B
CROSS-SECTION B-B

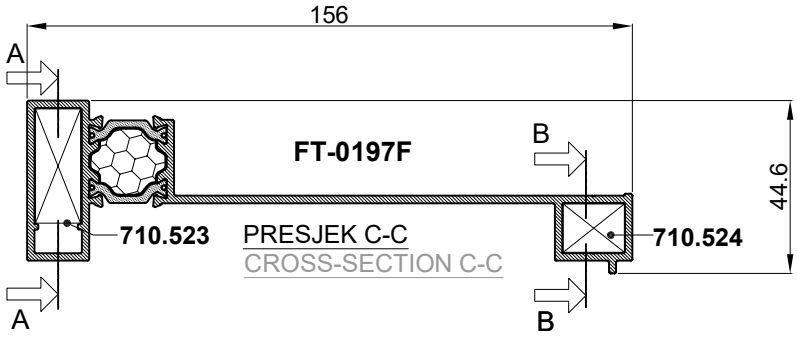

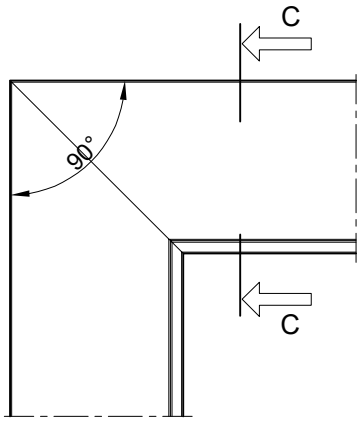


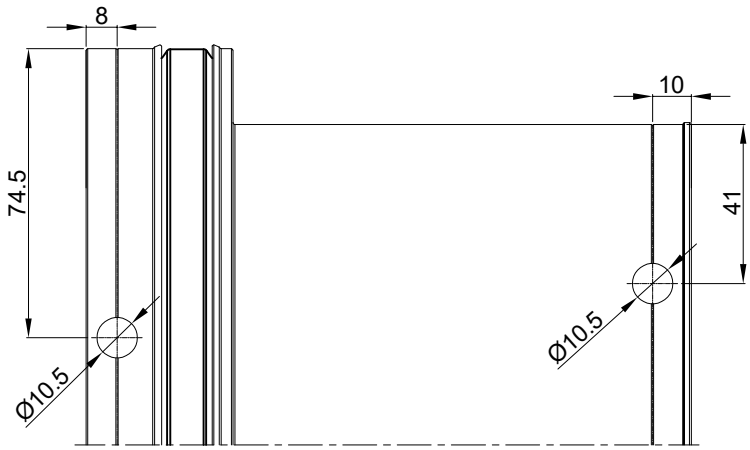


PRESJEK A-A
CROSS-SECTION A-A

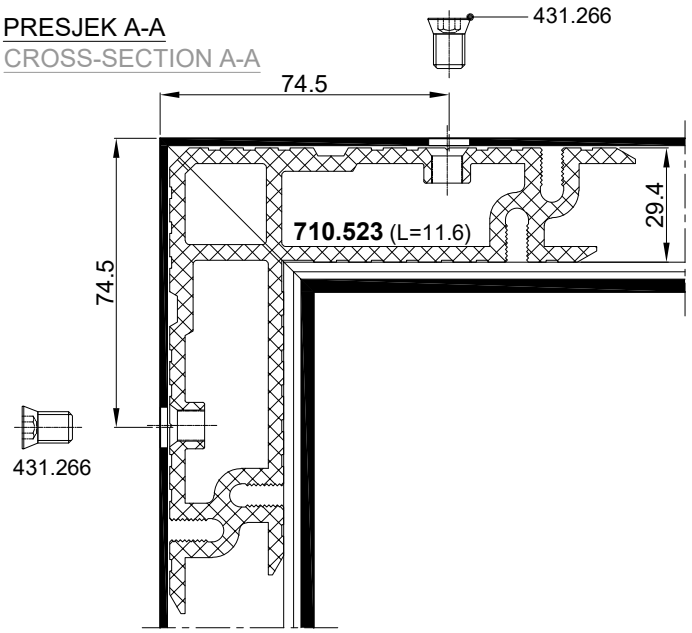



1. VIJČANA VEZA
1. SCREW CONNECTION

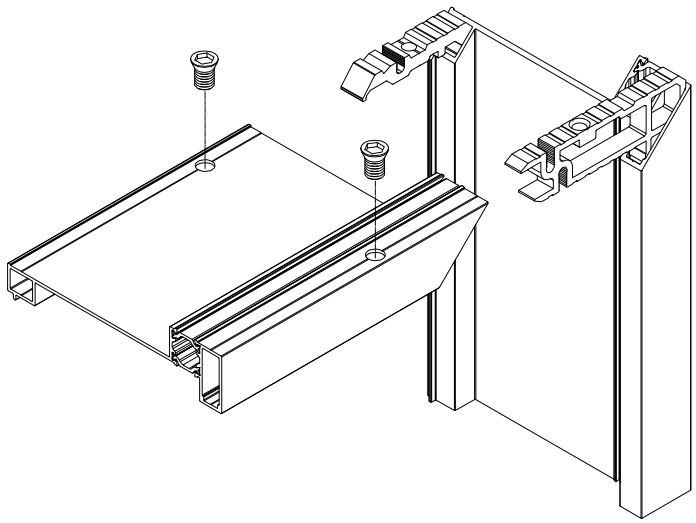


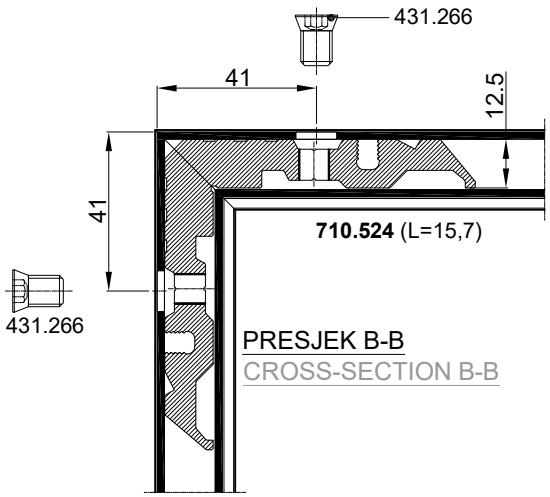


PRESJEK B-B
CROSS-SECTION B-B

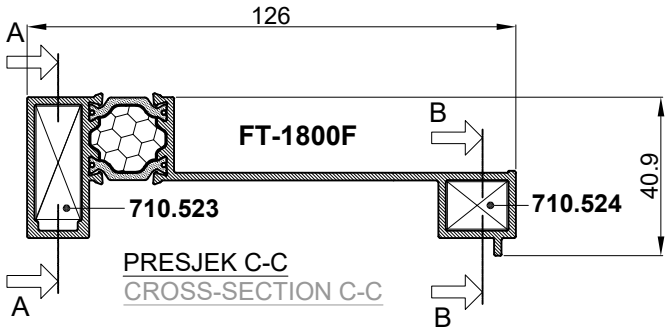


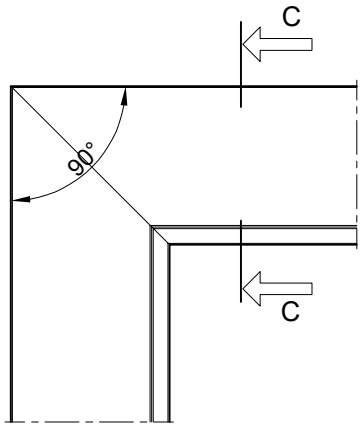


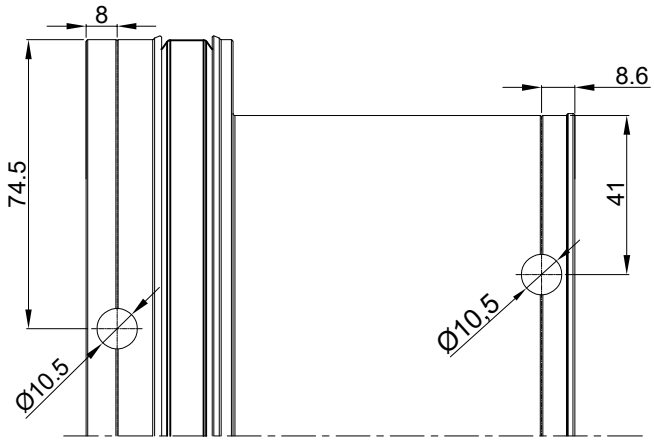


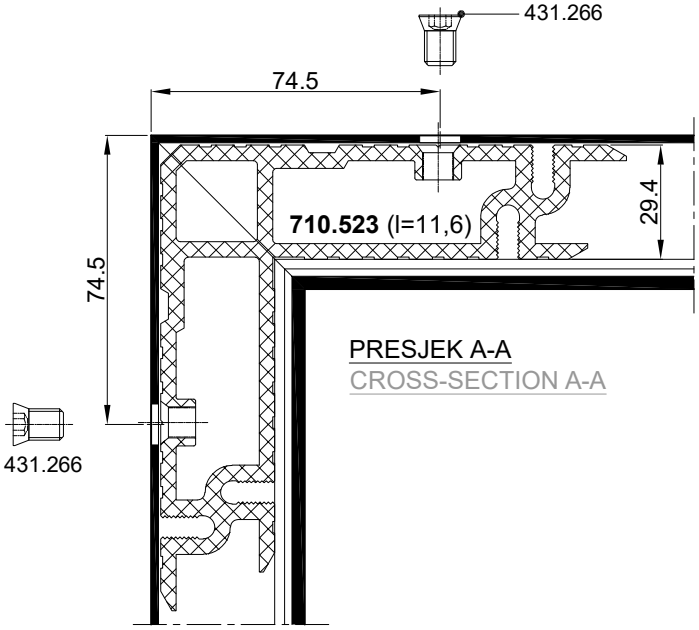


1. VIJČANA VEZA
1. SCREW CONNECTION

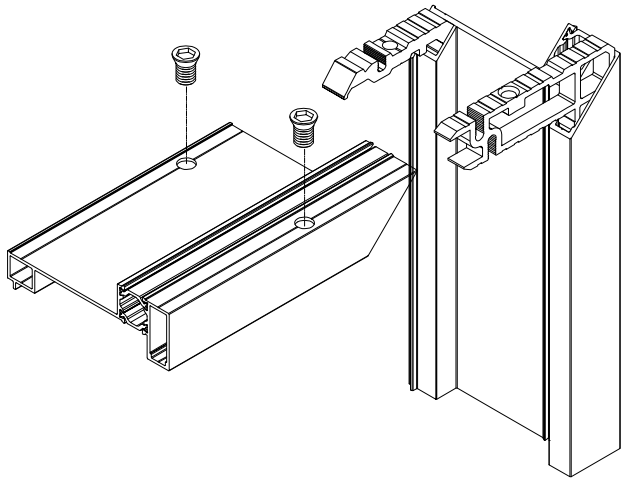


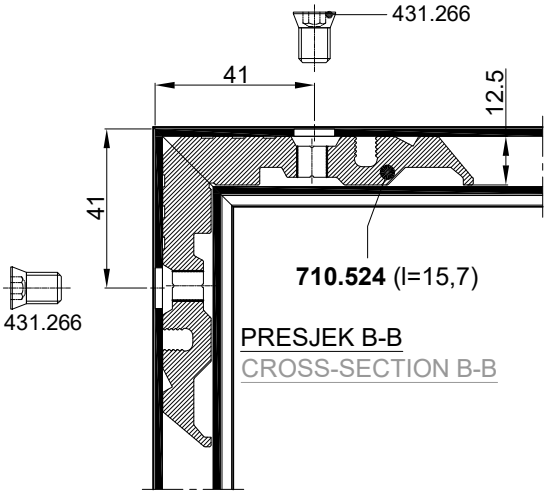

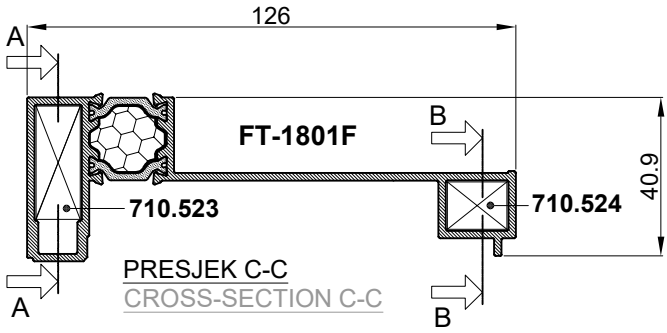


PRESJEK C-C
CROSS-SECTION C-C

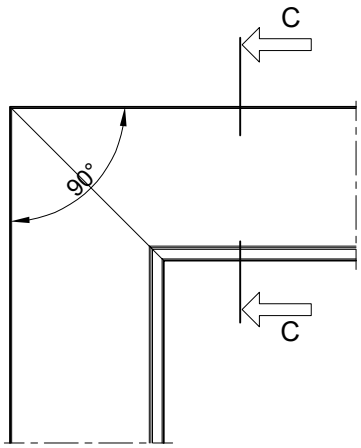


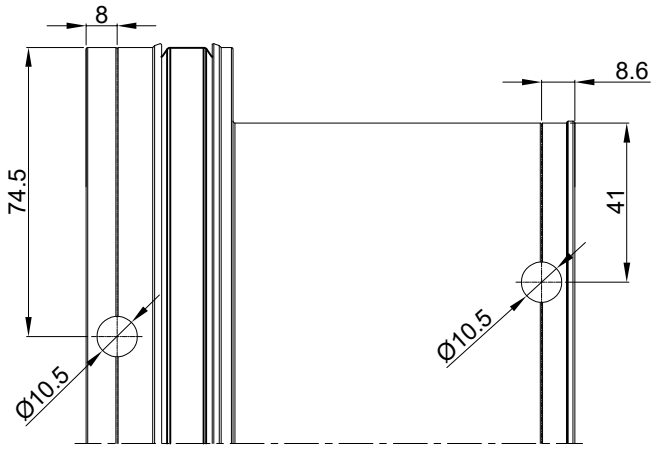


PRESJEK A-A
CROSS-SECTION A-A

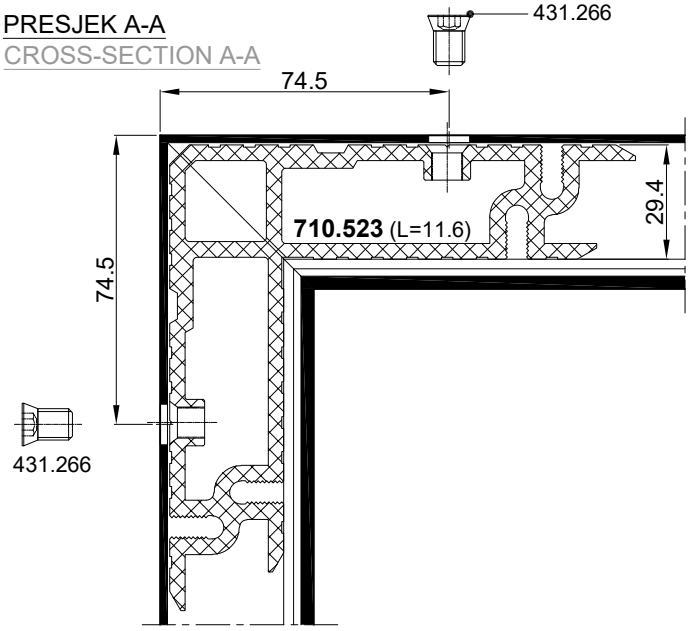


1. VIJČANA VEZA
1. SCREW CONNECTION

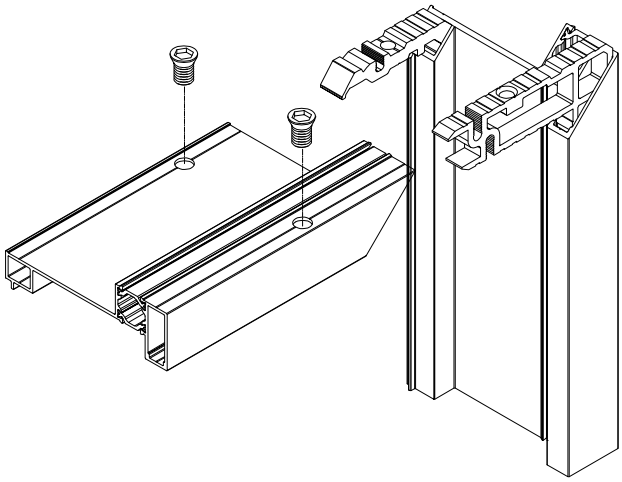


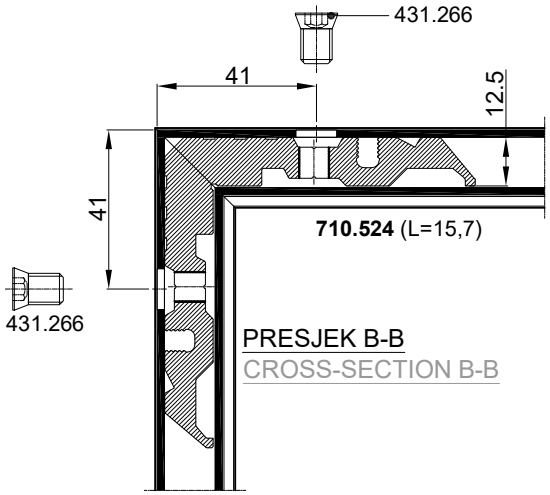


PRESJEK B-B
CROSS-SECTION B-B

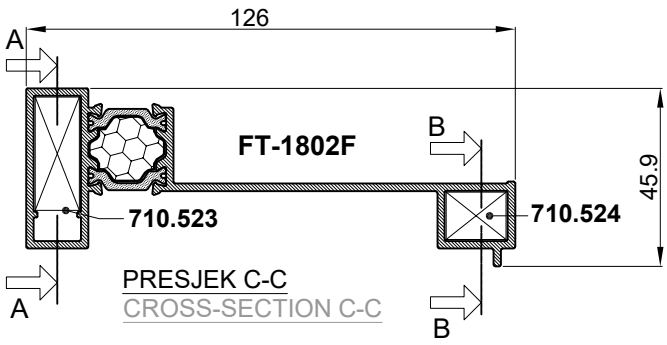


PRESJEK C-C
CROSS-SECTION C-C

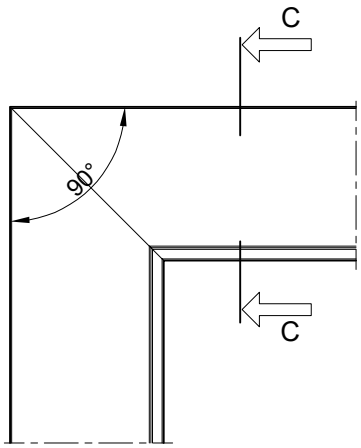


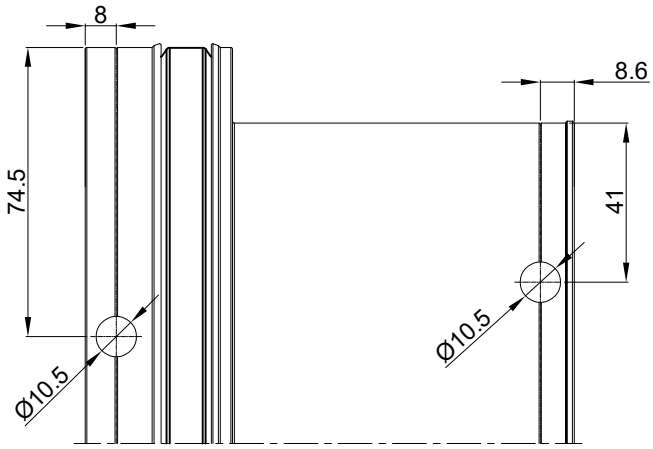


PRESJEK A-A
CROSS-SECTION A-A

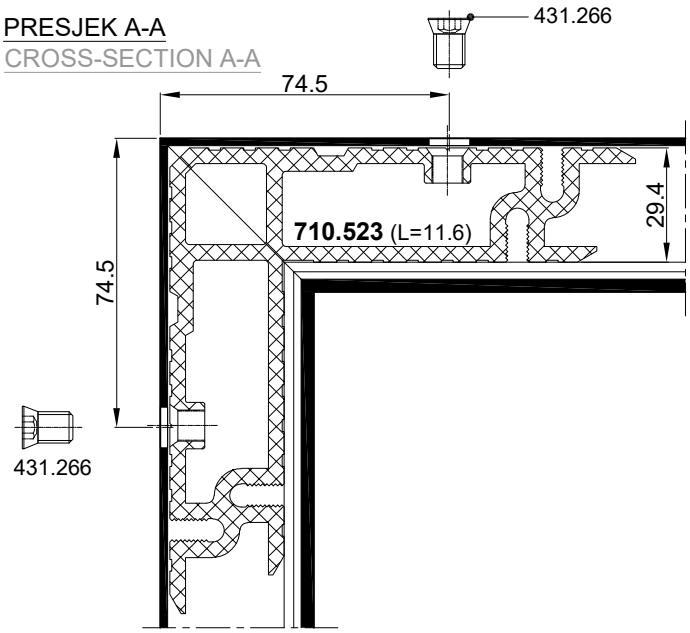

1. VIJČANA VEZA
1. SCREW CONNECTION

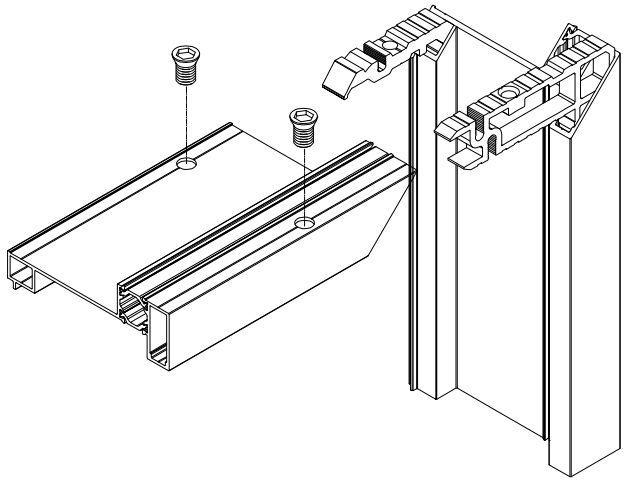


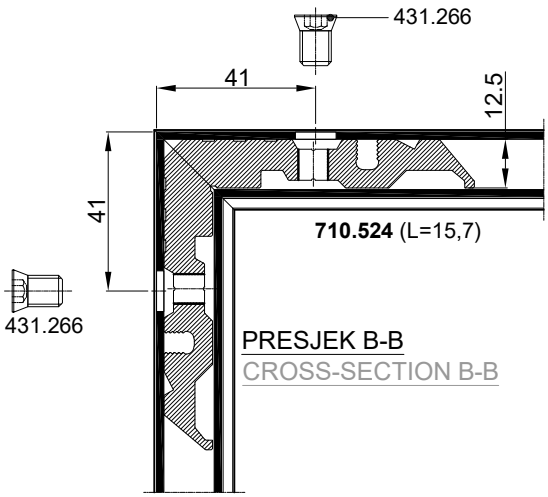


PRESJEK B-B
CROSS-SECTION B-B

- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION


PRESJEK C-C
CROSS SECTION C-C

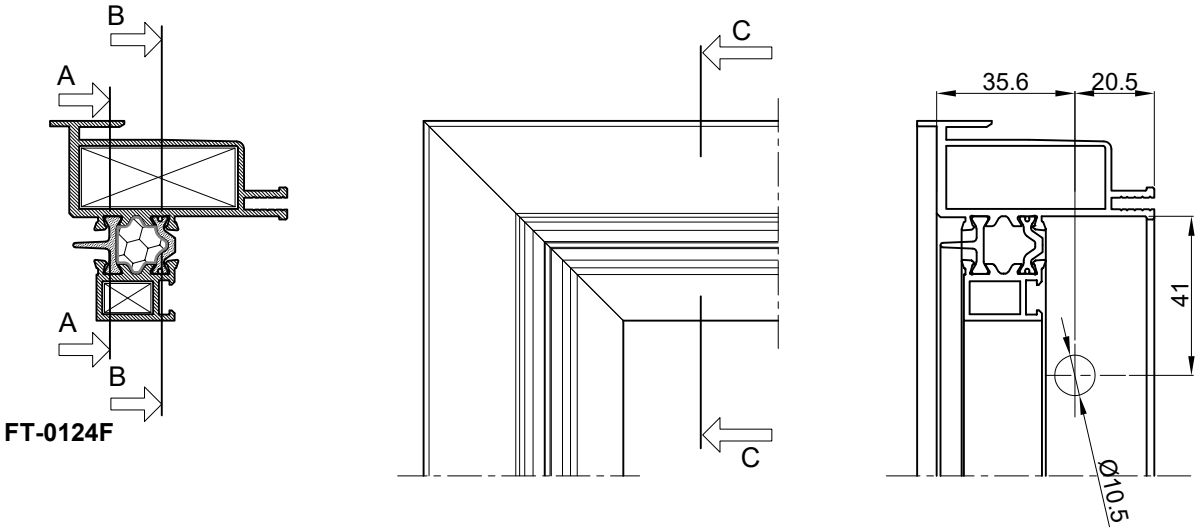


PRESJEK A-A
CROSS SECTION A-A

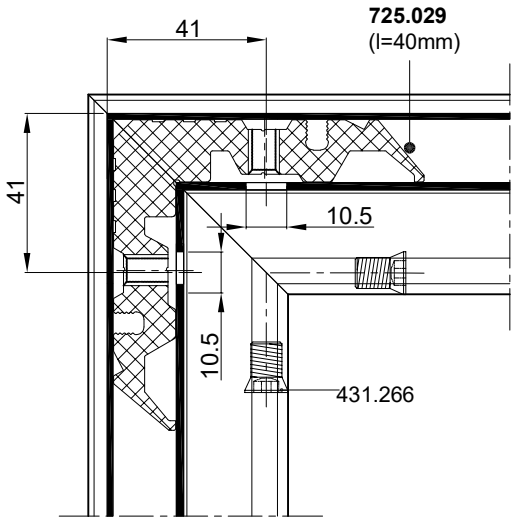


PRESJEK B-B
CROSS SECTION B-B

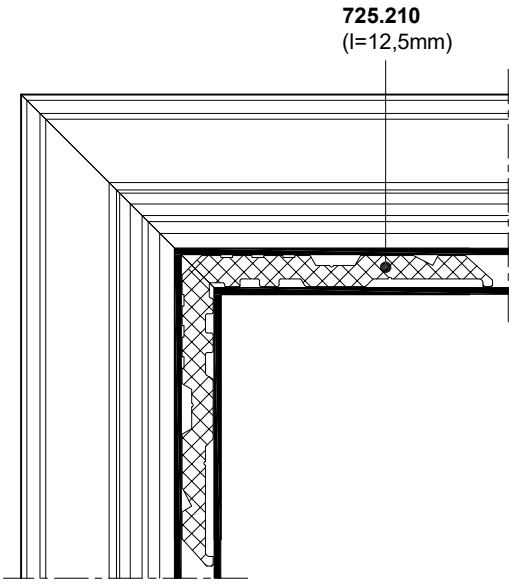

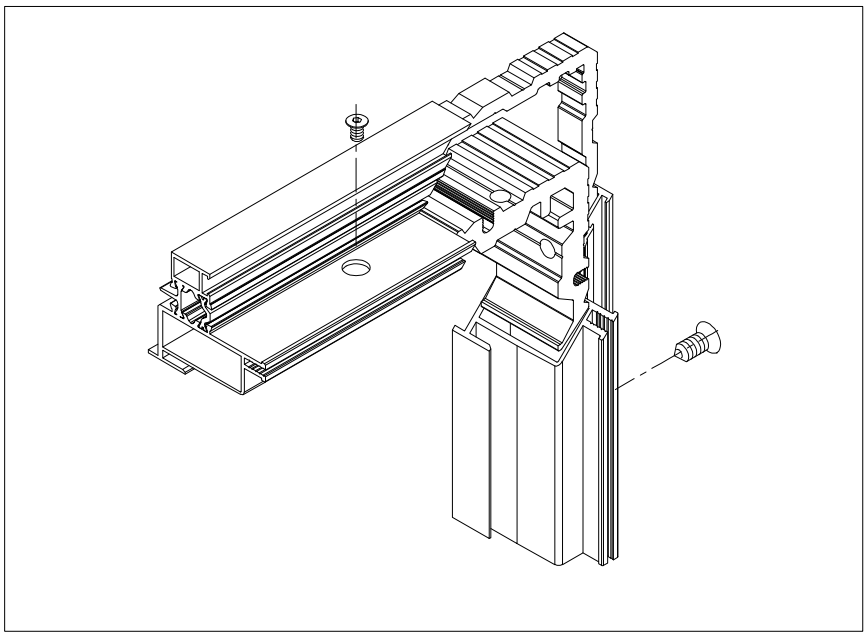



1. VIJČANA VEZA
1. SCREW CONNECTION

- VIJČANA VEZA PROFILA
- ALUMINIUM PROFILE SCREW CONNECTION

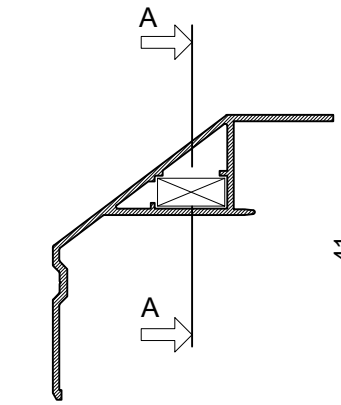


F-0796

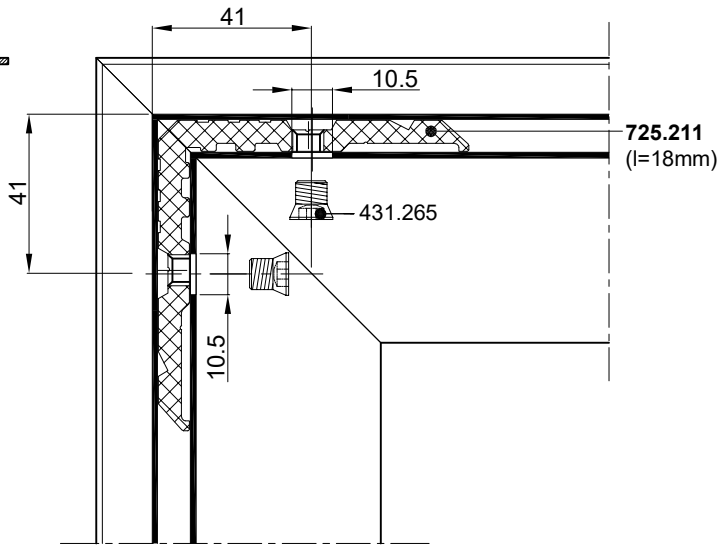

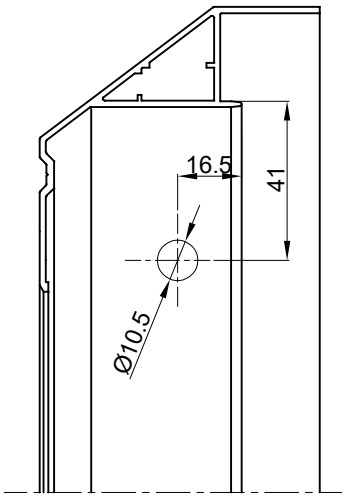



PRESJEK A-A
CROSS SECTION A-A

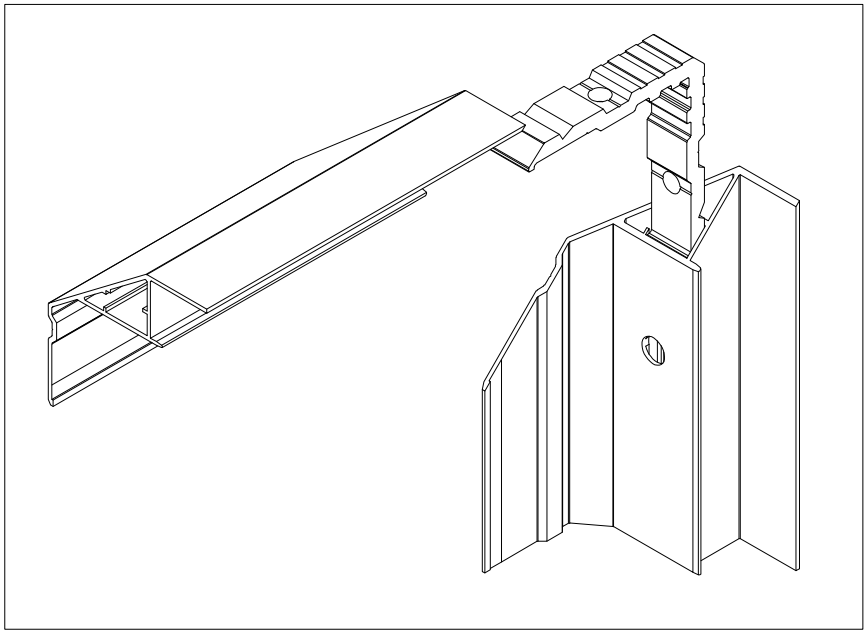


1. VIJČANA VEZA
1. SCREW CONNECTION


- Obrada profila (rama) FT-0125 za prihvat šarke
- Processing of profile (frame) FT-0125 for hinge installation

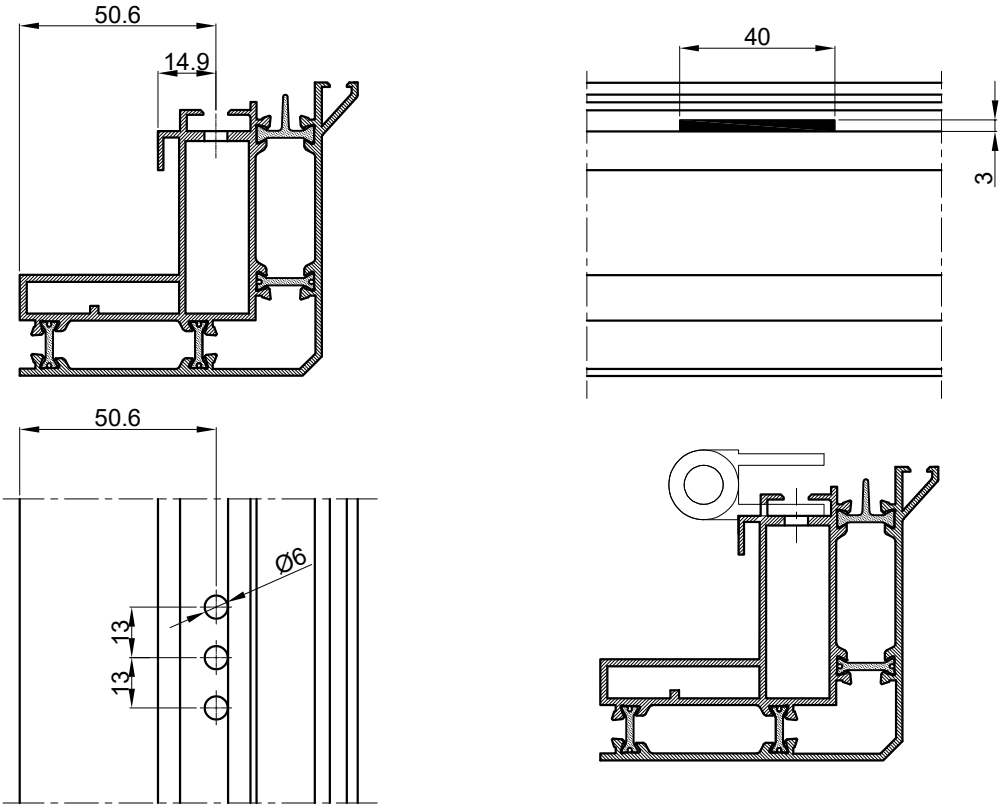

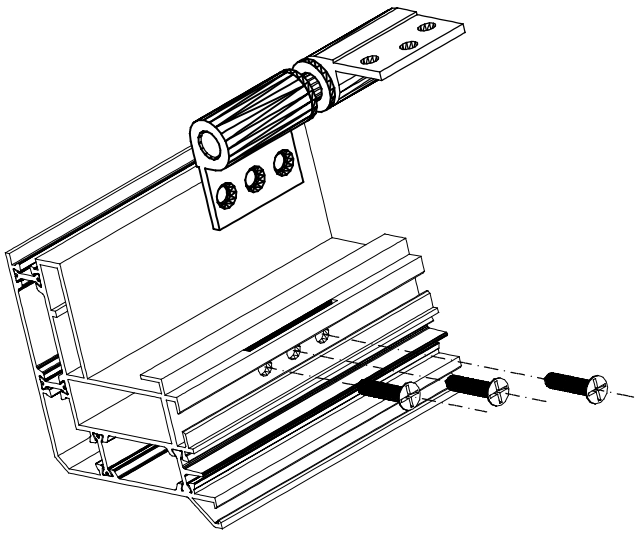



- Obrada profila (krilo) FT-0124 za prihvat šarke
- Processing of profile (sash) FT-0125 for hinge installation

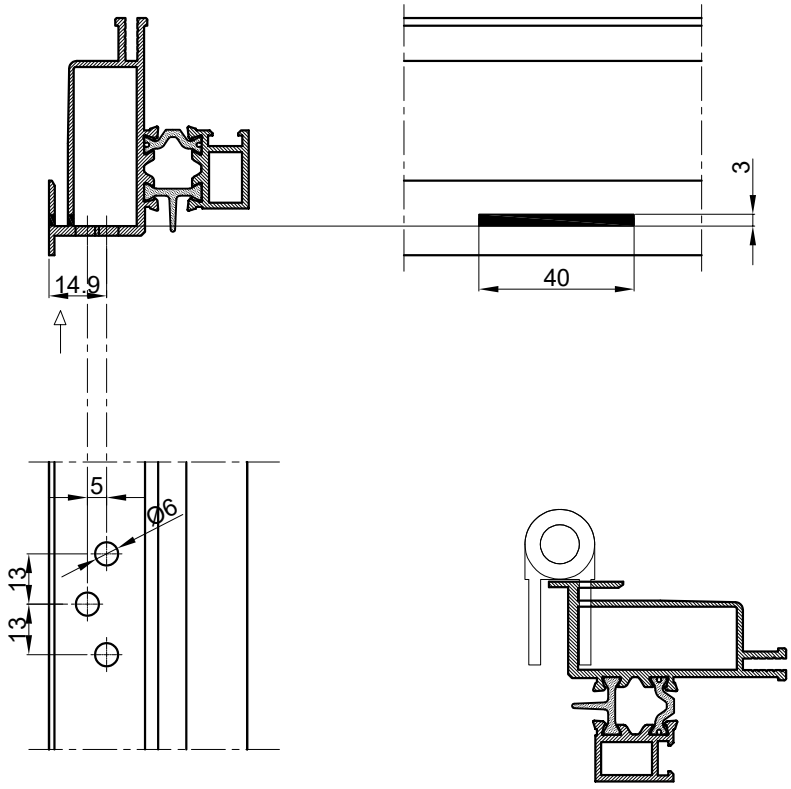

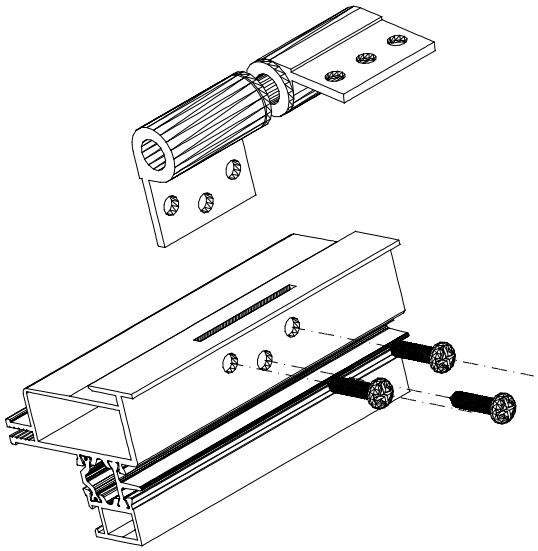

Obrada profila za ručku
Processing of profile for handle

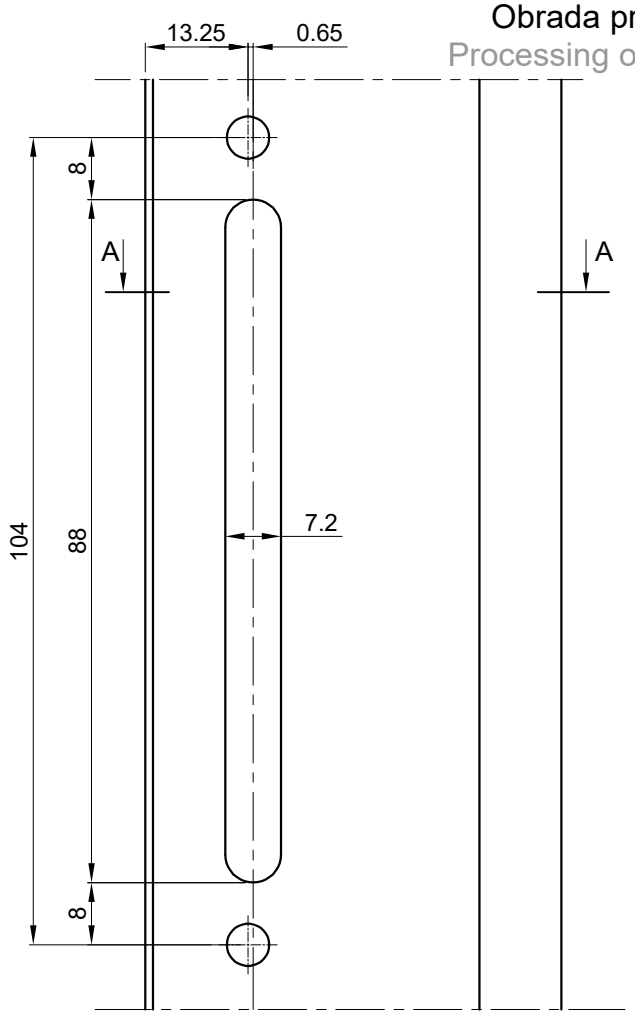


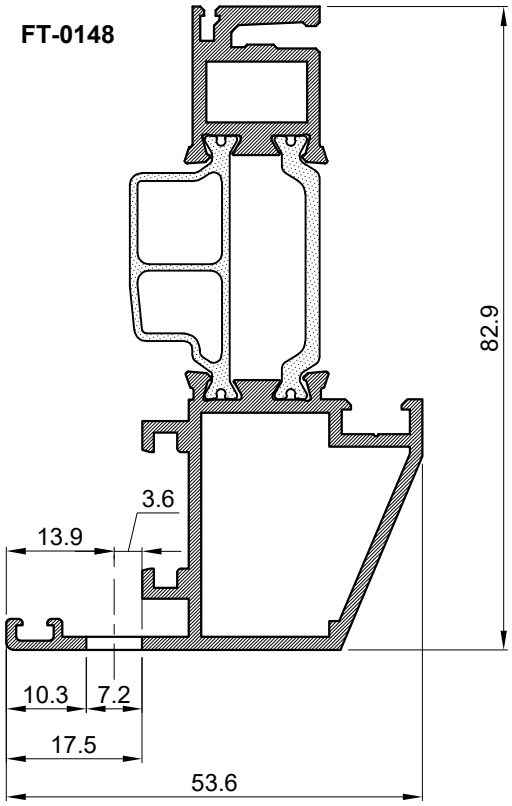

PRESJEK A-A
CROSS SECTION A-A

Za zaokretno i otklopno-zaokretno otvaranje
For turn and turn-tilt type of opening


FT-0126 pozicioniranje makaza u odnosu na ram
positioning of strays related to the frame

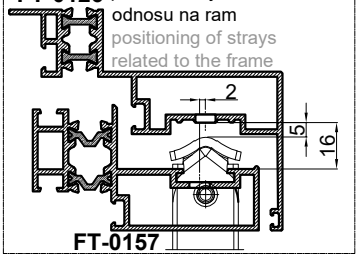

ugradnja fasadnih makaza Stublina 134.022
installation of friction stays Stublina 134.022

obrada krila za fasadne makaze Stublina 134.022 sash processing for friction stays Stublina 134.022

obrada rama za fasadne makaze Stublina 134.022 frame processing for friction stays Stublina 134.022

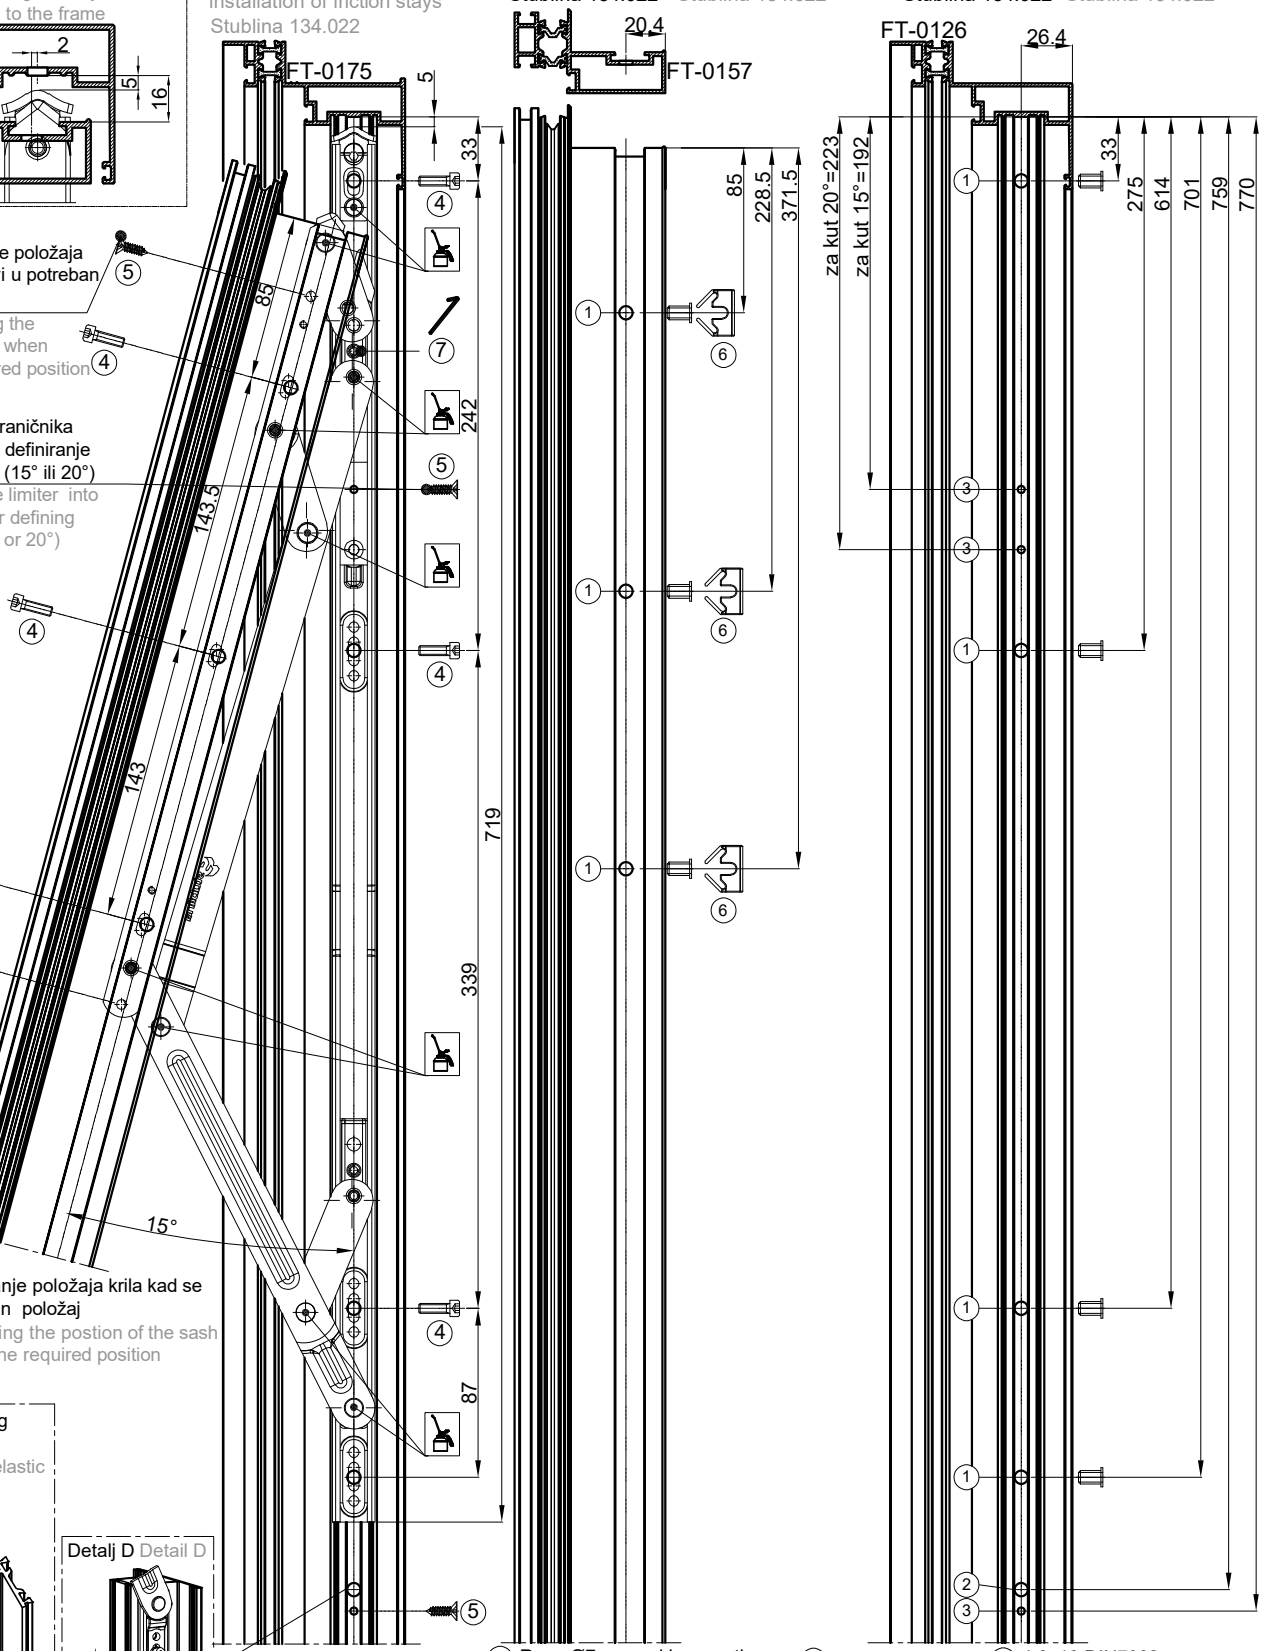


vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the position of the sash when it is set in the required position


vijak za fiksiranje graničnika u željeni položaj za definiranje kuta otvaranja krila (15° ili 20°)
screw for fixing the limiter into wanted position for defining opening angle (15° or 20°)

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the postion of the sash when it is set in the required position

ugradnja elastičnog distancera u krilo
installation of the elastic spacer in the sash

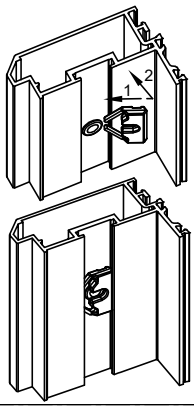

Detalj D Detail D



podešavanje makaza po visini (±5 mm) preko mehanizma za podešavanje
stray height adjustment (±5 mm) with adjustment mechanism

podmazivanje vršiti nakon 5000 otvaranja
to be greased after 5000 openings

① Rupa Ø7 - za zakivne matice M5 (M5x16 DIN 6912)
Hole Ø7 - for rivet nuts M5 (M5x16 DIN 6912)

② Rupa Ø7-za element za fino podešavanje
Hole Ø7-for fine adjustment element


③ Rupa Ø3.7 - za samourezujući vijak 4.8x16 DIN7982
Hole Ø3.7 - for selftapping screw 4.8x16 DIN7982

④ M5x16 DIN 6912 ⑤ 4.8x16 DIN7982


⑥ elastični distancer za krila sa žljebom
elastic spacer for sashes with the groove

⑦ povećanjem ili smanjenjem sile trenja omogućava se lakše ili teže otvaranje prozora. Vijak ne smije biti previše zategnut,ukoliko je jako zategnut prozor neće funkcionirati.
with friction force change one regulates the window closing force. Screw should not be screwed too tight, otherwise the window will not be able to open/close.

pozicioniranje makaza u odnosu na ram
positioning of strays related to the frame

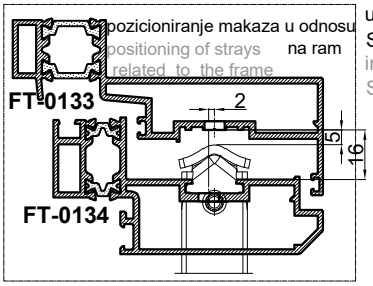

ugradnja fasadnih makaza Stublina 134.022
installation of friction stays Stublina 134.022

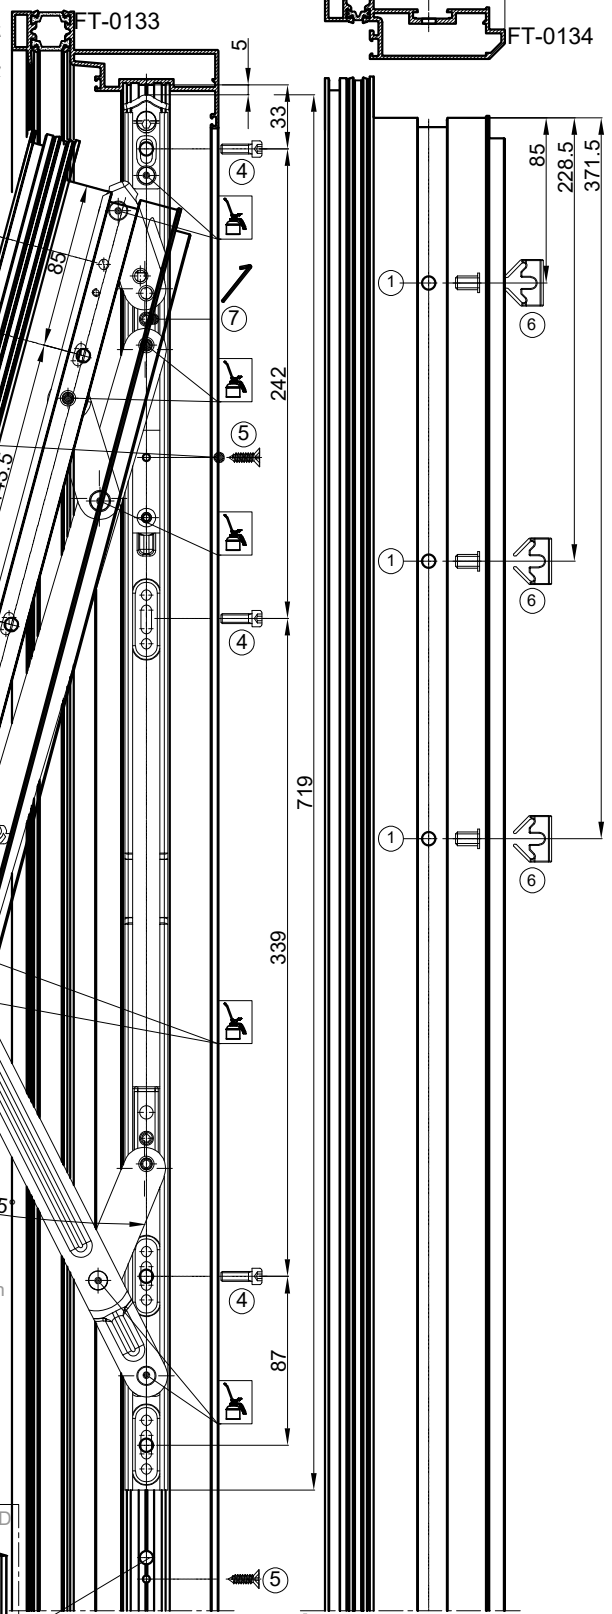


vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the position of the sash when it is set in the required position

vijak za fiksiranje graničnika u željeni položaj za definiranje kuta otvaranja krila (15° ili 20°)
screw for fixing the limiter into wanted position for defining opening angle (15° or 20°)


vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the postion of the sash when it is set in the required position

obrada krila za fasadne makaze Stublina 134.022
sash processing for friction stays Stublina 134.022


obrada rama za fasadne makaze Stublina 134.022
frame processing for friction stays Stublina 134.022

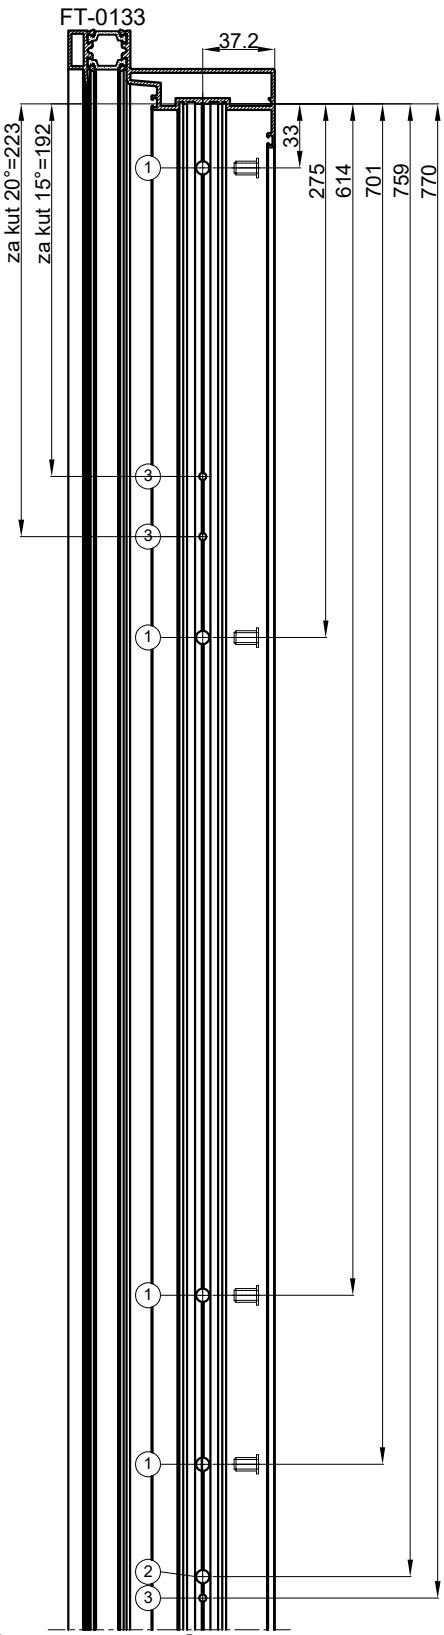

ugradnja elastičnog distancera u krilo
installation of the elastic spacer in the sash

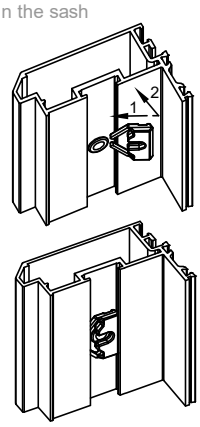

Detalj D Detail D

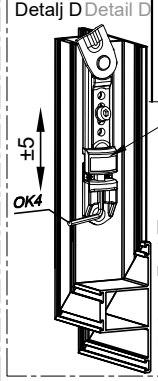

podmazivanje vršiti nakon 5000 otvaranja
to be greased after 5000 openings

podešavanje makaza po visini (±5 mm) preko mehanizma za podešavanje
stray height adjustment (±5 mm) with adjustment mechanism

① Rupa Ø7 - za zakivne matice M5 (M5x16 DIN 6912)
Hole Ø7 - for rivet nuts M5 (M5x16 DIN 6912)


② Rupa Ø7-za element za fino podešavanje
Hole Ø7-for fine adjustment element

③ Rupa Ø3.7 - za samourezujući vijak 4.8x16 DIN7982
Hole Ø3.7 - for selftapping screw 4.8x16 DIN7982

④ M5x16 DIN 6912 ⑤ 4.8x16 DIN7982

⑥ elastični distancer za krila sa žljebom
elastic spacer for sashes with the groove

⑦ povećanjem ili smanjenjem sile trenja omogućava se lakše ili teže otvaranje prozora. Vijak ne smije biti previše zategnut,ukoliko je jako zategnut prozor neće funkcionirati.
with friction force change one regulates the window closing force. Screw should not be screwed too tight, otherwise the window will not be able to opem/close.

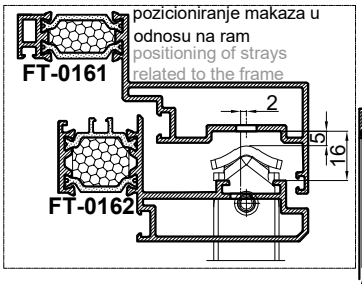

ugradnja fasadnih makaza Stublina 134.022
installation of friction stays Stublina 134.022

obrada krila za fasadne makaze Stublina 134.022
sash processing for friction stays Stublina 134.022


obrada rama za fasadne makaze Stublina 134.022
frame processing for friction stays Stublina 134.022

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the position of the sash when it is set in the required position


vijak za fiksiranje graničnika u željeni položaj za definiranje kuta otvaranja krila (15° ili 20°)
screw for fixing the limiter into wanted position for defining opening angle (15° or 20°)

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the postion of the sash when it is set in the required position

ugradnja elastičnog distancera u krilo
installation of the elastic spacer in the sash

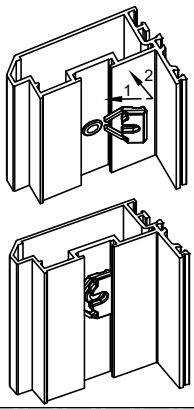

Detalj D Detail D

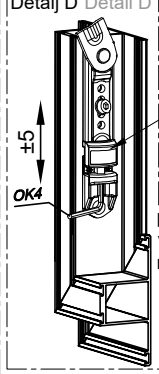

podmazivanje vršiti nakon 5000 otvaranja
to be greased after 5000 openings

podešavanje makaza po visini (±5 mm) preko mehanizma za podešavanje
stray height adjustment (±5 mm) with adjustment mechanism

① Rupa Ø7 - za zakivne matice M5 (M5x16 DIN 6912)
Hole Ø7 - for rivet nuts M5 (M5x16 DIN 6912)


② Rupa Ø7-za element za fino podešavanje
Hole Ø7-for fine adjustment element

③ Rupa Ø3.7 - za samourezujući vijak 4.8x16 DIN7982
Hole Ø3.7 - for selftapping screw 4.8x16 DIN7982

④ M5x16 DIN 6912 ⑤ 4.8x16 DIN7982

⑥ elastični distancer za krila sa žljebom
elastic spacer for sashes with the groove

⑦ povećanjem ili smanjenjem sile trenja omogućava se lakše ili teže otvaranje prozora. Vijak ne smije biti previše zategnut,ukoliko je jako zategnut prozor neće funkcionirati.
with friction force change one regulates the window closing force. Screw should not be screwed too tight, otherwise the window will not be able to open/close.

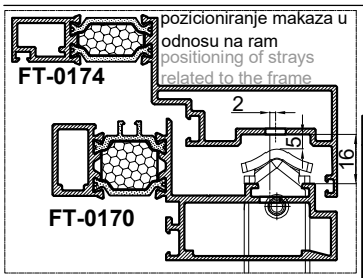

obrada krila za fasadne makaze Stublina 134.022 sash processing for friction stays Stublina 134.022


obrada rama za fasadne makaze Stublina 134.022 frame processing for friction stays Stublina 134.022

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the position of the sash when it is set in the required position


vijak za fiksiranje graničnika u željeni položaj za definiranje kuta otvaranja krila (15° ili 20°)
screw for fixing the limiter into wanted position for defining opening angle (15° or 20°)

vijci za osiguravanje položaja krila kad se postavi u potreban položaj
screws for securing the postion of the sash when it is set in the required position

ugradnja elastičnog distancera u krilo
installation of the elastic spacer in the sash

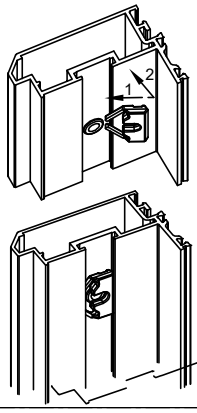

Detalj D Detail D



podmazivanje vršiti nakon 5000 otvaranja
to be greased after 5000 openings

podešavanje makaza po visini (±5 mm) preko mehanizma za podešavanje
stray height adjustment (±5 mm) with adjustment mechanism

① Rupa Ø7 - za zakivne matice M5 (M5x16 DIN 6912)
Hole Ø7 - for rivet nuts M5 (M5x16 DIN 6912)


② Rupa Ø7-za element za fino podešavanje
Hole Ø7-for fine adjustment element

③ Rupa Ø3.7 - za samourezujući vijak 4.8x16 DIN7982
Hole Ø3.7 - for selftapping screw 4.8x16 DIN7982


④ M5x16 DIN 6912 ⑤ 4.8x16 DIN7982


⑥ elastični distancer za krila sa žljebom
elastic spacer for sashes with the groove

⑦ povećanjem ili smanjenjem sile trenja omogućava se lakše ili teže otvaranje prozora. Vijak ne smije biti previše zategnut,ukoliko je jako zategnut prozor neće funkcionirati.
with friction force change one regulates the window closing force. Screw should not be screwed too tight, otherwise the window will not be able to open/close.

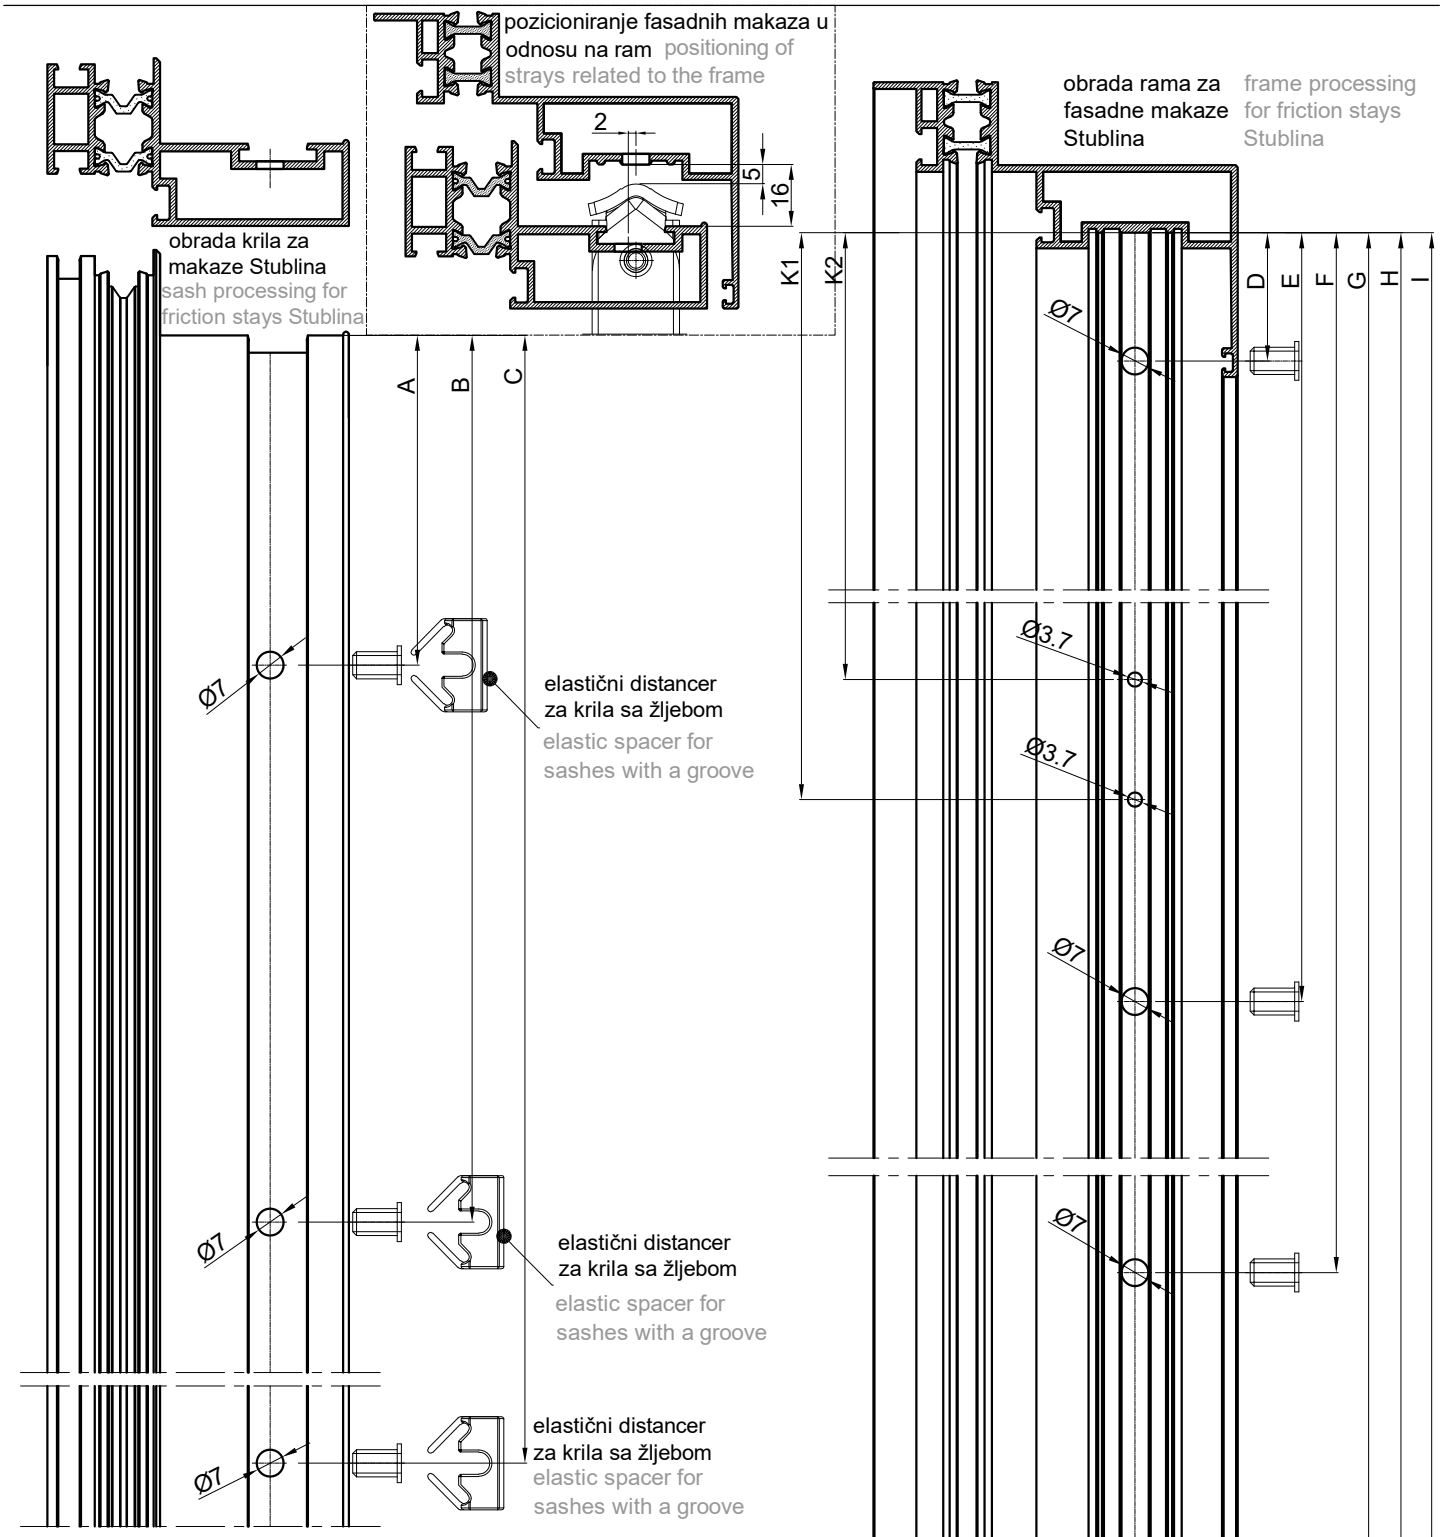



	Tip makaza Type of friction stays							
	134.019		134.020		134.021		134.022	
KUT OTVARANJA KRILA SASH OPENING ANGLE	25°	30°	20°	25°	15°	20°	15°	20°
A (mm)	85		85		85		85	
B (mm)	-		-		-		228.5	
C (mm)	155.5		235.5		302.5		371.5	
D (mm)	33		33		33		33	
E (mm)	235		258		258		275	
F (mm)	314		414		514		614	
G (mm)	401		501		601		701	
H (mm)	459		559		659		759	
I (mm)	470		570		670		770	
K1 (mm)		182		206		205		223
K2 (mm)	165		180		181		192	

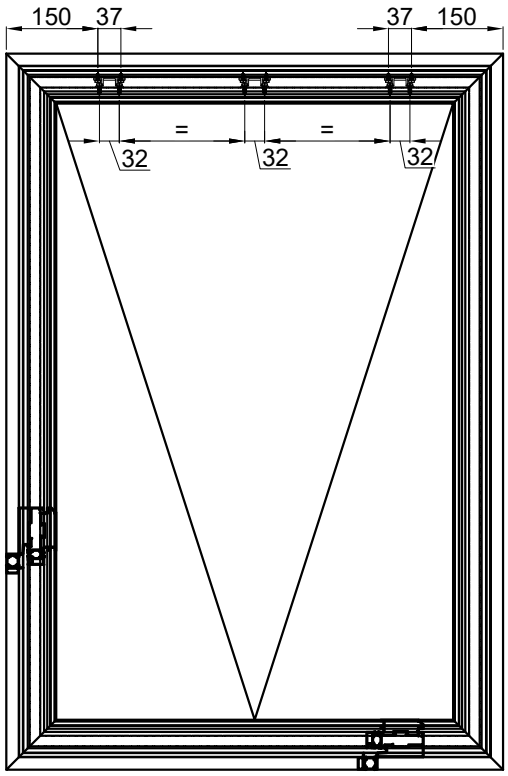


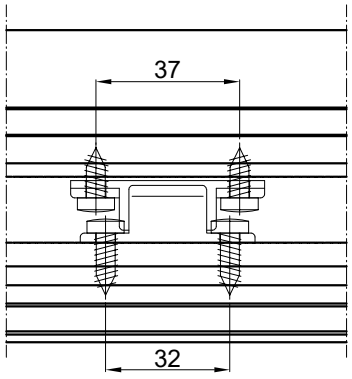



RAM FRAME	KRILO SASH	PASIVNO KLJUČANJE PASSIV LOCKING
FT-0133	FT-0134	132.016
FT-0173	FT-0162	132.016
FT-0174	FT-0170	132.016
FT-0126	FT-0157	132.016
FT-0161	FT-0162	132.016
FT-0169	FT-0170	132.016

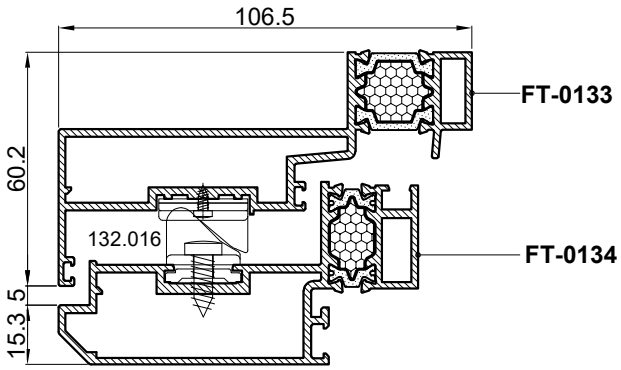


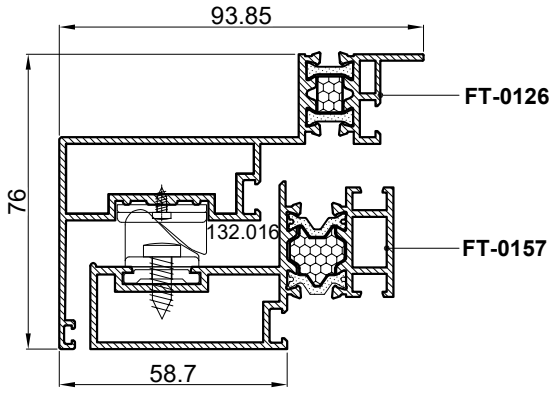


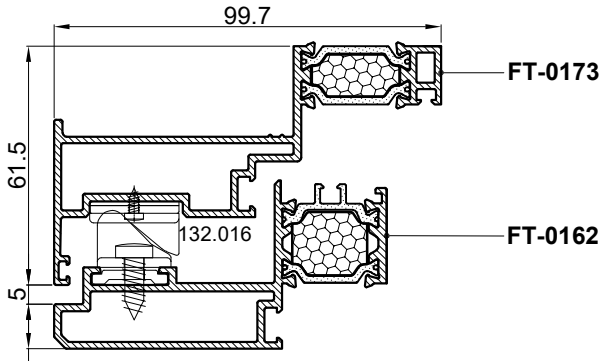


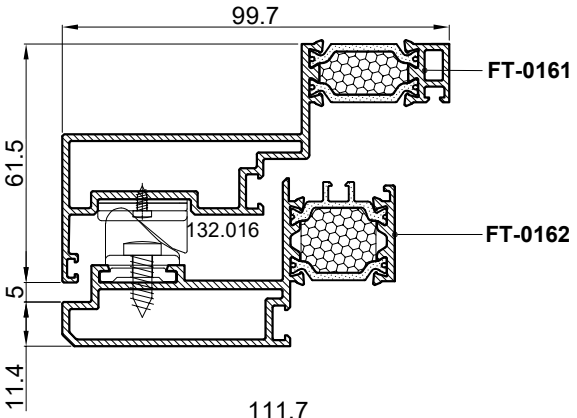

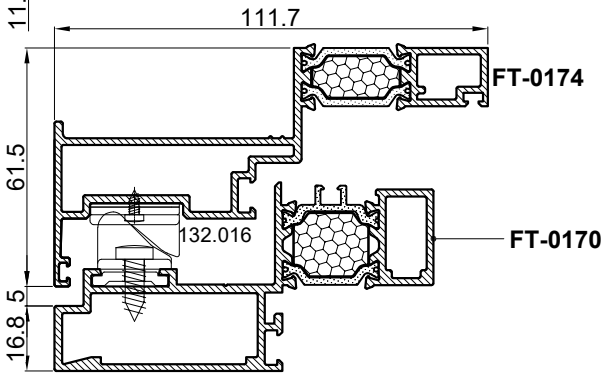

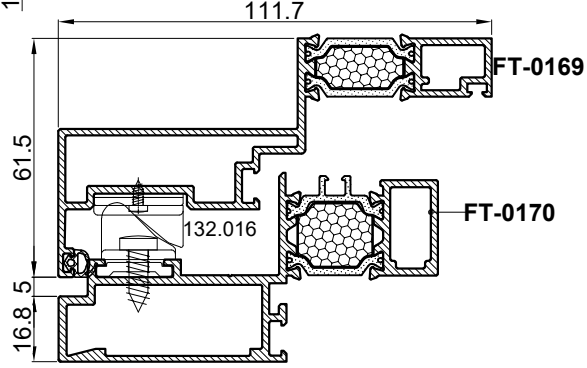

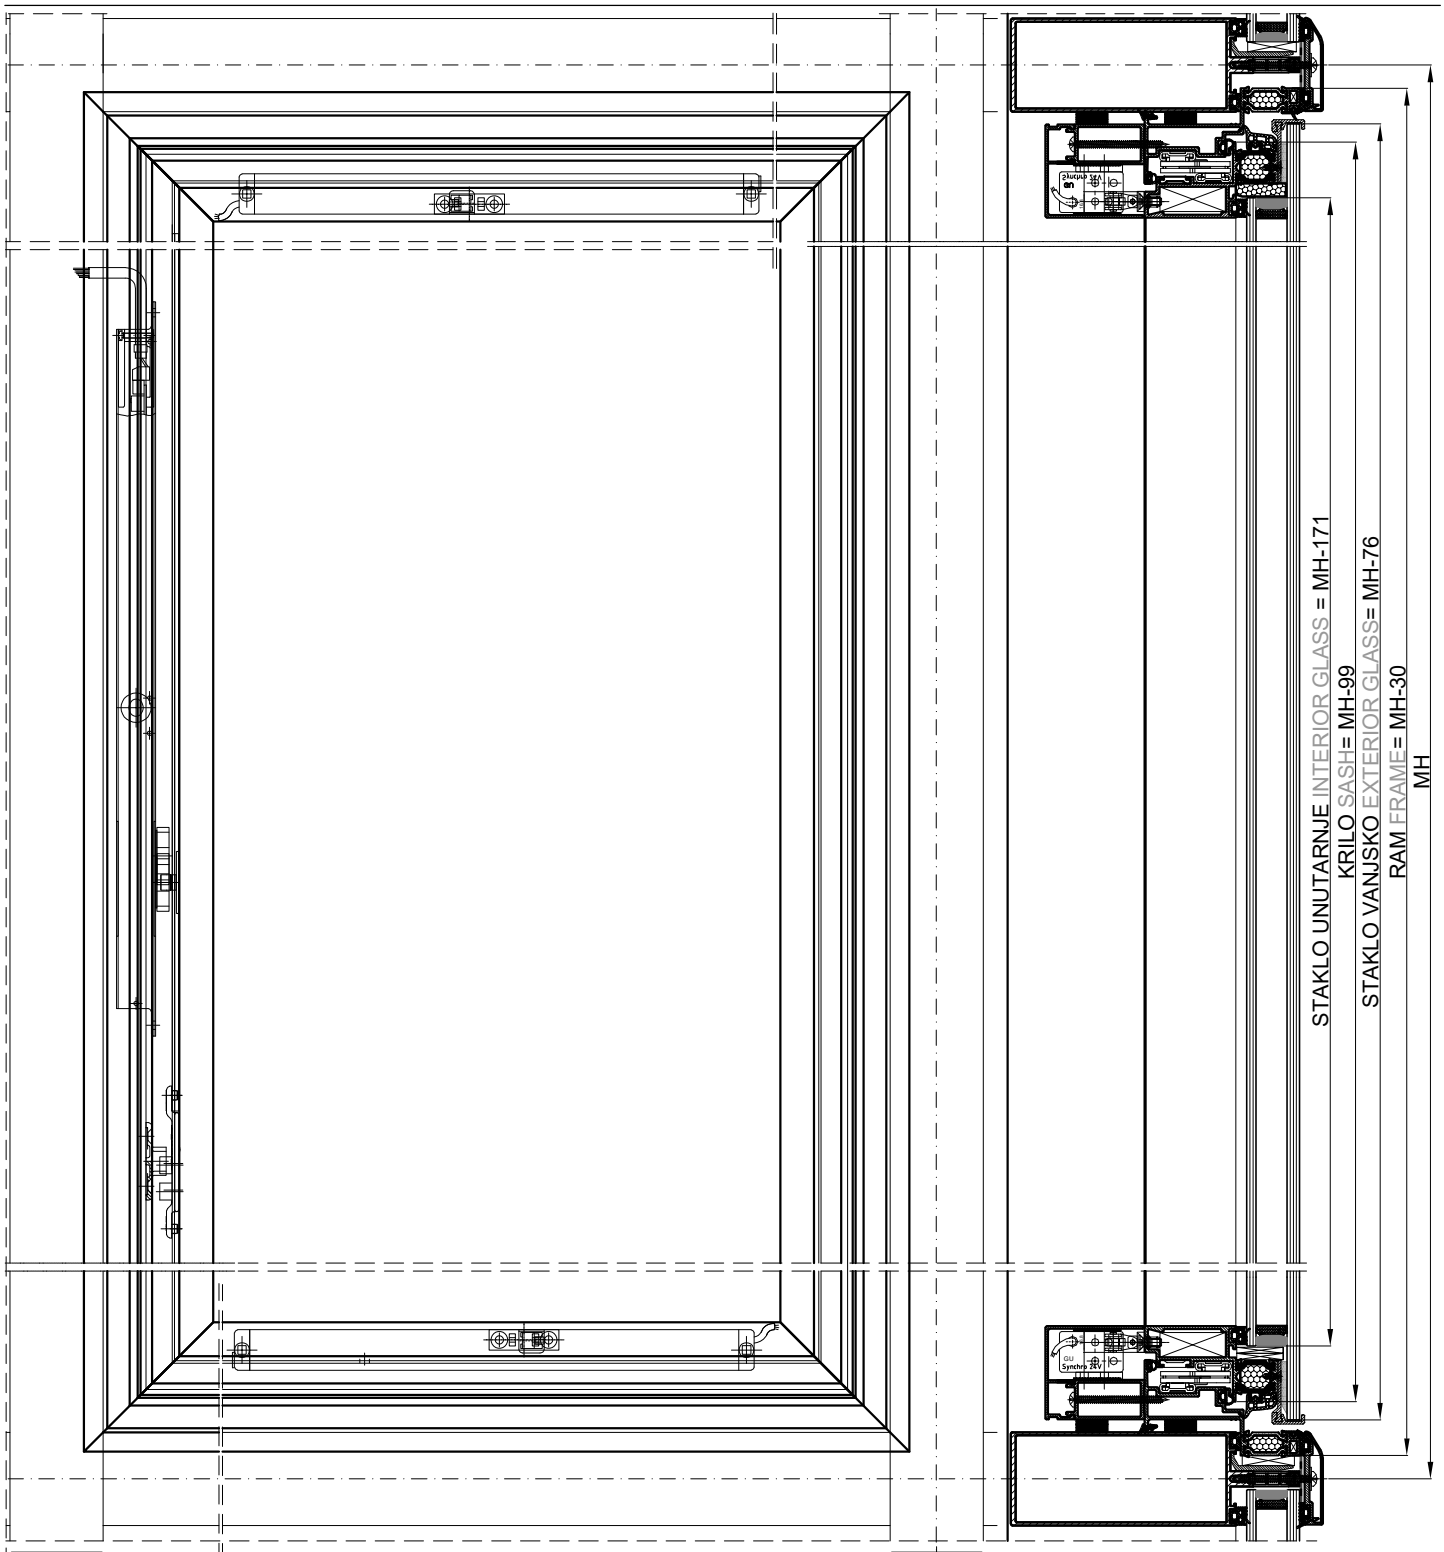


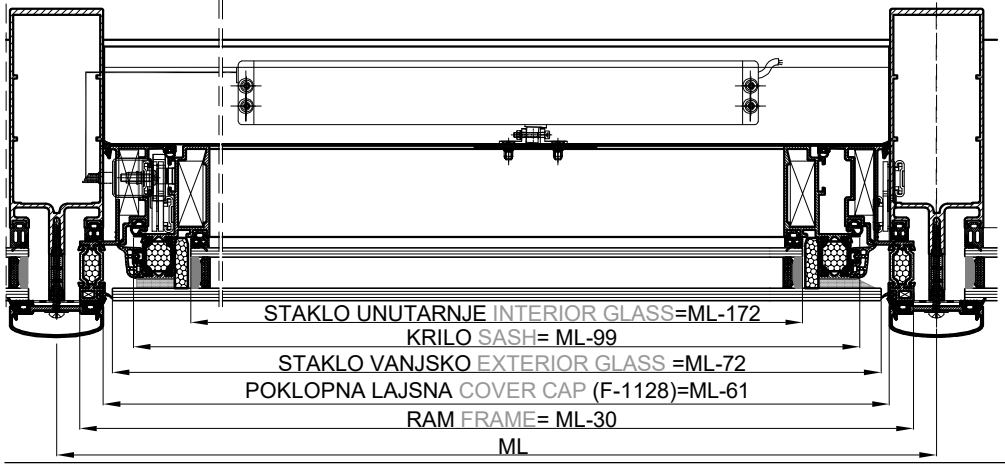

Izračun dimenzija
- RAM FT-0173
- KRILO FT-0164

Cutting list
- FRAME FT-0173
- SASH FT-0164

- Obrada lijeve okomice za motor za zaključavanje G-U VA 25
- Processing of left mullion for locking motor G-U VA 25

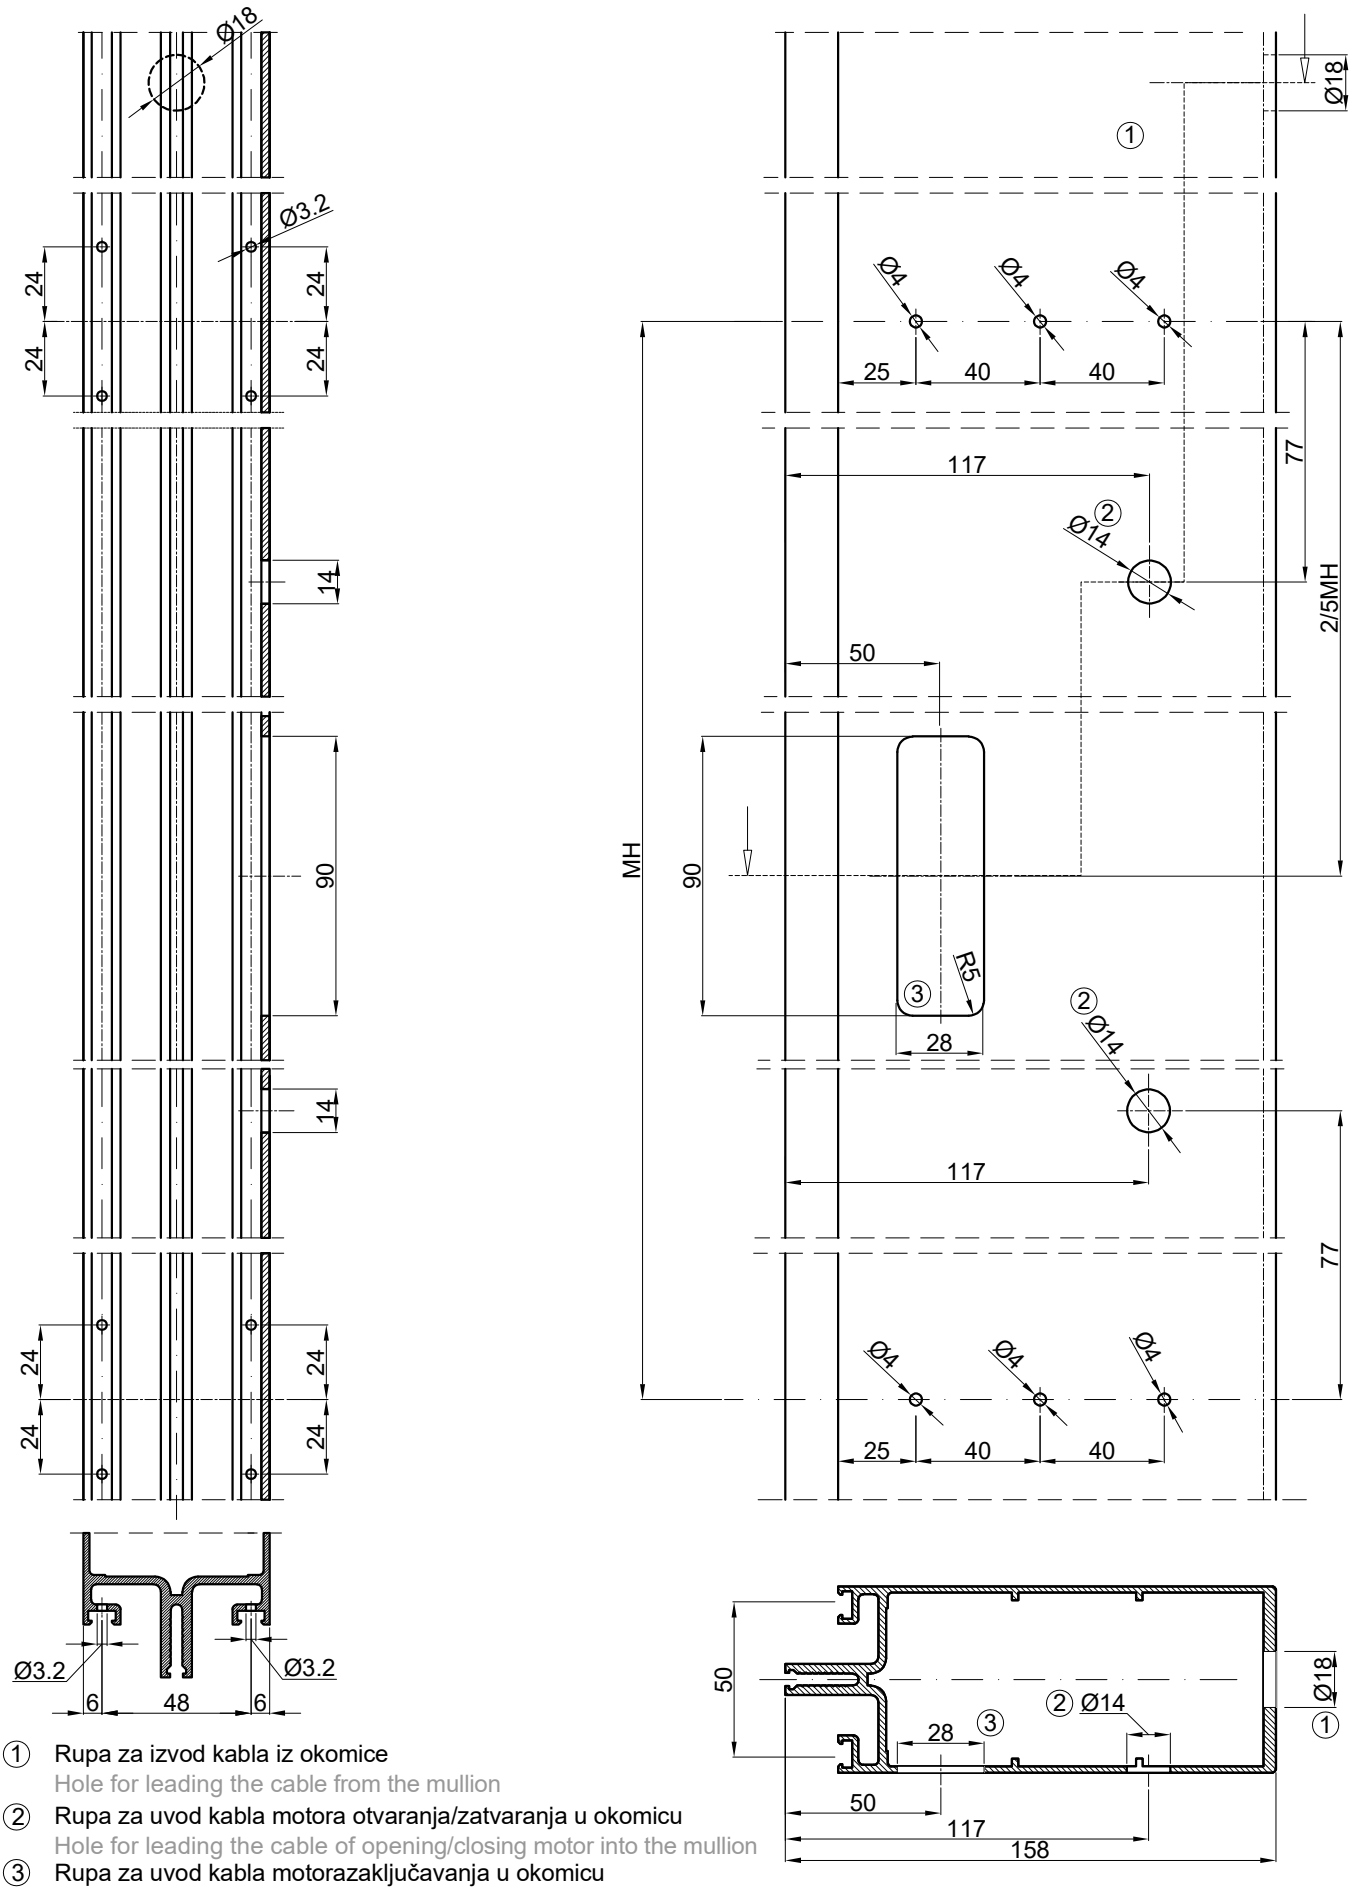


① Rupa za izvod kabla iz okomice
Hole for leading the cable from the mullion


② Rupa za uvod kabla motora otvaranja/zatvaranja u okomicu
Hole for leading the cable of opening/closing motor into the mullion

③ Rupa za uvod kabla motorazaključavanja u okomicu
Hole for leading the cable of the locking motor in the mullion

- Obrada lijeve okomice rama FT-161 za prihvat motora za zaključavanje G-U VA 25
- Processing of left vertical frame FT-161 for landing of the locking motor G-U VA 25

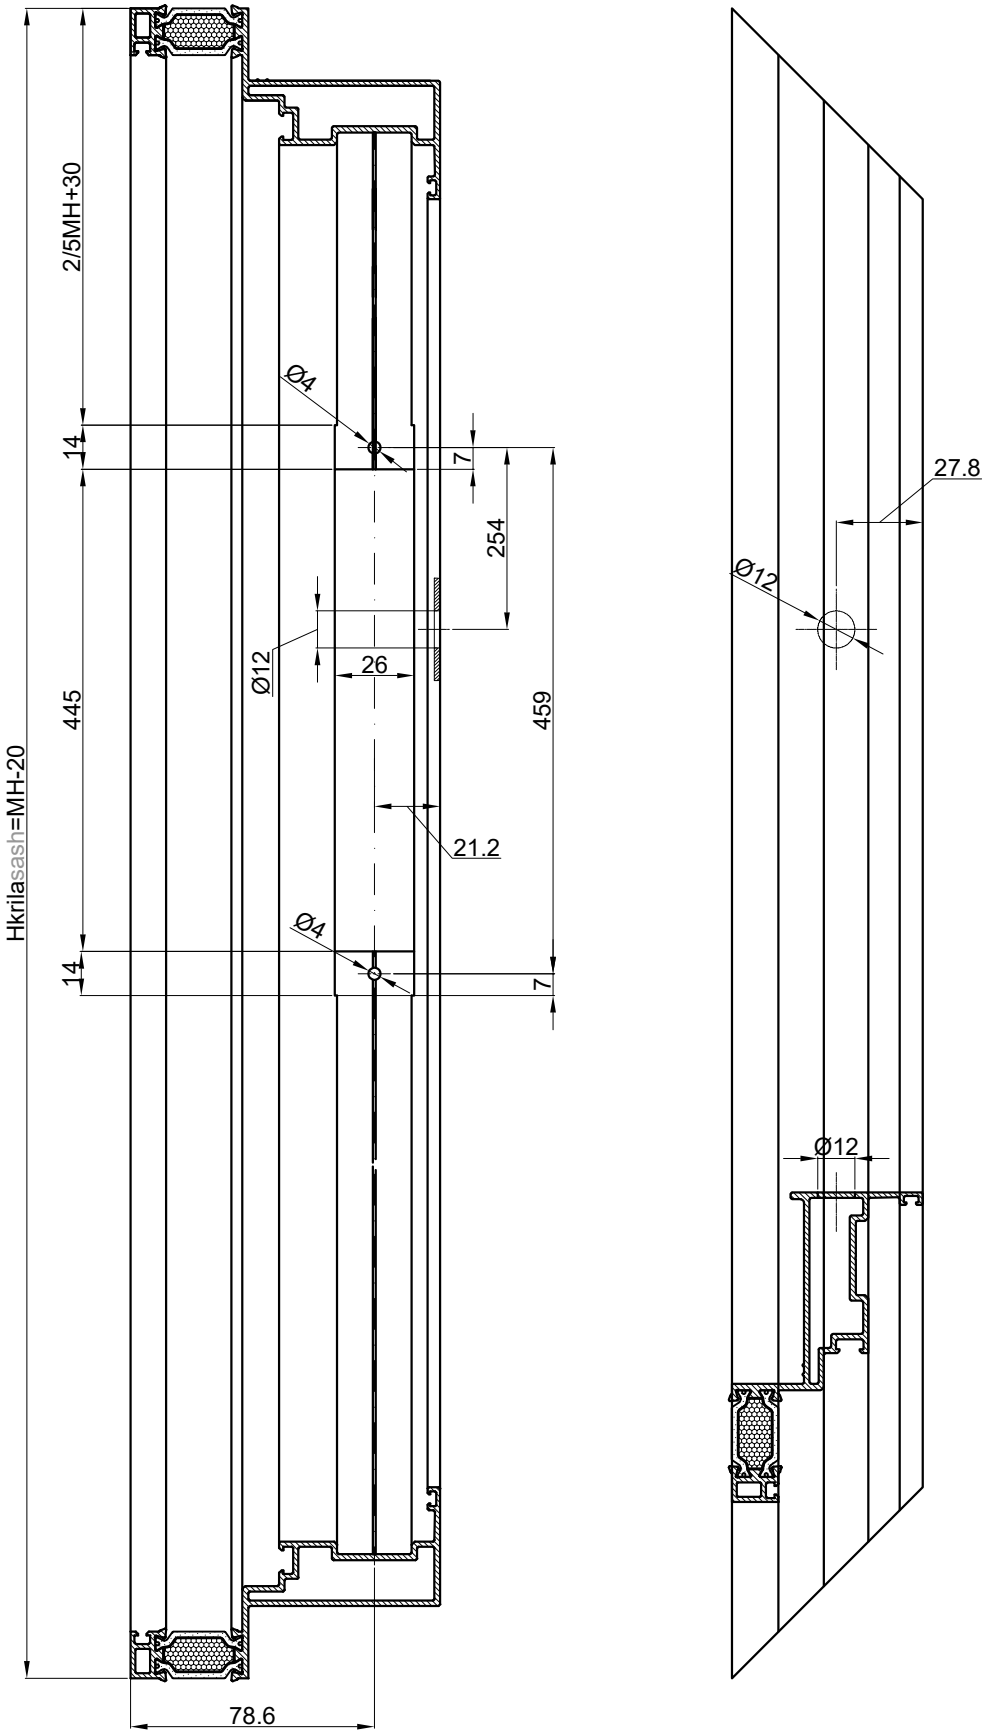


Obrada vodoravnica krila FT-164
Processing of horizontal sash profiles FT-164

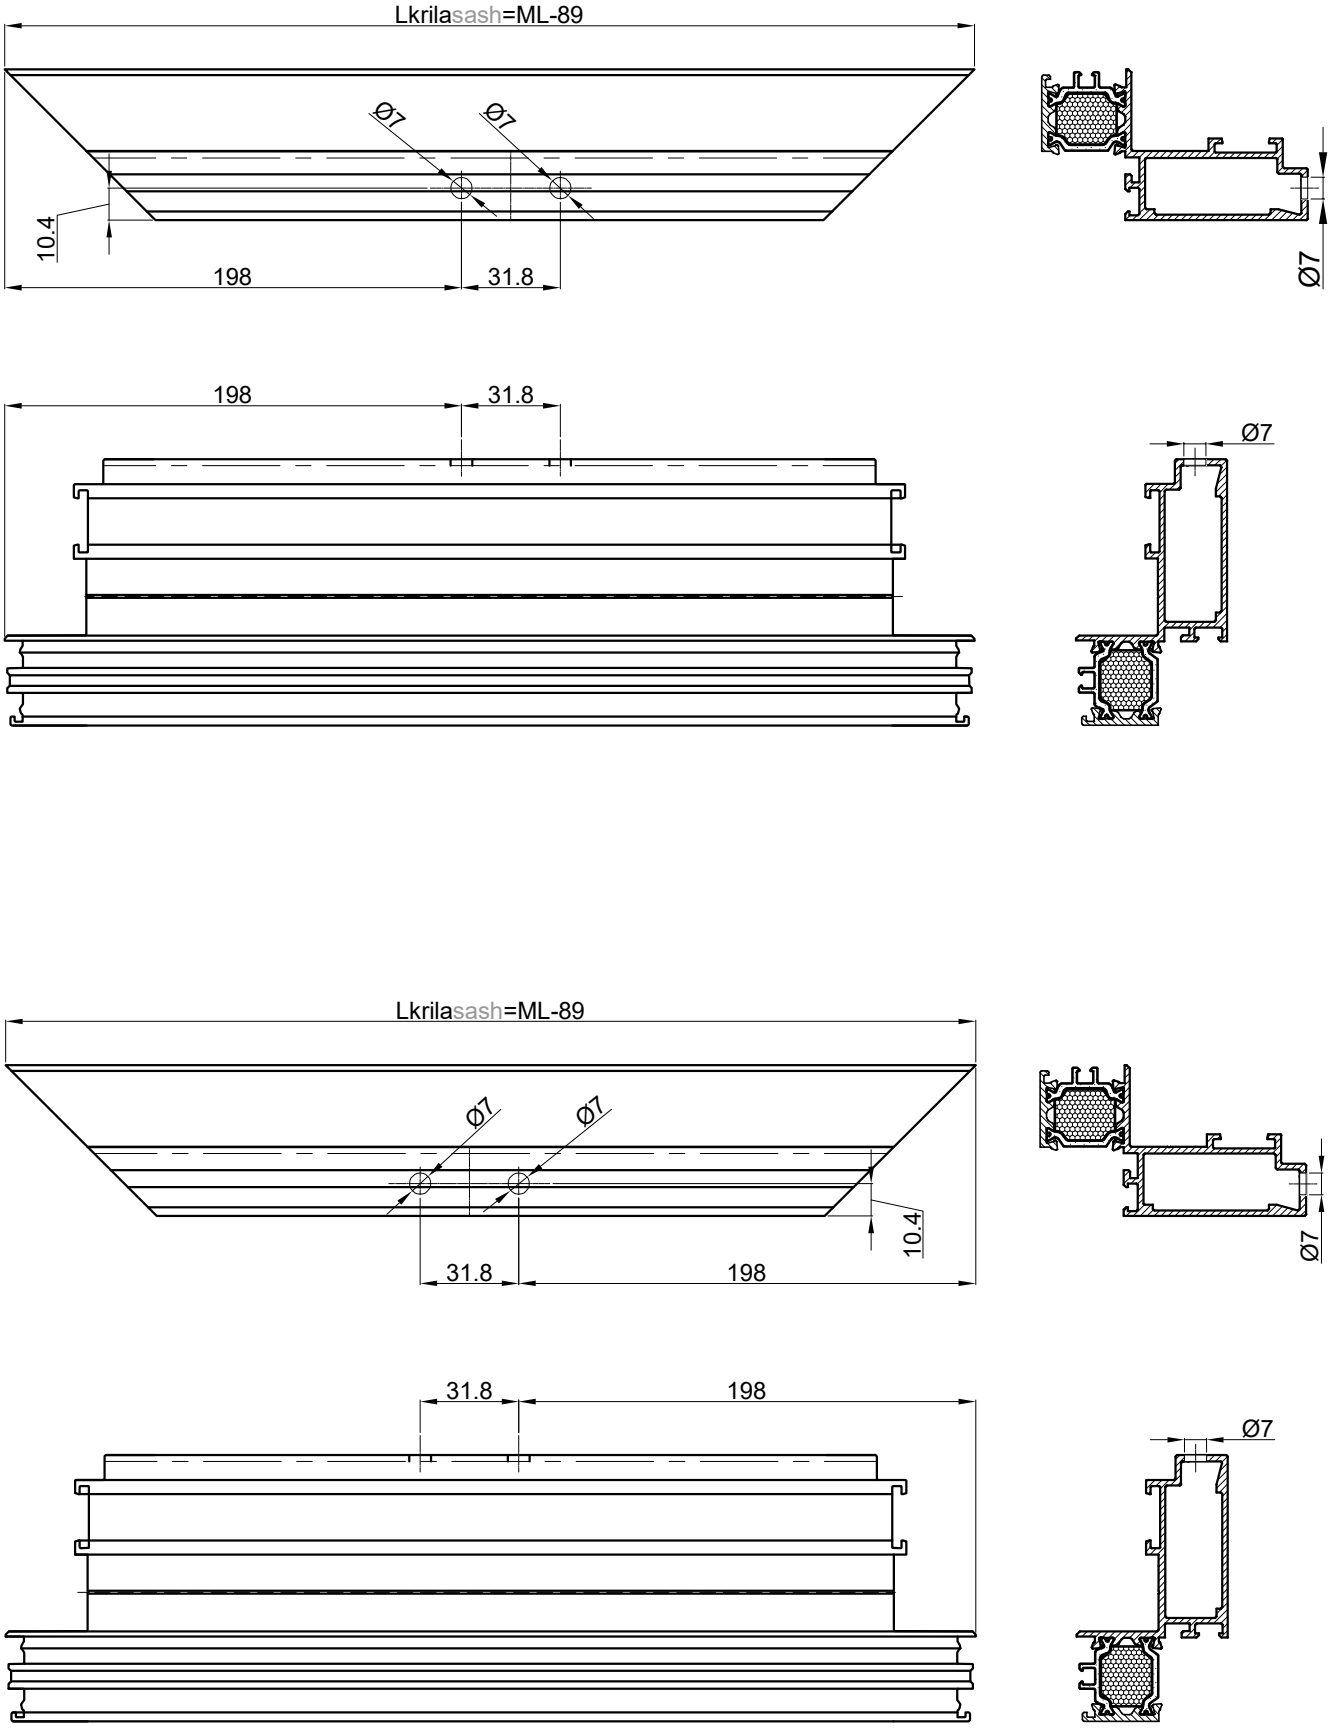



Obrada nosača F-1129 za motora K 20/25 300 mm
Processing of support profile F-1129 for K 20/25 300 mm


Nosač F-1129 gore
Support profile F-1129 up



Nosač F-1129 dolje
Support profile F-1129 down



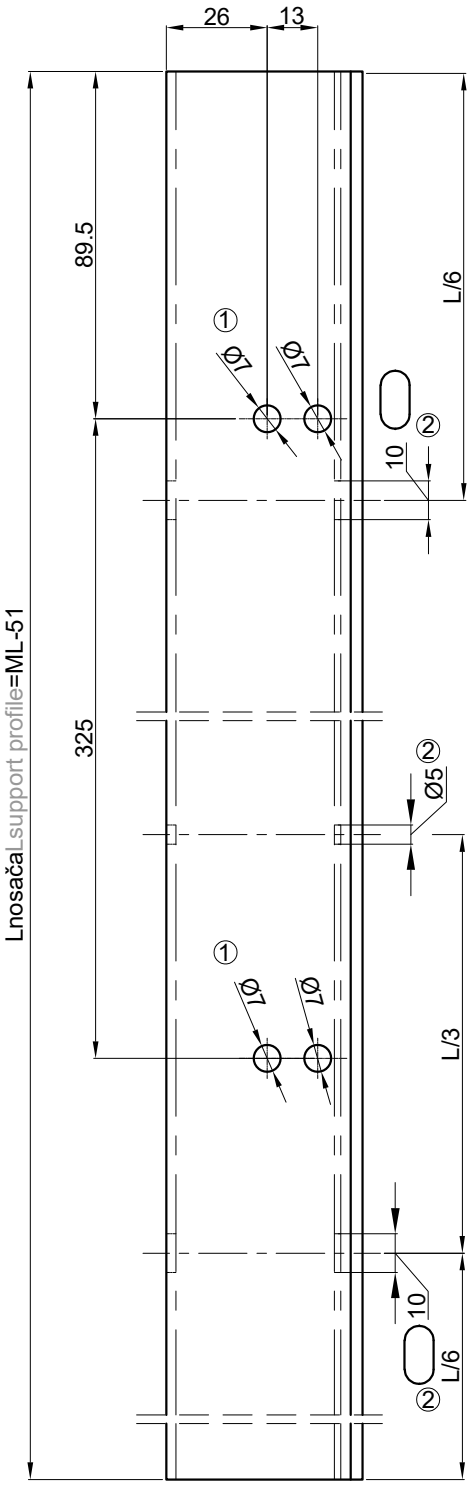

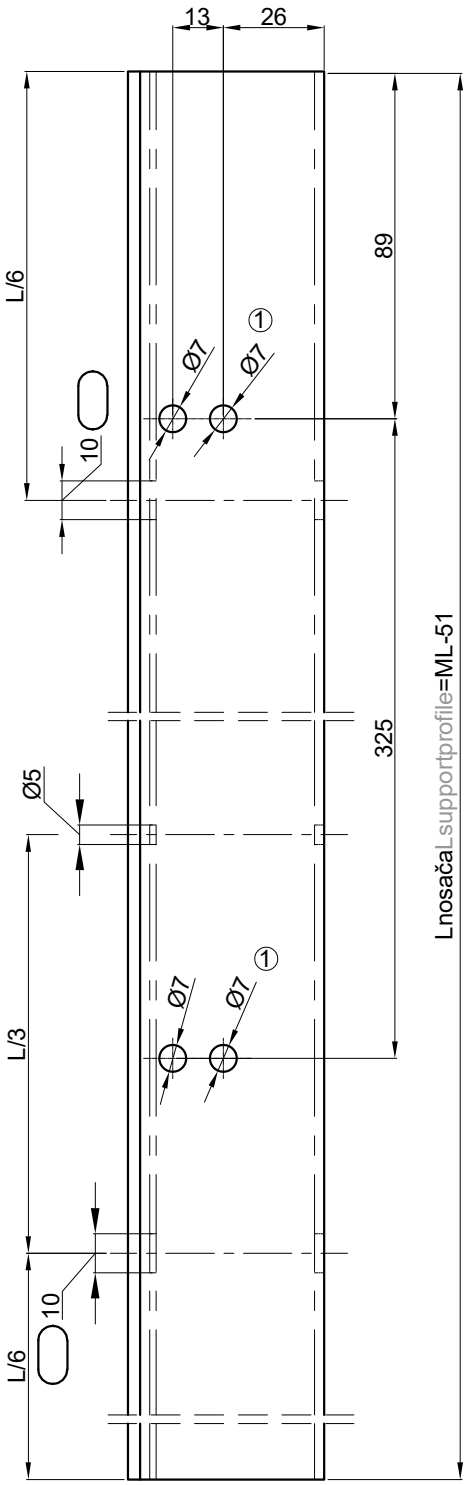


① Ø7 Rupa za fiksiranje motora na nosač
Ø7 Hole for fixing the profile on the support profile


② Ø5 Rupa za spoj nosača na ram FT-0173
Ø5 Hole for support profile-frame connection FT-0173

Rezne liste
Cutting lists

Izračun dimenzija -RAM FT-0133
- KRILO FT-0134
Cutting list - FRAME FT-0133
- SASH FT-0134


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0133	.....	ML-28	2	45-45
Ram Frame FT-0133	.....	MH-28	2	45-45
Krilo Sash FT-0134	.....	ML-95	2	45-45
Krilo Sash FT-0134	.....	MH-95	2	45-45
Lajsna Glazing bead FM 30/20	.....	ML-78	2	45-45
Lajsna Glazing bead FM 30/20	.....	MH-78	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.003	....		4	
Kutna spojnica Corner bracket 725.105	....		4	
Kutna spojnica Corner bracket 725.001	....		4	
Kutna spojnica Corner bracket 725.004	....		4	
Kutna spojnica Corner bracket 725.301	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Brtve Gaskets				
Brtva Gasket 328.001	.....	6L+6H		
Brtva Gasket 318.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 311.007	.....	2LkrLsa+2HkrHsa		
Okovi i vijci Hardware and screws				
Makaze fasadnog ventusa (vrsta ovisno o visini prozora) Friction stays (type depending on window height)			1 par 1 pair	
Okov fasadnog ventusa sa mogućnošću zaključavanja u više točaka: Hung vent hardware with option of multiple locking points			1 par 1 pair	
Zaključavanje u donjem pojasu: Lower position locking:	....	101.000 133.003 133.005	1 1 (jedno zaklj. one lock) set 1 (tri zaklj. three locks)	
Zaključavanje u donjem pojasu i bočno: Lower and side position locking	....	101.000 133.003 133.004 133.005	1 1 set 1 set 1 (tri zaklj. three locks)	
Vijak Screw 433.092	.....	(2LlajsneLbead+2HlajsneLbead)/250		
Vijak Screw 433.043	.....	(2L+2H)/300		
Staklo vanjsko Exterior glass	.....	(ML-109)x(MH-109)	1	
Staklo unutarnje Interior glass	.....	(ML-163)x(MH-163)	1	

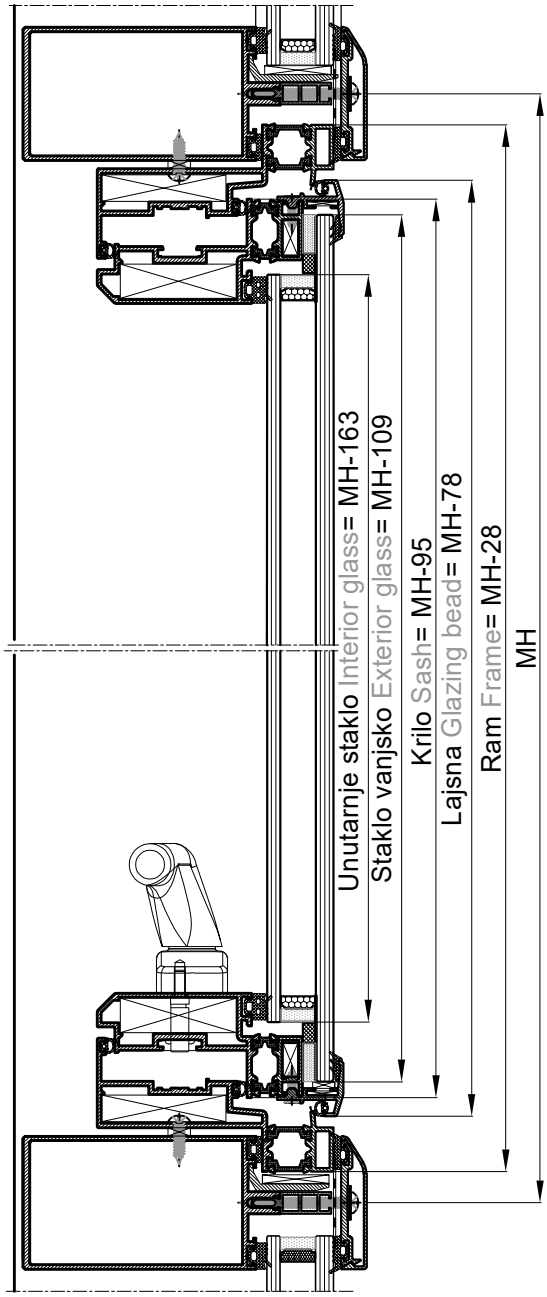


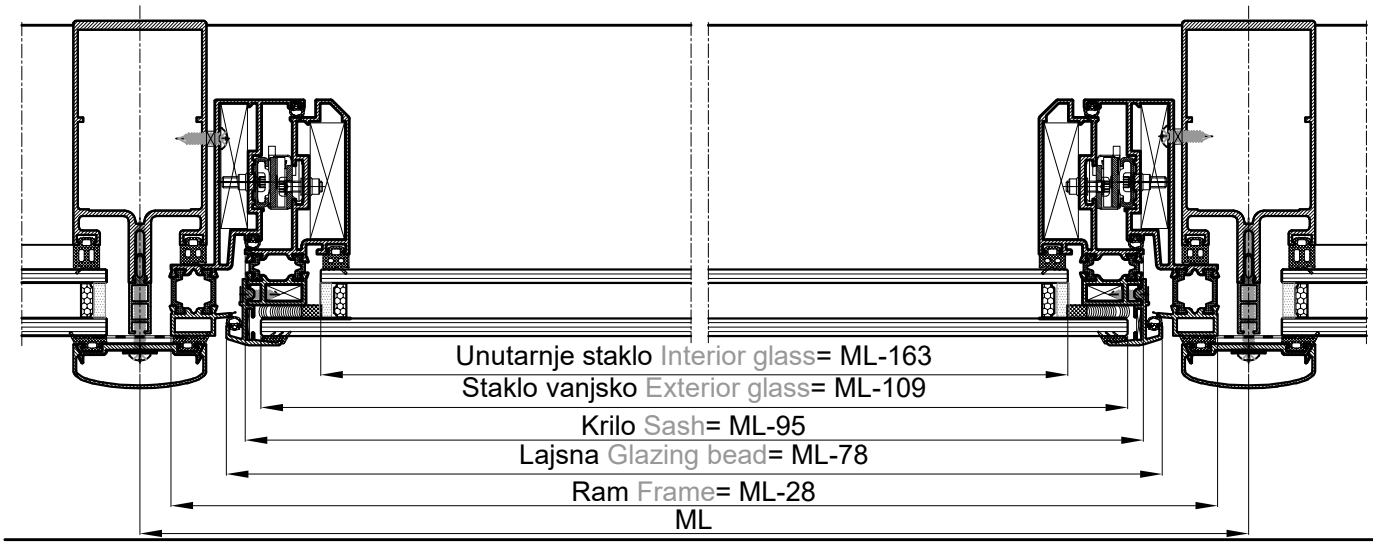

Izračun dimenzija - RAM FT-0173
- KRILO FT-0162
Cutting list - FRAME FT-0173
- SASH FT-0162


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0173	.....	ML-30	2	45-45
Ram Frame FT-0173	.....	MH-30	2	45-45
Krilo Sash FT-0162	.....	ML-100	2	45-45
Krilo Sash FT-0162	.....	MH-100	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.101	....		8	
Kutna spojnica Corner bracket 725.401	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+L		
Brtva Gasket 351.004	.....	L		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Okovi i vijci Hardware and screws				
Izbor mehanizma za ručno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.502.08.007 do 502.08.013				
Selection of hardware for manual paralel opening depends upon window dimensions - according to the shematic on pages 501.08.007 through 501.08.013				
Vijak Screw 433.044	.....	(2L+2H)/300		
Vijak Screw 433.104	.....	8		
Držač stakla Glass support 521.041	.....	4		
Vijak Screw 433.104	.....	8		
Staklo vanjsko Exterior glass	.....	(ML-72)x(MH-76)	1	
Staklo unutarnje Interiror glass	.....	(ML-162)x(MH-162)	1	

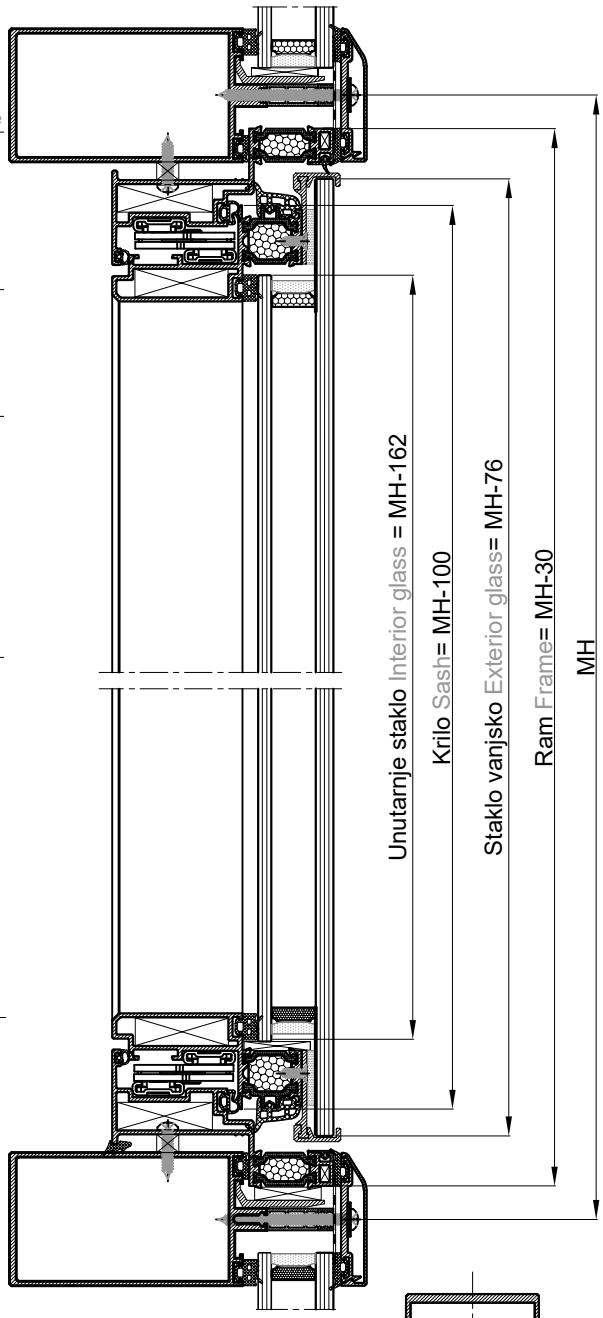


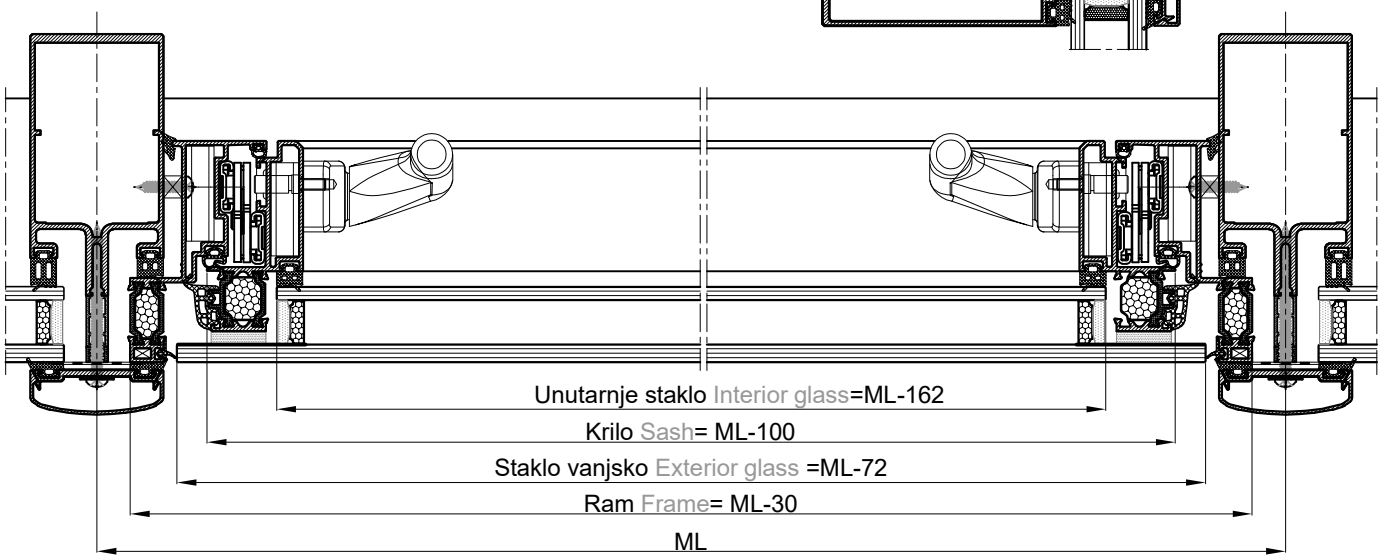

Izračun dimenzija - RAM FT-0173
- KRILO FT-0164
Cutting list - FRAME FT-0173
- SASH FT-0164


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0173	.....	ML-30	2	45-45
Ram Frame FT-0173	.....	MH-30	2	45-45
Krilo Sash FT-0164	.....	ML-100	2	45-45
Krilo Sash FT-0164	.....	MH-100	2	45-45
Držač motora Motor support F-1129	.....	ML-62	1	90-90
Poklopna lajsna Motor cover cap F-1128	....	ML-62	1	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.101	....		4	
Kutna spojnica Corner bracket 725.401	....		4	
Kutna spojnica Corner bracket 725.010	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+L		
Brtva Gasket 351.004	.....	L		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 311.009	.....	2L		
Brtva Gasket 318.002	.....	2H		
Okovi i vijci Hardware and screws				
Izbor mehanizma za motorno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.502.08.007 do 502.08.015 Selection of hardware for motorized paralel opening depends upon window dimensions - according to the shematic on pages 502.08.007 through 502.08.015				
Vijak Screw 433.044	.....	(2L+2H)/300		
Vijak Screw 433.050	.....	(ML-51)/300		
Sigur. držač Exterior glass support 521.041			4	
Staklo vanjsko Exterior glass	.....	(ML-72)x(MH-76)		
Staklo unutarnje Interior glass	.....	(ML-171)x(MH-171)		

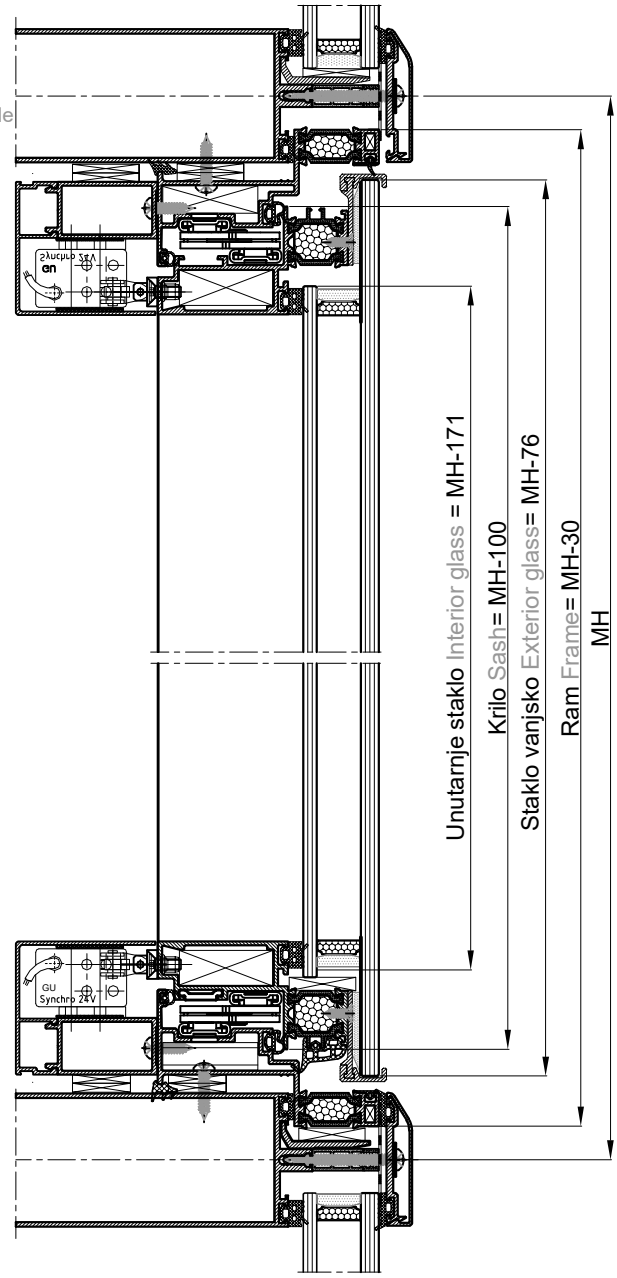


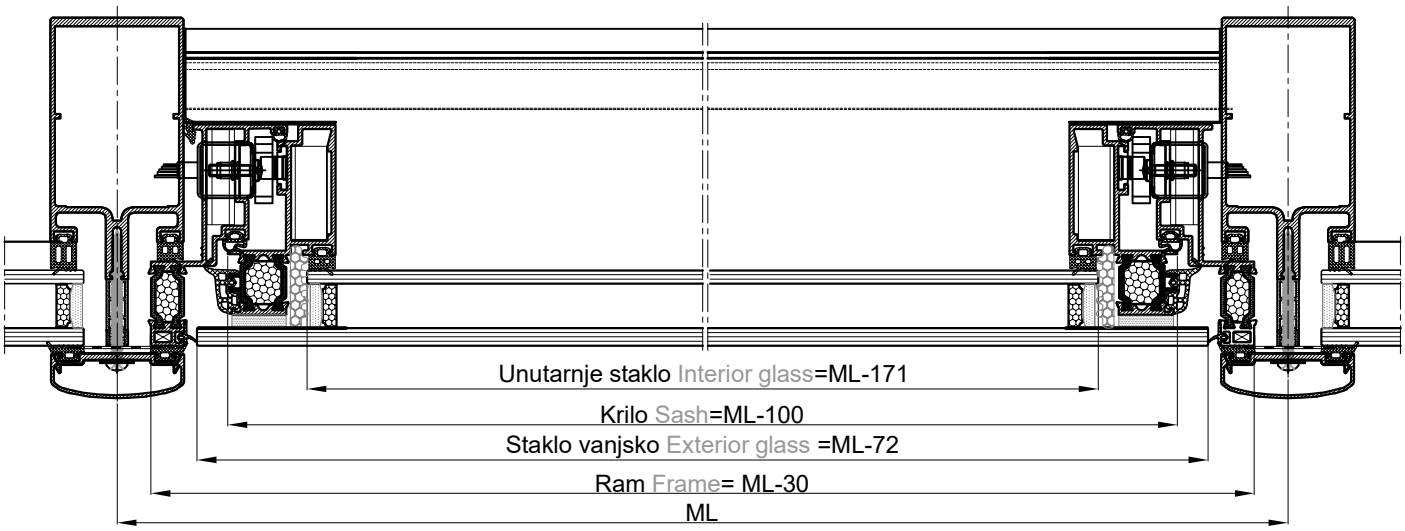

Izračun dimenzija - RAM FT-0174
- KRILO FT-0170
Cutting list - FRAME FT-0174
- SASH FT-0170


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0174	.....	ML-30	2	45-45
Ram Frame FT-0174	.....	MH-30	2	45-45
Krilo Sash FT-0170	.....	ML-100	2	45-45
Krilo Sash FT-0170	.....	MH-100	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.101	....		4	
Kutna spojnica Corner bracket 725.205	....		4	
Kutna spojnica Corner bracket 725.010	....		4	
Kutna spojnica Corner bracket 710.153	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2Lkr+2Hkr		
Brtva Gasket 351.002	.....	2Lkr+2Hkr		
Brtva Gasket 328.001	.....	2Lkr+2Hkr		
Brtva Gasket 351.003	.....	2H+L		
Brtva Gasket 351.004	.....	L		
Brtva Gasket 358.011	.....	2Lkr+2Hkr		
Brtva Gasket 318.002	.....	2L+2H		
Izolacijski umetak Isolation 340.013	.....	2(LkrLsa-53)+2(HkrHsa-76)		
Okovi i vijci				
Izbor mehanizma za ručno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.502.08.007 do 502.08.013				
Selection of hardware for manual paralel opening depends upon window dimensions - according to the shematic on pages 502.08.007 through 502.08.013				
Vijak Screw 433.044	.....	(2L+2H)/300		
Držač stakla Glass support 521.014	.....		2	
Sigur. držač Exterior glass support 521.041			4	
Staklo vanjsko Exterior glass	.....	(ML-74)x(MH-74)	1	
Staklo unutarnje Interior glass	.....	(ML-172)x(MH-172)	1	

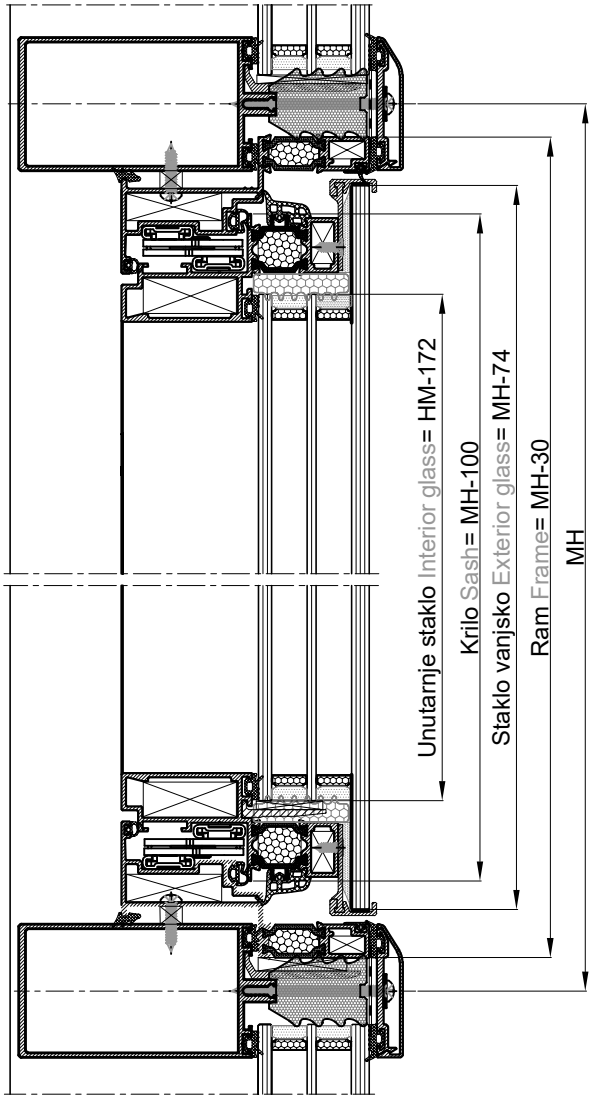


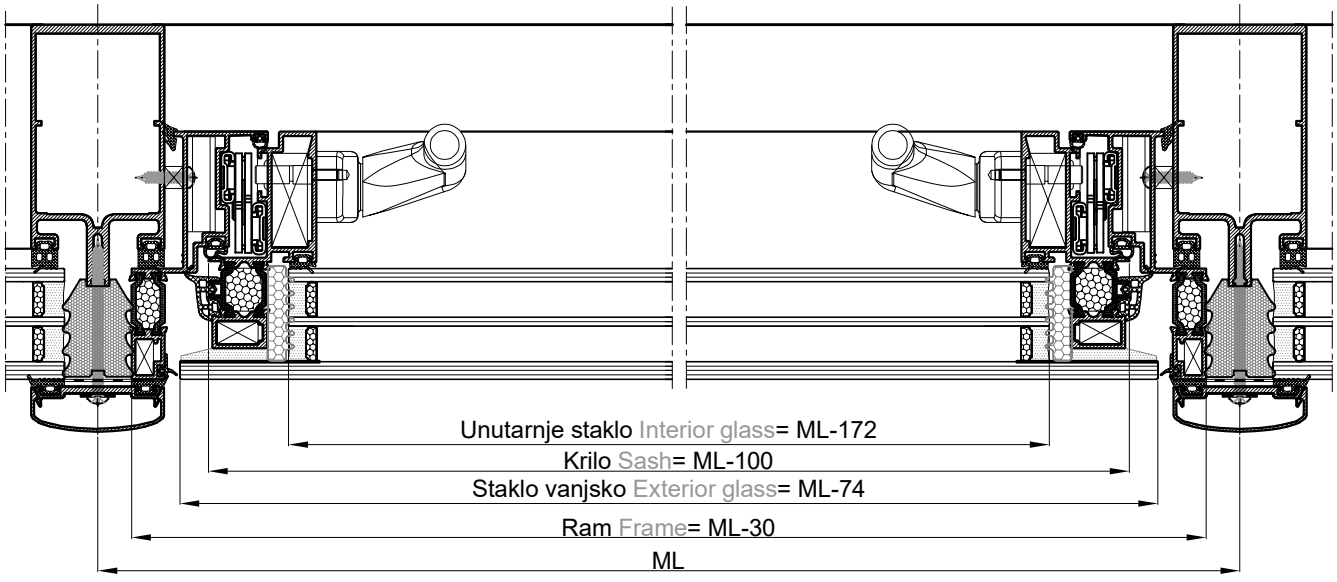

Izračun dimenzija - RAM FT-0174
- KRILO FT-0186
Cutting list - FRAME FT-0174
- SASH FT-0186


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0174	.....	ML-30	2	45-45
Ram Frame FT-0174	.....	MH-30	2	45-45
Krilo Sash FT-0186	.....	ML-100	2	45-45
Krilo Sash FT-0186	.....	MH-100	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.101	....		8	
Kutna spojnica Corner bracket 725.205	....		4	
Kutna spojnica Corner bracket 710.153	....		4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+L		
Brtva Gasket 351.004	.....	L		
Brtva Gasket 358.011	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Okovi i vijci				
Izbor mehanizma za ručno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.502.08.007 do 502.08.013				
Selection of hardware for manual paralel opening depends upon window dimensions - according to the shematic on pages 502.08.007 through 502.08.013				
Vijak Screw 433.044	.....	(2L+2H)/300		
Sigur. držač Exterior glass support 521.041			4	
Staklo vanjsko Exterior glass	.....	(ML-74)x(MH-74)	1	
Staklo unutarnje Interior glass	.....	(ML-162)x(MH-162)	1	

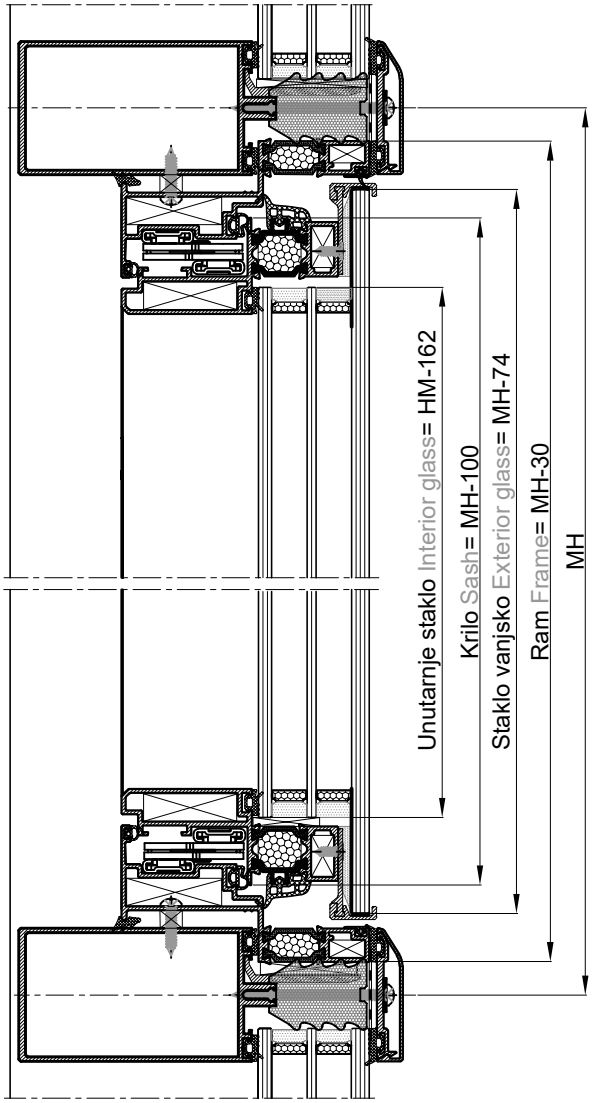


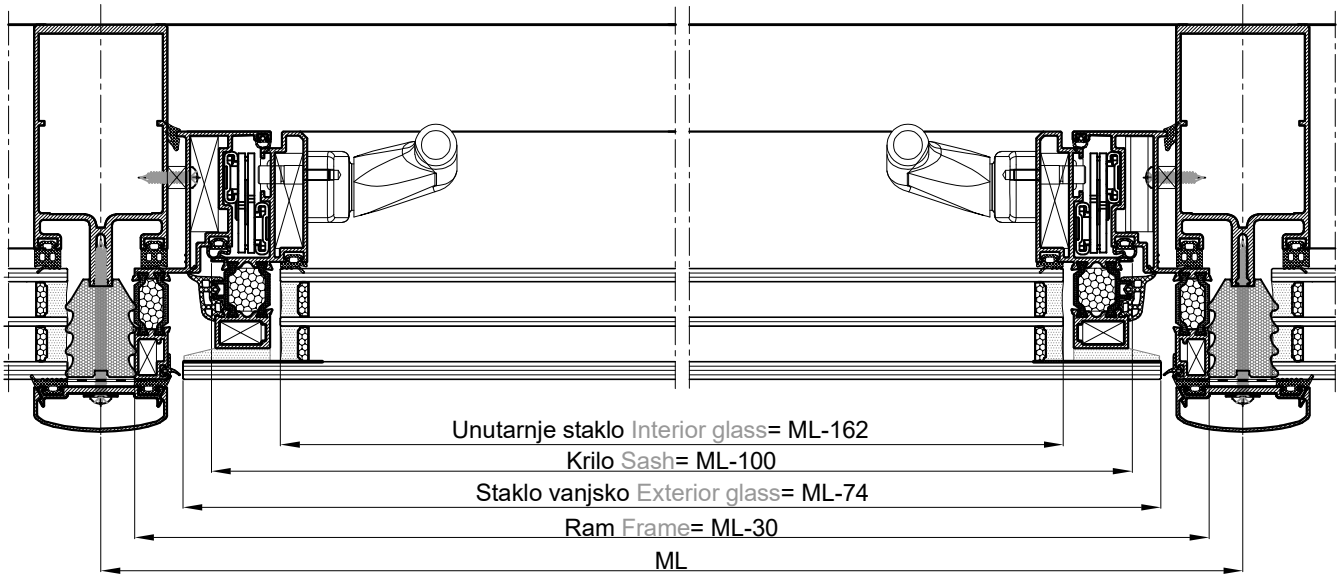

Izračun dimenzija -Ram FT-0620 F -Krilo FT-0607 F
Cutting list -Frame FT-0620 F -Sash FT-0607 F


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0620 F	.....	ML-30	2	45-45
Ram Frame FT-0620 F	.....	MH-30	2	45-45
Krilo Sash FT-0607 F	.....	ML-115	2	45-45
Krilo Sash FT-0607 F	.....	MH-115	2	45-45
Lajsna Glazing bead Z40-668	.....	LkrLsa-93	2	90-90
Lajsna Glazing bead Z40-668	.....	HkrHsa-137	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.701		.....	4	
Kutna spojnica Corner bracket 725.117		.....	4	
Kutna spojnica Corner bracket 710.033		.....	4	
Kutna spojnica Corner bracket 710.023		.....	4	
Kutna spojnica Corner bracket 731.010		.....	8	
Kutna spojnica Corner bracket 730.001		.....	4	
Brtve Gaskets				
Brtva Gasket 331.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.001	.....	2LstakloLglass+2HstakloHglass		
Brtva Gasket 328.002	.....	2LstakloLglass+2HstakloHglass		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 314.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 311.007	.....	2LkrLsa+2HkrHsa		
Izolacijski umetak Isolation 340.013	.....	2(LstakloLglass)+2(HstakloHglass)		
Okovi i vijci Hardware and screws				
Zaokretno otklopni mehanizam	.....	1 komplet		
Turn tilt mechanism	.....	1 set		
Vijak Screw 433.133	.....	(2L+2H)/300		
Držač stakla Glass support 521.004	.....	2		
Staklo vanjsko Exterior glass	.....	(LkrilaLsash-106)x(HkrilaHsash-106)		

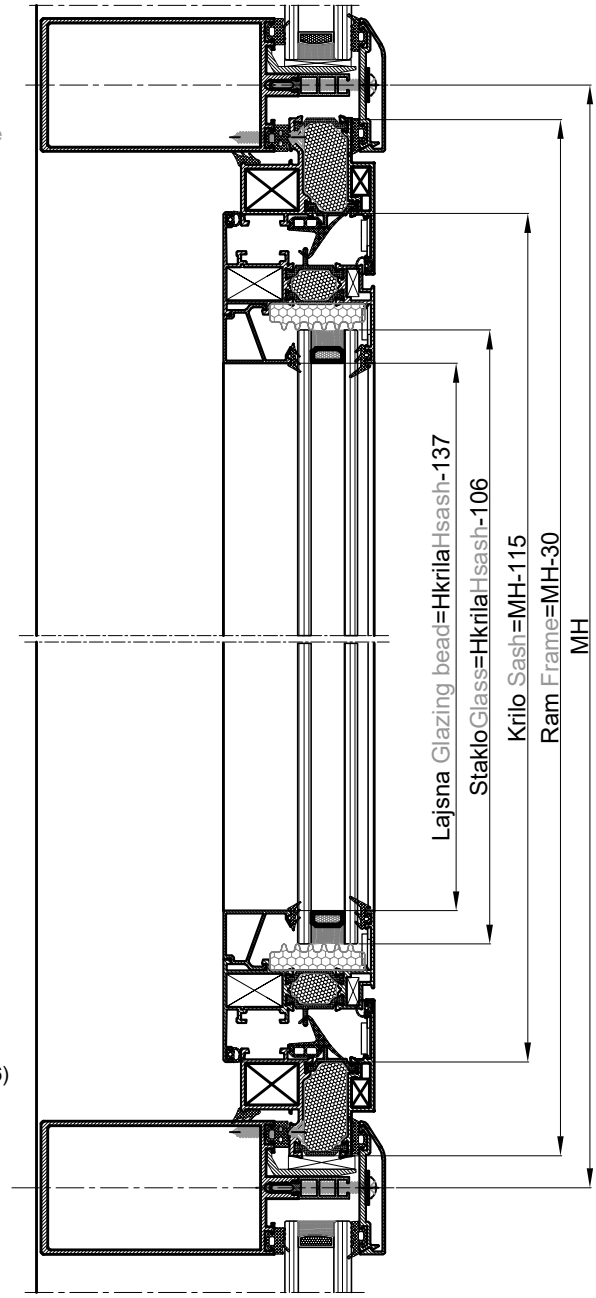


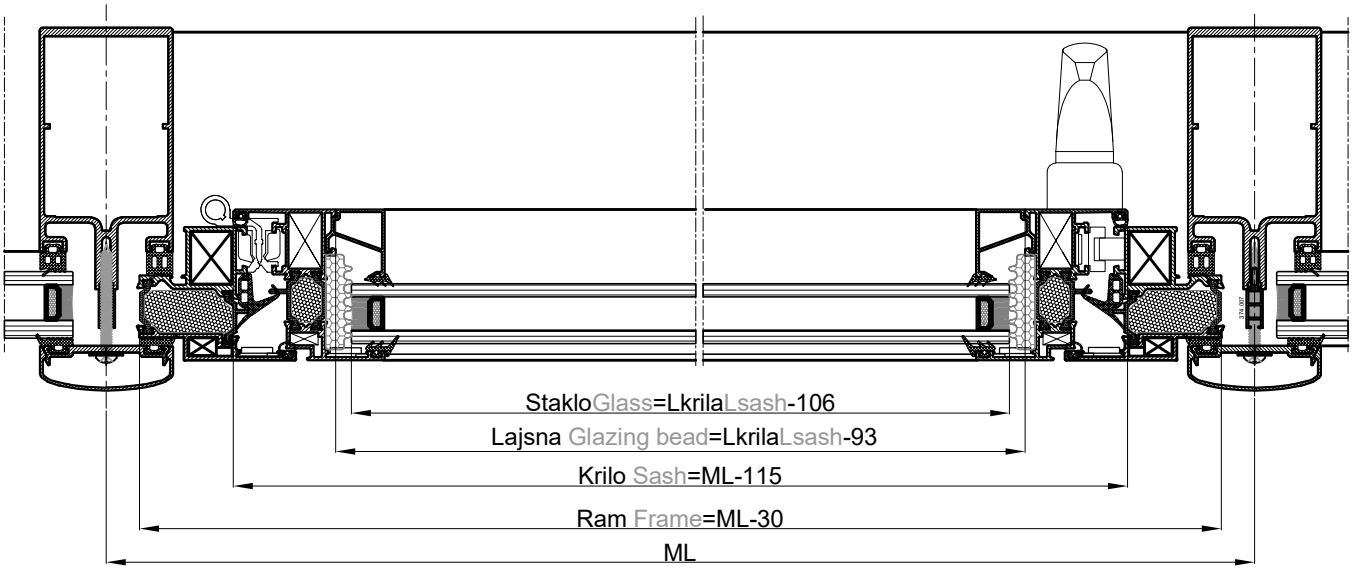

Izračun dimenzija - RAM FT-0261
- KRILO FT-0203
Cutting list - FRAME FT-0261
- SASH FT-0203


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0261	.....	ML-28	2	45-45
Ram Frame FT-0261	.....	MH-28	2	45-45
Krilo Sash FT-0203	.....	ML-109	2	45-45
Krilo Sash FT-0203	.....	MH-109	2	45-45
Staklo lajsna Glazing bead Z40-668	.....	LkrLsa-93	2	90-90
Staklo lajsna Glazing bead Z40-668	.....	HkrLsa-137	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.100	....		4	
Kutna spojnica Corner bracket 710.037	....		4	
Kutna spojnica Corner bracket 710.075	....		4	
Kutna spojnica Corner bracket 710.026	....		4	
Kutna spojnica Corner bracket 730.005	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Kutna spojnica Corner bracket 730.002	....		4	
Brtve Gaskets				
Brtva Gasket 331.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 354.011	.....	2L+2H		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Okovi i vijci Hardware and screws				
Dry kip mehanizam Turn tilt mechanism	.....	1 komplet 1 set		
Vijak Screw 433.135	.....	(2L+2H)/300		
Staklo Glass 26 mm	.....	(LkrLsa-107)x(HkrHsa-107)	1	

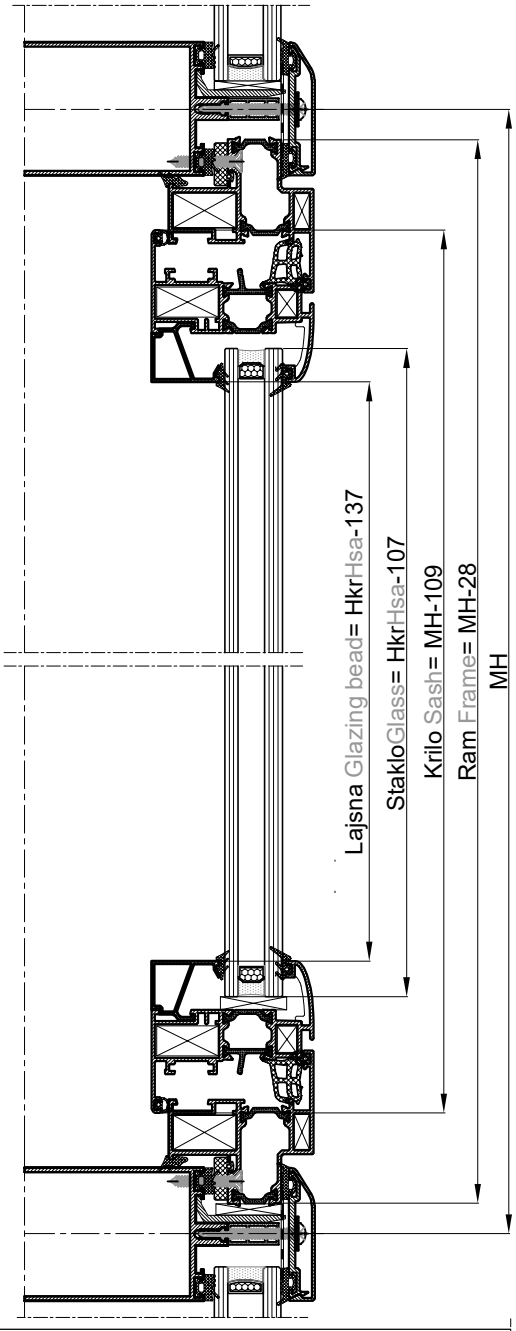


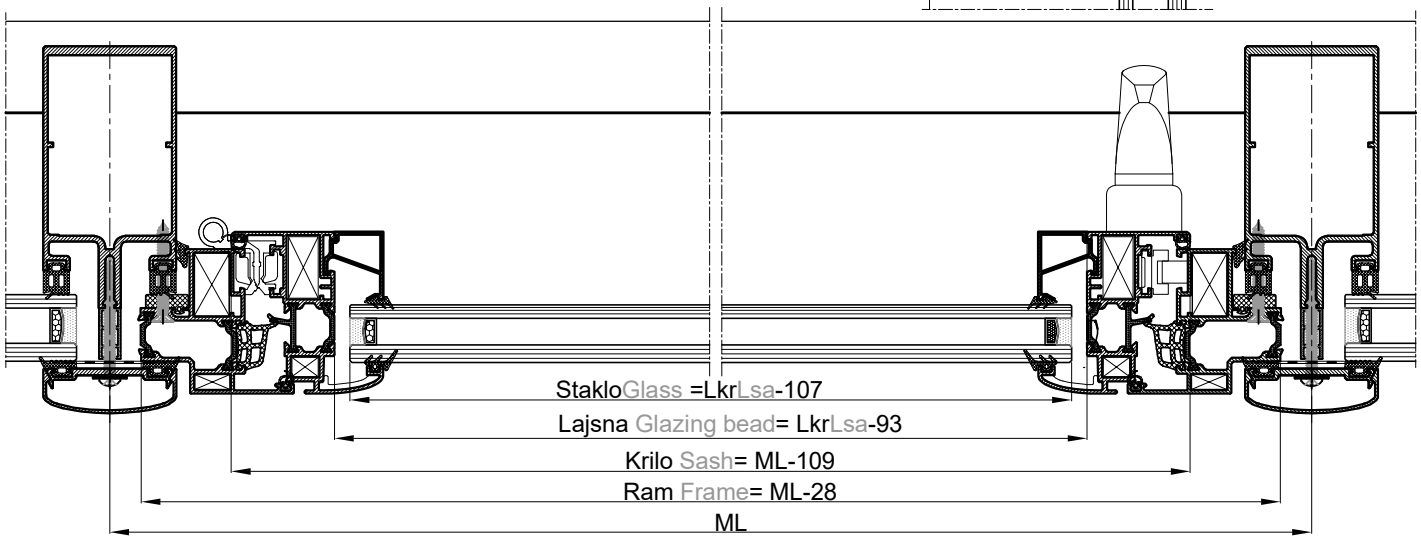

Izračun dimenzija - RAM FT-0261 HF
- KRILO FT-0203 HF
Cutting list - FRAME FT-0261 HF
- SASH FT-0203 HF


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0261 HF	.....	ML-28	2	45-45
Ram Frame FT-0261 HF	.....	MH-28	2	45-45
Krilo Sash FT-0203 HF	.....	ML-109	2	45-45
Krilo Sash FT-0203 HF	.....	MH-109	2	45-45
Staklo lajsna Glazing bead Z40-667	.....	LkrLsa-93	2	90-90
Staklo lajsna Glazing bead Z40-667	.....	HkrHsa-137	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.100	....		4	
Kutna spojnica Corner bracket 710.037	....		4	
Kutna spojnica Corner bracket 710.075	....		4	
Kutna spojnica Corner bracket 710.026	....		4	
Kutna spojnica Corner bracket 730.005	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Kutna spojnica Corner bracket 730.002	....		4	
Brtve Gaskets				
Brtva Gasket 331.004	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 354.011	.....	2L+2H		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 321.004	.....	2LkrLsa+2HkrLsa		
Brtva Gasket 311.003	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Izolacijski umetak Isolation 348.002	.....	2(LkrLsa-93)+2(HkrHsa-109)		
Okovi i vijci Hardware and screws				
Dry kip mehanizam Turn tilt mechanism	.....	1 komplet 1 set		
Vijak Screw 433.135	.....	(2L+2H)/300		
Staklo 40 mm Glass 40 mm	.....	(LkrLsa-107)x(HkrHsa-107)	1	

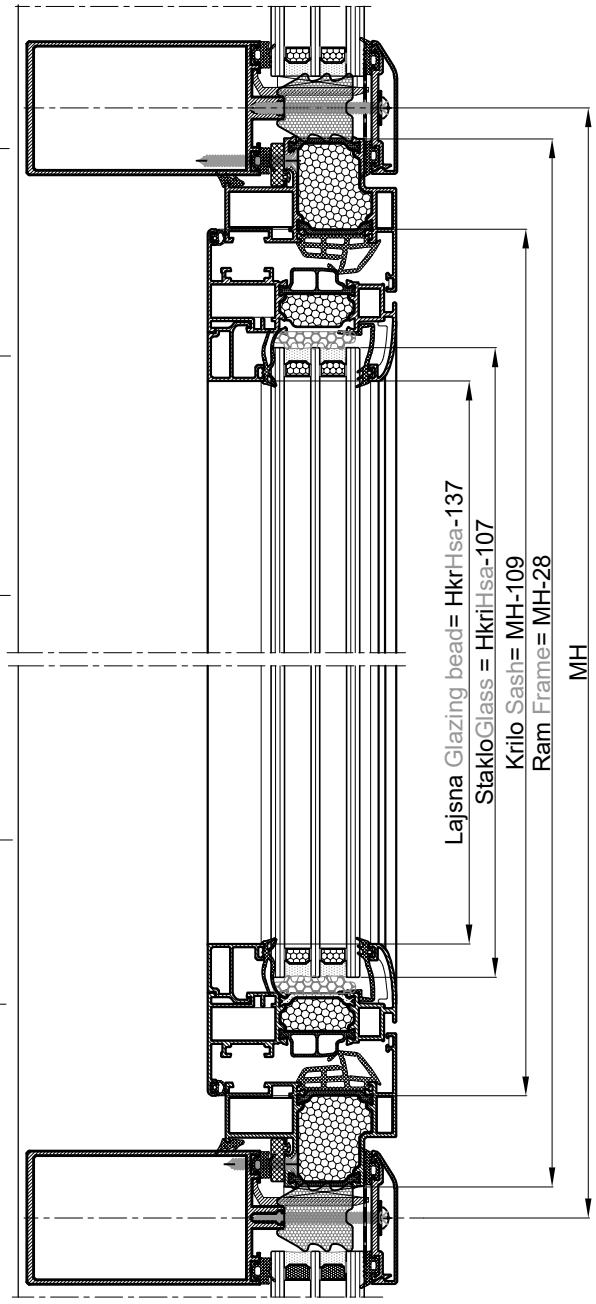


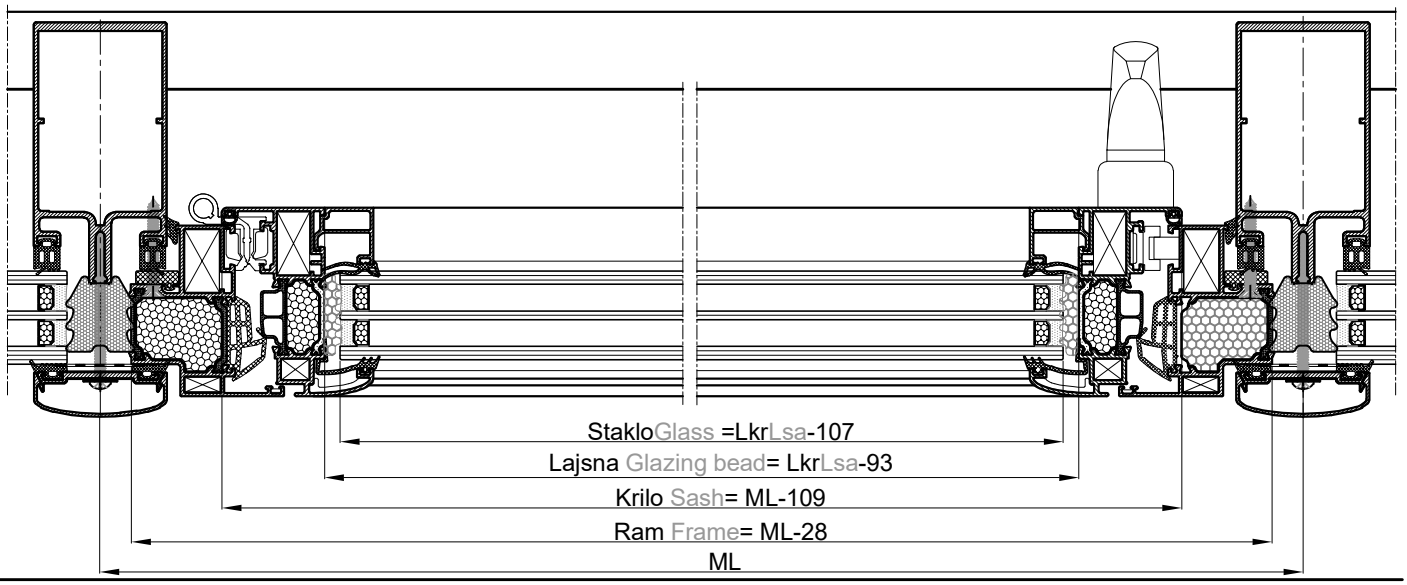

Izračun dimenzija - RAM FT-0187 F
- KRILO FT-0167 F
Cutting list - FRAME FT-0187 F
- SASH FT-0167 F


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0187 F	.....	ML-28	2	45-45
Ram Frame FT-0187 F	.....	MH-28	2	45-45
Krilo Sash FT-0167 F	.....	ML-110	2	45-45
Krilo Sash FT-0167 F	.....	MH-110	2	45-45
Staklo lajsna Glazing bead F-0807	.....	Lkr-83	2	90-90
Staklo lajsna Glazing bead F-0807	.....	Hkr-111	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.100	....		4	
Kutna spojnica Corner bracket 710.031	....		4	
Kutna spojnica Corner bracket 730.011	....		4	
Kutna spojnica Corner bracket 730.002	....		4	
Kutna spojnica Corner bracket 710.025	....		4	
Kutna spojnica Corner bracket 710.111	....		4	
Brtve Gaskets				
Brtva Gasket 321.005	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 331.004	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 358.011	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Okovi i vijci Hardware and screws				
Dry kip mehanizam Turn tilt mechanism	.....	1 komplet 1 set		
Vijak Screw 433.044	.....	(2L+2H)/300		
Vijak Screw 433.002	.....	(2L+2H)/300		
Staklo Glass 30 mm	.....	(LkrLsa-97)x(HkrHsa-97)	1	

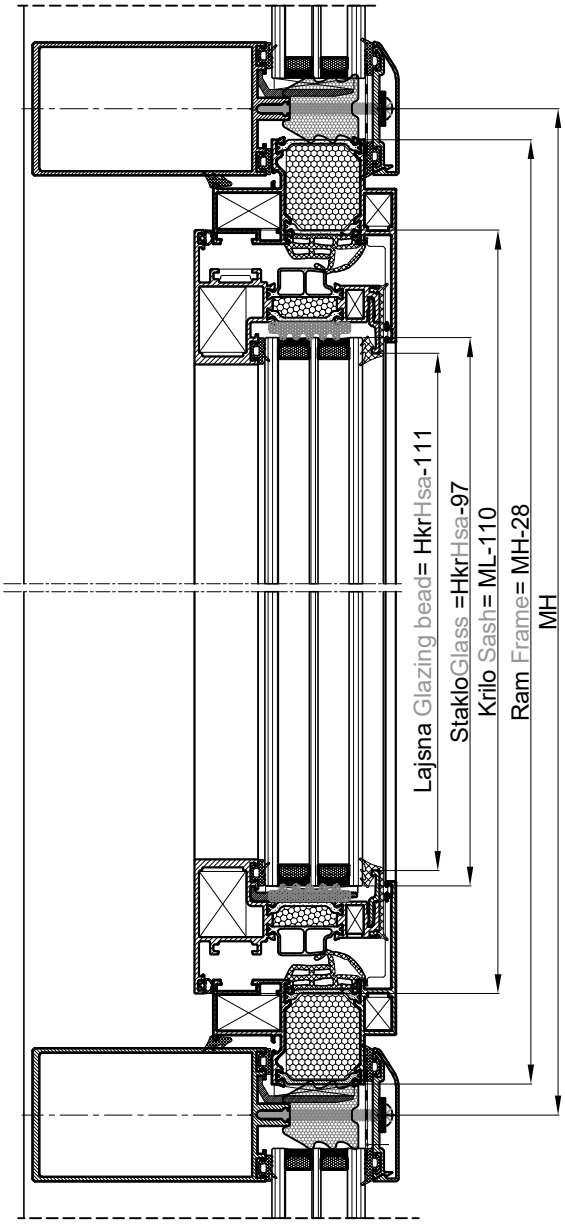


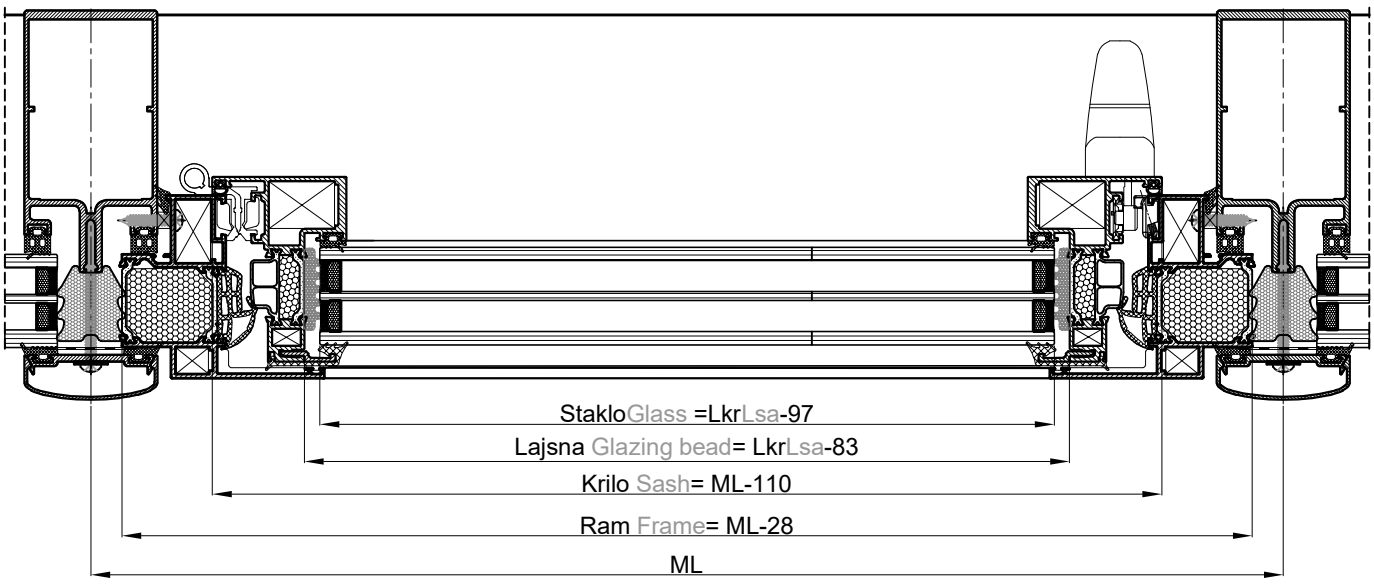

Izračun dimenzija -Ram FT-1201 - Krilo FT-1211
Cutting list - Frame FT-1201 - Sash FT-1211


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-1201	.....	ML-30	2	45-45
Ram Frame FT-1201	.....	MH-30	2	45-45
Krilo Sash FT-1211	.....	ML-122	2	45-45
Krilo Sash FT-1211	.....	MH-122	2	45-45
Lajsna Glazing bead Z40-669	.....	LkrLsa-121	2	90-90
Lajsna Glazing bead Z40-669	.....	HkrHsa-165	2	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 710.415		.....	4	
Kutna spojnica Corner bracket 710.414		.....	4	
Kutna spojnica Corner bracket 730.001		.....	4	
Kutna spojnica Corner bracket 730.002		.....	4	
Kutna spojnica Corner bracket 710.411		.....	4	
Kutna spojnica Corner bracket 710.410		.....	4	
Kutna spojnica Corner bracket 731.010		.....	4	
Brtve Gaskets				
Brtva Gasket 327.001	.....	2LstaklaLglass+2HstaklaHglass		
Brtva Gasket 317.001	.....	2LstaklaLglass+2HstaklaHglass		
Brtva Gasket 317.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 327.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 337.001	.....	2LkrLsa+2HkrHsa		
Izolacijski umetak Isolation 340.142	.....	2(LkrLsa-111)+2(HkrHsa-129)		
Okovi i vijci Hardware and screws				
Zaokretno otklopni mehanizam	.....	1 komplet		
Turn-tilt mechanism	.....	1 set		
Vijak Screw 433.136	.....	(2L+2H)/300		
Držač stakla Glass suport 521.261	.....	2		
Staklo Glass	.....	(LkrLsa-129)x(HkrHsa-129)	3	

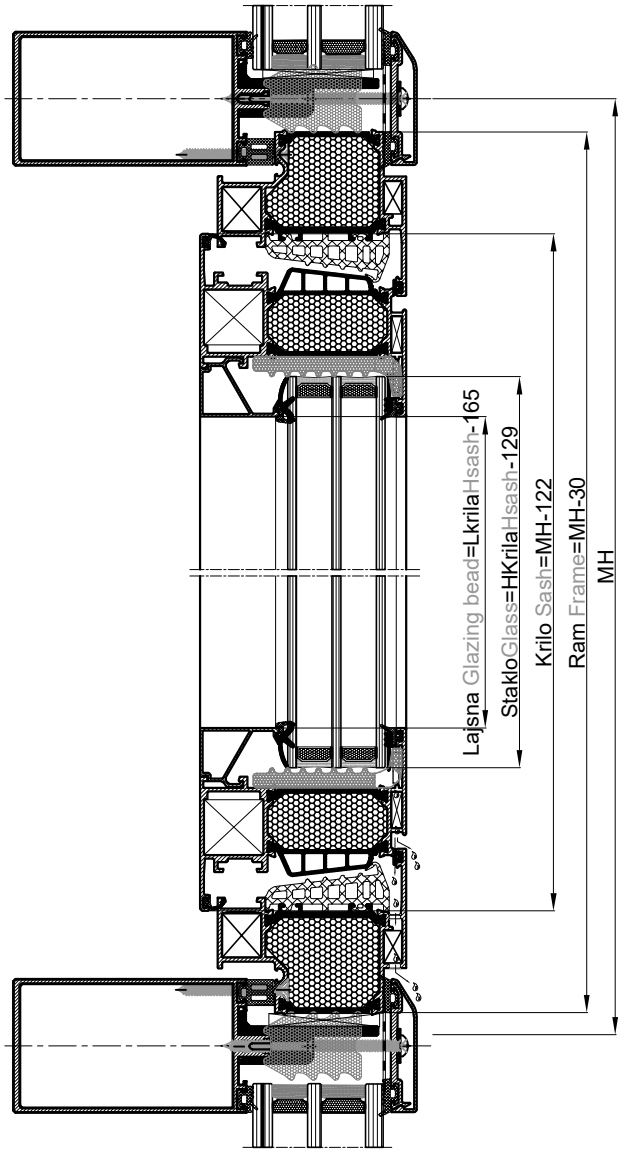


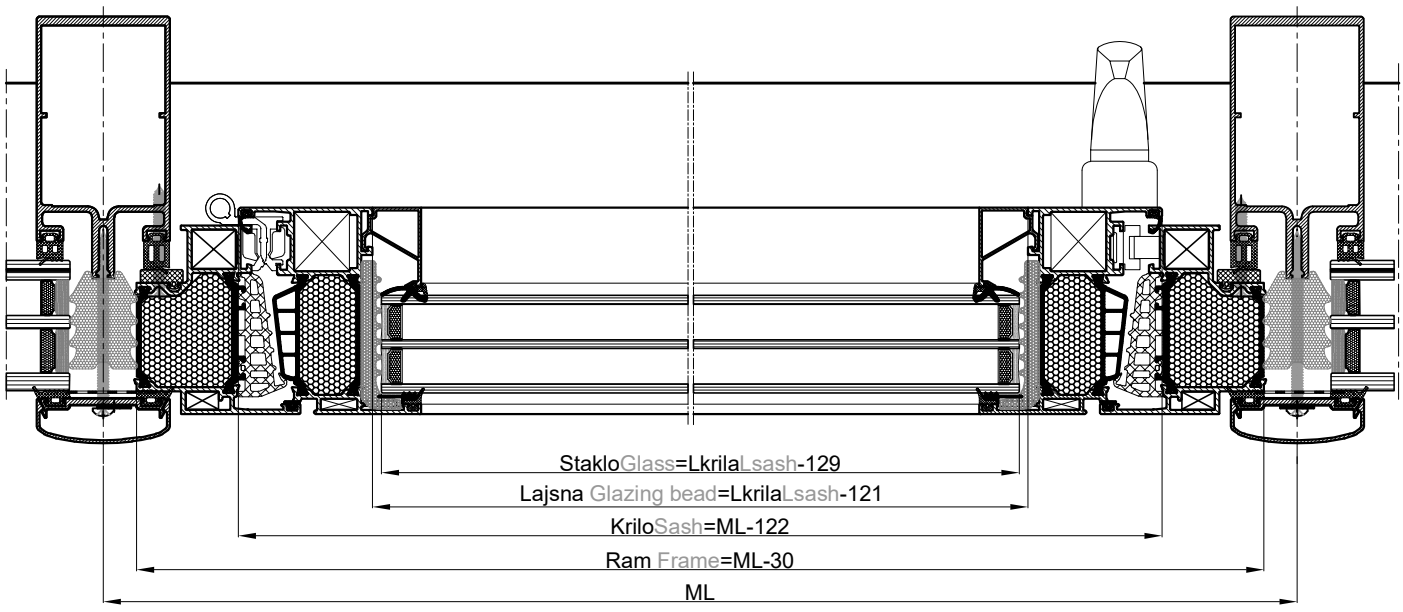

Izračun dimenzija -RAM FT-0126
-KRILO FT-0157
Cutting list - FRAME FT-0126
- SASH FT-0157


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0126	.....	ML-23	2	45-45
Ram Frame FT-0126	.....	MH-23	2	45-45
Krilo Sash FT-0157	.....	ML-89	2	45-45
Krilo Sash FT-0157	.....	MH-89	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.101	....		4	
Kutna spojnica Corner bracket 710.008	....		4	
Kutna spojnica Corner bracket 725.104	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Brtve Gaskets				
Brtva Gasket 351.018	.....	2L+2H		
Brtva Gasket 358.021	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.001	.....	2L+2H		
Okovi i vijci Hardware and screws				
Makaze fasadnog ventusa (vrsta ovisno o visini prozora) Friction stays (type depending on window height)			1 par 1 pair	
Okov fasadnog ventusa sa mogućnošću zaključavanja u više točaka: Hung vent hardware with option of multiple locking points:				
Zaključavanje u donjem pojasu: Lower position locking:	....	101.000 133.003 133.005	1 1 (jedno zaklj. one lock) set 1 (tri zaklj. three locks)	
Zaključavanje u donjem pojasu i bočno: Lower and side position locking:	....	101.000 133.003 133.004 133.005	1 1 set 1 set 1 (tri zaklj. three locks)	
Vijak Screw 433.041	.....	(2L+2H)/300		
Sigur. držač Exterior glass support 521.061.			4	
Držač stakla Glass support 521.102	.....		2	
Staklo vanjsko Glass exterior	.....	(ML-42)x(MH-42)	1	
Staklo unutarnje Glass interior	.....	(ML-152)x(MH-152)	1	

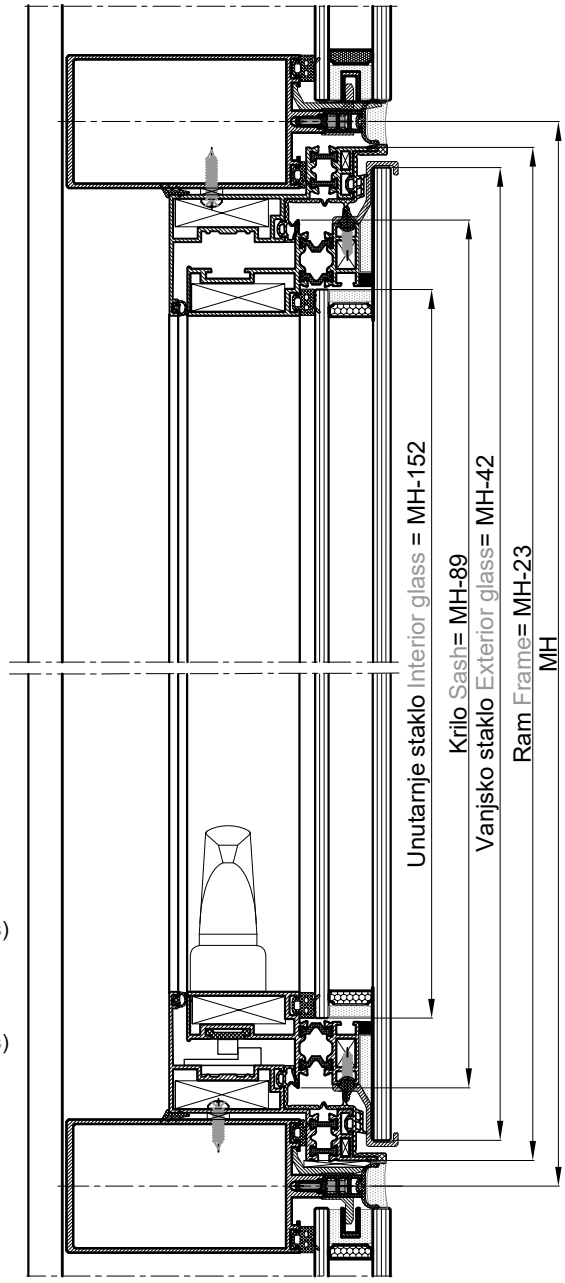


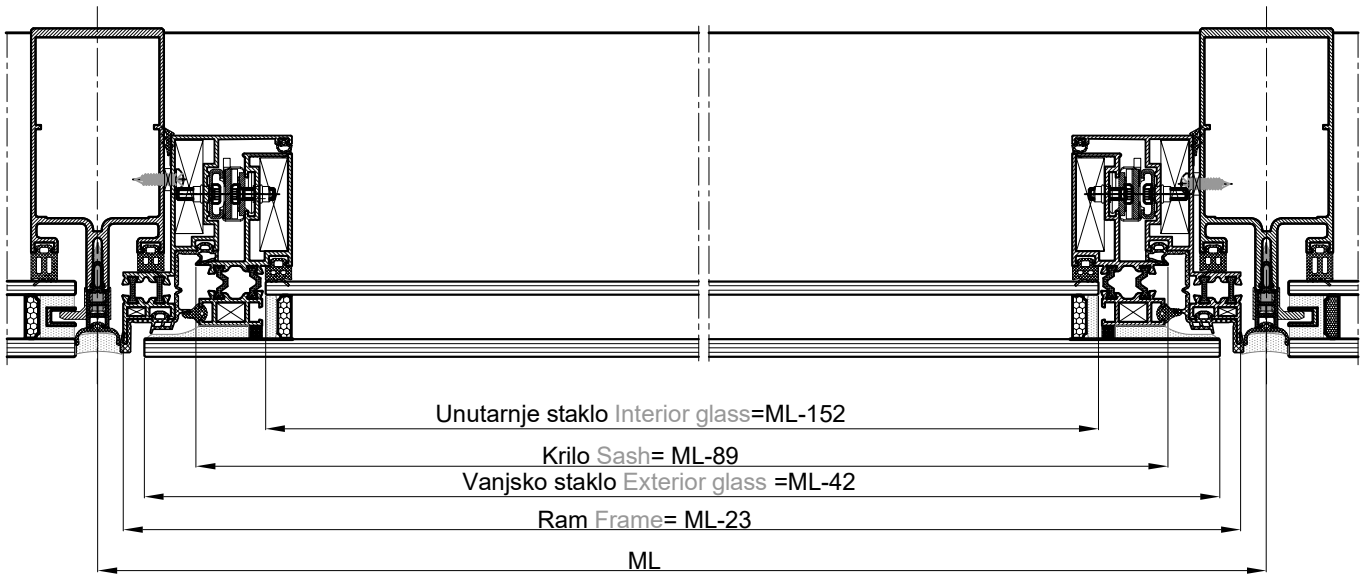

Izračun dimenzija - RAM FT-0161
- KRILO FT-0162
Cutting list - FRAME FT-0161
- SASH FT-0162


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0161	.....	ML-20	2	45-45
Ram Frame FT-0161	.....	MH-20	2	45-45
Krilo Sash FT-0162	.....	ML-89	2	45-45
Krilo Sash FT-0162	.....	MH-89	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.101	....		8	
Kutna spojnica Corner bracket 725.401	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Brtve Gaskets				
Brtva Gasket 358.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 358.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+L		
Brtva Gasket 351.004	.....	L		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrLsa		
Brtva Gasket 311.001	.....	2L+2H		
Okovi i vijci Hardware and screws				
Izbor mehanizma za ručno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.502.08.007 do 502.08.013				
Selection of hardware for manual paralel opening depends upon window dimensions - according to the shematic on pages 502.08.007 through 502.08.013				
Vijak Screw 433.043	.....	(2L+2H)/300		
Držač stakla Glass support 521.004	.....		2	
Sig. držač Exterior glass support 521.041	..		4	
Staklo vanjsko Exterior glass	.....	(ML-62)x(MH-66)	1	
Staklo unutarnje Interior glass	.....	(ML-152)x(MH-152)	1	

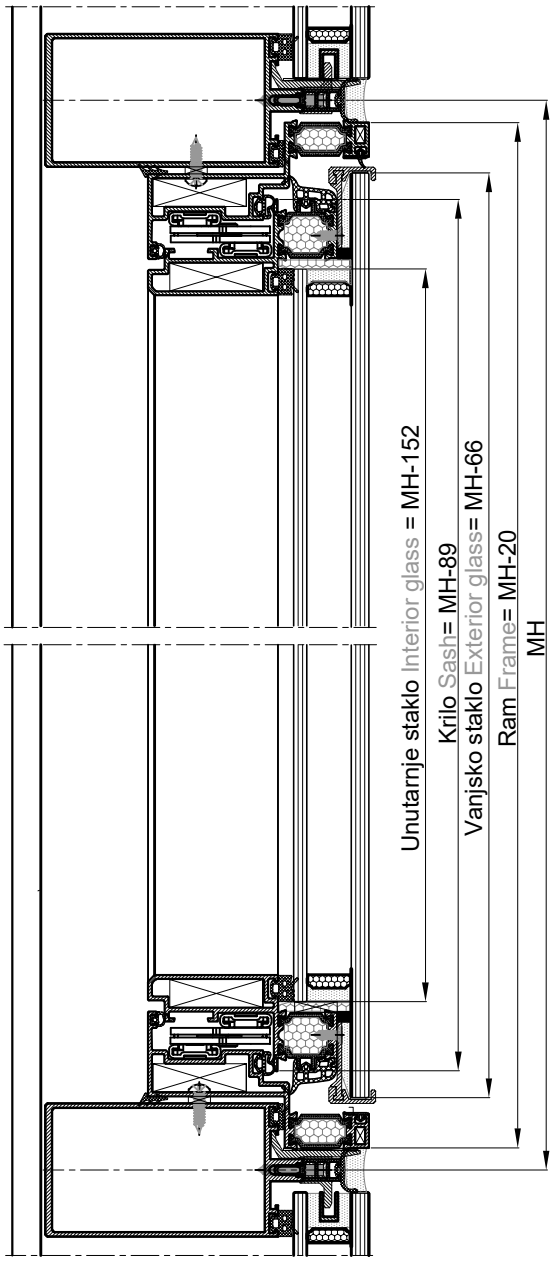


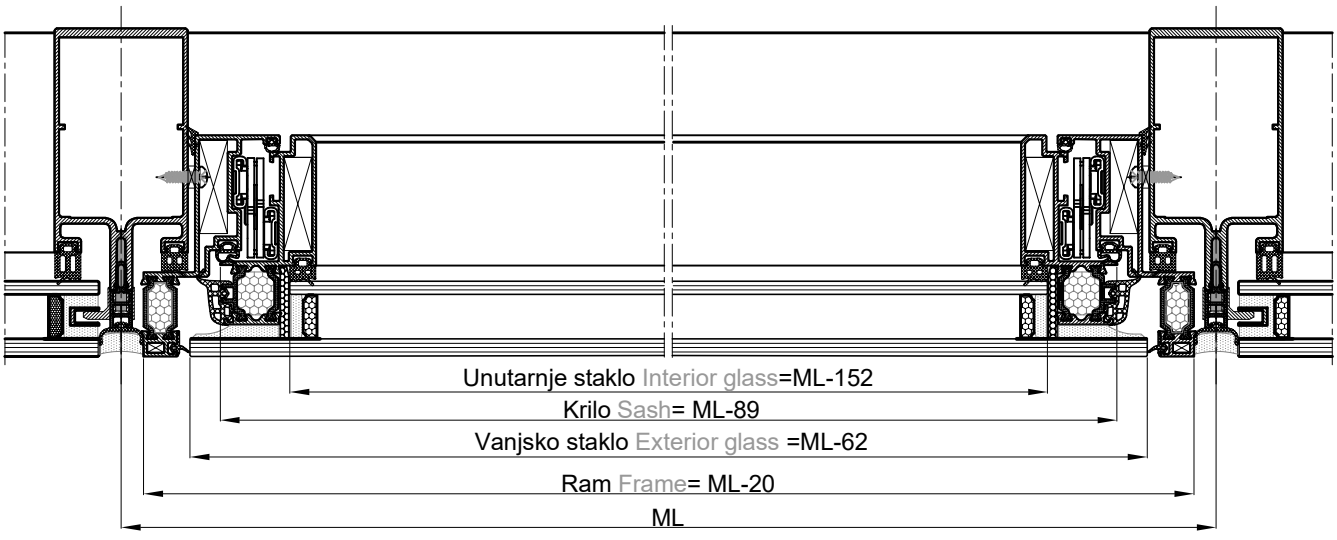

Izračun dimenzija - RAM FT-0161
- KRILO FT-0164
Cutting list - FRAME FT-0161
- SASH FT-0164


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0161	.....	ML-20	2	45-45
Ram Frame FT-0161	.....	MH-20	2	45-45
Krilo Sash FT-0164	.....	ML-89	2	45-45
Krilo Sash FT-0164	.....	MH-89	2	45-45
Držač motora Motor support F-1129	.....	ML-62	1	90-90
Pokl. lajsna Motor cover cap F-1128	.....	ML-62	1	90-90
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.101	....		4	
Kutna spojnica Corner bracket 725.401	....		4	
Kutna spojnica Corner bracket 725.010	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+L		
Brtva Gasket 351.004	.....	L		
Brtva Gasket 358.014	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.001	.....	2L+2H		
Okovi i vijci Hardware and screws				
Izbor mehanizma za motorno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.502.08.007 do 502.08.015				
Selection of hardware for motorized paralel opening depends upon window dimensions - according to the shematic on pages 502.08.007 through 502.08.015				
Vijak Screw 433.044	.....	(2L+2H)/300		
Vijak Screw 433.050	.....	(ML-51)/300		
Sigur. držač Exterior glass support 521.041.		4		
Držač stakla Glass support 521.102	.....	2		
Staklo vanjsko Exterior glass	.....	(ML-62)x(MH-66)	1	
Staklo unutarnje Interior glass	.....	(ML-161)x(MH-161)	1	

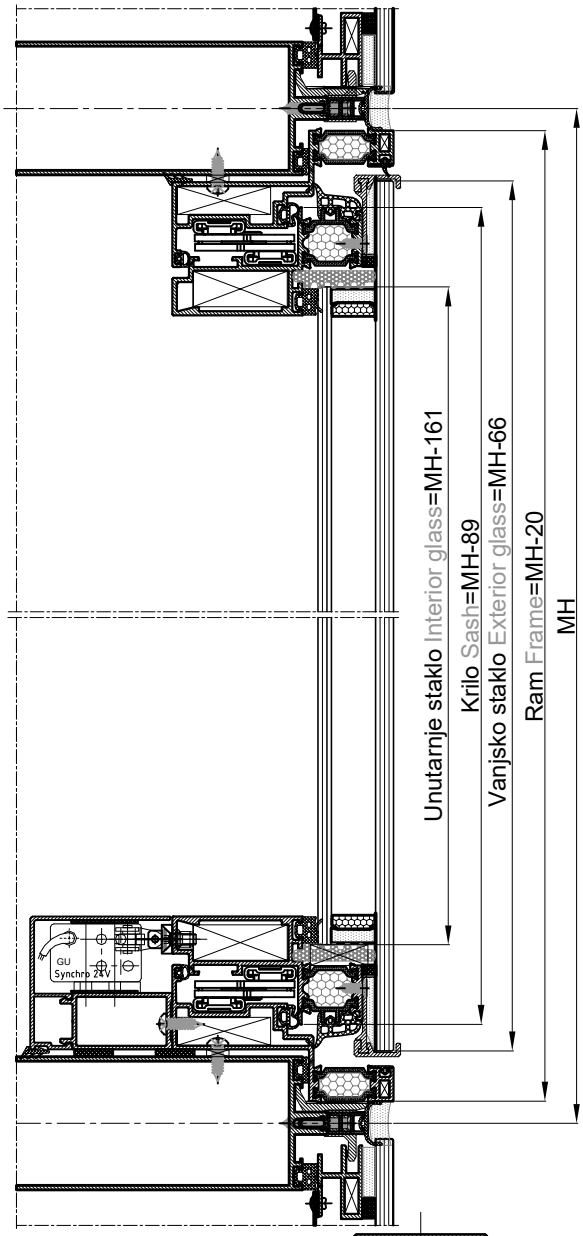


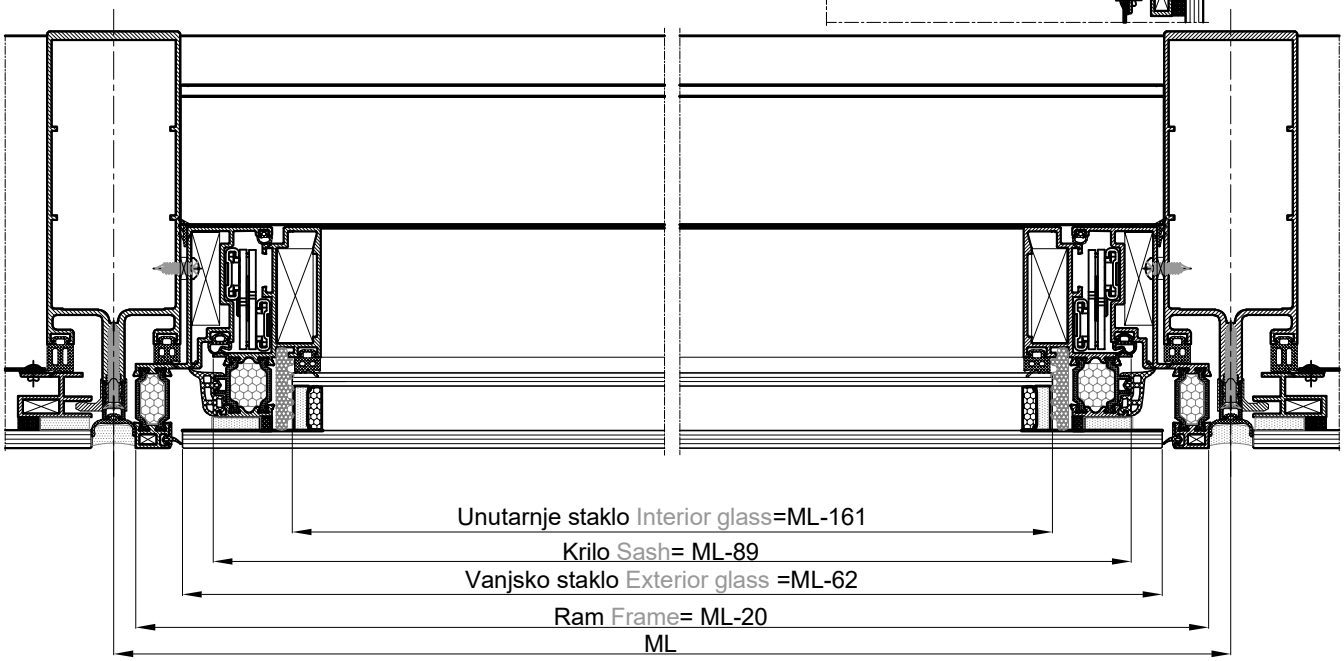

Izračun dimenzija - RAM FT-0169
- KRILO FT-0170
Cutting list - FRAME FT-0169
- SASH FT-0170


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0169	.....	ML-20	2	45-45
Ram Frame FT-0169	.....	MH-20	2	45-45
Krilo Sash FT-0170	.....	ML-88.5	2	45-45
Krilo Sash FT-0170	.....	MH-88.5	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.101	....		4	
Kutna spojnica Corner bracket 725.205	....		4	
Kutna spojnica Corner bracket 725.010	....		4	
Kutna spojnica Corner bracket 710.153	....		4	
Kutna spojnica Corner bracket 730.001	....		4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+L		
Brtva Gasket 351.004	.....	L		
Brtva Gasket 358.011	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Izolacijski umetak Isolation 340.013	.....	2(LkrLsa-53)+2(HkrHsa-76)		
Okovi i vijci Hardware and screws				
Izbor mehanizma za ručno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.502.08.007 do 501.06.013				
Selection of hardware for manual paralel opening depends upon window dimensions - according to the shematic on pages 502.08.007 do 502.08.013				
Vijak Screw 433.043	.....	(2L+2H)/300		
Držač stakla Glass support 521.014	.....		2	
Sig. držač Exterior glass support 521.041	..		4	
Staklo vanjsko Exterior glass	.....	(ML-63)x(MH-63)	1	
Staklo unutarnje Interior glass	.....	(ML-162)x(MH-162)	1	

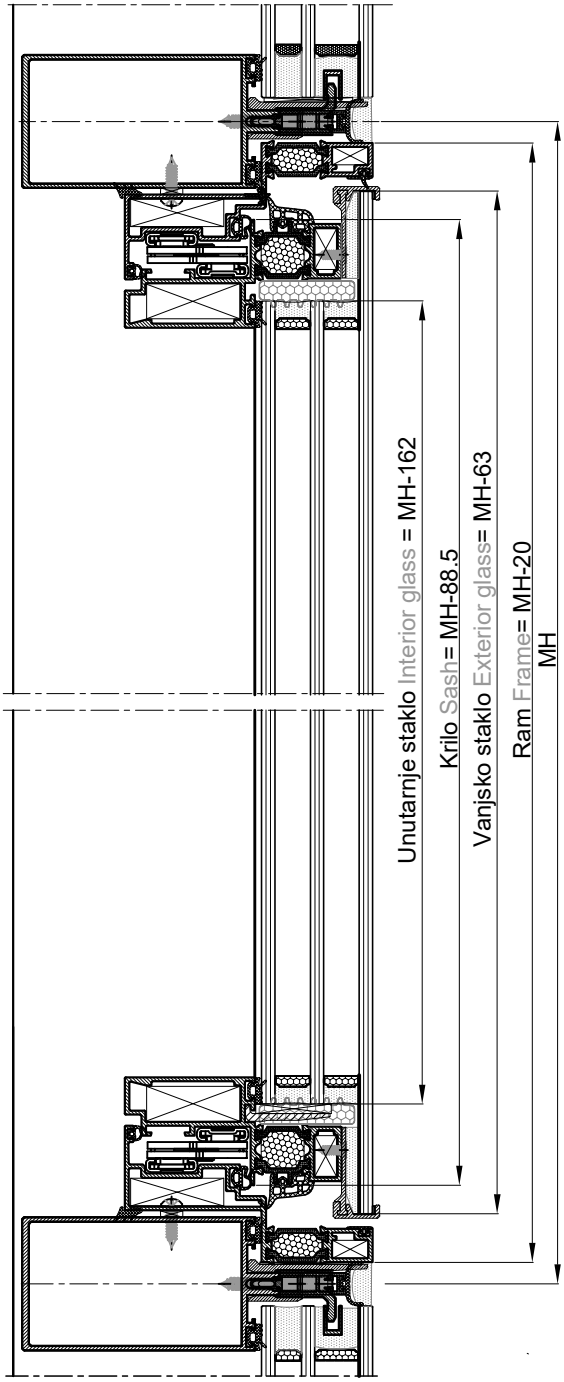


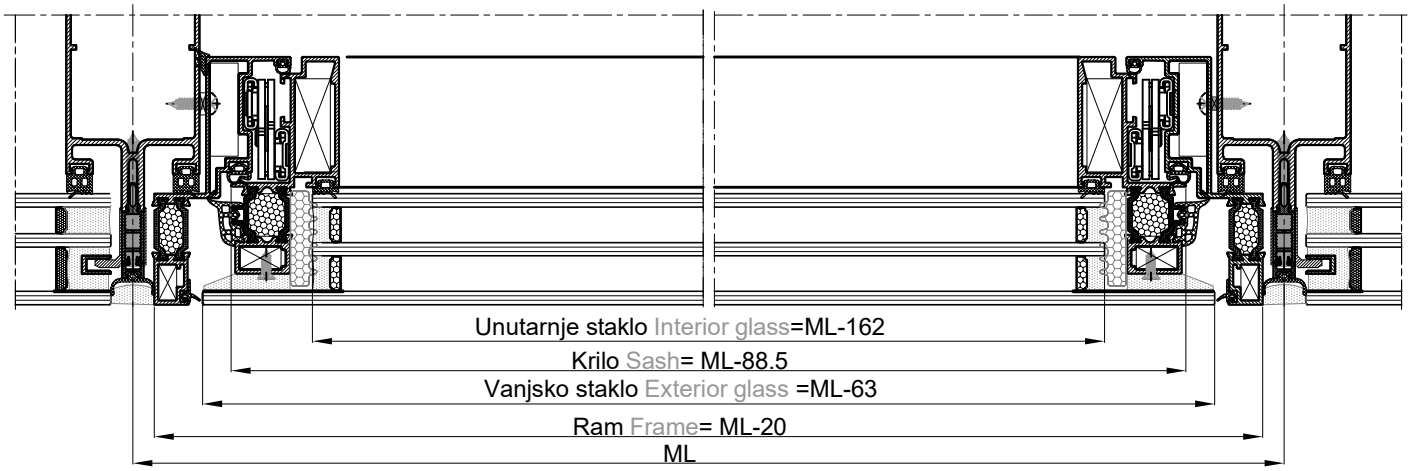


Izračun dimenzija - RAM FT-0169
- KRILO FT-0186
Cutting list - FRAME FT-0169
- SASH FT-0186

naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Profili Profiles				
Ram Frame FT-0169	.....	ML-20	2	45-45
Ram Frame FT-0169	.....	MH-20	2	45-45
Krilo Sash FT-0186	.....	ML-88.5	2	45-45
Krilo Sash FT-0186	.....	MH-88.5	2	45-45
Kutne spojnice Corner brackets				
Kutna spojnica Corner bracket 725.101	....		8	
Kutna spojnica Corner bracket 725.205	....		4	
Kutna spojnica Corner bracket 710.153	....		4	
Brtve Gaskets				
Brtva Gasket 351.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.002	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 328.001	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 351.003	.....	2H+L		
Brtva Gasket 351.004	.....	L		
Brtva Gasket 358.011	.....	2LkrLsa+2HkrHsa		
Brtva Gasket 318.002	.....	2L+2H		
Okovi i vijci Hardware and screws				
Izbor mehanizma za ručno paralelno otvaranje ovisno o dimenzijama otvora - prema shemama okova str.502.08.007 do 501.06.013 Selection of hardware for manual paralel opening depends upon window dimensions - according to the shematic on pages 502.08.007 do 502.08.013				
Vijak Screw 433.043	.....	(2L+2H)/300		
Sig. držač Exterior glass support 521.041	..		4	
Staklo vanjsko Exterior glass	.....	(ML-63)x(MH-63)	1	
Staklo unutarnje Interior glass	.....	(ML-151)x(MH-151)	1	

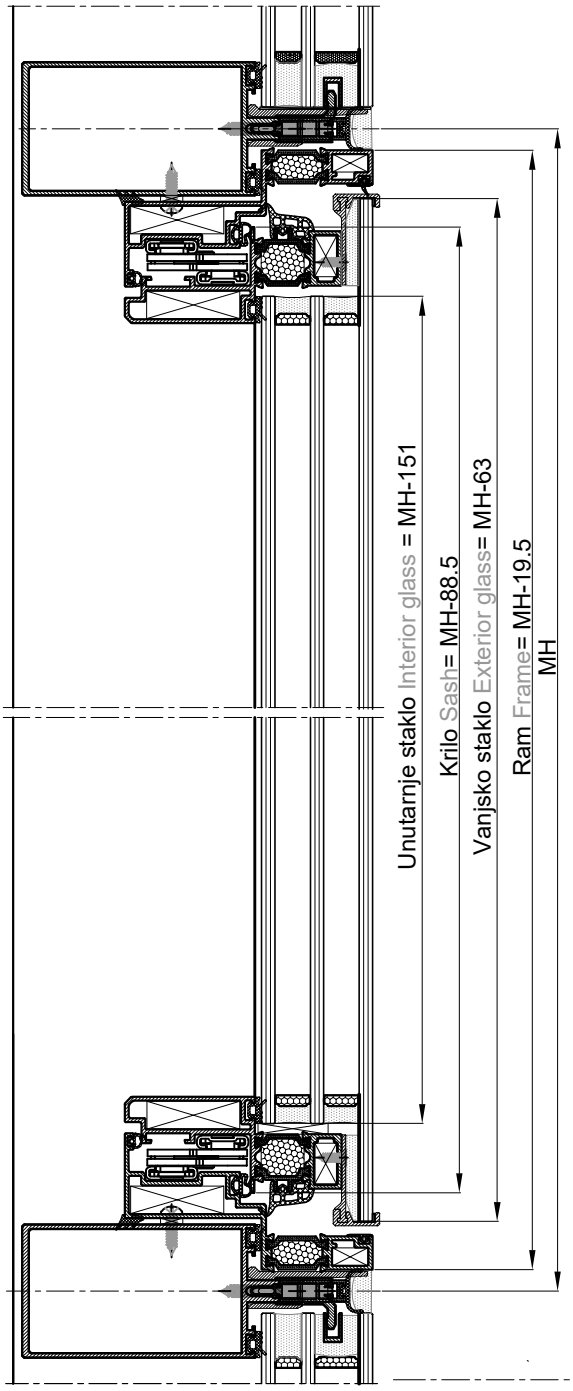

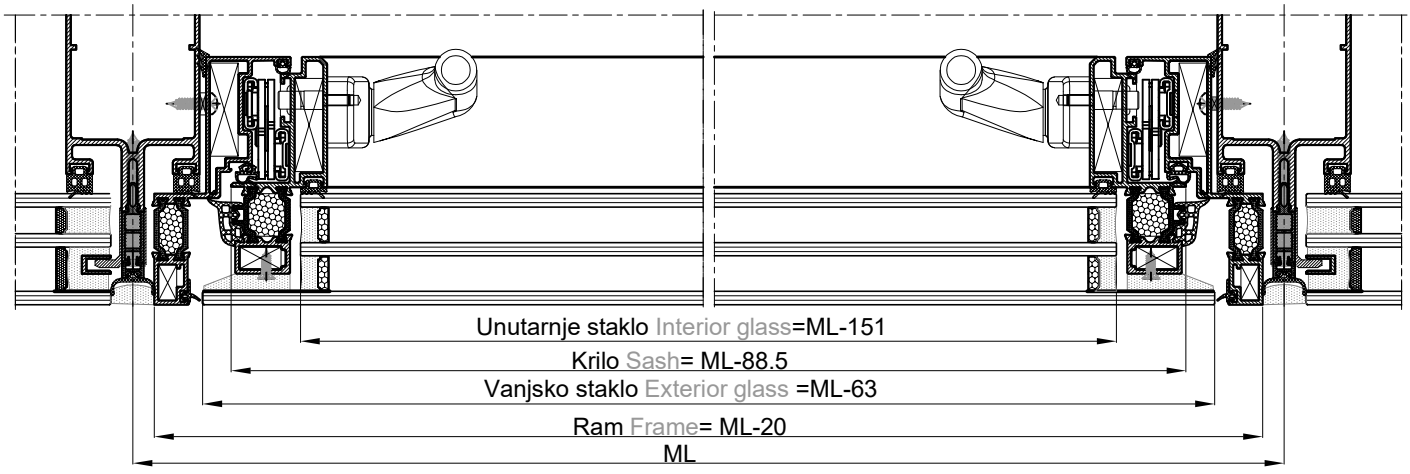

Izračun dimenzija - RAM FT-0125
- KRILO FT-0124
Cutting list - FRAME FT-0125
- SASH FT-0124

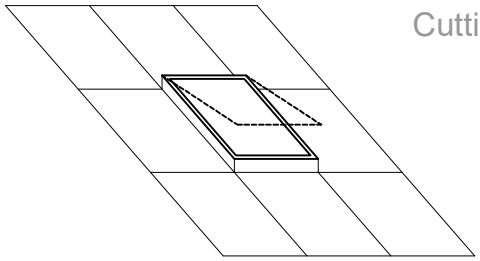



naziv/kod name/code	mjera dimension	kom. pcs.	pilanje sawing angle
Ram Frame FT-0125	ML-30	2	45-45
Ram Frame FT-0125	MH-30	2	45-45
Krilo Sash FT-0124	ML-101	2	45-45
Krilo Sash FT-0124	MH-101	2	45-45
Lajsna Glazing bead F-0796	ML-57.5	2	45-45
Lajsna Glazing bead F-0796	MH-57.5	2	45-45


OKOVI HARDWARE			kom pcs.	mjera dimension
725.006	kutnik	corner bracket	4	
725.007	kutnik	corner bracket	4	
725.005	kutnik	corner bracket	4	
725.201	kutnik	corner bracket	4	
725.202	kutnik	corner bracket	4	
111.006	šarka	hinge	2	
Elektropodizač (motor) prozora ELTRAL S80 (G-U) Spindle drive for window opening ELTRAL S80 (G-U)			1	

BRTVE GASKETS			
358.013	srednja brtva	central gasket	2L+2H
322.004	brtva na spoju profila	gasket on profile joint	2L+2H
358.011	brtva prema staklu unutarnja	interior glass gasket	2L+2H
311.001	brtva prema staklu vanjska	exterior glass gasket	2L+2H

STAKLO GLASS			
30 mm		1	(ML-174)x(MH-174)

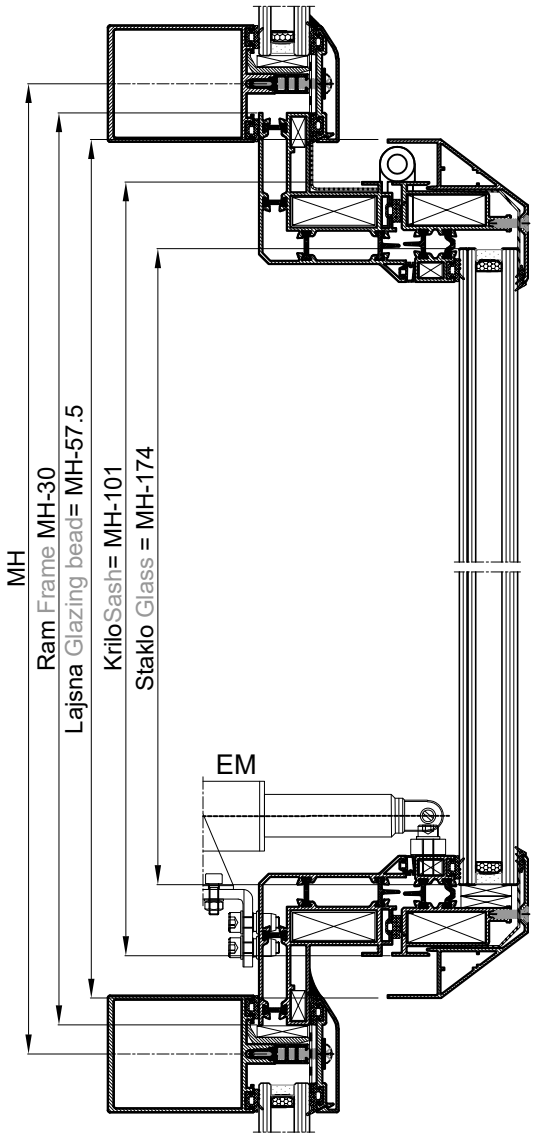

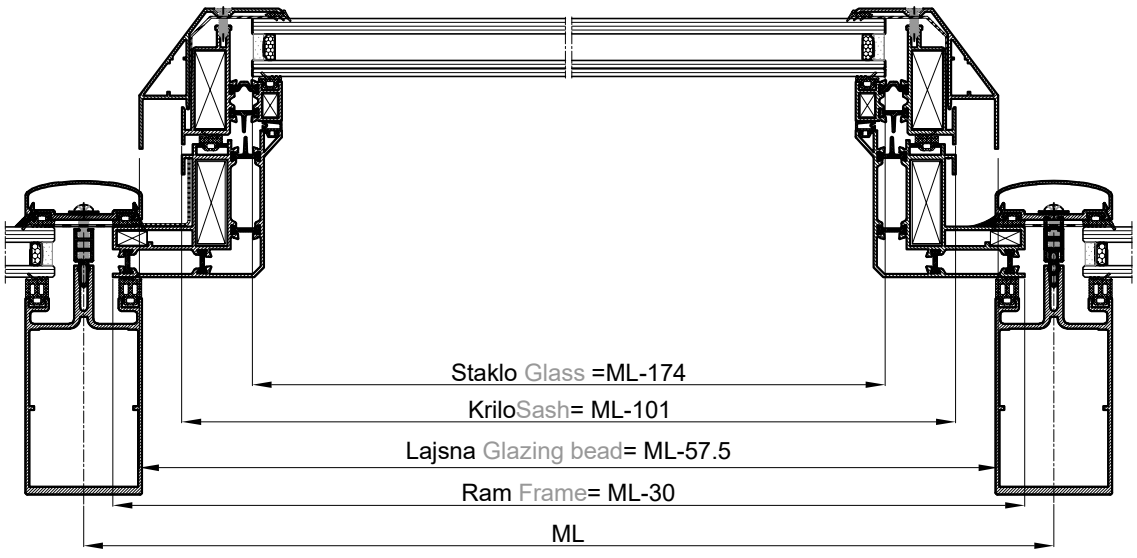

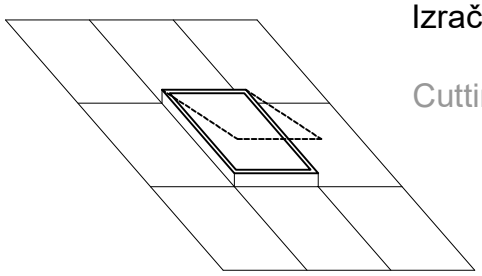


Izračun dimenzija - RAM FT-0125
- KRILO FT-0124
Cutting list - FRAME FT-0125
- SASH FT-0124


naziv/kod name/code		mjera dimension	kom. pcs.	pilanje sawing angle
Ram Frame FT-0125		ML-30	2	45-45
Ram Frame FT-0125		MH-30	2	45-45
Krilo Sash FT-0124		ML-101	2	45-45
Krilo Sash FT-0124		MH-101	2	45-45
Lajsna Glazing bead F-1572		ML-57.5	2	45-45
Lajsna Glazing bead F-1572		MH-57.5	2	45-45

OKOVI HARDWARE			kom pcs.	mjera dimension
725.006	kutnik	corner bracket	4	
725.007	kutnik	corner bracket	4	
725.005	kutnik	corner bracket	4	
725.201	kutnik	corner bracket	4	
725.208	kutnik	corner bracket	4	
111.006	šarka	hinge	2	
Elektropodizač (motor) prozora ELTRAL S80 (G-U) Spindle drive for window opening ELTRAL S80 (G-U)			1	

BRTVE GASKETS			
358.013	srednja brtva	central gasket	2L+2H
322.004	brtva na spoju profila	gasket on profile joint	2L+2H
358.013	brtva prema staklu unutarnja	interior glass gasket	2L+2H
311.001	brtva prema staklu vanjska	exterior glass gasket	2L+2H

STAKLO GLASS		
53 mm	1	(ML-174)x(MH-174)

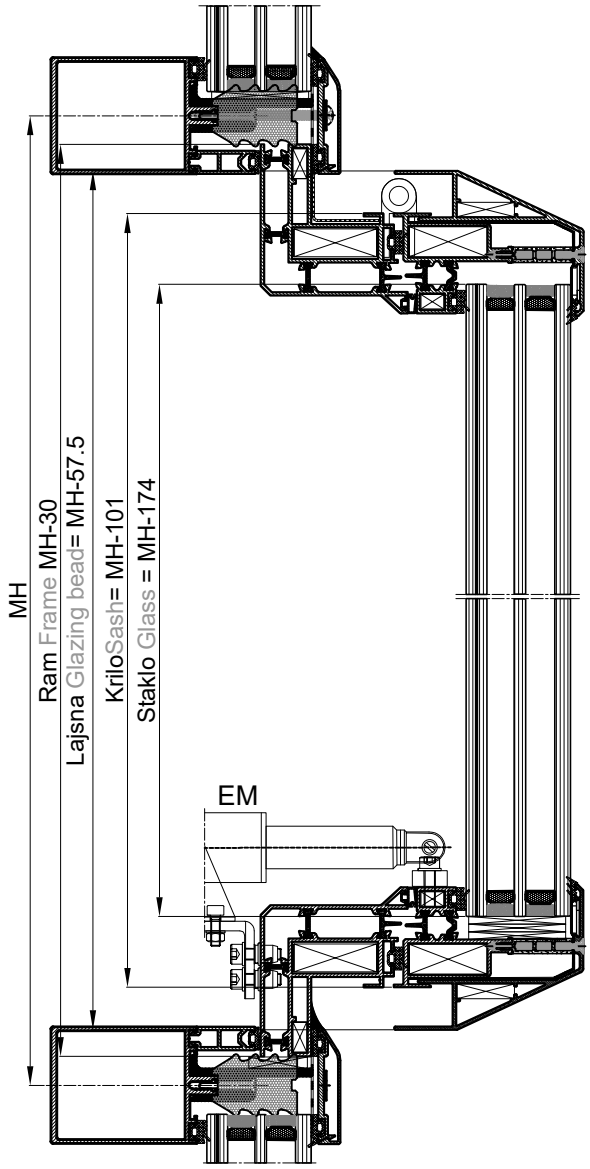

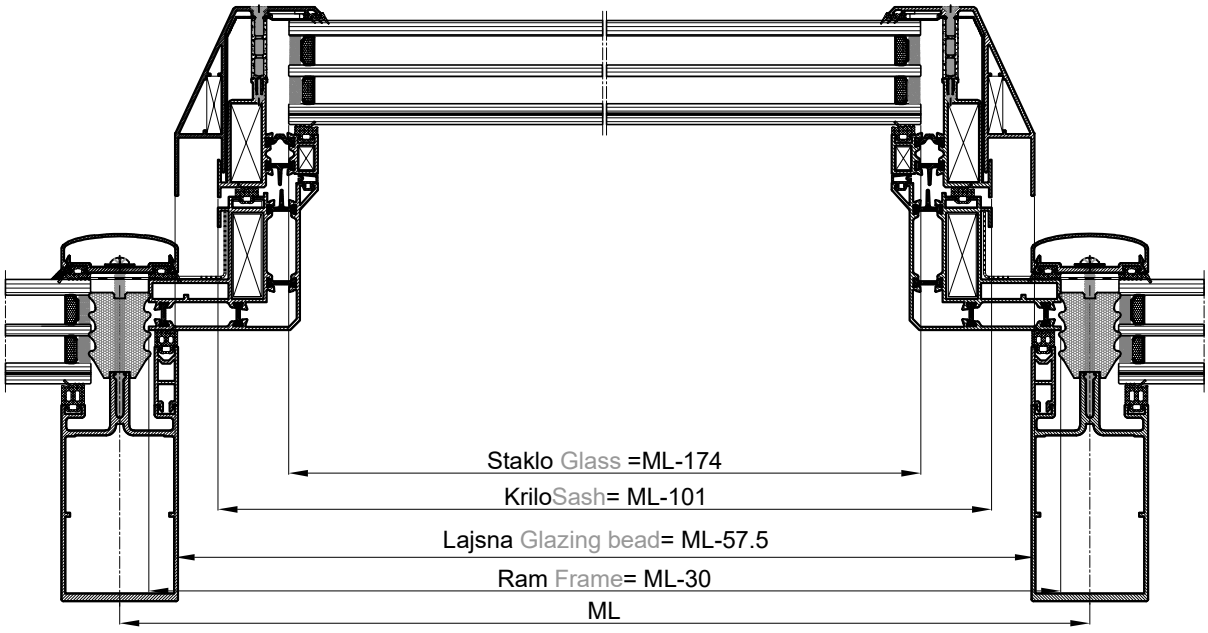

FEAL

Skenirajte QR kod i registrirajte se na partner.feal.ba

Scan the QR code and register on partner.feal.ba

60 K

Knjiga B / *Book B*

Listopad 2025. / November 2025

FEAL d.o.o.
Trnska cesta 146
88220 Široki Brijeg
Bosna i Hercegovina
Tel. +387 39 704-269; 705-807; 705-636
Fax. +387 39 704-358
info@feal.ba
www.feal.ba